FCC RF Test Report

APPLICANT	:	CT Asia
EQUIPMENT	:	Smartphone
BRAND NAME	:	BLU
MODEL NAME	:	LIFE ONE
MARKETING NAME	:	LIFE ONE
FCC ID	:	YHLBLULIFEONE50
STANDARD	:	FCC Part 15 Subpart C §15.247
CLASSIFICATION	:	(DTS) Digital Transmission System

The product was received on Apr. 04, 2015 and testing was completed on Apr. 25, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

Testing Laboratory
2353

SPORTON INTERNATIONAL (SHENZHEN) INC.
1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China

TABLE OF CONTENTS

REVISION HISTORY **3**

SUMMARY OF TEST RESULT **4**

1 GENERAL DESCRIPTION **5**

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification subjective to this standard 6
1.5 Modification of EUT 6
1.6 Testing Location 7
1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **8**

2.1 Carrier Frequency Channel 8
2.2 Pre-Scanned RF Power 9
2.3 Test Mode 10
2.4 Connection Diagram of Test System 11
2.5 Support Unit used in test configuration and system 12
2.6 EUT Operation Test Setup 12
2.7 Measurement Results Explanation Example 13

3 TEST RESULT **14**

3.1 6dB and 99% Bandwidth Measurement 14
3.2 Output Power Measurement 16
3.3 Power Spectral Density Measurement 18
3.4 Conducted Band Edges and Spurious Emission Measurement 20
3.5 Radiated Band Edges and Spurious Emission Measurement 33
3.6 AC Conducted Emission Measurement 37
3.7 Antenna Requirements 41

4 LIST OF MEASURING EQUIPMENT **42**

5 UNCERTAINTY OF EVALUATION **43**

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS

APPENDIX C. SETUP PHOTOGRAPHS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR540401C	Rev. 01	Initial issue of report	May 20, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-210 A8.4	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.36 dB at 120.210 MHz
3.6	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 10.05 dB at 2.330 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

CT Asia
Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

1.2 Manufacturer

Tinno Mobile Technology Corp.
4/F, H-3 Building, OCT Eastern industrial Park, No.1 Xiang Shan East Road, Nan Shan District, Shenzhen, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	BLU
Model Name	LIFE ONE
Marketing Name	LIFE ONE
FCC ID	YHLBLULIFEONE50
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/LTE WLAN2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0+EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 353919026682223/353924026682223 Conduction: 353919026681811/353924026681811 Radiation: 353924027113038/353924027125032
HW Version	V1.0
SW Version	BLU_LIFEONE_V04_GENERIC
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 16.77 dBm (0.0475 W) 802.11g : 22.05 dBm (0.1603 W) 802.11n HT20 : 21.12 dBm (0.1294 W) 802.11n HT40 : 21.09 dBm (0.1285 W)
99% Occupied Bandwidth	802.11b : 12.35MHz 802.11g : 18.60MHz 802.11n HT20 : 19.35MHz 802.11n HT40 : 36.90MHz
Antenna Type/Gain	802.11b/g/n : PIFA Antenna with gain 2.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	**Sporton Site No.**	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	**Sporton Site No.**	**FCC/IC Registration No.**
	03CH01-SZ	831040/4086F

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.10-2013
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	**16.77**	CH 01	16.64	16.71	16.69
CH 06	2437 MHz	14.16				
CH 11	2462 MHz	16.19				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	21.72	CH 11	21.96	21.98	21.95	22.02	22.01	21.98	22.03
CH 06	2437 MHz	20.56								
CH 11	2462 MHz	**22.05**								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	20.60	CH 11	21.08	21.05	21.06	21.05	21.10	21.04	21.01
CH 06	2437 MHz	19.95								
CH 11	2462 MHz	**21.12**								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	20.48	CH 09	21.08	21.05	21.06	21.04	20.98	20.96	21.04
CH 06	2437 MHz	20.65								
CH 09	2452 MHz	**21.09**								

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performance with Adapter, Earphone, and USB Cable.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

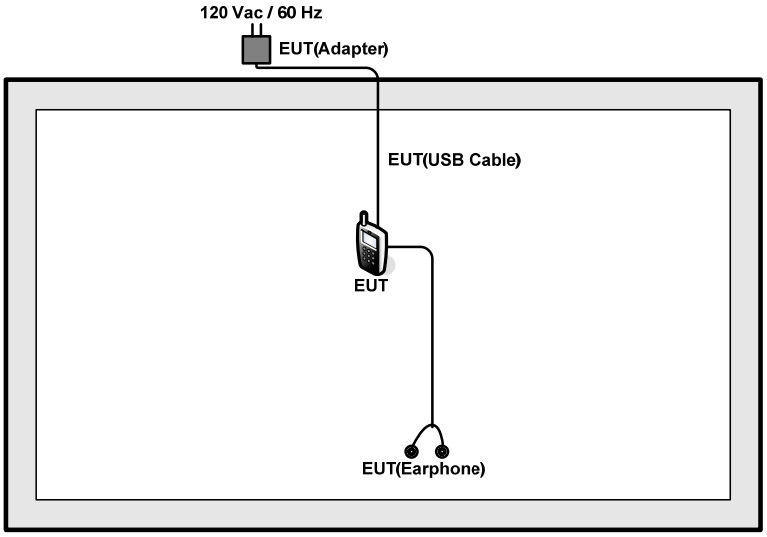

<AC Conducted Emission Mode>

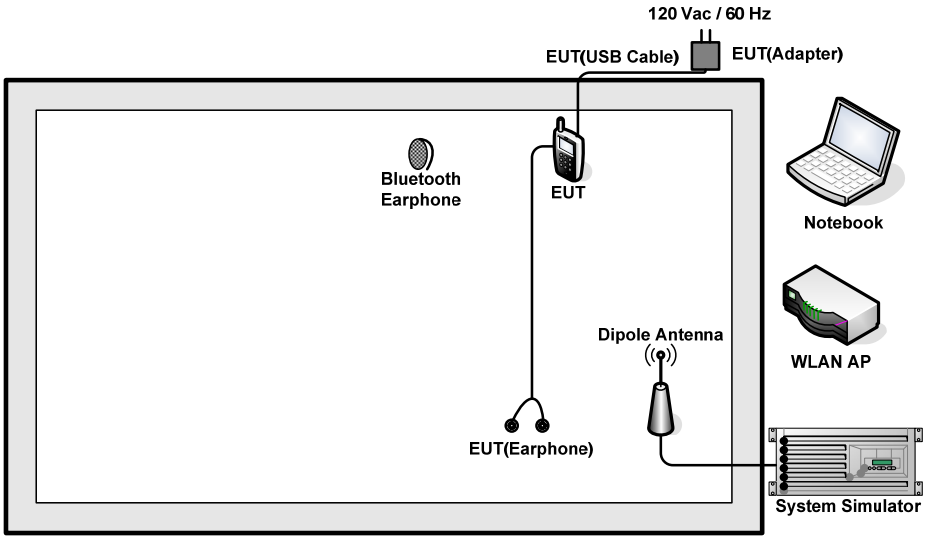

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-815	KA2IR815A1	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	E540	PRC4	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 5.0 + 10 = 15.0 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

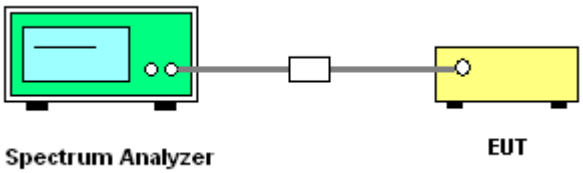

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

Minimum 6dB Bandwidth	Maximum 99% Occupied Bandwidth
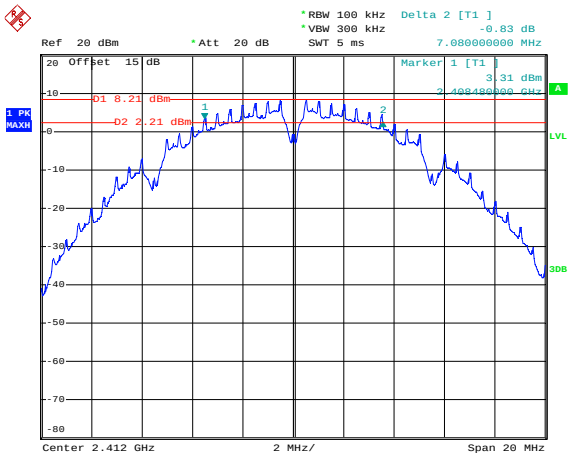 Date: 15.APR.2015 22:37:49	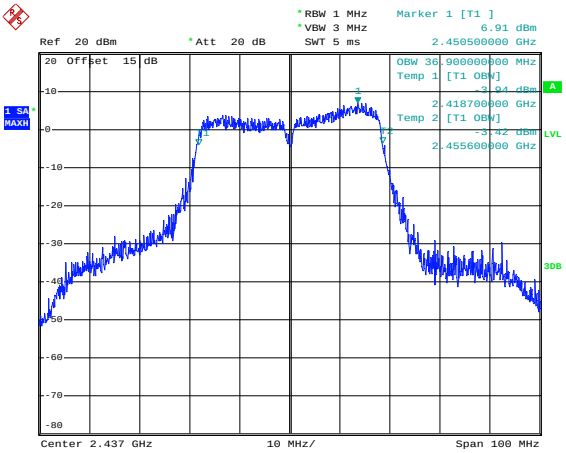 Date: 16.APR.2015 00:04:24

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

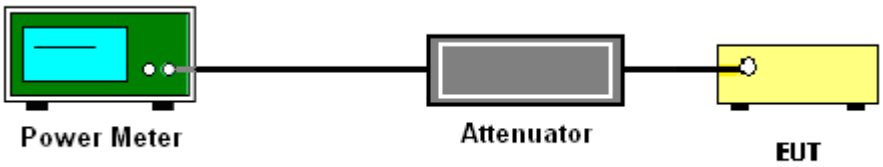

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

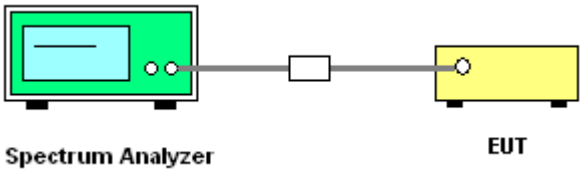

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

Worst Case Power Density (dBm/3kHz)

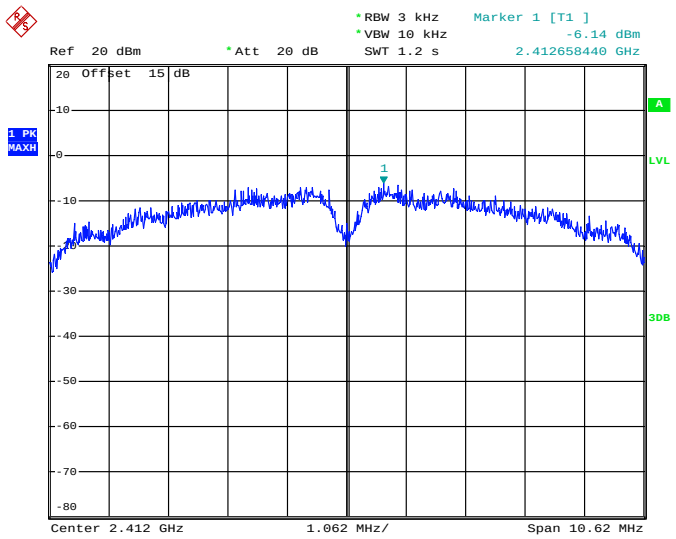

Date: 15.APR.2015 22:38:17

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

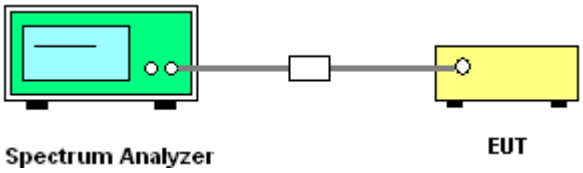

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	**Temperature :**	21~25℃
Test Band :	2.4GHz Low	**Relative Humidity :**	51~54%
Test Channel :	01	**Test Engineer :**	Mygai Chen

WLAN 802.11b Channel 01

100kHz PSD reference Level

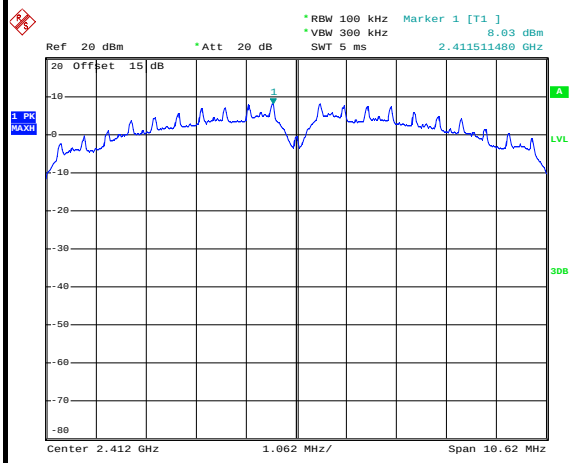

Date: 15.APR.2015 22:39:04

Low Channel Plot

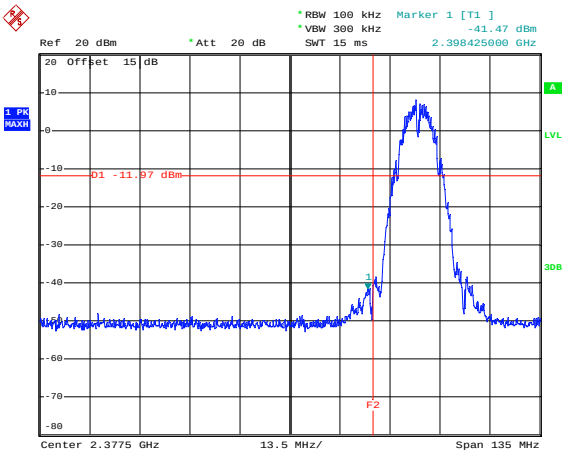

Date: 15.APR.2015 22:49:52

Spurious Emission 30MHz~3GHz

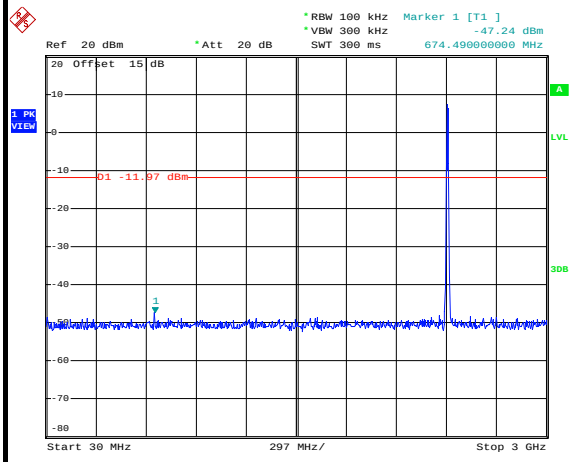

Date: 15.APR.2015 22:42:23

Spurious Emission 2GHz~25GHz

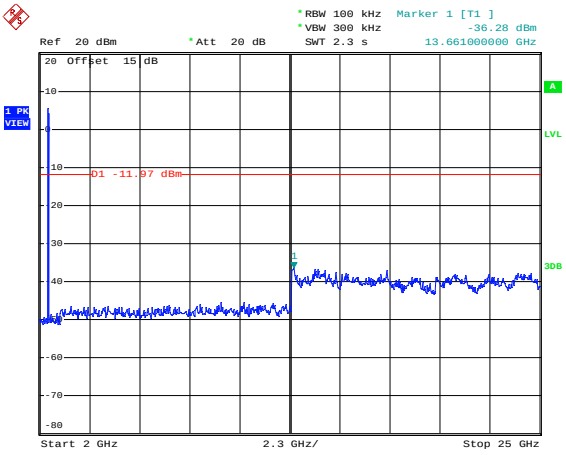

Date: 15.APR.2015 22:42:41

Test Mode :	802.11b	**Temperature :**	21~25℃
Test Band :	2.4GHz Mid	**Relative Humidity :**	51~54%
Test Channel :	06	**Test Engineer :**	Mygai Chen

WLAN 802.11b Channel 06

100kHz PSD reference Level

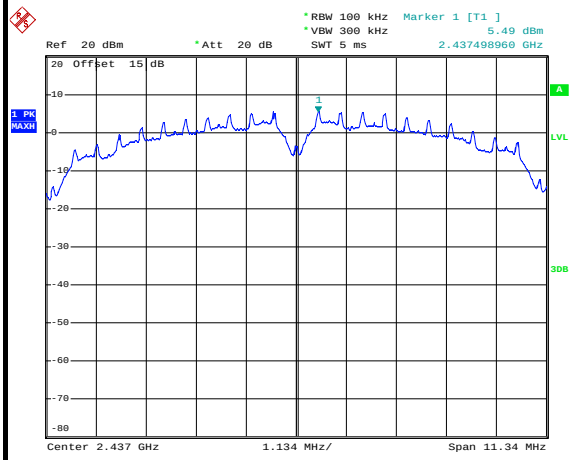

Date: 15.APR.2015 22:55:03

Spurious Emission 30MHz~3GHz

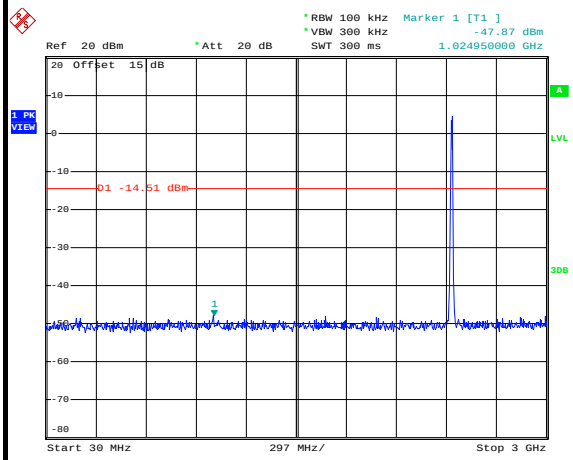

Date: 15.APR.2015 22:57:15

Spurious Emission 2GHz~25GHz

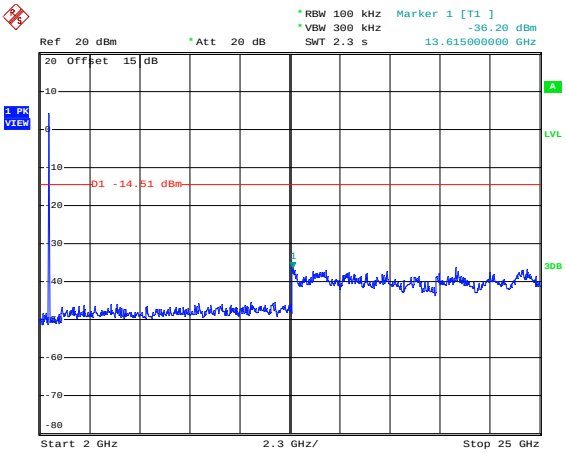

Date: 15.APR.2015 22:57:33

Test Mode :	802.11b	**Temperature :**	21~25℃
Test Band :	2.4GHz High	**Relative Humidity :**	51~54%
Test Channel :	11	**Test Engineer :**	Mygai Chen

WLAN 802.11b Channel 11

100kHz PSD reference Level

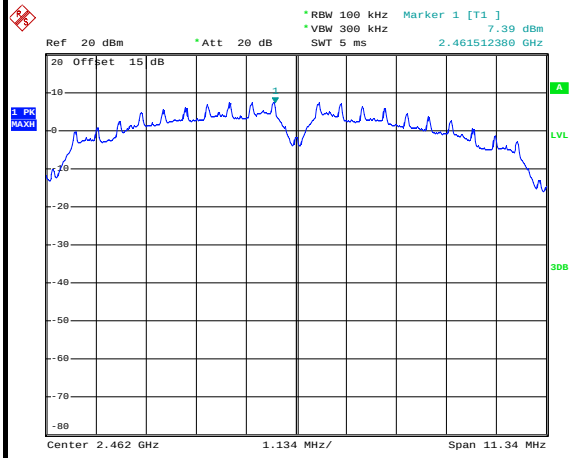

Date: 15.APR.2015 23:02:42

High Channel Plot

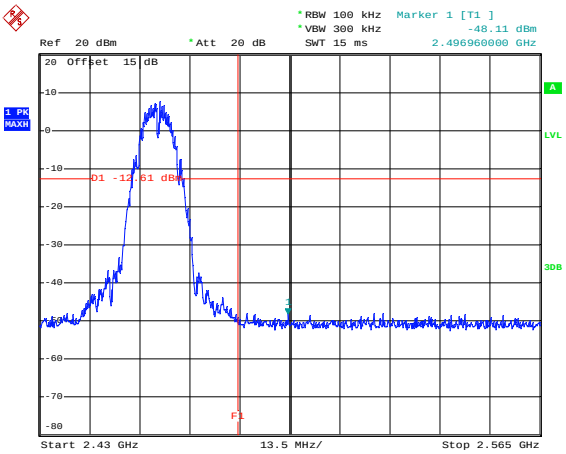

Date: 15.APR.2015 23:03:09

Spurious Emission 30MHz~3GHz

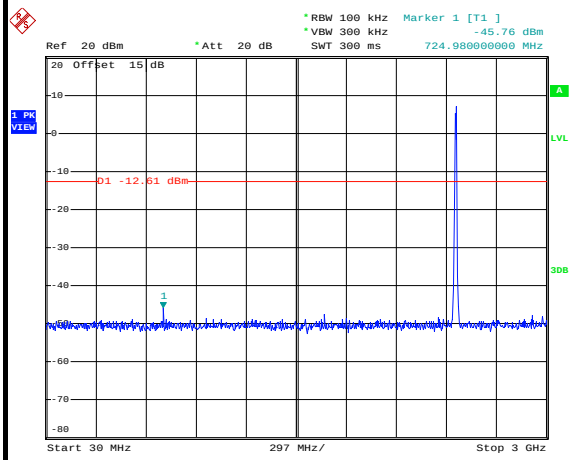

Date: 15.APR.2015 23:04:36

Spurious Emission 2GHz~25GHz

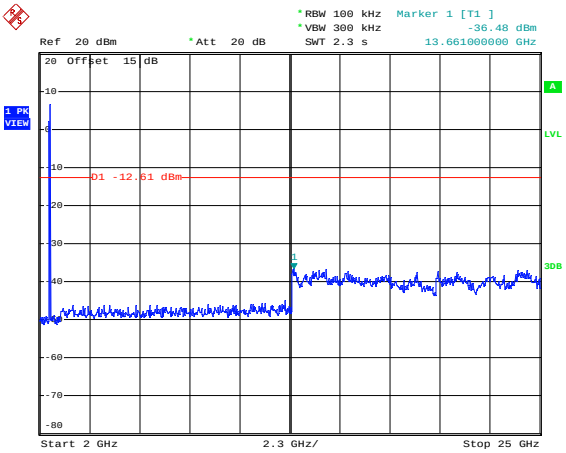

Date: 15.APR.2015 23:04:53

Test Mode :	802.11g	**Temperature :**	21~25℃
Test Band :	2.4GHz Low	**Relative Humidity :**	51~54%
Test Channel :	01	**Test Engineer :**	Mygai Chen

WLAN 802.11g Channel 01

100kHz PSD reference Level

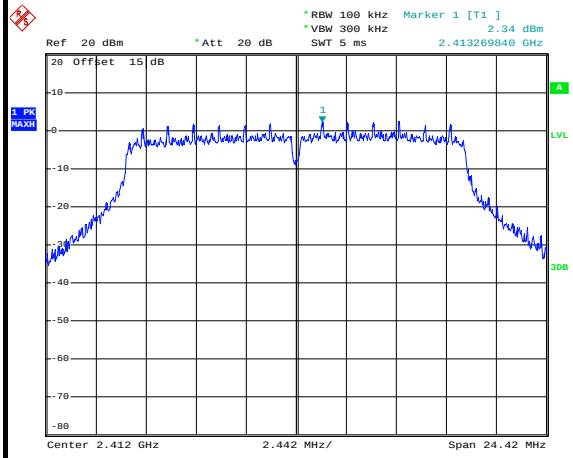

Date: 15.APR.2015 23:19:34

Low Channel Plot

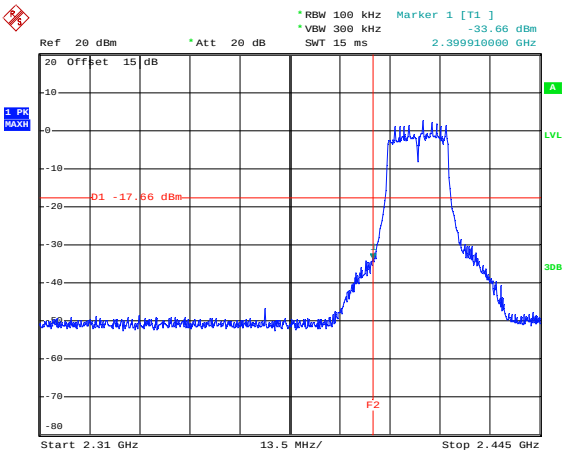

Date: 15.APR.2015 23:20:01

Spurious Emission 30MHz~3GHz

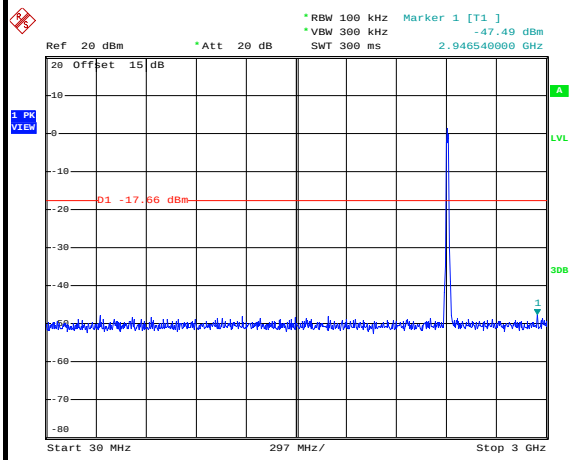

Date: 15.APR.2015 23:21:25

Spurious Emission 2GHz~25GHz

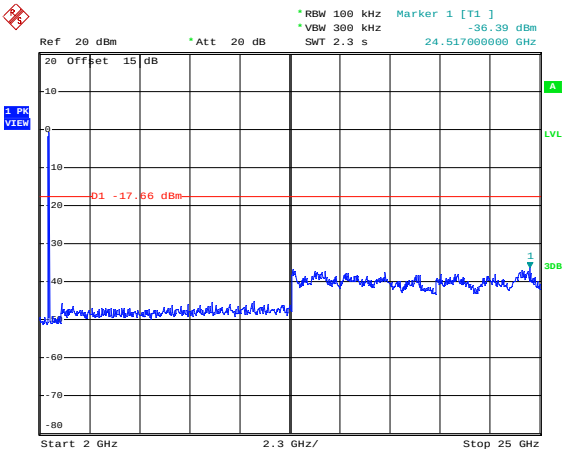

Date: 15.APR.2015 23:21:42

Test Mode :	802.11g	**Temperature :**	21~25℃
Test Band :	2.4GHz Mid	**Relative Humidity :**	51~54%
Test Channel :	06	**Test Engineer :**	Mygai Chen

WLAN 802.11g Channel 06

100kHz PSD reference Level

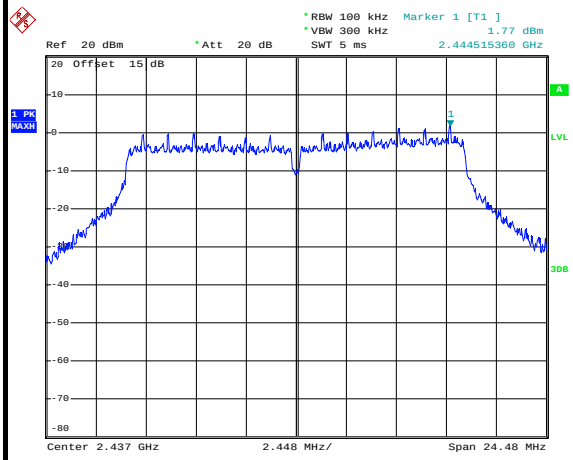

Date: 15.APR.2015 23:14:21

Spurious Emission 30MHz~3GHz

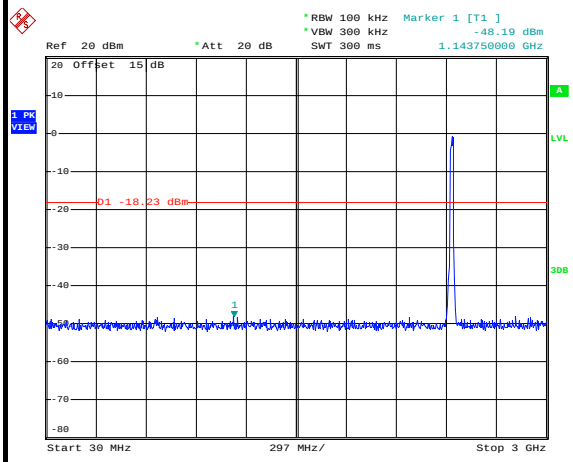

Date: 15.APR.2015 23:15:45

Spurious Emission 2GHz~25GHz

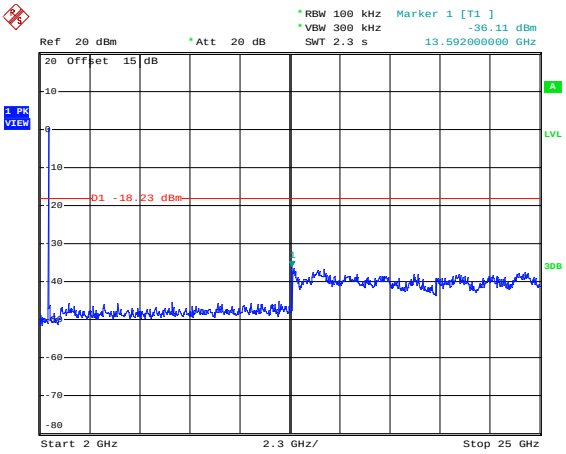

Date: 15.APR.2015 23:16:02

Test Mode :	802.11g	**Temperature :**	21~25℃
Test Band :	2.4GHz High	**Relative Humidity :**	51~54%
Test Channel :	11	**Test Engineer :**	Mygai Chen

WLAN 802.11g Channel 11

100kHz PSD reference Level

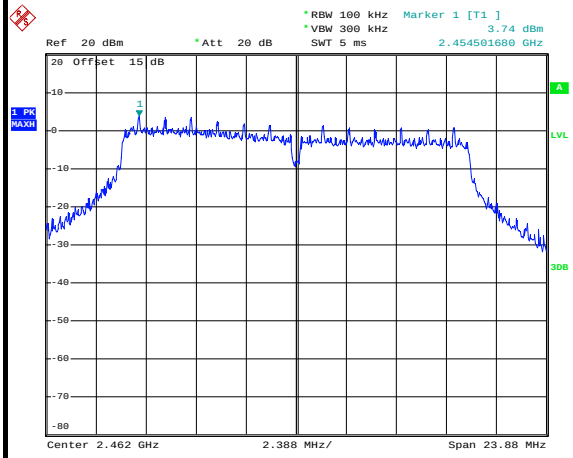

Date: 15.APR.2015 23:09:34

High Channel Plot

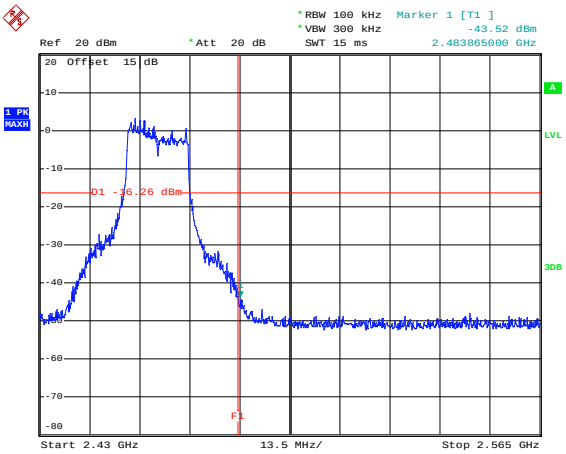

Date: 15.APR.2015 23:09:53

Spurious Emission 30MHz~3GHz

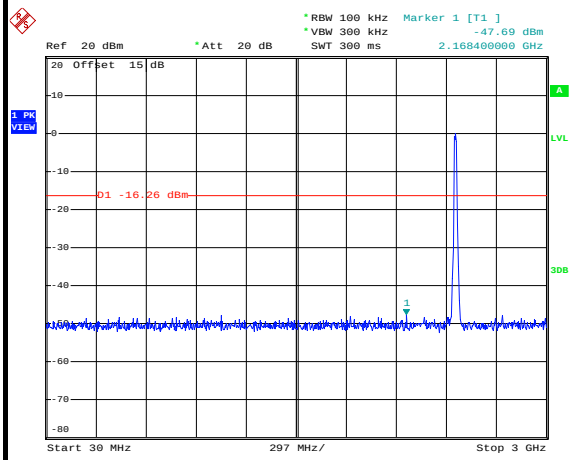

Date: 15.APR.2015 23:10:41

Spurious Emission 2GHz~25GHz

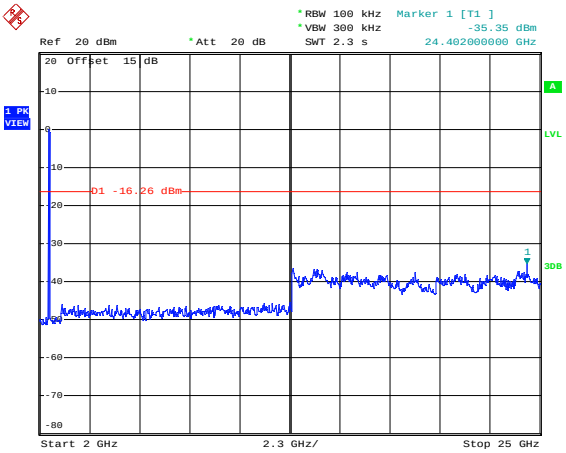

Date: 15.APR.2015 23:10:59

Test Mode :	802.11n HT20	**Temperature :**	21~25℃
Test Band :	2.4GHz Low	**Relative Humidity :**	51~54%
Test Channel :	01	**Test Engineer :**	Mygai Chen

WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

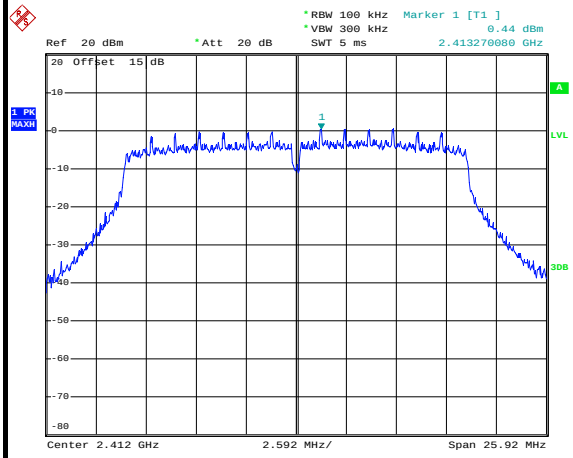

Date: 15.APR.2015 23:29:39

Low Channel Plot

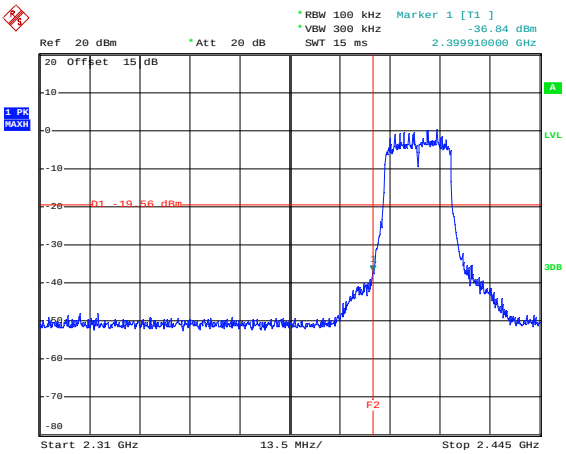

Date: 15.APR.2015 23:32:35

Spurious Emission 30MHz~3GHz

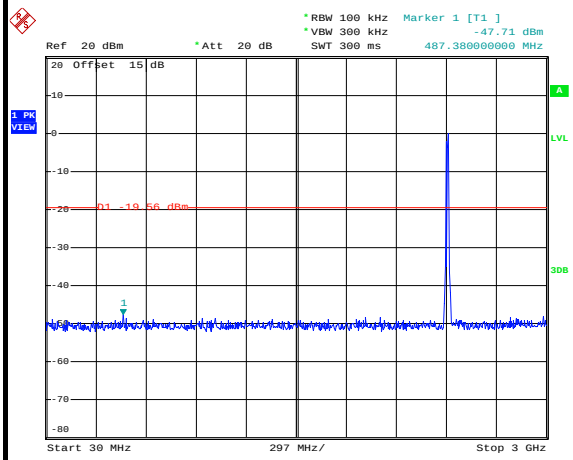

Date: 15.APR.2015 23:33:26

Spurious Emission 2GHz~25GHz

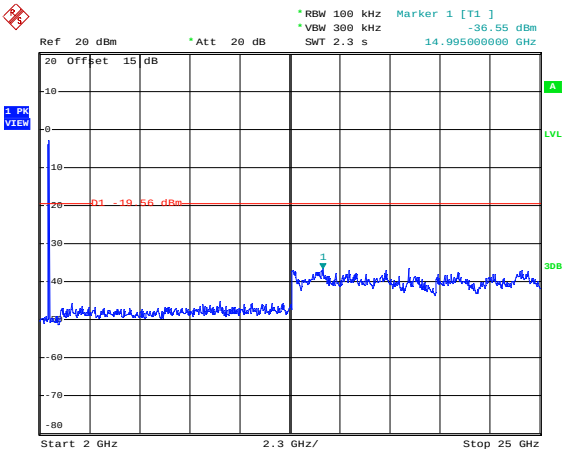

Date: 15.APR.2015 23:33:44

Test Mode :	802.11n HT20	**Temperature :**	21~25℃
Test Band :	2.4GHz Mid	**Relative Humidity :**	51~54%
Test Channel :	06	**Test Engineer :**	Mygai Chen

WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

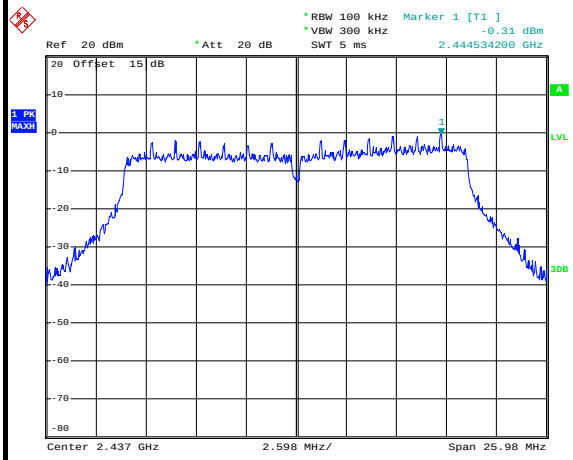

Date: 15.APR.2015 23:39:02

Spurious Emission 30MHz~3GHz

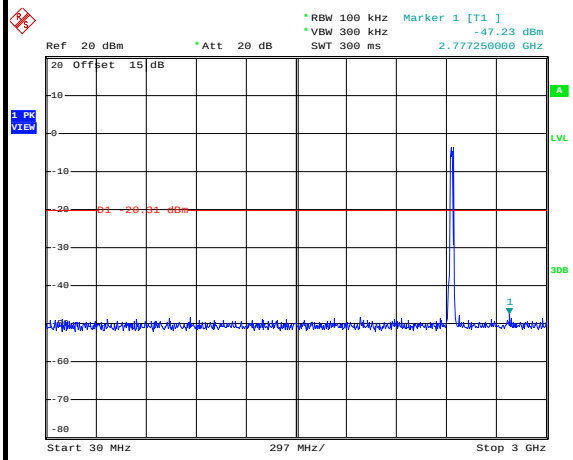

Date: 15.APR.2015 23:41:07

Spurious Emission 2GHz~25GHz

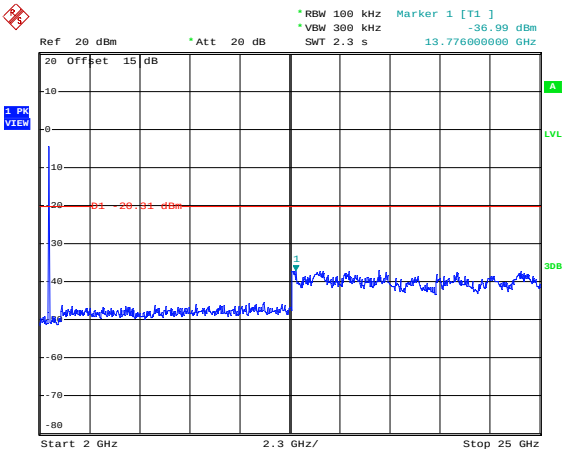

Date: 15.APR.2015 23:41:24

Test Mode :	802.11n HT20	**Temperature :**	21~25℃
Test Band :	2.4GHz High	**Relative Humidity :**	51~54%
Test Channel :	11	**Test Engineer :**	Mygai Chen

WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

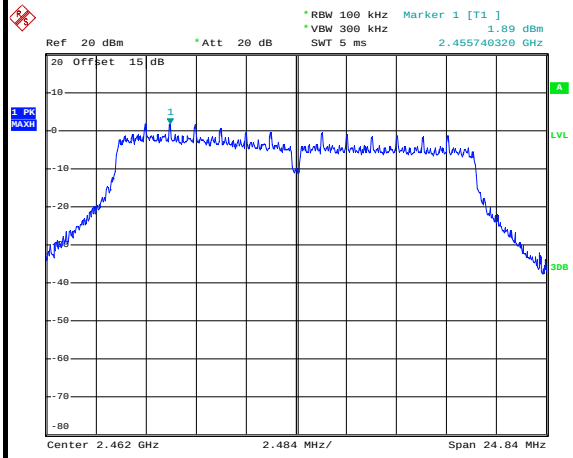

Date: 15.APR.2015 23:45:32

High Channel Plot

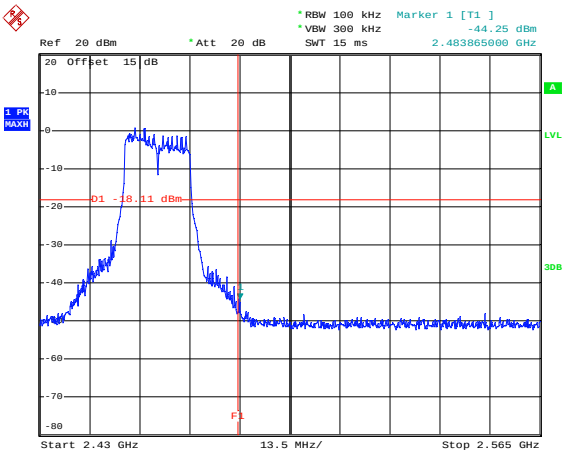

Date: 15.APR.2015 23:46:37

Spurious Emission 30MHz~3GHz

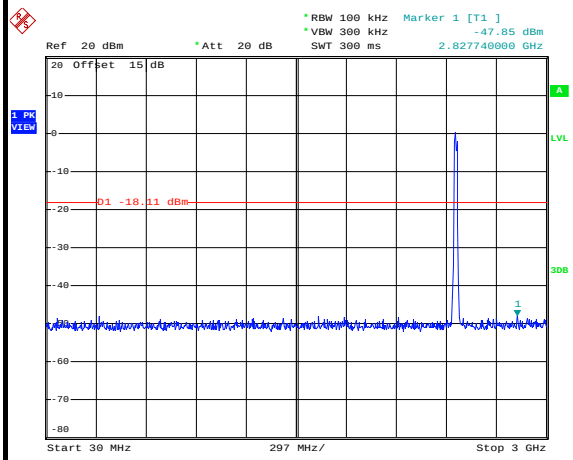

Date: 15.APR.2015 23:52:34

Spurious Emission 2GHz~25GHz

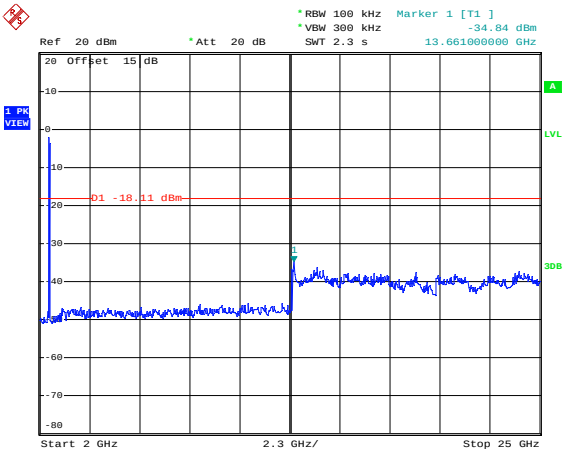

Date: 15.APR.2015 23:52:51

Test Mode :	802.11n HT40	**Temperature :**	21~25℃
Test Band :	2.4GHz Low	**Relative Humidity :**	51~54%
Test Channel :	03	**Test Engineer :**	Mygai Chen

WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

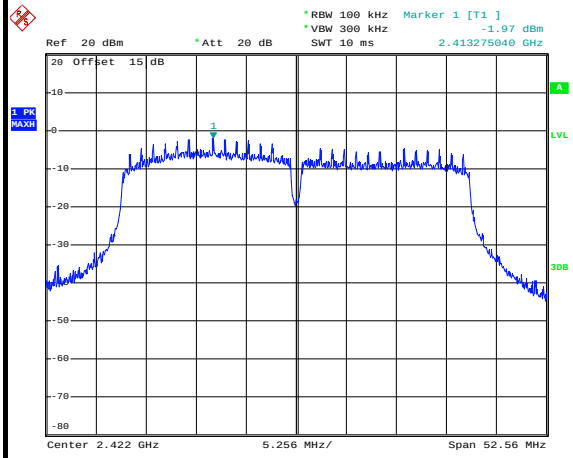

Date: 15.APR.2015 23:56:31

Low Channel Plot

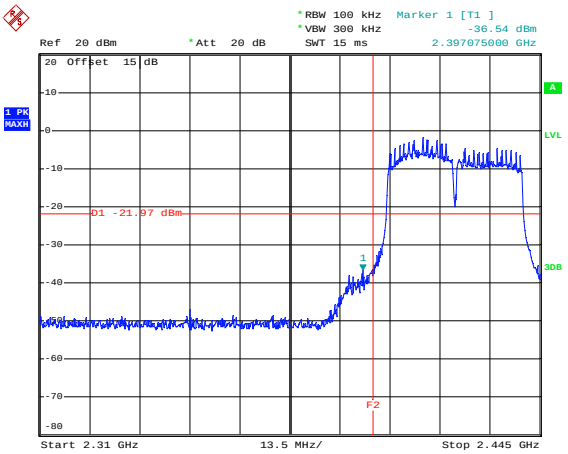

Date: 15.APR.2015 23:57:04

Spurious Emission 30MHz~3GHz

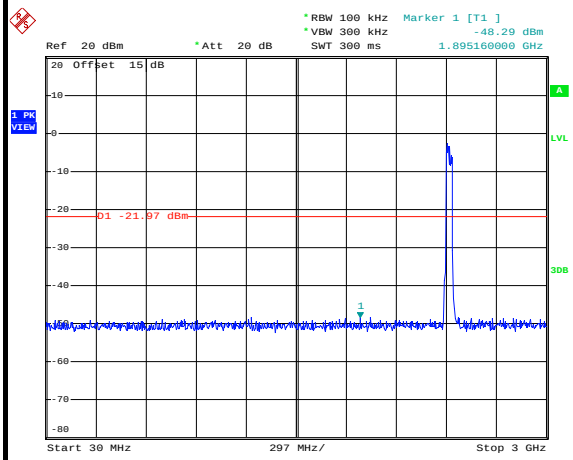

Date: 15.APR.2015 23:59:26

Spurious Emission 2GHz~25GHz

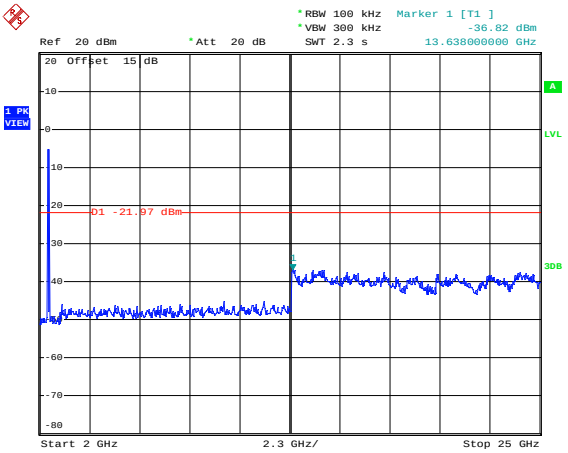

Date: 15.APR.2015 23:59:43

Test Mode :	802.11n HT40	**Temperature :**	21~25℃
Test Band :	2.4GHz Mid	**Relative Humidity :**	51~54%
Test Channel :	06	**Test Engineer :**	Mygai Chen

WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

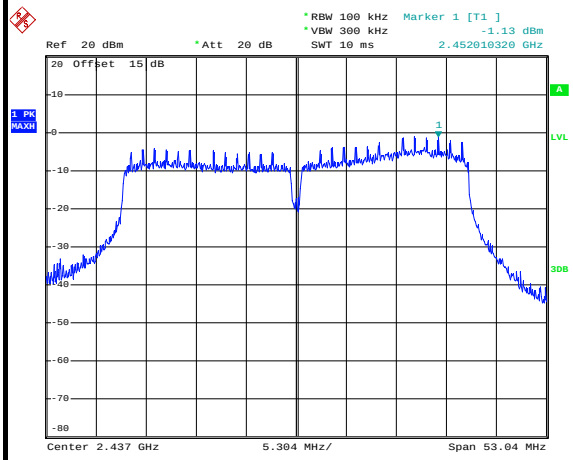

Date: 16.APR.2015 00:04:11

Spurious Emission 30MHz~3GHz

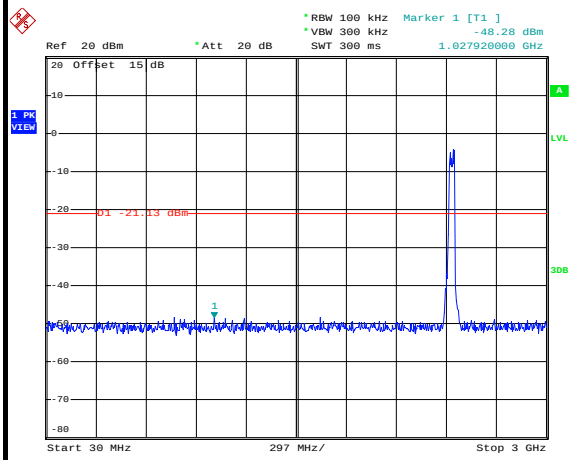

Date: 16.APR.2015 00:12:26

Spurious Emission 2GHz~25GHz

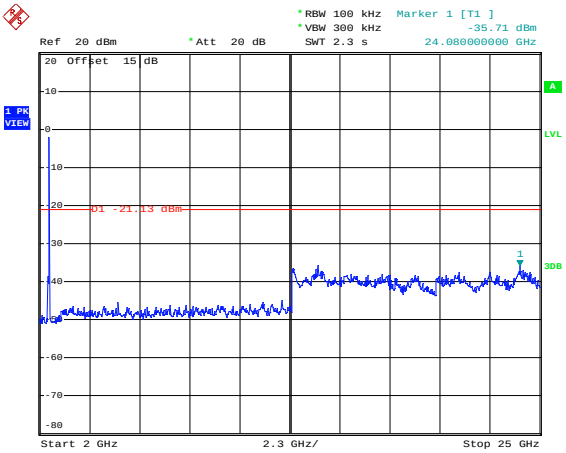

Date: 16.APR.2015 00:11:15

Test Mode :	802.11n HT40	**Temperature :**	21~25℃
Test Band :	2.4GHz High	**Relative Humidity :**	51~54%
Test Channel :	09	**Test Engineer :**	Mygai Chen

WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

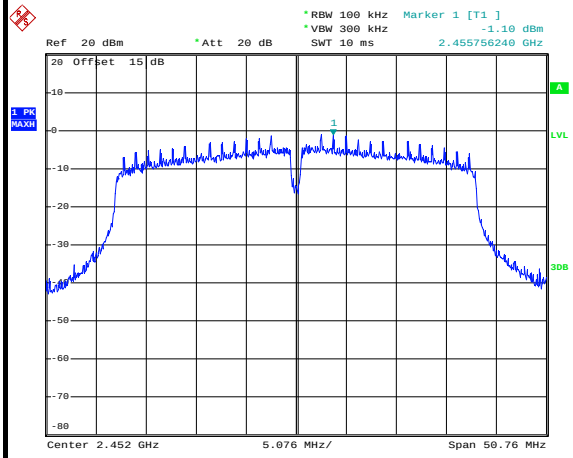

Date: 16.APR.2015 00:16:37

High Channel Plot

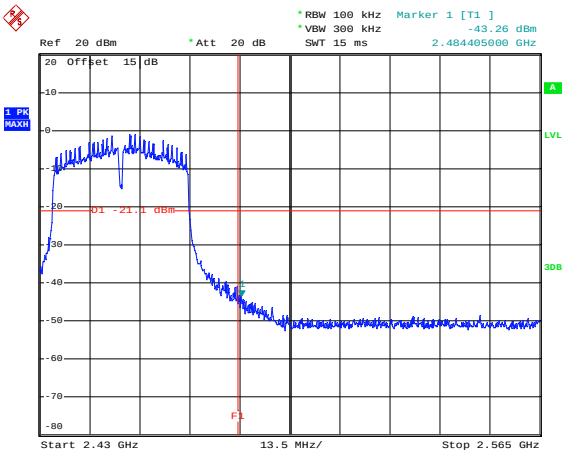

Date: 16.APR.2015 00:23:02

Spurious Emission 30MHz~3GHz

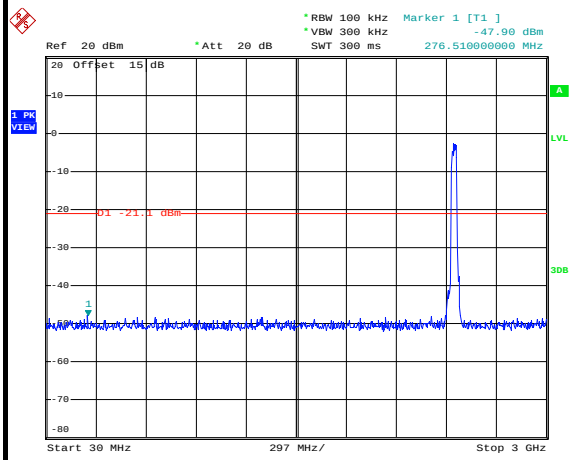

Date: 16.APR.2015 00:27:56

Spurious Emission 2GHz~25GHz

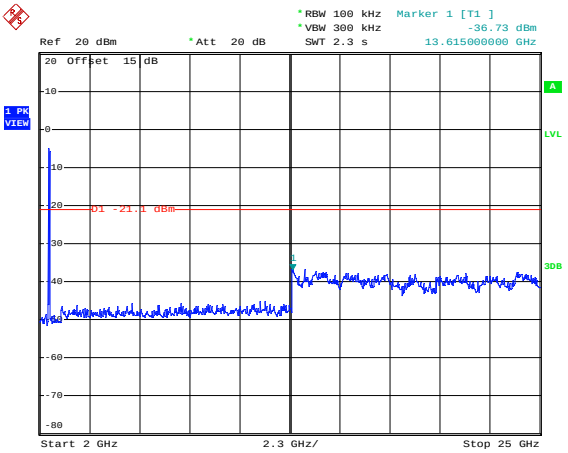

Date: 16.APR.2015 00:28:13

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
   (1) Span shall wide enough to fully capture the emission being measured;
   (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
   (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.
   For average measurement:
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.63	8.25	0.12	300Hz
802.11g	87.80	1.37	0.73	1kHz
2.4GHz 802.11n HT20	85.97	1.27	0.79	1kHz
2.4GHz 802.11n HT40	76.36	0.64	1.56	3kHz

3.5.4 Test Setup

For radiated emissions below 30MHz

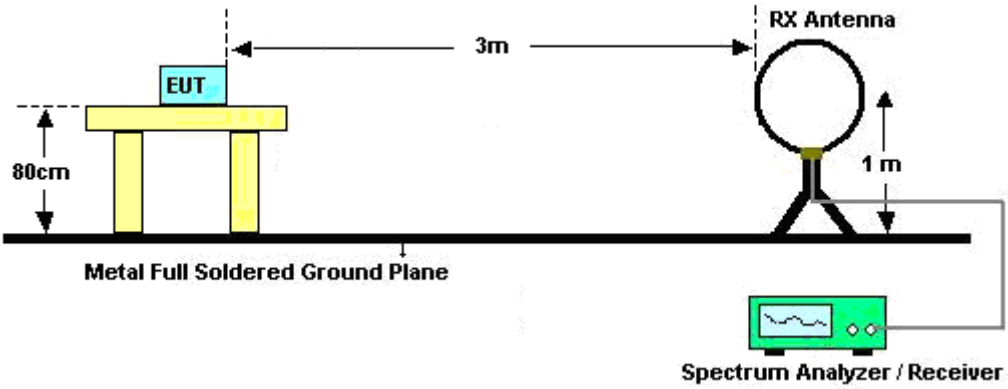

For radiated emissions from 30MHz to 1GHz

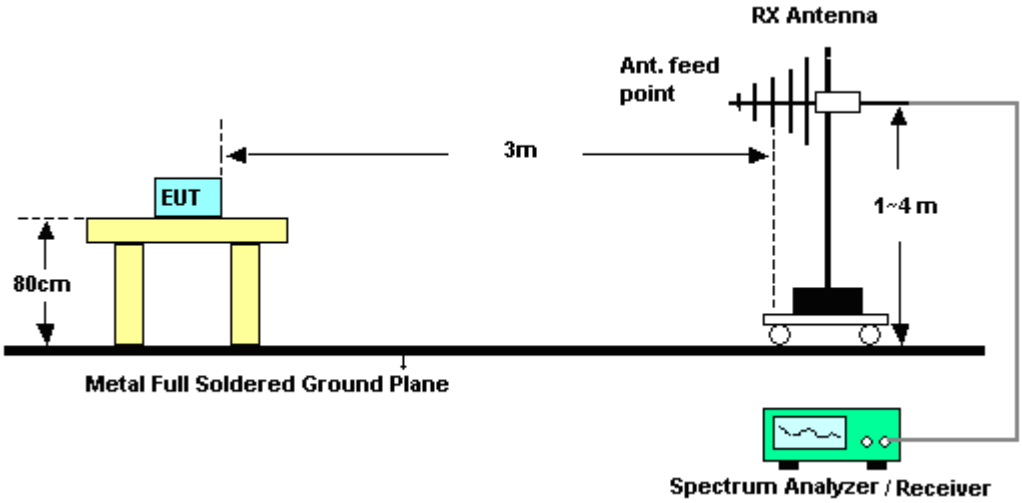

For radiated emissions above 1GHz

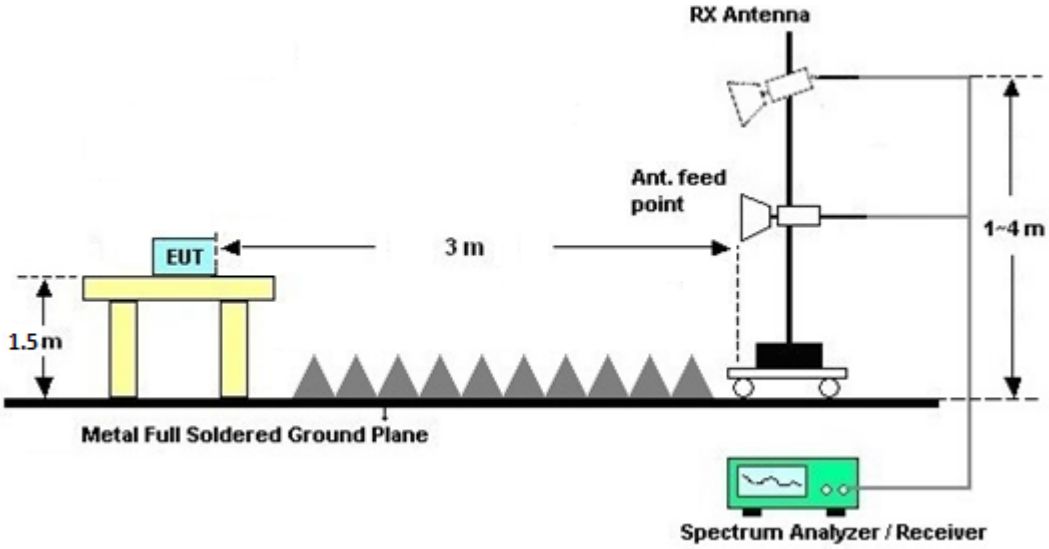

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

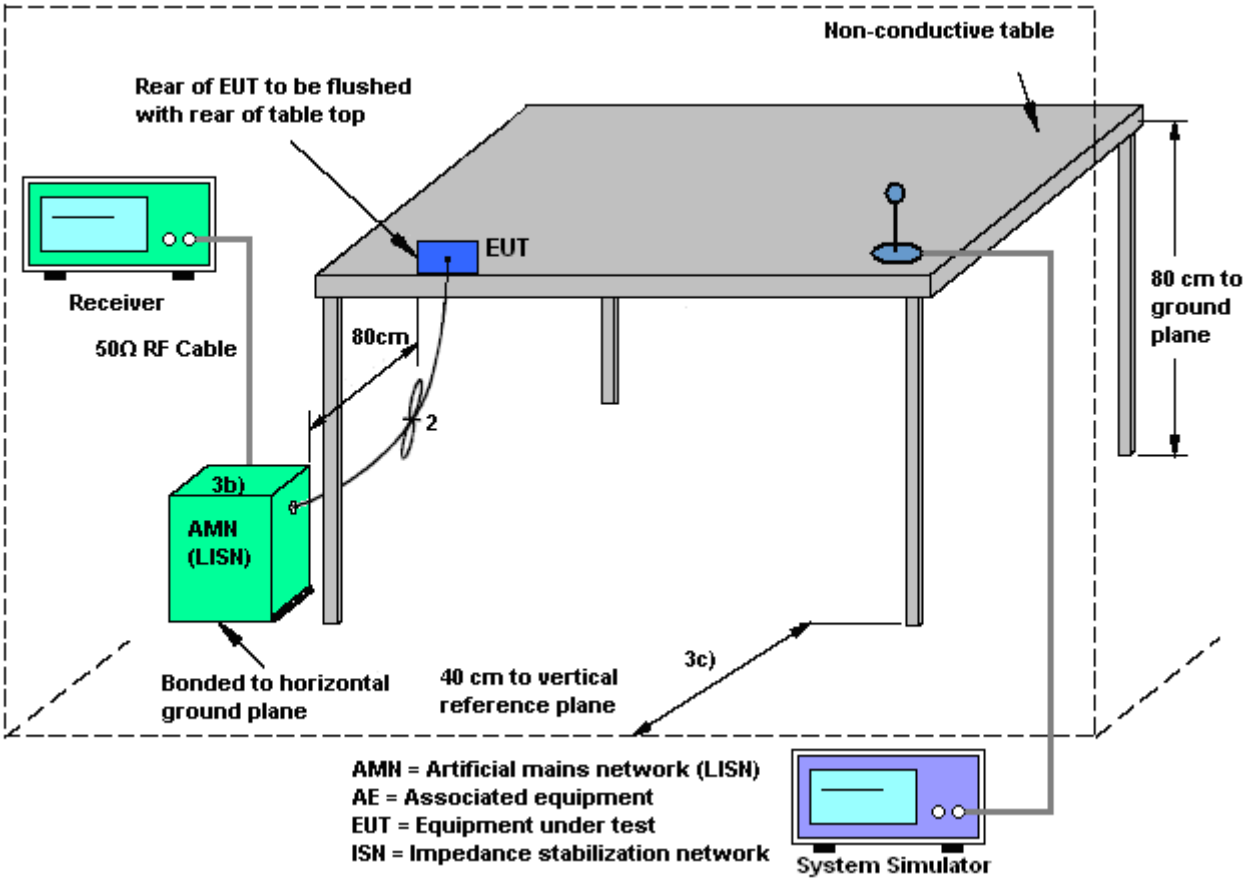

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	**Temperature :**	21~22℃
Test Engineer :	Jack Tian	**Relative Humidity :**	41~42%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

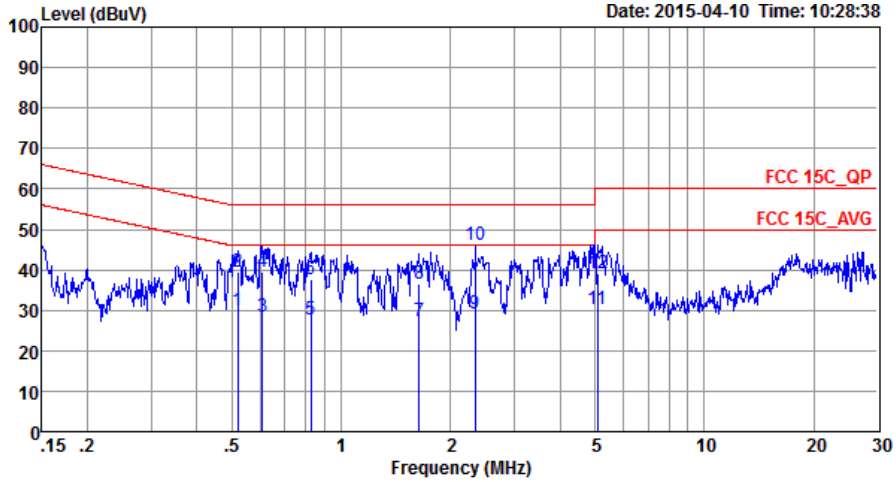

Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_20140304 LINE

Mode : Mode 1
IMEI : 353919026681811/353924026681811

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.52	29.84	-16.16	46.00	19.39	0.29	10.16	Average
2	0.52	39.64	-16.36	56.00	29.19	0.29	10.16	QP
3	0.61	28.28	-17.72	46.00	17.90	0.23	10.15	Average
4	0.61	39.58	-16.42	56.00	29.20	0.23	10.15	QP
5	0.83	27.57	-18.43	46.00	17.20	0.22	10.15	Average
6	0.83	37.77	-18.23	56.00	27.40	0.22	10.15	QP
7	1.64	27.31	-18.69	46.00	16.90	0.23	10.18	Average
8	1.64	36.61	-19.39	56.00	26.20	0.23	10.18	QP
9	2.33	29.15	-16.85	46.00	18.70	0.25	10.20	Average
10 *	2.33	45.95	-10.05	56.00	35.50	0.25	10.20	QP
11	5.08	30.16	-19.84	50.00	19.50	0.42	10.24	Average
12	5.08	39.06	-20.94	60.00	28.40	0.42	10.24	QP

Test Mode :	Mode 1	**Temperature :**	21~22℃
Test Engineer :	Jack Tian	**Relative Humidity :**	41~42%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

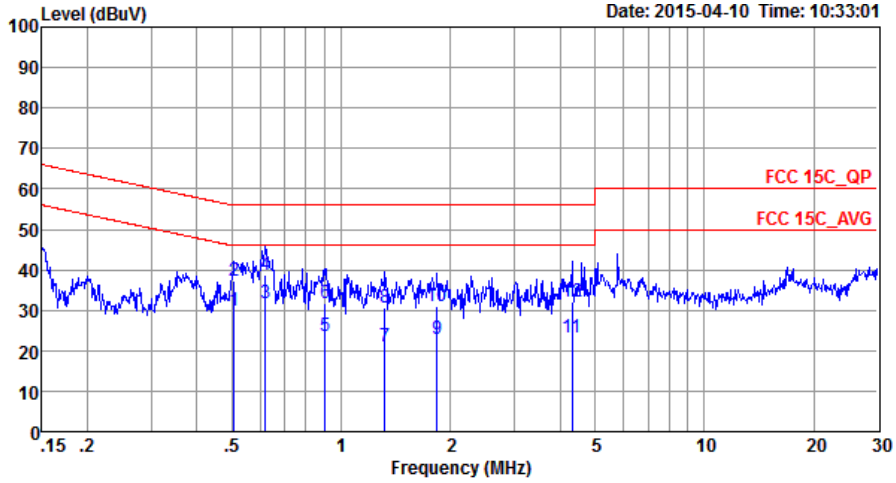


```
Site      : CO01-SZ
Condition: FCC 15C_QP LISN_N_20140304 NEUTRAL

Mode      : Mode 1
IMEI      : 353919026681811/353924026681811
```

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
		MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1		0.51	30.06	-15.94	46.00	19.50	0.40	10.16	Average
2		0.51	37.16	-18.84	56.00	26.60	0.40	10.16	QP
3	*	0.62	31.86	-14.14	46.00	21.40	0.31	10.15	Average
4		0.62	38.76	-17.24	56.00	28.30	0.31	10.15	QP
5		0.90	23.76	-22.24	46.00	13.30	0.31	10.15	Average
6		0.90	31.86	-24.14	56.00	21.40	0.31	10.15	QP
7		1.32	20.91	-25.09	46.00	10.39	0.35	10.17	Average
8		1.32	30.61	-25.39	56.00	20.09	0.35	10.17	QP
9		1.84	22.95	-23.05	46.00	12.40	0.37	10.18	Average
10		1.84	30.95	-25.05	56.00	20.40	0.37	10.18	QP
11		4.31	23.30	-22.70	46.00	12.60	0.47	10.23	Average
12		4.31	32.20	-23.80	56.00	21.50	0.47	10.23	QP

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 28, 2015	Apr. 15, 2015~ Apr. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power meter	Anritsu	ML2495A	1218010	10Hz~40GHz	Jan. 28, 2015	Apr. 15, 2015~ Apr. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	0.3GHz~40GHz	Jan. 28, 2015	Apr. 15, 2015~ Apr. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2014	Apr. 25, 2015	May 25, 2015	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Apr. 25, 2015	Sep. 24, 2015	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 09, 2014	Apr. 25, 2015	May 08, 2015	Radiation (03CH01-KS)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz-2GHz	Nov. 07, 2014	Apr. 25, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Apr. 25, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101073	18Ghz-40GHz	Jun. 09, 2014	Apr. 25, 2015	Jun. 08, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz ~3000MHz / 30 dB	Jan. 28, 2015	Apr. 25, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 08, 2014	Apr. 25, 2015	Jul. 07, 2015	Radiation (03CH01-SZ
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 08, 2014	Apr. 25, 2015	May 07, 2015	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Apr. 25, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 25, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 25, 2015	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESCI7	100724	9kHz~3GHz	Jan. 28, 2015	Apr. 10, 2015	Jan. 27, 2016	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Feb. 02, 2015	Apr. 10, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Feb. 02, 2015	Apr. 10, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Sep. 29, 2014	Apr. 10, 2015	Sep. 28, 2015	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 24, 2014	Apr. 10, 2015	Oct. 23, 2015	Conduction (CO01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.3dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9dB

Appendix A. Conducted Test Results

Report Number : FR540401C

Test Engineer:	Mygai Chen	Temperature:	21~25	°C
Test Date:	2015/4/15~2015/4/16	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.00	7.08	0.50	Pass
11b	1Mbps	1	6	2437	12.35	7.56	0.50	Pass
11b	1Mbps	1	11	2462	12.30	7.56	0.50	Pass
11g	6Mbps	1	1	2412	17.80	16.28	0.50	Pass
11g	6Mbps	1	6	2437	18.55	16.32	0.50	Pass
11g	6Mbps	1	11	2462	18.60	15.92	0.50	Pass
HT20	MCS0	1	1	2412	18.55	17.28	0.50	Pass
HT20	MCS0	1	6	2437	19.35	17.32	0.50	Pass
HT20	MCS0	1	11	2462	19.10	16.56	0.50	Pass
HT40	MCS0	1	3	2422	36.40	35.04	0.50	Pass
HT40	MCS0	1	6	2437	36.90	35.36	0.50	Pass
HT40	MCS0	1	9	2452	36.00	33.84	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	16.77	30.00	2.00	18.77	36.00	Pass
11b	1Mbps	1	6	2437	14.16	30.00	2.00	16.16	36.00	Pass
11b	1Mbps	1	11	2462	16.19	30.00	2.00	18.19	36.00	Pass
11g	6Mbps	1	1	2412	21.72	30.00	2.00	23.72	36.00	Pass
11g	6Mbps	1	6	2437	20.56	30.00	2.00	22.56	36.00	Pass
11g	6Mbps	1	11	2462	22.05	30.00	2.00	24.05	36.00	Pass
HT20	MCS0	1	1	2412	20.60	30.00	2.00	22.60	36.00	Pass
HT20	MCS0	1	6	2437	19.95	30.00	2.00	21.95	36.00	Pass
HT20	MCS0	1	11	2462	21.12	30.00	2.00	23.12	36.00	Pass
HT40	MCS0	1	3	2422	20.48	30.00	2.00	22.48	36.00	Pass
HT40	MCS0	1	6	2437	20.65	30.00	2.00	22.65	36.00	Pass
HT40	MCS0	1	9	2452	21.09	30.00	2.00	23.09	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	13.44
11b	1Mbps	1	6	2437	0.10	11.22
11b	1Mbps	1	11	2462	0.10	13.25
11g	6Mbps	1	1	2412	0.56	13.27
11g	6Mbps	1	6	2437	0.56	11.84
11g	6Mbps	1	11	2462	0.56	13.41
HT20	MCS0	1	1	2412	0.66	11.43
HT20	MCS0	1	6	2437	0.66	10.04
HT20	MCS0	1	11	2462	0.66	11.95
HT40	MCS0	1	3	2422	1.17	10.66
HT40	MCS0	1	6	2437	1.17	11.08
HT40	MCS0	1	9	2452	1.17	11.73

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.14	2.00	8.00	Pass
11b	1Mbps	1	6	2437	-8.19	2.00	8.00	Pass
11b	1Mbps	1	11	2462	-6.61	2.00	8.00	Pass
11g	6Mbps	1	1	2412	-12.35	2.00	8.00	Pass
11g	6Mbps	1	6	2437	-12.86	2.00	8.00	Pass
11g	6Mbps	1	11	2462	-11.03	2.00	8.00	Pass
HT20	MCS0	1	1	2412	-13.90	2.00	8.00	Pass
HT20	MCS0	1	6	2437	-14.30	2.00	8.00	Pass
HT20	MCS0	1	11	2462	-13.16	2.00	8.00	Pass
HT40	MCS0	1	3	2422	-16.06	2.00	8.00	Pass
HT40	MCS0	1	6	2437	-15.25	2.00	8.00	Pass
HT40	MCS0	1	9	2452	-15.48	2.00	8.00	Pass

Appendix B. Radiated Test Results

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2332.05	49.76	-24.24	74	38.07	32.53	8.43	29.27	171	145	P	H
		2358.51	39.15	-14.85	54	27.39	32.56	8.51	29.31	171	145	A	H
	*	2412	94.1	-	-	82.27	32.61	8.6	29.38	171	145	P	H
	*	2412	92.09	-	-	80.26	32.61	8.6	29.38	171	145	A	H
		2378.4	49.97	-24.03	74	38.22	32.58	8.51	29.34	250	96	P	V
		2376.24	39	-15	54	27.25	32.58	8.51	29.34	250	96	A	V
	*	2412	94.63	-	-	82.8	32.61	8.6	29.38	250	96	P	V
	*	2412	92.75	-	-	80.92	32.61	8.6	29.38	250	96	A	V
802.11b CH 06 2437MHz		2358.96	49.62	-24.38	74	37.86	32.56	8.51	29.31	116	344	P	H
		2365.26	38.38	-15.62	54	26.65	32.56	8.51	29.34	116	344	A	H
	*	2437	92.07	-	-	80.08	32.65	8.69	29.35	116	344	P	H
	*	2437	90.04	-	-	78.05	32.65	8.69	29.35	116	344	A	H
		2492.2	50.28	-23.72	74	38.08	32.7	8.78	29.28	116	344	P	H
		2484.64	38.88	-15.12	54	26.73	32.68	8.78	29.31	116	344	A	H
		2326.29	49.39	-24.61	74	37.7	32.53	8.43	29.27	121	66	P	V
		2361.3	38.46	-15.54	54	26.7	32.56	8.51	29.31	121	66	A	V
	*	2437	93.73	-	-	81.74	32.65	8.69	29.35	121	66	P	V
	*	2437	91.68	-	-	79.69	32.65	8.69	29.35	121	66	A	V
		2491.56	50.84	-23.16	74	38.67	32.7	8.78	29.31	121	66	P	V
		2488.36	38.83	-15.17	54	26.66	32.7	8.78	29.31	121	66	A	V

802.11b CH 11 2462MHz	*	2462	93.92	-	-	81.89	32.67	8.69	29.33	188	360	P	H
	*	2462	91.84	-	-	79.81	32.67	8.69	29.33	188	360	A	H
		2497.84	50.1	-23.9	74	37.9	32.7	8.78	29.28	188	360	P	H
		2488.2	38.94	-15.06	54	26.77	32.7	8.78	29.31	188	360	A	H
	*	2462	97.04	-	-	85.01	32.67	8.69	29.33	222	35	P	V
	*	2462	95.08	-	-	83.05	32.67	8.69	29.33	222	35	A	V
		2492.08	50.36	-23.64	74	38.16	32.7	8.78	29.28	222	35	P	V
		2487.92	38.81	-15.19	54	26.64	32.7	8.78	29.31	222	35	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	49.35	-24.65	74	30.4	34.4	12.86	28.31	110	360	P	H
		4824	50.59	-23.41	74	31.64	34.4	12.86	28.31	110	360	P	V
802.11b CH 06 2437MHz		4874	50.2	-23.8	74	31.07	34.43	12.92	28.22	100	360	P	H
		7311	49.26	-24.74	74	25.23	36.22	14.71	26.9	174	100	P	H
		4874	48.66	-25.34	74	29.53	34.43	12.92	28.22	100	360	P	V
		7311	49.35	-24.65	74	25.32	36.22	14.71	26.9	174	100	P	V
802.11b CH 11 2462MHz		4924	50.38	-23.62	74	31.02	34.46	13.04	28.14	146	347	P	H
		7386	49.21	-24.79	74	25.11	36.26	14.75	26.91	145	274	P	H
		4924	49.93	-24.07	74	30.57	34.46	13.04	28.14	146	347	P	V
		7386	49.95	-24.05	74	25.85	36.26	14.75	26.91	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.65	59.08	-14.92	74	47.14	32.6	8.6	29.26	237	59	P	H
		2389.92	43.68	-10.32	54	31.74	32.6	8.6	29.26	237	59	A	H
	*	2412	103.56	-	-	91.59	32.61	8.6	29.24	237	59	P	H
	*	2412	94.52	-	-	82.55	32.61	8.6	29.24	237	59	A	H
		2389.74	54.69	-19.31	74	42.75	32.6	8.6	29.26	241	83	P	V
		2389.92	42.48	-11.52	54	30.54	32.6	8.6	29.26	241	83	A	V
	*	2412	100.9	-	-	88.93	32.61	8.6	29.24	241	83	P	V
	*	2412	92.32	-	-	80.35	32.61	8.6	29.24	241	83	A	V
802.11g CH 06 2437MHz		2377.05	50.47	-23.53	74	38.6	32.58	8.51	29.22	230	32	P	H
		2354.82	39.89	-14.11	54	28	32.56	8.51	29.18	230	32	A	H
	*	2437	100.85	-	-	88.71	32.65	8.69	29.2	230	32	P	H
	*	2437	92.33	-	-	80.19	32.65	8.69	29.2	230	32	A	H
		2489.4	51.22	-22.78	74	38.88	32.7	8.78	29.14	230	32	P	H
		2489.44	41.43	-12.57	54	29.09	32.7	8.78	29.14	230	32	A	H
		2362.2	50.92	-23.08	74	39.03	32.56	8.51	29.18	217	84	P	V
		2358.78	39.82	-14.18	54	27.93	32.56	8.51	29.18	217	84	A	V
	*	2437	101.83	-	-	89.69	32.65	8.69	29.2	217	84	P	V
	*	2437	93.5	-	-	81.36	32.65	8.69	29.2	217	84	A	V
		2493.72	52.04	-21.96	74	39.7	32.7	8.78	29.14	217	84	P	V
		2489.24	41.97	-12.03	54	29.63	32.7	8.78	29.14	217	84	A	V

802.11g CH 11 2462MHz	*	2462	105.15	-	-	92.97	32.67	8.69	29.18	250	60	P	H
	*	2462	96.94	-	-	84.76	32.67	8.69	29.18	250	60	A	H
		2483.64	65.9	-8.1	74	53.6	32.68	8.78	29.16	250	60	P	H
		2483.6	49	-5	54	36.7	32.68	8.78	29.16	250	60	A	H
	*	2457.531	102.53	-	-	90.35	32.67	8.69	29.18	184	88	P	V
	*	2458.7	94.6	-	-	82.42	32.67	8.69	29.18	184	88	A	V
		2483.52	62.25	-11.75	74	49.95	32.68	8.78	29.16	184	88	P	V
		2483.6	45.67	-8.33	54	33.37	32.68	8.78	29.16	184	88	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	48.16	-25.84	74	29.21	34.4	12.86	28.31	110	360	P	H
		4824	46.75	-27.25	74	27.8	34.4	12.86	28.31	110	360	P	V
802.11g CH 06 2437MHz		4874	46.08	-27.92	74	26.95	34.43	12.92	28.22	100	360	P	H
		7311	49.14	-24.86	74	25.11	36.22	14.71	26.9	174	100	P	H
		4874	47.42	-26.58	74	28.29	34.43	12.92	28.22	100	360	P	V
		7311	49.37	-24.63	74	25.34	36.22	14.71	26.9	174	100	P	V
802.11g CH 11 2462MHz		4924	47.06	-26.94	74	27.7	34.46	13.04	28.14	146	347	P	H
		7386	48.66	-25.34	74	24.56	36.26	14.75	26.91	145	274	P	H
		4924	47.38	-26.62	74	28.02	34.46	13.04	28.14	146	347	P	V
		7386	50.97	-23.03	74	26.87	36.26	14.75	26.91	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.92	51.79	-22.21	74	39.85	32.6	8.6	29.26	214	33	P	H
		2389.83	40.84	-13.16	54	28.9	32.6	8.6	29.26	214	33	A	H
	*	2412	98.46	-	-	86.49	32.61	8.6	29.24	214	33	P	H
	*	2412	90.15	-	-	78.18	32.61	8.6	29.24	214	33	A	H
		2389.92	52.23	-21.77	74	40.29	32.6	8.6	29.26	182	83	P	V
		2389.92	41.62	-12.38	54	29.68	32.6	8.6	29.26	182	83	A	V
	*	2412	100.74	-	-	88.77	32.61	8.6	29.24	182	83	P	V
	*	2412	92	-	-	80.03	32.61	8.6	29.24	182	83	A	V
802.11n HT20 CH 06 2437MHz		2330.52	51.05	-22.95	74	39.2	32.53	8.43	29.11	230	34	P	H
		2356.98	39.89	-14.11	54	28	32.56	8.51	29.18	230	34	A	H
	*	2437	97.83	-	-	85.69	32.65	8.69	29.2	230	34	P	H
	*	2437	89.72	-	-	77.58	32.65	8.69	29.2	230	34	A	H
		2494.56	51.35	-22.65	74	39.01	32.7	8.78	29.14	230	34	P	H
		2488.84	41.08	-12.92	54	28.74	32.7	8.78	29.14	230	34	A	H
		2339.7	50.94	-23.06	74	39.12	32.54	8.43	29.15	216	85	P	V
		2370.84	39.77	-14.23	54	27.9	32.58	8.51	29.22	216	85	A	V
	*	2437	99.65	-	-	87.51	32.65	8.69	29.2	216	85	P	V
	*	2437	91.9	-	-	79.76	32.65	8.69	29.2	216	85	A	V
		2488.72	51.97	-22.03	74	39.63	32.7	8.78	29.14	216	85	P	V
		2488.52	41.93	-12.07	54	29.59	32.7	8.78	29.14	216	85	A	V

802.11n HT20 CH 11 2462MHz	*	2462	103.39	-	-	91.21	32.67	8.69	29.18	226	58	P	H
	*	2462	95.03	-	-	82.85	32.67	8.69	29.18	226	58	A	H
		2483.56	62.94	-11.06	74	50.64	32.68	8.78	29.16	226	58	P	H
		2483.6	44.83	-9.17	54	32.53	32.68	8.78	29.16	226	58	A	H
	*	2462	101.14	-	-	88.96	32.67	8.69	29.18	201	86	P	V
	*	2462	92.86	-	-	80.68	32.67	8.69	29.18	201	86	A	V
		2483.52	56.78	-17.22	74	44.48	32.68	8.78	29.16	201	86	P	V
		2483.52	43.17	-10.83	54	30.87	32.68	8.78	29.16	201	86	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	46.21	-27.79	74	27.26	34.4	12.86	28.31	110	360	P	H
		4824	48.45	-25.55	74	29.5	34.4	12.86	28.31	110	360	P	V
802.11n HT20 CH 06 2437MHz		4874	47.41	-26.59	74	28.28	34.43	12.92	28.22	100	360	P	H
		7311	49.38	-24.62	74	25.35	36.22	14.71	26.9	174	100	P	H
		4874	46.32	-27.68	74	27.19	34.43	12.92	28.22	100	360	P	V
		7311	49.46	-24.54	74	25.43	36.22	14.71	26.9	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	47.13	-26.87	74	27.77	34.46	13.04	28.14	146	347	P	H
		7386	50.94	-23.06	74	26.84	36.26	14.75	26.91	145	274	P	H
		4924	47.48	-26.52	74	28.12	34.46	13.04	28.14	146	347	P	V
		7386	50.22	-23.78	74	26.12	36.26	14.75	26.91	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.11	52.64	-21.36	74	40.7	32.6	8.6	29.26	231	33	P	H
		2389.92	43.15	-10.85	54	31.21	32.6	8.6	29.26	231	33	A	H
	*	2422	96.4	-	-	84.39	32.63	8.6	29.22	231	33	P	H
	*	2422	86.86	-	-	74.85	32.63	8.6	29.22	231	33	A	H
		2490	51.51	-22.49	74	39.17	32.7	8.78	29.14	231	33	P	H
		2492.6	41.15	-12.85	54	28.81	32.7	8.78	29.14	231	33	A	H
		2389.83	54.98	-19.02	74	43.04	32.6	8.6	29.26	174	84	P	V
		2389.74	44.38	-9.62	54	32.44	32.6	8.6	29.26	174	84	A	V
	*	2422	97.61	-	-	85.6	32.63	8.6	29.22	174	84	P	V
	*	2422	89.74	-	-	77.73	32.63	8.6	29.22	174	84	A	V
		2486.68	50.99	-23.01	74	38.69	32.68	8.78	29.16	174	84	P	V
		2488.56	41.32	-12.68	54	28.98	32.7	8.78	29.14	174	84	A	V
802.11n HT40 CH 06 2437MHz		2347.08	51.22	-22.78	74	39.32	32.54	8.51	29.15	232	33	P	H
		2389.83	40.72	-13.28	54	28.78	32.6	8.6	29.26	232	33	A	H
	*	2437	94.65	-	-	82.51	32.65	8.69	29.2	232	33	P	H
	*	2437	86.6	-	-	74.46	32.65	8.69	29.2	232	33	A	H
		2484.48	52.61	-21.39	74	40.31	32.68	8.78	29.16	232	33	P	H
		2483.52	41.51	-12.49	54	29.21	32.68	8.78	29.16	232	33	A	H
		2375.79	50.52	-23.48	74	38.65	32.58	8.51	29.22	181	59	P	V
		2389.92	41.38	-12.62	54	29.44	32.6	8.6	29.26	181	59	A	V
	*	2437	97.93	-	-	85.79	32.65	8.69	29.2	181	59	P	V
	*	2437	90.14	-	-	78	32.65	8.69	29.2	181	59	A	V
		2484.56	52.11	-21.89	74	39.81	32.68	8.78	29.16	181	59	P	V
		2484.08	42.07	-11.93	54	29.77	32.68	8.78	29.16	181	59	A	V

802.11n HT40 CH 09 2452MHz		2354.46	50.91	-23.09	74	39.02	32.56	8.51	29.18	250	61	P	H
		2353.83	40.59	-13.41	54	28.7	32.56	8.51	29.18	250	61	A	H
	*	2452	99.99	-	-	87.85	32.65	8.69	29.2	250	61	P	H
	*	2452	91.78	-	-	79.64	32.65	8.69	29.2	250	61	A	H
		2483.72	65.16	-8.84	74	52.86	32.68	8.78	29.16	250	61	P	H
		2484.68	48.03	-5.97	54	35.73	32.68	8.78	29.16	250	61	A	H
		2349.51	50.96	-23.04	74	39.06	32.54	8.51	29.15	180	62	P	V
		2355.54	40.45	-13.55	54	28.56	32.56	8.51	29.18	180	62	A	V
	*	2452	97.88	-	-	85.74	32.65	8.69	29.2	180	62	P	V
	*	2452	89.96	-	-	77.82	32.65	8.69	29.2	180	62	A	V
		2483.96	59.89	-14.11	74	47.59	32.68	8.78	29.16	180	62	P	V
		2483.56	44.54	-9.46	54	32.24	32.68	8.78	29.16	180	62	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4844	44.74	-29.26	74	25.69	34.41	12.92	28.28	100	360	P	H
		7266	47.56	-26.44	74	23.55	36.21	14.7	26.9	200	360	P	H
		4844	46.17	-27.83	74	27.12	34.41	12.92	28.28	100	360	P	V
		7266	49.82	-24.18	74	25.81	36.21	14.7	26.9	200	360	P	V
802.11n HT40 CH 06 2437MHz		4874	46.72	-27.28	74	27.59	34.43	12.92	28.22	100	163	P	H
		7311	48.84	-25.16	74	24.81	36.22	14.71	26.9	120	360	P	H
		4874	46.33	-27.67	74	27.2	34.43	12.92	28.22	100	163	P	V
		7311	48.86	-25.14	74	24.83	36.22	14.71	26.9	120	360	P	V
802.11n HT40 CH 09 2452MHz		4904	46.86	-27.14	74	27.6	34.45	12.98	28.17	129	360	P	H
		7356	50.05	-23.95	74	25.99	36.24	14.73	26.91	121	320	P	H
		4904	47.81	-26.19	74	28.55	34.45	12.98	28.17	129	360	P	V
		7356	49.93	-24.07	74	25.87	36.24	14.73	26.91	121	320	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15C Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		95.96	40.02	-3.48	43.5	53.09	11.22	1.51	25.8	-	-	P	H
		120.21	40.14	-3.36	43.5	49.52	14.6	1.69	25.67	100	260	P	H
		307.42	26.17	-19.83	46	34.3	14.2	2.77	25.1	-	-	P	H
		460.68	27.24	-18.76	46	32.11	17.82	3.44	26.13	-	-	P	H
		691.54	28.41	-17.59	46	30.26	20.25	4.28	26.38	-	-	P	H
		825.4	33.02	-12.98	46	32.09	22.27	4.75	26.09	-	-	P	H
		30	35.35	-4.65	40	40.97	19.6	0.85	26.07	120	251	P	V
		118.27	37.91	-5.59	43.5	47.6	14.32	1.67	25.68	-	-	P	V
		331.67	20.84	-25.16	46	28.74	14.52	2.87	25.29	-	-	P	V
		522.76	26.13	-19.87	46	29.31	19.47	3.71	26.36	-	-	P	V
		683.78	27.64	-18.36	46	29.53	20.2	4.29	26.38	-	-	P	V
		981.57	30.32	-23.68	54	29.18	21.27	5.12	25.25	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is **over limit** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.