Appendix B. Plots of SAR Measurement

The plots are shown as follows.

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#01 GSM850_GPRS(4 Tx slots)_Right Cheek_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: HSL_835_140114 Medium parameters used: f = 836.4 MHz; σ = 0.912 S/m; ε_r = 42.893; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.599 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.083 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.638 W/kg
SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.414 W/kg
Maximum value of SAR (measured) = 0.597 W/kg

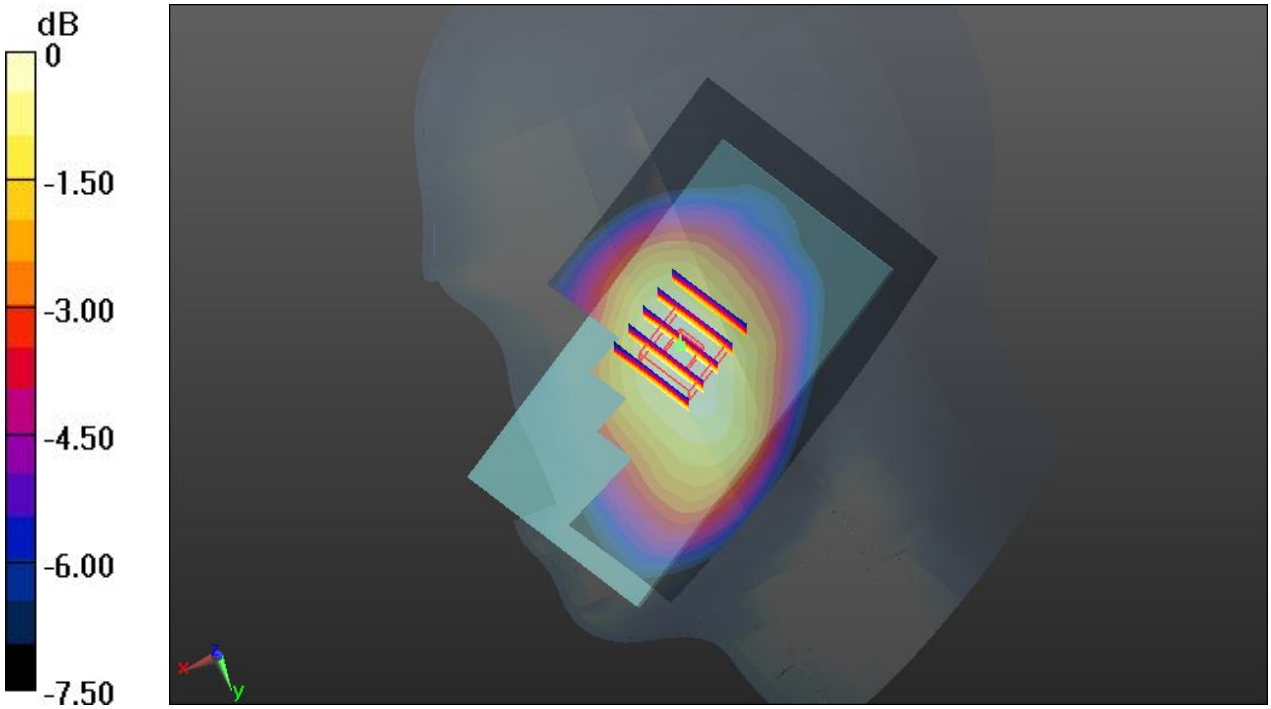

0 dB = 0.597 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#02 GSM850_GPRS(4 Tx slots)_Right Tilted_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: HSL_835_140114 Medium parameters used: f = 836.4 MHz; σ = 0.912 S/m; ε_r = 42.893; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.448 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.581 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.489 W/kg
SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.314 W/kg
Maximum value of SAR (measured) = 0.456 W/kg

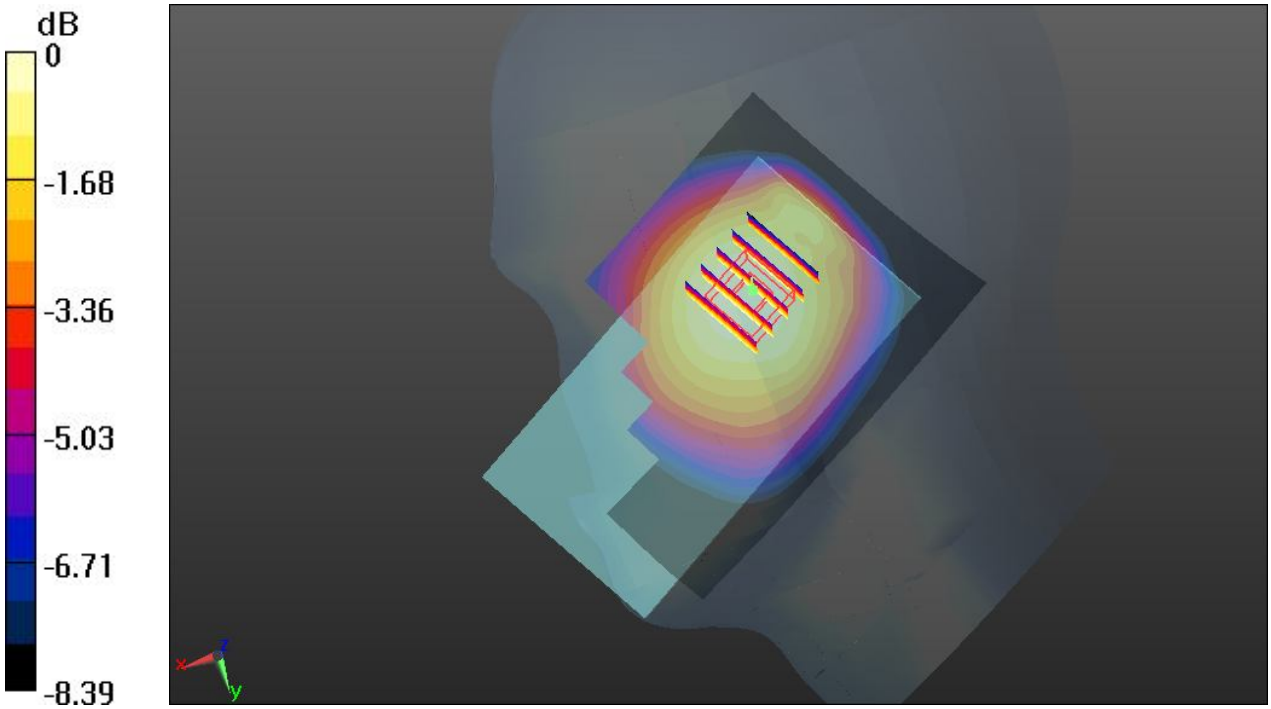

0 dB = 0.456 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#03 GSM850_GPRS(4 Tx slots)_Left Cheek_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: HSL_835_140114 Medium parameters used: f = 836.4 MHz; σ = 0.912 S/m; ε_r = 42.893; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.680 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.559 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.730 W/kg
SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.473 W/kg
Maximum value of SAR (measured) = 0.681 W/kg

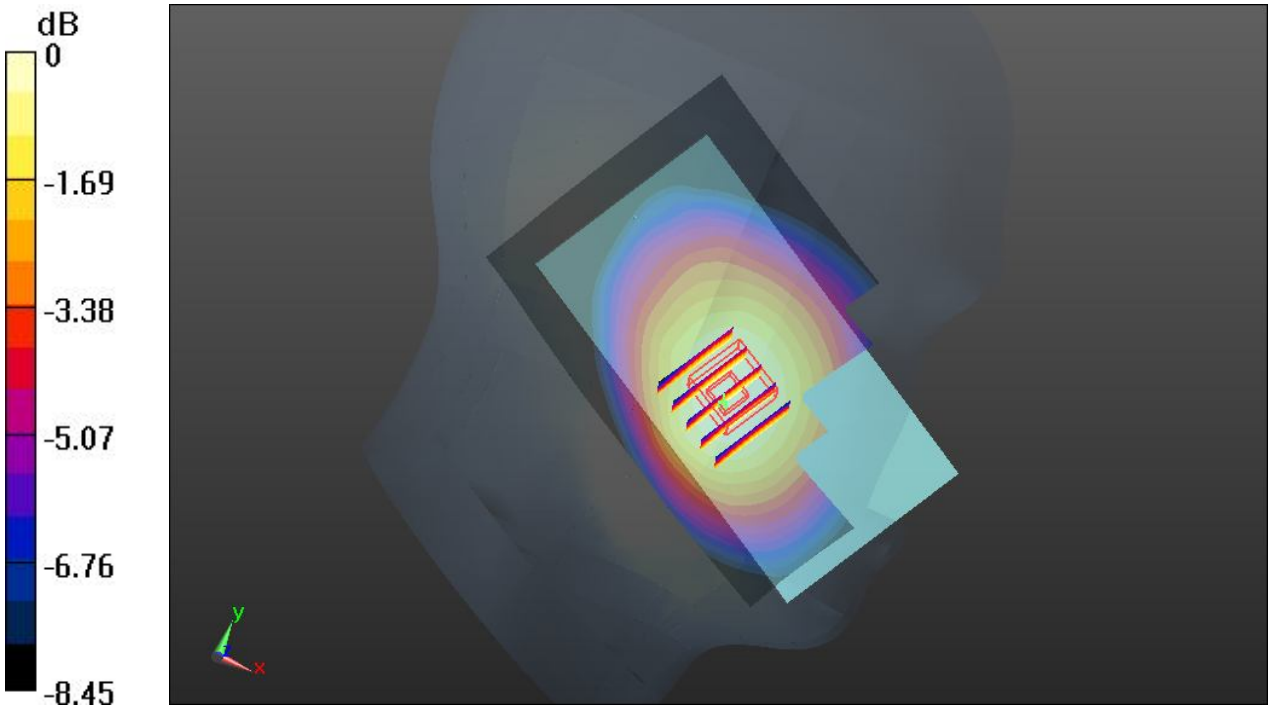

0 dB = 0.681 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#04 GSM850_GPRS(4 Tx slots)_Left Tilted_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: HSL_835_140114 Medium parameters used: f = 836.4 MHz; σ = 0.912 S/m; ε_r = 42.893; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.435 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.251 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.467 W/kg
SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.297 W/kg
Maximum value of SAR (measured) = 0.430 W/kg

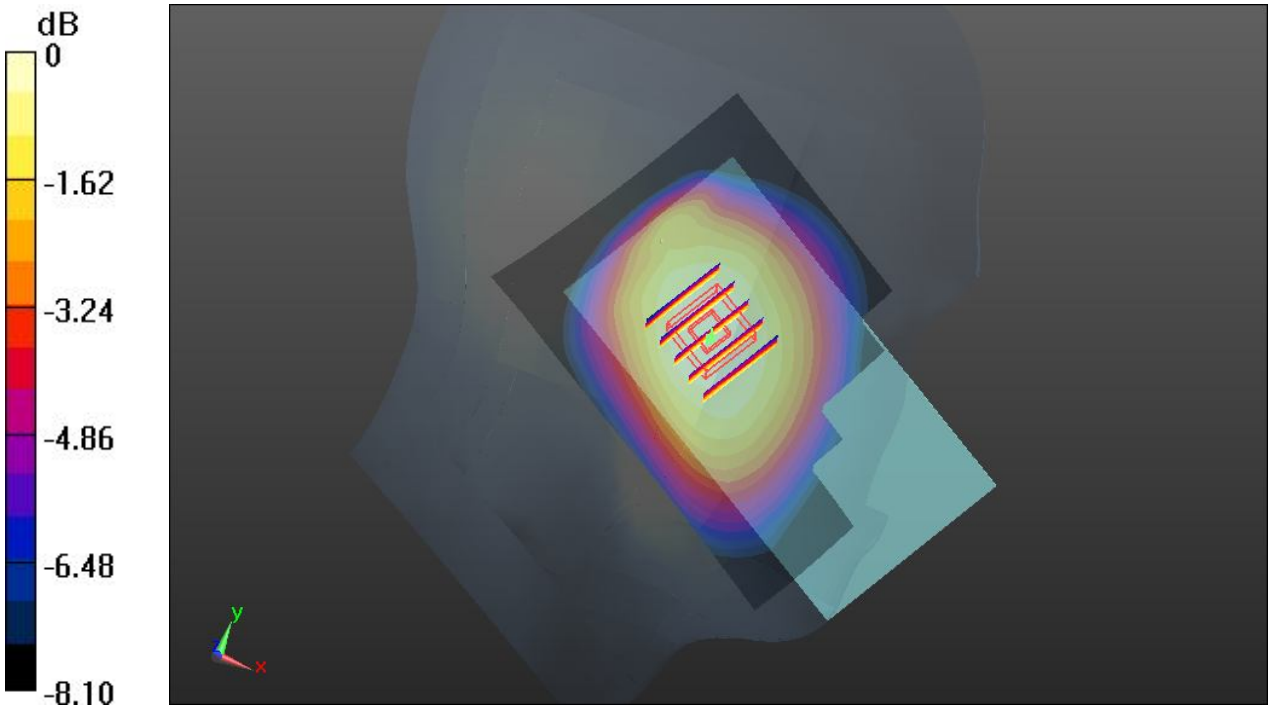

0 dB = 0.430 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#141 GSM1900_GPRS(2 Tx slots)_Right Cheek_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: HSL_1900_140121 Medium parameters used: f = 1880 MHz; σ = 1.392 S/m; ε_r = 41.101; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.372 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.568 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.426 W/kg
SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.171 W/kg
Maximum value of SAR (measured) = 0.355 W/kg

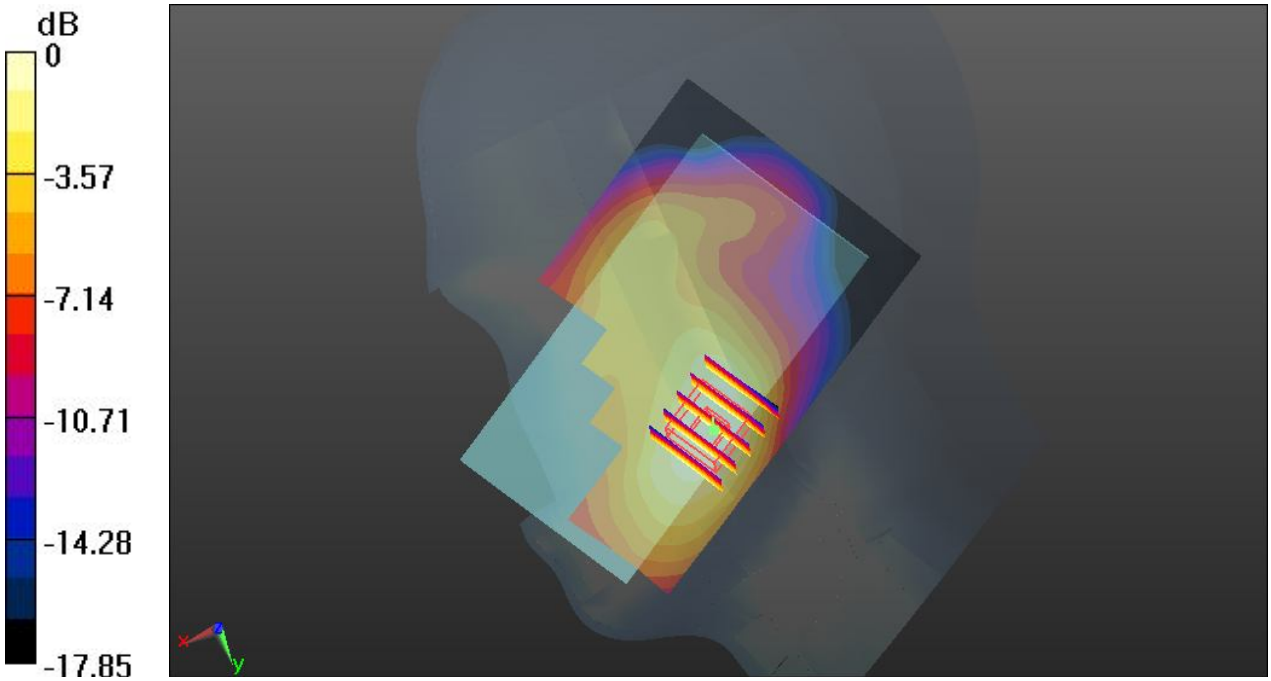

0 dB = 0.355 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#142 GSM1900_GPRS(2 Tx slots)_Right Tilted_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: HSL_1900_140121 Medium parameters used: f = 1880 MHz; σ = 1.392 S/m; ε_r = 41.101; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.185 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.261 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.219 W/kg
SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.074 W/kg
Maximum value of SAR (measured) = 0.178 W/kg

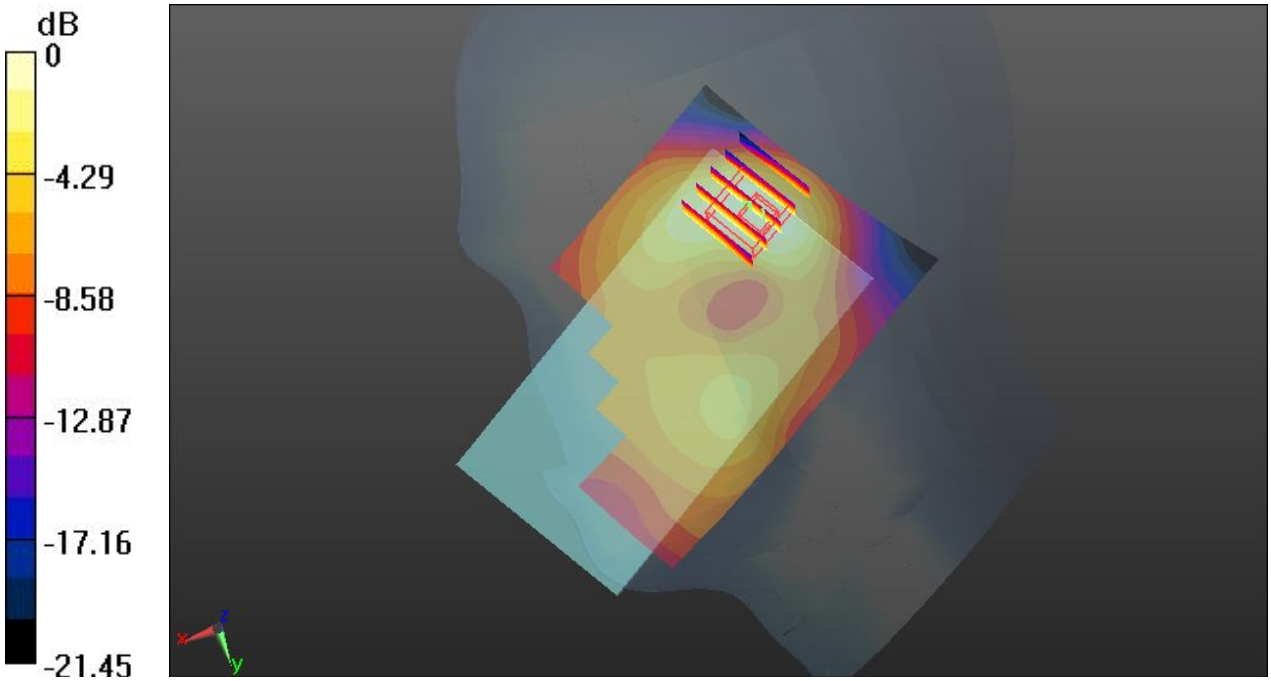

0 dB = 0.178 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#143 GSM1900_GPRS(2 Tx slots)_Left Cheek_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: HSL_1900_140121 Medium parameters used: f = 1880 MHz; σ = 1.392 S/m; ε_r = 41.101; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.298 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.141 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.354 W/kg
SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.143 W/kg
Maximum value of SAR (measured) = 0.294 W/kg

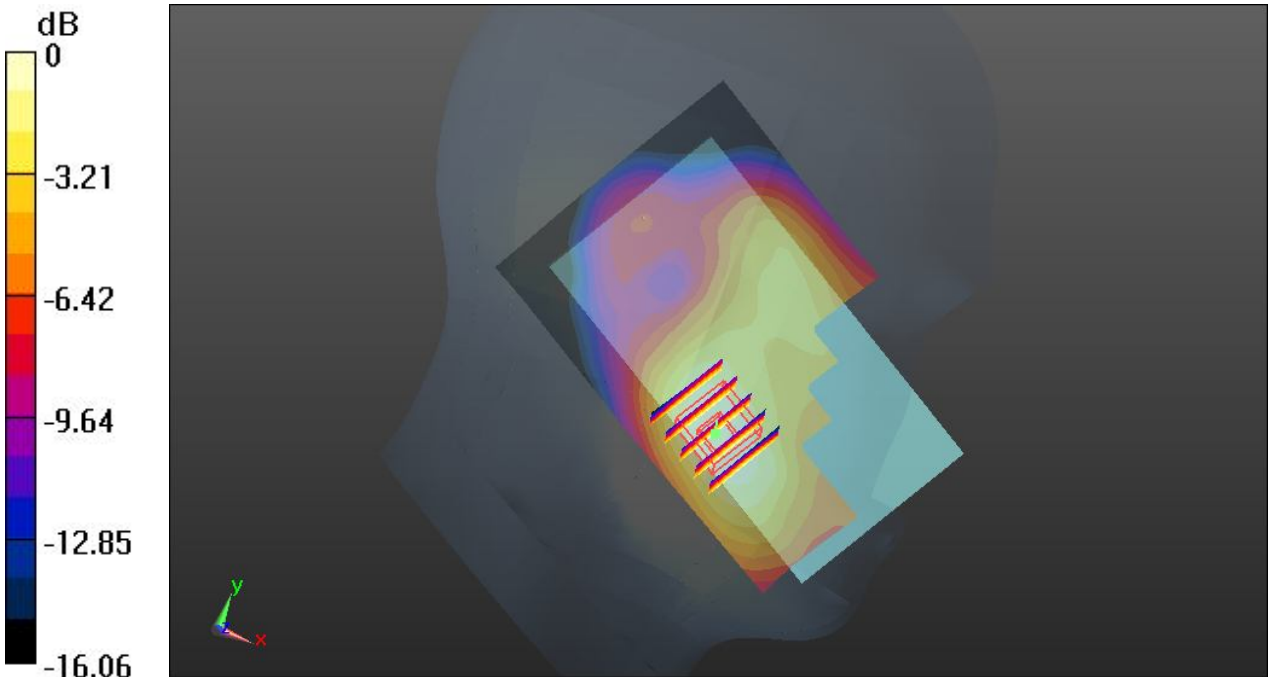

0 dB = 0.294 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#144 GSM1900_GPRS(2 Tx slots)_Left Tilted_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: HSL_1900_140121 Medium parameters used: f = 1880 MHz; σ = 1.392 S/m; ε_r = 41.101; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.139 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.598 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.175 W/kg
SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.057 W/kg
Maximum value of SAR (measured) = 0.141 W/kg

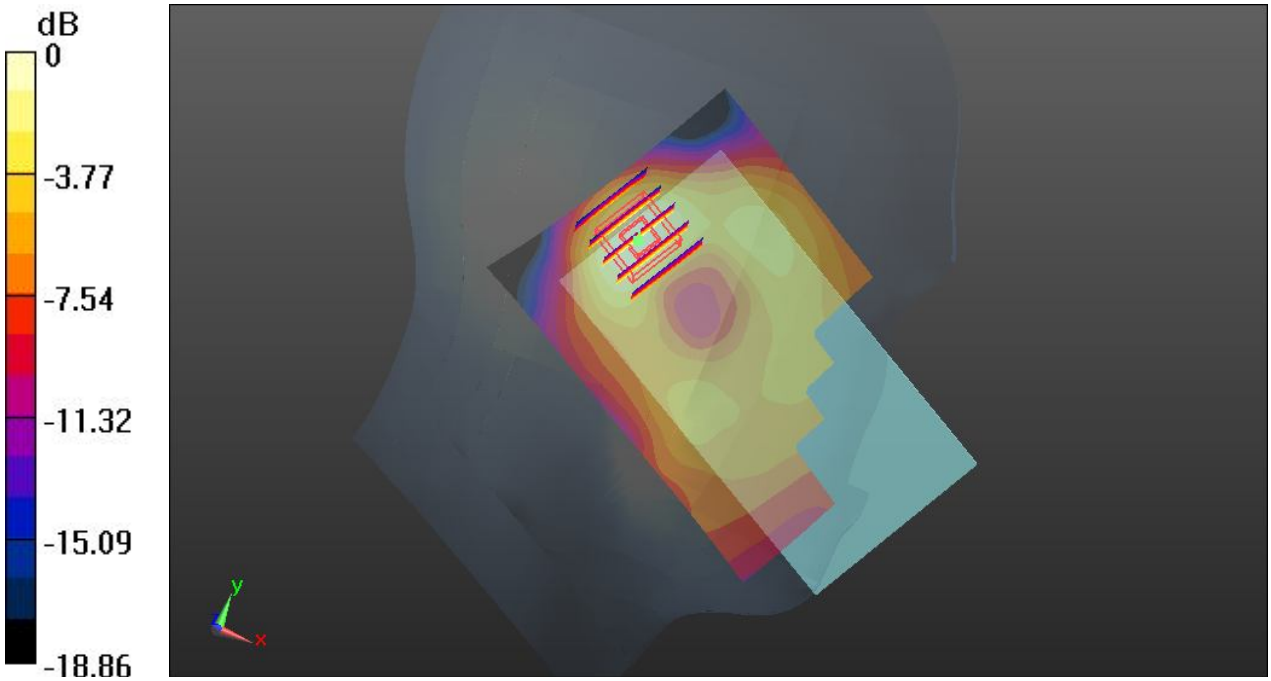

0 dB = 0.141 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#11 WCDMA Band V_RMC 12.2K_Right Cheek_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: HSL_835_140114 Medium parameters used: f = 826.4 MHz; σ = 0.901 S/m; ε_r = 43.016; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.320 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.760 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.344 W/kg
SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.224 W/kg
Maximum value of SAR (measured) = 0.321 W/kg

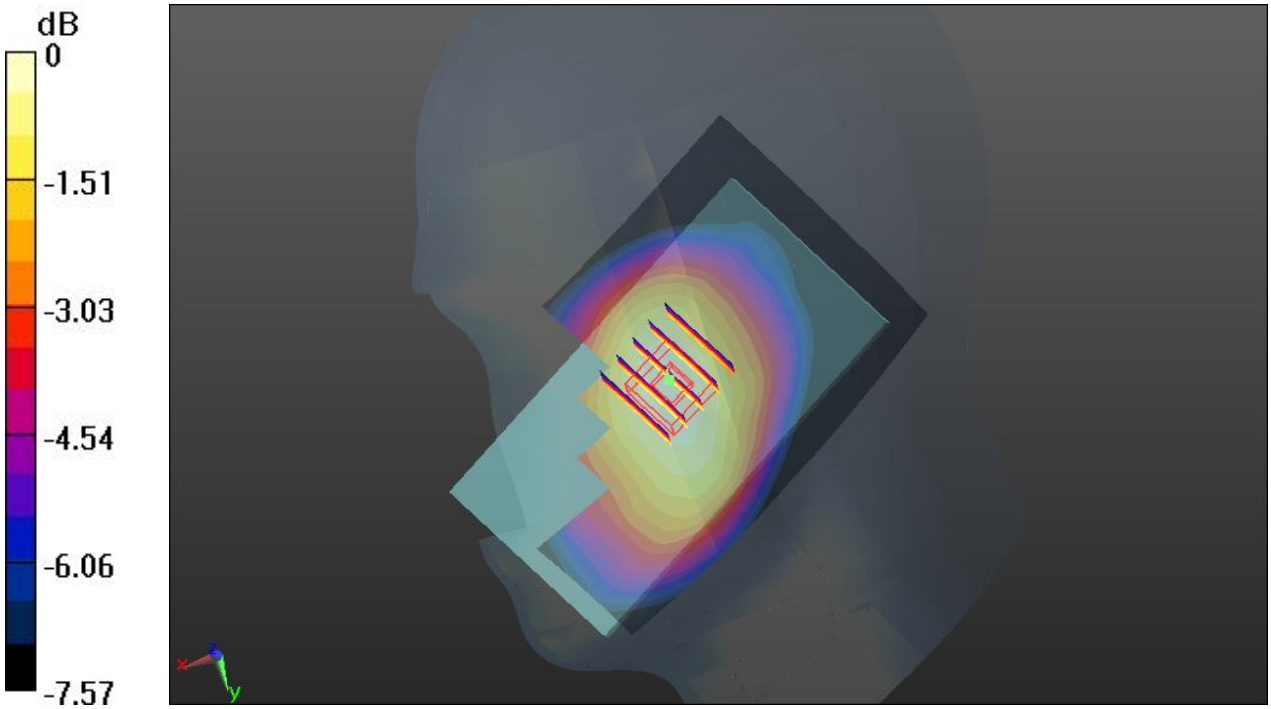

0 dB = 0.321 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#12 WCDMA Band V_RMC 12.2K_Right Tilted_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: HSL_835_140114 Medium parameters used: f = 826.4 MHz; σ = 0.901 S/m; ε_r = 43.016; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.249 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.083 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.268 W/kg
SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.175 W/kg
Maximum value of SAR (measured) = 0.252 W/kg

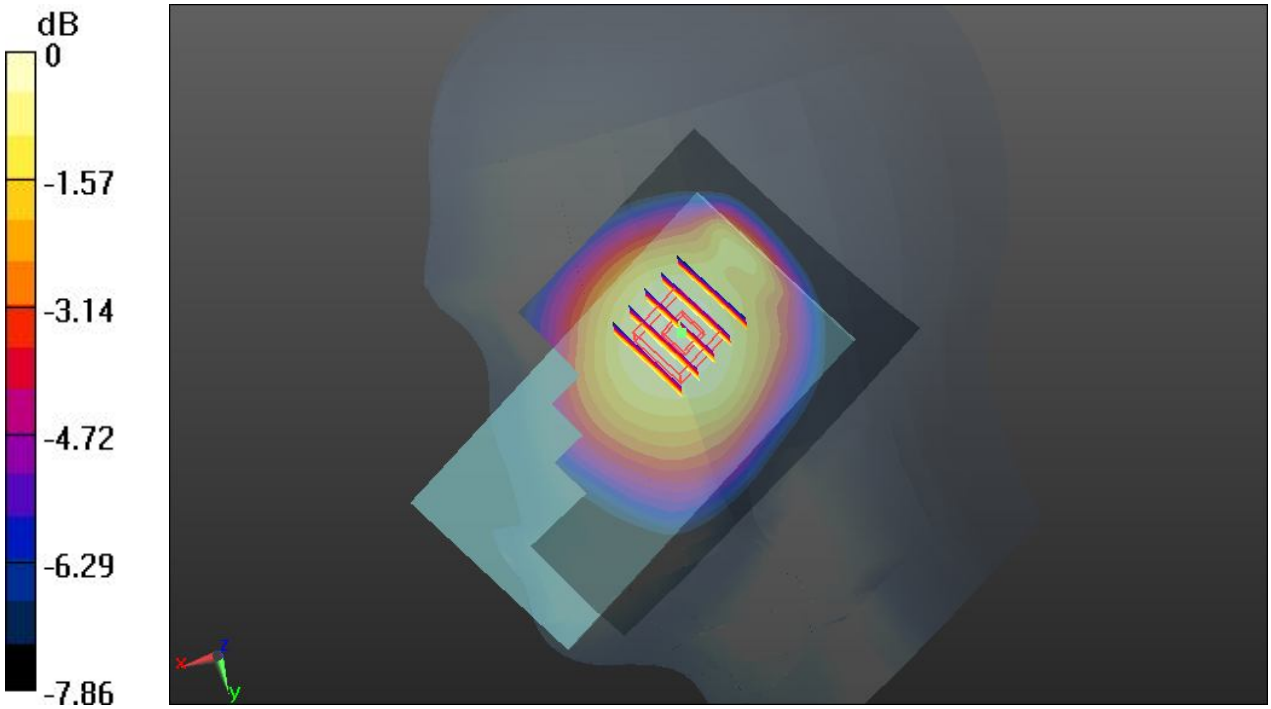

0 dB = 0.252 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#13 WCDMA Band V_RMC 12.2K_Left Cheek_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: HSL_835_140114 Medium parameters used: f = 826.4 MHz; σ = 0.901 S/m; ε_r = 43.016; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.376 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.802 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.403 W/kg
SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.260 W/kg
Maximum value of SAR (measured) = 0.372 W/kg

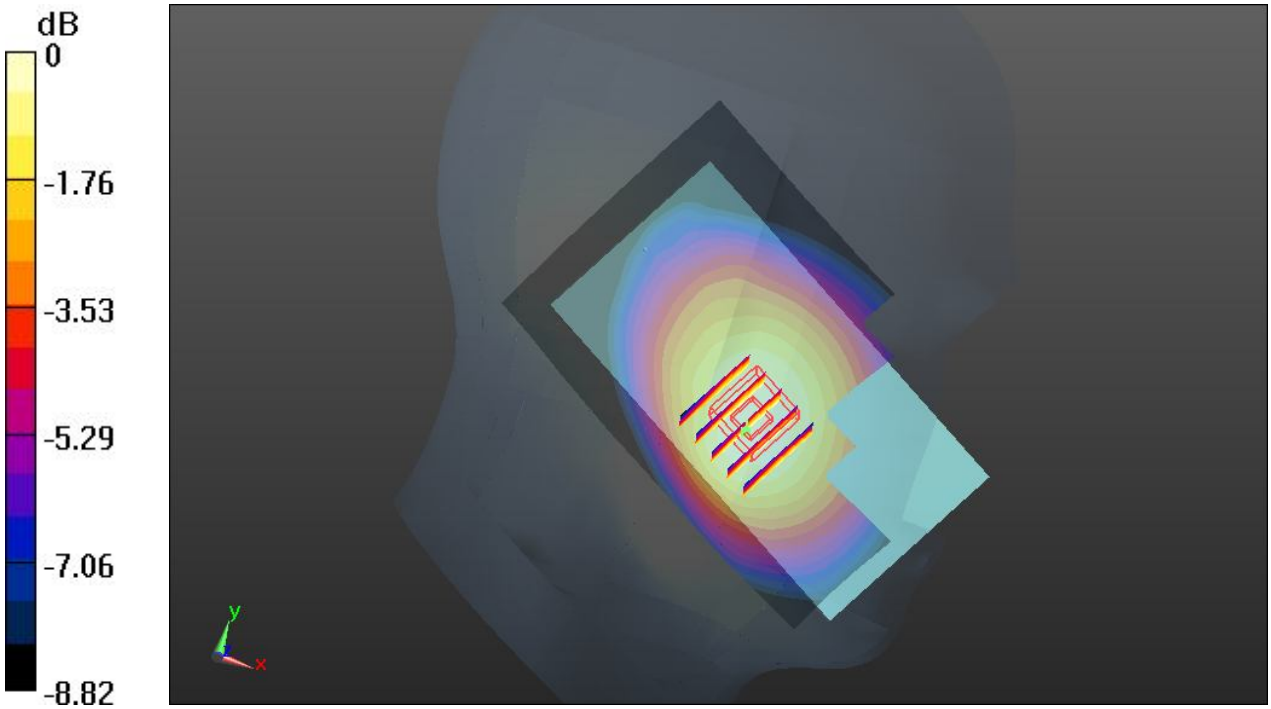

0 dB = 0.372 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#14 WCDMA Band V_RMC 12.2K_Left Tilted_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: HSL_835_140114 Medium parameters used: f = 826.4 MHz; σ = 0.901 S/m; ε_r = 43.016; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.252 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.538 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.173 W/kg
Maximum value of SAR (measured) = 0.251 W/kg

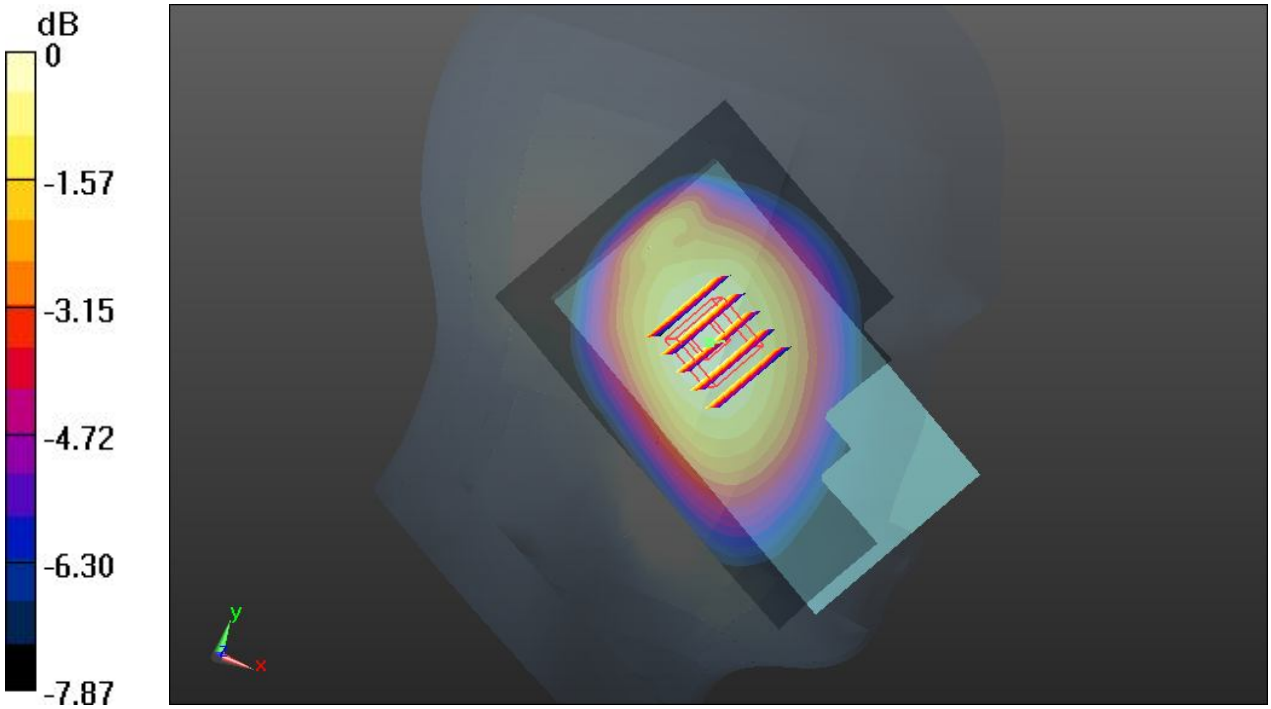

0 dB = 0.251 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#161 WCDMA Band IV_RMC 12.2K_Right Cheek_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: HSL_1750_140121 Medium parameters used: f = 1712.4 MHz; σ = 1.346 S/m; ε_r = 40.615; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.26, 8.26, 8.26); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.702 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.917 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.778 W/kg
SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.343 W/kg
Maximum value of SAR (measured) = 0.659 W/kg

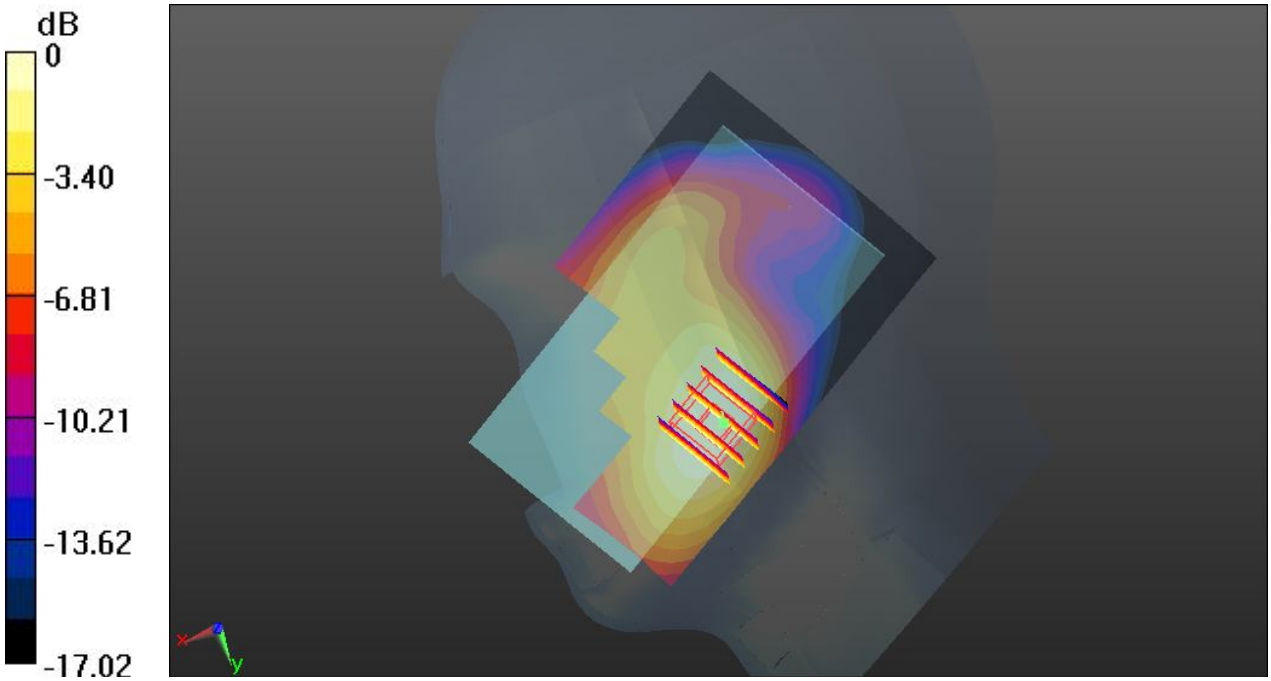

0 dB = 0.659 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#162 WCDMA Band IV_RMC 12.2K_Right Tilted_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: HSL_1750_140121 Medium parameters used: f = 1712.4 MHz; σ = 1.346 S/m; ε_r = 40.615; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.26, 8.26, 8.26); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.170 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.301 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.194 W/kg
SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.082 W/kg
Maximum value of SAR (measured) = 0.160 W/kg

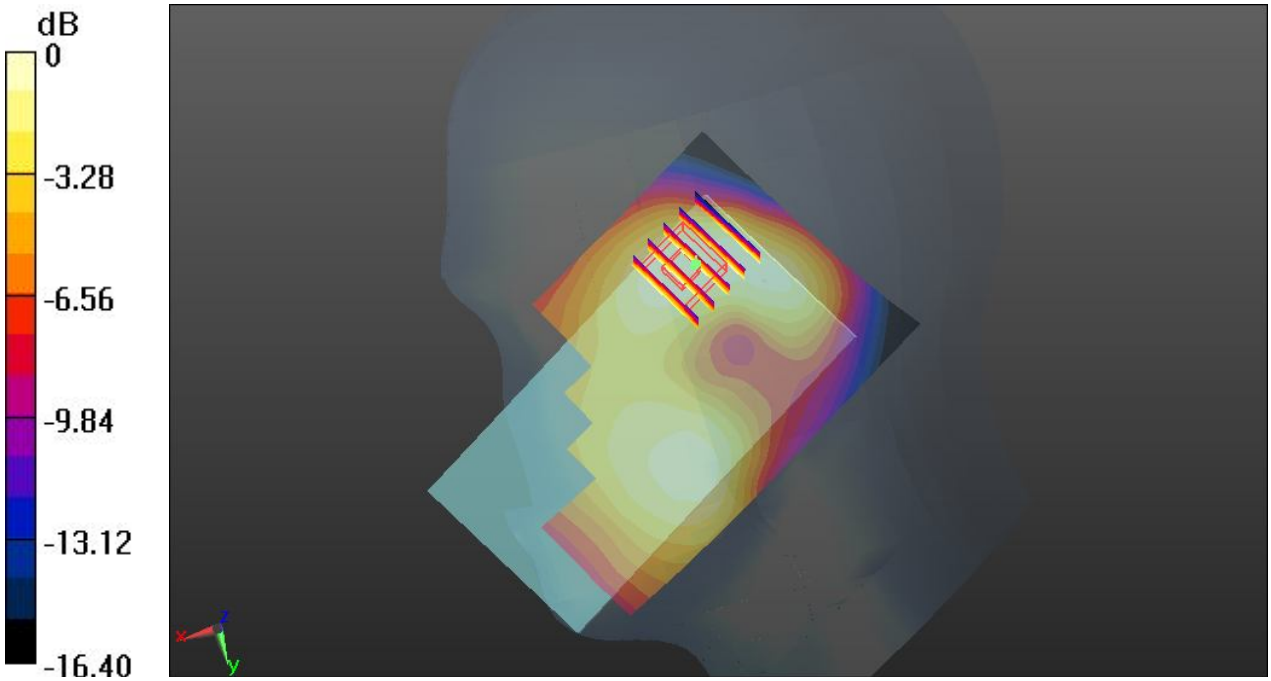

0 dB = 0.160 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#163 WCDMA Band IV_RMC 12.2K_Left Cheek_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: HSL_1750_140121 Medium parameters used: f = 1712.4 MHz; σ = 1.346 S/m; ε_r = 40.615; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.26, 8.26, 8.26); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.560 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.261 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.639 W/kg
SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.287 W/kg
Maximum value of SAR (measured) = 0.537 W/kg

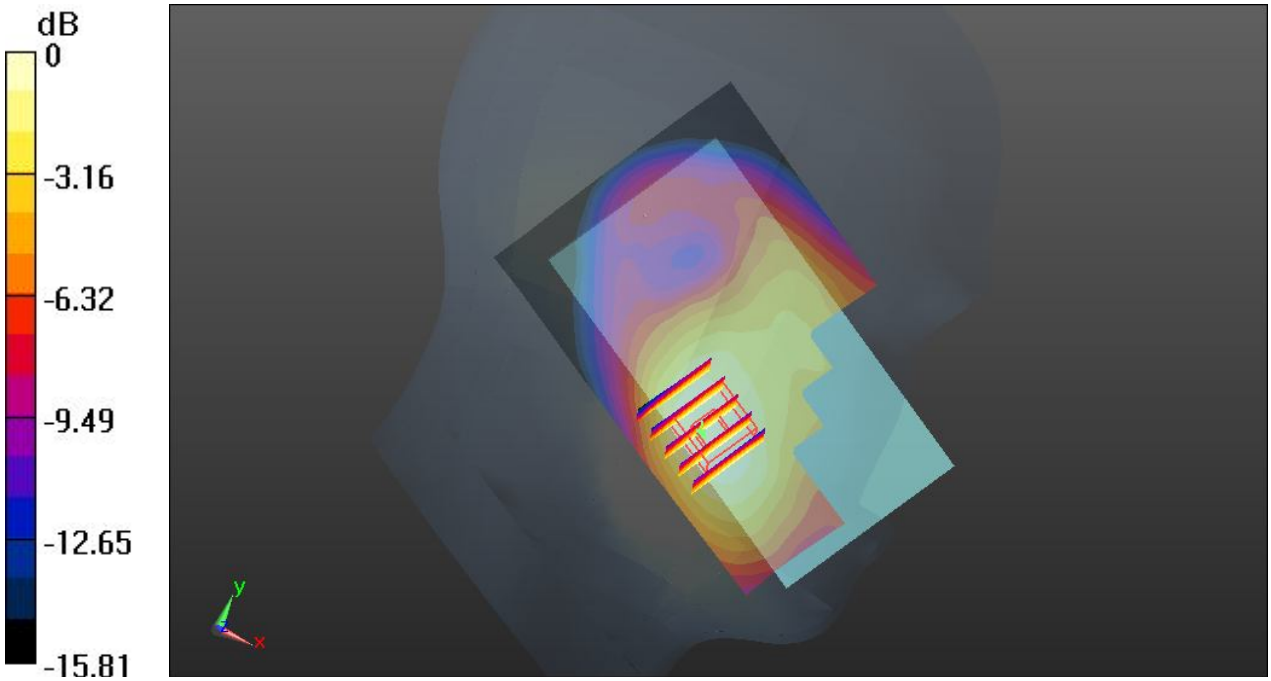

0 dB = 0.537 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#164 WCDMA Band IV_RMC 12.2K_Left Tilted_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: HSL_1750_140121 Medium parameters used: f = 1712.4 MHz; σ = 1.346 S/m; ε_r = 40.615; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.26, 8.26, 8.26); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.166 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.843 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.209 W/kg
SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.073 W/kg
Maximum value of SAR (measured) = 0.170 W/kg

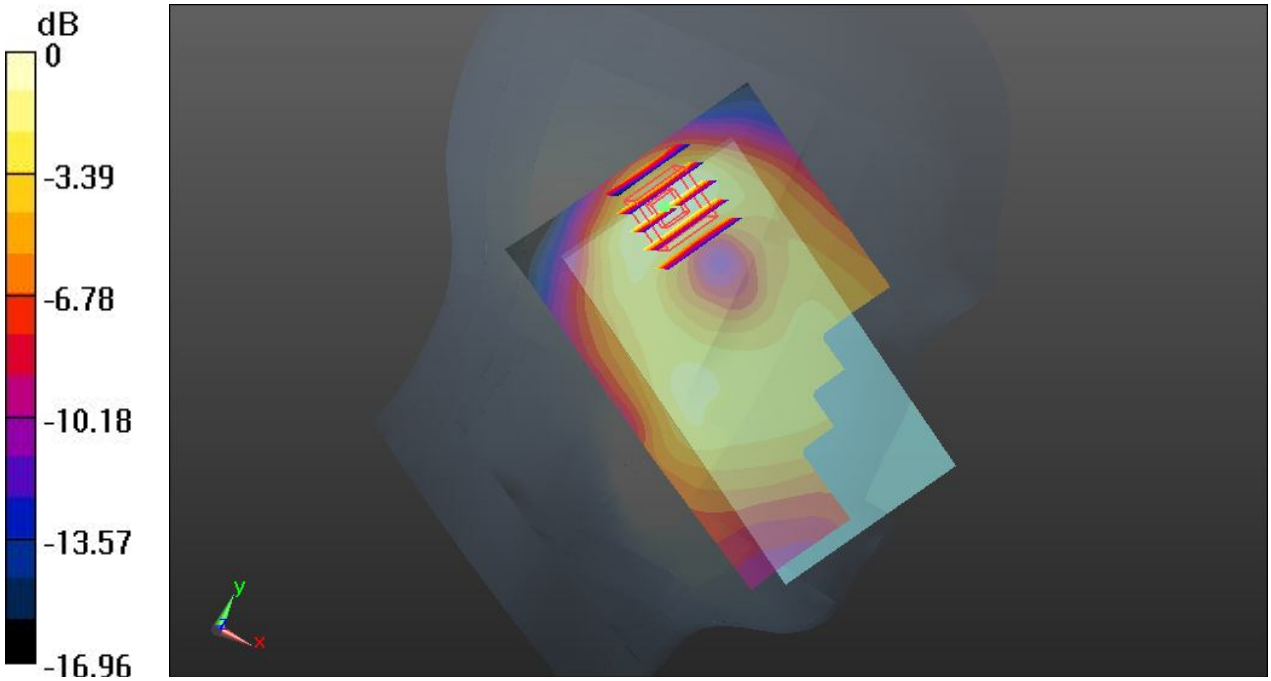

0 dB = 0.170 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#151 WCDMA Band II_RMC 12.2K_Right Cheek_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: HSL_1900_140121 Medium parameters used: f = 1907.6 MHz; σ = 1.426 S/m; ε_r = 40.977; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.341 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.664 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.398 W/kg
SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.151 W/kg
Maximum value of SAR (measured) = 0.326 W/kg

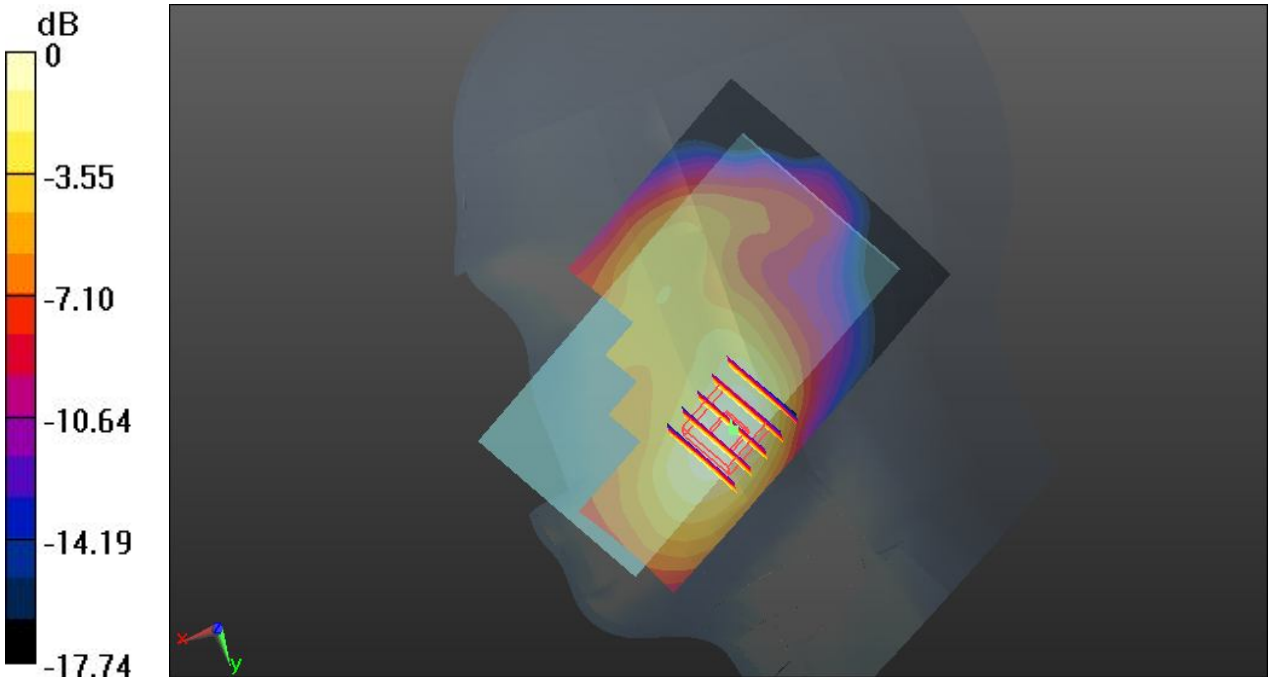

0 dB = 0.326 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#152 WCDMA Band II_RMC 12.2K_Right Tilted_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: HSL_1900_140121 Medium parameters used: f = 1907.6 MHz; σ = 1.426 S/m; ε_r = 40.977; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.149 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.763 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.182 W/kg
SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.060 W/kg
Maximum value of SAR (measured) = 0.144 W/kg

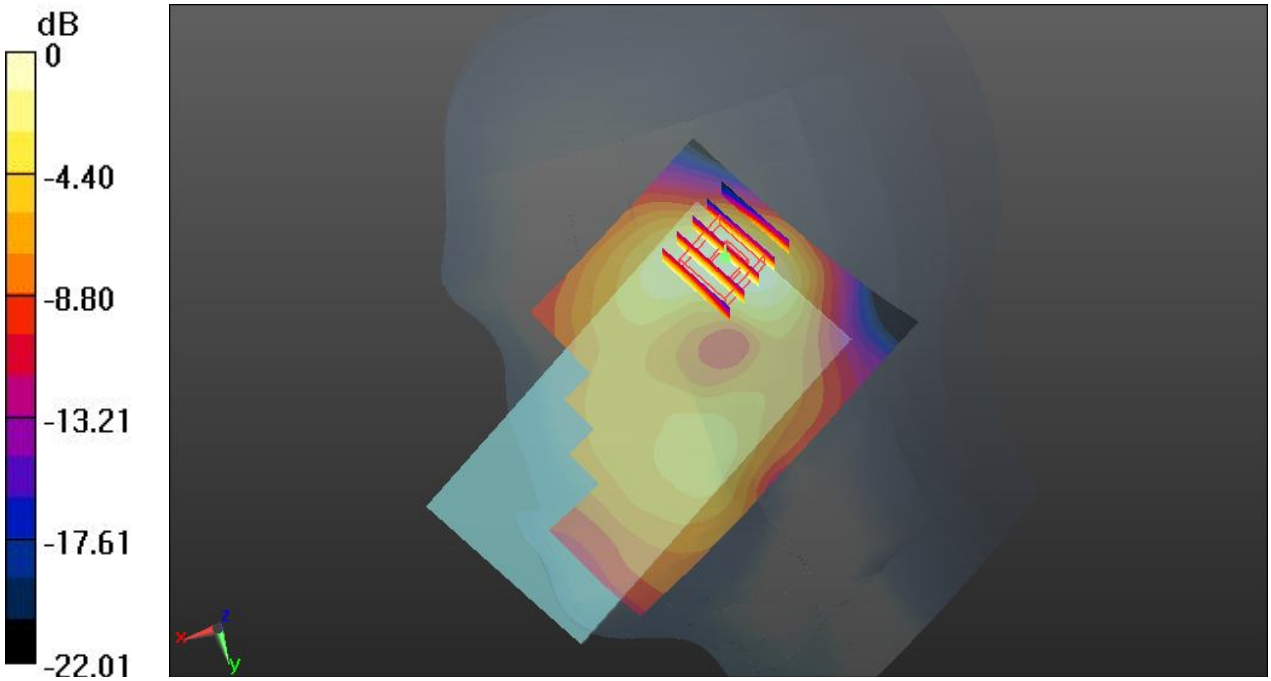

0 dB = 0.144 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#153 WCDMA Band II_RMC 12.2K_Left Cheek_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: HSL_1900_140121 Medium parameters used: f = 1907.6 MHz; σ = 1.426 S/m; ε_r = 40.977; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.260 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.164 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.318 W/kg
SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.122 W/kg
Maximum value of SAR (measured) = 0.262 W/kg

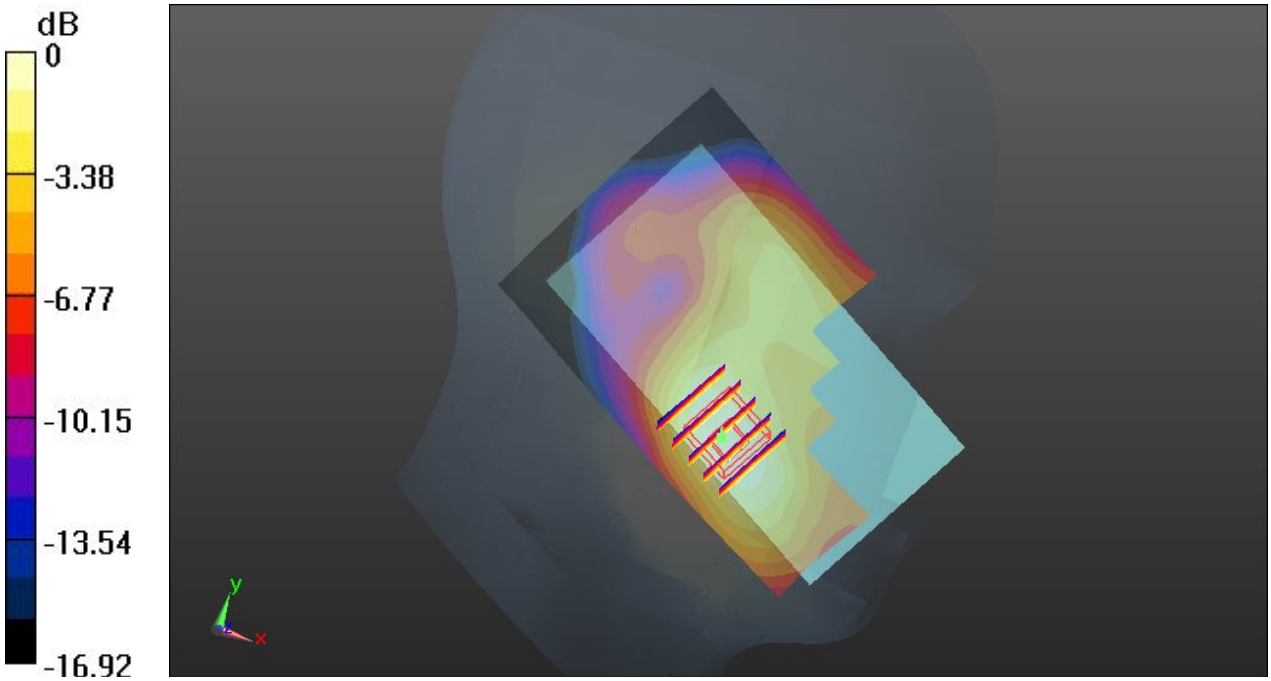

0 dB = 0.262 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#154 WCDMA Band II_RMC 12.2K_Left Tilted_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: HSL_1900_140121 Medium parameters used: f = 1907.6 MHz; σ = 1.426 S/m; ε_r = 40.977; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.118 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.770 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.148 W/kg
SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.047 W/kg
Maximum value of SAR (measured) = 0.117 W/kg

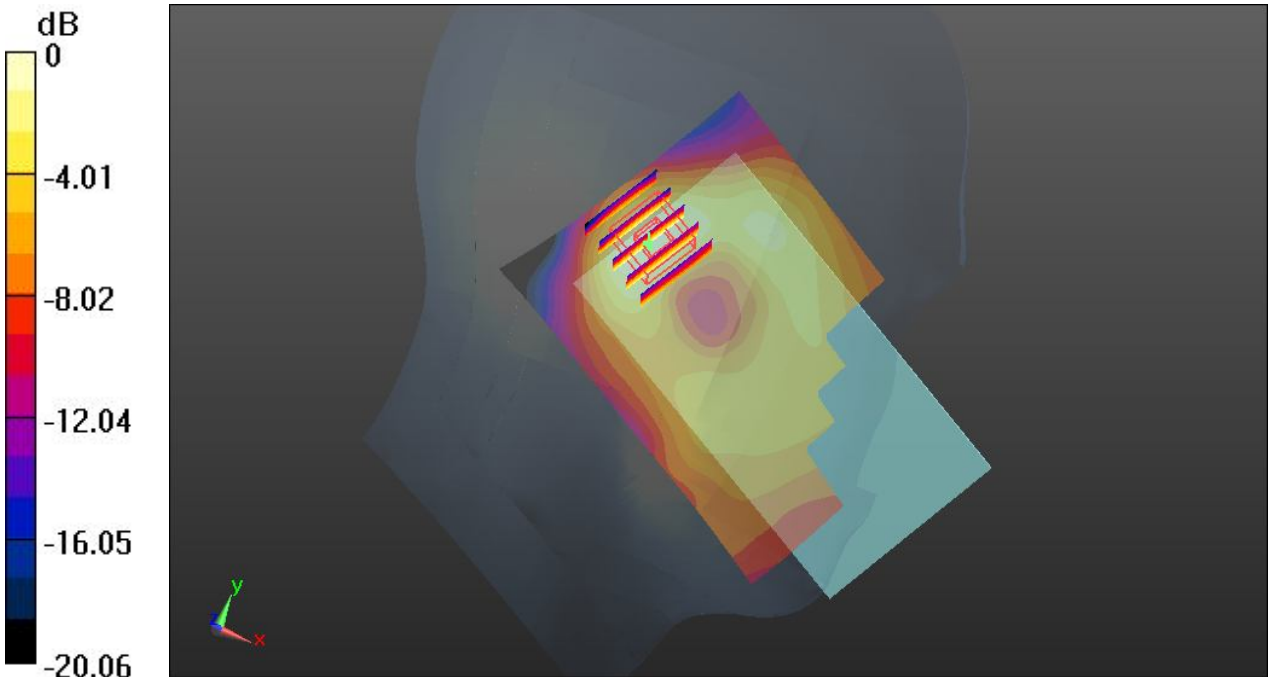

0 dB = 0.117 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#171 WLAN 2.4GHz_802.11b 1Mbps_Right Cheek_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 1.836 S/m; ε_r = 37.883; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (81x141x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 1.16 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.957 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 0.754 W/kg; SAR(10 g) = 0.352 W/kg
Maximum value of SAR (measured) = 1.18 W/kg

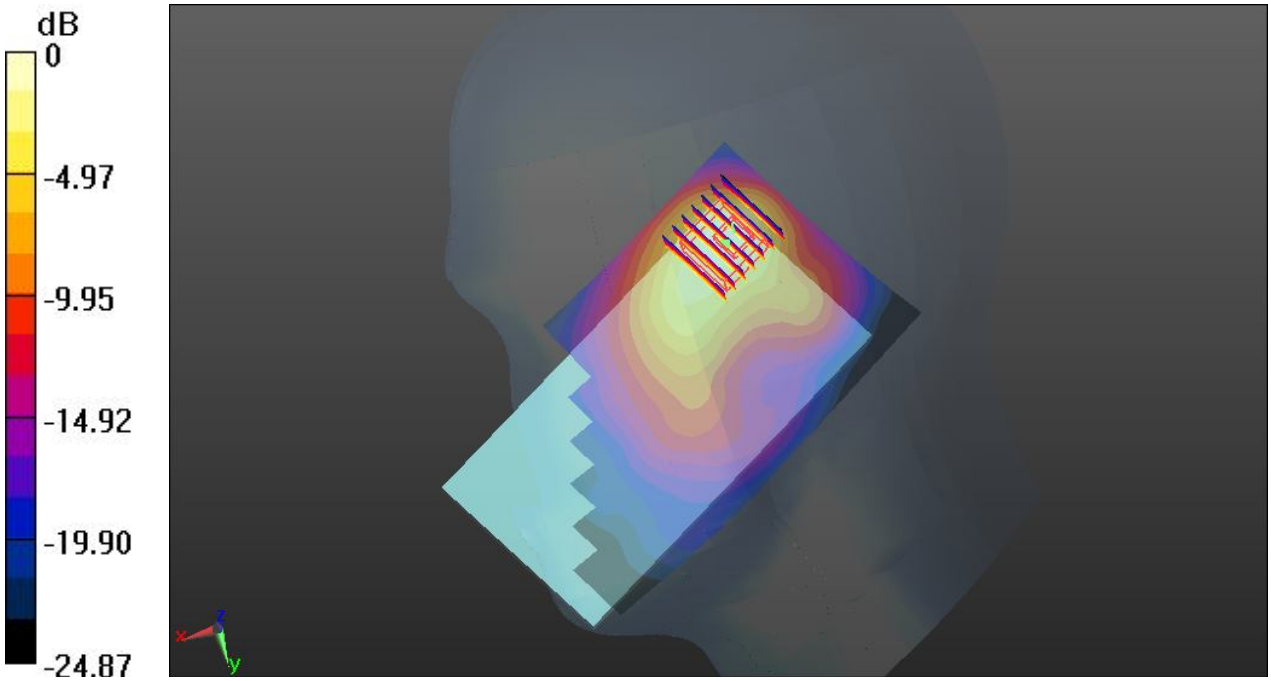

0 dB = 1.18 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#172 WLAN 2.4GHz_802.11b 1Mbps_Right Tilted_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 1.836 S/m; ε_r = 37.883; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (81x141x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.791 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.537 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.223 W/kg
Maximum value of SAR (measured) = 0.874 W/kg

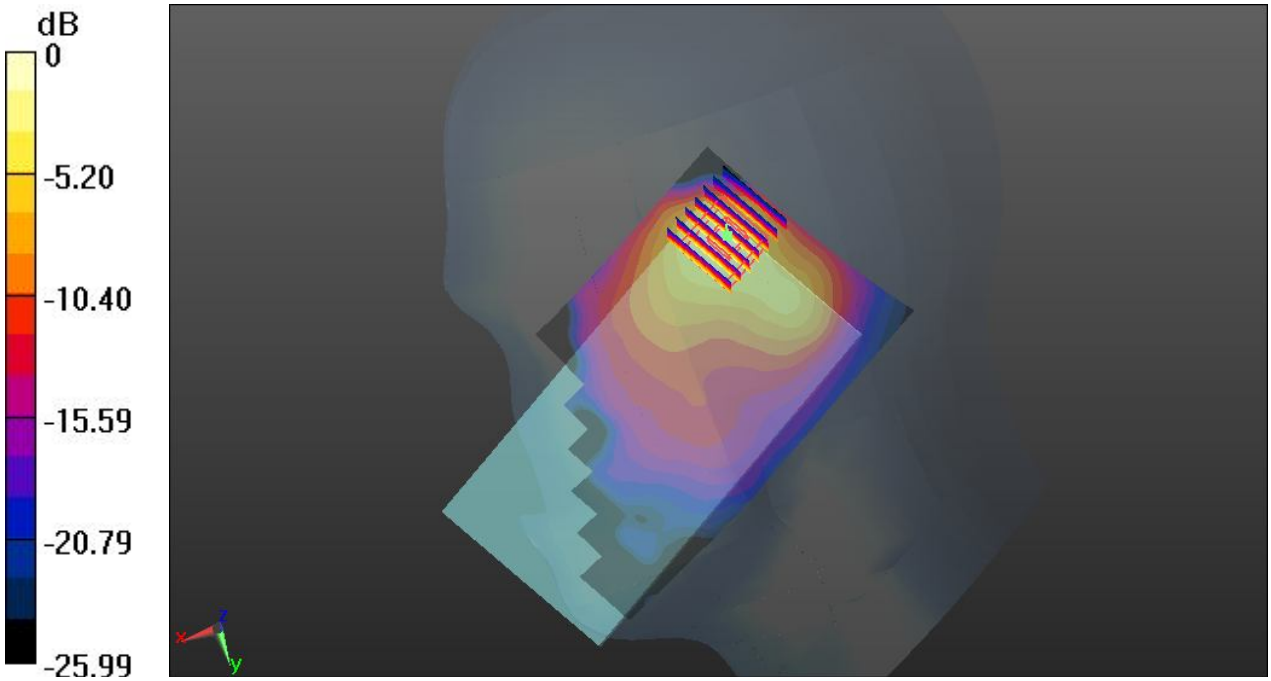

0 dB = 0.874 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#173 WLAN 2.4GHz_802.11b 1Mbps_Left Cheek_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 1.836 S/m; ε_r = 37.883; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (81x141x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.398 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.513 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.531 W/kg
SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.135 W/kg
Maximum value of SAR (measured) = 0.390 W/kg

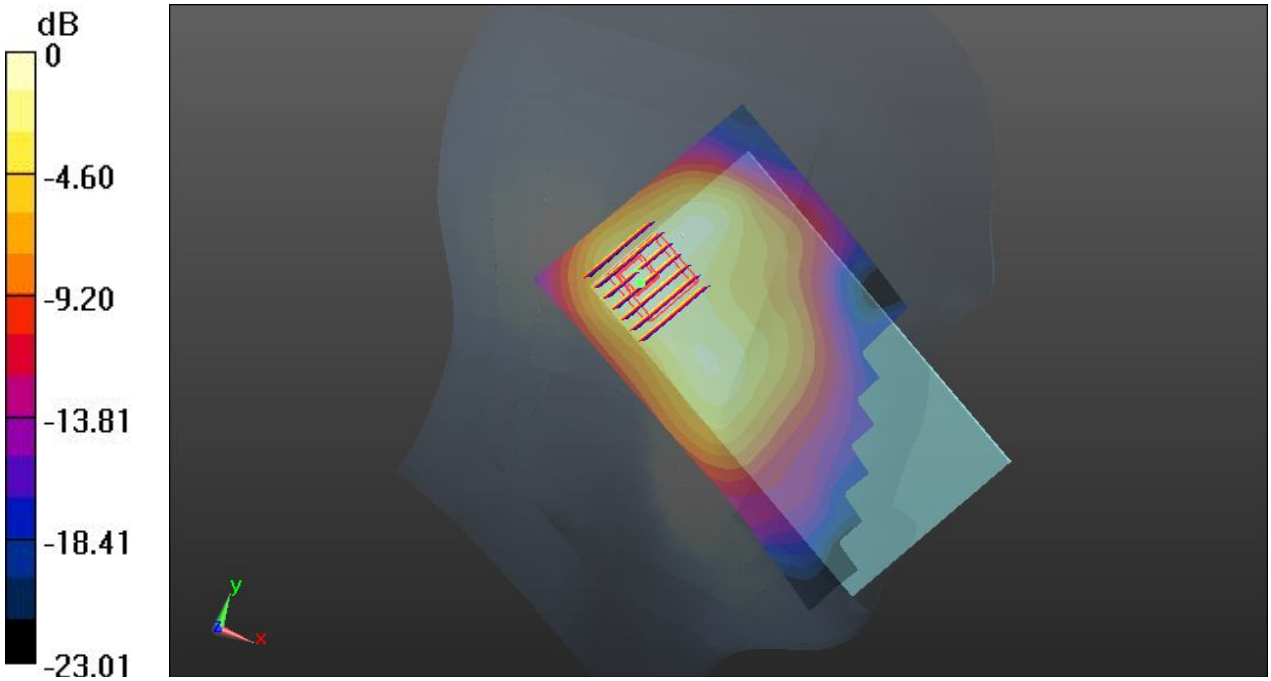

0 dB = 0.390 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#174 WLAN 2.4GHz_802.11b 1Mbps_Left Tilted_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: HSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 1.836 S/m; ε_r = 37.883; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (81x141x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.382 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.842 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.533 W/kg
SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.129 W/kg
Maximum value of SAR (measured) = 0.393 W/kg

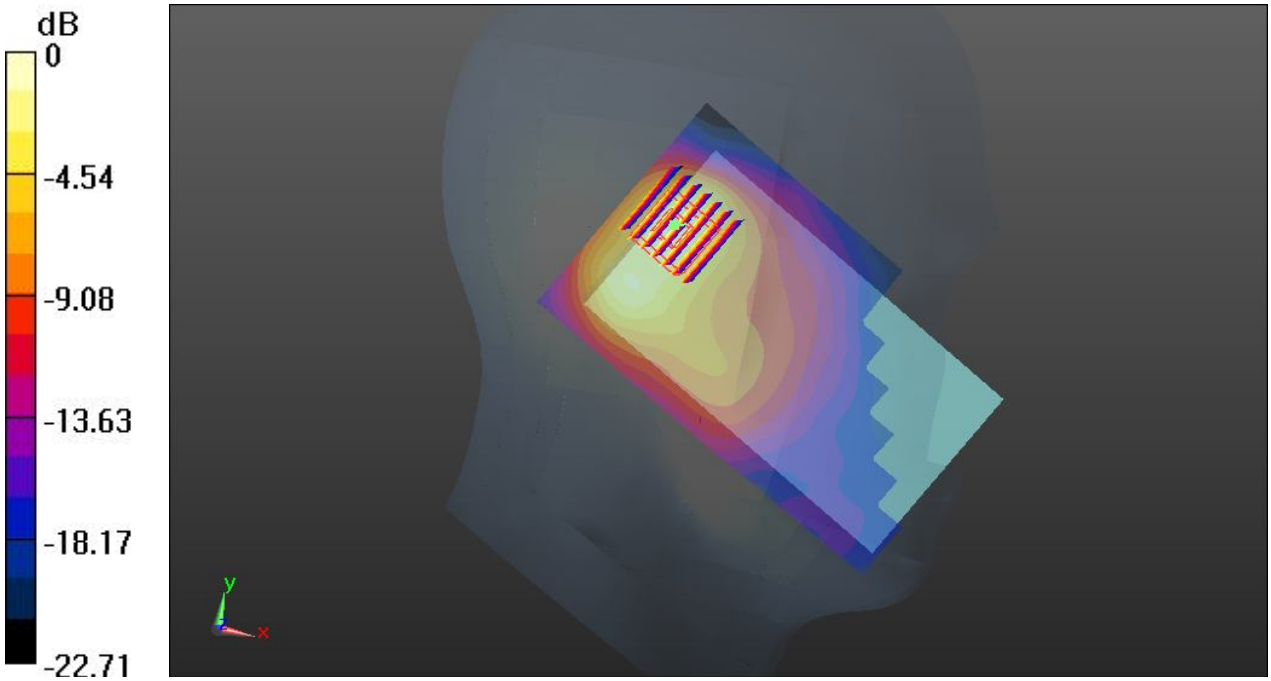

0 dB = 0.393 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#111 GSM850_GPRS(4 Tx slots)_Front_1cm_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 836.4 MHz; σ = 0.979 S/m; ε_r = 54.392; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.924 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.596 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.00 W/kg
SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.633 W/kg
Maximum value of SAR (measured) = 0.920 W/kg

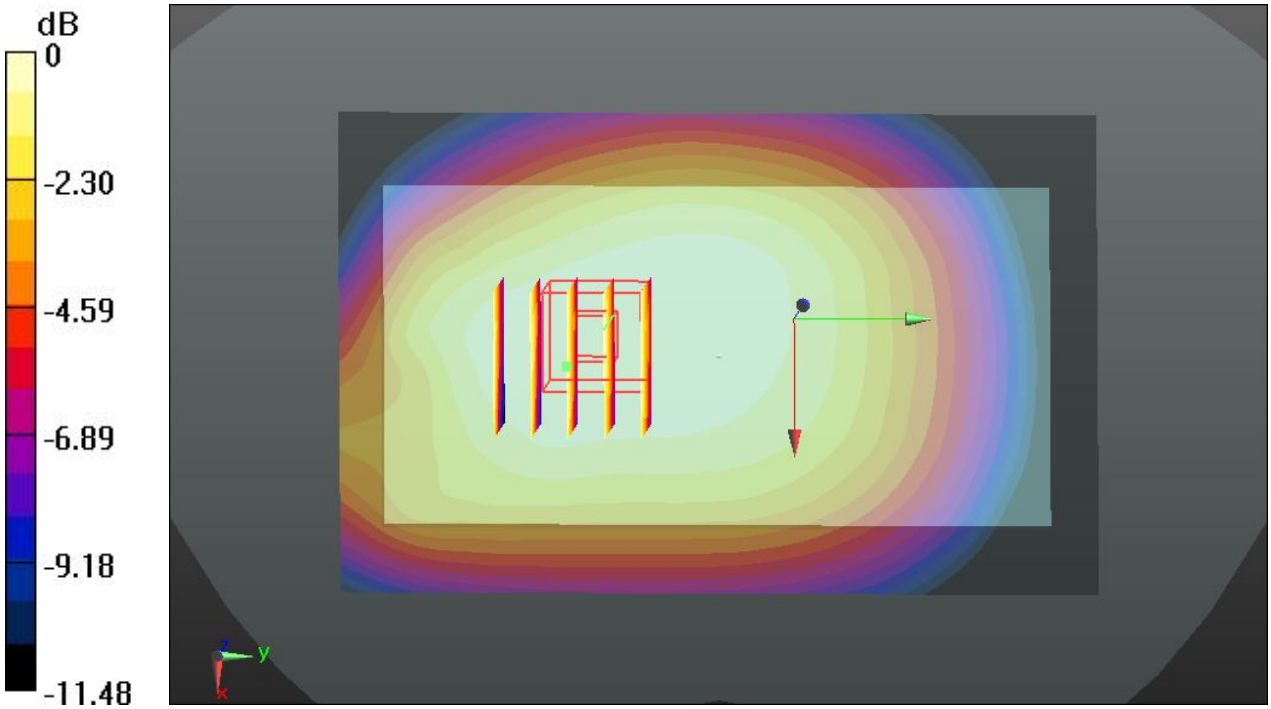

0 dB = 0.920 W/kg

#112 GSM850_GPRS(4 Tx slots)_Back_1cm_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 836.4 MHz; σ = 0.979 S/m; ε_r = 54.392; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.24 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.152 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 1.080 W/kg; SAR(10 g) = 0.819 W/kg
Maximum value of SAR (measured) = 1.26 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.152 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.518 W/kg
Maximum value of SAR (measured) = 1.02 W/kg

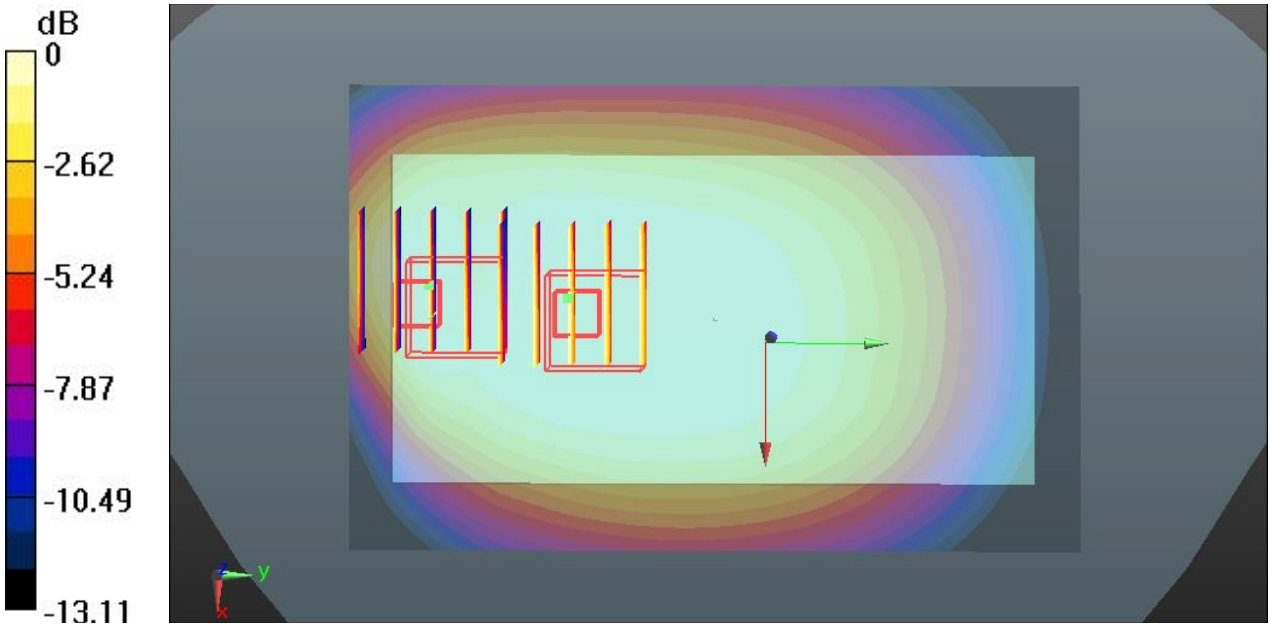

0 dB = 1.02 W/kg

#124 GSM850_GPRS(4 Tx slots)_Back_1cm_Ch189_Repeat SAR

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 836.4 MHz; σ = 0.979 S/m; ε_r = 54.392; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.25 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.296 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 1.070 W/kg; SAR(10 g) = 0.826 W/kg
Maximum value of SAR (measured) = 1.24 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.296 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.484 W/kg
Maximum value of SAR (measured) = 1.00 W/kg

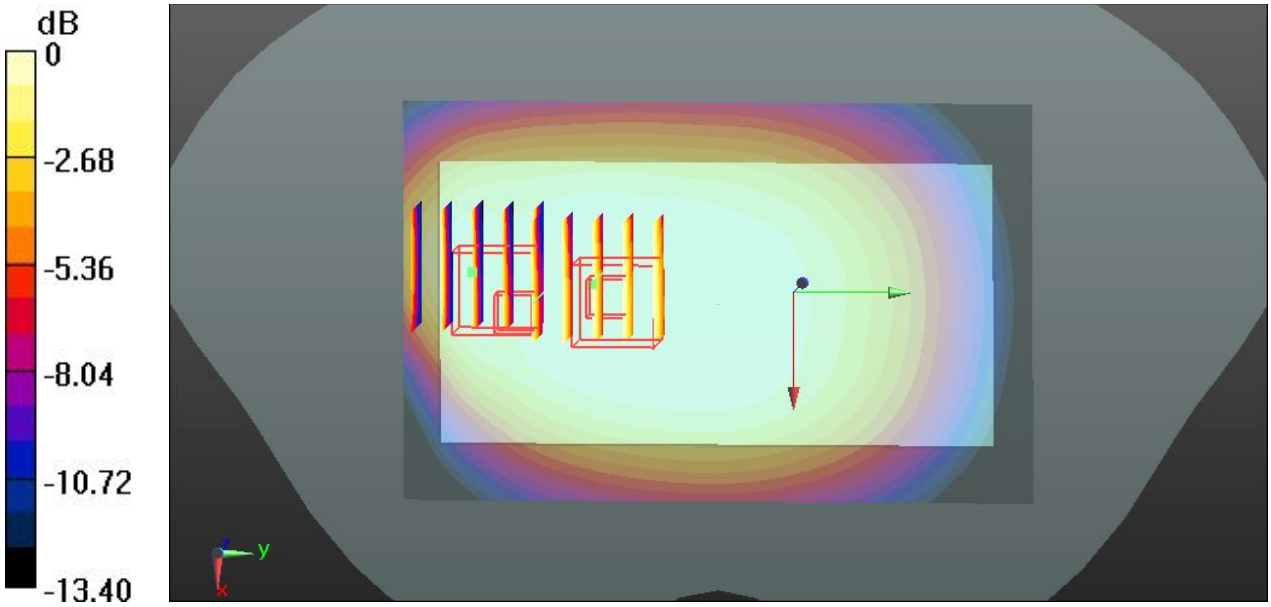

0 dB = 1.00 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#113 GSM850_GPRS(4 Tx slots)_Left Side_1cm_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 836.4 MHz; σ = 0.979 S/m; ε_r = 54.392; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.915 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.734 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.514 W/kg
Maximum value of SAR (measured) = 0.929 W/kg

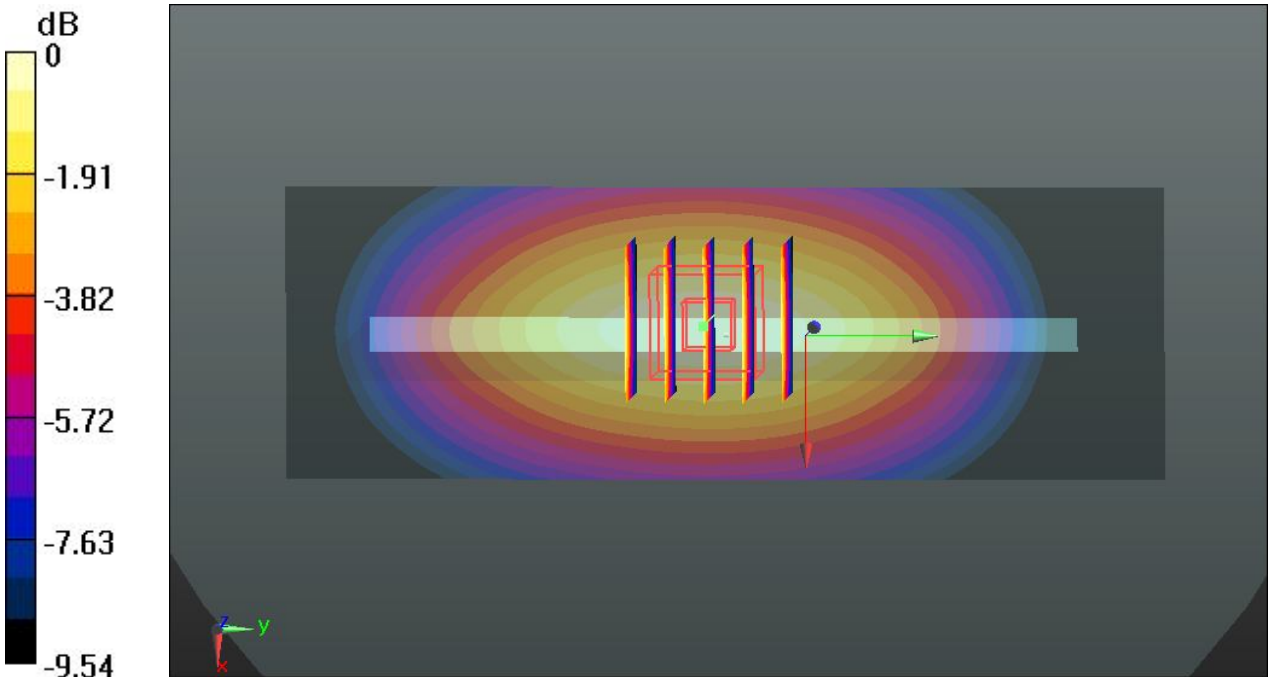

0 dB = 0.929 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#114 GSM850_GPRS(4 Tx slots)_Right Side_1cm_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 836.4 MHz; σ = 0.979 S/m; ε_r = 54.392; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.663 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.493 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.758 W/kg
SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.368 W/kg
Maximum value of SAR (measured) = 0.657 W/kg

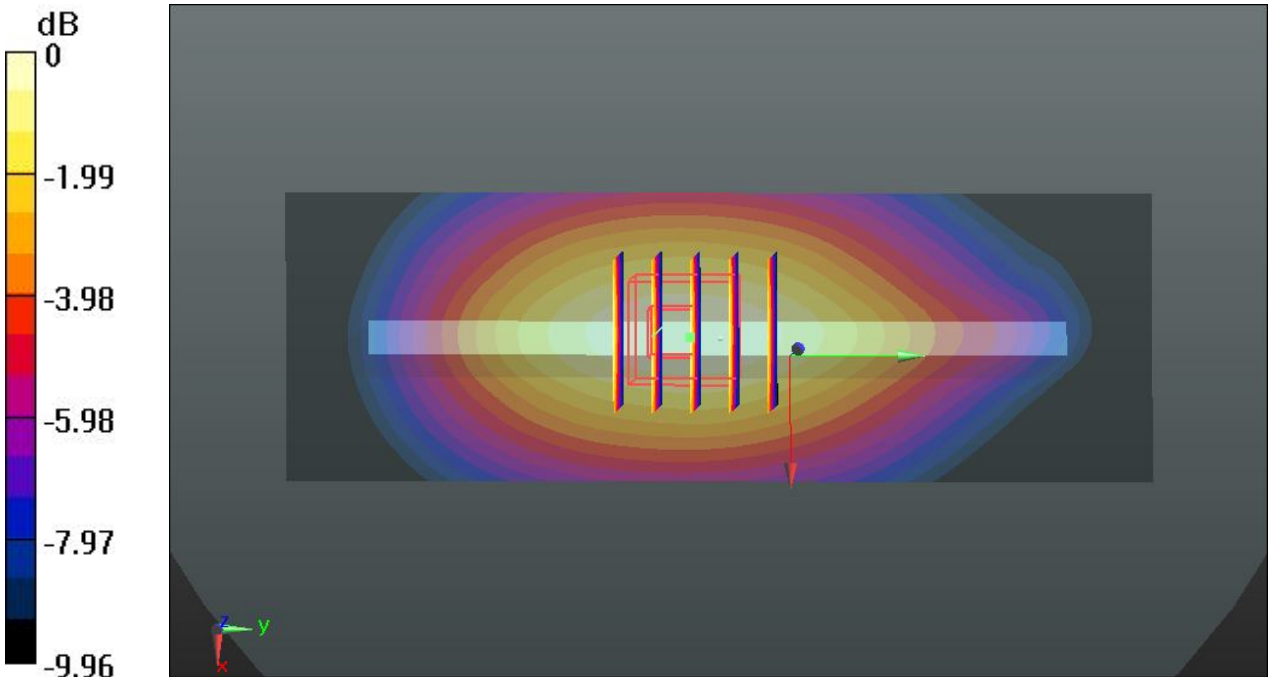

0 dB = 0.657 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#115 GSM850_GPRS(4 Tx slots)_Bottom Side_1cm_Ch189

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 836.4 MHz; σ = 0.979 S/m; ε_r = 54.392; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.376 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.757 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.531 W/kg
SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.154 W/kg
Maximum value of SAR (measured) = 0.406 W/kg

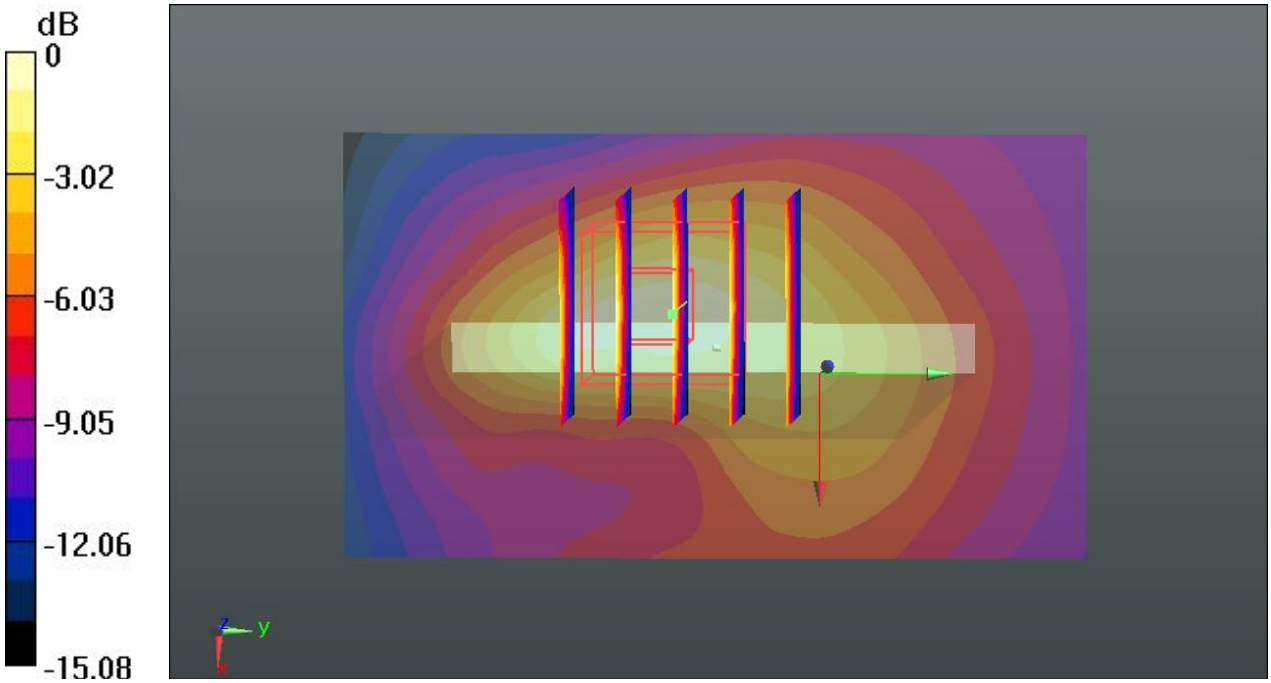

0 dB = 0.406 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#118 GSM850_GPRS(4 Tx slots)_Front_1cm_Ch128

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 824.2 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 824.2 MHz; σ = 0.967 S/m; ε_r = 54.482; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch128/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.905 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.464 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.993 W/kg
SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.621 W/kg
Maximum value of SAR (measured) = 0.904 W/kg

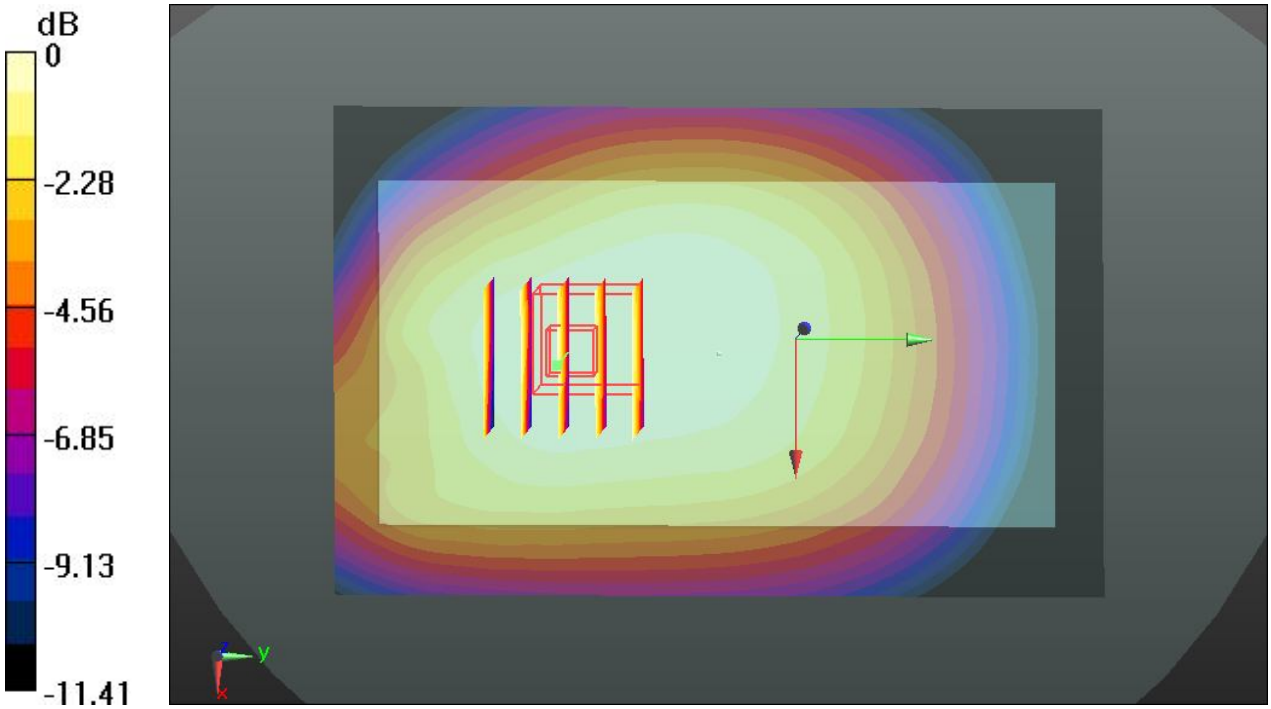

0 dB = 0.904 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#119 GSM850_GPRS(4 Tx slots)_Front_1cm_Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 848.8 MHz; σ = 0.99 S/m; ε_r = 54.278; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch251/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.861 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.373 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.940 W/kg
SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.579 W/kg
Maximum value of SAR (measured) = 0.852 W/kg

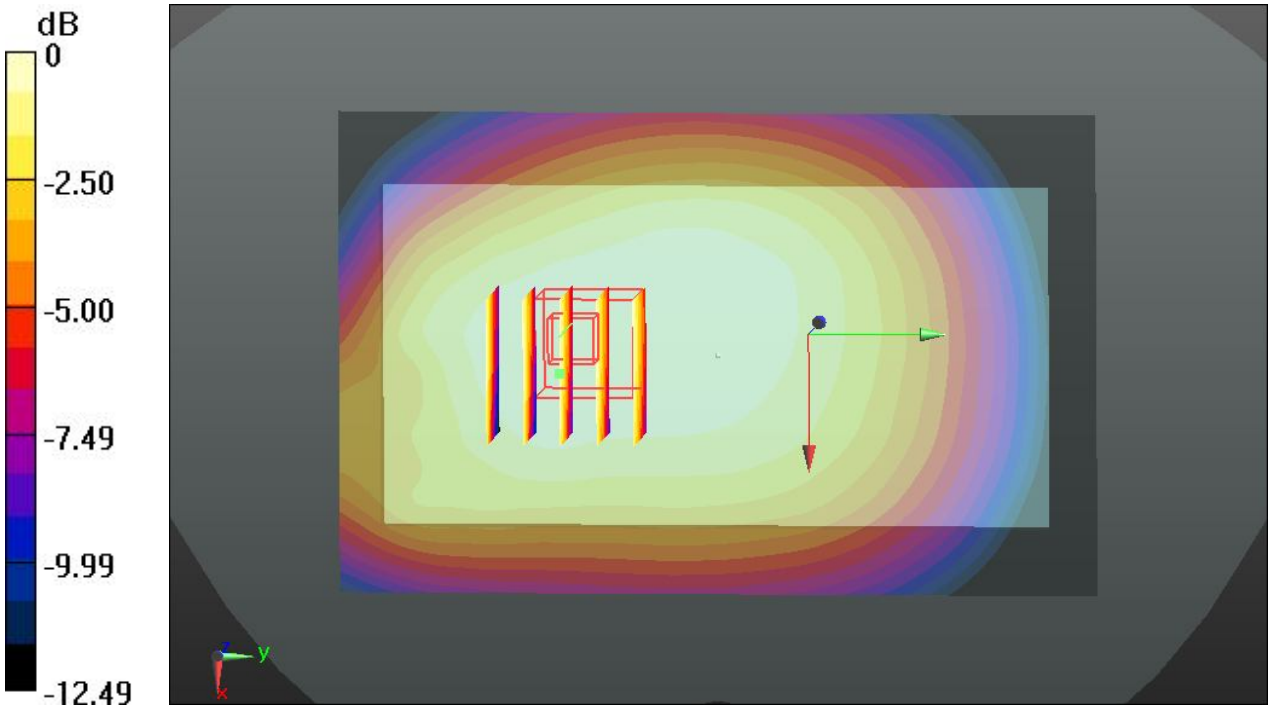

0 dB = 0.852 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#120 GSM850_GPRS(4 Tx slots)_Back_1cm_Ch128

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 824.2 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 824.2 MHz; σ = 0.967 S/m; ε_r = 54.482; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch128/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.23 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.477 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.819 W/kg
Maximum value of SAR (measured) = 1.22 W/kg

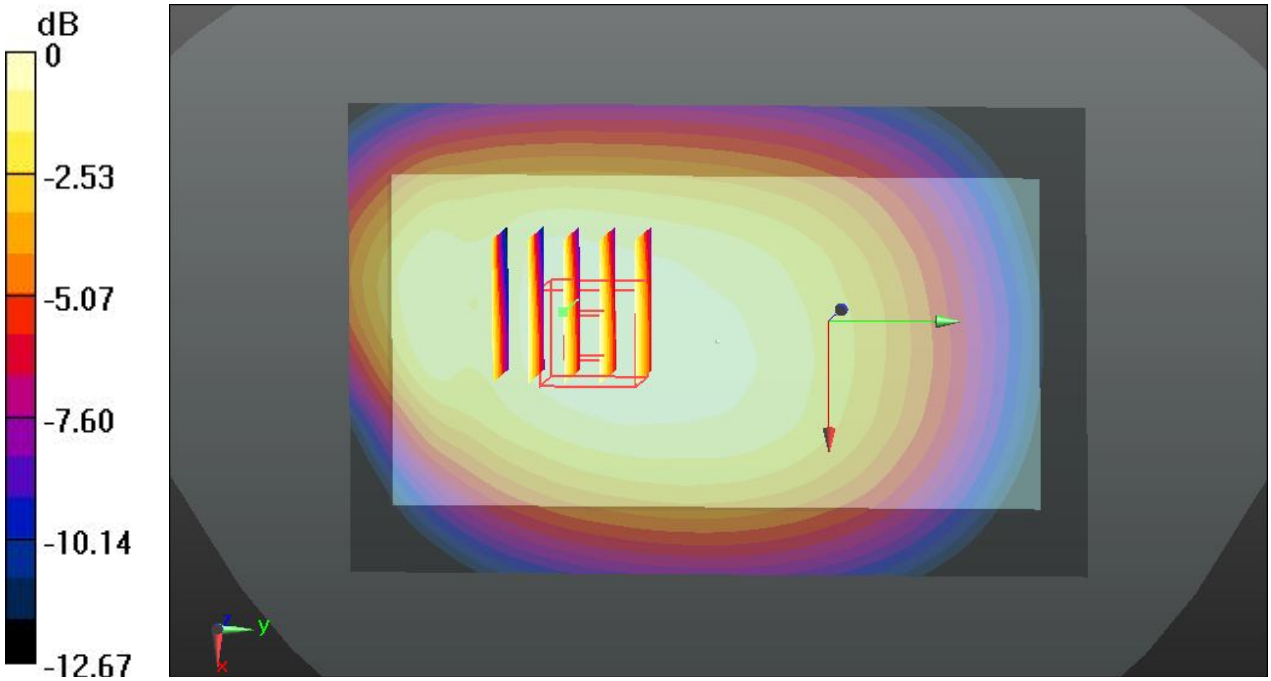

0 dB = 1.22 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#121 GSM850_GPRS(4 Tx slots)_Back_1cm_Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 848.8 MHz; σ = 0.99 S/m; ε_r = 54.278; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch251/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.15 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.685 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 1.000 W/kg; SAR(10 g) = 0.765 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

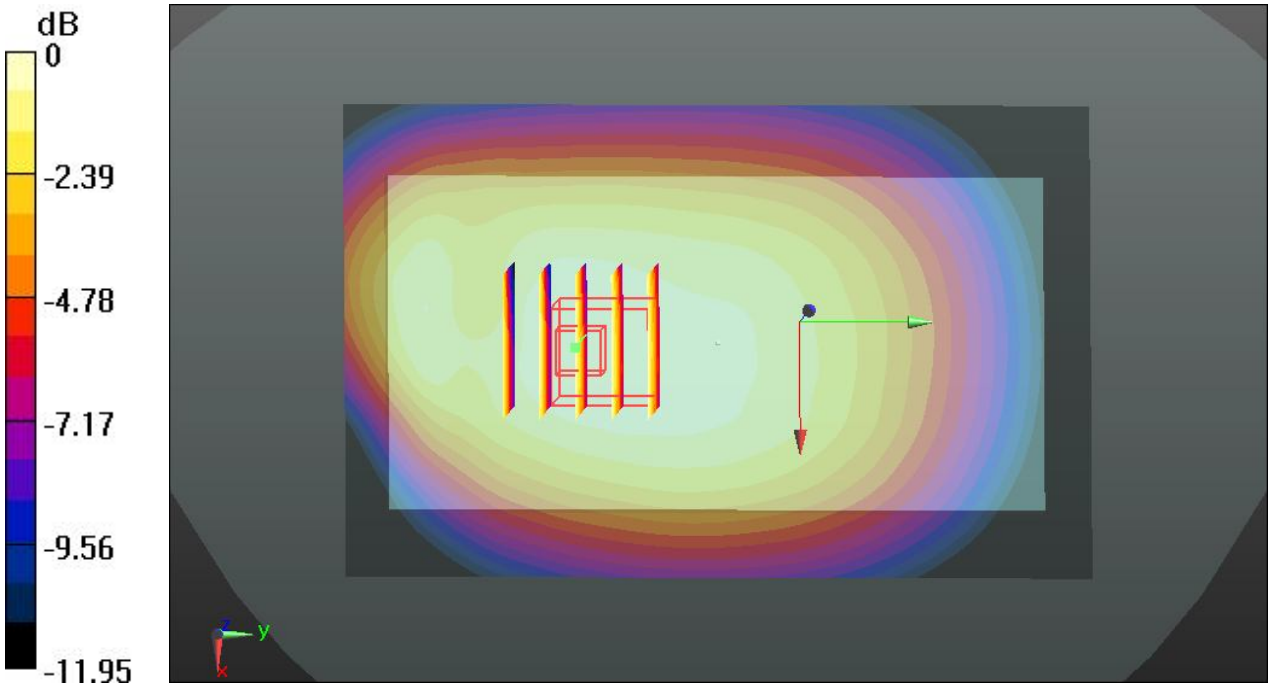

0 dB = 1.16 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#122 GSM850_GPRS(4 Tx slots)_Left Side_1cm_Ch128

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 824.2 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 824.2 MHz; σ = 0.967 S/m; ε_r = 54.482; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch128/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.07 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.211 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.601 W/kg
Maximum value of SAR (measured) = 1.07 W/kg

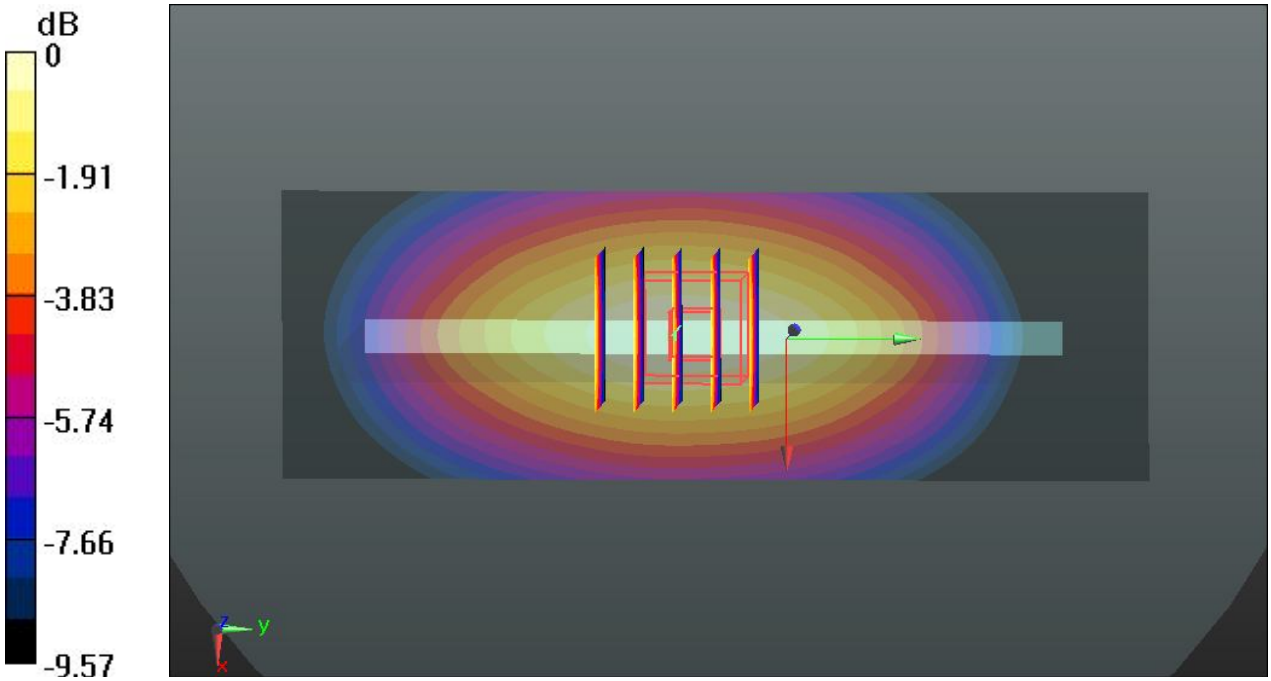

0 dB = 1.07 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#123 GSM850_GPRS(4 Tx slots)_Left Side_1cm_Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz;Duty Cycle: 1:2.08
Medium: MSL_835_140121 Medium parameters used: f = 848.8 MHz; σ = 0.99 S/m; ε_r = 54.278; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch251/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.10 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.238 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.27 W/kg
SAR(1 g) = 0.890 W/kg; SAR(10 g) = 0.607 W/kg
Maximum value of SAR (measured) = 1.11 W/kg

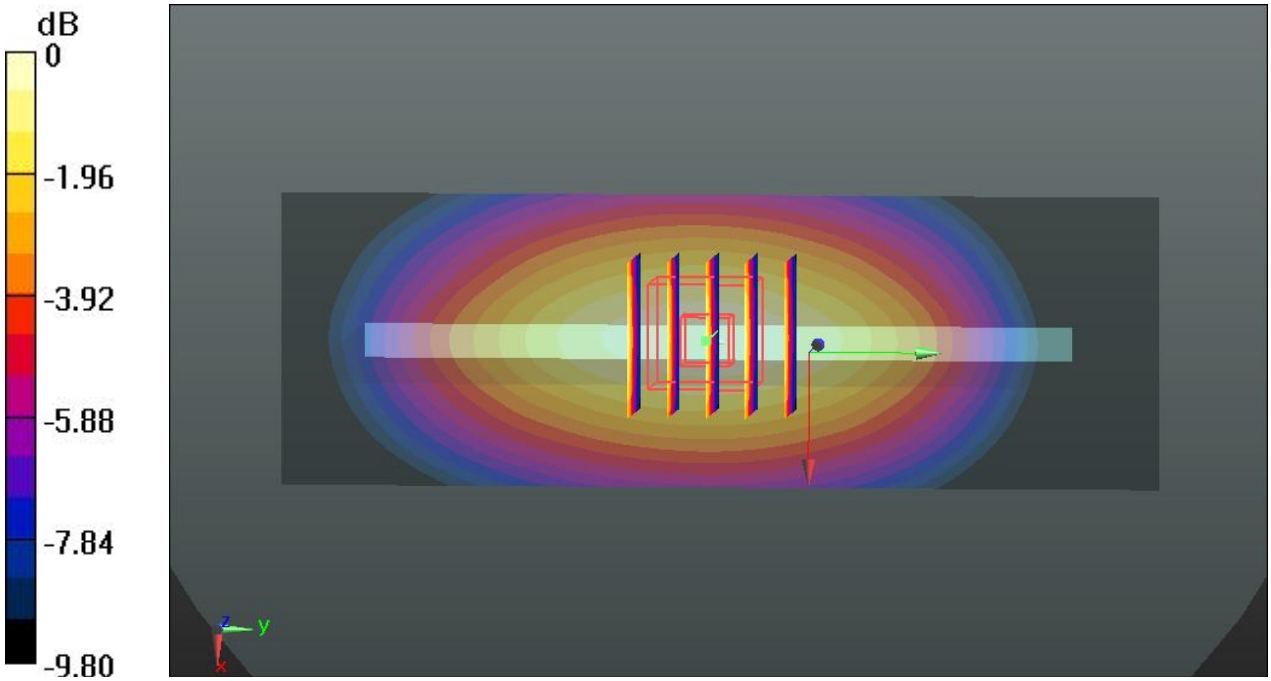

0 dB = 1.11 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#117 GSM850_GSM Voice_Back_1cm_Ch189

Communication System: UID 0, Generic GSM (0); Frequency: 836.4 MHz;Duty Cycle: 1:8.3
Medium: MSL_835_140121 Medium parameters used: f = 836.4 MHz; σ = 0.979 S/m; ε_r = 54.392; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch189/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.716 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.423 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.791 W/kg
SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.475 W/kg
Maximum value of SAR (measured) = 0.714 W/kg

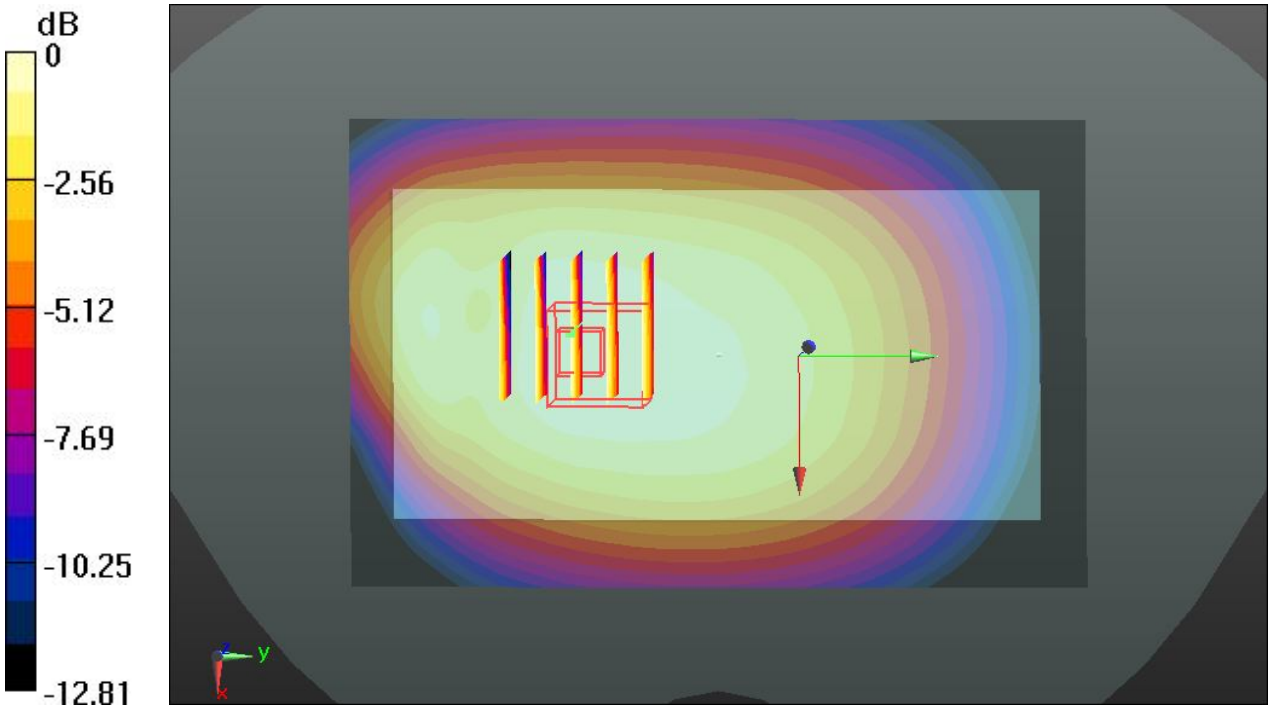

0 dB = 0.714 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#71 GSM1900_GPRS(2 Tx slots)_Front_1cm_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.31 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.099 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.495 W/kg
Maximum value of SAR (measured) = 1.30 W/kg

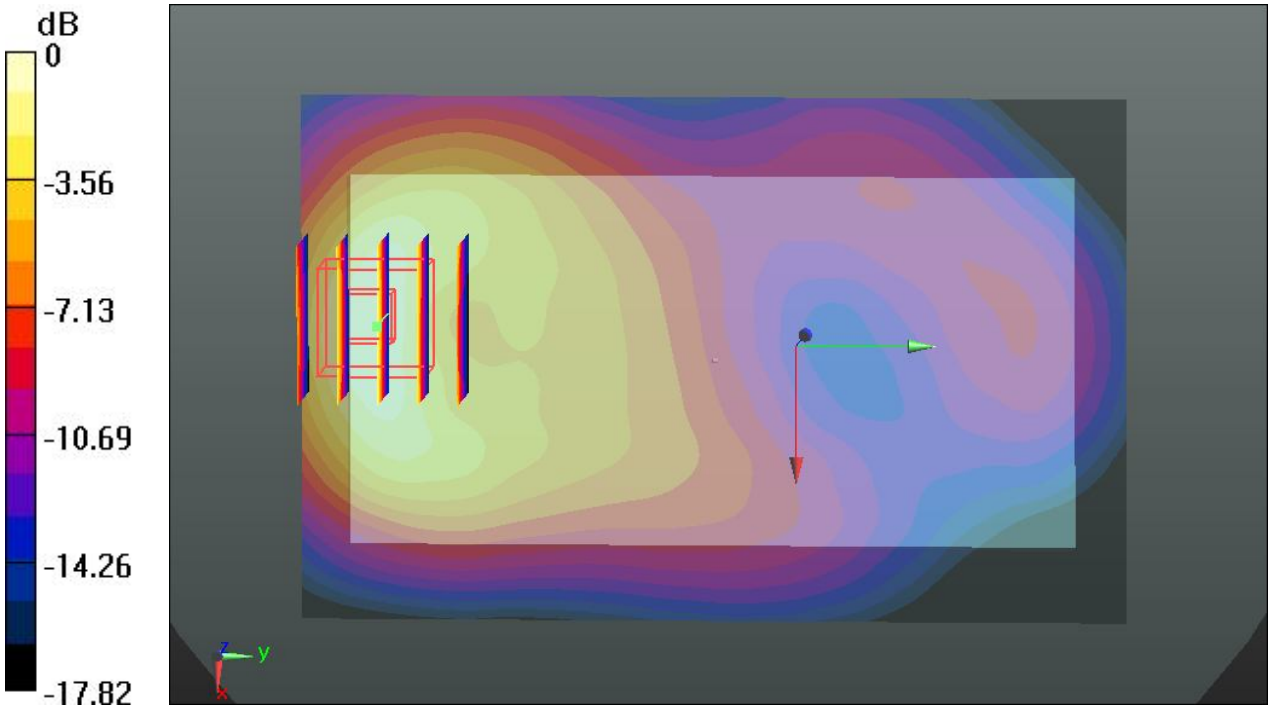

0 dB = 1.30 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#72 GSM1900_GPRS(2 Tx slots)_Back_1cm_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.14 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.639 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.844 W/kg; SAR(10 g) = 0.455 W/kg
Maximum value of SAR (measured) = 1.18 W/kg

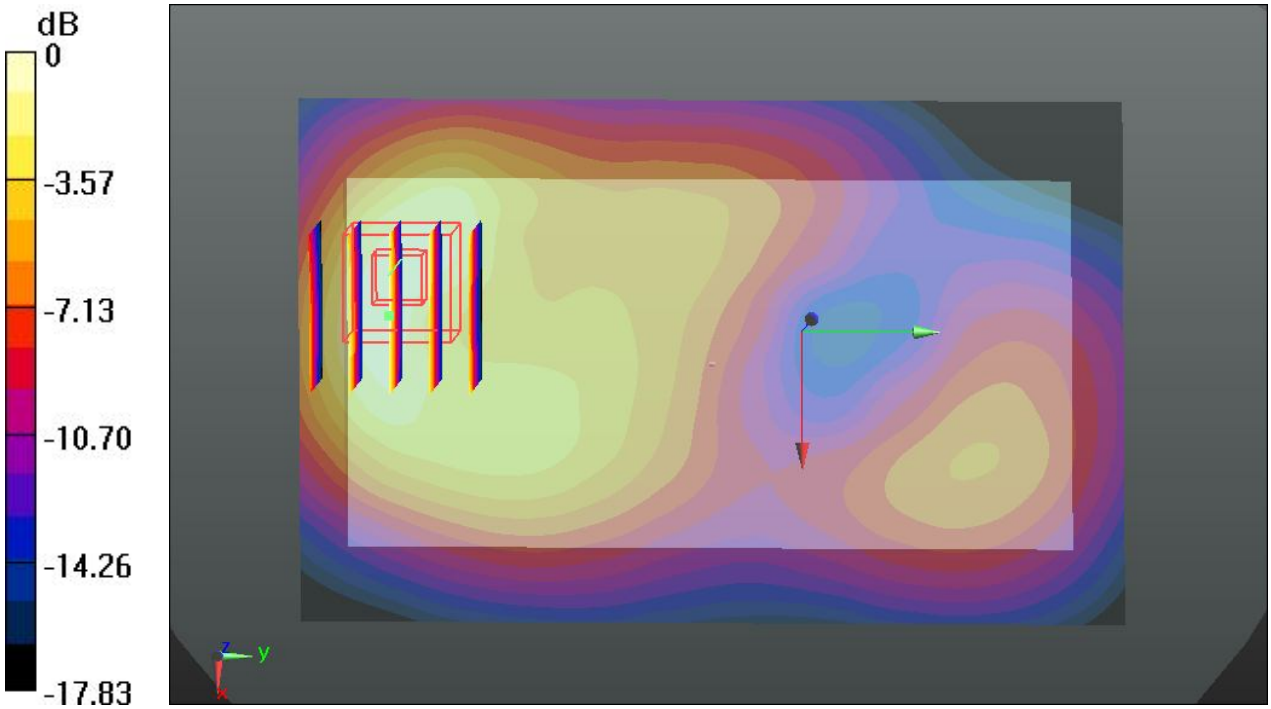

0 dB = 1.18 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#73 GSM1900_GPRS(2 Tx slots)_Left Side_1cm_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.322 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.529 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.401 W/kg
SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.132 W/kg
Maximum value of SAR (measured) = 0.321 W/kg

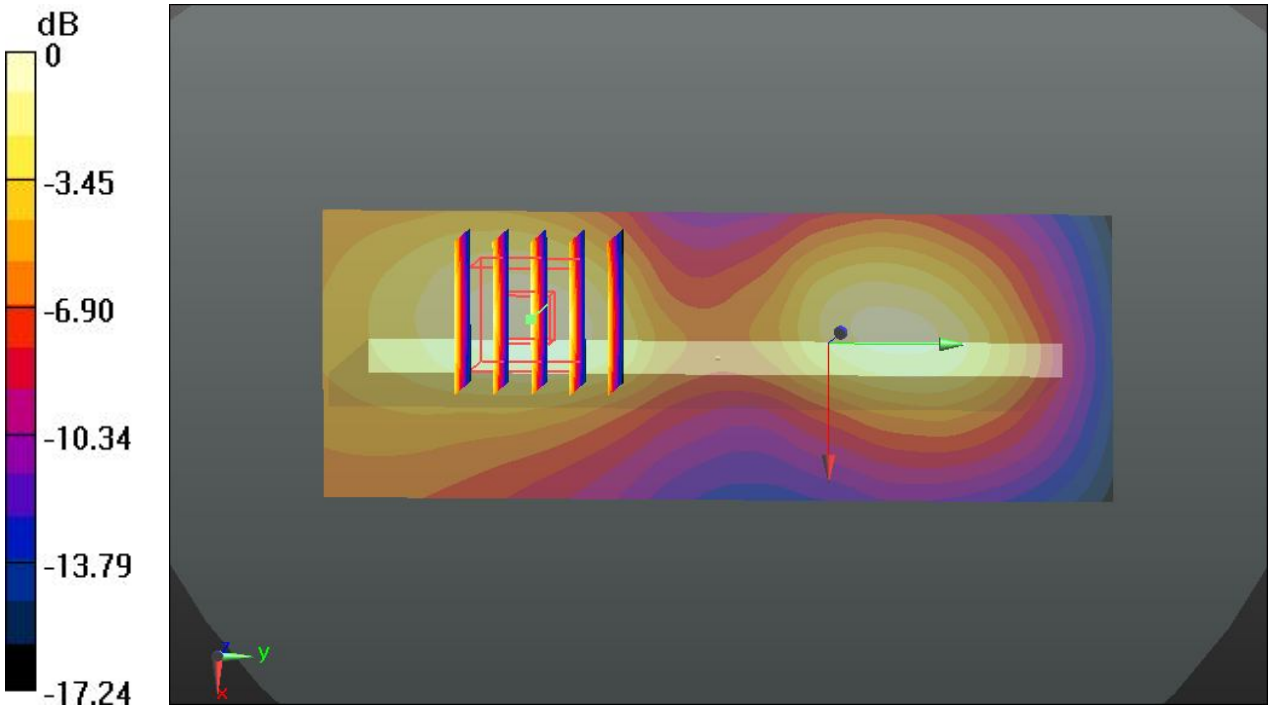

0 dB = 0.321 W/kg

#74 GSM1900_GPRS(2 Tx slots)_Right Side_1cm_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.231 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.951 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.293 W/kg
SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.093 W/kg
Maximum value of SAR (measured) = 0.231 W/kg

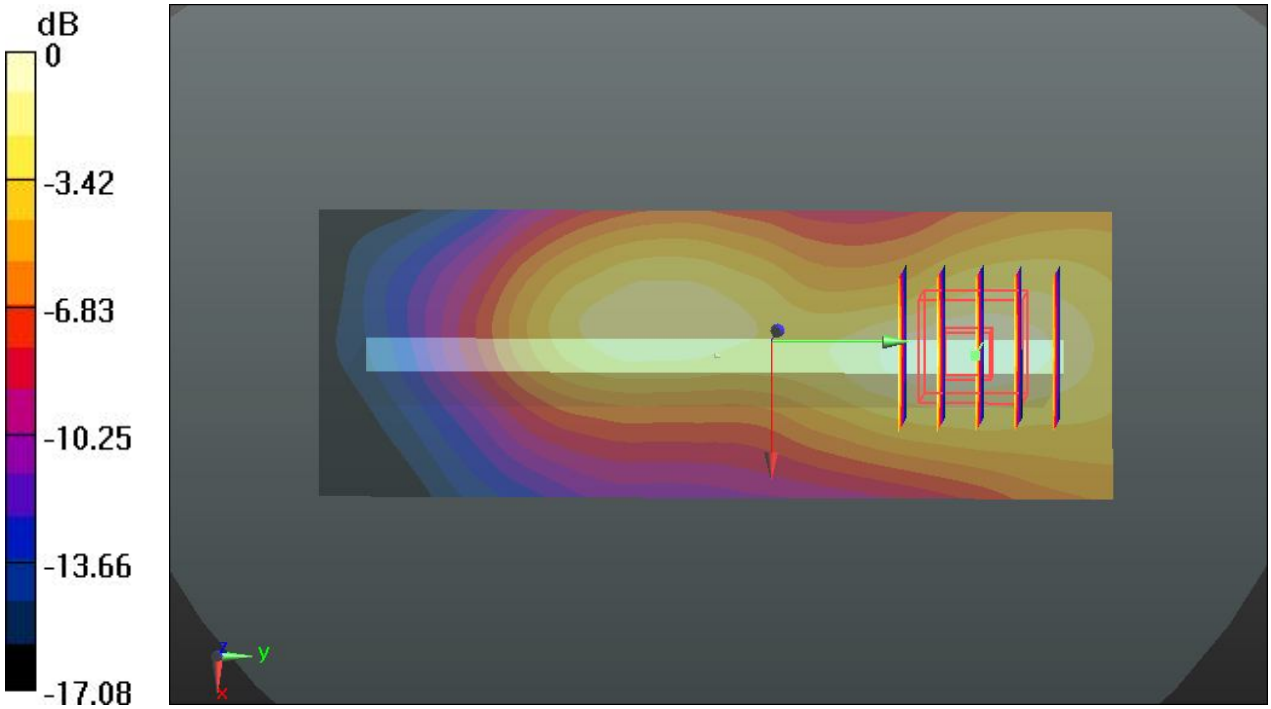

0 dB = 0.231 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#75 GSM1900_GPRS(2 Tx slots)_Bottom Side_1cm_Ch661

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.76 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.168 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.29 W/kg
SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.637 W/kg
Maximum value of SAR (measured) = 1.81 W/kg

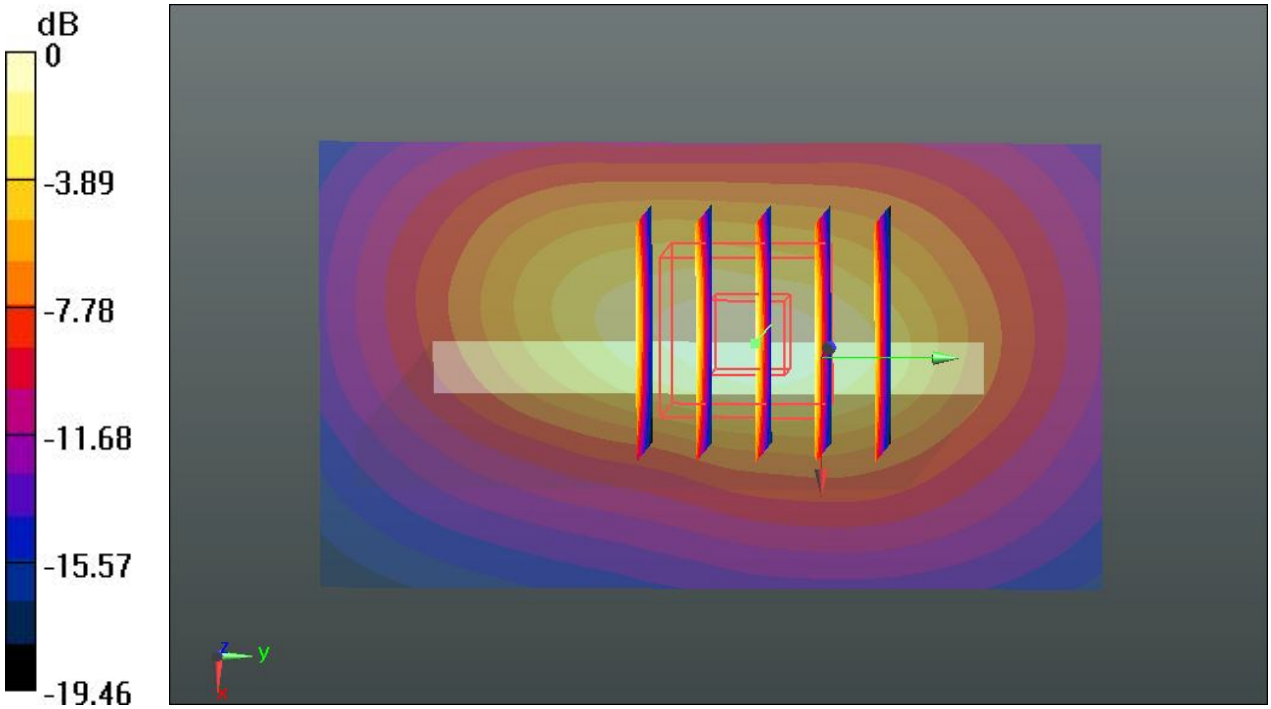

0 dB = 1.81 W/kg

#84 GSM1900_GPRS(2 Tx slots)_Bottom Side_1cm_Ch661_Repeat SAR

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1880 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.48 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.371 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.13 W/kg
SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.619 W/kg
Maximum value of SAR (measured) = 1.68 W/kg

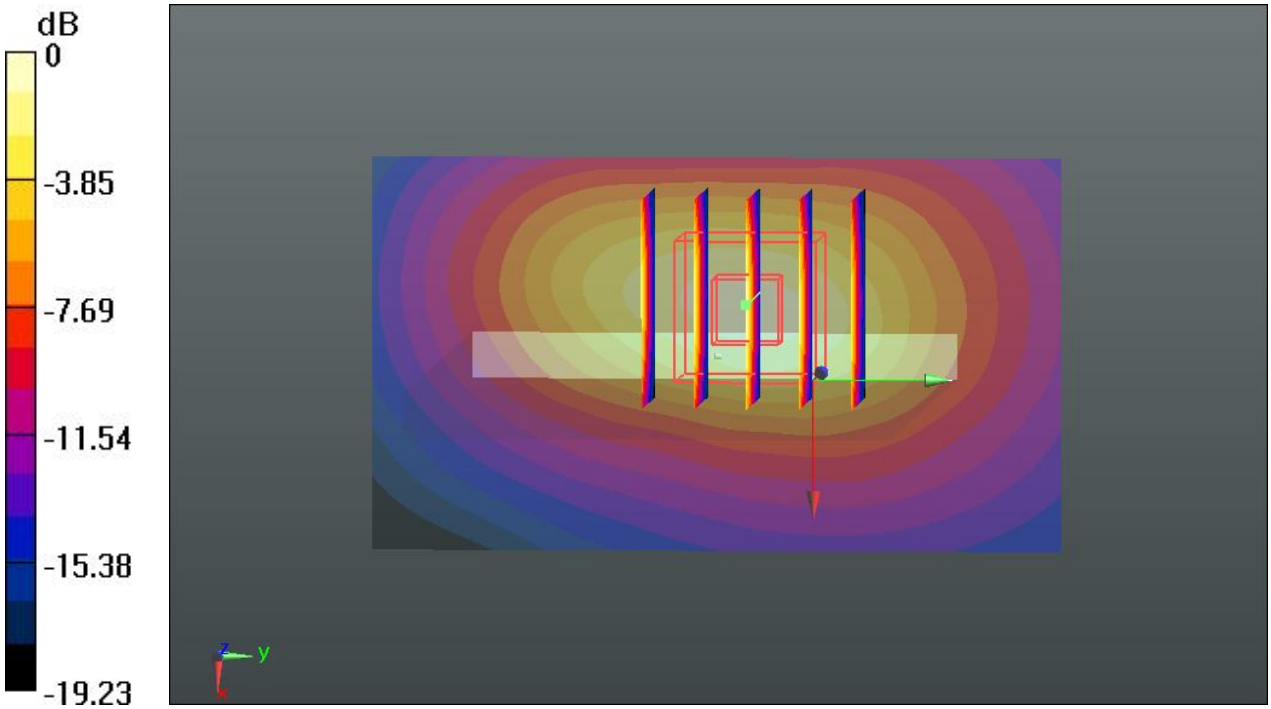

0 dB = 1.68 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#78 GSM1900_GPRS(2 Tx slots)_Front_1cm_Ch512

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1850.2 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1850.2 MHz; σ = 1.468 S/m; ε_r = 54.843; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch512/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.30 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.790 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 1.59 W/kg
SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.494 W/kg
Maximum value of SAR (measured) = 1.29 W/kg

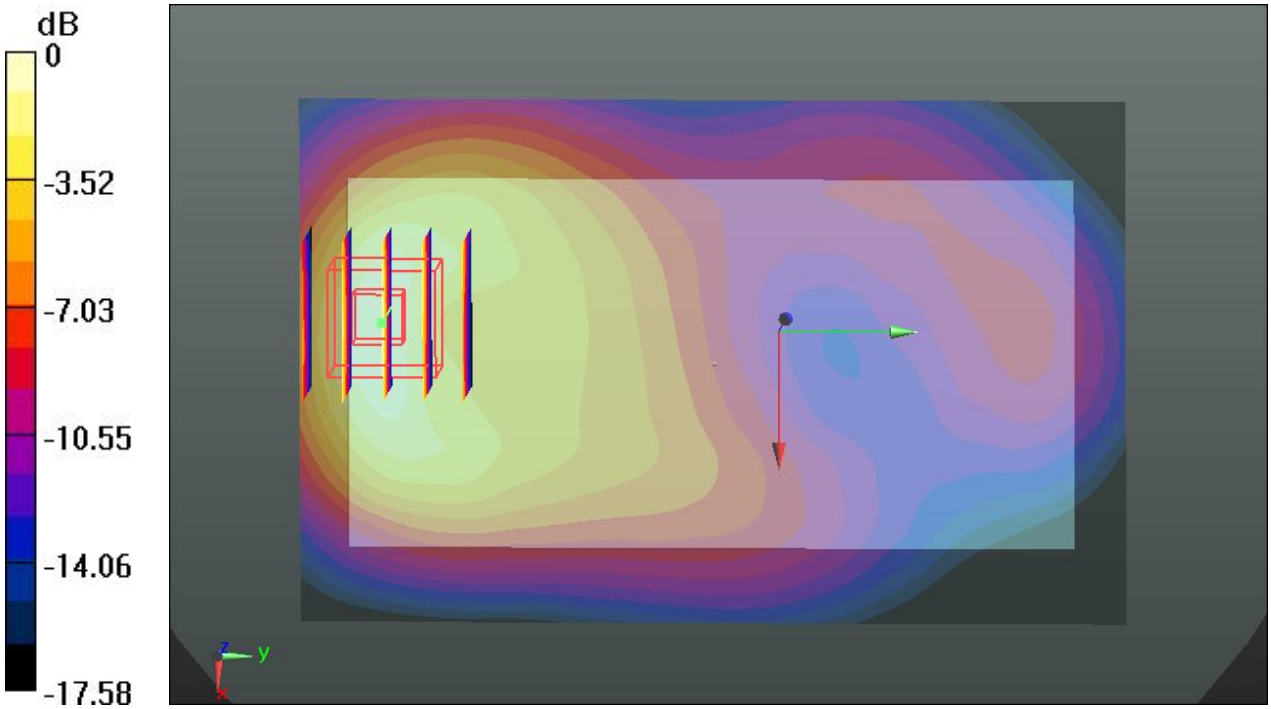

0 dB = 1.29 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#79 GSM1900_GPRS(2 Tx slots)_Front_1cm_Ch810

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1909.8 MHz; σ = 1.544 S/m; ε_r = 54.586; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch810/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.472 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.449 W/kg
Maximum value of SAR (measured) = 1.21 W/kg

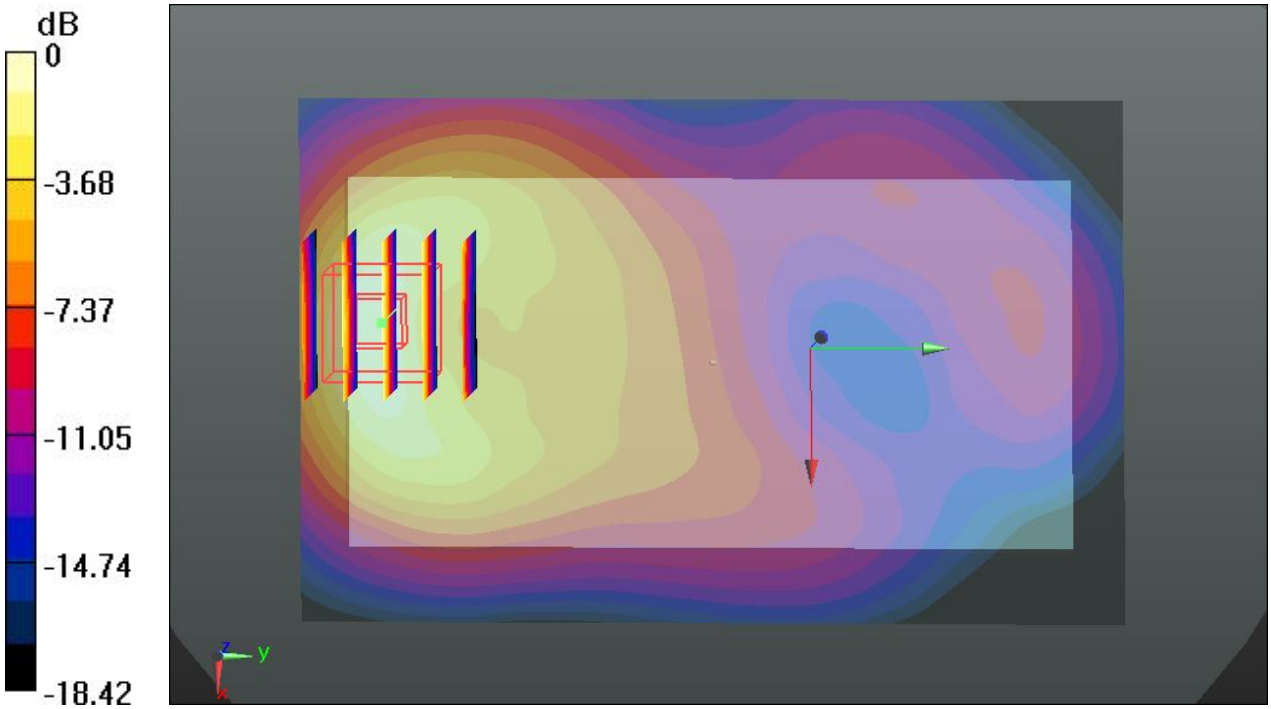

0 dB = 1.21 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#80 GSM1900_GPRS(2 Tx slots)_Back_1cm_Ch512

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1850.2 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1850.2 MHz; σ = 1.468 S/m; ε_r = 54.843; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch512/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.500 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.438 W/kg
Maximum value of SAR (measured) = 1.10 W/kg

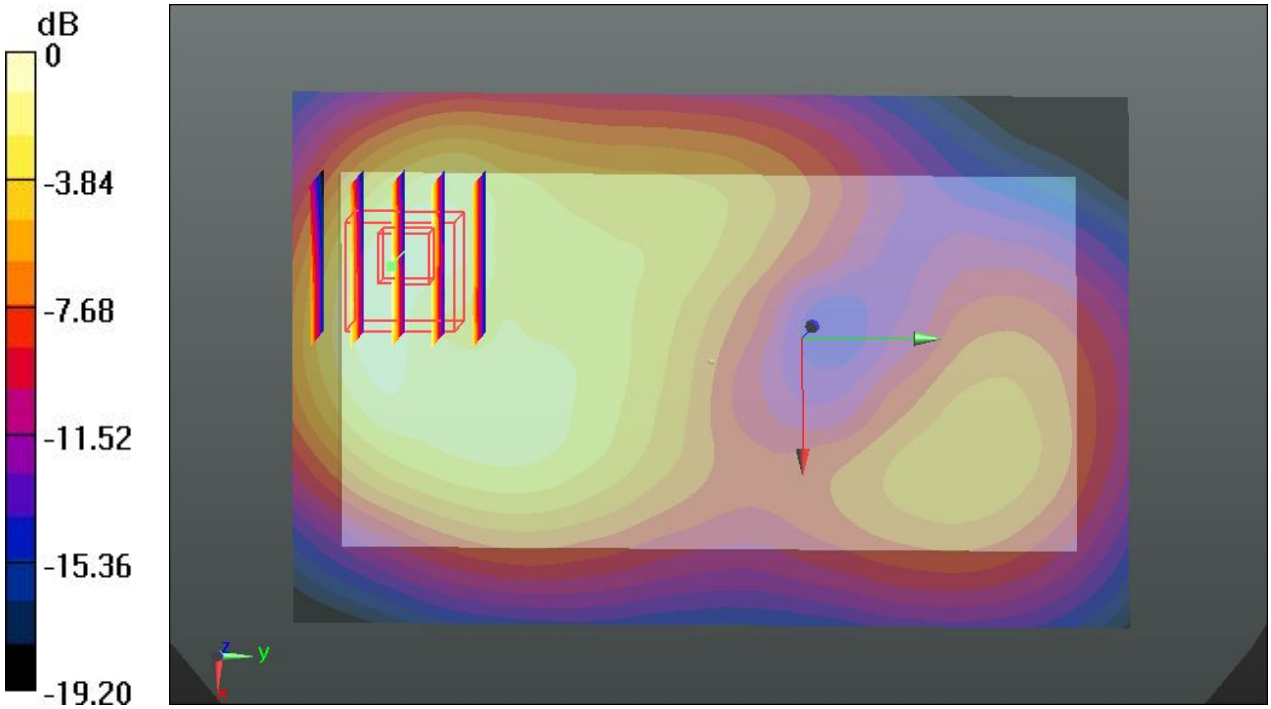

0 dB = 1.10 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#81 GSM1900_GPRS(2 Tx slots)_Back_1cm_Ch810

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1909.8 MHz; σ = 1.544 S/m; ε_r = 54.586; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch810/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.16 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.595 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.447 W/kg
Maximum value of SAR (measured) = 1.18 W/kg

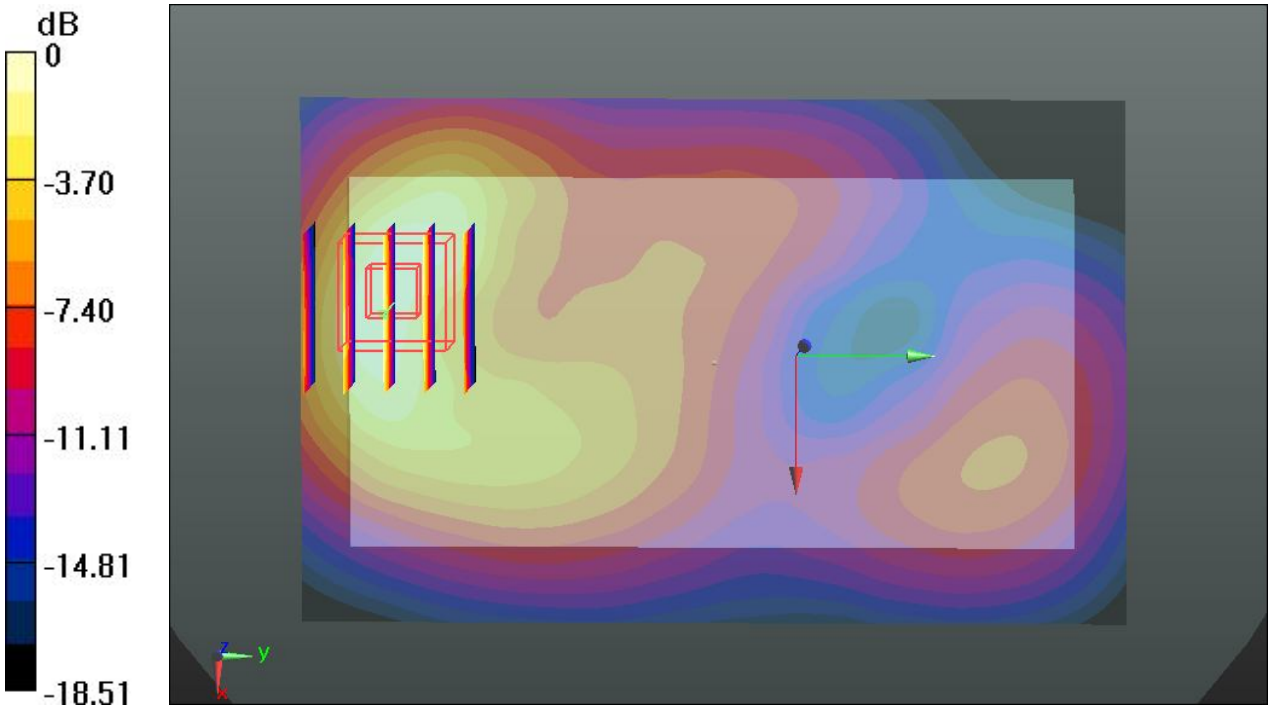

0 dB = 1.18 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#82 GSM1900_GPRS(2 Tx slots)_Bottom Side_1cm_Ch512

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1850.2 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1850.2 MHz; σ = 1.468 S/m; ε_r = 54.843; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.47 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.171 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.89 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.550 W/kg
Maximum value of SAR (measured) = 1.50 W/kg

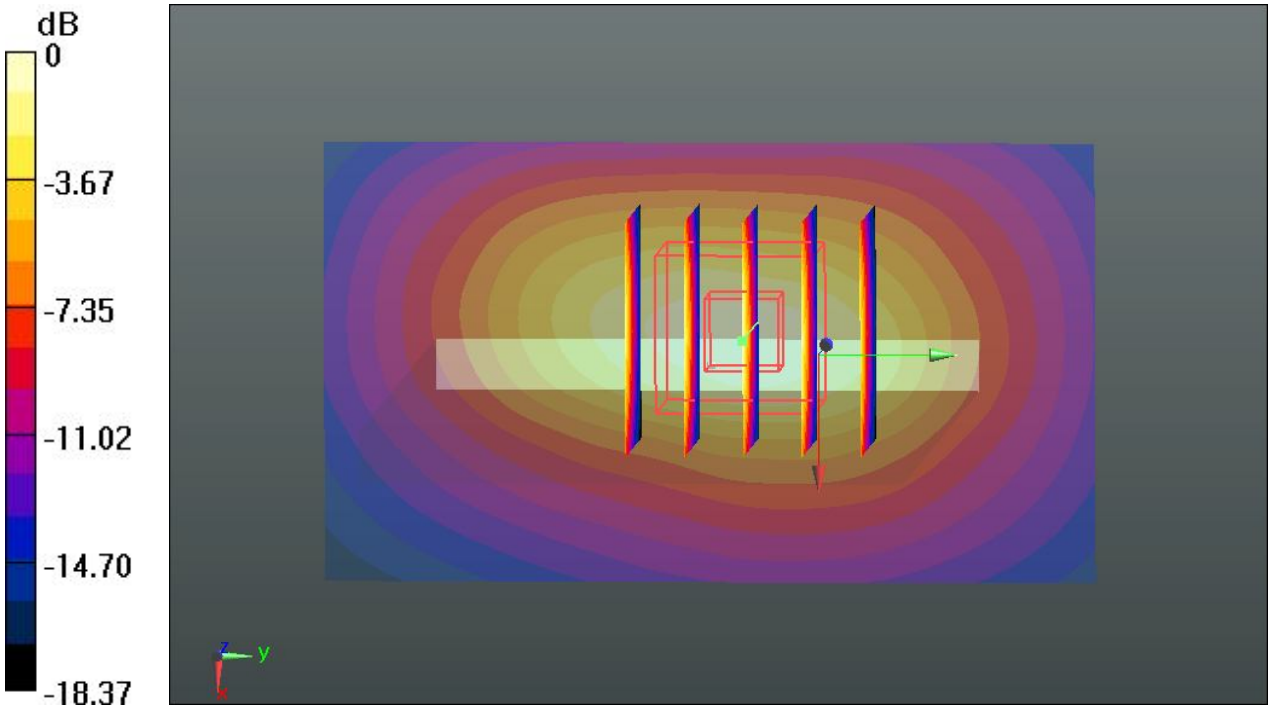

0 dB = 1.50 W/kg

#83 GSM1900_GPRS(2 Tx slots)_Bottom Side_1cm_Ch810

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.15
Medium: MSL_1900_140120 Medium parameters used: f = 1909.8 MHz; σ = 1.544 S/m; ε_r = 54.586; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch810/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.69 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.982 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 2.23 W/kg
SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.611 W/kg
Maximum value of SAR (measured) = 1.75 W/kg

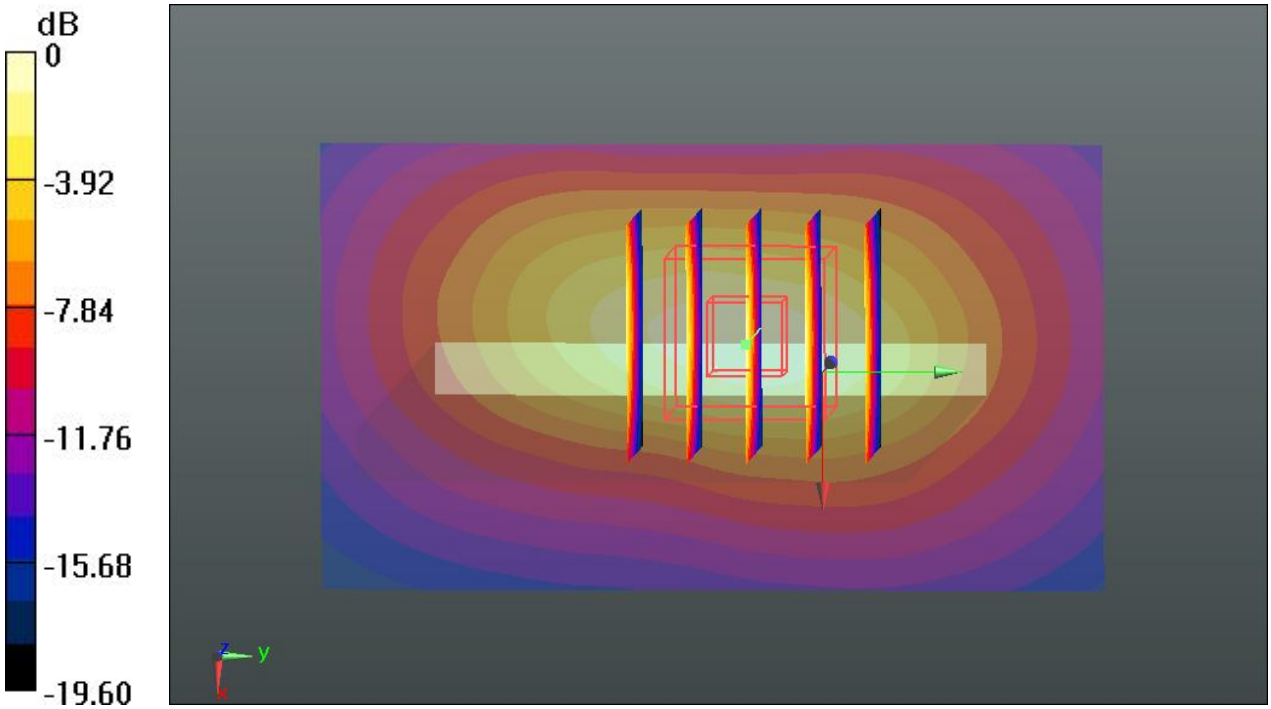

0 dB = 1.75 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#76 GSM1900_GSM Voice_Front_1cm_Ch661

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch661/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.889 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.013 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.10 W/kg
SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.333 W/kg
Maximum value of SAR (measured) = 0.885 W/kg

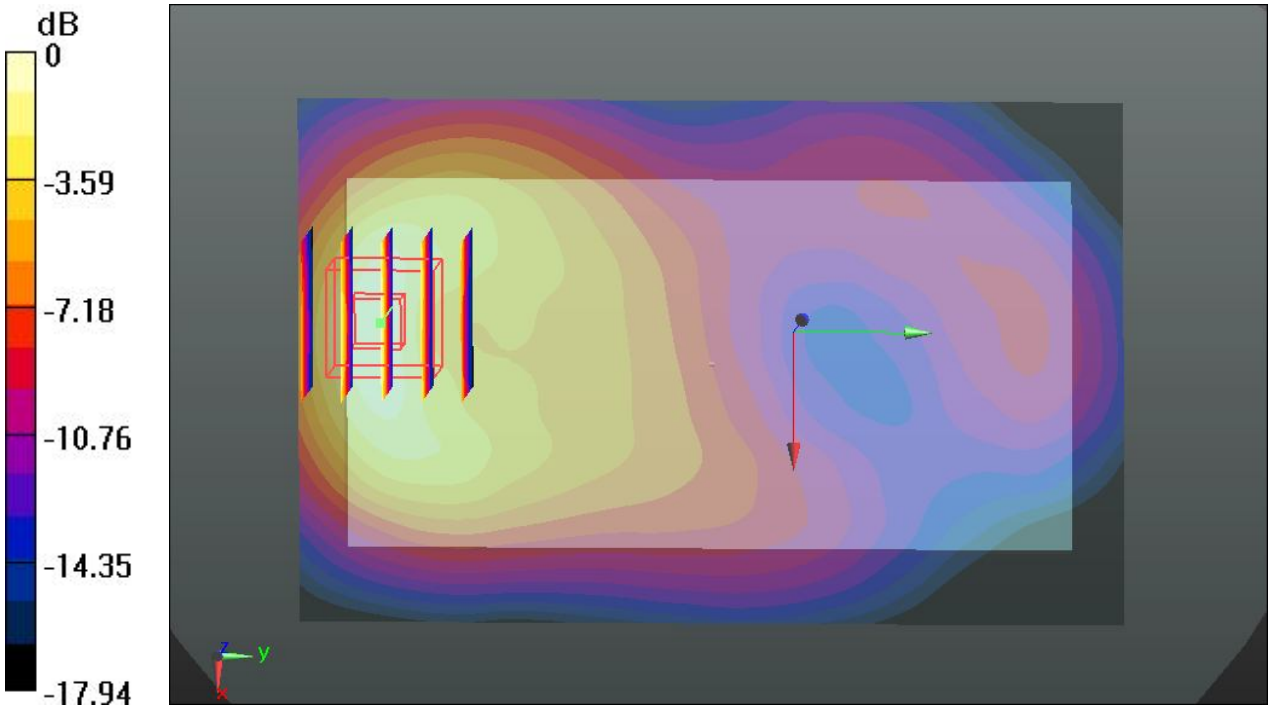

0 dB = 0.885 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#131 WCDMA Band V_RMC 12.2K_Front_1cm_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: MSL_835_140121 Medium parameters used: f = 826.4 MHz; σ = 0.97 S/m; ε_r = 54.464; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.512 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.225 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.555 W/kg
SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.354 W/kg
Maximum value of SAR (measured) = 0.513 W/kg

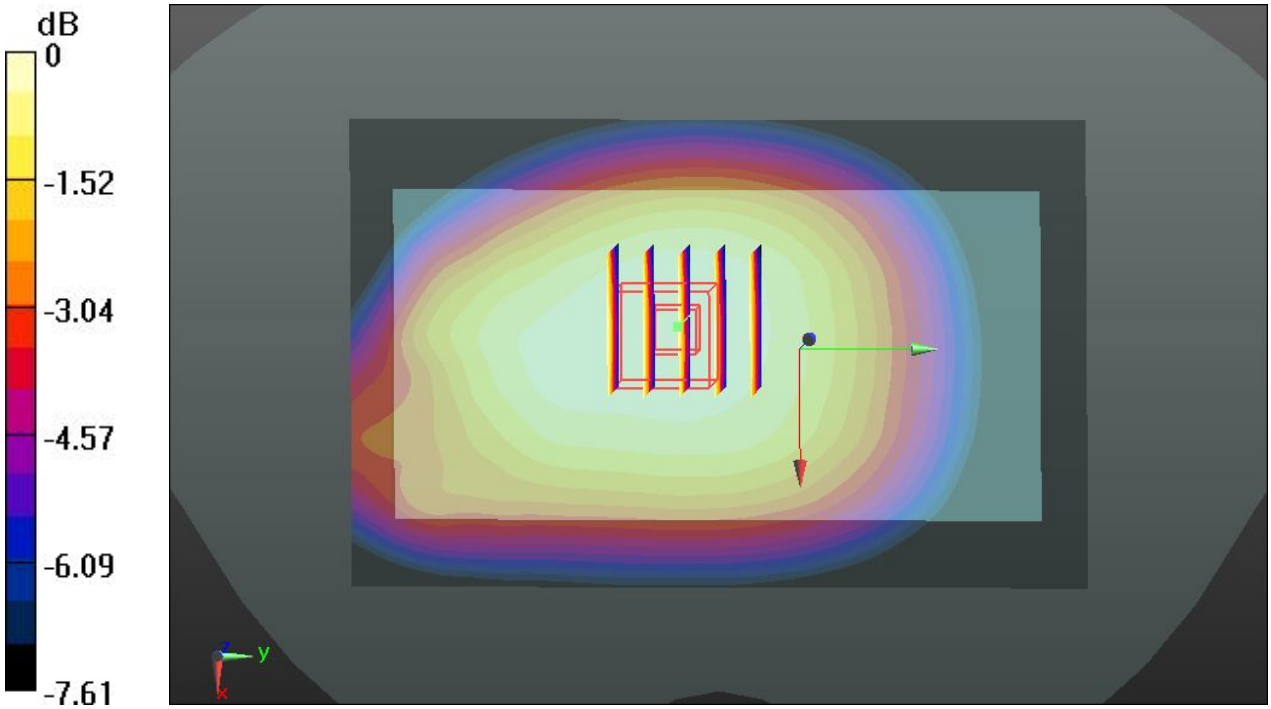

0 dB = 0.513 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#132 WCDMA Band V_RMC 12.2K_Back_1cm_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: MSL_835_140121 Medium parameters used: f = 826.4 MHz; σ = 0.97 S/m; ε_r = 54.464; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.718 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.390 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.782 W/kg
SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.477 W/kg
Maximum value of SAR (measured) = 0.712 W/kg

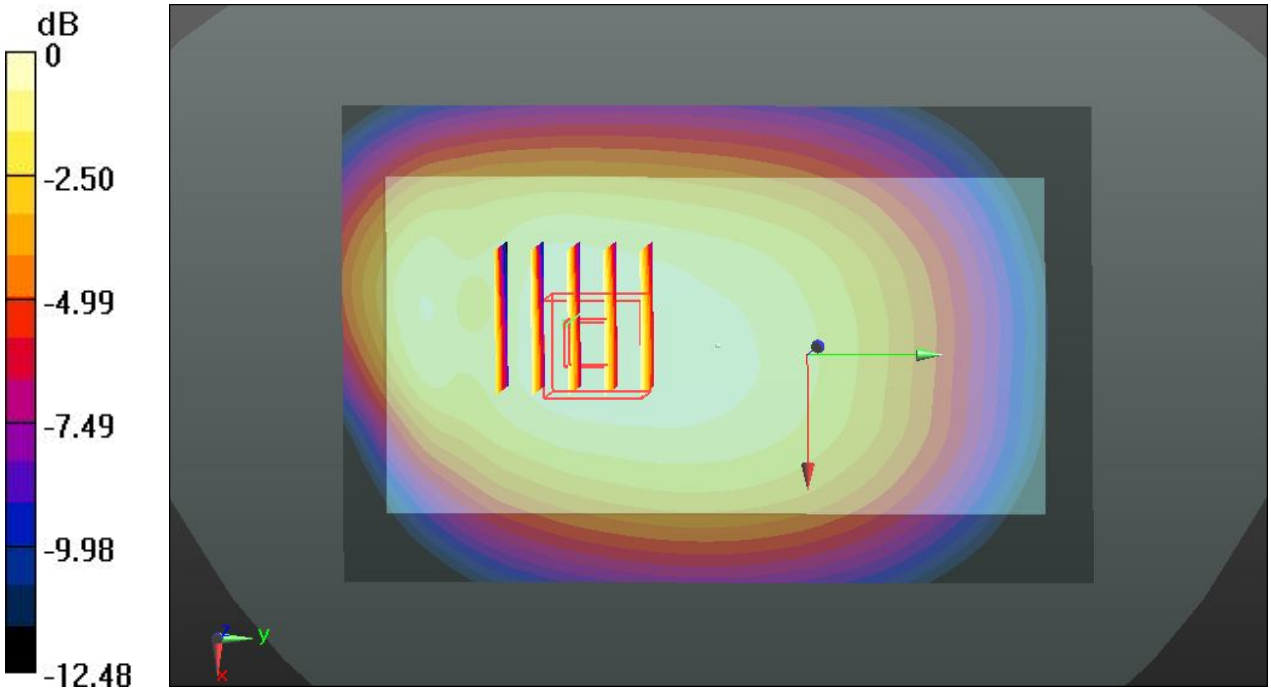

0 dB = 0.712 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#133 WCDMA Band V_RMC 12.2K_Left Side_1cm_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: MSL_835_140121 Medium parameters used: f = 826.4 MHz; σ = 0.97 S/m; ε_r = 54.464; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.510 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.359 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.577 W/kg
SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.284 W/kg
Maximum value of SAR (measured) = 0.504 W/kg

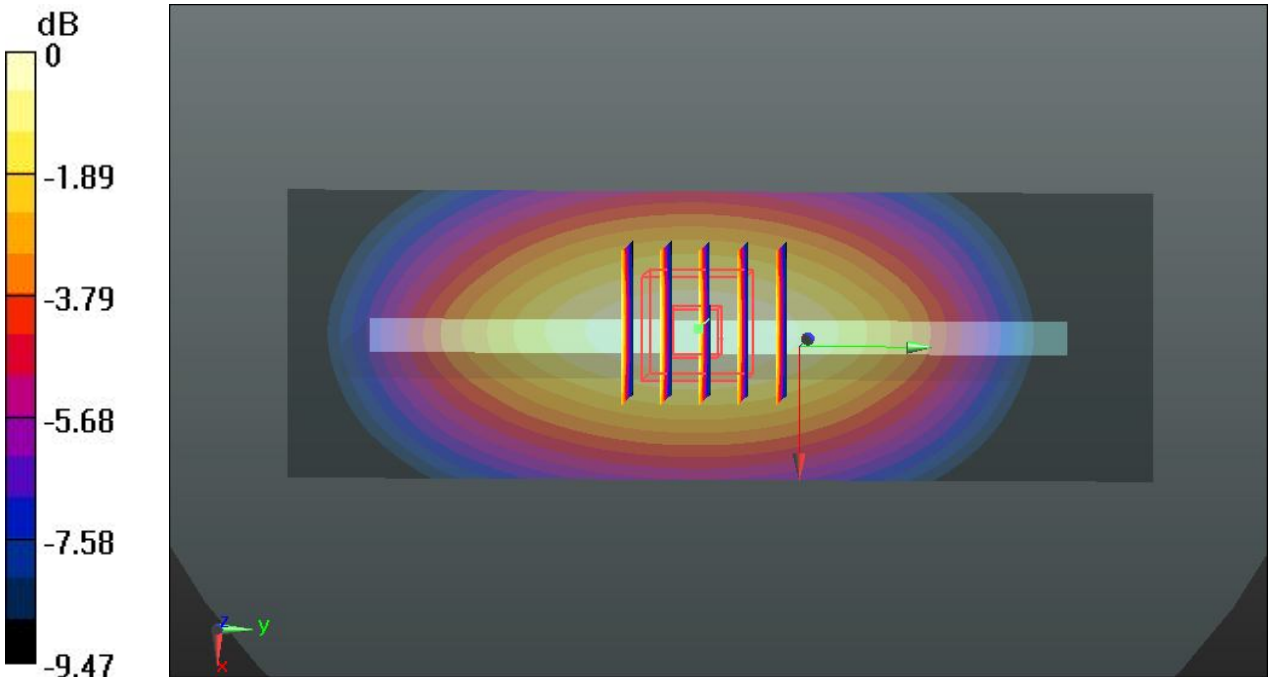

0 dB = 0.504 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#134 WCDMA Band V_RMC 12.2K_Right Side_1cm_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: MSL_835_140121 Medium parameters used: f = 826.4 MHz; σ = 0.97 S/m; ε_r = 54.464; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.359 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.298 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.416 W/kg
SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.203 W/kg
Maximum value of SAR (measured) = 0.363 W/kg

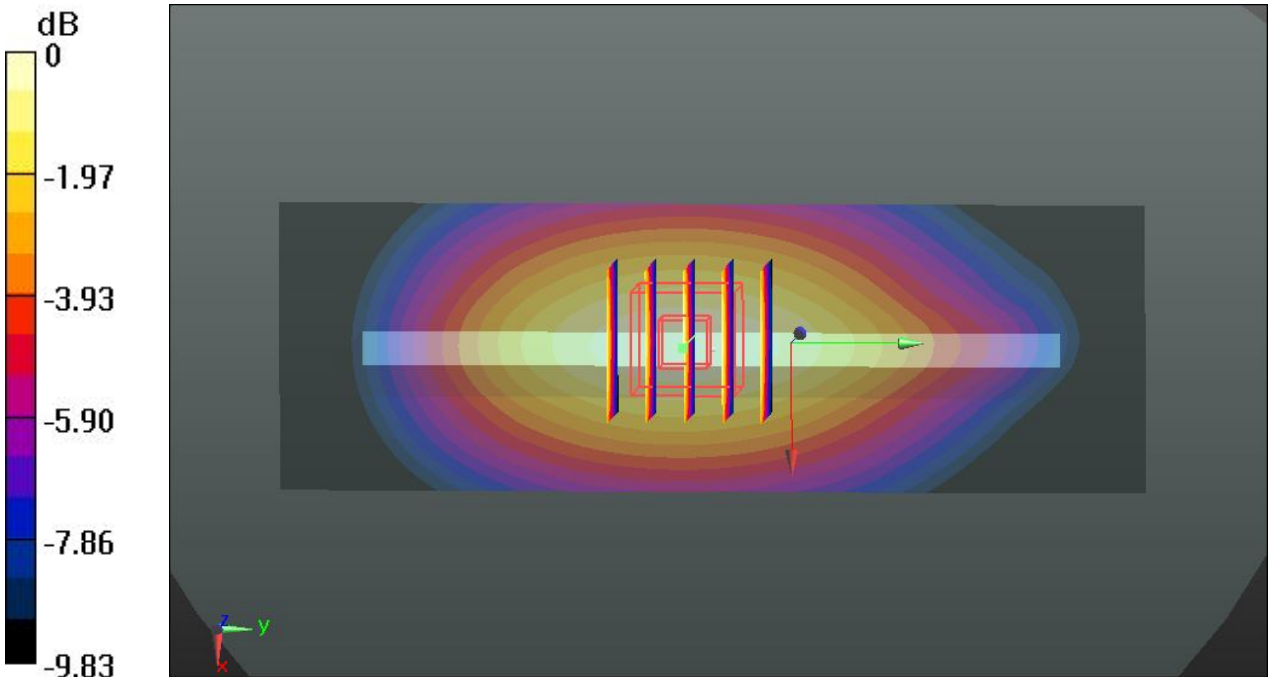

0 dB = 0.363 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.21

#135 WCDMA Band V_RMC 12.2K_Bottom Side_1cm_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium: MSL_835_140121 Medium parameters used: f = 826.4 MHz; σ = 0.97 S/m; ε_r = 54.464; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.7 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch4132/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.196 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.092 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.275 W/kg
SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.080 W/kg
Maximum value of SAR (measured) = 0.211 W/kg

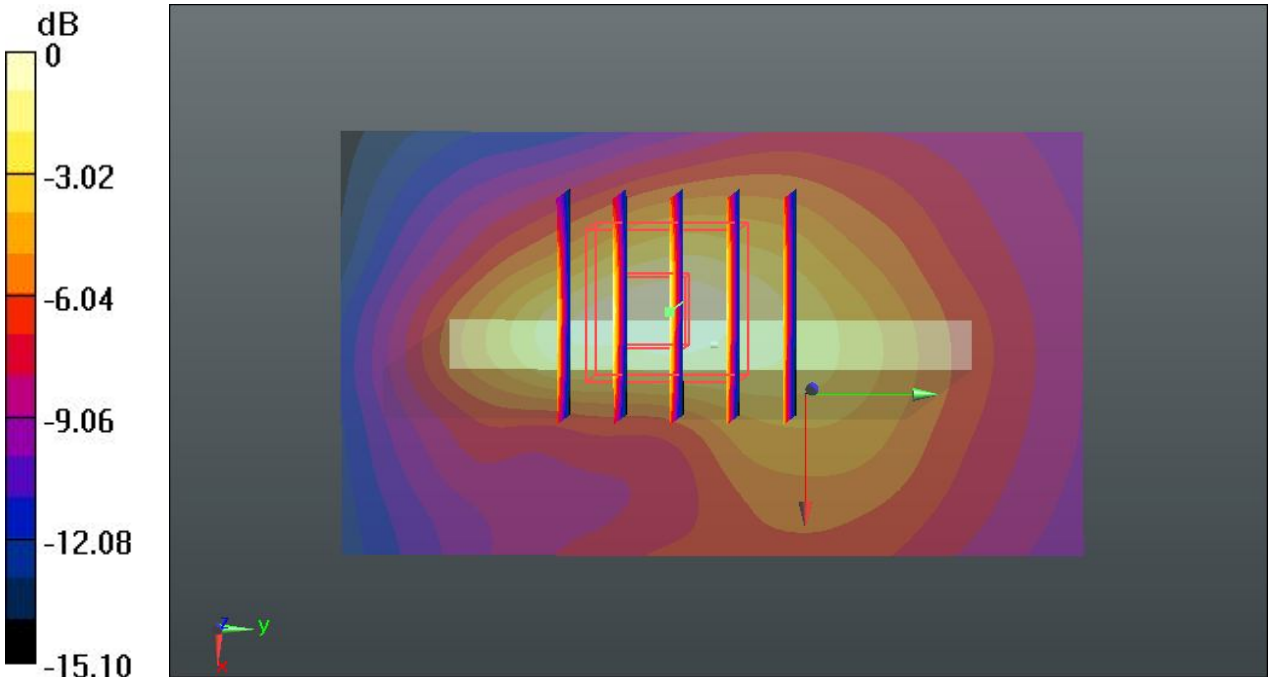

0 dB = 0.211 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#51 WCDMA Band IV_RMC 12.2K_Front_1cm_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1712.4 MHz; σ = 1.469 S/m; ε_r = 54.269; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.32 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.599 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.574 W/kg
Maximum value of SAR (measured) = 1.33 W/kg

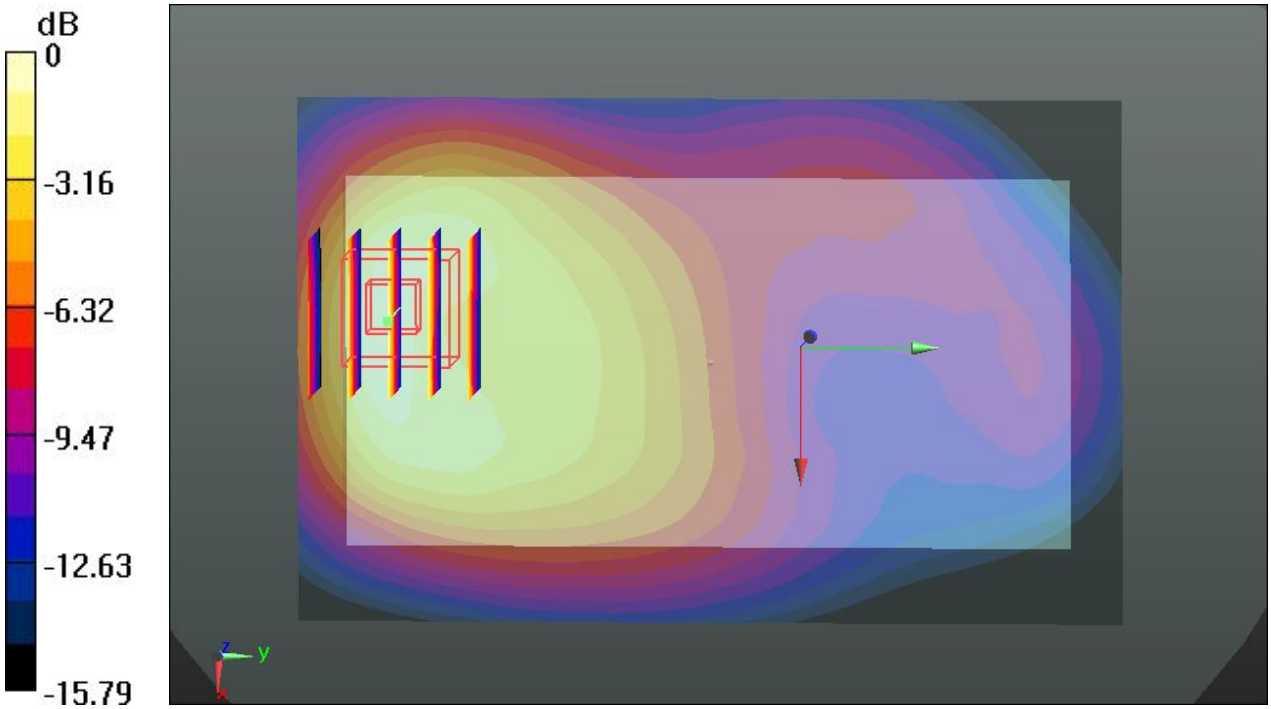

0 dB = 1.33 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#52 WCDMA Band IV_RMC 12.2K_Back_1cm_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1712.4 MHz; σ = 1.469 S/m; ε_r = 54.269; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.34 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.518 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.77 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.593 W/kg
Maximum value of SAR (measured) = 1.34 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.518 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.524 W/kg
Maximum value of SAR (measured) = 1.12 W/kg

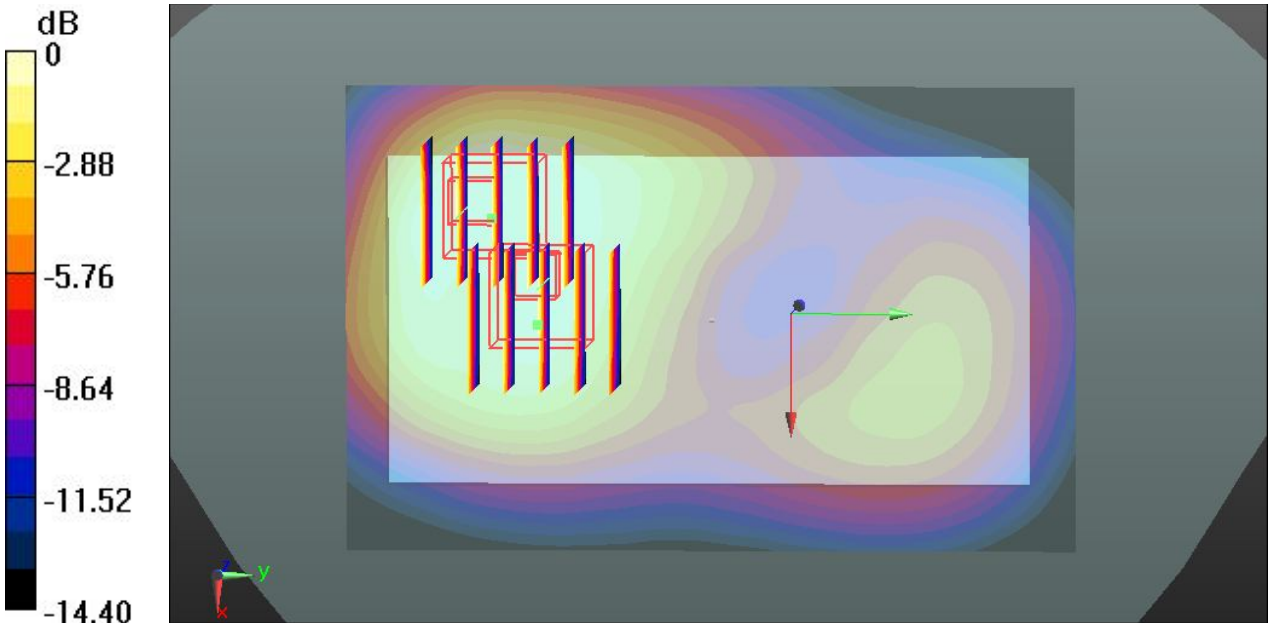

0 dB = 1.12 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#53 WCDMA Band IV_RMC 12.2K_Left Side_1cm_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1712.4 MHz; σ = 1.469 S/m; ε_r = 54.269; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.270 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.595 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.332 W/kg
SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.116 W/kg
Maximum value of SAR (measured) = 0.269 W/kg

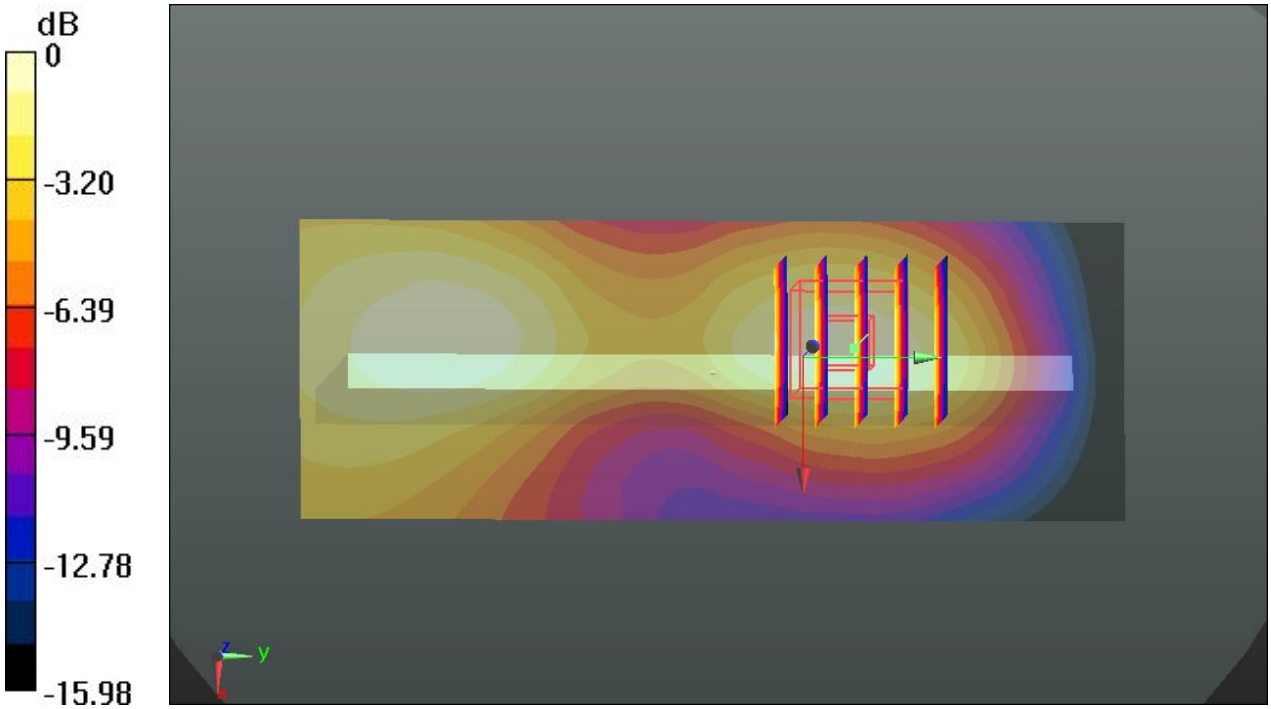

0 dB = 0.269 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#54 WCDMA Band IV_RMC 12.2K_Right Side_1cm_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1712.4 MHz; σ = 1.469 S/m; ε_r = 54.269; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.493 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.117 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.614 W/kg
SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.208 W/kg
Maximum value of SAR (measured) = 0.494 W/kg

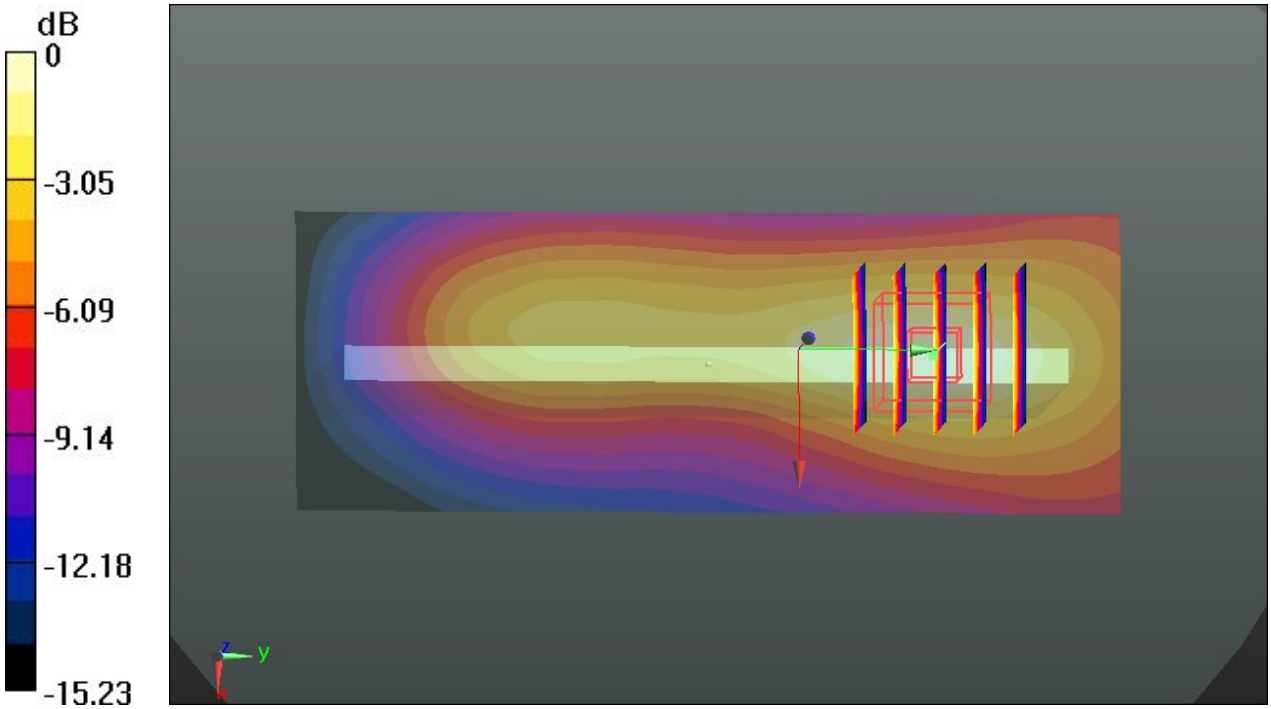

0 dB = 0.494 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#55 WCDMA Band IV_RMC 12.2K_Bottom Side_1cm_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1712.4 MHz; σ = 1.469 S/m; ε_r = 54.269; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1312/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.38 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.412 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.74 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.544 W/kg
Maximum value of SAR (measured) = 1.41 W/kg

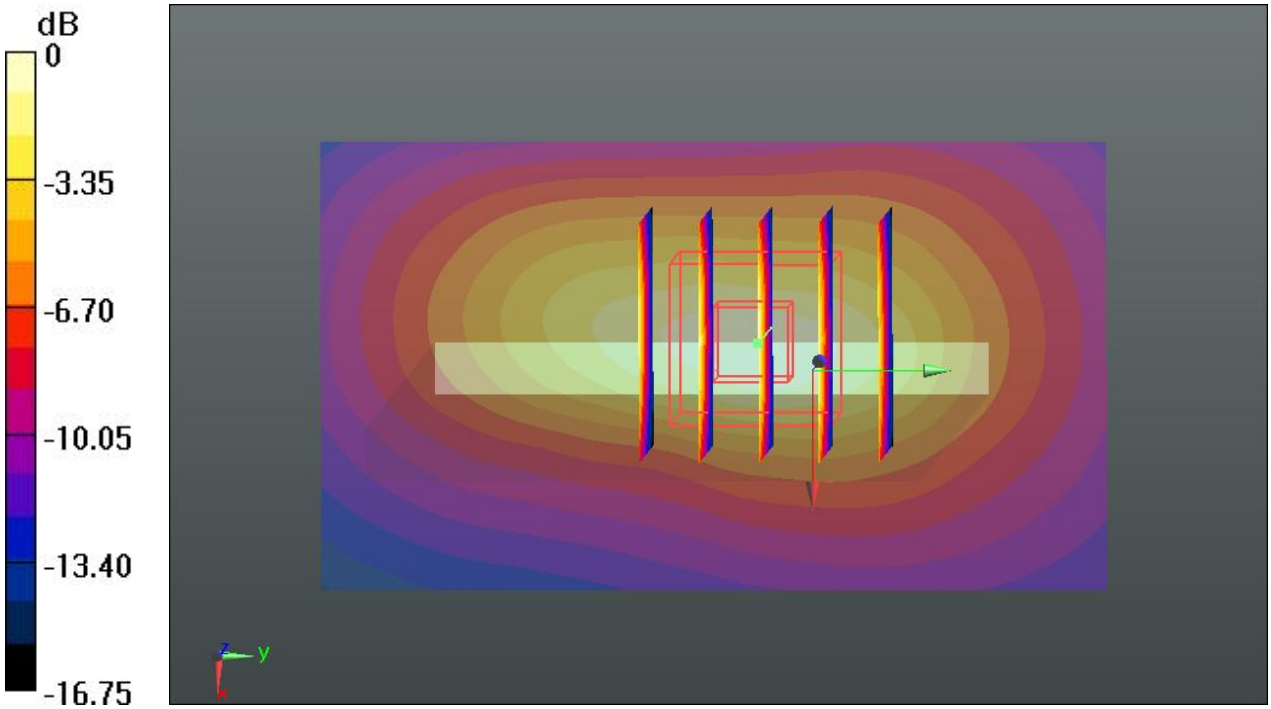

0 dB = 1.41 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#56 WCDMA Band IV_RMC 12.2K_Front_1cm_Ch1413

Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1732.6 MHz; σ = 1.496 S/m; ε_r = 53.644; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1413/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.344 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.449 W/kg
Maximum value of SAR (measured) = 1.07 W/kg

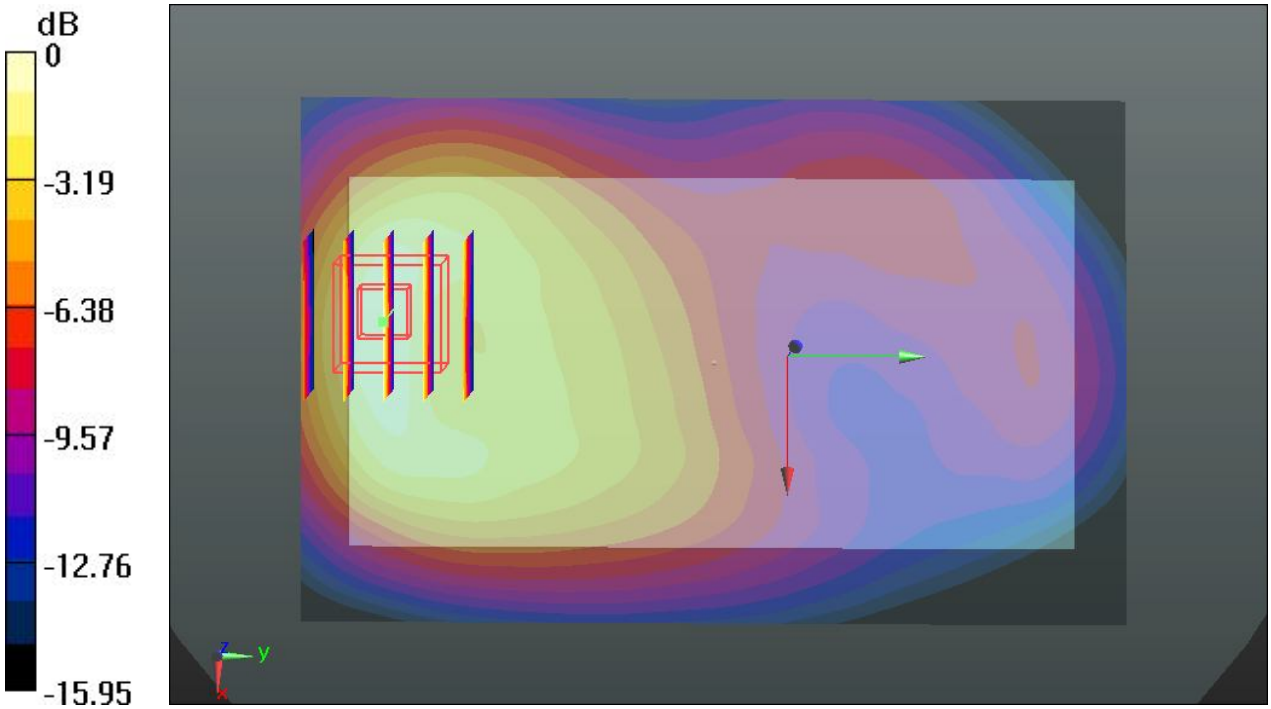

0 dB = 1.07 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#57 WCDMA Band IV_RMC 12.2K_Front_1cm_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1752.6 MHz; σ = 1.517 S/m; ε_r = 53.568; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1513/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.28 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.814 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.525 W/kg
Maximum value of SAR (measured) = 1.27 W/kg

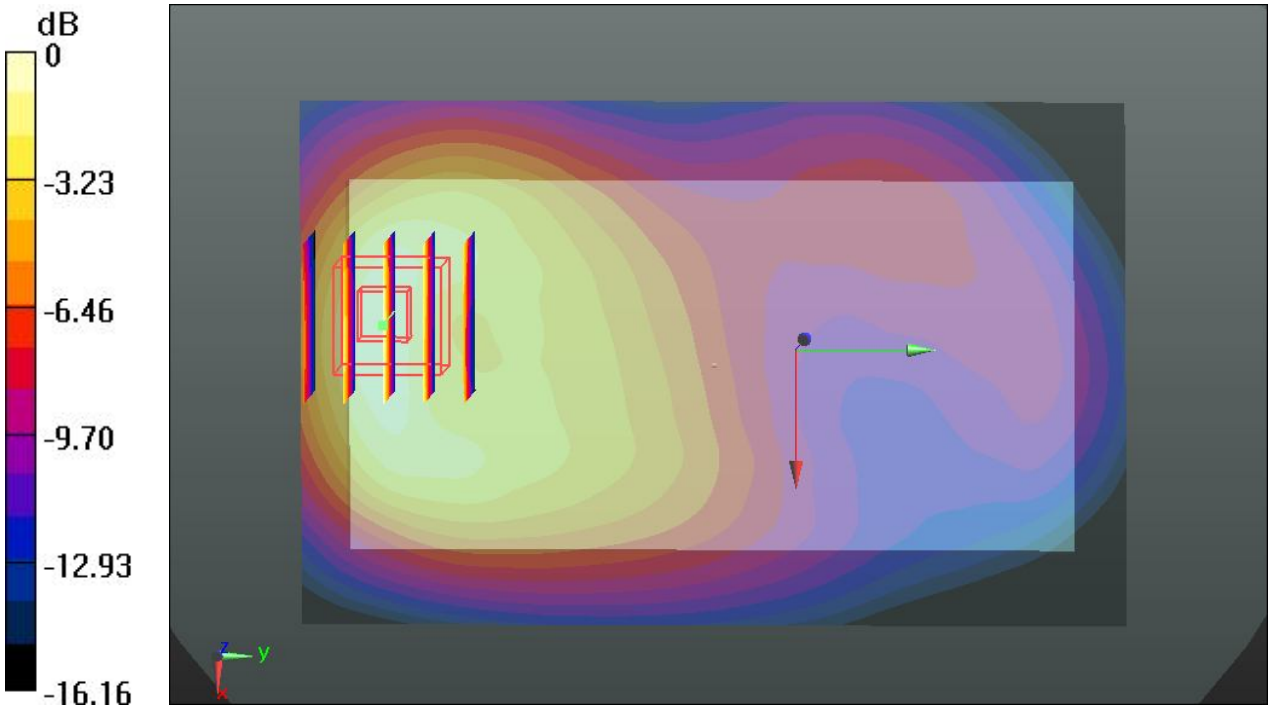

0 dB = 1.27 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#58 WCDMA Band IV_RMC 12.2K_Back_1cm_Ch1413

Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1732.6 MHz; σ = 1.496 S/m; ε_r = 53.644; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1413/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.13 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.950 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.492 W/kg
Maximum value of SAR (measured) = 1.15 W/kg

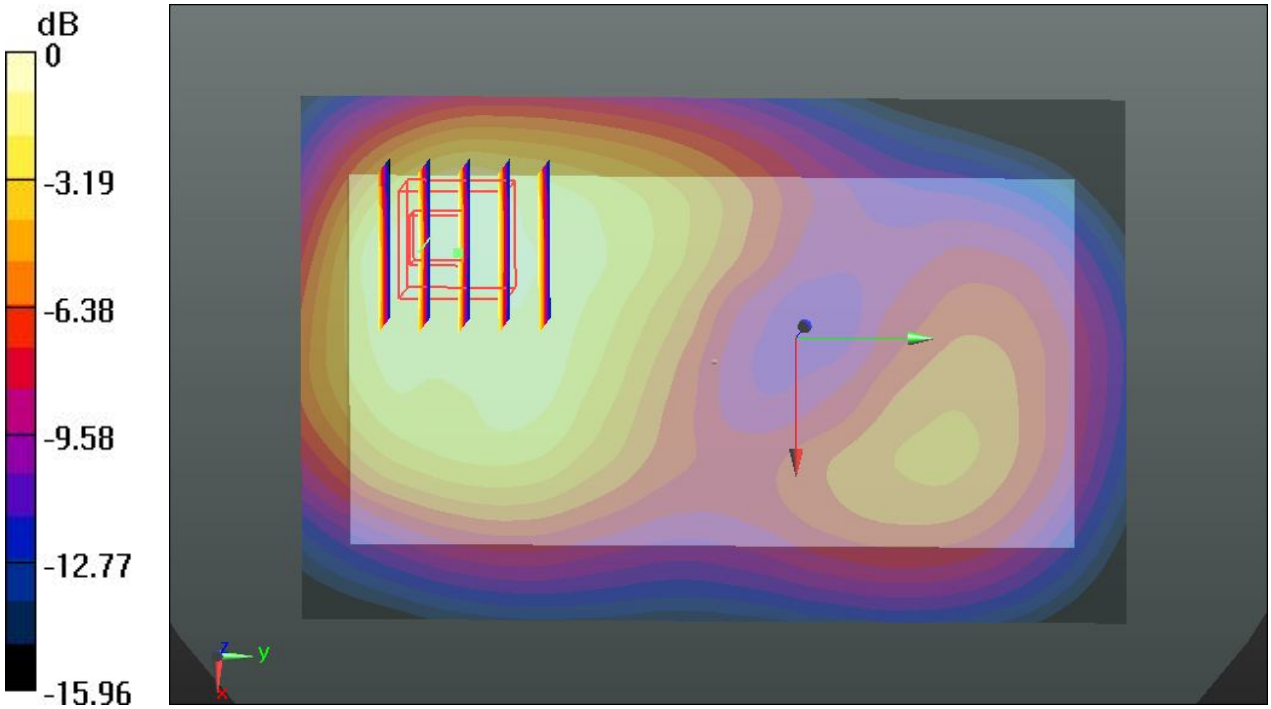

0 dB = 1.15 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#59 WCDMA Band IV_RMC 12.2K_Back_1cm_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1752.6 MHz; σ = 1.517 S/m; ε_r = 53.568; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1513/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.25 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.254 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.69 W/kg
SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.541 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

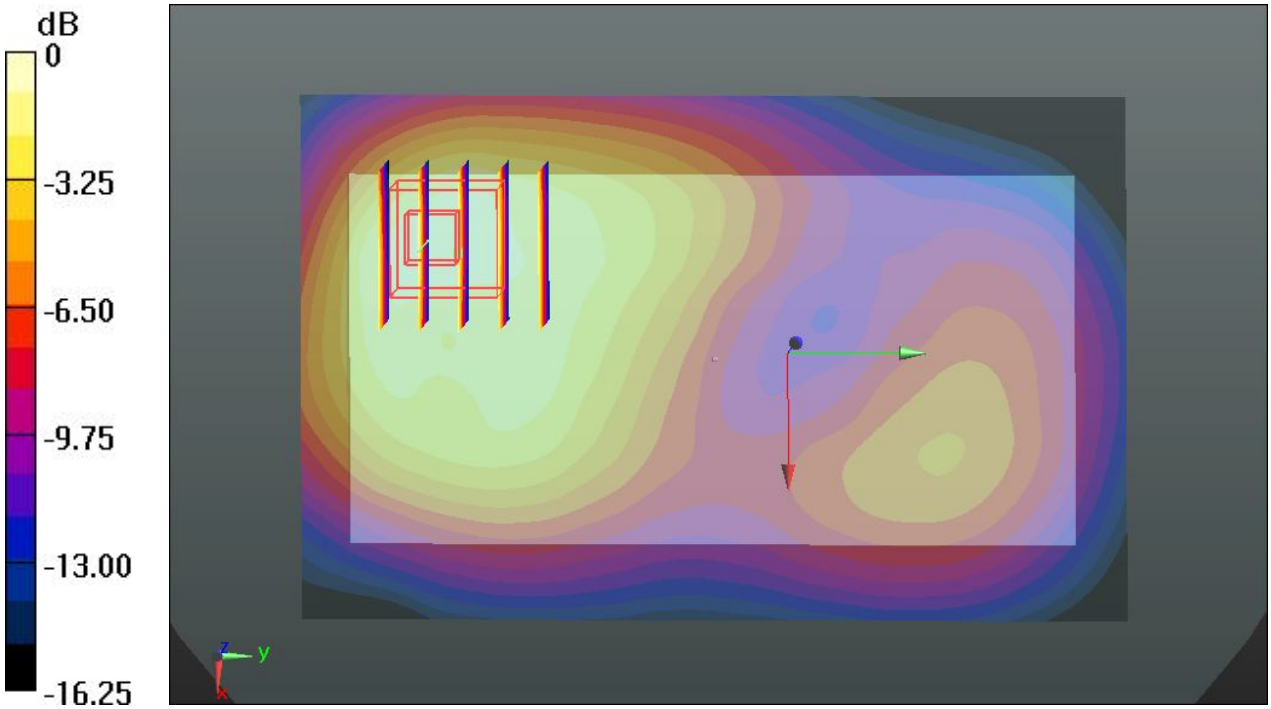

0 dB = 1.31 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#60 WCDMA Band IV_RMC 12.2K_Bottom Side_1cm_Ch1413

Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1732.6 MHz; σ = 1.496 S/m; ε_r = 53.644; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1413/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.19 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.844 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.464 W/kg
Maximum value of SAR (measured) = 1.22 W/kg

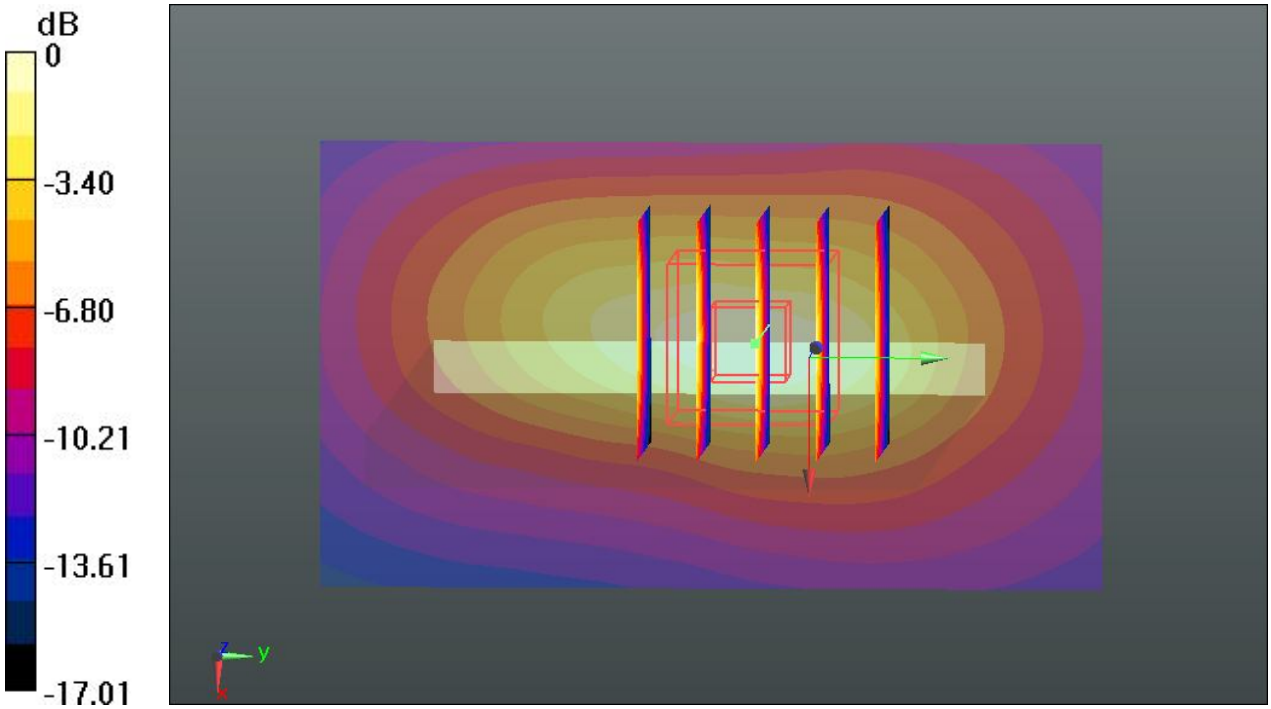

0 dB = 1.22 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#61 WCDMA Band IV_RMC 12.2K_Bottom Side_1cm_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1752.6 MHz; σ = 1.517 S/m; ε_r = 53.568; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1513/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.42 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.321 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.545 W/kg
Maximum value of SAR (measured) = 1.44 W/kg

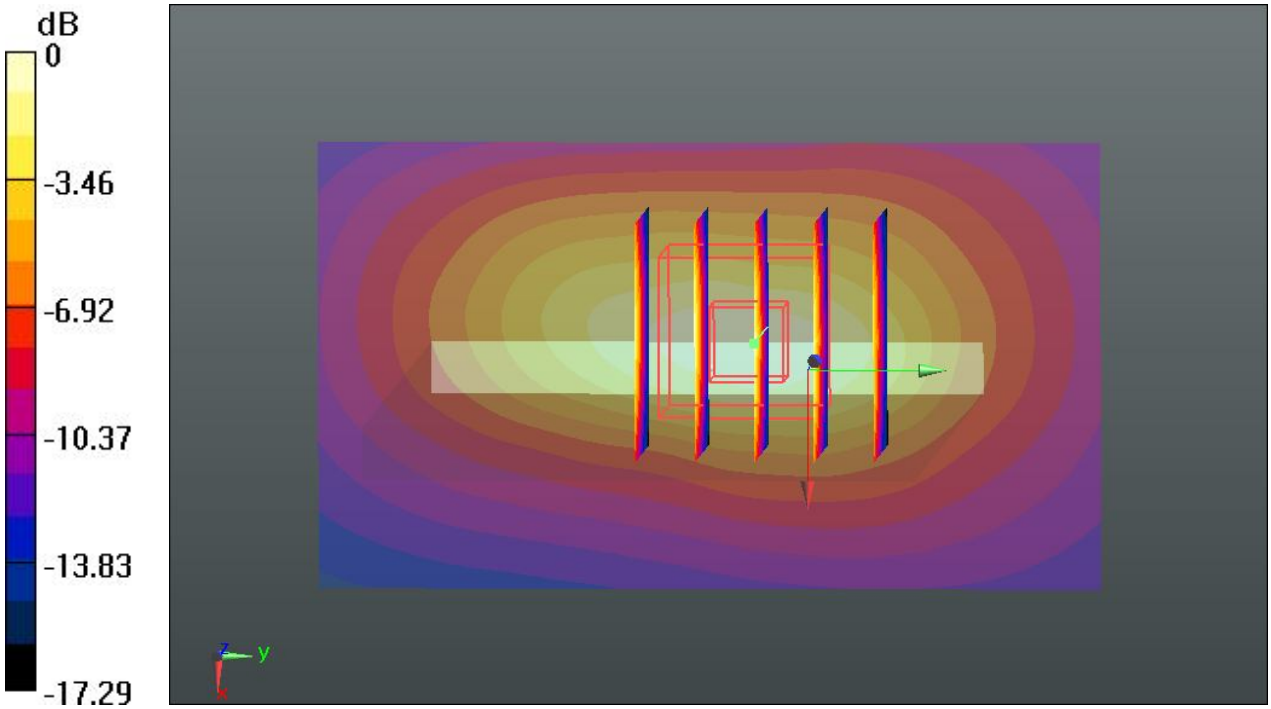

0 dB = 1.44 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.14

#62 WCDMA Band IV_RMC 12.2K_Bottom Side_1cm_Ch1513_Repeat SAR

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_140114 Medium parameters used: f = 1752.6 MHz; σ = 1.517 S/m; ε_r = 53.568; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(8.01, 8.01, 8.01); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch1513/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.41 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.308 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.77 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.545 W/kg
Maximum value of SAR (measured) = 1.43 W/kg

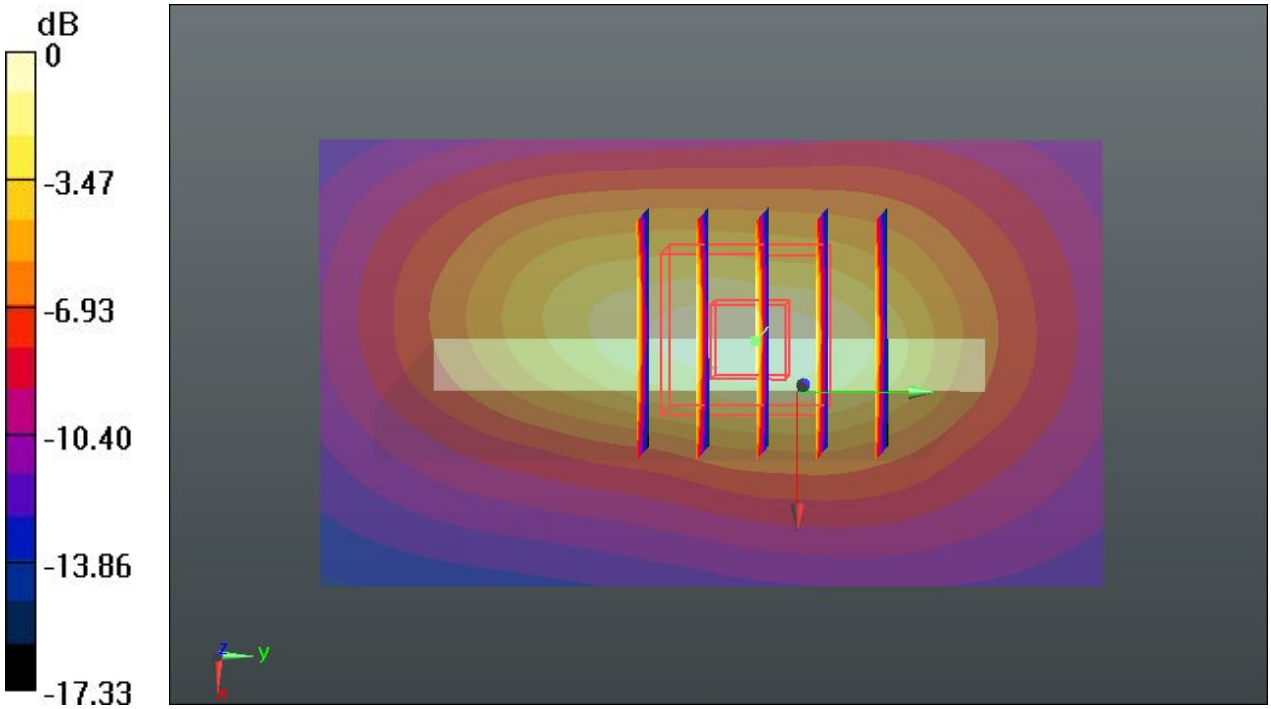

0 dB = 1.43 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#91 WCDMA Band II_RMC 12.2K_Front_1cm_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1907.6 MHz; σ = 1.542 S/m; ε_r = 54.591; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.18 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.372 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.47 W/kg
SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.431 W/kg
Maximum value of SAR (measured) = 1.17 W/kg

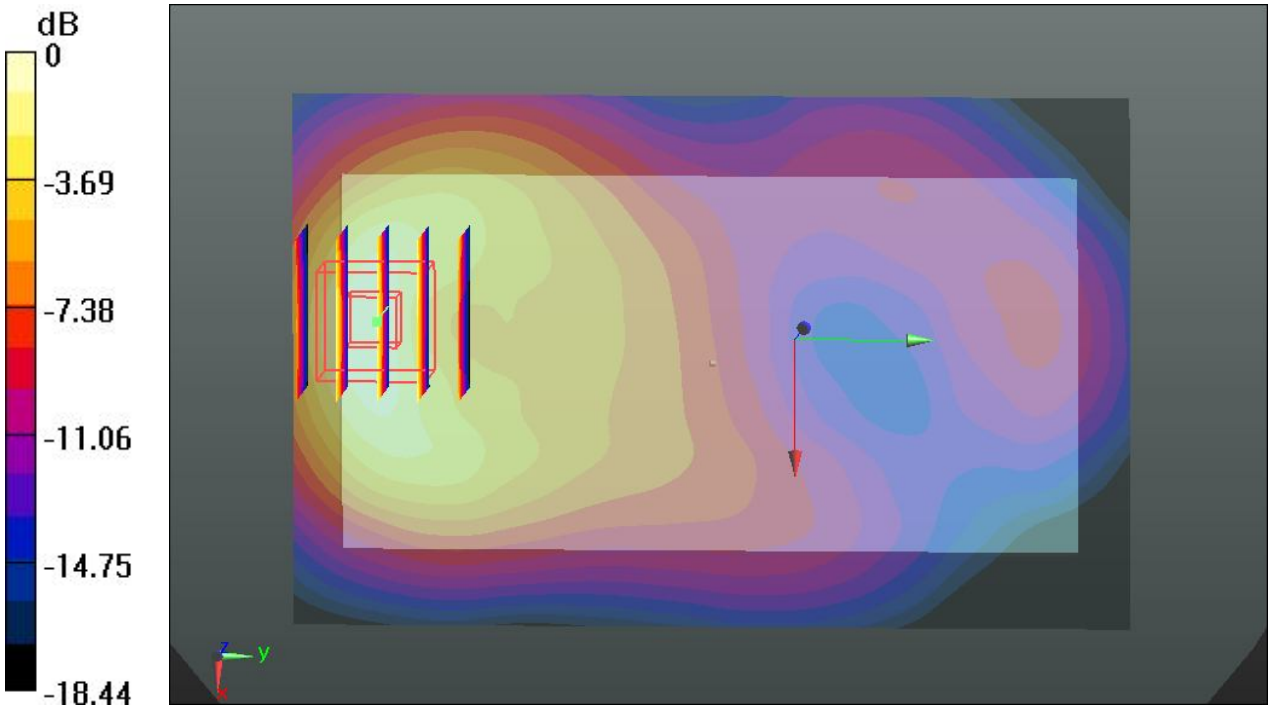

0 dB = 1.17 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#92 WCDMA Band II_RMC 12.2K_Back_1cm_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1907.6 MHz; σ = 1.542 S/m; ε_r = 54.591; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.10 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.453 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.426 W/kg
Maximum value of SAR (measured) = 1.12 W/kg

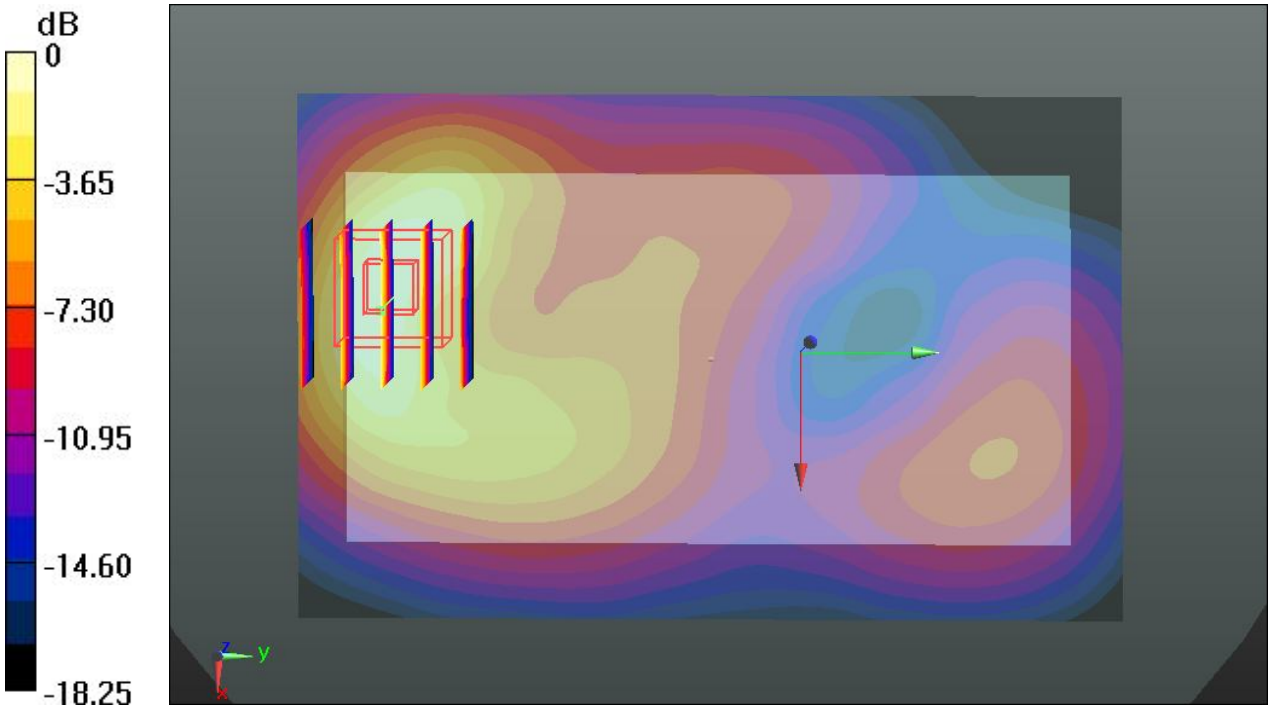

0 dB = 1.12 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#93 WCDMA Band II_RMC 12.2K_Left Side_1cm_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1907.6 MHz; σ = 1.542 S/m; ε_r = 54.591; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.286 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.375 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.364 W/kg
SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.115 W/kg
Maximum value of SAR (measured) = 0.288 W/kg

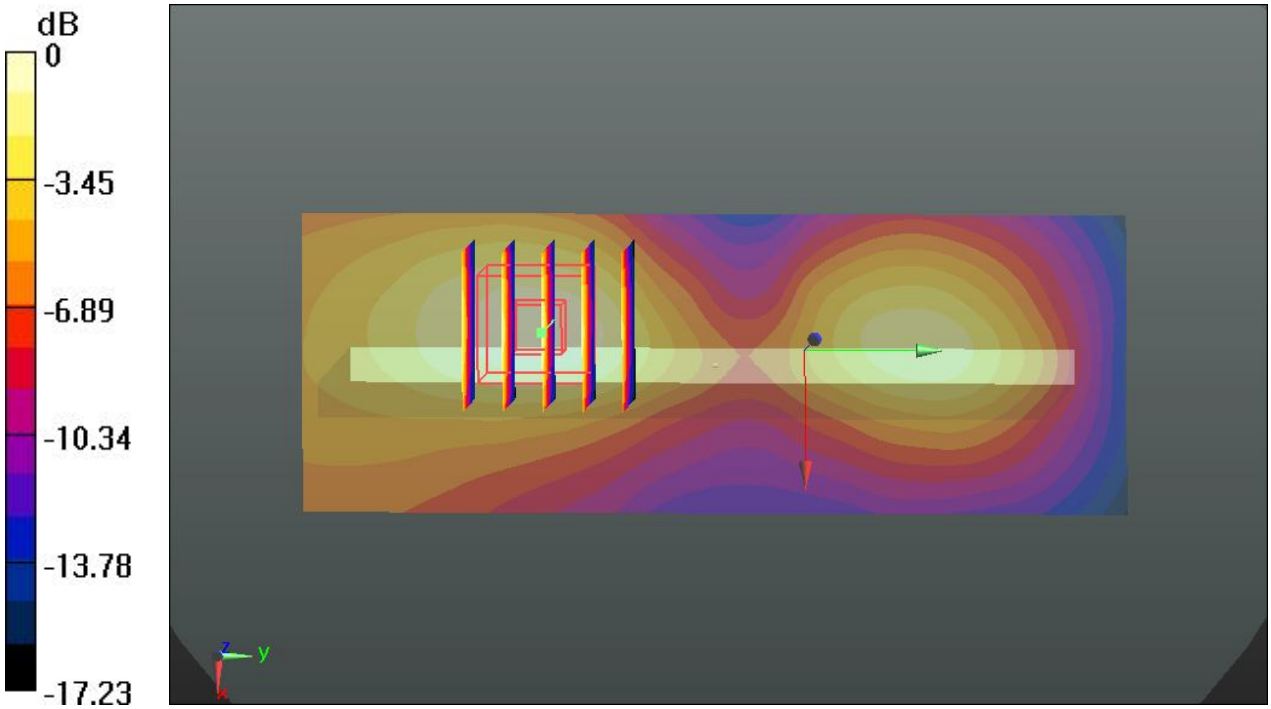

0 dB = 0.288 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#94 WCDMA Band II_RMC 12.2K_Right Side_1cm_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1907.6 MHz; σ = 1.542 S/m; ε_r = 54.591; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.143 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.397 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.189 W/kg
SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.062 W/kg
Maximum value of SAR (measured) = 0.149 W/kg

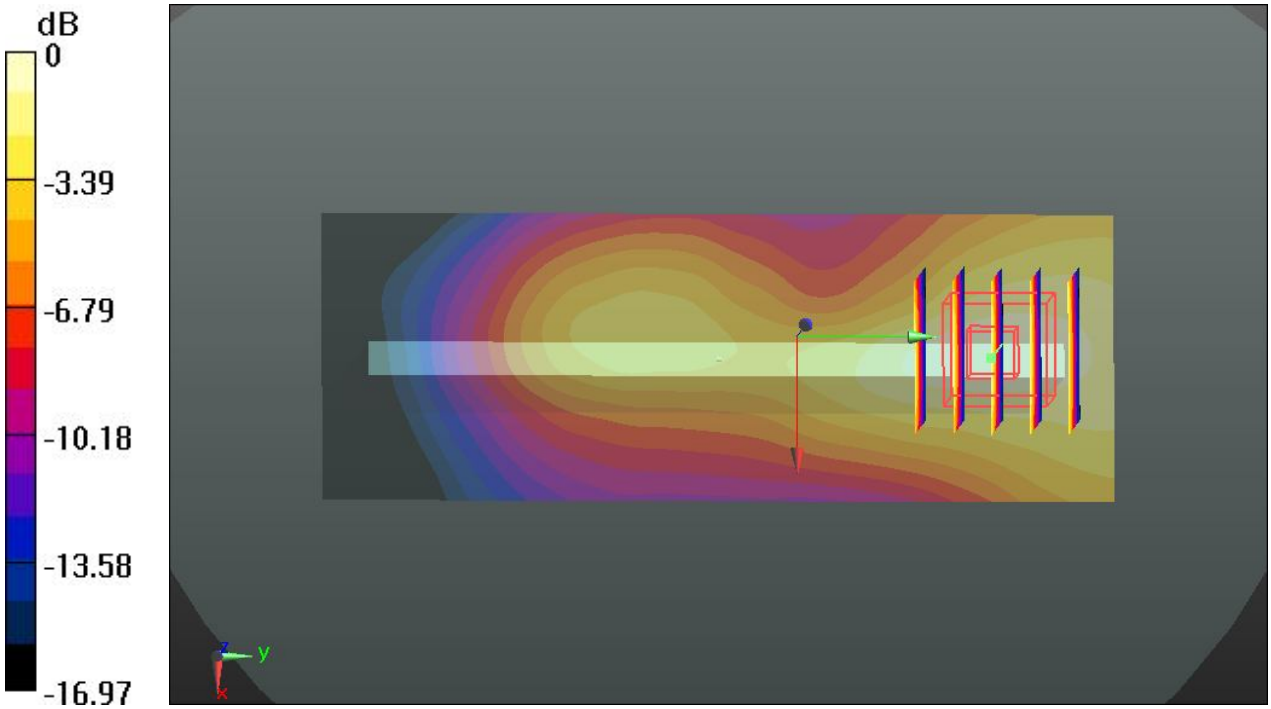

0 dB = 0.149 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#95 WCDMA Band II_RMC 12.2K_Bottom Side_1cm_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1907.6 MHz; σ = 1.542 S/m; ε_r = 54.591; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9538/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.52 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.959 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.99 W/kg
SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.537 W/kg
Maximum value of SAR (measured) = 1.55 W/kg

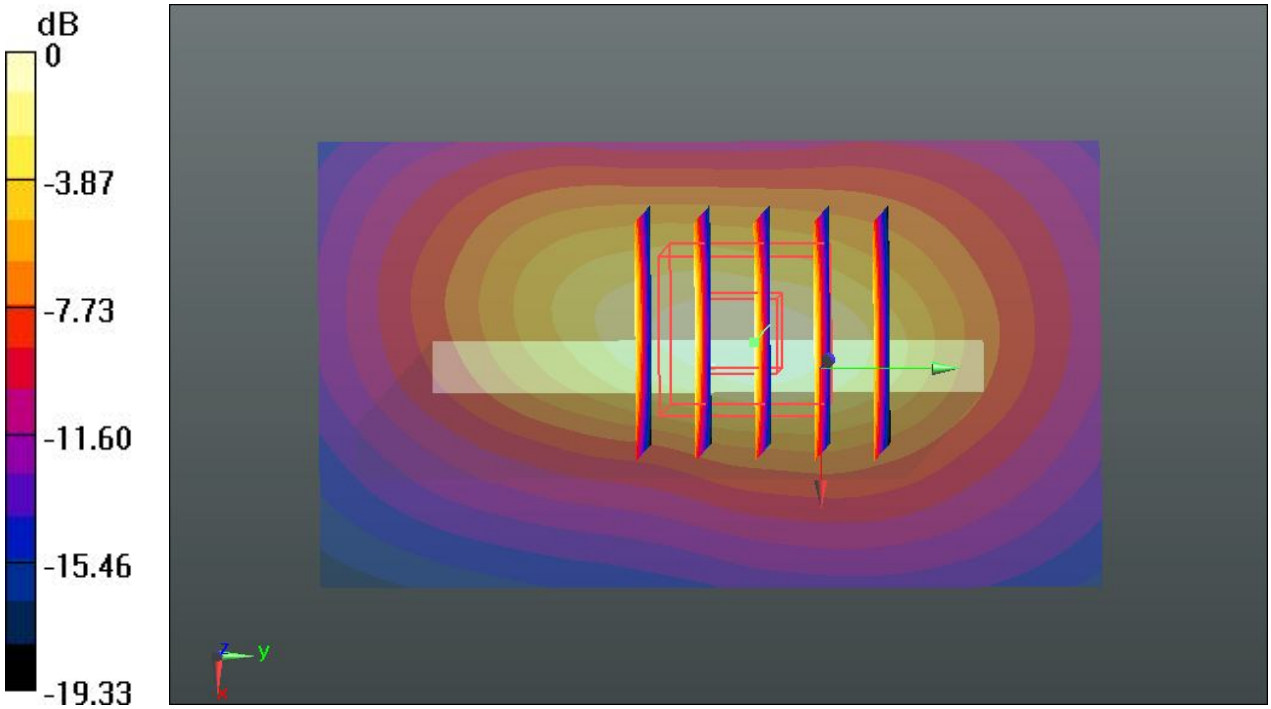

0 dB = 1.55 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#96 WCDMA Band II_RMC 12.2K_Front_1cm_Ch9262

Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1852.4 MHz; σ = 1.471 S/m; ε_r = 54.836; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9262/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.35 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.822 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.513 W/kg
Maximum value of SAR (measured) = 1.34 W/kg

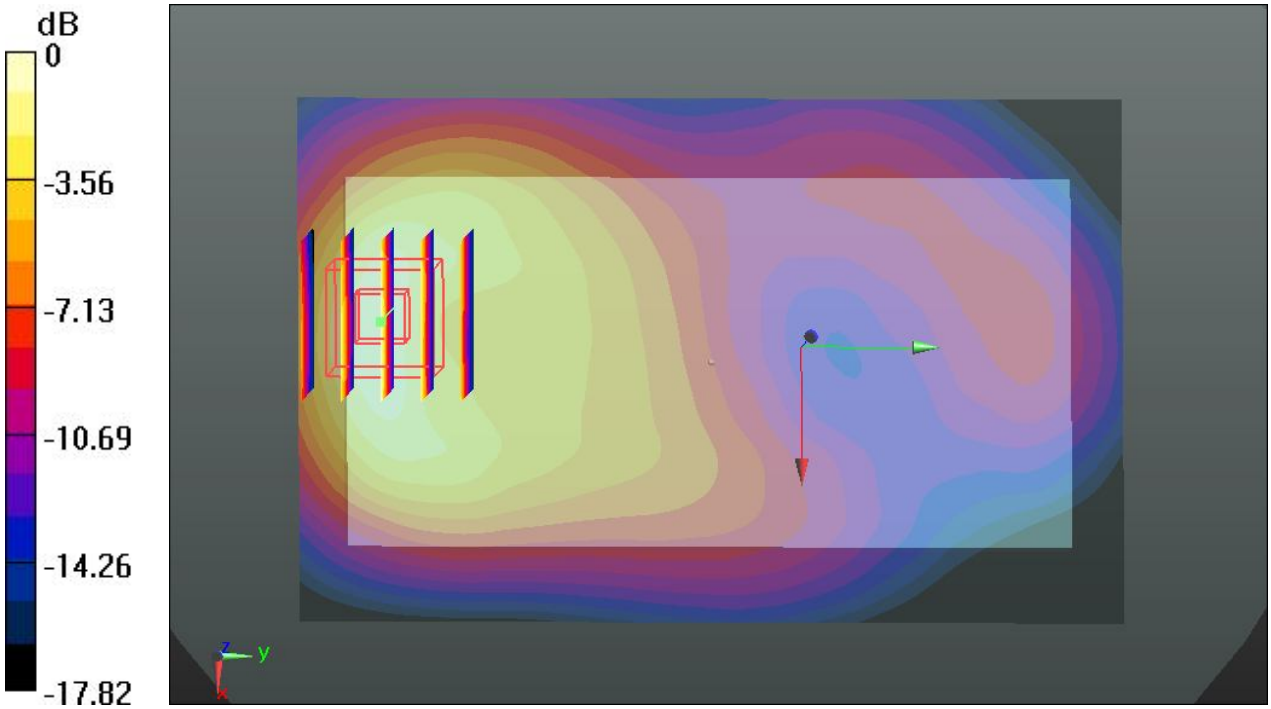

0 dB = 1.34 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#97 WCDMA Band II_RMC 12.2K_Front_1cm_Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9400/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.33 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.703 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.496 W/kg
Maximum value of SAR (measured) = 1.32 W/kg

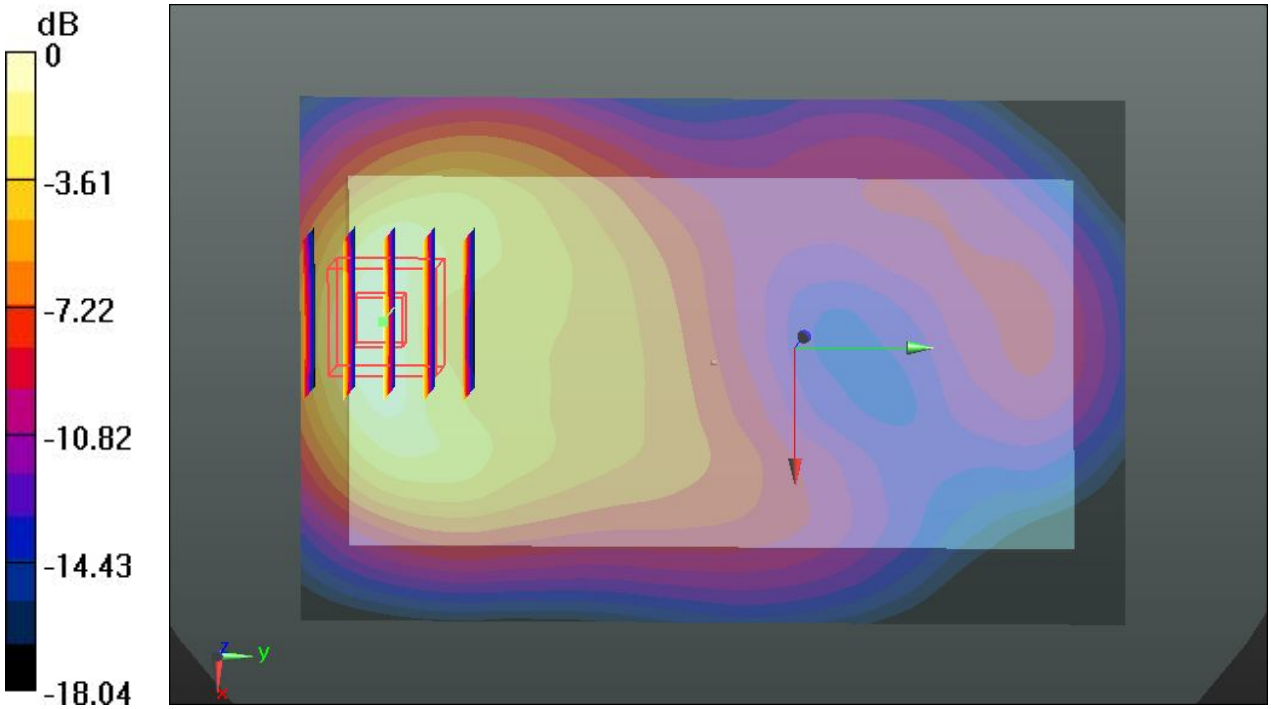

0 dB = 1.32 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#98 WCDMA Band II_RMC 12.2K_Back_1cm_Ch9262

Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1852.4 MHz; σ = 1.471 S/m; ε_r = 54.836; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9262/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.604 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.453 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

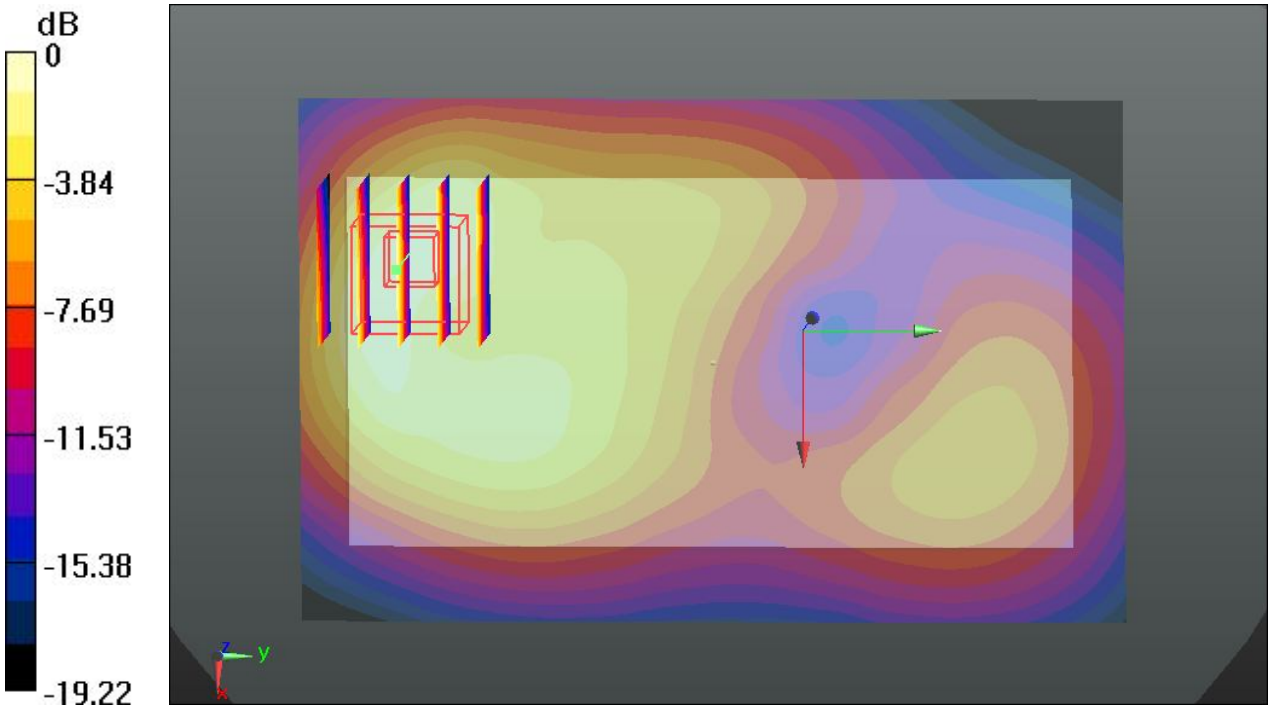

0 dB = 1.16 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#99 WCDMA Band II_RMC 12.2K_Back_1cm_Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9400/Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.12 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.563 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.446 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

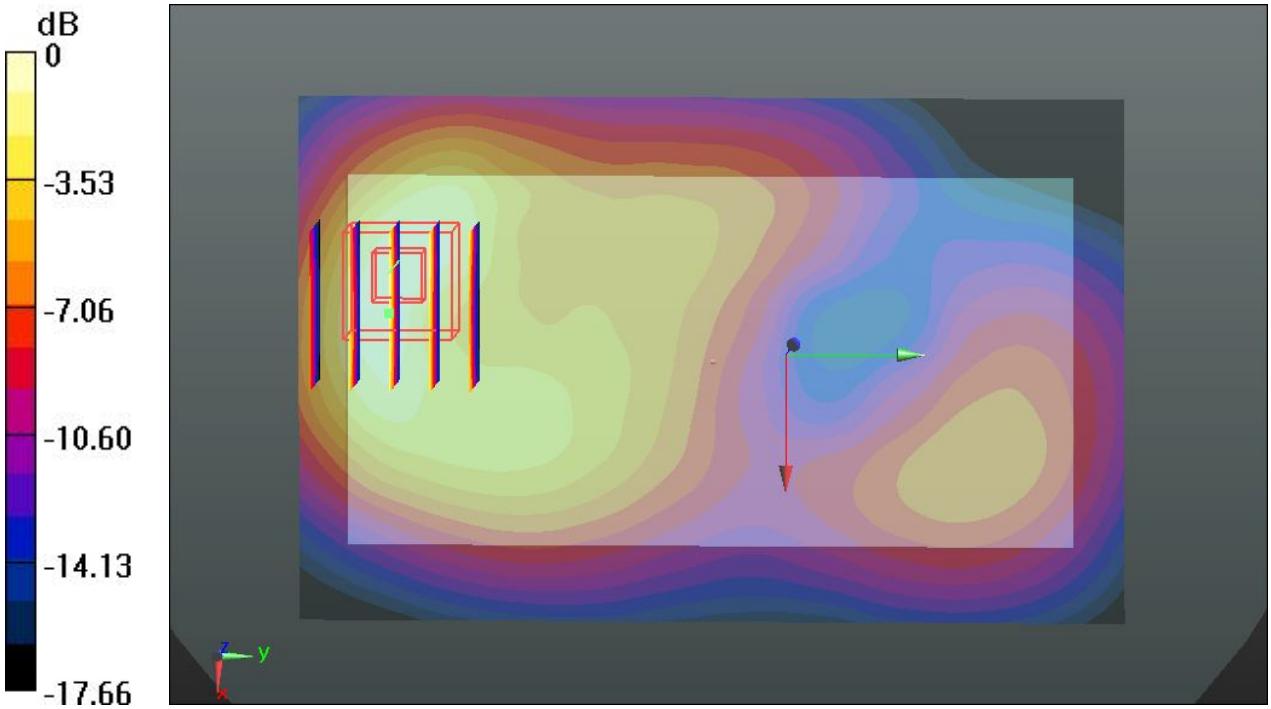

0 dB = 1.16 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#100 WCDMA Band II_RMC 12.2K_Bottom Side_1cm_Ch9262

Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1852.4 MHz; σ = 1.471 S/m; ε_r = 54.836; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9262/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.61 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.674 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 2.06 W/kg
SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.589 W/kg
Maximum value of SAR (measured) = 1.63 W/kg

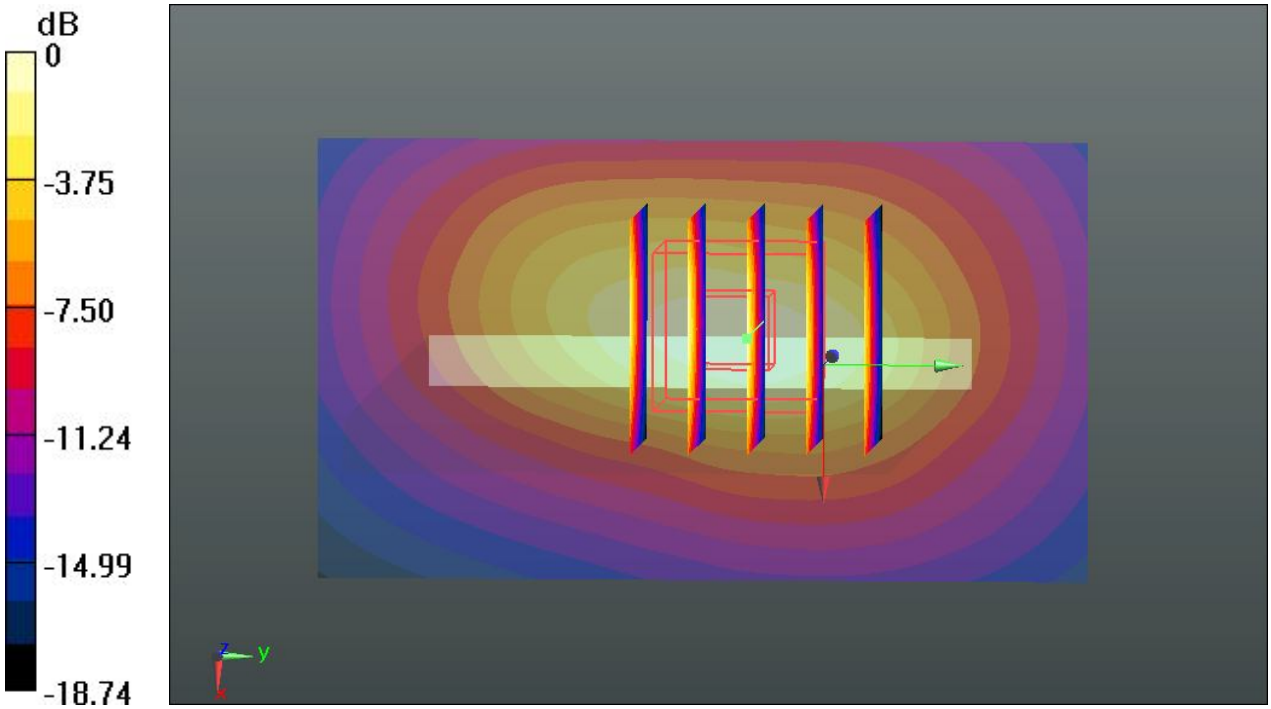

0 dB = 1.63 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.20

#101 WCDMA Band II_RMC 12.2K_Bottom Side_1cm_Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: MSL_1900_140120 Medium parameters used: f = 1880 MHz; σ = 1.507 S/m; ε_r = 54.733; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch9400/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.58 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.685 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 2.04 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.567 W/kg
Maximum value of SAR (measured) = 1.60 W/kg

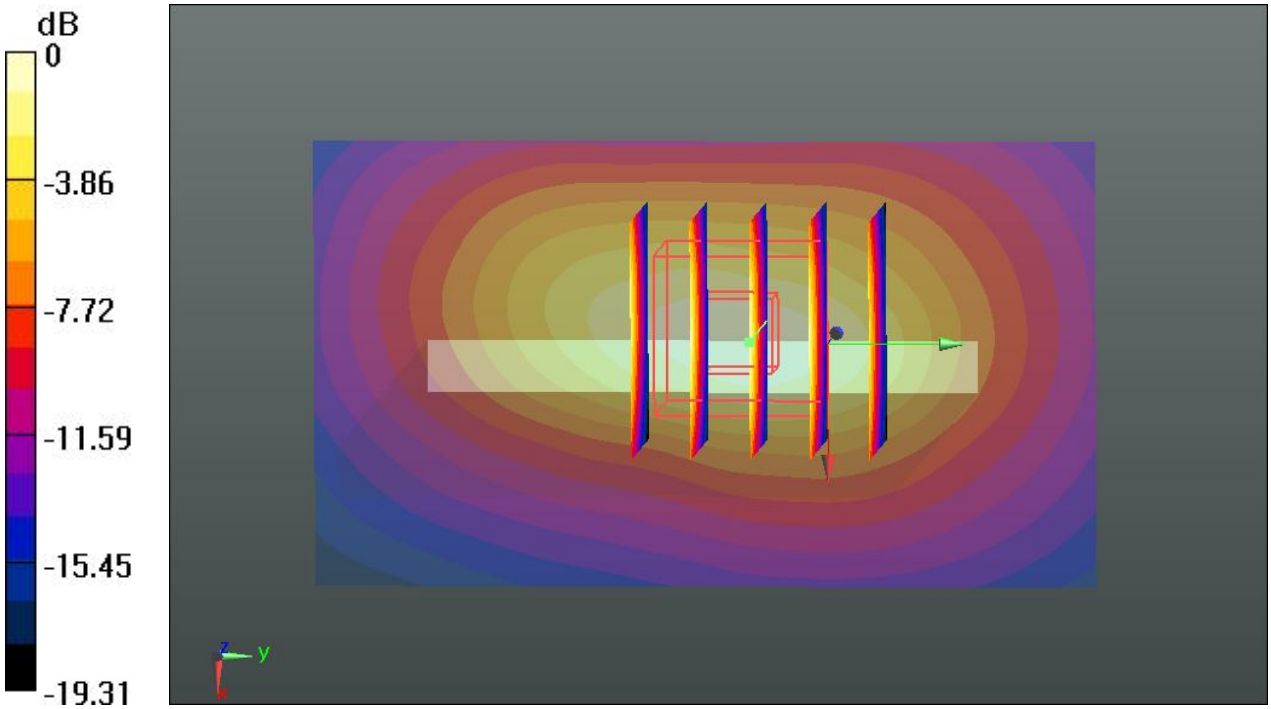

0 dB = 1.60 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#181 WLAN 2.4GHz_802.11b 1Mbps_Front_1cm_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: MSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 2.012 S/m; ε_r = 52.233; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (81x141x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.216 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.992 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.276 W/kg
SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.084 W/kg
Maximum value of SAR (measured) = 0.209 W/kg

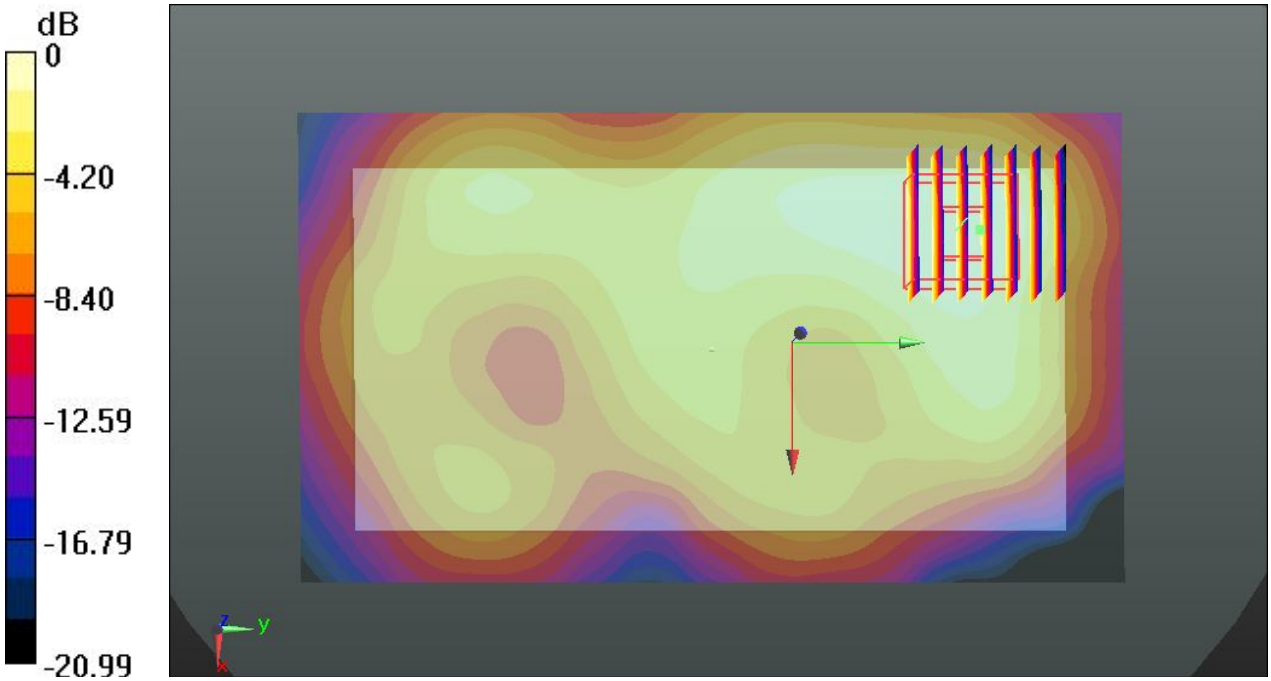

0 dB = 0.209 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#182 WLAN 2.4GHz_802.11b 1Mbps_Back_1cm_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: MSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 2.012 S/m; ε_r = 52.233; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (81x141x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.146 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.564 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.183 W/kg
SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.054 W/kg
Maximum value of SAR (measured) = 0.138 W/kg

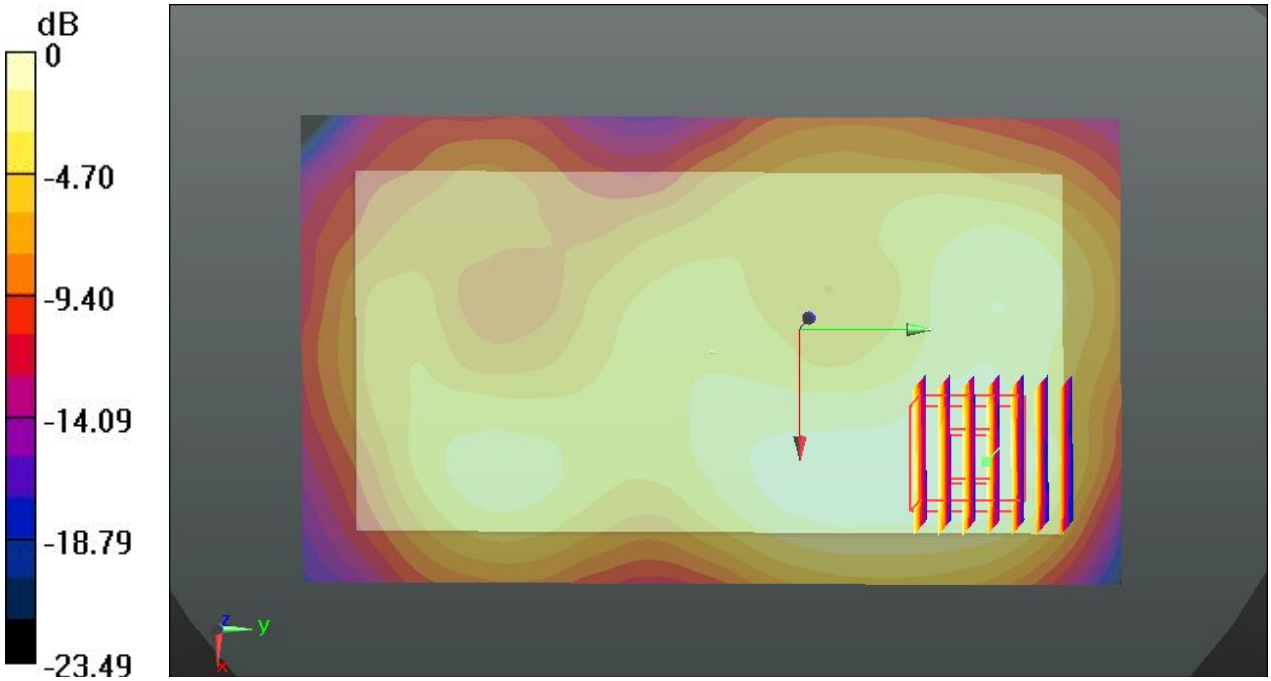

0 dB = 0.138 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#183 WLAN 2.4GHz_802.11b 1Mbps_Left Side_1cm_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: MSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 2.012 S/m; ε_r = 52.233; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (41x141x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.277 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.024 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.350 W/kg
SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.095 W/kg
Maximum value of SAR (measured) = 0.264 W/kg

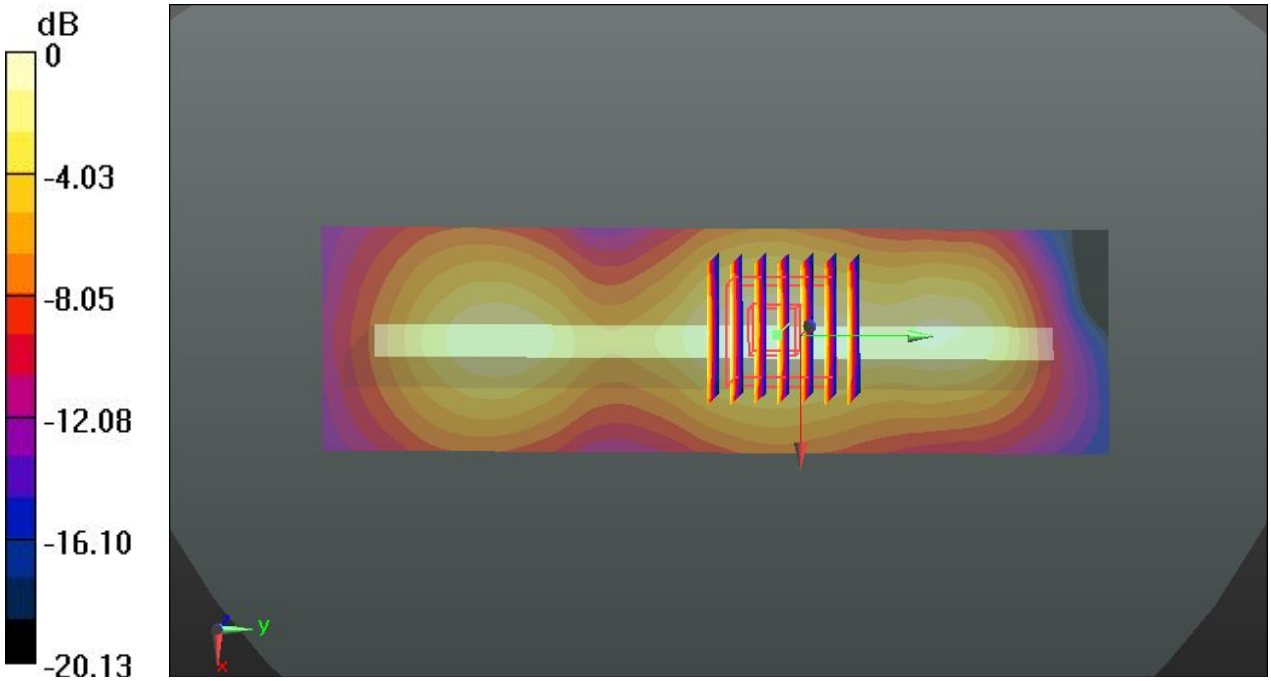

0 dB = 0.264 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014.01.22

#184 WLAN 2.4GHz_802.11b 1Mbps_Top Side_1cm_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: MSL_2450_140122 Medium parameters used: f = 2462 MHz; σ = 2.012 S/m; ε_r = 52.233; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.6 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch11/Area Scan (41x81x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.133 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.910 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.173 W/kg
SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.049 W/kg
Maximum value of SAR (measured) = 0.132 W/kg

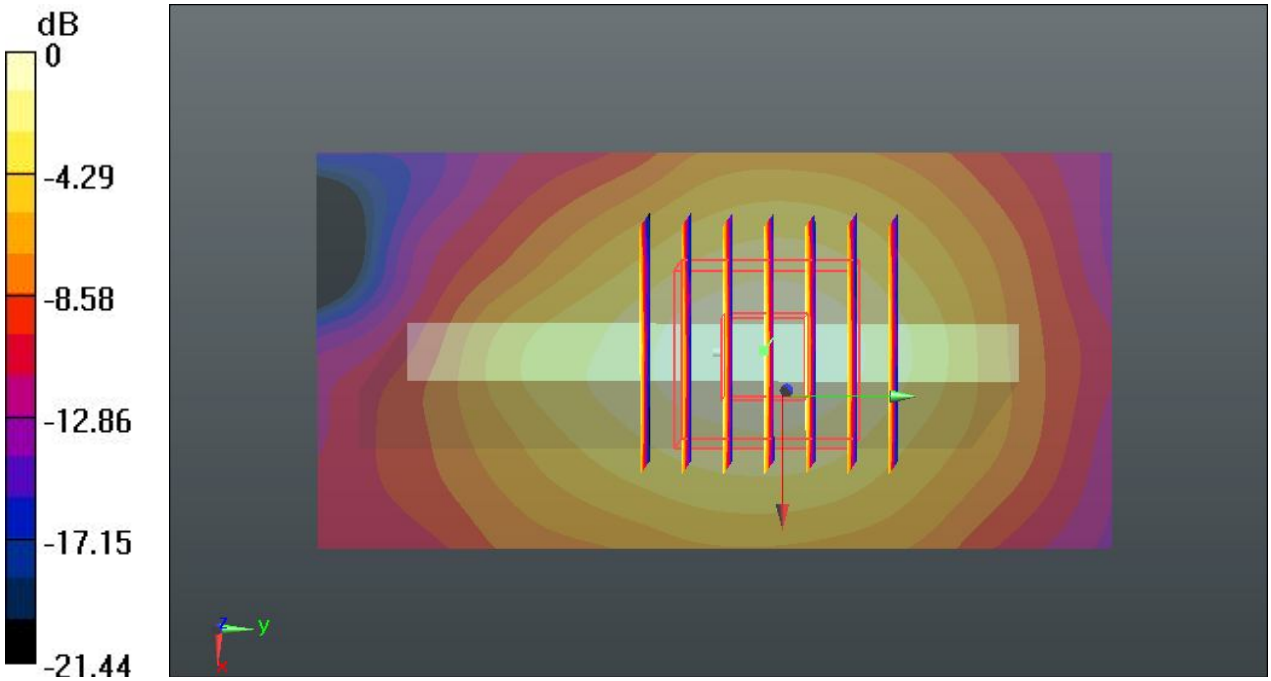

0 dB = 0.132 W/kg