

FCC RF Test Report


APPLICANT : CT Asia
EQUIPMENT : GSM & WCDMA Mobile Phone
BRAND NAME : BLU
MODEL NAME : Studio 5.0 S II
FCC ID : YHLBLUSTUD50SII
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 10, 2014 and testing was completed on Jan. 28, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Testing Site	6
1.7 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power	8
2.3 Test Mode	9
2.4 Connection Diagram of Test System	10
2.5 Support Unit used in test configuration and system	11
2.6 EUT Operation Test Setup	11
2.7 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement	14
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	32
3.6 AC Conducted Emission Measurement	54
3.7 Antenna Requirements	58
4 LIST OF MEASURING EQUIPMENT	59
5 UNCERTAINTY OF EVALUATION	60
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR411002B	Rev. 01	Initial issue of report	Mar. 04, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.3 dB at 2389.920 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.83 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

CT Asia

Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

1.2 Manufacturer

BEIJING BENYWAVE TECHNOLOGY CO., LTD.

NO.55 Jiachang 2 road, OPTO-Mechatronics Industrial Park, Tongzhou district, Beijing 101111

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	GSM & WCDMA Mobile Phone
Brand Name	BLU
Model Name	Studio 5.0 S II
FCC ID	YHLBLUSTUD50SII
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/Bluetooth v3.0 + EDR
HW Version	TBW9751_P2_003
SW Version	975114_9302_VXXXXXX
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 18.16 dBm (0.0655 W) 802.11g : 22.73 dBm (0.1875 W) 802.11n HT20 : 22.75 dBm (0.1884 W) 802.11n HT40 : 22.26 dBm (0.1683 W)
Antenna Type	Chip Antenna with gain -6.10 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	TH01-SZ	831040

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	CO01-KS	03CH01-KS	149928

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	18.02	18.08	17.95	17.96
CH 06	2437 MHz	17.89	17.91	17.68	17.73
CH 11	2462 MHz	18.16	18.14	18.13	17.93

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	22.63	22.57	22.54	22.51	22.48	22.45	22.41	22.44
CH 06	2437 MHz	22.43	22.39	22.35	22.37	22.32	22.34	22.31	22.35
CH 11	2462 MHz	22.73	22.71	22.62	22.71	22.62	22.55	22.56	22.52

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	22.48	22.38	22.33	22.26	22.23	22.33	22.28	22.31
CH 06	2437 MHz	22.44	22.32	22.27	22.20	22.17	22.27	22.22	22.25
CH 11	2462 MHz	22.75	22.09	22.04	21.97	21.94	22.04	21.99	22.02

Channel	Frequency	2.4GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	22.03	20.97	20.86	20.79	20.40	20.39	20.22	20.49
CH 06	2437 MHz	22.10	21.02	20.94	20.87	20.48	20.47	20.30	20.57
CH 09	2452 MHz	22.26	21.15	21.08	21.01	20.62	20.61	20.44	20.71


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			
Remark: For Radiated Test Cases, The tests were performance with USB Cable, adapter and earphone.				

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

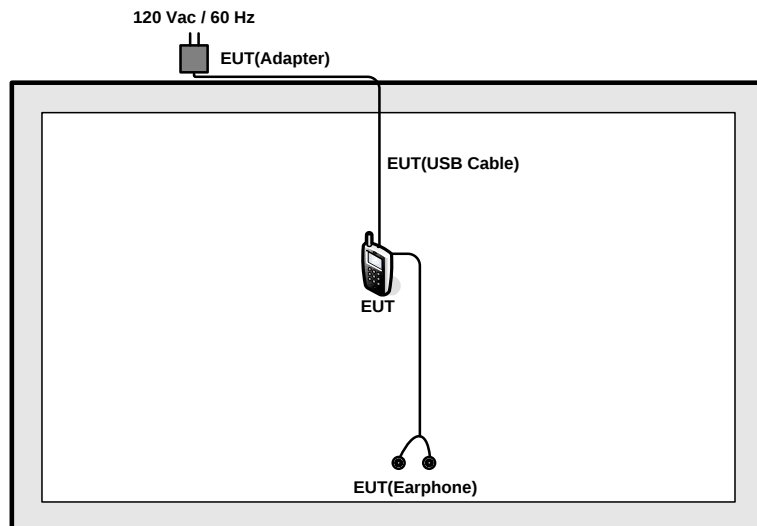

<AC Conducted Emission Mode>

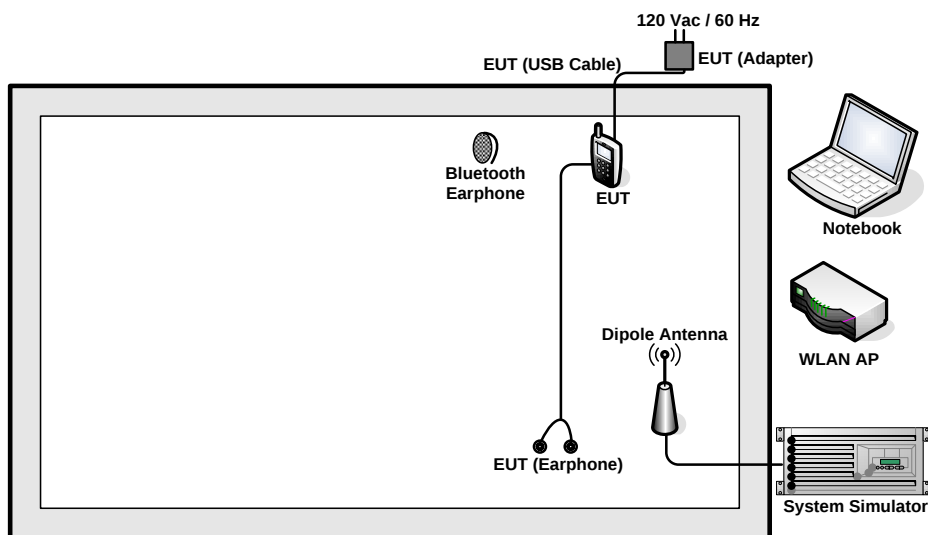

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-815	KA2DIR815A1	N/A	Unshielded, 1.8 m
3.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.5 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 7.5 + 10 = 17.5 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

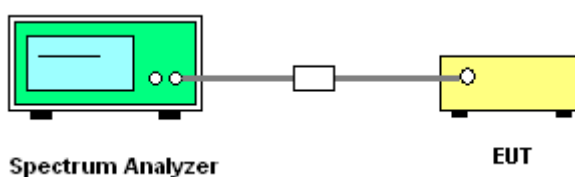

3.1.5 Test Result of 6dB Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	9.08	0.50	Pass
11b	1Mbps	1	6	2437	9.08	0.50	Pass
11b	1Mbps	1	11	2462	10.00	0.50	Pass
11g	6Mbps	1	1	2412	16.32	0.50	Pass
11g	6Mbps	1	6	2437	16.32	0.50	Pass
11g	6Mbps	1	11	2462	16.32	0.50	Pass
HT20	MCS0	1	1	2412	17.60	0.50	Pass
HT20	MCS0	1	6	2437	17.60	0.50	Pass
HT20	MCS0	1	11	2462	17.60	0.50	Pass
HT40	MCS0	1	3	2422	36.00	0.50	Pass
HT40	MCS0	1	6	2437	36.32	0.50	Pass
HT40	MCS0	1	9	2452	36.32	0.50	Pass

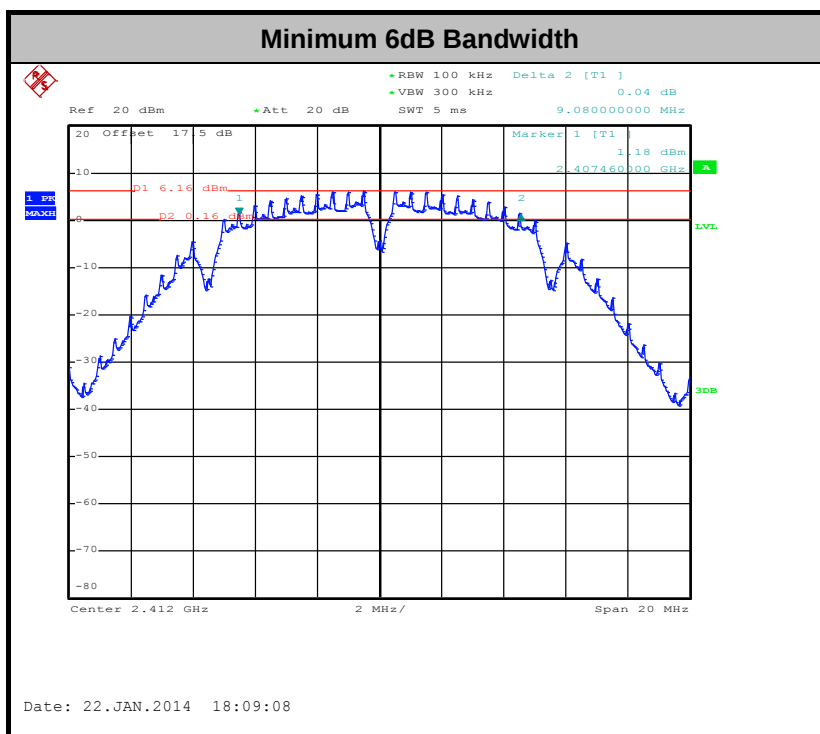

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

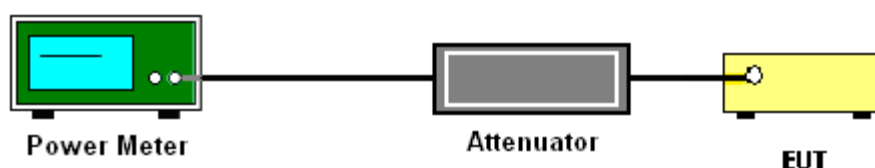

3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	18.02	30.00	-6.10	Pass
11b	1Mbps	1	6	2437	17.89	30.00	-6.10	Pass
11b	1Mbps	1	11	2462	18.16	30.00	-6.10	Pass
11g	6Mbps	1	1	2412	22.63	30.00	-6.10	Pass
11g	6Mbps	1	6	2437	22.43	30.00	-6.10	Pass
11g	6Mbps	1	11	2462	22.73	30.00	-6.10	Pass
HT20	MCS0	1	1	2412	22.48	30.00	-6.10	Pass
HT20	MCS0	1	6	2437	22.44	30.00	-6.10	Pass
HT20	MCS0	1	11	2462	22.75	30.00	-6.10	Pass
HT40	MCS0	1	3	2422	22.03	30.00	-6.10	Pass
HT40	MCS0	1	6	2437	22.10	30.00	-6.10	Pass
HT40	MCS0	1	9	2452	22.26	30.00	-6.10	Pass

Note: Measured power (dBm) has offset with cable loss.

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.08	15.13	30.00	-6.10	Pass
11b	1Mbps	1	6	2437	0.08	14.99	30.00	-6.10	Pass
11b	1Mbps	1	11	2462	0.08	15.25	30.00	-6.10	Pass
11g	6Mbps	1	1	2412	0.50	12.34	30.00	-6.10	Pass
11g	6Mbps	1	6	2437	0.50	12.08	30.00	-6.10	Pass
11g	6Mbps	1	11	2462	0.50	12.36	30.00	-6.10	Pass
HT20	MCS0	1	1	2412	0.51	12.36	30.00	-6.10	Pass
HT20	MCS0	1	6	2437	0.51	12.21	30.00	-6.10	Pass
HT20	MCS0	1	11	2462	0.51	12.39	30.00	-6.10	Pass
HT40	MCS0	1	3	2422	1.02	10.63	30.00	-6.10	Pass
HT40	MCS0	1	6	2437	1.02	10.71	30.00	-6.10	Pass
HT40	MCS0	1	9	2452	1.02	10.75	30.00	-6.10	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

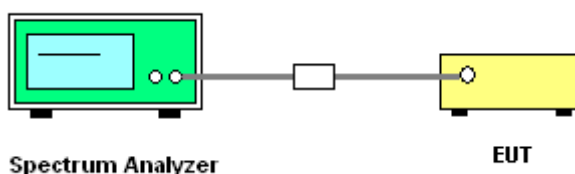


3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-8.47	8.00	-6.10	Pass
11b	1Mbps	1	6	2437	-7.57	8.00	-6.10	Pass
11b	1Mbps	1	11	2462	-7.20	8.00	-6.10	Pass
11g	6Mbps	1	1	2412	-14.77	8.00	-6.10	Pass
11g	6Mbps	1	6	2437	-13.38	8.00	-6.10	Pass
11g	6Mbps	1	11	2462	-12.94	8.00	-6.10	Pass
HT20	MCS0	1	1	2412	-14.88	8.00	-6.10	Pass
HT20	MCS0	1	6	2437	-13.44	8.00	-6.10	Pass
HT20	MCS0	1	11	2462	-13.51	8.00	-6.10	Pass
HT40	MCS0	1	3	2422	-22.98	8.00	-6.10	Pass
HT40	MCS0	1	6	2437	-17.41	8.00	-6.10	Pass
HT40	MCS0	1	9	2452	-17.10	8.00	-6.10	Pass

Note: Measured power density (dBm) has offset with cable loss.

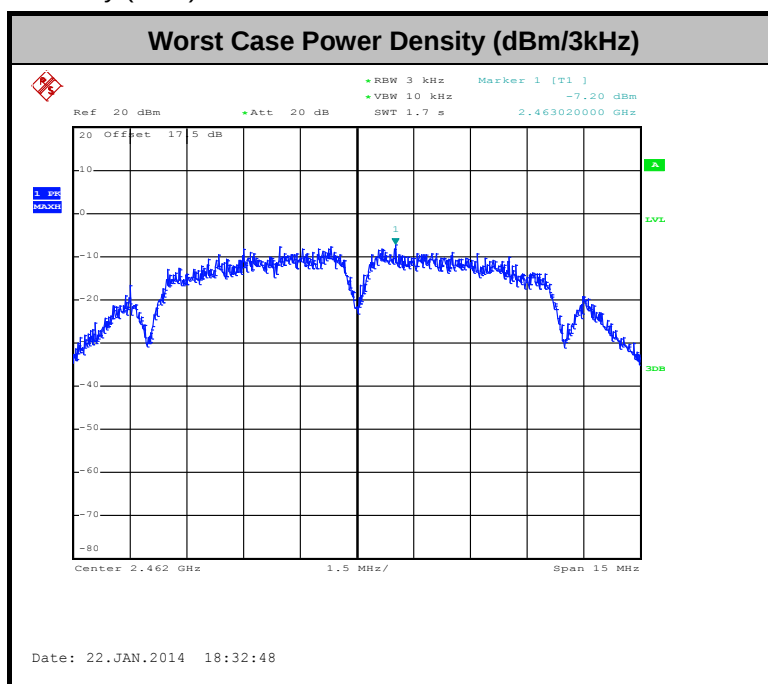

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

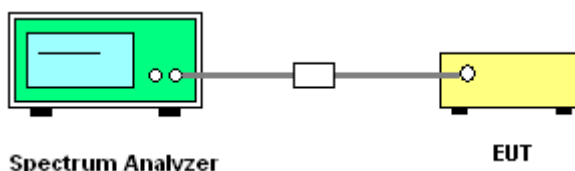

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Liang

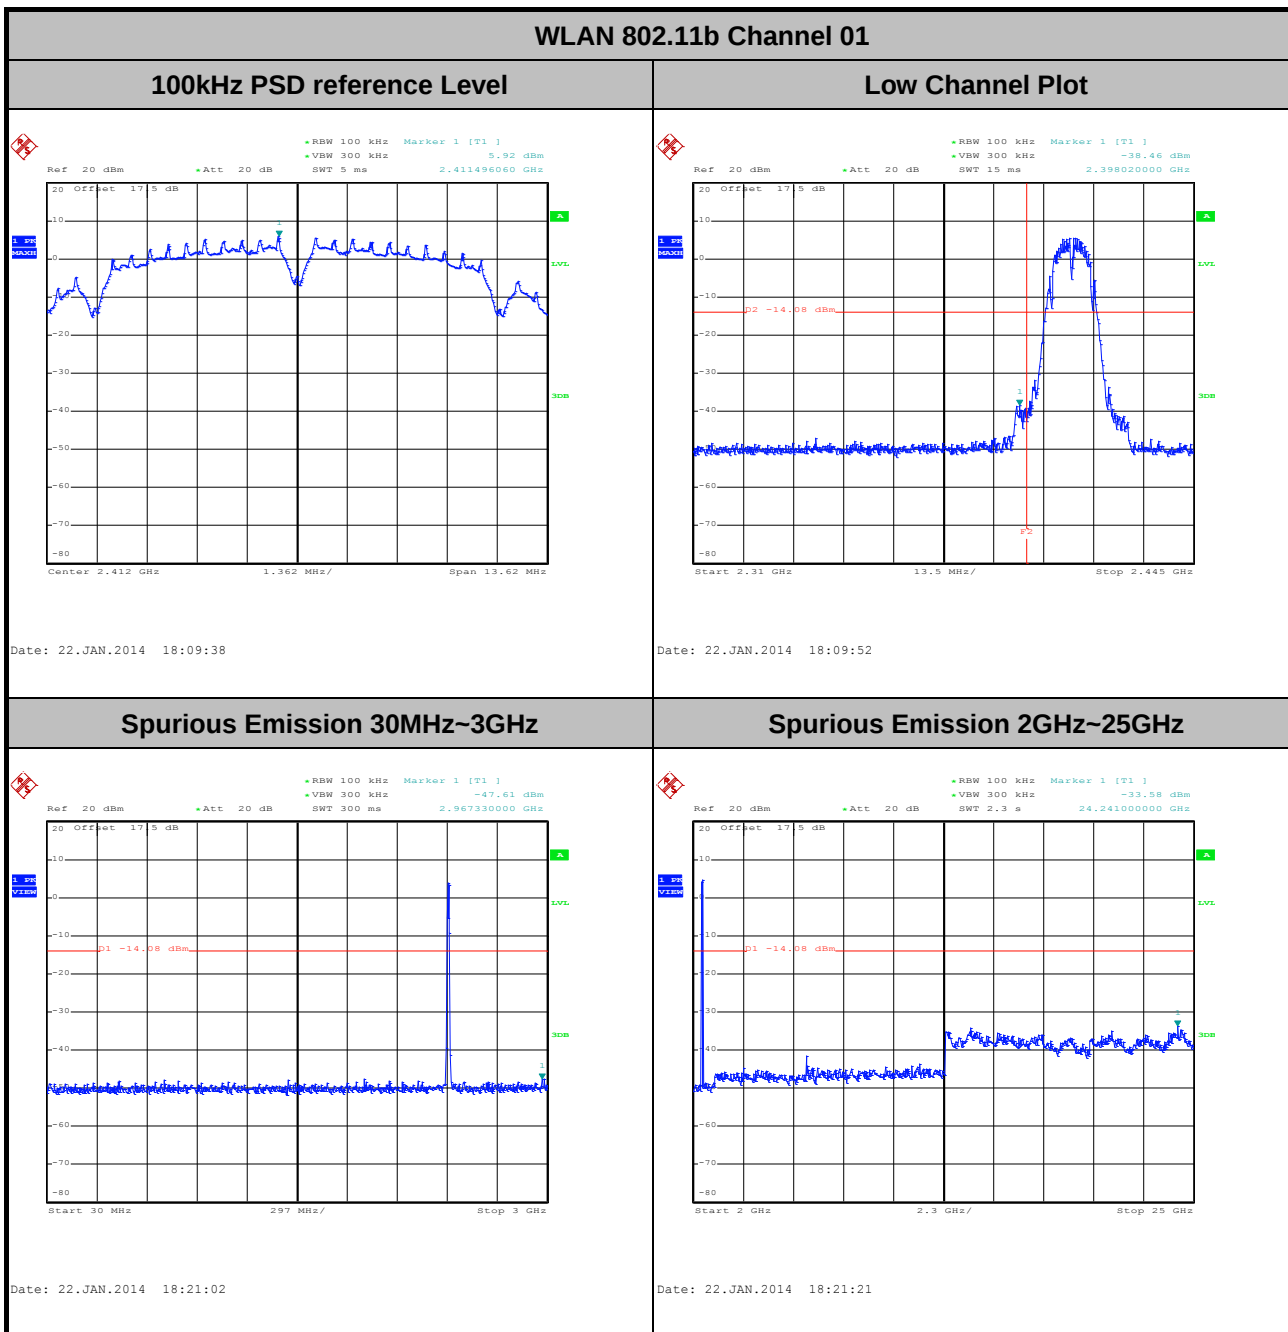




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Liang


WLAN 802.11b Channel 06

100kHz PSD reference Level

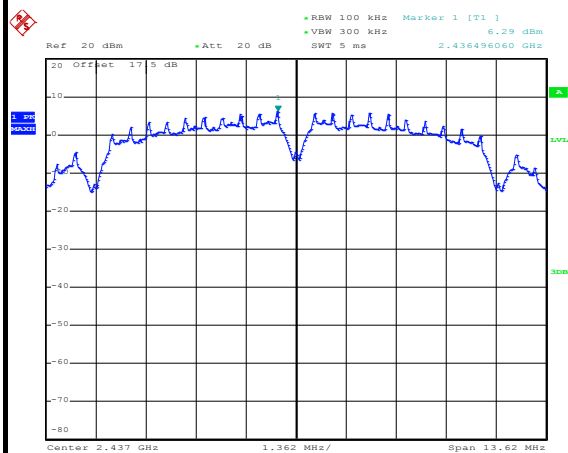


Date: 22.JAN.2014 18:24:24

Spurious Emission 30MHz~3GHz

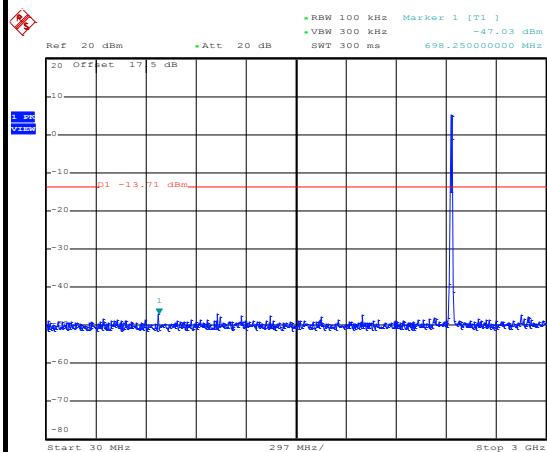

Date: 22.JAN.2014 18:24:44

Spurious Emission 2GHz~25GHz

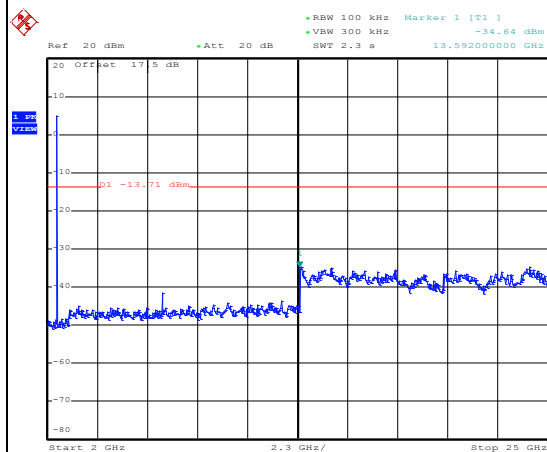


Date: 22.JAN.2014 18:25:02



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Liang


WLAN 802.11b Channel 11

100kHz PSD reference Level

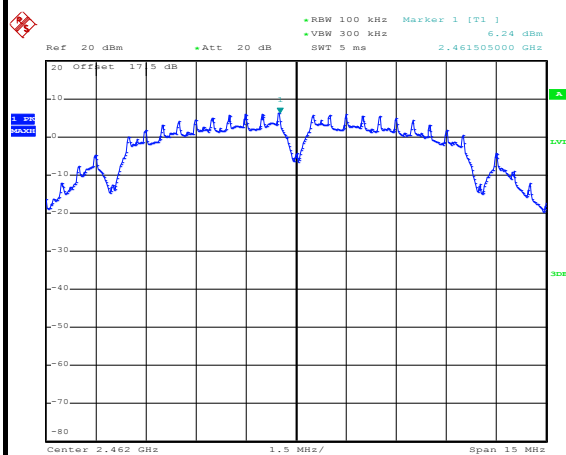


Date: 22.JAN.2014 18:32:57

High Channel Plot

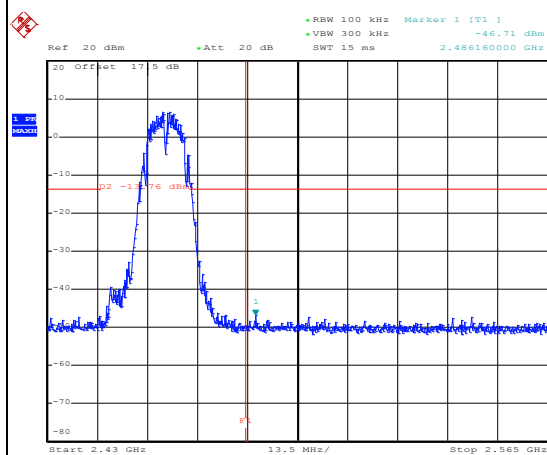


Date: 22.JAN.2014 18:33:11

Spurious Emission 30MHz~3GHz

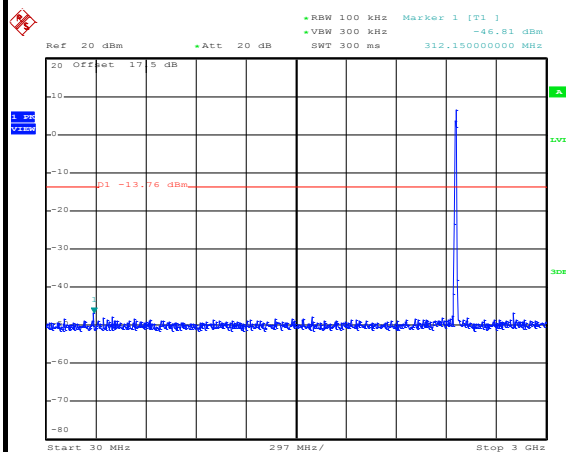

Date: 22.JAN.2014 18:33:30

Spurious Emission 2GHz~25GHz

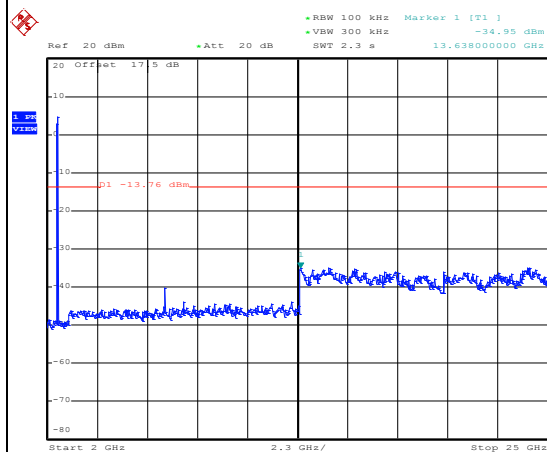


Date: 22.JAN.2014 18:33:49



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Liang


WLAN 802.11g Channel 01

100kHz PSD reference Level

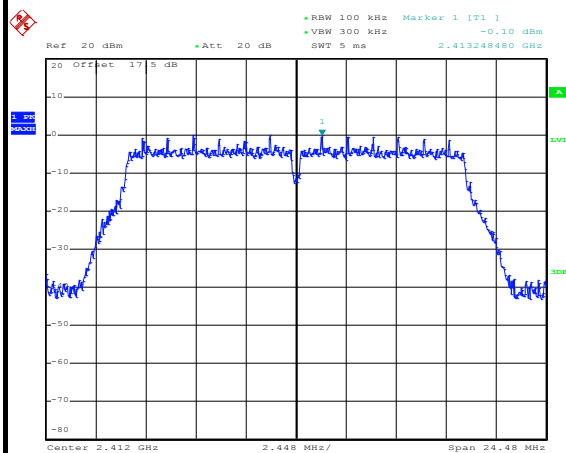


Date: 27.JAN.2014 00:27:58

Low Channel Plot

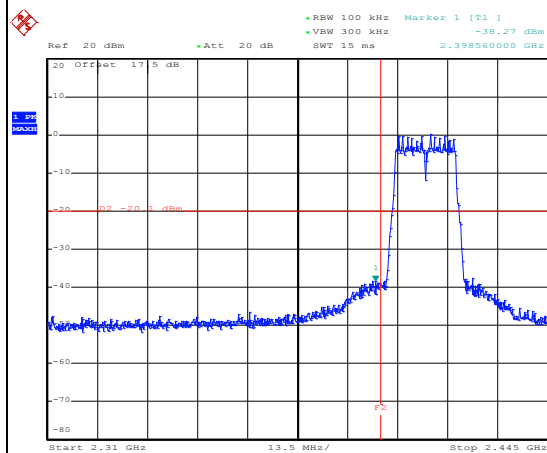


Date: 27.JAN.2014 00:28:12

Spurious Emission 30MHz~3GHz

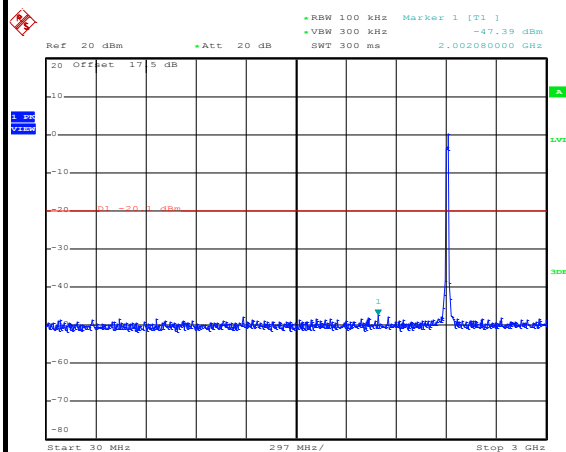

Date: 27.JAN.2014 00:28:32

Spurious Emission 2GHz~25GHz

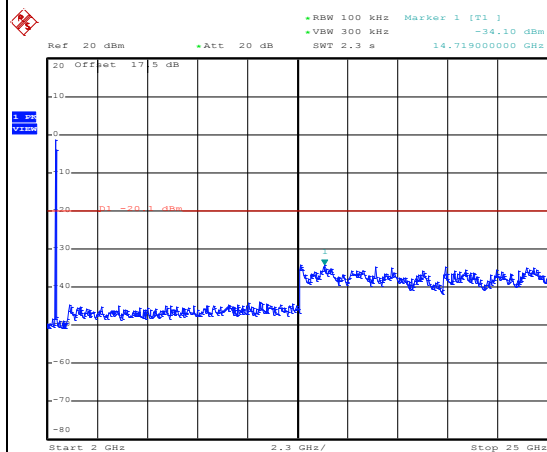


Date: 27.JAN.2014 00:28:50



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Liang


WLAN 802.11g Channel 06

100kHz PSD reference Level

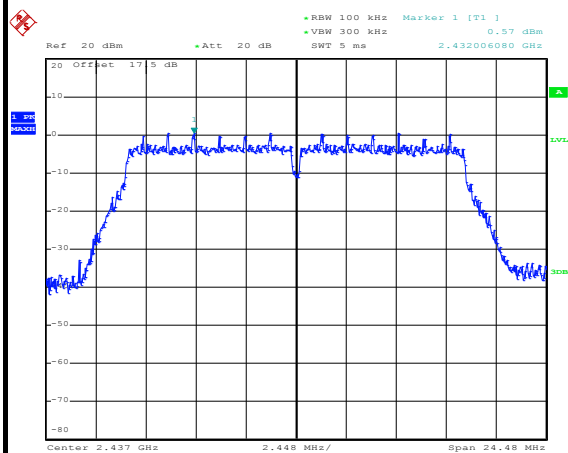


Date: 22.JAN.2014 18:43:11

Spurious Emission 30MHz~3GHz

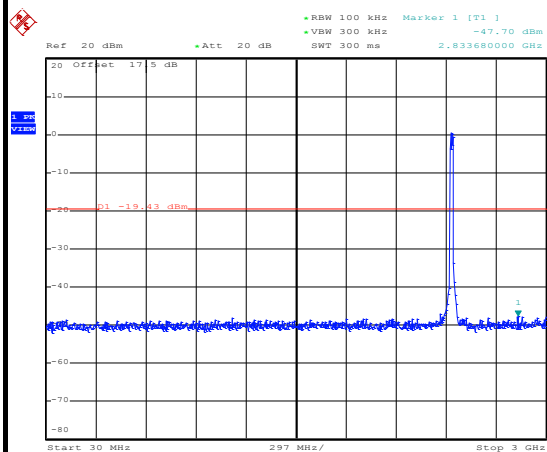

Date: 22.JAN.2014 18:43:30

Spurious Emission 2GHz~25GHz

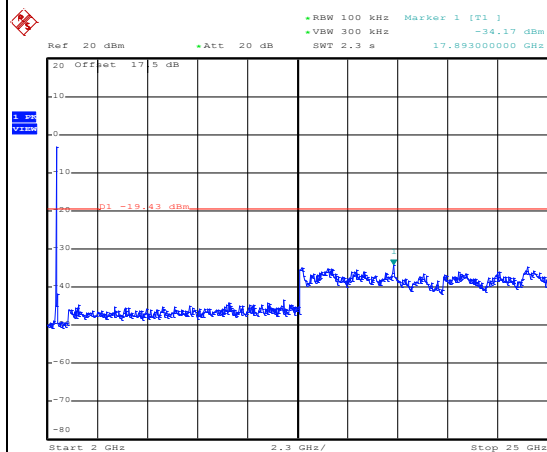


Date: 22.JAN.2014 18:43:49



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Liang


WLAN 802.11g Channel 11

100kHz PSD reference Level

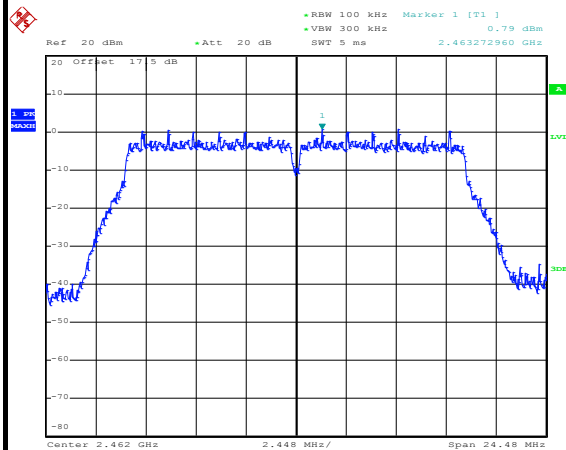


Date: 22.JAN.2014 18:38:29

High Channel Plot

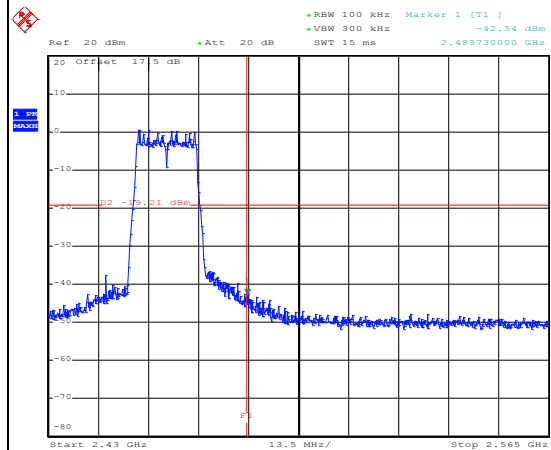


Date: 22.JAN.2014 18:38:43

Spurious Emission 30MHz~3GHz

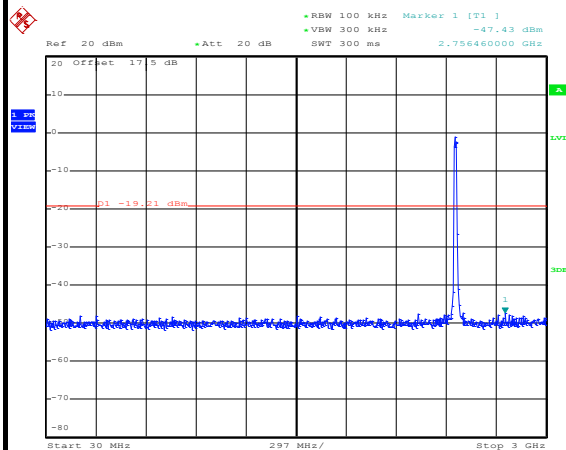

Date: 22.JAN.2014 18:39:02

Spurious Emission 2GHz~25GHz

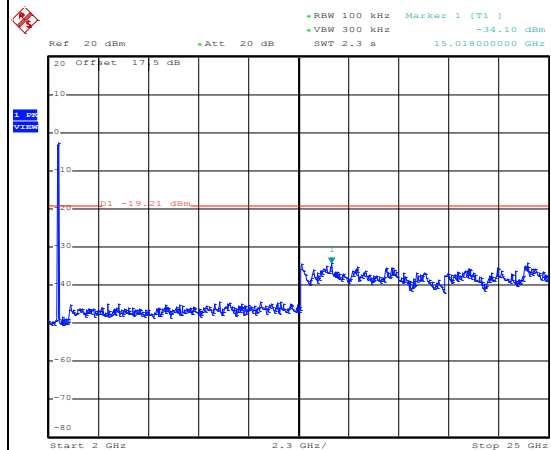


Date: 22.JAN.2014 18:39:21



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Liang


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

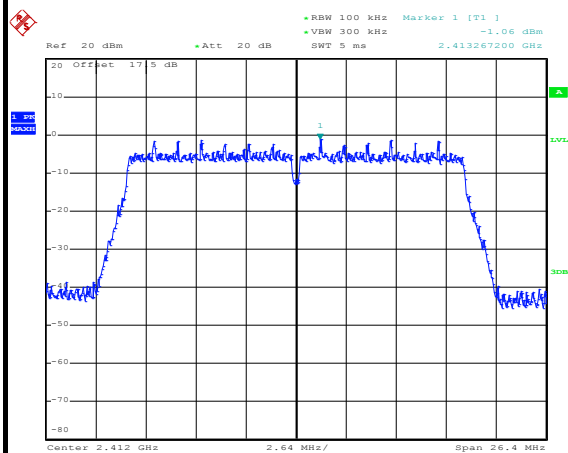


Date: 27.JAN.2014 00:33:17

Low Channel Plot

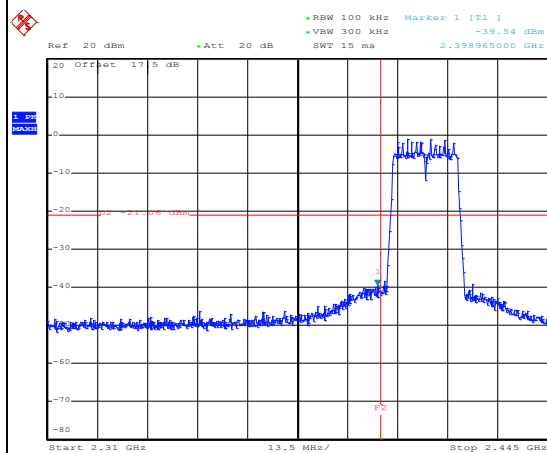


Date: 27.JAN.2014 00:33:31

Spurious Emission 30MHz~3GHz

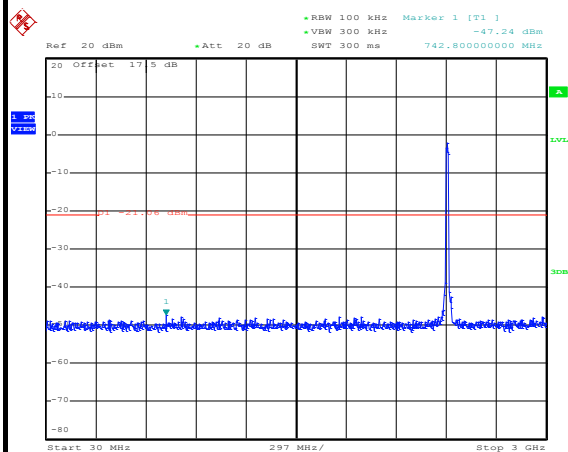

Date: 27.JAN.2014 00:33:50

Spurious Emission 2GHz~25GHz

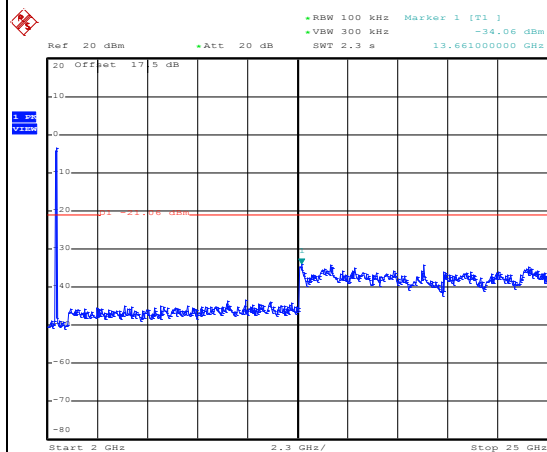


Date: 27.JAN.2014 00:34:08



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Liang


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

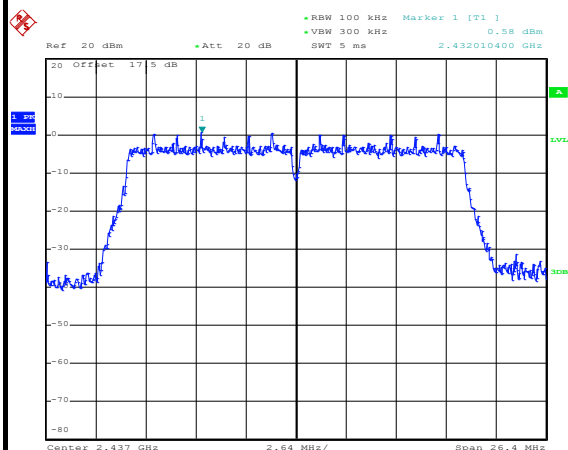


Date: 22.JAN.2014 19:03:34

Spurious Emission 30MHz~3GHz

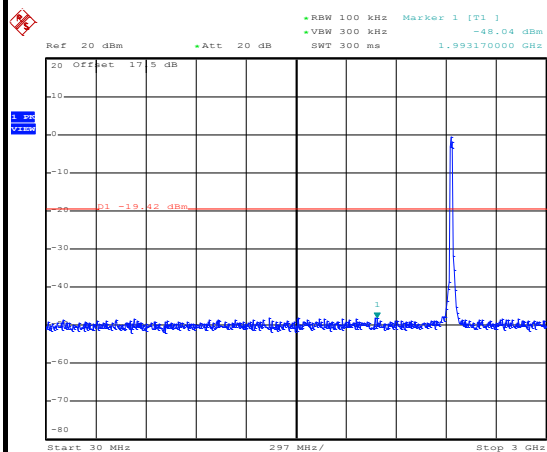

Date: 22.JAN.2014 19:03:54

Spurious Emission 2GHz~25GHz

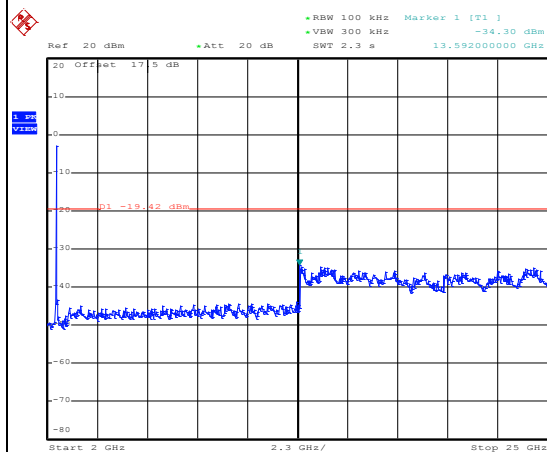


Date: 22.JAN.2014 19:04:12



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Liang


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

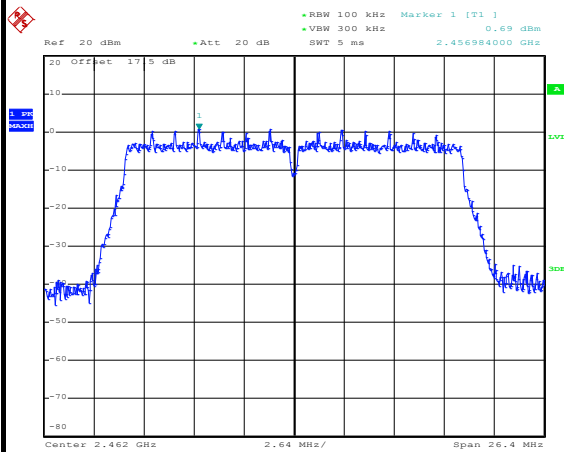


Date: 22.JAN.2014 19:09:04

High Channel Plot

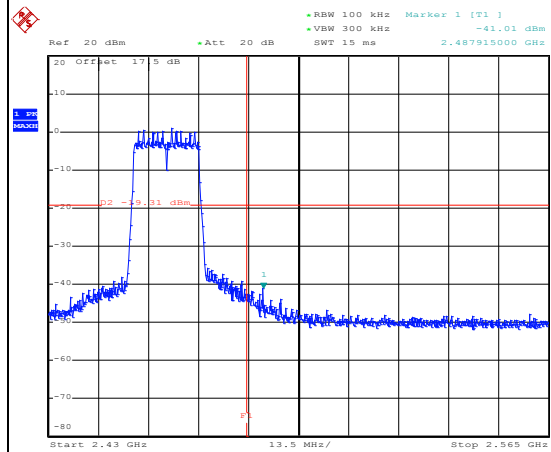


Date: 22.JAN.2014 19:09:18

Spurious Emission 30MHz~3GHz

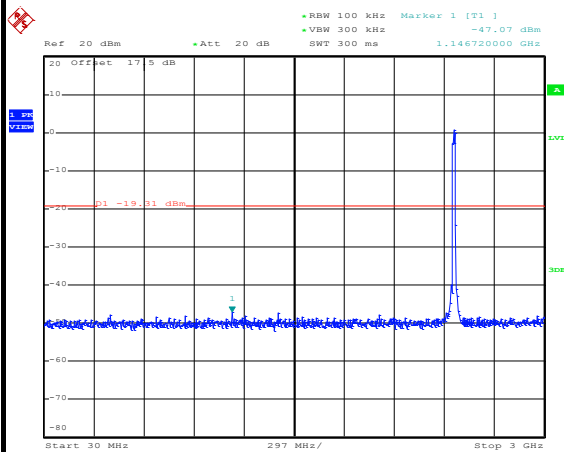

Date: 22.JAN.2014 19:09:37

Spurious Emission 2GHz~25GHz

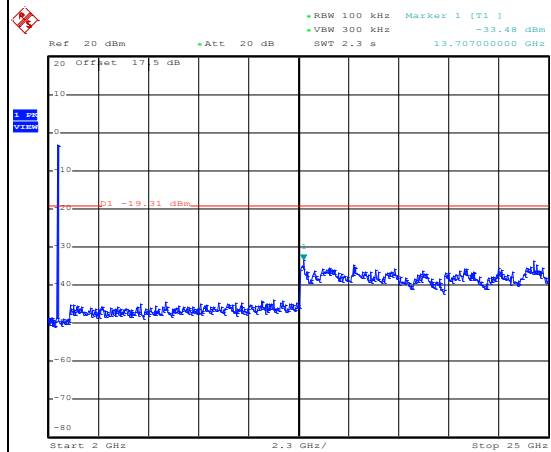


Date: 22.JAN.2014 19:09:56



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	03	Test Engineer :	Fly Liang


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

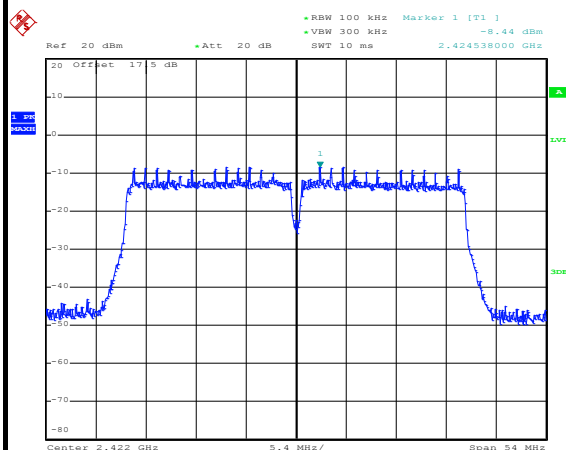


Date: 27.JAN.2014 00:43:00

Low Channel Plot

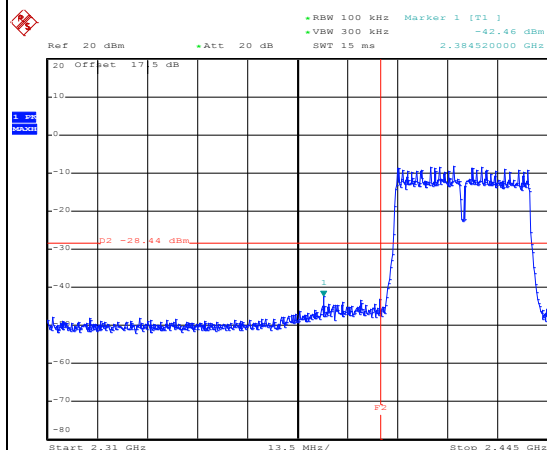


Date: 27.JAN.2014 00:43:14

Spurious Emission 30MHz~3GHz

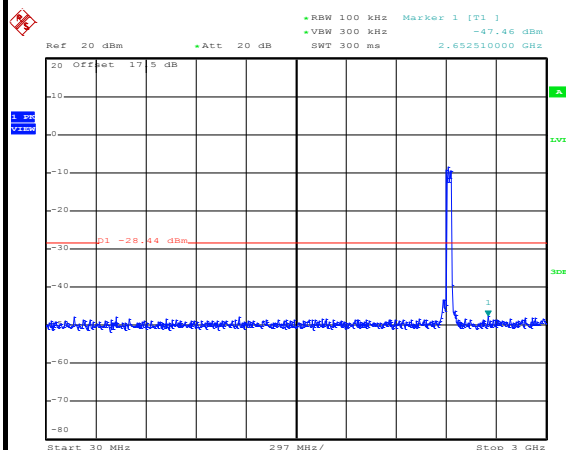

Date: 27.JAN.2014 00:47:15

Spurious Emission 2GHz~25GHz

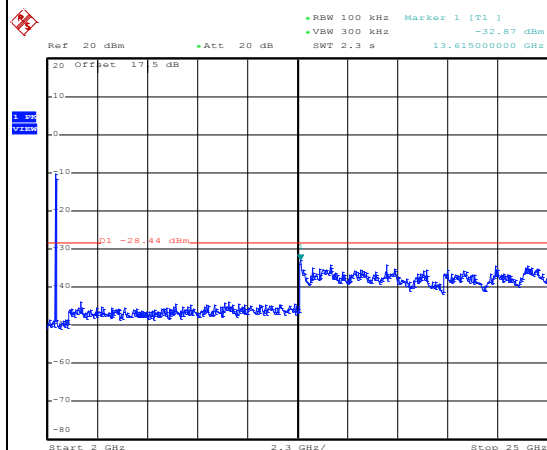

Date: 27.JAN.2014 00:45:09




WLAN 802.11n HT40 Channel 06	
100kHz PSD reference Level This plot shows the Power Spectral Density (PSD) reference level for a 100kHz bandwidth. The y-axis represents power in dBm, ranging from -80 to 20. The x-axis represents frequency in GHz, with a center frequency of 2.437 GHz and a span of 54.48 MHz. The plot shows a flat noise floor at approximately -10 dBm, with a slight dip at the center frequency. A marker at 2.434493920 GHz indicates a power level of -3.86 dBm. Ref: 20 dBm, Att: 20 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 10 ms, Marker 1 [T1]: -3.86 dBm, 2.434493920 GHz	
Spurious Emission 30MHz~3GHz This plot shows the spurious emission levels for the 30MHz~3GHz range. The y-axis represents power in dBm, ranging from -80 to 20. The x-axis represents frequency in GHz, with a start frequency of 30 MHz and a stop frequency of 3 GHz. The plot shows a flat noise floor at approximately -10 dBm, with a sharp peak at 2.97 MHz. A marker at 2.949600000 GHz indicates a power level of -23.86 dBm. Ref: 20 dBm, Att: 20 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 300 ms, Marker 1 [T1]: -23.86 dBm, 2.949600000 GHz	Spurious Emission 2GHz~25GHz This plot shows the spurious emission levels for the 2GHz~25GHz range. The y-axis represents power in dBm, ranging from -80 to 20. The x-axis represents frequency in GHz, with a start frequency of 2 GHz and a stop frequency of 25 GHz. The plot shows a flat noise floor at approximately -10 dBm, with a sharp peak at 2.3 GHz. A marker at 2.361500000 GHz indicates a power level of -34.24 dBm. Ref: 20 dBm, Att: 20 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 2.3 s, Marker 1 [T1]: -34.24 dBm, 2.361500000 GHz
Date: 27.JAN.2014 00:51:48	Date: 27.JAN.2014 00:54:26



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	09	Test Engineer :	Fly Liang


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

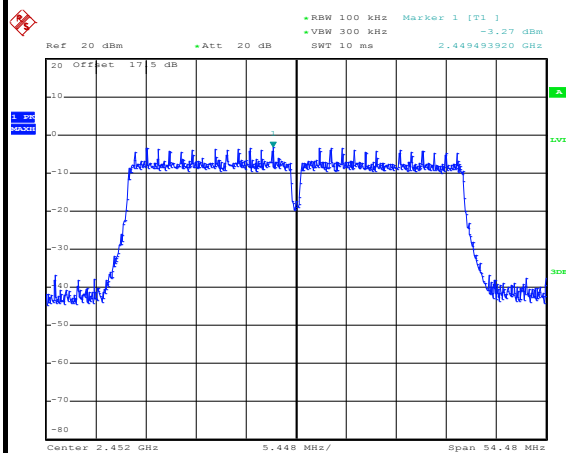


Date: 22.JAN.2014 19:24:02

High Channel Plot

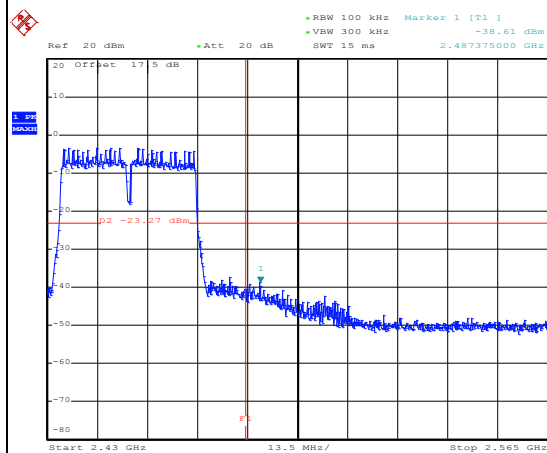


Date: 22.JAN.2014 19:24:16

Spurious Emission 30MHz~3GHz

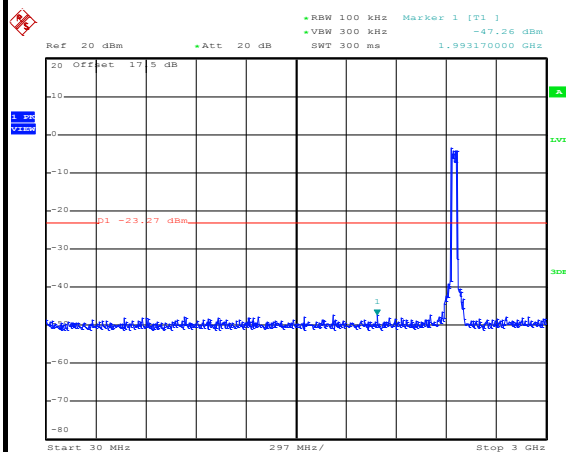

Date: 22.JAN.2014 19:28:46

Spurious Emission 2GHz~25GHz

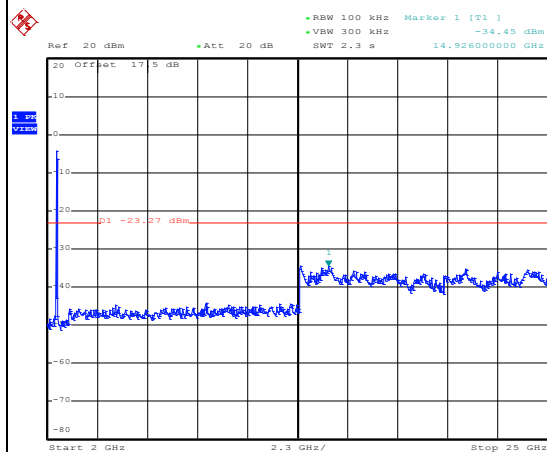

Date: 22.JAN.2014 19:27:04

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.14	-	-	10Hz
802.11g	89.17	1.400	0.714	1kHz
2.4GHz 802.11n HT20	88.83	1.304	0.767	1kHz
2.4GHz 802.11n HT40	79.13	0.652	1.534	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

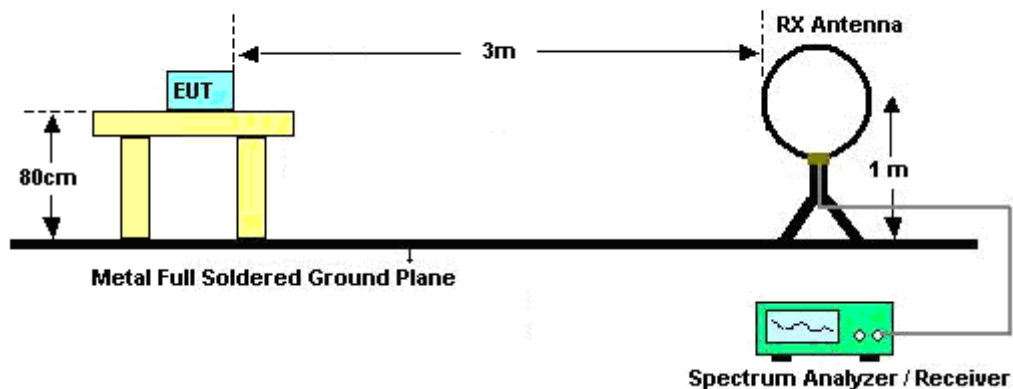

For radiated emissions from 30MHz to 1GHz

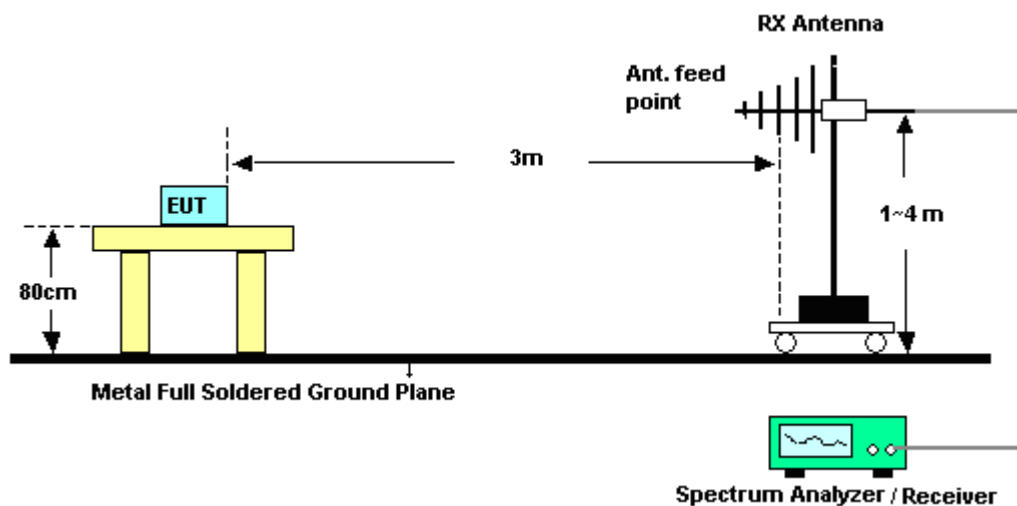

For radiated emissions above 1GHz

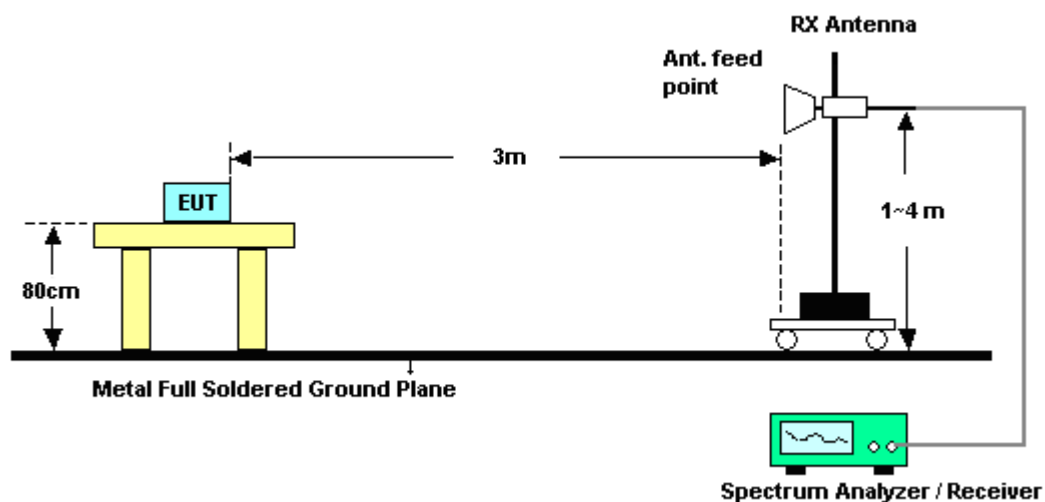

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	Low	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2366.34	62.02	-11.98	74	58.89	32.81	3.57	33.25	100	337	Peak
2378.31	45.83	-8.17	54	42.68	32.83	3.58	33.26	100	337	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.95	58.73	-15.27	74	55.54	32.86	3.59	33.26	103	115	Peak
2378.31	44.41	-9.59	54	41.26	32.83	3.58	33.26	103	115	Average

Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	High	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2494.45	60.19	-13.81	74	56.78	33.05	3.66	33.3	100	339	Peak
2494.3	45.76	-8.24	54	42.35	33.05	3.66	33.3	100	339	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.71	59.28	-14.72	74	55.91	33.01	3.65	33.29	100	100	Peak
2494.39	44.19	-9.81	54	40.78	33.05	3.66	33.3	100	100	Average

Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	Low	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.92	70.48	-3.52	74	67.29	32.86	3.59	33.26	100	193	Peak
2389.92	52.7	-1.3	54	49.51	32.86	3.59	33.26	100	193	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.47	64.94	-9.06	74	61.75	32.86	3.59	33.26	100	111	Peak
2389.92	47.79	-6.21	54	44.6	32.86	3.59	33.26	100	111	Average

Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	High	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.62	71.58	-2.42	74	68.21	33.01	3.65	33.29	100	339	Peak
2483.59	49.19	-4.81	54	45.82	33.01	3.65	33.29	100	339	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2490.94	66.81	-7.19	74	63.4	33.05	3.66	33.3	100	104	Peak
2483.62	47.35	-6.65	54	43.98	33.01	3.65	33.29	100	104	Average



Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	Low	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.47	71.44	-2.56	74	68.25	32.86	3.59	33.26	100	333	Peak
2389.83	52.52	-1.48	54	49.33	32.86	3.59	33.26	100	333	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.11	62.83	-11.17	74	59.64	32.86	3.59	33.26	129	107	Peak
2389.83	50.31	-3.69	54	47.12	32.86	3.59	33.26	129	107	Average

Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	High	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2488.69	72.64	-1.36	74	69.23	33.05	3.66	33.3	100	211	Peak
2484.04	48.63	-5.37	54	45.26	33.01	3.65	33.29	100	211	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.4	72.58	-1.42	74	69.21	33.01	3.65	33.29	107	54	Peak
2483.5	49.47	-4.53	54	46.1	33.01	3.65	33.29	107	54	Average



Test Mode :	802.11n HT40	Temperature :	22~23°C
Test Band :	Low	Relative Humidity :	42~43%
Test Channel :	03	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2382.81	68.06	-5.94	74	64.91	32.83	3.58	33.26	100	341	Peak
2386.86	51.54	-2.46	54	48.35	32.86	3.59	33.26	100	341	Average
2484.88	54.52	-19.48	74	51.15	33.01	3.65	33.29	100	335	Peak
2491.12	40.66	-13.34	54	37.25	33.05	3.66	33.3	100	335	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2382.27	64.2	-9.8	74	61.05	32.83	3.58	33.26	131	108	Peak
2389.38	49.83	-4.17	54	46.64	32.86	3.59	33.26	131	108	Average
2484.82	53.06	-20.94	74	49.69	33.01	3.65	33.29	100	96	Peak
2496.28	39.99	-14.01	54	36.58	33.05	3.66	33.3	100	96	Average



Test Mode :	802.11n HT40	Temperature :	22~23°C
Test Band :	High	Relative Humidity :	42~43%
Test Channel :	09	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2382.09	64.74	-9.26	74	61.59	32.83	3.58	33.26	100	338	Peak
2389.56	47.67	-6.33	54	44.48	32.86	3.59	33.26	100	338	Average
2487.34	69.38	-4.62	74	66.01	33.01	3.65	33.29	100	198	Peak
2490.55	51.95	-2.05	54	48.54	33.05	3.66	33.3	100	198	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2375.97	60.68	-13.32	74	57.53	32.83	3.58	33.26	159	111	Peak
2389.83	44.81	-9.19	54	41.62	32.86	3.59	33.26	159	111	Average
2487.19	67.75	-6.25	74	64.38	33.01	3.65	33.29	100	109	Peak
2484.67	51.78	-2.22	54	48.41	33.01	3.65	33.29	100	109	Average

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	802.11b	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	112.6	-	-	109.37	32.89	3.61	33.27	100	345	Peak
2412	106.53	-	-	103.3	32.89	3.61	33.27	100	345	Average
4824	45.67	-28.33	74	39.05	35.17	5.25	33.8	100	100	Peak

Test Mode :	802.11b	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	109.62	-	-	106.39	32.89	3.61	33.27	104	113	Peak
2412	103.39	-	-	100.16	32.89	3.61	33.27	104	113	Average
4824	47.49	-26.51	74	40.87	35.17	5.25	33.8	187	200	Peak

Test Mode :	802.11b	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	112.64	-	-	109.34	32.95	3.63	33.28	100	192	Peak
2437	105.91	-	-	102.61	32.95	3.63	33.28	100	192	Average
4874	47.42	-26.58	74	40.76	35.18	5.28	33.8	100	189	Peak
7312	48.7	-25.3	74	40.02	36.2	6.61	34.13	100	151	Peak

Test Mode :	802.11b	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	110.03	-	-	106.73	32.95	3.63	33.28	103	110	Peak
2437	104.07	-	-	100.77	32.95	3.63	33.28	103	110	Average
4874	46.39	-27.61	74	39.73	35.18	5.28	33.8	151	80	Peak
7312	48.38	-25.62	74	39.7	36.2	6.61	34.13	157	148	Peak

Test Mode :	802.11b	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	112.58	-	-	109.25	32.98	3.64	33.29	122	346	Peak
2462	106.68	-	-	103.35	32.98	3.64	33.29	122	346	Average
4924	47.4	-26.6	74	40.7	35.19	5.31	33.8	100	155	Peak
7386	49.02	-24.98	74	40.24	36.24	6.7	34.16	174	80	Peak

Test Mode :	802.11b	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	110.93	-	-	107.6	32.98	3.64	33.29	100	111	Peak
2462	104.75	-	-	101.42	32.98	3.64	33.29	100	111	Average
4924	47.53	-26.47	74	40.83	35.19	5.31	33.8	100	155	Peak
7386	48.49	-25.51	74	39.71	36.24	6.7	34.16	100	178	Peak

Test Mode :	802.11g	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	20.43	-19.57	40	35.52	18	0.48	33.57	174	48	Peak
105.66	17.56	-25.94	43.5	38.93	11.29	0.95	33.61	-	-	Peak
278.32	16.46	-29.54	46	35.7	12.61	1.55	33.4	-	-	Peak
409.27	17.29	-28.71	46	32.69	16.04	1.85	33.29	-	-	Peak
515.97	19.25	-26.75	46	32.77	17.55	2.03	33.1	-	-	Peak
566.41	19.75	-26.25	46	32.04	18.53	2.18	33	-	-	Peak
2412	108.58	-	-	105.35	32.89	3.61	33.27	100	360	Peak
2412	96.61	-	-	93.38	32.89	3.61	33.27	100	360	Average
4824	46.81	-27.19	74	40.19	35.17	5.25	33.8	174	85	Peak

Test Mode :	802.11g	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
48.43	24.74	-15.26	40	49.56	8.12	0.65	33.59	154	121	Peak
62.01	22.66	-17.34	40	50.25	5.27	0.73	33.59	-	-	Peak
100.81	16.48	-27.02	43.5	38.54	10.62	0.93	33.61	-	-	Peak
418	17.5	-28.5	46	32.82	16.1	1.86	33.28	-	-	Peak
530.52	22.64	-23.36	46	35.55	18.05	2.09	33.05	-	-	Peak
713.85	21.28	-24.72	46	32.29	19.44	2.41	32.86	-	-	Peak
2412	107.25	-	-	104.02	32.89	3.61	33.27	108	65	Peak
2412	95.86	-	-	92.63	32.89	3.61	33.27	108	65	Average
4824	46.53	-27.47	74	39.91	35.17	5.25	33.8	100	184	Peak

Test Mode :	802.11g	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.77	-	-	105.47	32.95	3.63	33.28	100	360	Peak
2437	97.63	-	-	94.33	32.95	3.63	33.28	100	360	Average
4874	46.75	-27.25	74	40.09	35.18	5.28	33.8	100	154	Peak
7312	47.87	-26.13	74	39.19	36.2	6.61	34.13	100	154	Peak

Test Mode :	802.11g	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	106.15	-	-	102.85	32.95	3.63	33.28	130	246	Peak
2437	95.47	-	-	92.17	32.95	3.63	33.28	130	246	Average
4874	45.9	-28.1	74	39.24	35.18	5.28	33.8	100	182	Peak
7312	47.65	-26.35	74	38.97	36.2	6.61	34.13	100	256	Peak

Test Mode :	802.11g	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	109.46	-	-	106.13	32.98	3.64	33.29	100	360	Peak
2462	98.15	-	-	94.82	32.98	3.64	33.29	100	360	Average
4924	46.29	-27.71	74	39.59	35.19	5.31	33.8	100	200	Peak
7386	48.45	-25.55	74	39.67	36.24	6.7	34.16	162	52	Peak

Test Mode :	802.11g	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	108.95	-	-	105.62	32.98	3.64	33.29	103	77	Peak
2462	98.07	-	-	94.74	32.98	3.64	33.29	103	77	Average
4924	46.44	-27.56	74	39.74	35.19	5.31	33.8	100	155	Peak
7386	47.49	-26.51	74	38.71	36.24	6.7	34.16	154	100	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	106.09	-	-	102.86	32.89	3.61	33.27	100	238	Peak
2412	94.88	-	-	91.65	32.89	3.61	33.27	100	238	Average
4824	45.9	-28.1	74	39.28	35.17	5.25	33.8	100	120	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	101.84	-	-	98.61	32.89	3.61	33.27	100	327	Peak
2412	90.56	-	-	87.33	32.89	3.61	33.27	100	327	Average
4824	46.3	-27.7	74	39.68	35.17	5.25	33.8	100	155	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.83	-	-	105.53	32.95	3.63	33.28	100	228	Peak
2437	96.86	-	-	93.56	32.95	3.63	33.28	100	228	Average
4874	45.59	-28.41	74	38.93	35.18	5.28	33.8	100	85	Peak
7312	48.88	-25.12	74	40.2	36.2	6.61	34.13	100	360	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	106.84	-	-	103.54	32.95	3.63	33.28	156	110	Peak
2437	96.32	-	-	93.02	32.95	3.63	33.28	156	110	Average
4874	45.62	-28.38	74	38.96	35.18	5.28	33.8	100	233	Peak
7312	47.25	-26.75	74	38.57	36.2	6.61	34.13	178	45	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	110.85	-	-	107.52	32.98	3.64	33.29	100	194	Peak
2462	99.77	-	-	96.44	32.98	3.64	33.29	100	194	Average
4924	48.93	-25.07	74	42.23	35.19	5.31	33.8	100	262	Peak
7386	48.51	-25.49	74	39.73	36.24	6.7	34.16	189	47	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	109.56	-	-	106.23	32.98	3.64	33.29	100	101	Peak
2462	97.74	-	-	94.41	32.98	3.64	33.29	100	101	Average
4924	48.39	-25.61	74	41.69	35.19	5.31	33.8	100	151	Peak
7386	49.1	-24.9	74	40.32	36.24	6.7	34.16	189	45	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	22~23°C
Test Channel :	03	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	99.33	-	-	96.07	32.92	3.62	33.28	100	188	Peak
2422	88.75	-	-	85.49	32.92	3.62	33.28	100	188	Average
4844	46.43	-27.57	74	39.79	35.18	5.26	33.8	100	157	Peak
7266	47.72	-26.28	74	39.08	36.19	6.56	34.11	100	120	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	22~23°C
Test Channel :	03	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	97.51	-	-	94.25	32.92	3.62	33.28	162	106	Peak
2422	86.47	-	-	83.21	32.92	3.62	33.28	162	106	Average
4844	45.78	-28.22	74	39.14	35.18	5.26	33.8	178	100	Peak
7266	47.27	-26.73	74	38.63	36.19	6.56	34.11	100	103	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	102.61	-	-	99.31	32.95	3.63	33.28	100	171	Peak
2437	92.15	-	-	88.85	32.95	3.63	33.28	100	171	Average
4874	45.37	-28.63	74	38.71	35.18	5.28	33.8	100	154	Peak
7312	47.05	-26.95	74	38.37	36.2	6.61	34.13	100	178	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	102.14	-	-	98.84	32.95	3.63	33.28	156	65	Peak
2437	92.17	-	-	88.87	32.95	3.63	33.28	156	65	Average
4874	45.86	-28.14	74	39.2	35.18	5.28	33.8	100	123	Peak
7312	47.86	-26.14	74	39.18	36.2	6.61	34.13	102	65	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	22~23°C
Test Channel :	09	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	106.54	-	-	103.24	32.95	3.63	33.28	100	0	Peak
2452	95.44	-	-	92.14	32.95	3.63	33.28	100	0	Average
4904	45.84	-28.16	74	39.15	35.19	5.3	33.8	145	200	Peak
7356	46.51	-27.49	74	37.78	36.22	6.66	34.15	100	249	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	22~23°C
Test Channel :	09	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	102.33	-	-	99.03	32.95	3.63	33.28	132	112	Peak
2452	92.32	-	-	89.02	32.95	3.63	33.28	132	112	Average
4904	45.46	-28.54	74	38.77	35.19	5.3	33.8	100	187	Peak
7356	48.2	-25.8	74	39.47	36.22	6.66	34.15	145	78	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.6.4 Test Setup

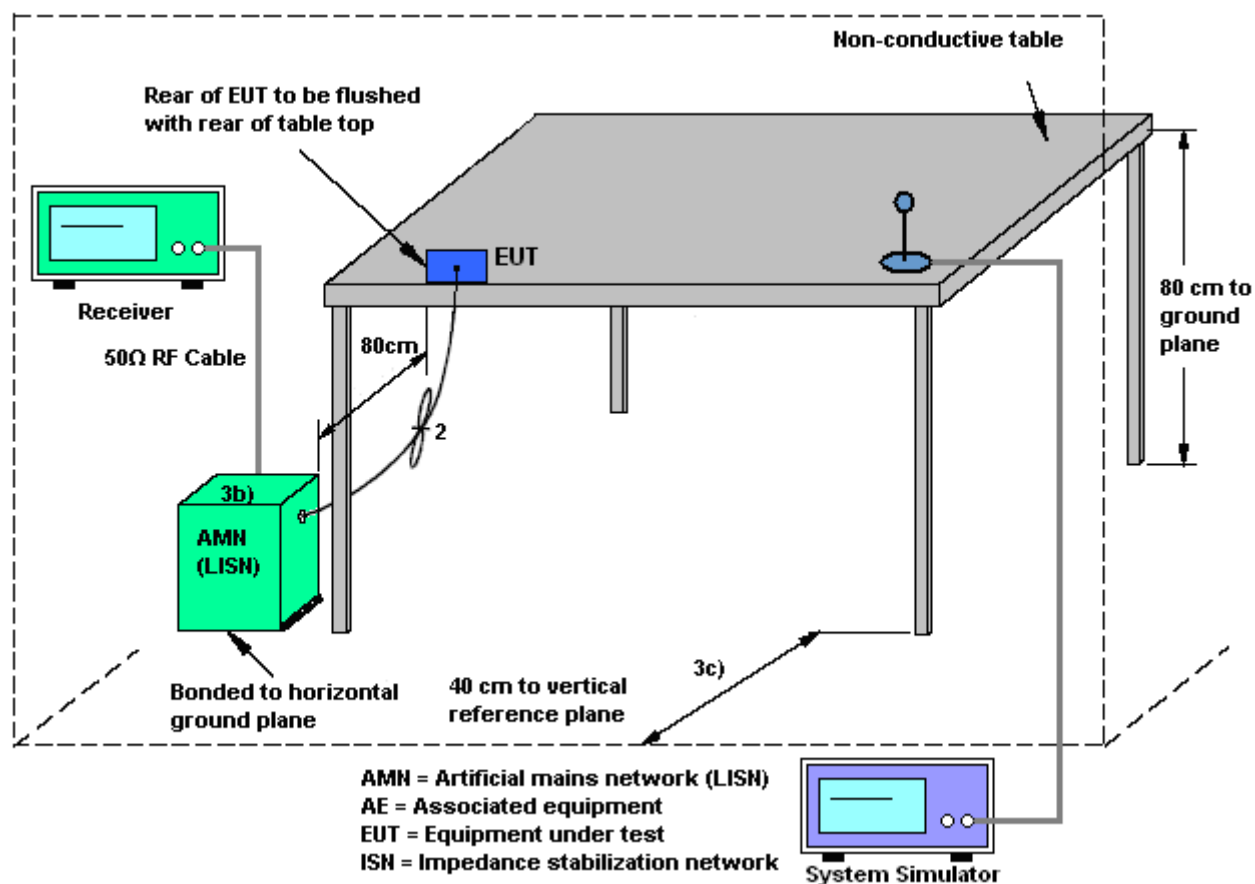

3.6.5 Test Result of AC Conducted Emission

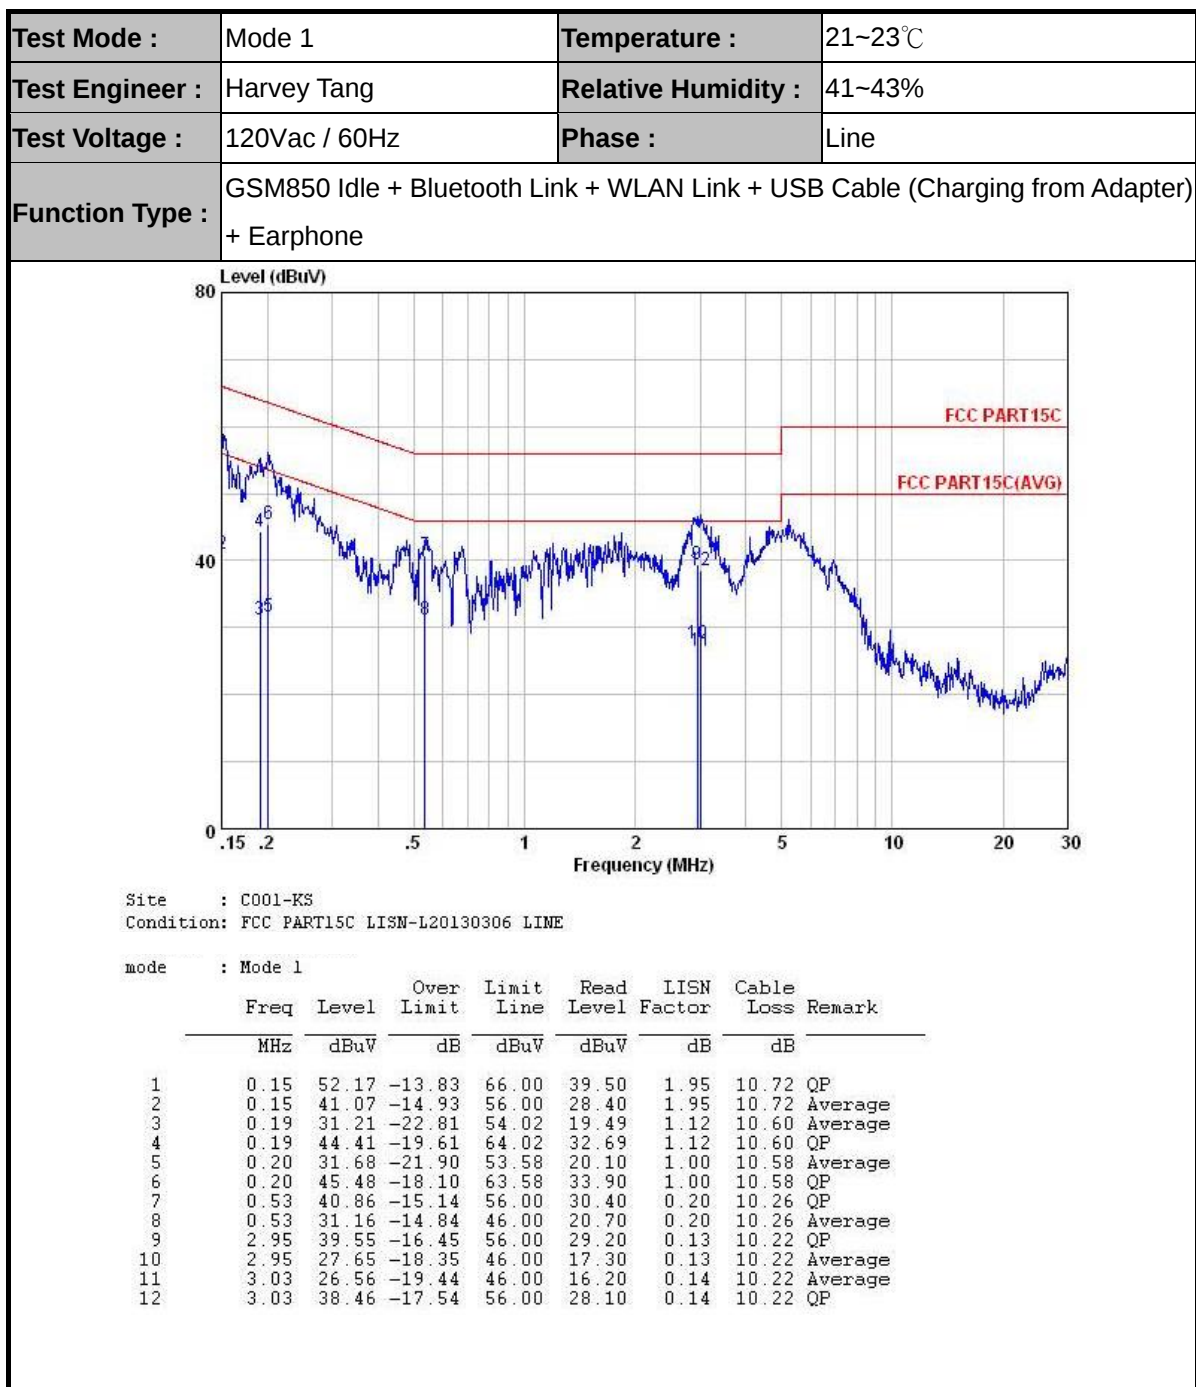

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Harvey Tang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

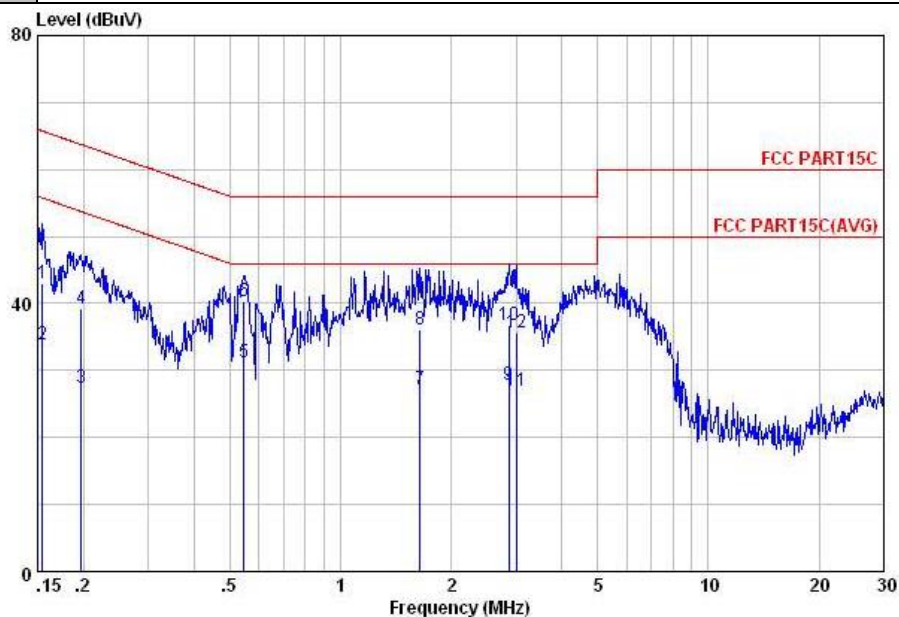

Site : C001-KS
Condition: FCC PART15C LISN-N20130306 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	43.02	-22.72	65.74	30.50	1.83	10.69	QP
2	0.15	33.92	-21.82	55.74	21.40	1.83	10.69	Average
3	0.20	27.39	-26.32	53.71	15.79	1.02	10.58	Average
4	0.20	39.21	-24.50	63.71	27.61	1.02	10.58	QP
5	0.55	31.23	-14.77	46.00	20.70	0.28	10.25	Average
6	0.55	40.23	-15.77	56.00	29.70	0.28	10.25	QP
7	1.64	27.09	-18.91	46.00	16.80	0.10	10.19	Average
8	1.64	36.19	-19.81	56.00	25.90	0.10	10.19	QP
9	2.87	27.95	-18.05	46.00	17.60	0.13	10.22	Average
10	2.87	36.85	-19.15	56.00	26.50	0.13	10.22	QP
11	3.01	26.86	-19.14	46.00	16.50	0.14	10.22	Average
12	3.01	35.56	-20.44	56.00	25.20	0.14	10.22	QP

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	Jan. 22, 2014~ Jan. 27, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	Jan. 22, 2014~ Jan. 27, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	Jan. 22, 2014~ Jan. 27, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Jan. 28, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 23, 2013	Jan. 28, 2014	May 22, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 06, 2013	Jan. 28, 2014	Dec. 05, 2014	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Jan. 28, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	75959	1GHz~18GHz	Dec. 07, 2013	Jan. 28, 2014	Dec. 06, 2014	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	May 23, 2013	Jan. 28, 2014	May 22, 2014	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Dec. 29, 2013	Jan. 28, 2014	Dec. 28, 2014	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Jan. 28, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Nov. 23, 2013	Jan. 28, 2014	Nov. 22, 2014	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0 ~ 360 degree	N/A	Jan. 28, 2014	N/A	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m - 4 m	N/A	Jan. 28, 2014	N/A	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	May 23, 2013	Jan. 20, 2014	May 22, 2014	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Jan. 20, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Jan. 20, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	May 25, 2013	Jan. 20, 2014	May 24, 2014	Conduction (CO01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54
--	------