

FCC RF Test Report

APPLICANT : CT Asia
EQUIPMENT : Smartphone
BRAND NAME : BLU
MODEL NAME : STUDIO C SUPER CAMERA
FCC ID : YHLBLUSTUDIOCAM
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Mar. 24, 2015 and testing was completed on Apr. 21, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency Channel	9
2.2 Pre-Scanned RF Power.....	10
2.3 Test Mode.....	11
2.4 Connection Diagram of Test System.....	12
2.5 Support Unit used in test configuration and system	13
2.6 EUT Operation Test Setup	13
2.7 Measurement Results Explanation Example.....	13
3 TEST RESULT	14
3.1 6dB and 99% Bandwidth Measurement	14
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	32
3.6 AC Conducted Emission Measurement.....	36
3.7 Antenna Requirements.....	40
4 LIST OF MEASURING EQUIPMENT	41
5 UNCERTAINTY OF EVALUATION	42
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR532407C	Rev. 01	Initial issue of report	May 14, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-210 A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.45 dB at 2484.440 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 15.08 dB at 0.540 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

CT Asia

Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

1.2 Manufacturer

Tinno Mobile Technology Corp.

4/F, H-3 Building, OCT Eastern industrial Park, No.1 XiangShan East Road, Nan Shan District, Shenzhen, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	BLU
Model Name	STUDIO C SUPER CAMERA
FCC ID	YHLBLUSTUDIOCAM
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 353919026699425/353924026699425 Radiation: 353919026699144/353919026699144 Conduction: 353919026699144/353924036699144
HW Version	V1.0
SW Version	S5400AP_PR2_5.0_00_08
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 19.21 dBm (0.0834 W) 802.11g : 23.42 dBm (0.2198 W) 802.11n HT20 : 23.12 dBm (0.2051 W) 802.11n HT40 : 22.89 dBm (0.1945 W)
99% Occupied Bandwidth	802.11b : 12.50MHz 802.11g : 17.65MHz 802.11n HT20 : 18.30MHz 802.11n HT40 : 36.30MHz
Antenna Type / Gain	802.11b/g/n : PIFA Antenna with gain 0.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH05-HY	TW1022/4086B

Note: The test site complies with ANSI C63.4 2009 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.10-2013
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	18.82	CH 11	19.08	19.03	19.09
CH 06	2437 MHz	19.03				
CH 11	2462 MHz	19.21				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	22.88	CH 06	23.35	23.34	23.27	23.36	23.31	23.32	23.31
CH 06	2437 MHz	23.42								
CH 11	2462 MHz	23.29								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	22.72	CH 11	23.01	22.98	23.03	23.05	22.85	22.95	22.85
CH 06	2437 MHz	22.98								
CH 11	2462 MHz	23.12								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	22.68	CH 06	22.61	22.57	22.53	22.56	22.47	22.43	22.41
CH 06	2437 MHz	22.89								
CH 09	2452 MHz	22.51								

2.3 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)
Remark: For radiated test cases, the tests were performed with adapter, earphone and USB cable.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

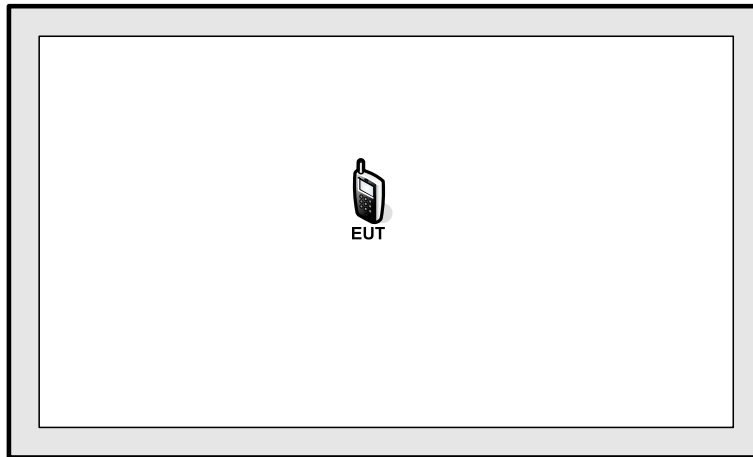

<AC Conducted Emission Mode>

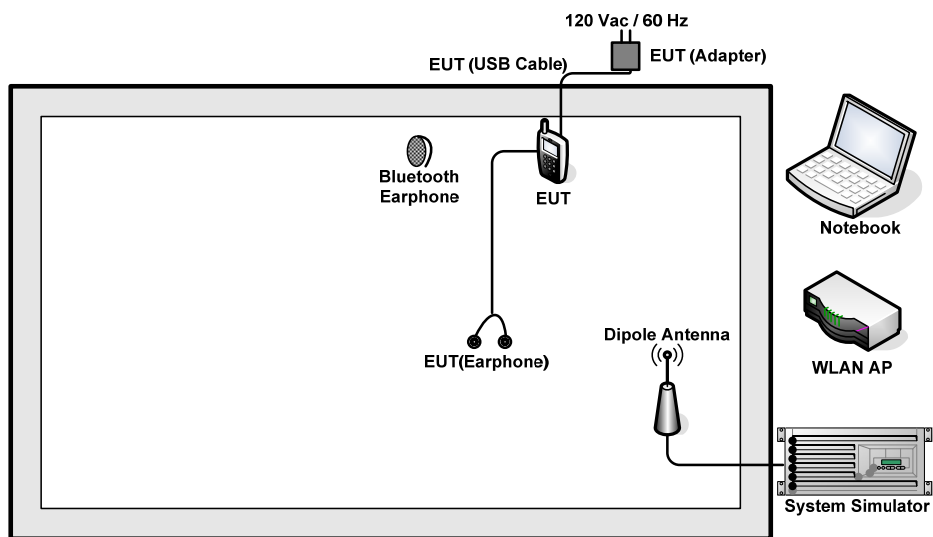

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-815	KA2IR815A1	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 5.0 + 10 = 15.0 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

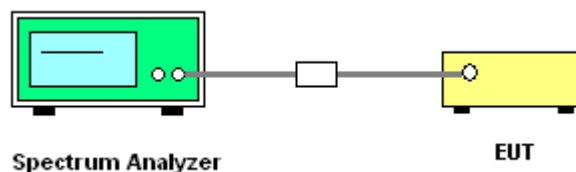



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

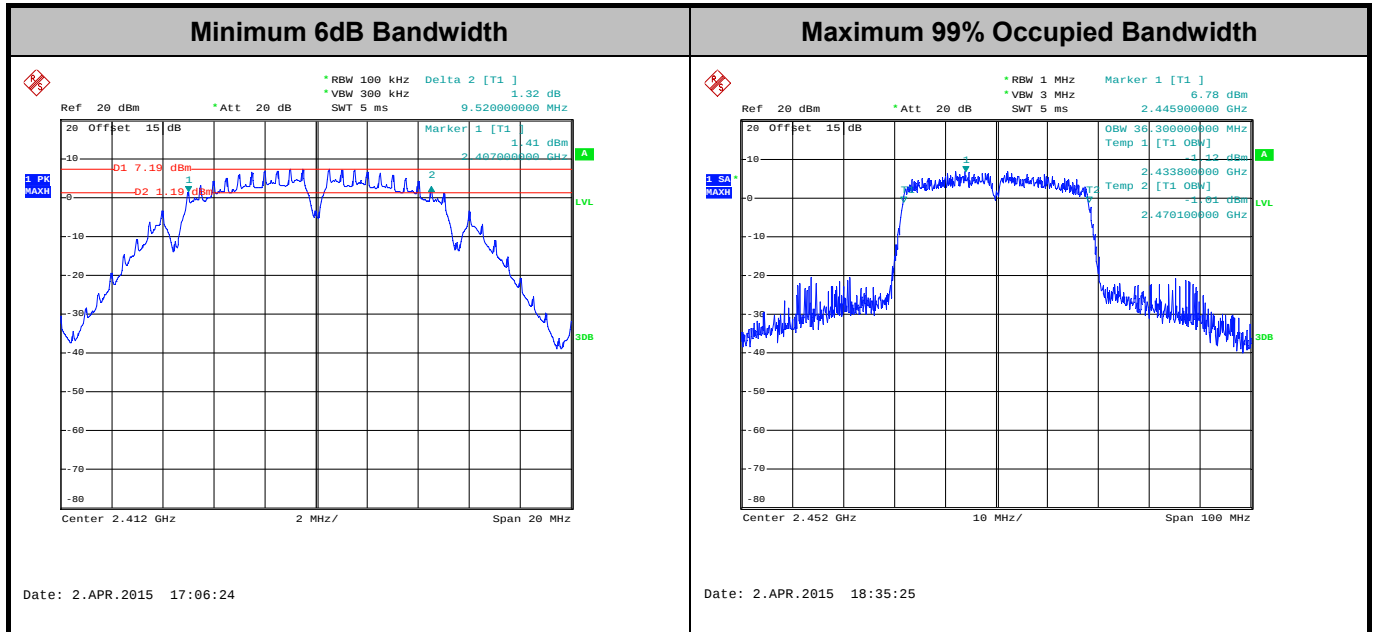

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

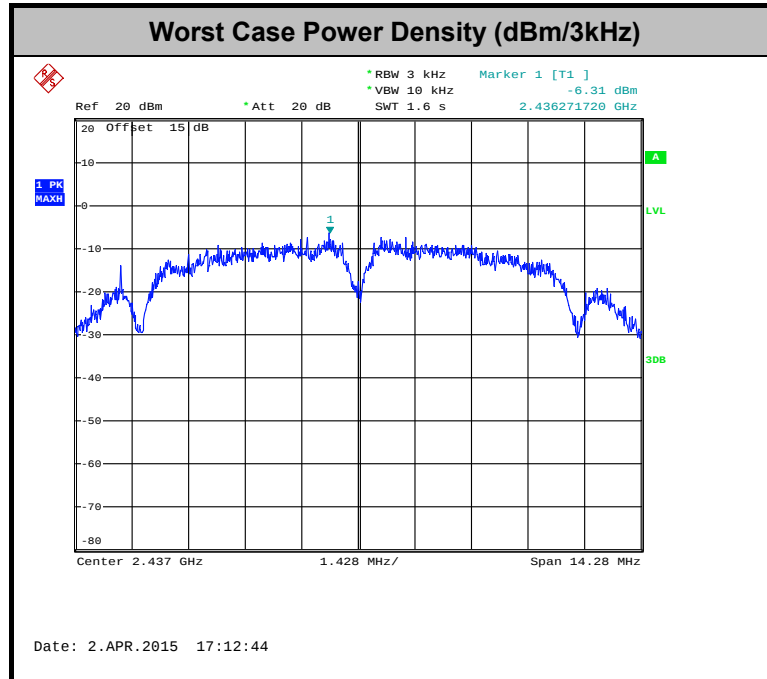

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

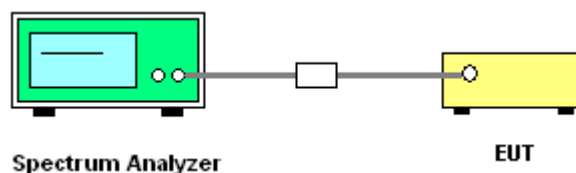




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Tiny You


WLAN 802.11b Channel 01

100kHz PSD reference Level

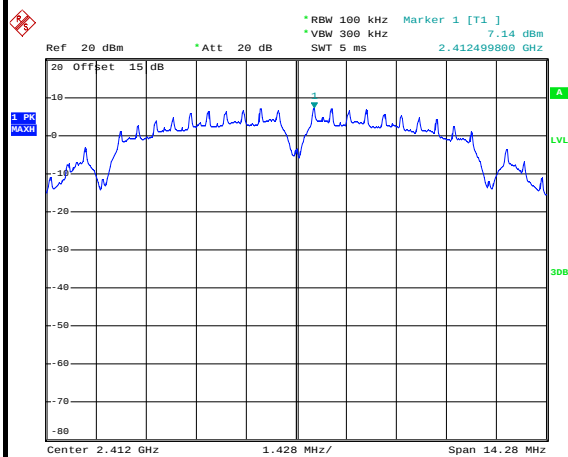


Date: 2.APR.2015 17:07:28

Low Channel Plot

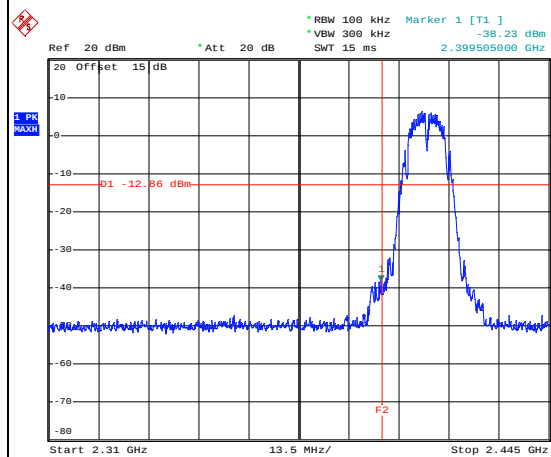


Date: 2.APR.2015 17:07:55

Spurious Emission 30MHz~3GHz

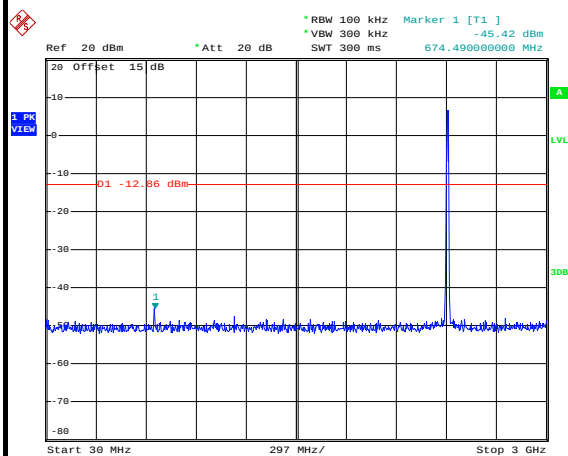

Date: 2.APR.2015 17:08:29

Spurious Emission 2GHz~25GHz

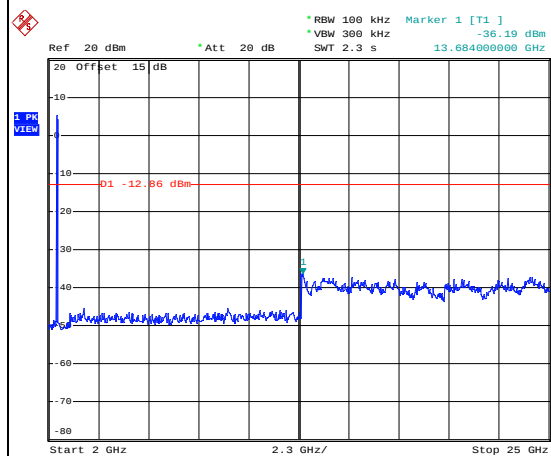


Date: 2.APR.2015 17:08:47



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You


WLAN 802.11b Channel 06

100kHz PSD reference Level

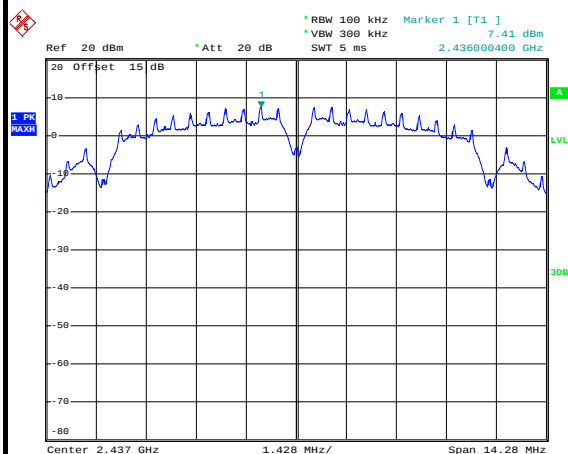


Date: 2.APR.2015 17:15:00

Spurious Emission 30MHz~3GHz

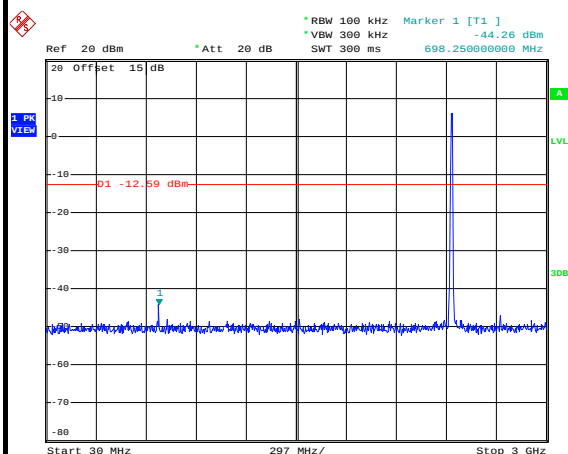

Date: 2.APR.2015 17:16:07

Spurious Emission 2GHz~25GHz

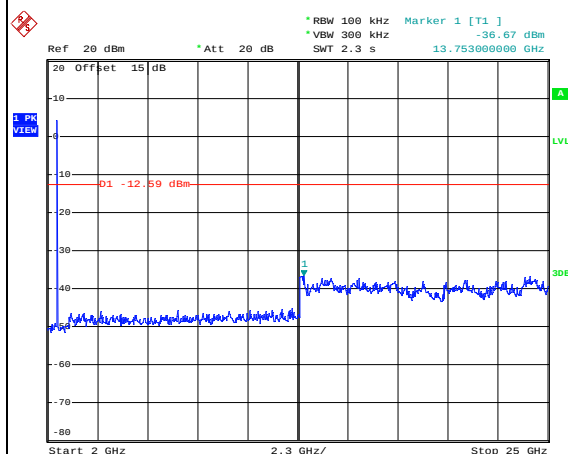


Date: 2.APR.2015 17:16:25



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Tiny You


WLAN 802.11b Channel 11

100kHz PSD reference Level

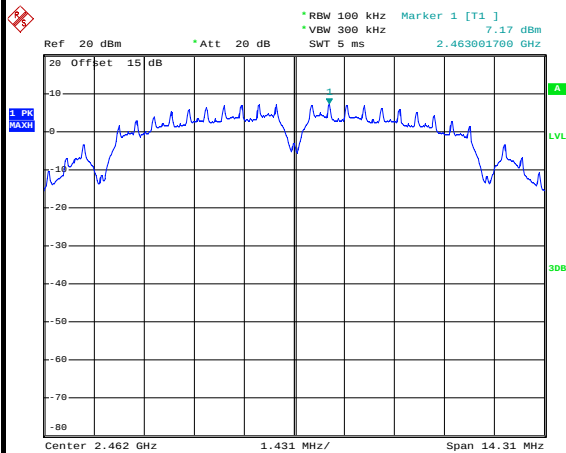


Date: 2.APR.2015 17:21:36

High Channel Plot

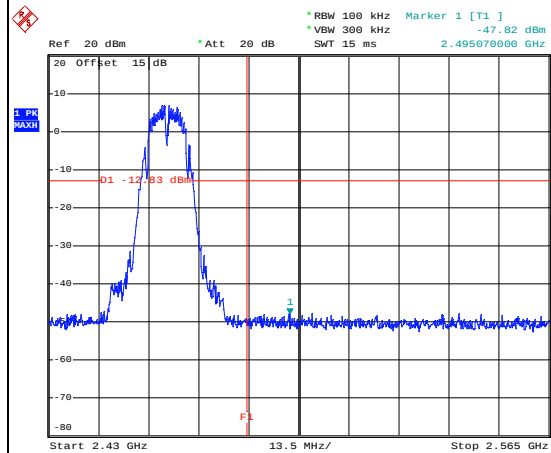


Date: 2.APR.2015 17:22:11

Spurious Emission 30MHz~3GHz

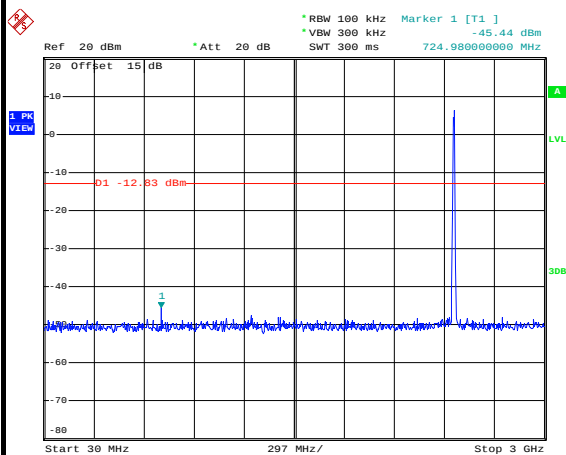

Date: 2.APR.2015 17:23:56

Spurious Emission 2GHz~25GHz

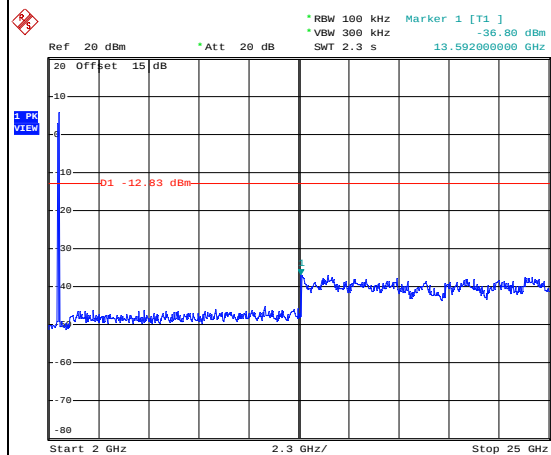


Date: 2.APR.2015 17:24:14



Test Mode :	802.11g	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Tiny You


WLAN 802.11g Channel 01

100kHz PSD reference Level

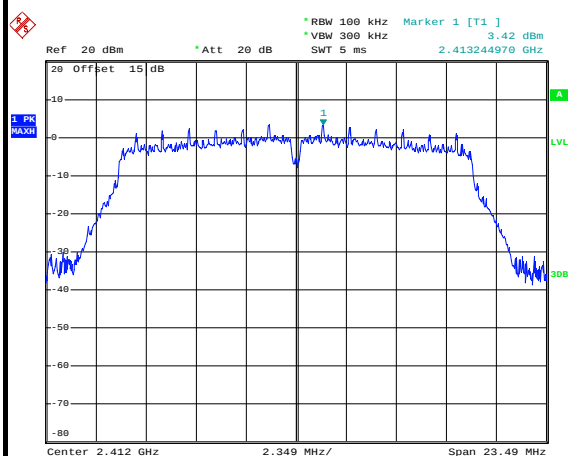


Date: 2.APR.2015 17:30:40

Low Channel Plot

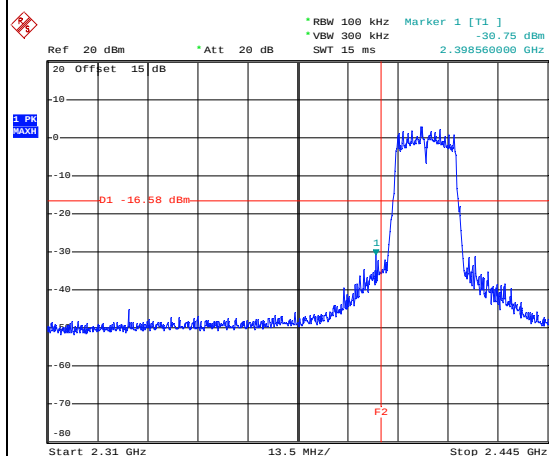


Date: 2.APR.2015 17:31:26

Spurious Emission 30MHz~3GHz

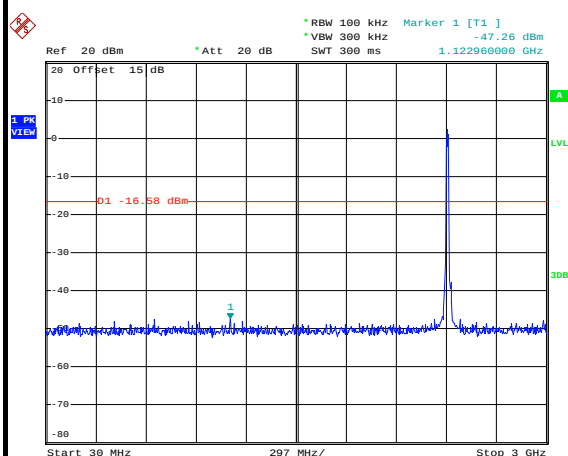

Date: 2.APR.2015 17:31:49

Spurious Emission 2GHz~25GHz

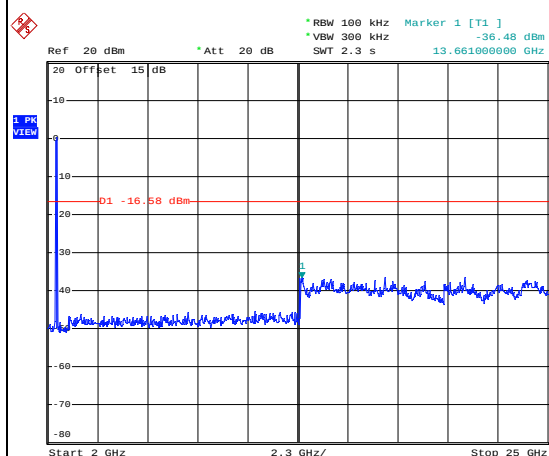


Date: 2.APR.2015 17:32:06



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You


WLAN 802.11g Channel 06

100kHz PSD reference Level

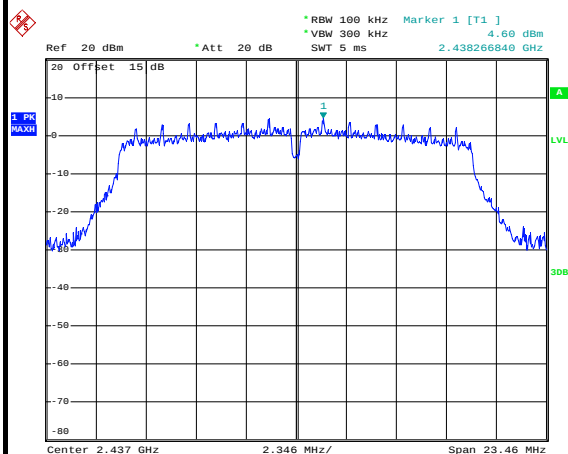


Date: 2.APR.2015 17:40:15

Spurious Emission 30MHz~3GHz

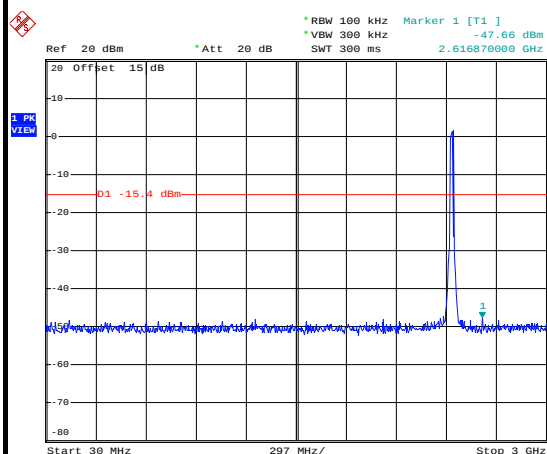

Date: 2.APR.2015 17:41:32

Spurious Emission 2GHz~25GHz

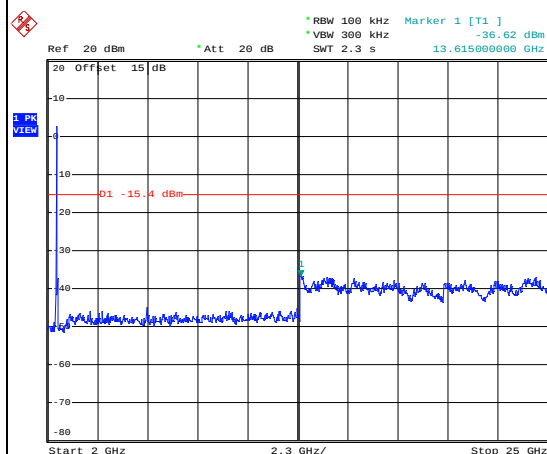


Date: 2.APR.2015 17:41:50



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Tiny You


WLAN 802.11g Channel 11

100kHz PSD reference Level

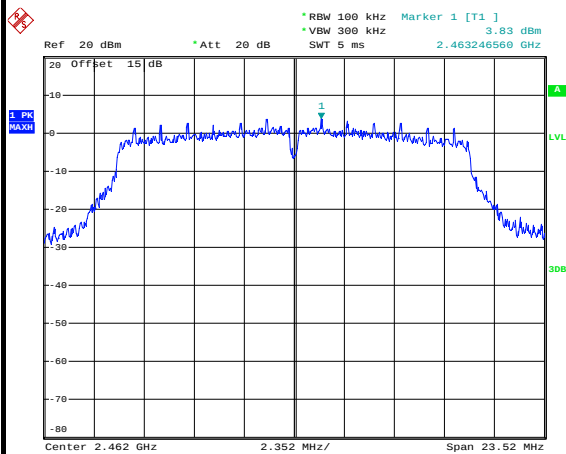


Date: 2.APR.2015 17:45:53

High Channel Plot

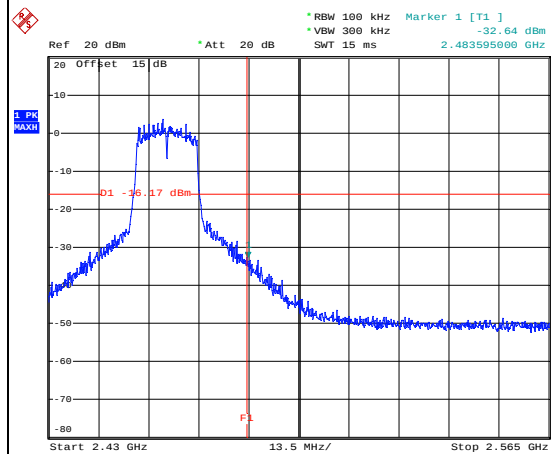


Date: 2.APR.2015 17:46:14

Spurious Emission 30MHz~3GHz

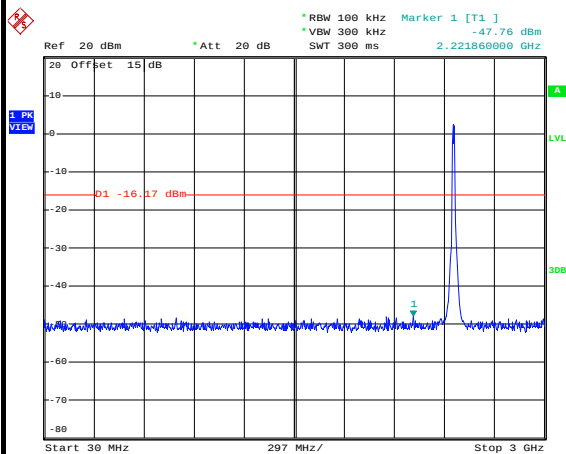

Date: 2.APR.2015 17:46:43

Spurious Emission 2GHz~25GHz

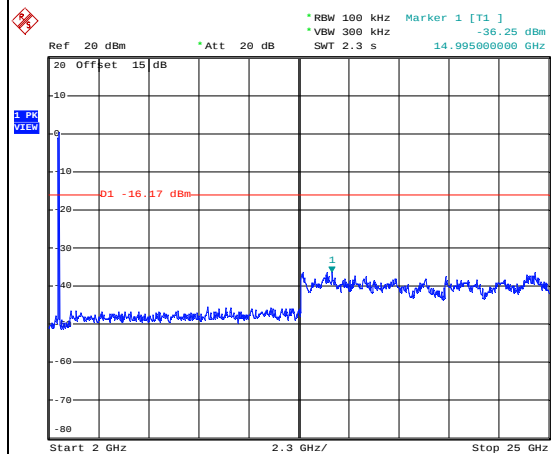


Date: 2.APR.2015 17:47:00



Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Tiny You


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

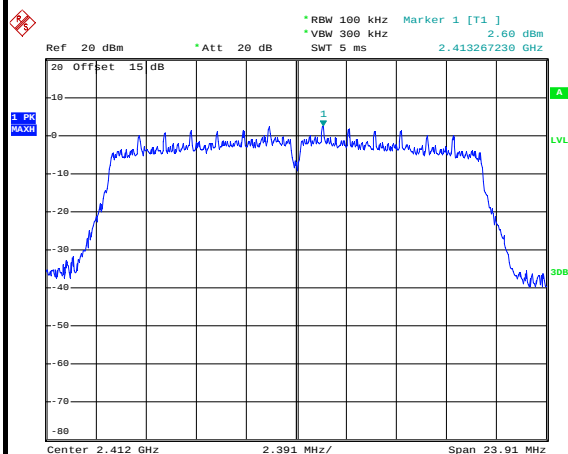


Date: 2.APR.2015 17:53:30

Low Channel Plot

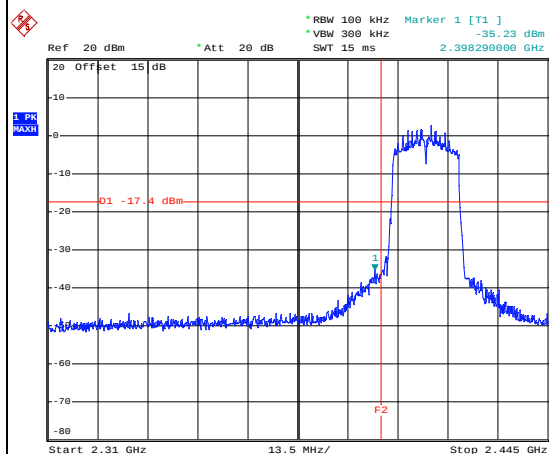


Date: 2.APR.2015 17:53:49

Spurious Emission 30MHz~3GHz

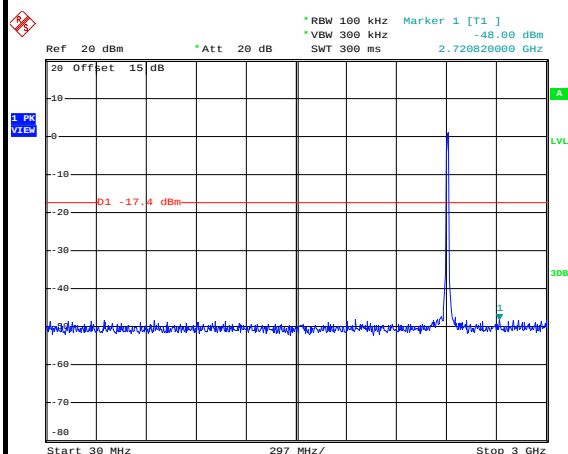

Date: 2.APR.2015 17:54:14

Spurious Emission 2GHz~25GHz

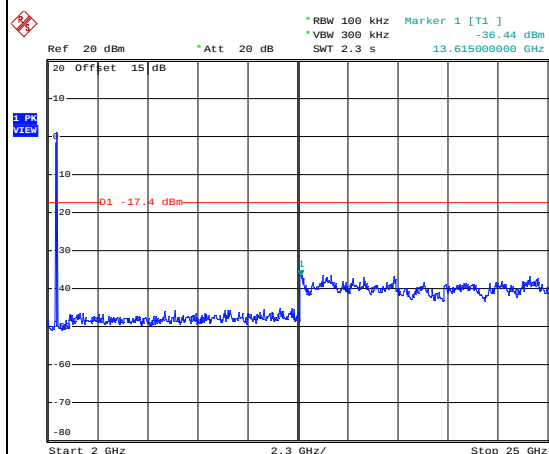


Date: 2.APR.2015 17:54:32



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

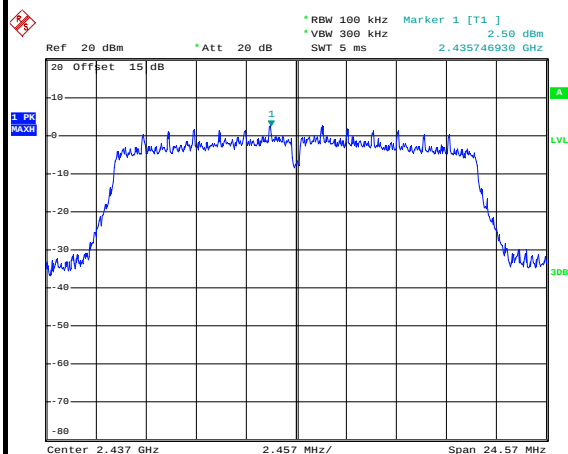


Date: 2.APR.2015 17:58:58

Spurious Emission 30MHz~3GHz

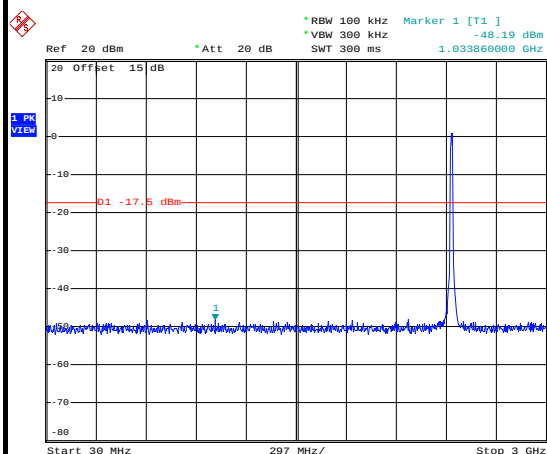

Date: 2.APR.2015 17:59:38

Spurious Emission 2GHz~25GHz

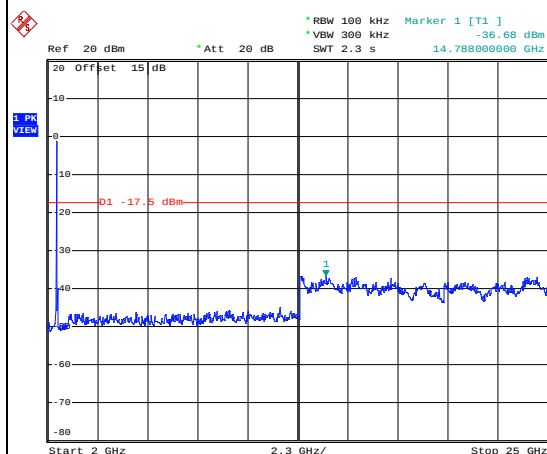


Date: 2.APR.2015 17:59:55



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Tiny You


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

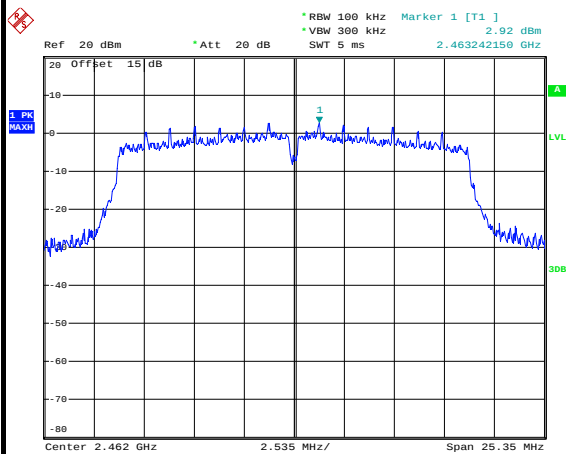


Date: 2.APR.2015 18:07:02

High Channel Plot

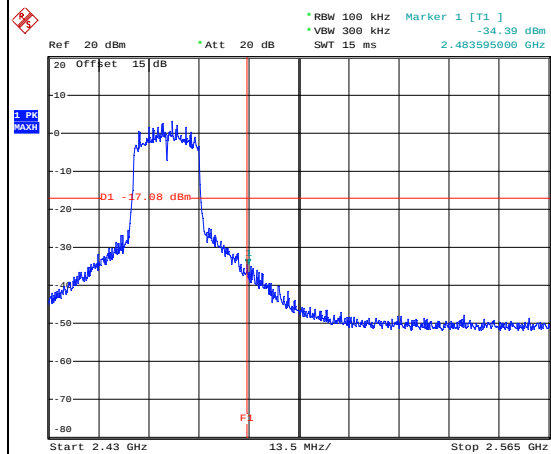


Date: 2.APR.2015 18:08:01

Spurious Emission 30MHz~3GHz

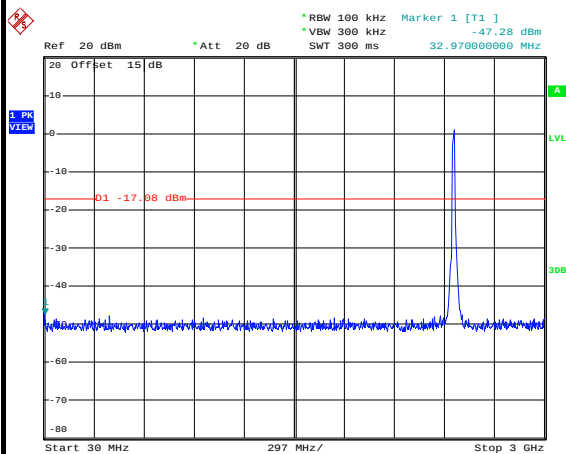

Date: 2.APR.2015 18:08:46

Spurious Emission 2GHz~25GHz

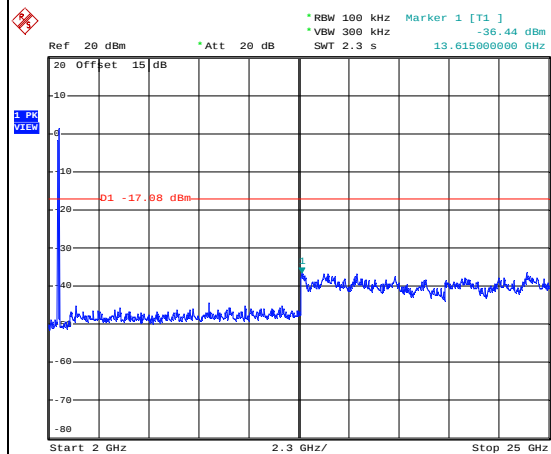


Date: 2.APR.2015 18:09:03



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	03	Test Engineer :	Tiny You


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

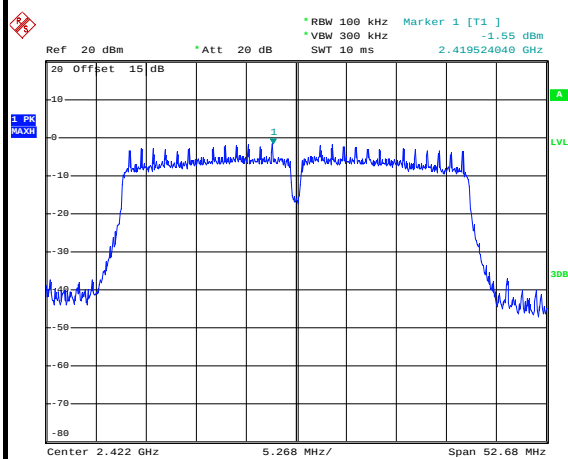


Date: 2.APR.2015 18:16:01

Low Channel Plot

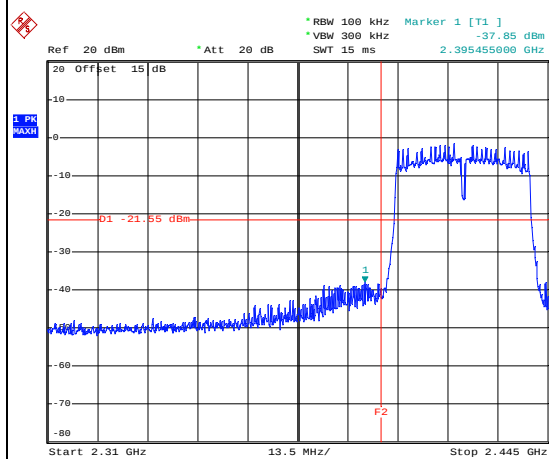


Date: 2.APR.2015 18:16:45

Spurious Emission 30MHz~3GHz

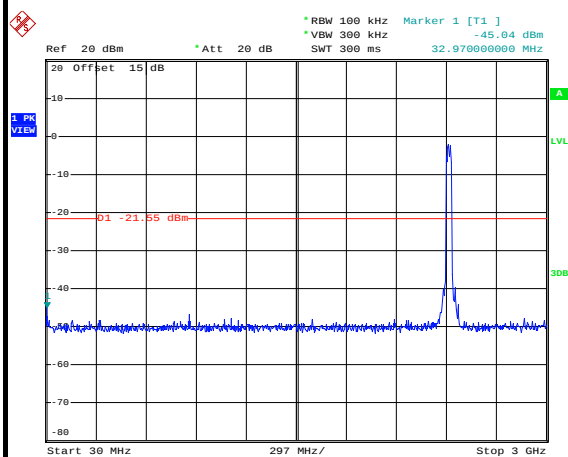

Date: 2.APR.2015 18:19:57

Spurious Emission 2GHz~25GHz

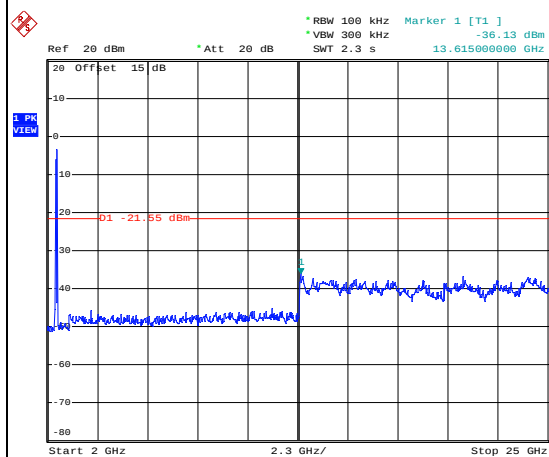


Date: 2.APR.2015 18:17:26



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Tiny You


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

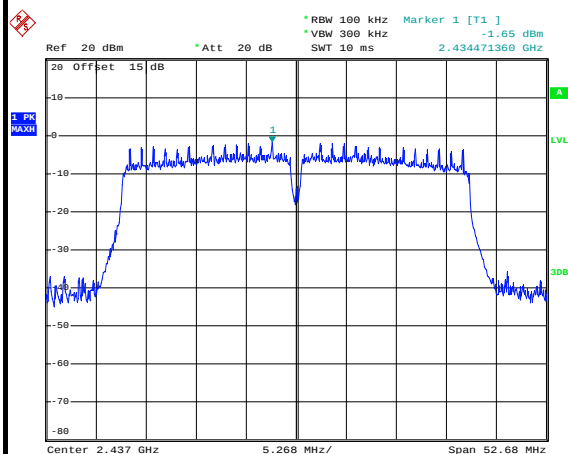


Date: 2.APR.2015 18:24:57

Spurious Emission 30MHz~3GHz

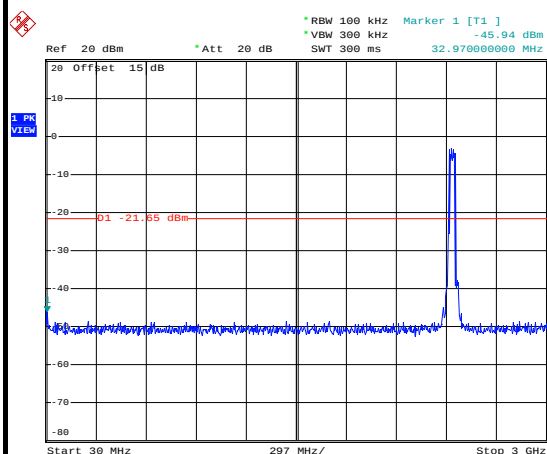

Date: 2.APR.2015 18:27:04

Spurious Emission 2GHz~25GHz

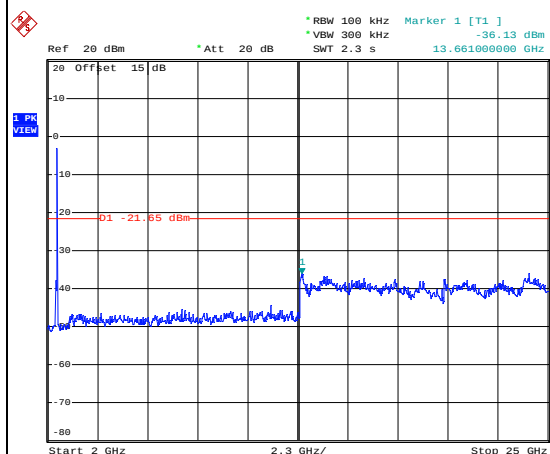


Date: 2.APR.2015 18:26:23



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	09	Test Engineer :	Tiny You


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

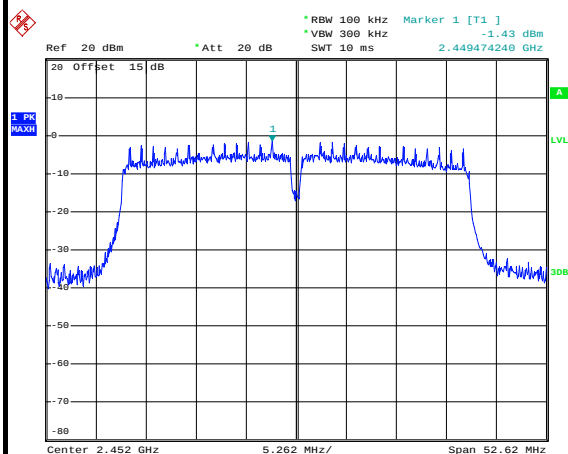


Date: 2.APR.2015 18:32:19

High Channel Plot

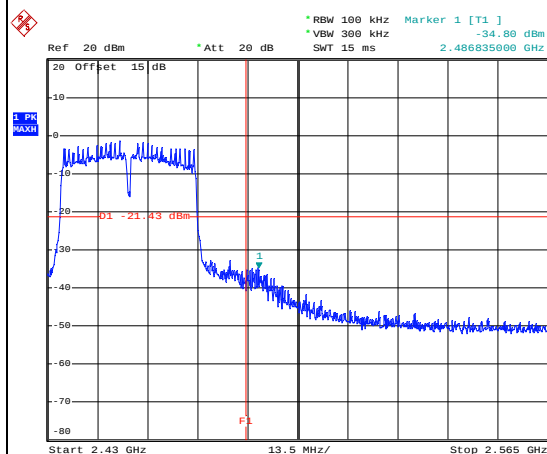


Date: 2.APR.2015 18:32:41

Spurious Emission 30MHz~3GHz

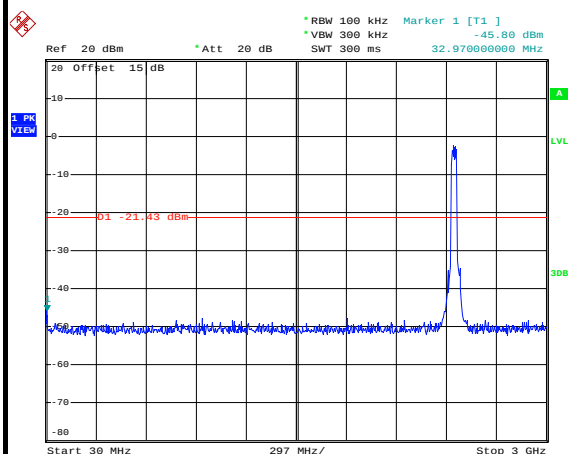

Date: 2.APR.2015 18:35:10

Spurious Emission 2GHz~25GHz

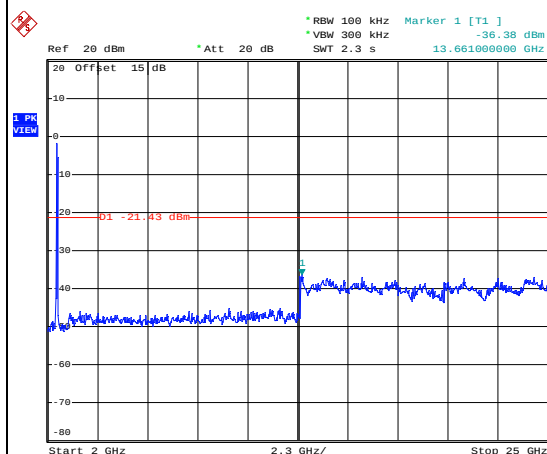

Date: 2.APR.2015 18:33:29

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.77	8.40	0.12	300Hz
802.11g	88.87	1.39	0.72	1kHz
2.4GHz 802.11n HT20	88.41	1.30	0.77	1kHz
2.4GHz 802.11n HT40	79.15	0.65	1.54	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

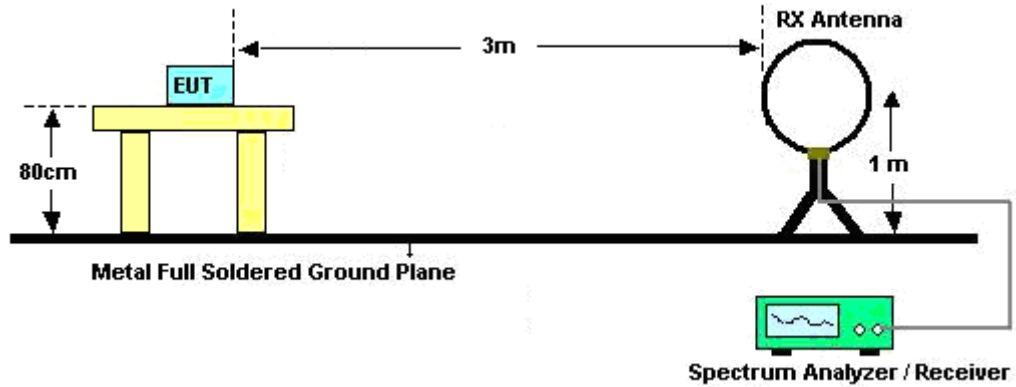

For radiated emissions from 30MHz to 1GHz

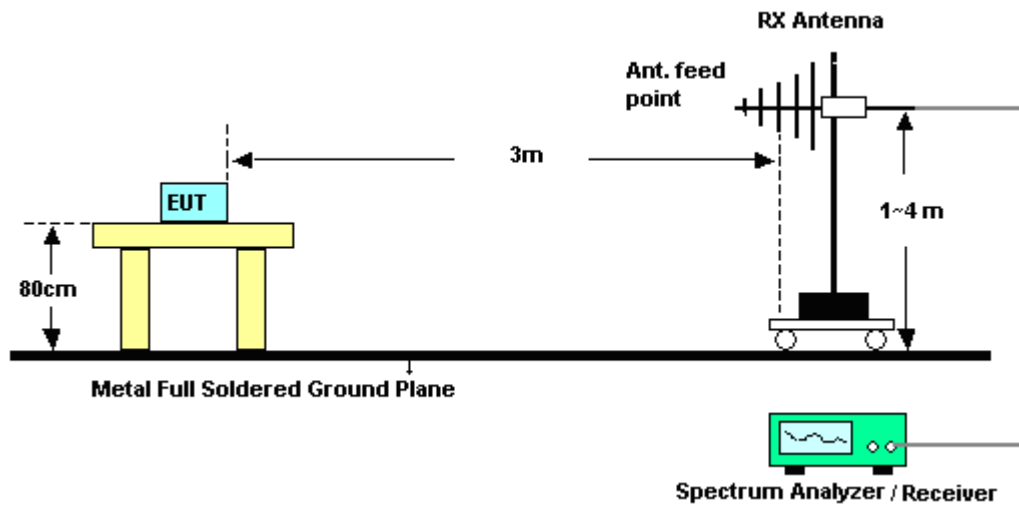

For radiated emissions above 1GHz

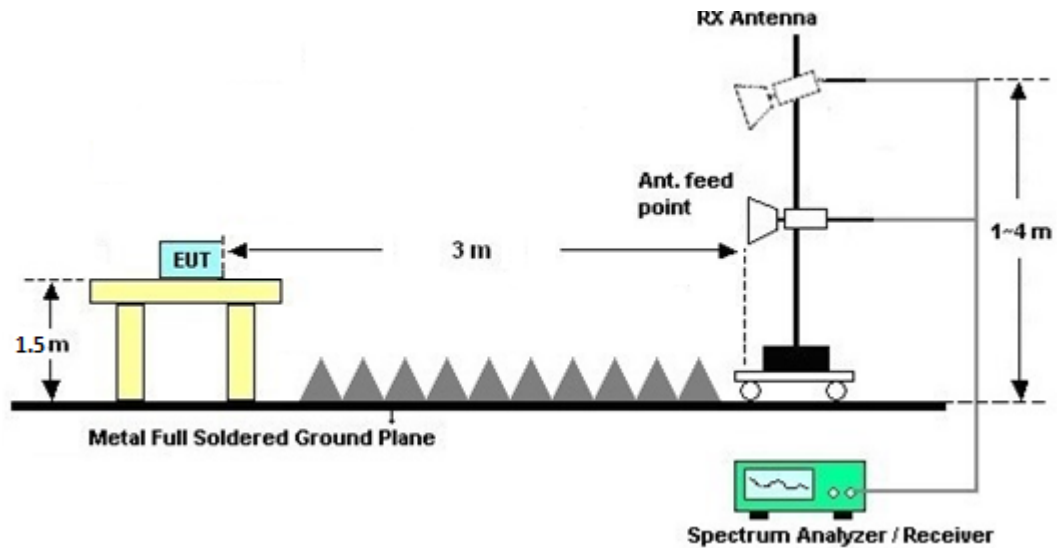

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

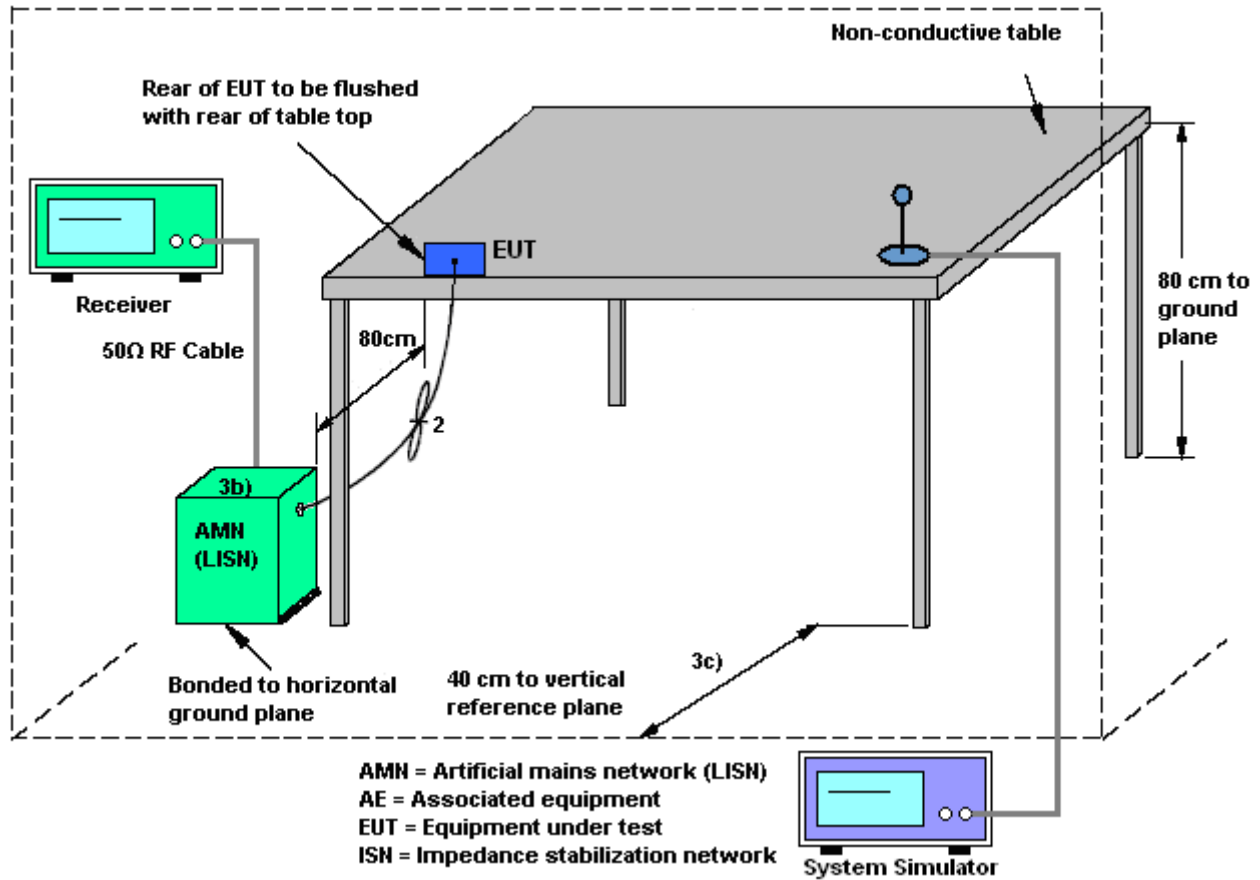



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Jack Tian	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

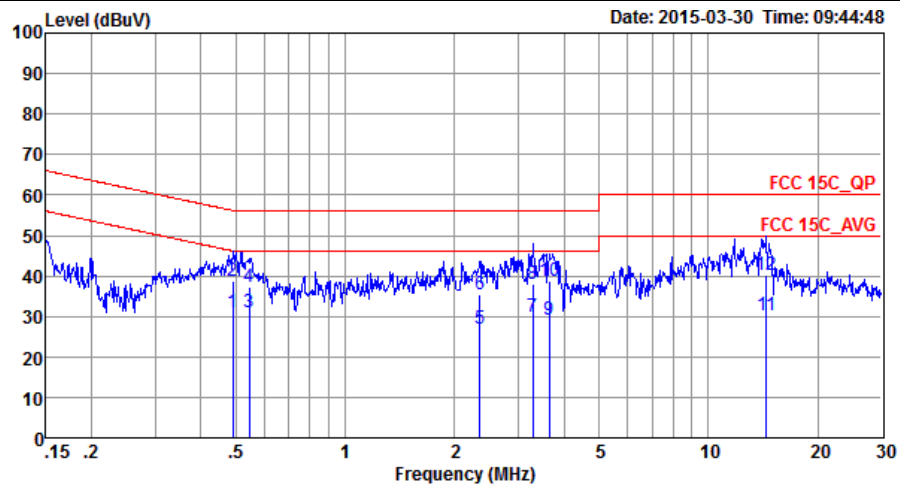


Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_20140304 LINE

Mode : Mode 1
IMEI : 353919026699144/353924026699144

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.49	30.96	-15.18	46.14	20.50	0.30	10.16	Average
2	0.49	38.76	-17.38	56.14	28.30	0.30	10.16	QP
3 *	0.54	30.92	-15.08	46.00	20.50	0.27	10.15	Average
4	0.54	37.32	-18.68	56.00	26.90	0.27	10.15	QP
5	2.35	26.75	-19.25	46.00	16.29	0.26	10.20	Average
6	2.35	35.45	-20.55	56.00	24.99	0.26	10.20	QP
7	3.29	29.95	-16.05	46.00	19.40	0.33	10.22	Average
8	3.29	38.05	-17.95	56.00	27.50	0.33	10.22	QP
9	3.64	29.07	-16.93	46.00	18.50	0.35	10.22	Average
10	3.64	38.57	-17.43	56.00	28.00	0.35	10.22	QP
11	14.44	30.38	-19.62	50.00	18.50	1.37	10.51	Average
12	14.44	40.28	-19.72	60.00	28.40	1.37	10.51	QP



Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Jack Tian	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

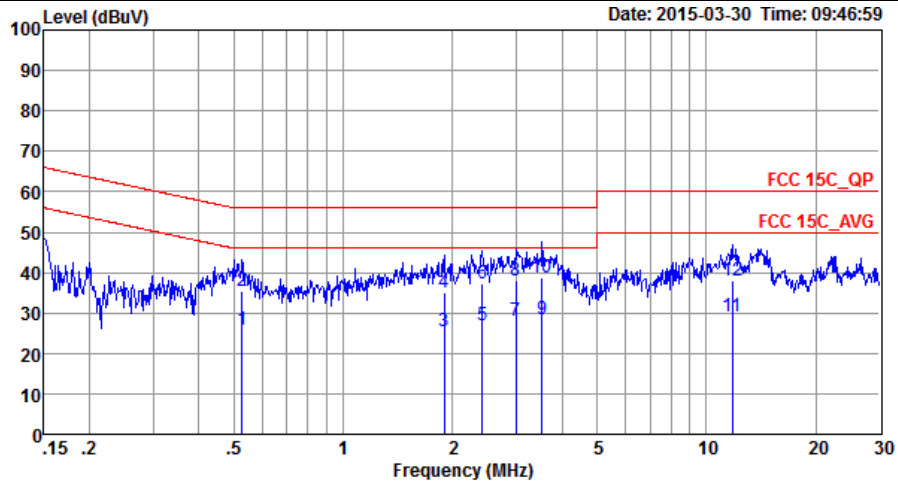

Site : C001-SZ
Condition: FCC 15C_QP LISN_N_20140304 NEUTRAL

Mode : Mode 1
IMEI : 353919026699144/353924026699144

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.53	25.74	-20.26	46.00	15.21	0.38	10.15	Average
2	0.53	35.54	-20.46	56.00	25.01	0.38	10.15	QP
3	1.90	25.35	-20.65	46.00	14.79	0.37	10.19	Average
4	1.90	35.15	-20.85	56.00	24.59	0.37	10.19	QP
5	2.42	26.99	-19.01	46.00	16.39	0.40	10.20	Average
6	2.42	37.19	-18.81	56.00	26.59	0.40	10.20	QP
7	2.99	28.13	-17.87	46.00	17.50	0.42	10.21	Average
8	2.99	38.03	-17.97	56.00	27.40	0.42	10.21	QP
9	3.53	28.26	-17.74	46.00	17.60	0.44	10.22	Average
10 *	3.53	38.56	-17.44	56.00	27.90	0.44	10.22	QP
11	11.81	29.19	-20.81	50.00	17.70	1.08	10.41	Average
12	11.81	38.19	-21.81	60.00	26.70	1.08	10.41	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 28, 2015	Apr. 02, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power meter	Anritsu	ML2495A	1218010	10Hz~40GHz	Jan. 28, 2015	Apr. 02, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	0.3GHz~40GHz	Jan. 28, 2015	Apr. 02, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Aug. 30, 2014	Apr. 21, 2015	Aug. 29, 2015	Radiation (03CH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Apr. 21, 2015	Jun. 08, 2015	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~1GHz	Sep. 27, 2014	Apr. 21, 2015	Sep. 26, 2015	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Aug. 30, 2014	Apr. 21, 2015	Aug. 29, 2015	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 02, 2014	Apr. 21, 2015	Oct. 01, 2015	Radiation (03CH05-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	100kHz~18GHz	Jul. 07, 2014	Apr. 21, 2015	Jul. 06, 2015	Radiation (03CH05-HY)
Preamplifier	COM-POWER	PA-103	161075	9kHz~30MHz	Apr. 09, 2015	Apr. 21, 2015	Apr. 08, 2016	Radiation (03CH05-HY)
Preamplifier	Miteq	TTA0204	1872107	18GHz~40GHz	May 23, 2014	Apr. 21, 2015	May 22, 2015	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Apr. 21, 2015	Jul. 27, 2015	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Apr. 21, 2015	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Apr. 21, 2015	N/A	Radiation (03CH05-HY)
EMI TEST Receiver	R&S	ESCI7	100768	9kHz~3GHz	May 04, 2014	Mar. 30, 2015	May 03, 2015	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Feb. 02, 2015	Mar. 30, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Feb. 02, 2015	Mar. 30, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Sep. 29, 2014	Mar. 30, 2015	Sep. 28, 2015	Conduction (CO01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted test results

Report Number : FR532407C

Test Engineer:	Tiny You	Temperature:	24~26	°C
Test Date:	2015/4/2	Relative Humidity:	50~53	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.45	9.52	0.50	Pass
11b	1Mbps	1	6	2437	12.50	9.52	0.50	Pass
11b	1Mbps	1	11	2462	12.50	9.54	0.50	Pass
11g	6Mbps	1	1	2412	17.35	15.60	0.50	Pass
11g	6Mbps	1	6	2437	17.65	15.64	0.50	Pass
11g	6Mbps	1	11	2462	17.60	15.68	0.50	Pass
HT20	MCS0	1	1	2412	18.15	15.94	0.50	Pass
HT20	MCS0	1	6	2437	18.10	16.38	0.50	Pass
HT20	MCS0	1	11	2462	18.30	16.90	0.50	Pass
HT40	MCS0	1	3	2422	36.30	35.12	0.50	Pass
HT40	MCS0	1	6	2437	36.20	35.12	0.50	Pass
HT40	MCS0	1	9	2452	36.30	35.08	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	18.82	30.00	0.50	19.32	36.00	Pass
11b	1Mbps	1	6	2437	19.03	30.00	0.50	19.53	36.00	Pass
11b	1Mbps	1	11	2462	19.21	30.00	0.50	19.71	36.00	Pass
11g	6Mbps	1	1	2412	22.88	30.00	0.50	23.38	36.00	Pass
11g	6Mbps	1	6	2437	23.42	30.00	0.50	23.92	36.00	Pass
11g	6Mbps	1	11	2462	23.29	30.00	0.50	23.79	36.00	Pass
HT20	MCS0	1	1	2412	22.72	30.00	0.50	23.22	36.00	Pass
HT20	MCS0	1	6	2437	22.98	30.00	0.50	23.48	36.00	Pass
HT20	MCS0	1	11	2462	23.12	30.00	0.50	23.62	36.00	Pass
HT40	MCS0	1	3	2422	22.68	30.00	0.50	23.18	36.00	Pass
HT40	MCS0	1	6	2437	22.89	30.00	0.50	23.39	36.00	Pass
HT40	MCS0	1	9	2452	22.51	30.00	0.50	23.01	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	15.93
11b	1Mbps	1	6	2437	0.10	16.13
11b	1Mbps	1	11	2462	0.10	16.29
11g	6Mbps	1	1	2412	0.51	13.84
11g	6Mbps	1	6	2437	0.51	15.16
11g	6Mbps	1	11	2462	0.51	14.15
HT20	MCS0	1	1	2412	0.54	12.76
HT20	MCS0	1	6	2437	0.54	13.14
HT20	MCS0	1	11	2462	0.54	13.19
HT40	MCS0	1	3	2422	1.02	11.87
HT40	MCS0	1	6	2437	1.02	12.06
HT40	MCS0	1	9	2452	1.02	11.08

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-7.19	0.50	8.00	Pass
11b	1Mbps	1	6	2437	-6.31	0.50	8.00	Pass
11b	1Mbps	1	11	2462	-6.55	0.50	8.00	Pass
11g	6Mbps	1	1	2412	-10.74	0.50	8.00	Pass
11g	6Mbps	1	6	2437	-9.59	0.50	8.00	Pass
11g	6Mbps	1	11	2462	-9.38	0.50	8.00	Pass
HT20	MCS0	1	1	2412	-11.05	0.50	8.00	Pass
HT20	MCS0	1	6	2437	-11.57	0.50	8.00	Pass
HT20	MCS0	1	11	2462	-10.55	0.50	8.00	Pass
HT40	MCS0	1	3	2422	-16.18	0.50	8.00	Pass
HT40	MCS0	1	6	2437	-16.87	0.50	8.00	Pass
HT40	MCS0	1	9	2452	-16.04	0.50	8.00	Pass



Appendix B. Radiated test results

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2381.73	56.73	-17.27	74	50.7	33.04	6.65	33.66	350	318	P	H
		2390	44.28	-9.72	54	38.26	33.02	6.65	33.65	350	318	A	H
	*	2411	105.84	-	-	99.77	33	6.7	33.63	350	318	P	H
	*	2411	100.13	-	-	94.06	33	6.7	33.63	350	318	A	H
		2384.25	57.79	-16.21	74	51.76	33.04	6.65	33.66	100	238	P	V
		2369.58	45.22	-8.78	54	39.19	33.04	6.65	33.66	100	238	A	V
	*	2411	108.93	-	-	102.86	33	6.7	33.63	100	238	P	V
	*	2411	103	-	-	96.93	33	6.7	33.63	100	238	A	V
802.11b CH 06 2437MHz		2342.13	57.15	-16.85	74	51.16	33.09	6.59	33.69	342	218	P	H
		2347.53	43.85	-10.15	54	37.86	33.09	6.59	33.69	342	218	A	H
	*	2436	104.7	-	-	98.64	32.98	6.7	33.62	342	218	P	H
	*	2436	99.34	-	-	93.28	32.98	6.7	33.62	342	218	A	H
		2497.44	56.44	-17.56	74	50.29	32.9	6.81	33.56	342	218	P	H
		2485.68	43.88	-10.12	54	37.77	32.92	6.76	33.57	342	218	A	H
		2360.94	58.09	-15.91	74	52.11	33.07	6.59	33.68	131	293	P	V
		2372.64	45.09	-8.91	54	39.06	33.04	6.65	33.66	131	293	A	V
	*	2435	110.66	-	-	104.6	32.98	6.7	33.62	131	293	P	V
	*	2435	104.84	-	-	98.78	32.98	6.7	33.62	131	293	A	V
		2492.52	57.65	-16.35	74	51.5	32.9	6.81	33.56	131	293	P	V
		2485.68	44.31	-9.69	54	38.2	32.92	6.76	33.57	131	293	A	V



802.11b CH 11 2462MHz	*	2461	106.69	-	-	100.58	32.94	6.76	33.59	378	215	P	H
	*	2461	100.92	-	-	94.81	32.94	6.76	33.59	378	215	A	H
		2491.44	57.52	-16.48	74	51.37	32.9	6.81	33.56	378	215	P	H
		2484.12	44.08	-9.92	54	37.97	32.92	6.76	33.57	378	215	A	H
	*	2463	110.85	-	-	104.74	32.94	6.76	33.59	158	292	P	V
	*	2463	104.68	-	-	98.57	32.94	6.76	33.59	158	292	A	V
		2485.4	57.88	-16.12	74	51.77	32.92	6.76	33.57	158	292	P	V
		2484.12	44.83	-9.17	54	38.72	32.92	6.76	33.57	158	292	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	44.62	-29.38	74	61	32.53	9.7	58.61	100	0	P	H
		4824	41.94	-32.06	74	58.32	32.53	9.7	58.61	100	0	P	V
802.11b CH 06 2437MHz		4875	44.57	-29.43	74	60.77	32.58	9.74	58.52	100	0	P	H
		7313	43.57	-30.43	74	55.82	34.06	11.85	58.16	100	0	P	H
		4875	41.86	-32.14	74	58.06	32.58	9.74	58.52	100	0	P	V
		7311	43.25	-30.75	74	55.5	34.06	11.85	58.16	100	0	P	V
802.11b CH 11 2462MHz		4926	43.06	-30.94	74	59.06	32.63	9.79	58.42	100	0	P	H
		7386	42.26	-31.74	74	54.52	34.08	11.97	58.31	100	0	P	H
		4923	40.08	-33.92	74	56.08	32.63	9.79	58.42	100	0	P	V
		7386	42.54	-31.46	74	54.8	34.08	11.97	58.31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.38	62.88	-11.12	74	56.86	33.02	6.65	33.65	351	319	P	H
		2390	47.8	-6.2	54	41.78	33.02	6.65	33.65	351	319	A	H
	*	2413	106.85	-	-	100.78	33	6.7	33.63	351	319	P	H
	*	2413	96.89	-	-	90.82	33	6.7	33.63	351	319	A	H
		2389.29	64.47	-9.53	74	58.45	33.02	6.65	33.65	100	238	P	V
		2389.83	49.1	-4.9	54	43.08	33.02	6.65	33.65	100	238	A	V
	*	2411	110.16	-	-	104.09	33	6.7	33.63	100	238	P	V
	*	2411	100.15	-	-	94.08	33	6.7	33.63	100	238	A	V
802.11g CH 06 2437MHz		2361.21	57.86	-16.14	74	51.88	33.07	6.59	33.68	377	323	P	H
		2365.17	44.88	-9.12	54	38.9	33.07	6.59	33.68	377	323	A	H
	*	2435	107.02	-	-	100.96	32.98	6.7	33.62	377	323	P	H
	*	2435	96.82	-	-	90.76	32.98	6.7	33.62	377	323	A	H
		2483.52	57.86	-16.14	74	51.75	32.92	6.76	33.57	377	323	P	H
		2485.48	45.08	-8.92	54	38.97	32.92	6.76	33.57	377	323	A	H
		2385.42	60.12	-13.88	74	54.09	33.04	6.65	33.66	132	275	P	V
		2389.11	47.14	-6.86	54	41.12	33.02	6.65	33.65	132	275	A	V
	*	2436	110.5	-	-	104.44	32.98	6.7	33.62	132	275	P	V
	*	2436	100.32	-	-	94.26	32.98	6.7	33.62	132	275	A	V
		2489.84	58.14	-15.86	74	51.99	32.9	6.81	33.56	132	275	P	V
		2483.52	45.86	-8.14	54	39.75	32.92	6.76	33.57	132	275	A	V



802.11g CH 11 2462MHz	*	2461	108.47	-	-	102.36	32.94	6.76	33.59	378	220	P	H
	*	2461	98.69	-	-	92.58	32.94	6.76	33.59	378	220	A	H
		2483.72	69.25	-4.75	74	63.14	32.92	6.76	33.57	378	220	P	H
		2483.52	47.47	-6.53	54	41.36	32.92	6.76	33.57	378	220	A	H
	*	2461	109.12	-	-	103.01	32.94	6.76	33.59	100	308	P	V
	*	2461	99.22	-	-	93.11	32.94	6.76	33.59	100	308	A	V
		2484.44	71.55	-2.45	74	65.44	32.92	6.76	33.57	100	308	P	V
		2483.76	49.2	-4.8	54	43.09	32.92	6.76	33.57	100	308	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4821	46.16	-27.84	74	62.54	32.53	9.7	58.61	100	0	P	H
		4824	44.08	-29.92	74	60.46	32.53	9.7	58.61	100	0	P	V
802.11g CH 06 2437MHz		4875	47.93	-26.07	74	64.13	32.58	9.74	58.52	100	0	P	H
		7311	46.06	-27.94	74	58.31	34.06	11.85	58.16	100	0	P	H
		4875	41.97	-32.03	74	58.17	32.58	9.74	58.52	100	0	P	V
		7311	45.75	-28.25	74	58	34.06	11.85	58.16	100	0	P	V
802.11g CH 11 2462MHz		4923	45.09	-28.91	74	61.09	32.63	9.79	58.42	100	0	P	H
		7386	45.83	-28.17	74	58.09	34.08	11.97	58.31	100	0	P	H
		4923	40.73	-33.27	74	56.73	32.63	9.79	58.42	100	0	P	V
		7388	45.54	-28.46	74	57.8	34.08	11.97	58.31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2390	61.72	-12.28	74	55.7	33.02	6.65	33.65	348	222	P	H
		2389.83	46.86	-7.14	54	40.84	33.02	6.65	33.65	348	222	A	H
	*	2414	106.65	-	-	100.58	33	6.7	33.63	348	222	P	H
	*	2414	96.51	-	-	90.44	33	6.7	33.63	348	222	A	H
		2389.56	65.4	-8.6	74	59.38	33.02	6.65	33.65	100	257	P	V
		2389.92	49.03	-4.97	54	43.01	33.02	6.65	33.65	100	257	A	V
	*	2410	108.8	-	-	102.73	33	6.7	33.63	100	257	P	V
	*	2410	98.93	-	-	92.86	33	6.7	33.63	100	257	A	V
802.11n HT20 CH 06 2437MHz		2358.15	57.42	-16.58	74	51.44	33.07	6.59	33.68	379	320	P	H
		2342.76	44.75	-9.25	54	38.76	33.09	6.59	33.69	379	320	A	H
	*	2436	105.18	-	-	99.12	32.98	6.7	33.62	379	320	P	H
	*	2436	95.22	-	-	89.16	32.98	6.7	33.62	379	320	A	H
		2488.8	57.99	-16.01	74	51.84	32.9	6.81	33.56	379	320	P	H
		2483.68	44.86	-9.14	54	38.75	32.92	6.76	33.57	379	320	A	H
		2371.92	59.41	-14.59	74	53.38	33.04	6.65	33.66	130	288	P	V
		2386.95	46.98	-7.02	54	40.96	33.02	6.65	33.65	130	288	A	V
	*	2436	110.28	-	-	104.22	32.98	6.7	33.62	130	288	P	V
	*	2436	99.69	-	-	93.63	32.98	6.7	33.62	130	288	A	V
		2483.92	59.07	-14.93	74	52.96	32.92	6.76	33.57	130	288	P	V
		2484.08	46.06	-7.94	54	39.95	32.92	6.76	33.57	130	288	A	V



802.11n HT20 CH 11 2462MHz	*	2463	107	-	-	100.89	32.94	6.76	33.59	379	211	P	H
	*	2463	97.14	-	-	91.03	32.94	6.76	33.59	379	211	A	H
		2484	64.96	-9.04	74	58.85	32.92	6.76	33.57	379	211	P	H
		2483.84	45.91	-8.09	54	39.8	32.92	6.76	33.57	379	211	A	H
	*	2463	109.97	-	-	103.86	32.94	6.76	33.59	156	292	P	V
	*	2463	100.08	-	-	93.97	32.94	6.76	33.59	156	292	A	V
		2483.64	68.93	-5.07	74	62.82	32.92	6.76	33.57	156	292	P	V
		2483.64	47.71	-6.29	54	41.6	32.92	6.76	33.57	156	292	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4822	46.24	-27.76	74	62.62	32.53	9.7	58.61	100	0	P	H
		4824	42.78	-31.22	74	59.16	32.53	9.7	58.61	100	0	P	V
802.11n HT20 CH 06 2437MHz		4875	46.13	-27.87	74	62.33	32.58	9.74	58.52	100	0	P	H
		7311	41.2	-32.8	74	53.45	34.06	11.85	58.16	100	0	P	H
		4875	41.74	-32.26	74	57.94	32.58	9.74	58.52	100	0	P	V
		7311	42.24	-31.76	74	54.49	34.06	11.85	58.16	100	0	P	V
802.11n HT20 CH 11 2462MHz		4923	44.27	-29.73	74	60.27	32.63	9.79	58.42	100	0	P	H
		7386	41.61	-32.39	74	53.87	34.08	11.97	58.31	100	0	P	H
		4922	42.03	-31.97	74	58.03	32.63	9.79	58.42	100	0	P	V
		7386	43.02	-30.98	74	55.28	34.08	11.97	58.31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.56	66.06	-7.94	74	60.04	33.02	6.65	33.65	348	222	P	H
		2389.74	48.11	-5.89	54	42.09	33.02	6.65	33.65	348	222	A	H
	*	2424	103.4	-	-	97.34	32.98	6.7	33.62	348	222	P	H
	*	2424	93.7	-	-	87.64	32.98	6.7	33.62	348	222	A	H
		2495.28	56.84	-17.16	74	50.69	32.9	6.81	33.56	348	222	P	H
		2484.84	45.06	-8.94	54	38.95	32.92	6.76	33.57	348	222	A	H
		2389.11	69.87	-4.13	74	63.85	33.02	6.65	33.65	100	237	P	V
		2389.74	51.19	-2.81	54	45.17	33.02	6.65	33.65	100	237	A	V
	*	2424	104.62	-	-	98.56	32.98	6.7	33.62	100	237	P	V
	*	2424	94.81	-	-	88.75	32.98	6.7	33.62	100	237	A	V
		2484	60.68	-13.32	74	54.57	32.92	6.76	33.57	100	237	P	V
		2484.72	46.13	-7.87	54	40.02	32.92	6.76	33.57	100	237	A	V
802.11n HT40 CH 06 2437MHz		2388.66	58.21	-15.79	74	52.19	33.02	6.65	33.65	377	327	P	H
		2343.3	45.22	-8.78	54	39.23	33.09	6.59	33.69	377	327	A	H
	*	2435	101.59	-	-	95.53	32.98	6.7	33.62	377	327	P	H
	*	2435	91.71	-	-	85.65	32.98	6.7	33.62	377	327	A	H
		2487.88	61.09	-12.91	74	54.99	32.9	6.76	33.56	377	327	P	H
		2484.16	45.88	-8.12	54	39.77	32.92	6.76	33.57	377	327	A	H
		2381.01	65.37	-8.63	74	59.34	33.04	6.65	33.66	136	238	P	V
		2386.86	48.2	-5.8	54	42.18	33.02	6.65	33.65	136	238	A	V
	*	2438	104.45	-	-	98.39	32.96	6.7	33.6	136	238	P	V
	*	2438	95.05	-	-	88.99	32.96	6.7	33.6	136	238	A	V
		2483.68	64.19	-9.81	74	58.08	32.92	6.76	33.57	136	238	P	V
		2484.04	46.49	-7.51	54	40.38	32.92	6.76	33.57	136	238	A	V



802.11n HT40 CH 09 2452MHz		2374.71	57.92	-16.08	74	51.89	33.04	6.65	33.66	380	322	P	H
		2367.87	45.21	-8.79	54	39.23	33.07	6.59	33.68	380	322	A	H
	*	2450	101.75	-	-	95.63	32.96	6.76	33.6	380	322	P	H
	*	2450	91.99	-	-	85.87	32.96	6.76	33.6	380	322	A	H
		2484.92	62.41	-11.59	74	56.3	32.92	6.76	33.57	380	322	P	H
		2484.32	45.6	-8.4	54	39.49	32.92	6.76	33.57	380	322	A	H
		2381.91	59.28	-14.72	74	53.25	33.04	6.65	33.66	100	272	P	V
		2389.2	46.41	-7.59	54	40.39	33.02	6.65	33.65	100	272	A	V
	*	2450	104.16	-	-	98.04	32.96	6.76	33.6	100	272	P	V
	*	2450	94.36	-	-	88.24	32.96	6.76	33.6	100	272	A	V
		2486.64	70.94	-3.06	74	64.83	32.92	6.76	33.57	100	272	P	V
		2484.12	49.54	-4.46	54	43.43	32.92	6.76	33.57	100	272	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4845	42.32	-31.68	74	58.66	32.54	9.7	58.58	100	0	P	H
		7266	40.99	-33.01	74	53.25	34.06	11.78	58.1	100	0	P	H
		4845	40.24	-33.76	74	56.58	32.54	9.7	58.58	100	0	P	V
		7266	40.92	-33.08	74	53.18	34.06	11.78	58.1	100	0	P	V
802.11n HT40 CH 06 2437MHz		4875	42.32	-31.68	74	58.52	32.58	9.74	58.52	100	0	P	H
		7311	41.65	-32.35	74	53.9	34.06	11.85	58.16	100	0	P	H
		4875	40.49	-33.51	74	56.69	32.58	9.74	58.52	100	0	P	V
		7311	41.23	-32.77	74	53.48	34.06	11.85	58.16	100	0	P	V
802.11n HT40 CH 09 2452MHz		4905	42.58	-31.42	74	58.64	32.61	9.79	58.46	100	0	P	H
		7356	41.84	-32.16	74	54.11	34.07	11.91	58.25	100	0	P	H
		4905	40.53	-33.47	74	56.59	32.61	9.79	58.46	100	0	P	V
		7356	41.19	-32.81	74	53.46	34.07	11.91	58.25	100	0	P	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		65.91	16.62	-23.38	40	39.76	6.08	1.22	30.44	-	-	P	H
		110.46	22.24	-21.26	43.5	40.11	11.05	1.48	30.4	-	-	P	H
		176.61	19.25	-24.25	43.5	38.54	9.17	1.89	30.35	-	-	P	H
		428.1	20.42	-25.58	46	30.83	16.86	2.68	29.95	-	-	P	H
		551.3	24.52	-21.48	46	31.39	19.74	3.09	29.7	-	-	P	H
		755.7	26.71	-19.29	46	30.39	22.2	3.54	29.42	100	0	P	H
		65.91	22.08	-17.92	40	45.22	6.08	1.22	30.44	-	-	P	V
		107.22	18.36	-25.14	43.5	36.5	10.78	1.48	30.4	-	-	P	V
		157.44	19.97	-23.53	43.5	37.94	10.68	1.71	30.36	-	-	P	V
		552	23.26	-22.74	46	30.09	19.78	3.09	29.7	-	-	P	V
		731.9	26.56	-19.44	46	30.51	21.96	3.54	29.45	-	-	P	V
		760.6	28.23	-17.77	46	31.91	22.2	3.54	29.42	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.