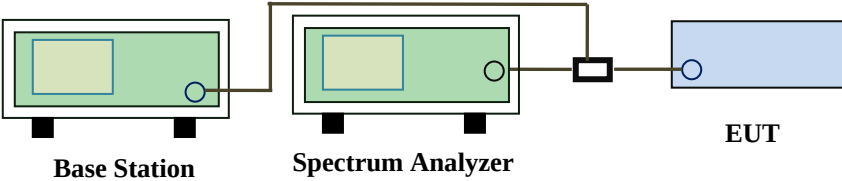


6.8 Band Edge 27.53(m)

Temperature	25 °C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	December 12, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Requirement	Applicable
§27.53(m)	According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power(P) by a factor shall be not less than $43+10\log(P)$ dB at the channel edge, the limit of emission equal to -13dBm. And $55+10\log(P)$ dB at 5.5MHz from the channel edges, the limit of emission equal to -25dBm. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.	☒
Test Setup	 Base Station Spectrum Analyzer EUT	
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.	
Remark		
Result	☒ Pass ☐ Fail	


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

LTE Band VII (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	20775	2500	QPSK	-19.907	-13
			16QAM	-19.792	-13
5	21425	2570	QPSK	-16.821	-13
			16QAM	-16.461	-13
10	20800	2500	QPSK	-21.296	-13
			16QAM	-23.997	-13
10	21400	2570	QPSK	-20.424	-13
			16QAM	-21.157	-13
15	20825	2500	QPSK	-22.498	-13
			16QAM	-23.284	-13
15	21400	2570	QPSK	-17.900	-13
			16QAM	-17.799	-13
20	20850	2500	QPSK	-21.297	-13
			16QAM	-22.879	-13
20	21350	2571	QPSK	-20.260	-13
			16QAM	-20.069	-13

LTE Band VII (Part 27)

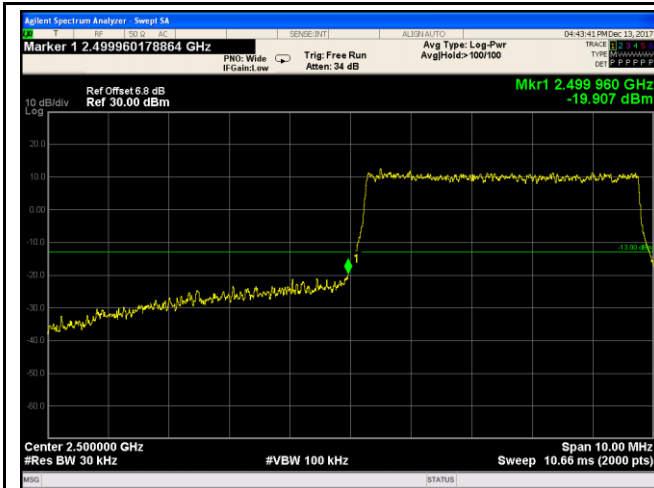


LTE Band VII - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.64/30)=4.5+2.3=6.8 dB

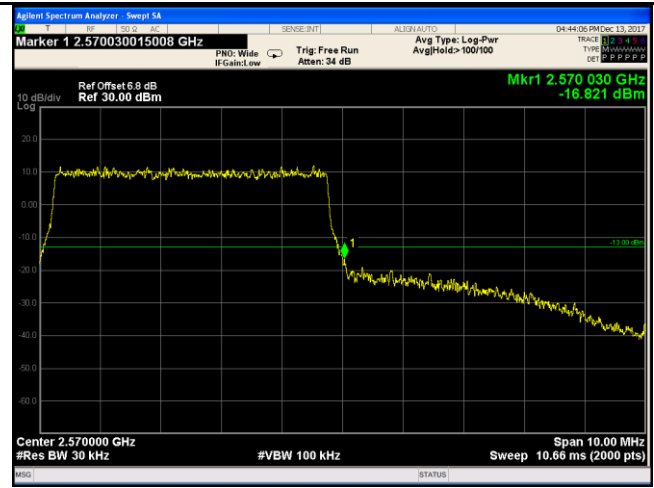


LTE Band VII - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.32/30)=4.5+2.3=6.8 dB

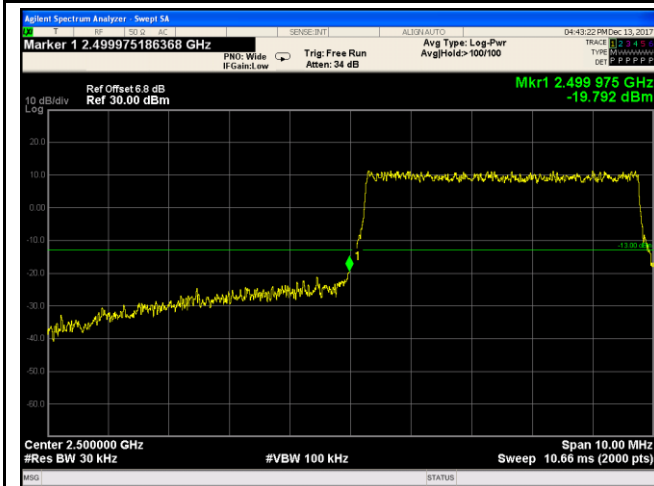


LTE Band VII - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.75/30)=4.5+2.3=6.8 dB

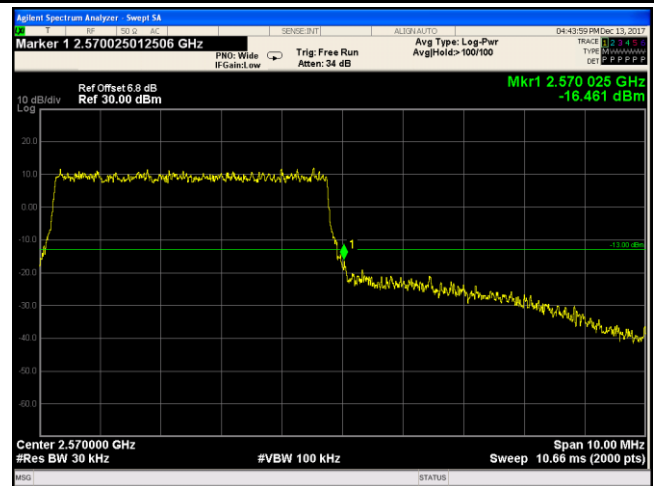


LTE Band VII - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log
(49.86/30)=4.5+2.3=6.8 dB

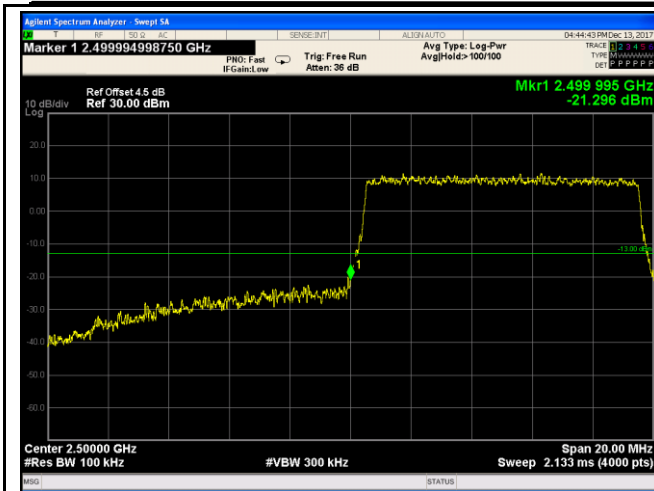


LTE Band VII - Low Channel QPSK-10

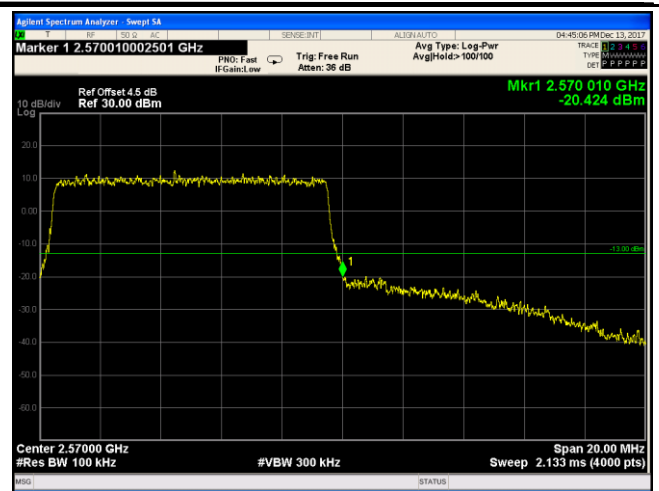


LTE Band VII - High Channel QPSK-10

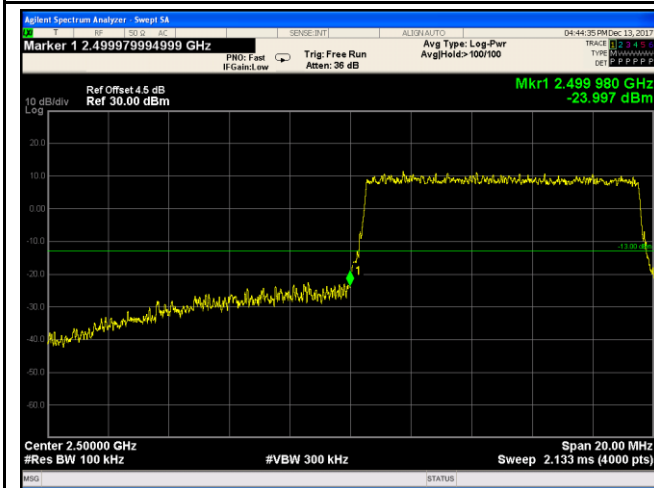

LTE Band VII - Low Channel 16QAM-10

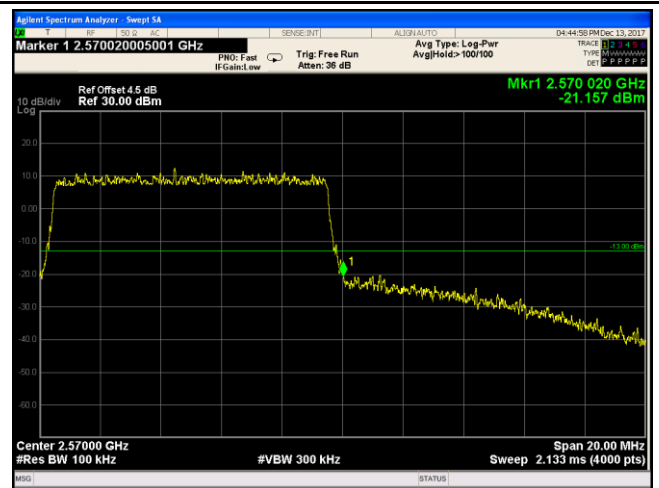


LTE Band VII - High Channel 16QAM-10

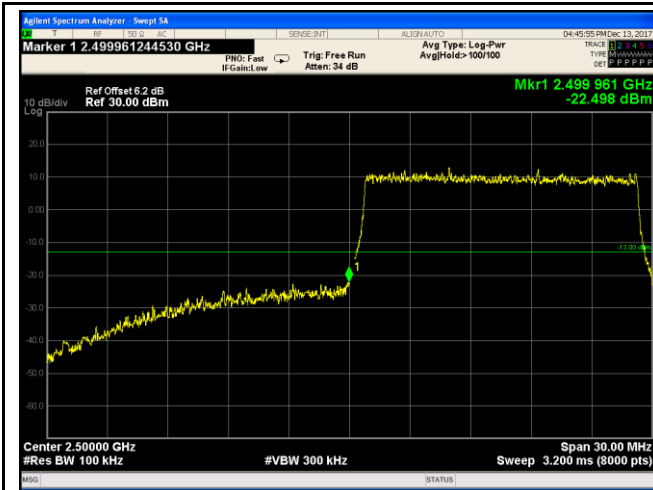


LTE Band VII - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(147.4/100)=4.5+1.7=6.2 dB

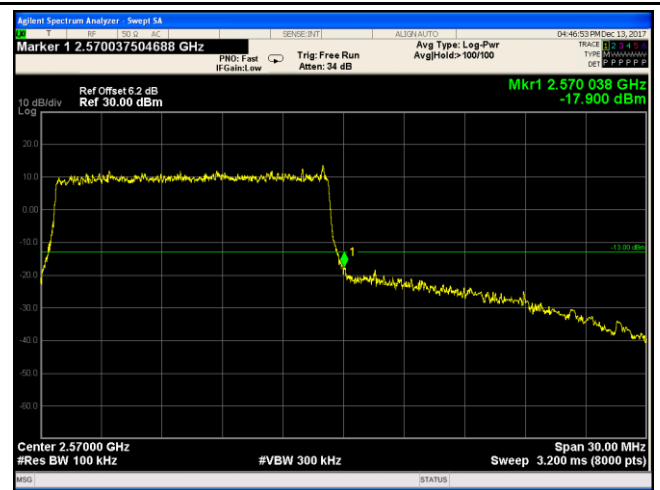


LTE Band VII - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(147.2/100)=4.5+1.7=6.2 dB

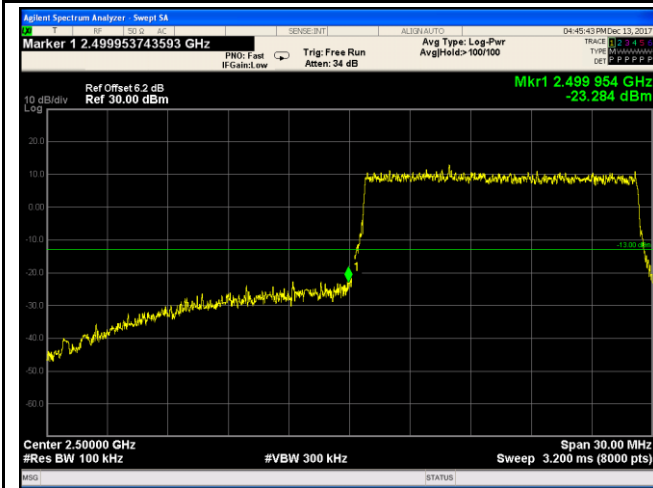


LTE Band VII - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(146.8/100)=4.5+1.7=6.2 dB

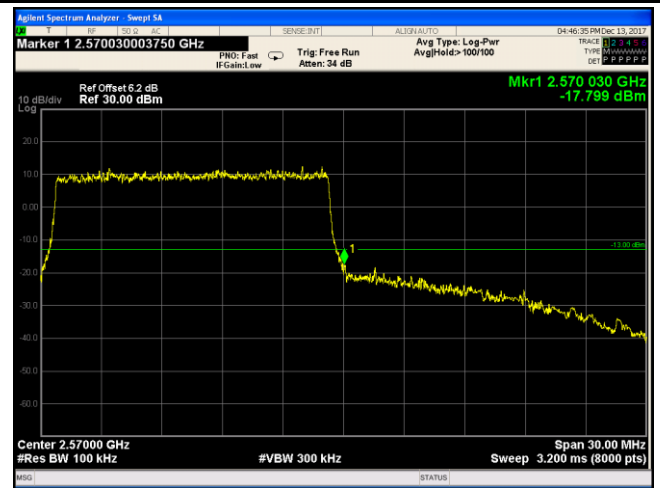


LTE Band VII - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(145.2/100)=4.5+1.7=6.2 dB

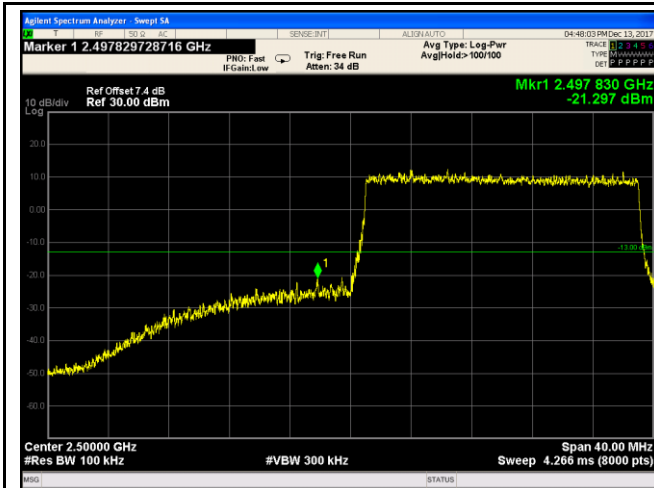


LTE Band VII - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(194.8/100)=4.5+2.9=7.4 dB

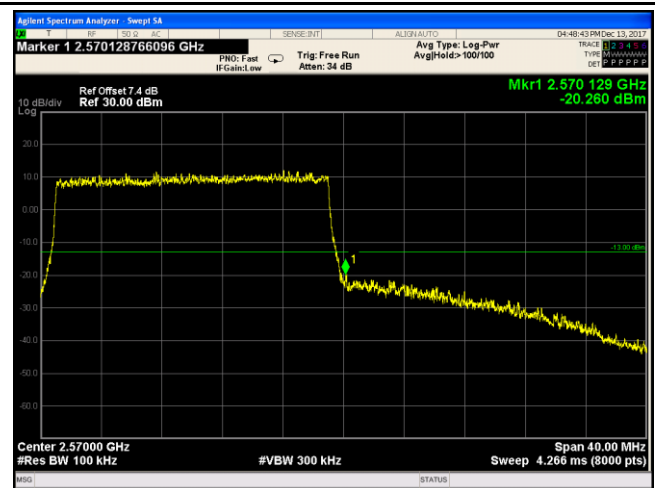


LTE Band VII - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(193.1/100)=4.5+2.9=7.4dB

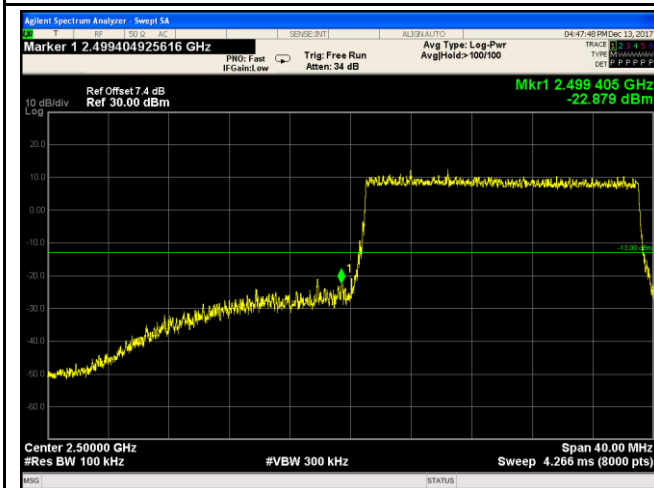

LTE Band VII - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(193.5/100)=4.5+2.9=7.4 dB

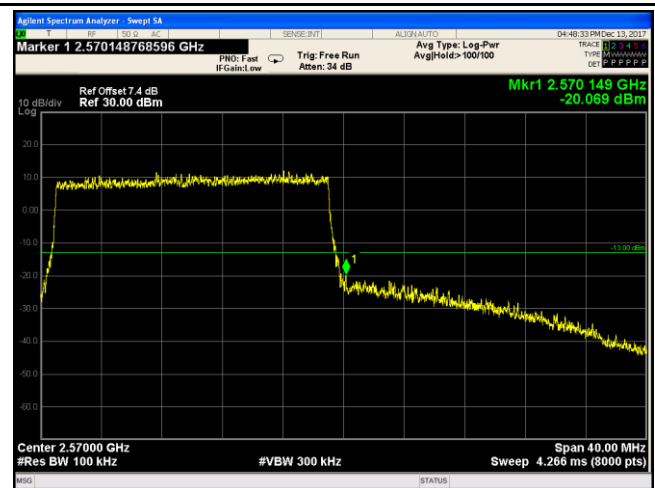

LTE Band VII - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(193.0/100)=4.5+2.9=7.4 dB

6.9 Frequency Stability

Temperature	25 °C
Relative Humidity	54%
Atmospheric Pressure	1010mbar
Test date :	December 06, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235 § 27.5(h); § 27.54	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>□□ to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5.0</td><td>5□□</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 929.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block. According to §27.54, The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	□□ to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5□□	821 to 896	1.5	2.5	2.5	928 to 929.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	☒
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
□□ to 450	5.0	5.0	50.0																																
450 to 512	2.5	5.0	5□□																																
821 to 896	1.5	2.5	2.5																																
928 to 929.	5.0	N/A	N/A																																
929 to 960.	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																

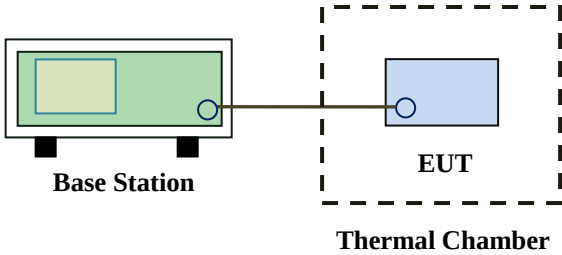Test setup	 Base Station EUT Thermal Chamber
Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to $+55^{\circ}\text{C}$ at normal supply voltage.
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

LTE Band II (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-12	0.0069	2.5
0		-12	0.0069	2.5
10		-13	0.0075	2.5
20		-9	0.0052	2.5
30		-17	0.0098	2.5
40		-15	0.0087	2.5
50		-16	0.0092	2.5
55		-10	0.0058	2.5
25	4.2	-13	0.0075	2.5
	3.5	-14	0.0081	2.5

LTE Band IV (Part 27) result

Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-12	0.0069	2.5
0		-16	0.0092	2.5
10		-17	0.0098	2.5
20		-14	0.0081	2.5
30		-12	0.0069	2.5
40		-16	0.0092	2.5
50		-13	0.0075	2.5
55		-14	0.0081	2.5
25	4.2	-17	0.0098	2.5
	3.5	-12	0.0069	2.5

LTE Band VII (Part 27) result

Middle Channel, $f_0 = 2535$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-12	0.0069	2.5
0		-7	0.0040	2.5
10		-8	0.0046	2.5
20		-13	0.0075	2.5
30		-9	0.0052	2.5
40		-8	0.0046	2.5
50		-11	0.0063	2.5
55		-12	0.0069	2.5
25	4.2	-10	0.0058	2.5
	3.5	-17	0.0098	2.5

LTE Band XII (Part 27) result

Middle Channel, $f_0 = 707.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-12	0.0069	2.5
0		-17	0.0098	2.5
10		-8	0.0046	2.5
20		-17	0.0098	2.5
30		-16	0.0092	2.5
40		-15	0.0087	2.5
50		-12	0.0069	2.5
55		-13	0.0075	2.5
25	4.2	-13	0.0075	2.5
	3.5	-9	0.0052	2.5

LTE Band XVII (Part 27) result

Middle Channel, $f_0 = 710$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-12	0.0069	2.5
0		-16	0.0092	2.5
10		-16	0.0092	2.5
20		-14	0.0081	2.5
30		-8	0.0046	2.5
40		-15	0.0087	2.5
50		-11	0.0063	2.5
55		-15	0.0087	2.5
25	4.2	-8	0.0046	2.5
	3.5	-15	0.0087	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/14/2017	09/13/2018	☒
Power Splitter	1#	1#	08/30/2017	08/29/2018	☒
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	☒
Wideband Radio Communication Tester	CMW500	120906	03/26/2017	03/25/2018	☒
Temperature/Humidity Chamber	UHL-270	001	10/07/2017	10/06/2018	☒
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	☒
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/15/2017	09/14/2018	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	☒
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	08/30/2017	08/29/2018	☒
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/19/2017	09/18/2018	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/22/2017	09/21/2018	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/15/2017	09/14/2018	☒

Tunable Notch Filter	3NF-800/1000-S	AA4	08/30/2017	08/29/2018	☒
Tunable Notch Filter	3NF-1000/2000-S	AM 4	08/30/2017	08/29/2018	☒


Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View

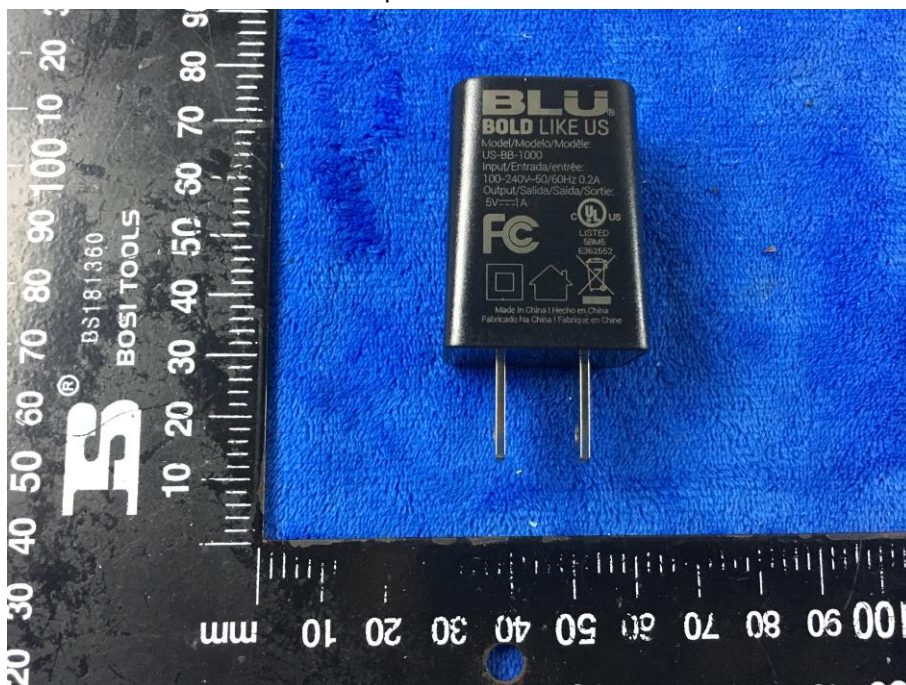


EUT - Front View



EUT - Rear View




EUT - Top View

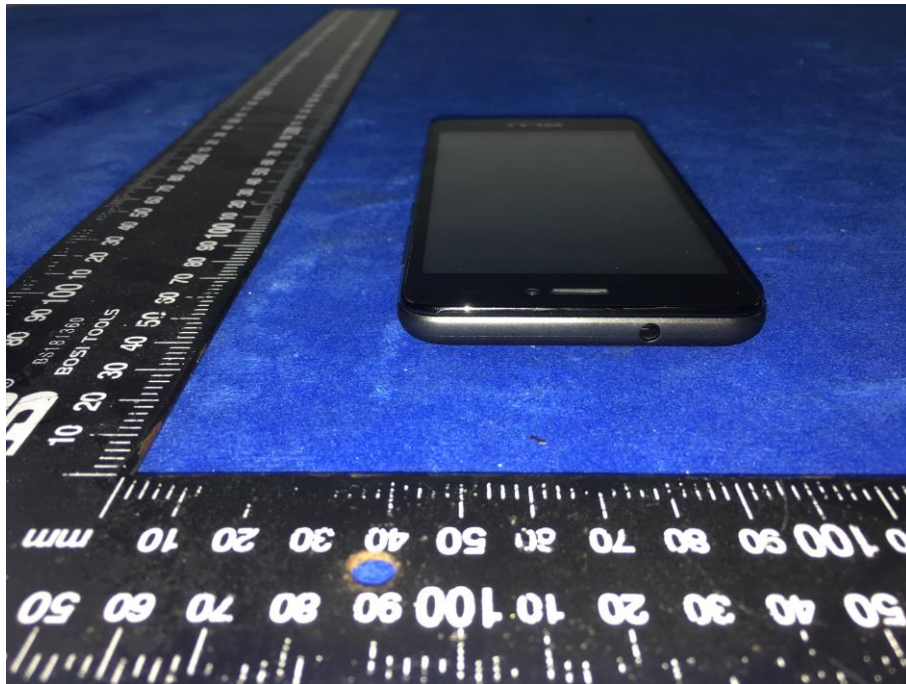


EUT - Bottom View



EUT - Left View

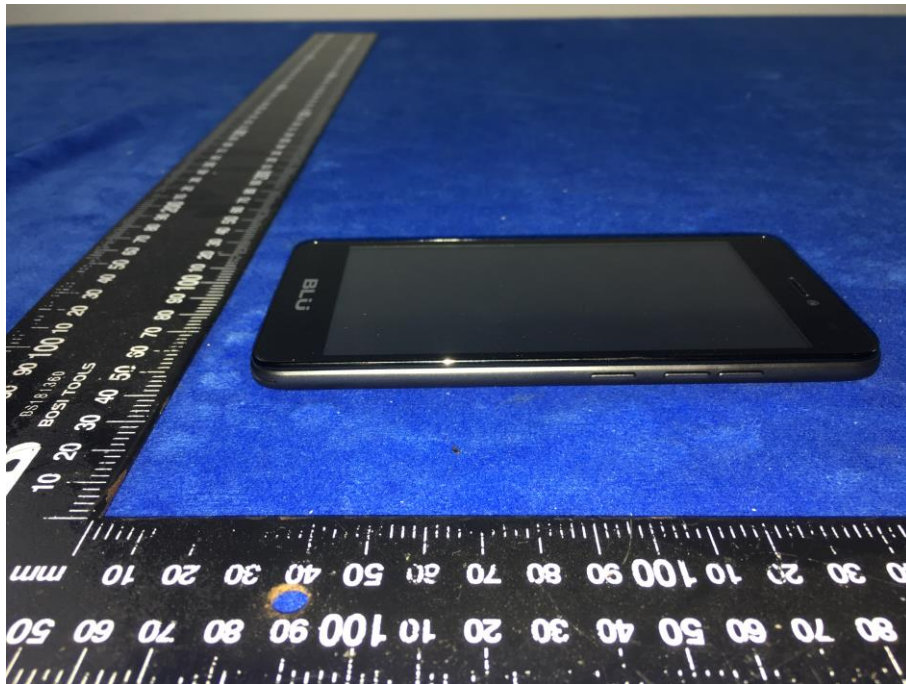

EUT - Right View

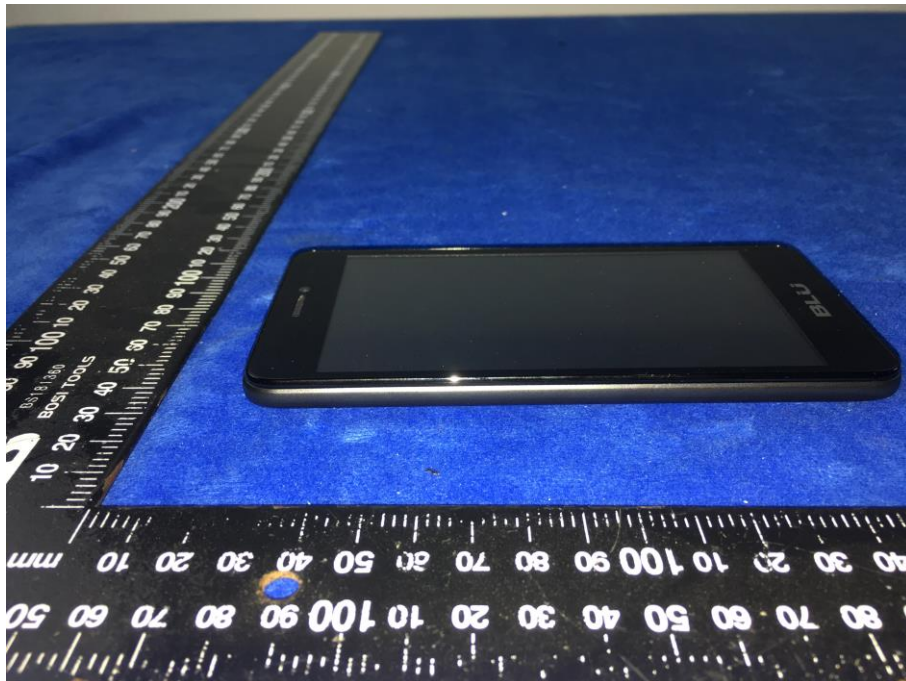

Annex B.ii. Photograph: EUT Internal Photo


Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View

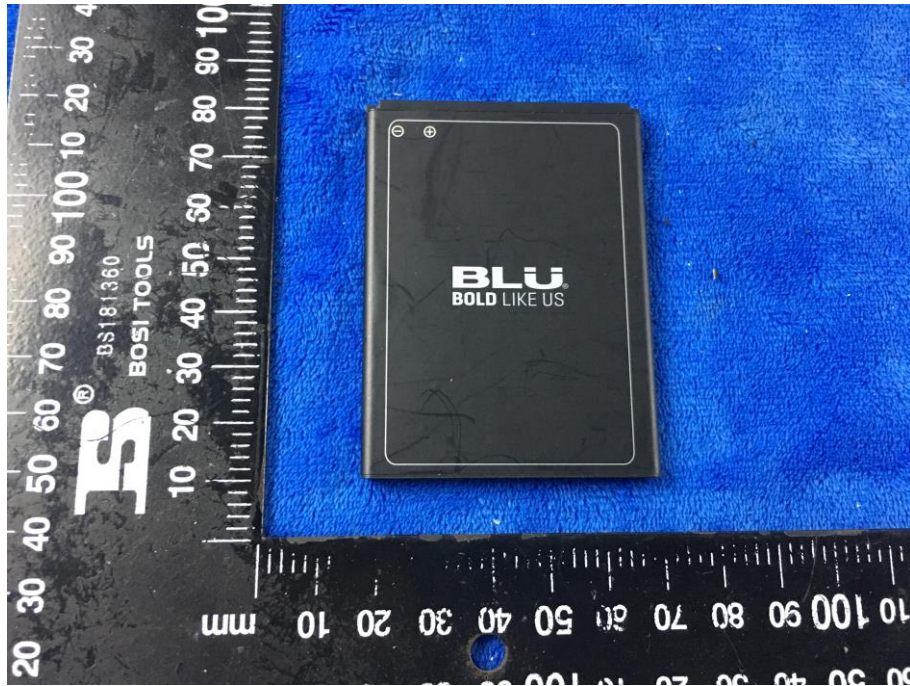


Battery - Rear View




Mainboard with Shielding - Front View

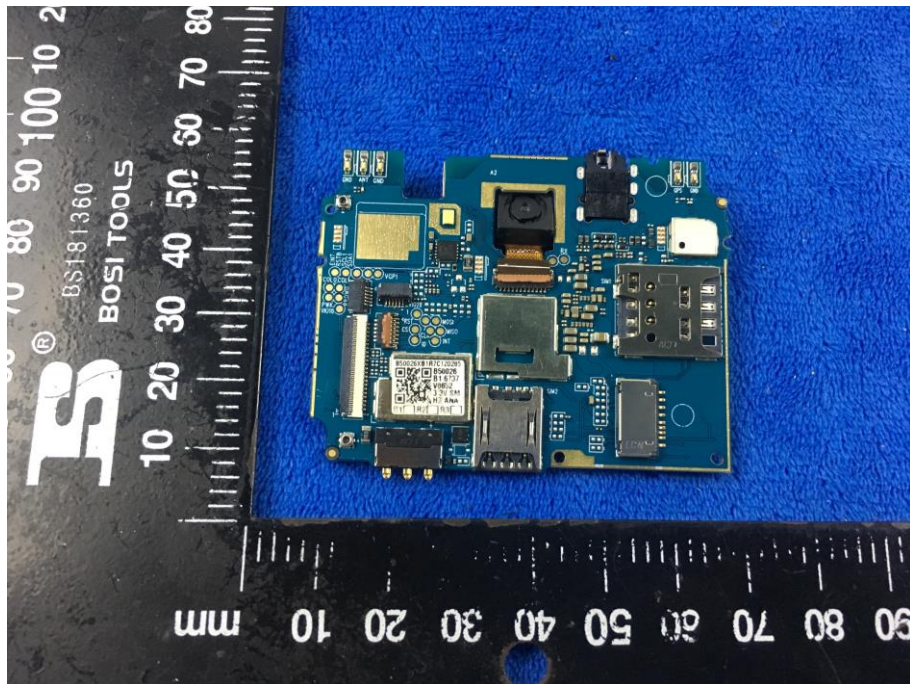


Mainboard without Shielding - Front View

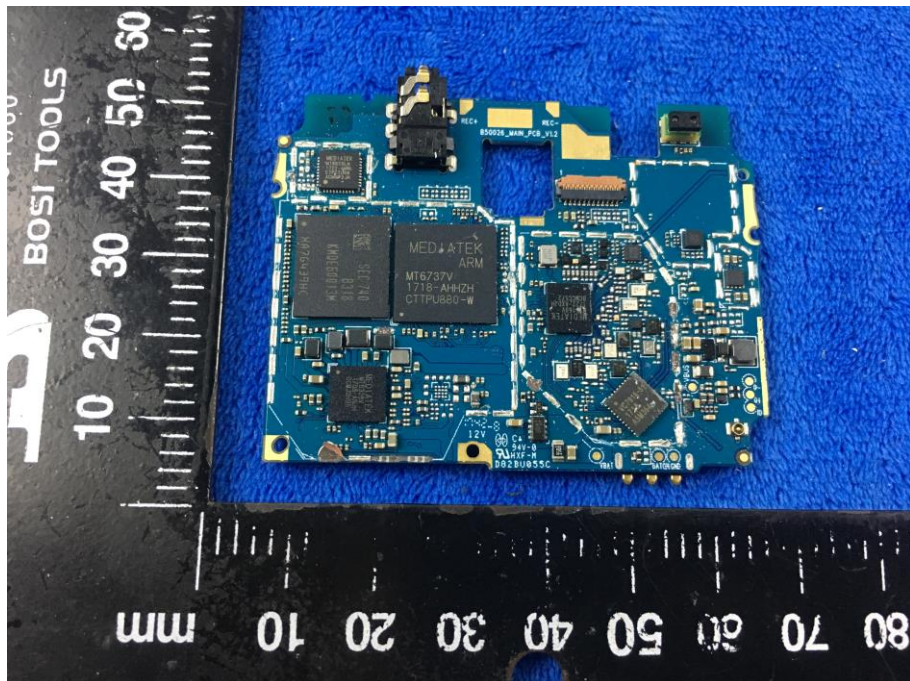


Mainboard without Shielding – Rear View

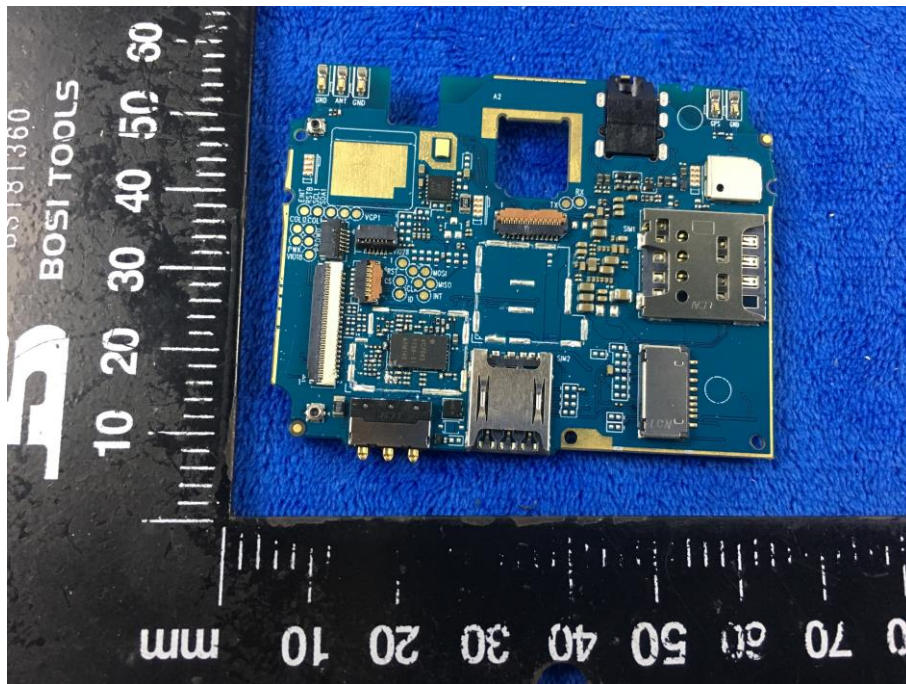

Smallboard – Front View

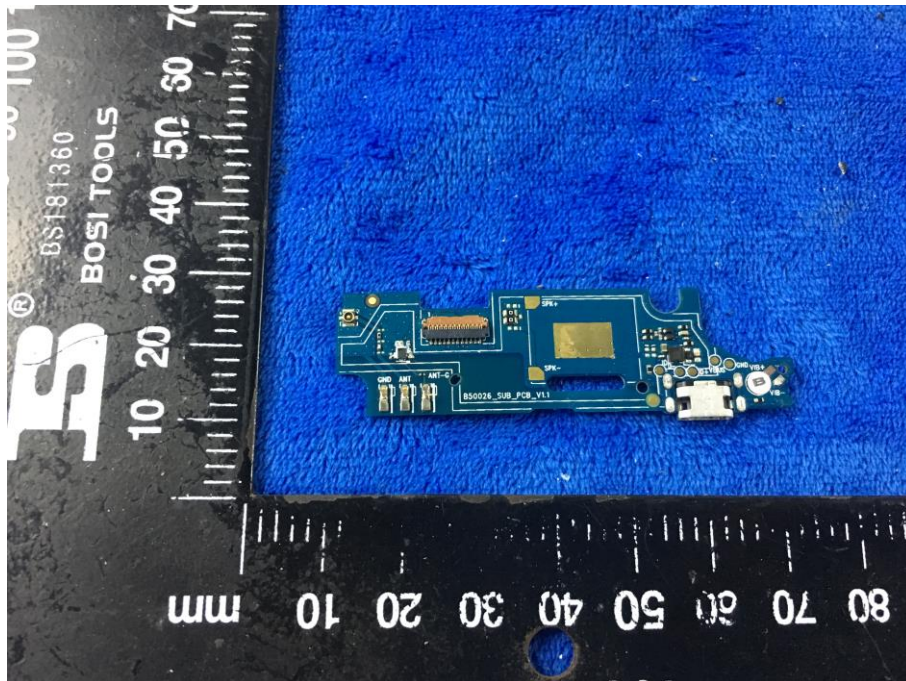

Smallboard – Rear View

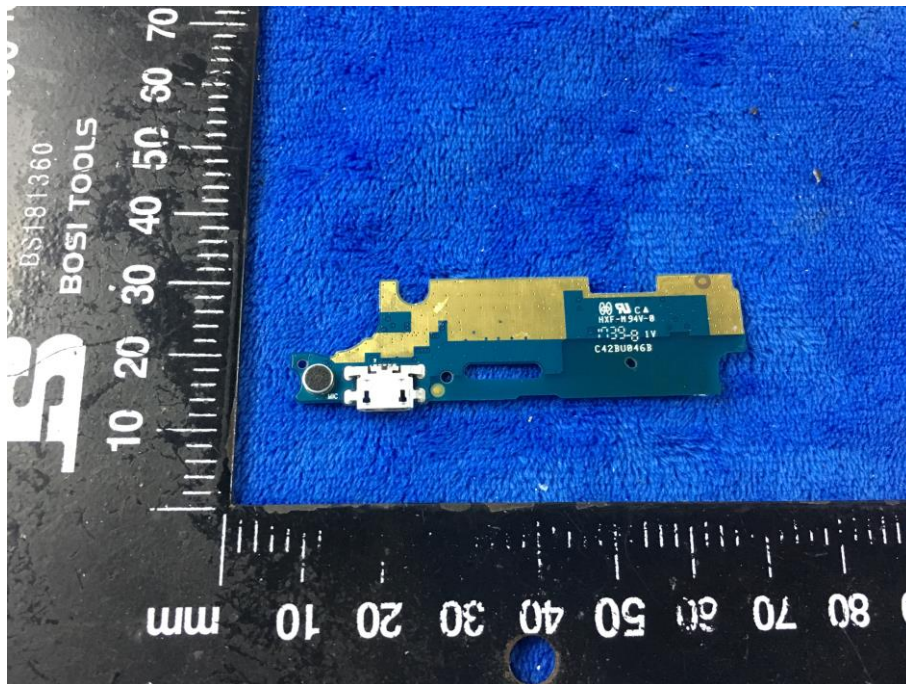

LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD/LTE Antenna View




WIFI/BT/BLE/GPS - Antenna View




RXD- Antenna View



Annex B.iii. Photograph: Test Setup Photo

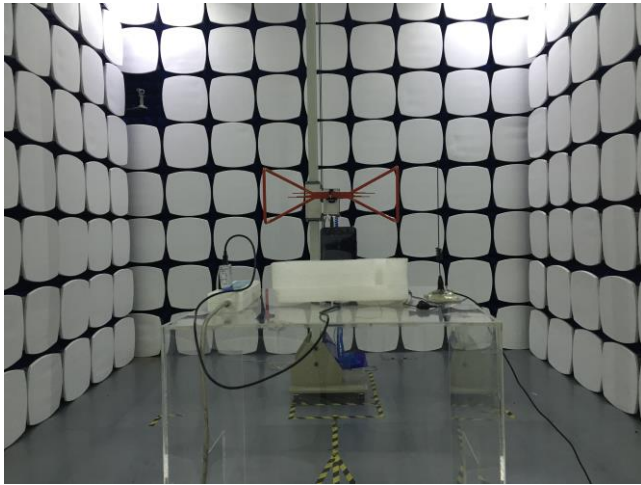

Radiated Spurious Emissions Test Setup Below 1GHz

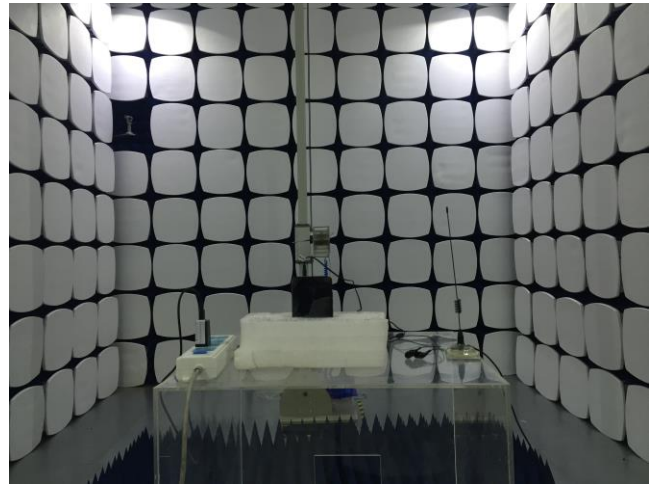


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

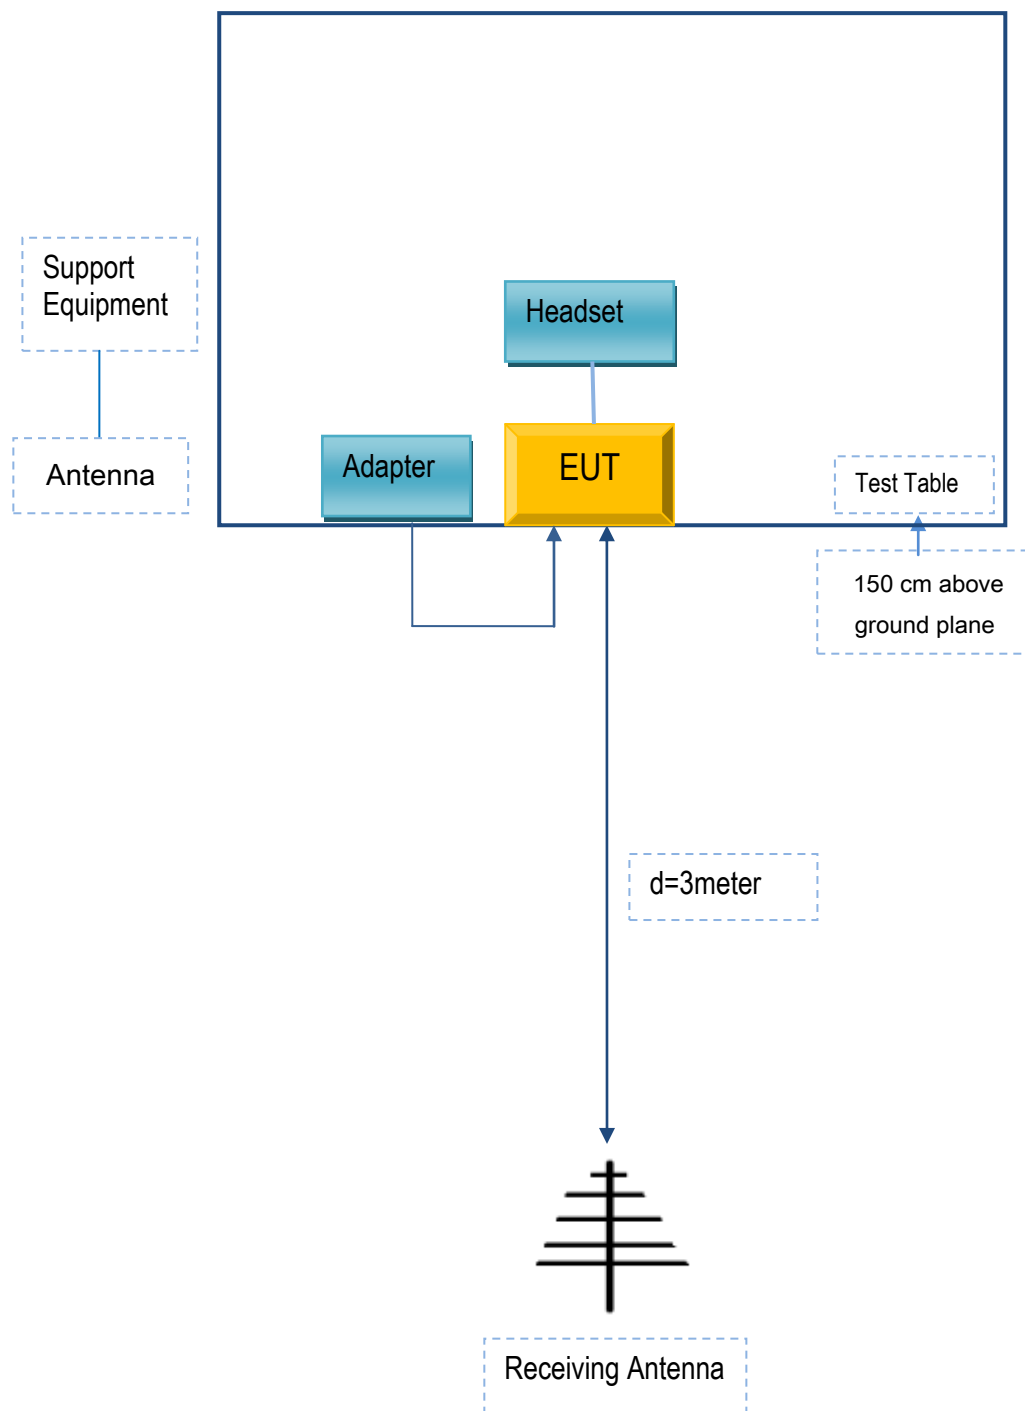

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products, Inc.	Adapter	US-BB-1000	N/A
SAMSUNG	headset	HS330	N/A
Agilent	Wireless Connectivity Test Set	N4010A	N/A
OEM	omnidirectional antenna	AntSuck	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A