

MAXIMUM PERMISSIBLE EXPOSURE

Applicable Standard

FCC §18.313, §1.1310, §2.1091


According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

EUT Setup

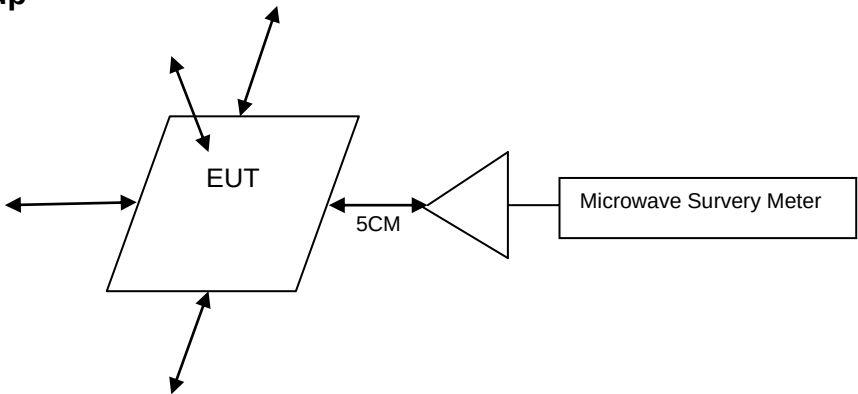

Measurement

Environmental Conditions

Temperature:	22.3-22.5 °C
Relative Humidity:	51-52 %
ATM Pressure:	100.3 kPa
Test Engineer:	Max Tao
Test Date:	2026-06-28