

Test Report



INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C and INDUSTRY CANADA REQUIREMENTS

Equipment Under Test:	RFID reader unit
Type/ Model:	PlanID
Customer / Manufacturer:	Planmeca Oy Asentajankatu 6 FI-00880 Helsinki
FCC Rule Part:	15.207: 2014 15.209: 2014
IC Rule Part:	RSS-210, Issue 8, 2010 RSS-GEN Issue 4, 2014

Date: 20 January 2017

Issued by:


Pekka Kälviäinen
Testing Engineer

Date: 20 January 2017

Checked by:


Janne Nyman
Compliance Specialist

PRODUCT DESCRIPTION	3
Equipment Under Test (EUT)	3
Ratings and declarations, HF	3
Power Supply	3
Cables	3
Samples	3
GENERAL REMARKS	4
Disclaimer	4
SUMMARY OF TESTING	5
EUT Test Conditions during Testing	5
TEST RESULTS	6
Conducted Emissions In The Frequency Range 150 kHz - 30 MHz.	6
Radiated Emissions 9 kHz to 1 GHz	8
TEST EQUIPMENT	11

Equipment Under Test (EUT)

Product: HF RFID reader unit
 Model/type: PlanID
 Serial: -
 FCC ID: YIIPID001
 IC: 9050A-PID001

Classification of the device

Fixed device	☒
Mobile Device (Human body distance > 20cm)	☐
Portable Device (Human body distance < 20cm)	☐

Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing

Ratings and declarations, HF

Operating Frequency Range (OFR): 13.56 MHz
 Channels: 1 transmit channel
 Effective radiated or conducted power: -
 Modulation: -
 Antenna: integral, type: PCB loop antenna

Power Supply

Operating voltage: 24 VDC
 Operating voltage AC/DC power supply 115 V 60 Hz
 type: Mascot type 9920, s/n: 3707:

Cables

Cable:	Length:	Type:
power / data cable	3m	unshielded cable
AC power	2m	unshielded cable

Samples

Samples: EUT1

Disclaimer

This document is issued by the Company under its General Conditions of service accessible at [http://www.sgs.com/terms and conditions.htm](http://www.sgs.com/terms_and_conditions.htm). attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This document cannot be reproduced except in full, without prior approval of the Company.

SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.209, RSS-210, RSS-GEN	Radiated Emissions 9 kHz to 1 GHz	PASS
§15.207, RSS-GEN	Conducted emissions 150 kHz – 30 MHz	PASS
§15.225	Frequency Stability	PASS

EUT Test Conditions during Testing

Configuration of the EUT was made to correspond to the actual assembling conditions as far as possible. During radiated spurious emissions test the EUT was tested DC powered and during conducted emissions the EUT was connected to AC/DC power supply.

Table 1. Normal and extreme test conditions

Test conditions:		Temperature [°C]:	Voltage [V]:	Frequency [Hz]:
Normal		20 - 25	24	DC
Extreme	Minimum	0	20	
	Maximum	40	32	

Test Facility

☐	Testing Location / address: FCC registration number: 90598	SGS Fimko Ltd Särkiniementie 3 FI-00210, HELSINKI FINLAND
☒	Testing Location / address: FCC registration number: 178986 Industry Canada registration number: 8708A-2	SGS Fimko Ltd Karakaarenkuja 4 FI-02610, ESPOO FINLAND

Conducted Emissions In The Frequency Range 150 kHz - 30 MHz.

Standard: ANSI C63.10 (2013)
Tested by: PKA
Date: 30.12.2016
Temperature: 22 °C
Humidity: 32 % RH
Measurement uncertainty: ± 2.9 dB Level of confidence 95 % (k = 2)

FCC Rule: 15.207 (a)

Conducted disturbance voltage was measured with an artificial main network from 150 kHz to 30 MHz with 4.5 kHz steps and a resolution bandwidth of 9 kHz. Measurements were carried out with peak and average detectors.

During the test the EUT was powered from the separate power supply through the LISN.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Test results

EUT1 + AC/DC power supply

Conducted Emission Mains FCC Part 15 Class B with ENV216

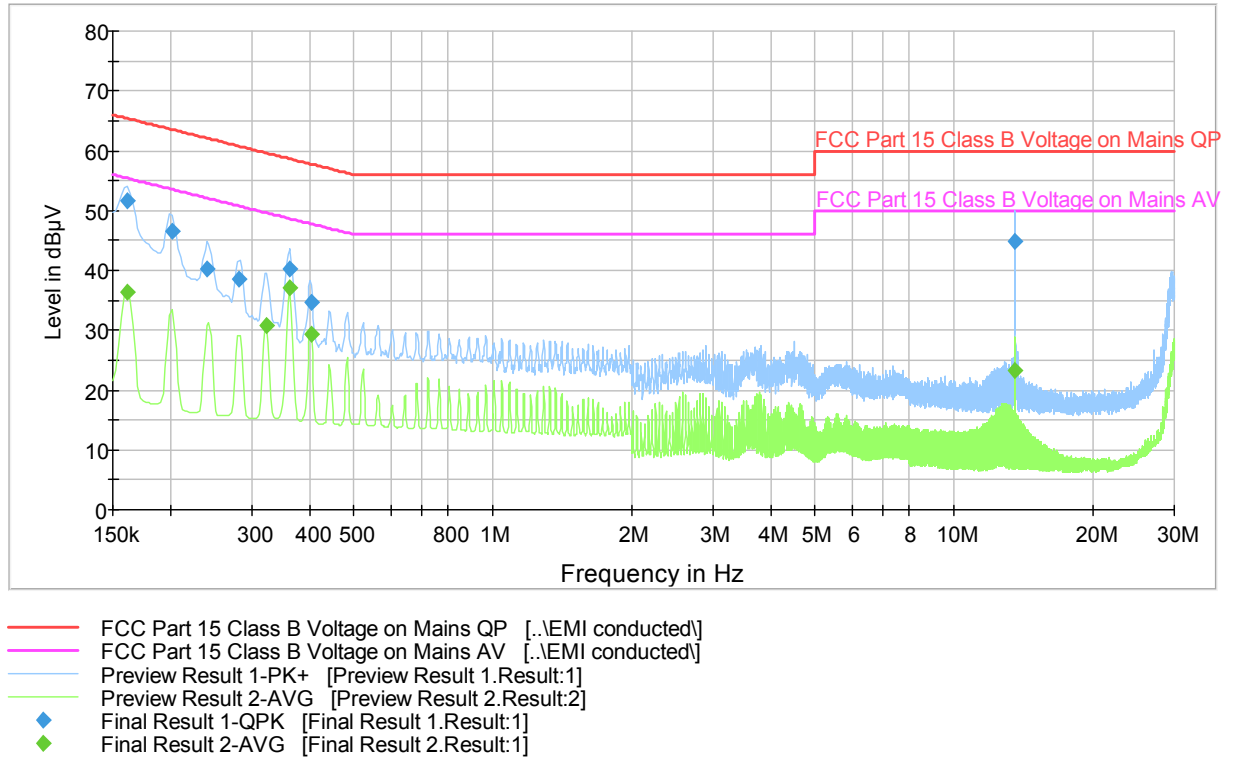


Figure 1. The measured curves with peak- and average detector.

Table 2. Final Quasipeak results.

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.161000	51.6	1000.0	9.000	On	L1	10.2	13.8	65.4	-
0.202000	46.6	1000.0	9.000	On	N	10.1	16.9	63.5	-
0.239500	40.1	1000.0	9.000	On	N	10.2	22.0	62.1	-
0.281250	38.5	1000.0	9.000	On	N	10.2	22.2	60.8	-
0.363250	40.2	1000.0	9.000	On	N	10.2	18.4	58.7	-
0.403500	34.7	1000.0	9.000	On	N	10.3	23.1	57.8	-
13.561250	44.9	1000.0	9.000	On	L1	10.4	15.1	60.0	-

Table 3. Final Average results.

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.161000	36.3	1000.0	9.000	On	N	10.1	19.1	55.4	-
0.322750	30.8	1000.0	9.000	On	N	10.2	18.9	49.6	-
0.363000	37.1	1000.0	9.000	On	N	10.2	11.5	48.7	-
0.403500	29.3	1000.0	9.000	On	N	10.3	18.5	47.8	-
13.559500	23.2	1000.0	9.000	On	L1	10.4	26.8	50.0	-

Radiated Emissions 9 kHz to 1 GHz

Standard: ANSI C63.10 (2009)
Tested by: PKA
Date: 21.-22.12.2016
Temperature: 22 °C
Humidity: 34 % RH
Measurement uncertainty ± 4.51 dB Level of confidence 95 % (k = 2)

FCC Rule: 15.209

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to ANSI C63.10 (clause 5.3.2) and RSS-Gen (Clause 4.11) the measurements below 30 MHz can be performed at a closer distance than the EUT limit distance, the results shall be extrapolated to limit distance by using the square of an inverse linear distance extrapolation factor (40 dB/ decade). This method was used when performing measurements at a distance of 3 m instead of limit distances 300 m or 30 m.

The correction factor in the final result table contains the sum of the transducers (antenna + cables + distance). The result value is the measured value corrected with the correction factor.

Test results

EUT1

FCC Part 15 Class B (15.209) Spurious Emission 9 kHz - 30 MHz 3m

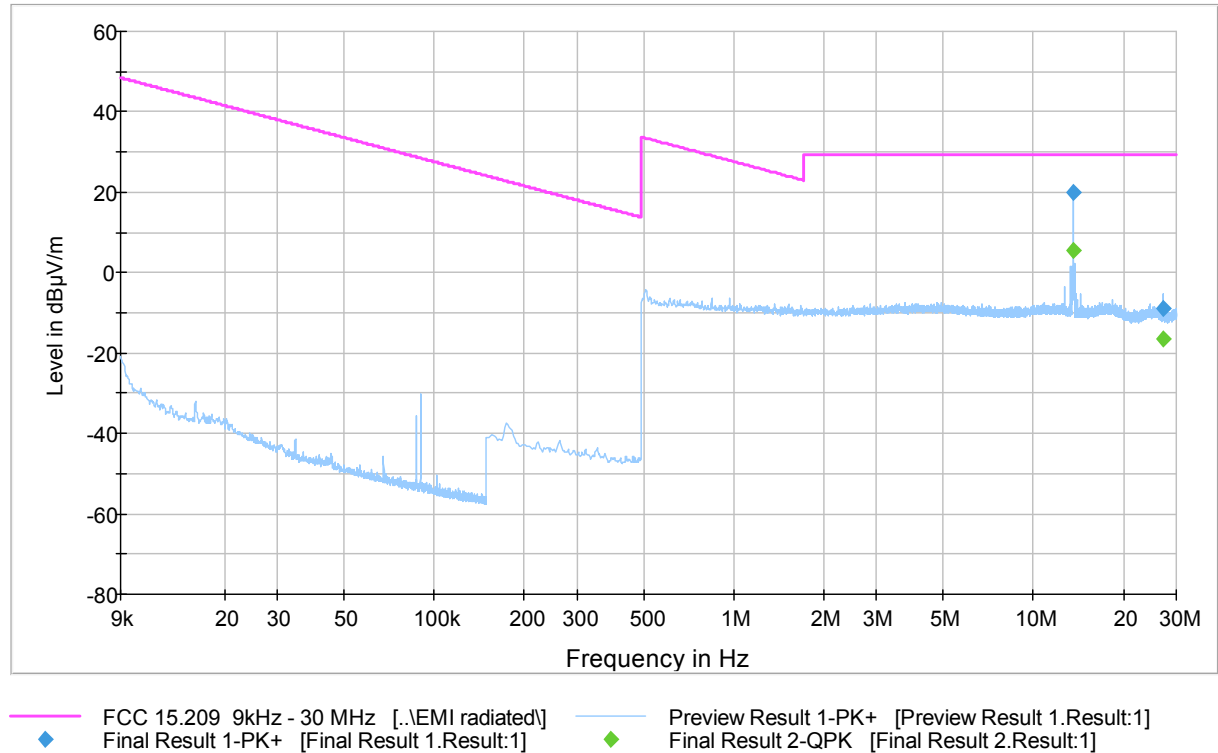


Figure 2. TX radiated emission 9 kHz to 30MHz.

Final measurements from the worst frequencies

Table 4. The final results with Quasipeak detector.

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Angle (°)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
13.555000	5.4	1000.0	9.000	45.0	155.0	-19.7	24.1	29.5	-
27.115750	-16.6	1000.0	9.000	90.0	155.0	-19.6	46.1	29.5	*)

*) The level of the fundamental radiator is below general limit.

Table 5. Frequency stability test, extreme conditions.

Test conditions		Frequency MHz	deviation from nominal %	Result
Temperature	Voltage			
0 °C	20 VDC	13.5608791	0.00012	PASS
	32 VDC	13.5608752	0.00009	PASS
22 °C	24 VDC	13.5608627	nominal	-
40 °C	20 VDC	13.5608406	-0.00016	PASS
	32 VDC	13.5608416	-0.00016	PASS

FCC 15.225 limits of 0.01% with respect to temperature

FCC Part 15 Class B Spurious Emission 30-1000MHz 3m

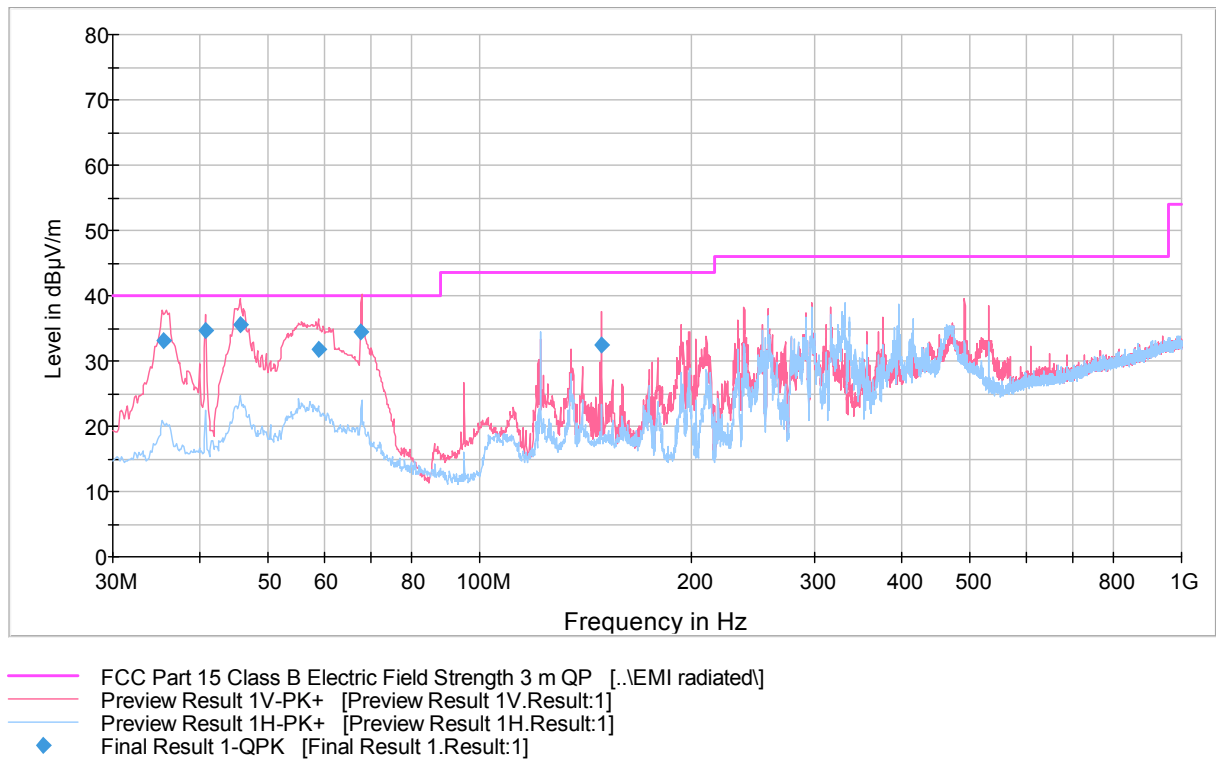


Figure 3. TX radiated emission 30 MHz to 1000 MHz.

Table 6. The final results with Quasipeak detector.

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.485000	33.2	1000.0	120.000	100.0	V	83.0	13.4	6.8	40.0	-
40.685000	34.6	1000.0	120.000	100.0	V	319.0	14.1	5.4	40.0	-
45.605000	35.7	1000.0	120.000	100.0	V	145.0	14.5	4.3	40.0	-
58.875000	31.8	1000.0	120.000	100.0	V	178.0	14.0	8.2	40.0	-
67.795000	34.4	1000.0	120.000	242.0	V	265.0	12.8	5.6	40.0	-
149.155000	32.3	1000.0	120.000	100.0	V	73.0	14.6	11.2	43.5	-

TEST EQUIPMENT

Equipment	Manufacturer	Type	Inv or serial	Prev Calib	Next Calib
POWER SUPPLY	CALIFORNIA INSTR.	5001 iX Series II	inv:7826	-	-
PREAMPLIFIER	CIAO	CA118-3123	inv:10278	2016-11-28	2017-11-28
DC-POWER SUPPLY	DELTA ELEKTRONIKA	SM 130-25D	sn:03494	-	-
ANTENNA (9 kHz-30 MHz)	ROHDE & SCHWARZ	HFH2-Z2	inv: 8013	2016-08-29	2017-08-29
ANTENNA	SCHWARZBECK	VULB 9168	inv:8911	2016-10-25	2018-10-25
PREAMPLIFIER	HEWLETT PACKARD	83017A (25 dB)	inv:5226	2016-02-03	2017-02-03
TURNTABLE	MATURO	DS430 UPGRADED	inv:10182	-	-
MAST & TURNTABLE CONTROLLER	MATURO	NCD	inv:10183	-	-
ANTENNA MAST	MATURO	TAM 4.0E	inv:10181	-	-
ATTENUATOR	PASTERNAK	PE 7004-4	inv:10126	-	-
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-	-
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU 26	inv:8453	2016-06-10	2017-06-10
LISN	ROHDE & SCHWARZ	ENV216	inv:9611	2016-02-24	2017-02-24