GENERAL INSTRUCTIONS:

SUPPLIER TO INSURE CORRECT REVISION LEVEL DWG FOR PRODUCTION. CONTACT SB&D PURCHASING DEPT. FOR LATEST REVISION LEVEL DWG.

CONTACT SB&D GRAPHICS DESIGN FOR ORIGINAL ARTWORK, COLOR STANDARDS AND CORPORATE GUIDELINES.

PROOFS OF ALL REVISIONS THAT AFFECT ARTWORK AND ALL NEW COLOR FORMULATIONS MUST BE SUBMITTED TO SB&D GRAPHICS DESIGN FOR APPROVAL PRIOR TO MAKING PRODUCTION PARTS. SEE EP-1006.

SUPPLIER TO PROVIDE SB&D GRAPHICS DESIGN WITH 6 SAMPLES OF ALL PRODUCTION PARTS. MARK SB&D PART NO. AND REVISION LEVEL.

COLOR VARIATIONS:

■ = PMS Black

■ = DEWALT Yellow

■ = ANSI Orange (or PMS 172)

LABEL APPLICATION

☐ TEXTURED ■ NON-TEXTURED	☐ RULED (one curve) ■ FLAT ☐ COMPOUND	☐ OUTDOOR USE ■ INDOOR USE


ADHESION: ■ PERMANENT ☐ REMOVEABLE ☐ OTHER

SYNTHETIC LABEL CONSTRUCTION:

SUPPLIER NAME:	LABEL MATERIAL:
TBD	5 MIL MATTE POLYCARBONATE, SUB-SURFACED PRINTED, 2 MIL ACRYLIC ADHESIVE MATTE TEXTURED

SPECIAL NOTES:

1. SERIAL NO'S TO BE SUB-SURFACE PRINTED. 4 DIGITS MIN. (START WITH 1001). RANDOM ORDER ACCEPTABLE. NO TWO NAMEPLATES TO HAVE IDENTICAL NO'S. SEQUENCE TO BE ASSIGNED BY B&D PURCHASING DEPT. (APPLICABLE TO DEWALT PRODUCT ONLY.)
2. FINISHED LABEL MUST BE A "UL" AND "CSA" RECOGNIZED LABELING SYSTEM (UL STANDARD: UL969, UL CATEGORY CODE: PGDQ2; CSA STANDARD: C22.2 NO. 0.15, CSA CLASS: 7921) AND APPROVED FOR THE SURFACE THAT THE LABEL WILL BE APPLIED TO UNLESS BLACK & DECKER AGREES TO A DEVIATION.
3. LABEL MANUFACTURER IS RESPONSIBLE TO PLACE THEIR MANUFACTURER'S CODE ON LABEL IN THE SIZE AND LOCATION INDICATED ON THIS DOCUMENT.
4. INK USED MUST BE UV STABILIZED.
5. ALL MATERIALS MUST COMPLY WITH ES100118.
6. LABELS SHALL BE LEGIBLE, SHALL NOT WORK LOOSE, AND SHALL NOT BECOME CURLED AT THE EDGES AFTER BEING RUBBED BY HAND FOR 15 SECONDS WITH A CLOTH SOAKED IN WATER AND AGAIN FOR 15 SECONDS WITH A CLOTH SOAKED IN PETROLEUM SPIRIT. THE PETROLEUM SPIRIT TO BE USED FOR THE TEST SHALL BE A REAGENT GRADE HEXANE WITH A MINIMUM OF 85% AS N-HEXANE.
7. LABEL CONSTRUCTION: WILL MEET THE DURABILITY REQUIREMENTS AND ALSO PROVIDES THE VISUAL CONSISTENCY WITH OTHER DEWALT BRAND PRODUCTS.
8. LABEL MUST SATISFY LUBRICATING OIL IMMERSION TEST PER UL969 OR CSA C22.2 # 0.15
9. LABEL MUST SATISFY 80C MAX TEMPERATURE RATING PER UL969 OR CSA C22.2 #0.15.
10. LABEL MUST BE APPROVED FOR NON-DRY INDOOR USE PER UL969 AND CSA C22.2 NO. 0.15
11. ALL SHIPPING BOXES AND ROLL CORES OR LABEL SHEETS MUST BE MARKED WITH VENDOR'S NAME, TRADE NAME, DATE OF MANUFACTURE AND MATERIAL IDENTIFICATION.

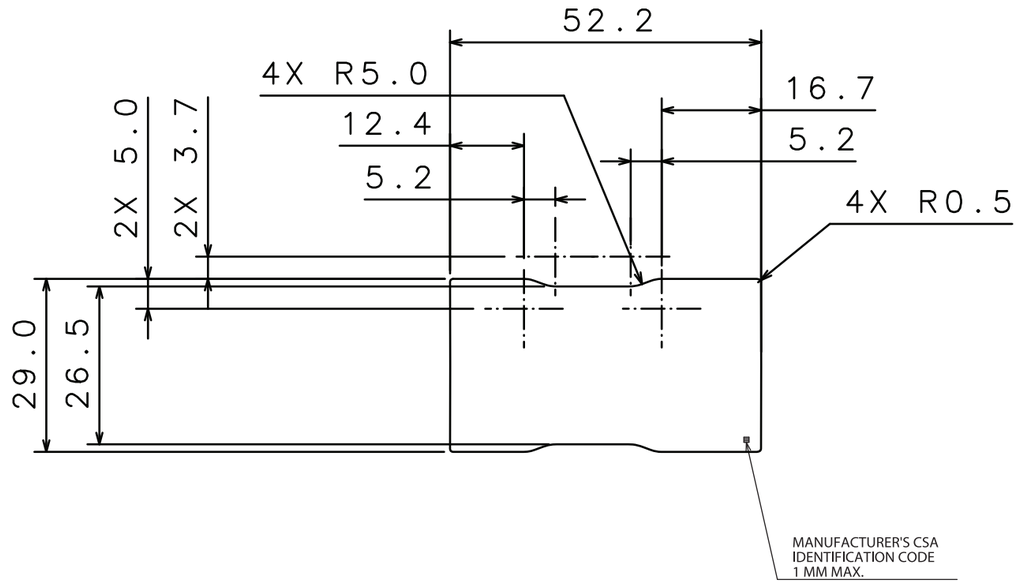

DCF896H 1/2" (13mm) BRUSHLESS 3-SPEED IMPACT

TYPE 1 20V ⎓ (Max) 0-3300 IPM

no 0-900/2000/2000/min (RPM)

CONTAINS: FCC ID: YJ7-N457147J

CONTAINS: IC: 9082A-N457147J

NOM ANCE

C SP US 150399

⚠WARNING TO REDUCE THE RISK OF INJURY, USER MUST READ INSTRUCTION MANUAL. ALWAYS USE PROPER EYE AND RESPIRATORY PROTECTION. **ADVERTENCIA:** PARA EL MANEJO SEGURO LEA EL MANUAL DE INSTRUCCIONES. UTILIZAR PROTECCIÓN OCULAR Y RESPIRATORIA. **AVERTISSEMENT:** À TITRE PRÉVENTIF, LIRE LE GUIDE. UTILISER DES PROTECTIONS OCULAIRE ET RESPIRATOIRE.

N510418

THIS DOCUMENT IS THE PROPERTY OF STANLEY BLACK & DECKER INC.
THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO STANLEY BLACK & DECKER INC.
NEITHER THIS DOCUMENT NOR ITS' CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED OR PUBLISHED WITHOUT PRIOR WRITTEN CONSENT OF STANLEY BLACK & DECKER INC.
COPYRIGHT © 2016 STANLEY BLACK & DECKER INC.

TOL UNLESS SPECIFIED	StanleyBlack&Decker
0 & 1 PLC DEC: ± 0.4	
ANGLES: ± 1°	FOR ITEM DATA SEE PRINTED REPORT
ALL DIMENSIONS mm	
SIZE:	
SHEET: 1 of 1	