

# FCC Part 15 EMI TEST REPORT *of*

E.U.T. : Bluetooth Speaker

Model : DCR006

FCC ID : YJ7DCR006

*for*

APPLICANT : Stanley Black & Decker

ADDRESS : 6275 Millcreek Drive Mississauga Ontario Canada  
L5N 7K6

Test Performed by

## **ELECTRONICS TESTING CENTER, TAIWAN**

NO. 34. LIN 5, DINGFU VIL., LINKOU DIST.,  
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel:(02)26023052      Fax:(02)26010910  
<http://www.etc.org.tw> ; e-mail : [emc@etc.org.tw](mailto:emc@etc.org.tw)

Report Number : 14-07-RBF-044

# TEST REPORT CERTIFICATION

Applicant : Stanley Black & Decker  
6275 Millcreek Drive Mississauga Ontario Canada L5N 7K6

Manufacture : Phihong Technology Co., Ltd  
No. 568, Fu Xing 3rd Rd, Guishan Tao Yuan Hsien 333 Taiwan

Description of Device :

a) Type of EUT : Bluetooth Speaker

b) Trade Name : DEWALT

c) Model No. : DCR006

d) Power Supply : (1)Adapter:PSAA12A-120  
I/P:100-240Vac,0.3A,50-60Hz  
O/P:12V,1A  
(2)Battery:14.4V

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

## Summary of Tests

| Test                                                  | Results     |
|-------------------------------------------------------|-------------|
| Radiated Emission                                     | <b>Pass</b> |
| Conducted Emission                                    | <b>Pass</b> |
| Hopping Channel Separation                            | <b>Pass</b> |
| Number of Hopping frequencies used                    | <b>Pass</b> |
| Hopping Channel Bandwidth                             | <b>Pass</b> |
| Dwell Time of each frequency                          | <b>Pass</b> |
| Output Power Requirement                              | <b>Pass</b> |
| 100 kHz Bandwidth of Frequency Band Edges Requirement | <b>Pass</b> |
| Out-of-Band Conducted Emission Requirement            | <b>Pass</b> |

Date Test Item Received : Jul. 25, 2014  
Date Test Campaign Completed : Sep. 25, 2014  
Date of Issue : Sep. 30, 2014

Test Engineer : Tien Lu Liao  
(Tien Lu Liao , Engineer )

Approve & Authorized : S. S. Liou  
S. S. Liou, Section Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN

| <b>Table of Contents</b>                      | <b>Page</b> |
|-----------------------------------------------|-------------|
| <b>1 GENERAL INFORMATION.....</b>             | <b>1</b>    |
| 1.1 Product Description.....                  | 1           |
| 1.2 Test Methodology .....                    | 1           |
| 1.3 Test Facility.....                        | 1           |
| <b>2 PROVISIONS APPLICABLE.....</b>           | <b>2</b>    |
| 2.1 Definition .....                          | 2           |
| 2.2 Requirement for Compliance .....          | 3           |
| 2.3 Restricted Bands of Operation .....       | 5           |
| 2.4 Labeling Requirement.....                 | 6           |
| 2.5 User Information .....                    | 6           |
| <b>3 SYSTEM TEST CONFIGURATION .....</b>      | <b>7</b>    |
| 3.1 Justification .....                       | 7           |
| 3.2 Devices for Tested System.....            | 7           |
| <b>4 RADIATED EMISSION MEASUREMENT .....</b>  | <b>8</b>    |
| 4.1 Applicable Standard .....                 | 8           |
| 4.2 Measurement Procedure.....                | 8           |
| 4.3 Measuring Instrument .....                | 10          |
| 4.4 Radiated Emission Data .....              | 11          |
| 4.5 Field Strength Calculation.....           | 27          |
| 4.6 Photos of Radiation Measuring Setup.....  | 28          |
| <b>5 CONDUCTED EMISSION MEASUREMENT.....</b>  | <b>30</b>   |
| 5.1 Standard Applicable .....                 | 30          |
| 5.2 Measurement Procedure.....                | 30          |
| 5.3 Conducted Emission Data .....             | 31          |
| 5.4 Result Data Calculation.....              | 35          |
| 5.5 Conducted Measurement Equipment .....     | 35          |
| 5.6 Photos of Conduction Measuring Setup..... | 36          |
| <b>6 ANTENNA REQUIREMENT.....</b>             | <b>37</b>   |
| 6.1 Standard Applicable .....                 | 37          |
| 6.2 Antenna Construction.....                 | 37          |
| <b>7 HOPPING CHANNEL SEPARATION.....</b>      | <b>38</b>   |
| 7.1 Standard Applicable .....                 | 38          |
| 7.2 Measurement Procedure.....                | 38          |
| 7.3 Measurement Equipment .....               | 39          |
| 7.4 Measurement Data .....                    | 39          |

|                                                             |            |
|-------------------------------------------------------------|------------|
| <b>8 NUMBER OF HOPPING FREQUENCY USED .....</b>             | <b>46</b>  |
| 8.1 Standard Applicable .....                               | 46         |
| 8.2 Measurement Procedure .....                             | 46         |
| 8.3 Measurement Equipment .....                             | 46         |
| 8.4 Measurement Data .....                                  | 47         |
| <b>9 CHANNEL BANDWIDTH .....</b>                            | <b>54</b>  |
| 9.1 Standard Applicable .....                               | 54         |
| 9.2 Measurement Procedure .....                             | 54         |
| 9.3 Measurement Equipment .....                             | 55         |
| 9.4 Measurement Data .....                                  | 55         |
| <b>10 DWELL TIME ON EACH CHANNEL .....</b>                  | <b>62</b>  |
| 10.1 Standard Applicable .....                              | 62         |
| 10.2 Measurement Procedure .....                            | 62         |
| 10.3 Measurement Equipment .....                            | 62         |
| 10.4 Measurement Data .....                                 | 63         |
| <b>11 OUTPUT POWER MEASUREMENT .....</b>                    | <b>85</b>  |
| 11.1 Standard Applicable .....                              | 85         |
| 11.2 Measurement Procedure .....                            | 85         |
| 11.3 Measurement Equipment .....                            | 85         |
| 11.4 Measurement Data .....                                 | 86         |
| <b>12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT .....</b> | <b>93</b>  |
| 12.1 Standard Applicable .....                              | 93         |
| 12.2 Measurement Procedure .....                            | 93         |
| 12.3 Measurement Equipment .....                            | 94         |
| 12.4 Measurement Data .....                                 | 94         |
| <b>13 CONDUCTED SPURIOUS EMISSION MEASUREMENT .....</b>     | <b>103</b> |
| 13.1 Standard Applicable .....                              | 103        |
| 13.2 Measurement Procedure .....                            | 103        |
| 13.3 Measurement Equipment .....                            | 104        |
| 13.4 Measurement Data .....                                 | 104        |

# 1 GENERAL INFORMATION

## 1.1 Product Description

- a) Type of EUT : Bluetooth Speaker
- b) Trade Name : DEWALT
- c) Model No. : DCR006
- d) Power Supply : (1)Adapter:PSAA12A-120  
I/P:100-240Vac,0.3A,50-60Hz  
O/P:12V,1A  
(2)Battery:14.4V

## 1.2 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003). Other required measurements were illustrated in separate sections of this test report for details.

## 1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

This site is FCC 2.948 listed and accepted in a letter dated Jan. 29, 2014.

Registration Number: 90589

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency<br>MHz | Quasi Peak<br>dB $\mu$ V | Average<br>dB $\mu$ V |
|------------------|--------------------------|-----------------------|
| 0.15 - 0.5       | 66-56*                   | 56-46*                |
| 0.5 - 5.0        | 56                       | 46                    |
| 5.0 - 30.0       | 60                       | 50                    |

\* Decreases with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency<br>MHz | Distance<br>Meters | Radiated<br>dB $\mu$ V/m | Radiated<br>$\mu$ V/m |
|------------------|--------------------|--------------------------|-----------------------|
| 30 - 88          | 3                  | 40.0                     | 100                   |
| 88 - 216         | 3                  | 43.5                     | 150                   |
| 216 - 960        | 3                  | 46.0                     | 200                   |
| Above 960        | 3                  | 54.0                     | 500                   |

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

**(3) Antenna Requirement**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**(4) Hopping Channel Separation**

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**(5) Number of Hopping frequencies used**

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

**(6) Hopping Channel Bandwidth**

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

**(7) Dwell Time of each frequency**

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**(8) Output Power Requirement**

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**(9) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the

transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### (10) Out-of-Band Conducted Emission Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

| MHz               | MHz                   | MHz           | GHz         |
|-------------------|-----------------------|---------------|-------------|
| 0.090 - 0.110     | 16.42-16.423          | 399.9-410     | 4.5-5.15    |
| 0.495 - 0.505 **  | 16.69475 - 16.69525   | 608-614       | 5.35-5.46   |
| 2.1735 - 2.1905   | 16.80425 - 16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67            | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25            | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6               | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2             | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94            | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138               | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05          | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475 - 156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9           | 2655-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17       | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2          | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285               | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4             | 3360-4400     | Above 38.6  |
| 13.36-13.41       |                       |               |             |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3 SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT (if applicable) to maximize the emission from EUT.

For conducted and radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of emissions from digital circuits is performed with the highest, middle and the lowest channel by transmitting mode.

The following modes were investigated and the worst cases (mode 1 and 3) were chosen for final test.

1. Basic Rate (BR) 1 Mbps uses GFSK modulation
2. Enhanced Data Rate (EDR) 2Mbps uses  $\pi/4$ -DQPSK modulation
3. Enhanced Data Rate (EDR) 3Mbps uses 8DPSK modulation

#### 3.2 Devices for Tested System

| Device              | Manufacture                 | Model / FCC ID.      | Description                                                                                                                                       |
|---------------------|-----------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Bluetooth Speaker * | Phihong Technology Co., Ltd | DCR006/<br>YJ7DCR006 | 1.51m Non-shielded AC Adapter power cord<br>1.53m Non-shielded AUX in Cable<br>1.0m Shielded USB Cable<br>1.2m Non-shielded AC Power outlet Cable |
| iPod                | Apple                       | A1051                | 1.0m Unshielded Line                                                                                                                              |
| Cell phone          | Nokia                       | N73                  | ---                                                                                                                                               |
| Cell phone          | Samsung                     | Note3                | ---                                                                                                                                               |

Remark “\*” means equipment under test.

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


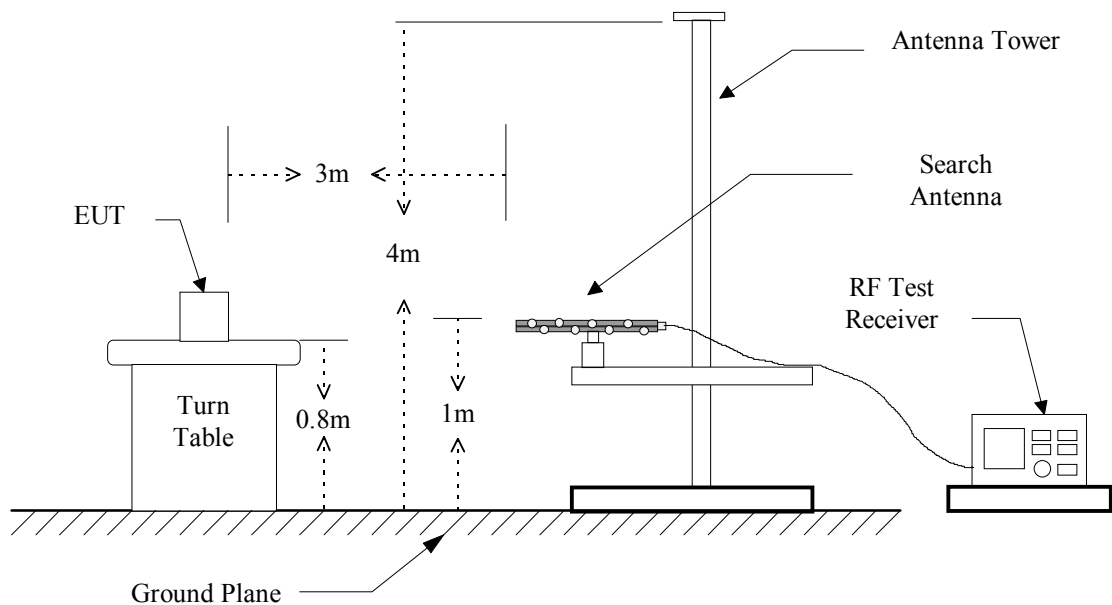


Figure 2 : Frequencies measured above 1 GHz configuration

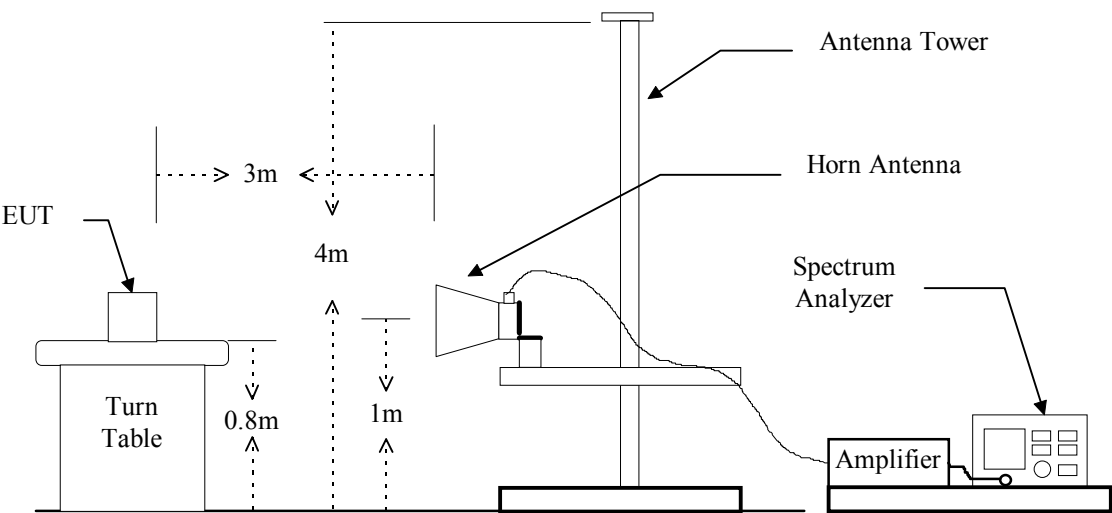

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

| Equipment             | Manufacturer         | Model No. | Calibration Date | Next Cal. Date |
|-----------------------|----------------------|-----------|------------------|----------------|
| Test Receiver         | Rohde & Schwarz      | ESVS30    | 2014/05/29       | 2015/05/28     |
| Bi-Log Antenna        | ETC                  | MCTD 2756 | 2014/01/03       | 2015/01/02     |
| Log-periodic Antenna  | EMCO                 | 3146      | 2013/10/25       | 2014/10/24     |
| Biconical Antenna     | EMCO                 | 3110      | 2013/10/25       | 2014/10/24     |
| Horn Antenna          | EMCO                 | 3115      | 2013/08/02       | 2014/08/01     |
| Horn Antenna          | EMCO                 | 3116      | 2014/01/15       | 2015/01/14     |
| Horn Antenna          | ETS                  | 3117      | 2013/09/17       | 2014/09/16     |
| Spectrum              | R&S                  | FSP3      | 2013/08/08       | 2014/08/07     |
| Amplifier             | HP                   | 8447D     | 2014/05/29       | 2015/05/28     |
| EMI Test Receiver     | Rohde & Schwarz      | ESU 40    | 2013/09/24       | 2014/09/23     |
| Double Ridged Antenna | EMCO                 | 3115      | 2013/08/02       | 2014/08/01     |
| Attenuator            | WEINSCHL ENGINEERING | AY8986    | 2013/09/16       | 2014/09/15     |
| Amplifier             | HP                   | 83051A    | 2014/05/05       | 2015/05/04     |


Measuring instrument setup in measured frequency band when specified detector function is used :

| Frequency Band (MHz) | Instrument        | Function   | Resolution bandwidth | Video Bandwidth |
|----------------------|-------------------|------------|----------------------|-----------------|
| 30 to 1000           | RF Test Receiver  | Quasi-Peak | 120 kHz              | N/A             |
|                      | Spectrum Analyzer | Peak       | 100 kHz              | 100 kHz         |
| Above 1000           | Spectrum Analyzer | Peak       | 1 MHz                | 1 MHz           |
|                      | Spectrum Analyzer | Average    | 1 MHz                | 10 Hz           |

## 4.4 Radiated Emission Data

### 4.4.1 Tx Portion


#### (1) Test Mode: BR

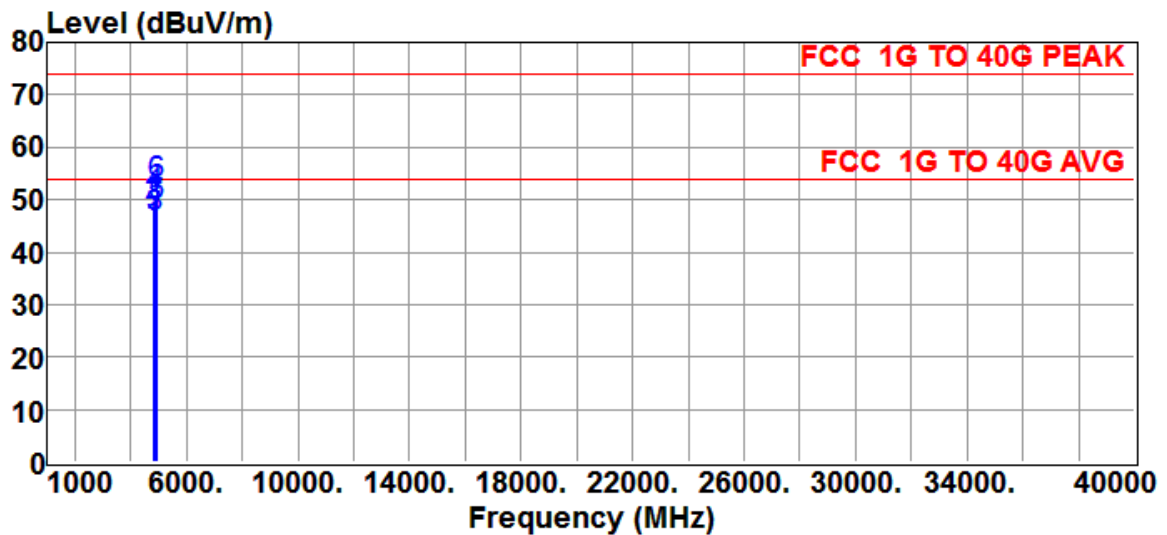Test Date : Jul. 28, 2014      Temperature : 27 °C      Humidity : 56 %

|              |                             |           |                |
|--------------|-----------------------------|-----------|----------------|
| Site         | : Open Site #2              | Date      | : 2014-07-28   |
| EUT          | : Bluetooth Speaker         | Ant. Pol. | : HORIZONTAL   |
| Model        | : DCR006                    | Detector  | :              |
| Power Rating | : 120Vac/60Hz               | Engineer  | : Tien-Lu Liao |
| Limit        | : FCC 1G TO 40G PEAK        | Temp.     | : 27 °C        |
| Memo         | : BR                        | Humi.     | : 56 %         |
| Memo         | : 2402MHz, 2441MHz, 2480MHz |           |                |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4804.3600   | 6.5             | 37.8                       | 44.3             | 54.0             | -9.7             | Average  |
| 4804.3600   | 11.1            | 37.8                       | 48.9             | 74.0             | -25.1            | Peak     |
| 4881.6000   | 8.6             | 37.9                       | 46.5             | 54.0             | -7.5             | Average  |
| 4881.6000   | 12.8            | 37.9                       | 50.7             | 74.0             | -23.3            | Peak     |
| 4959.5800   | 10.8            | 38.1                       | 48.9             | 54.0             | -5.1             | Average  |
| 4959.5800   | 14.8            | 38.1                       | 52.9             | 74.0             | -21.1            | Peak     |

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value = Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

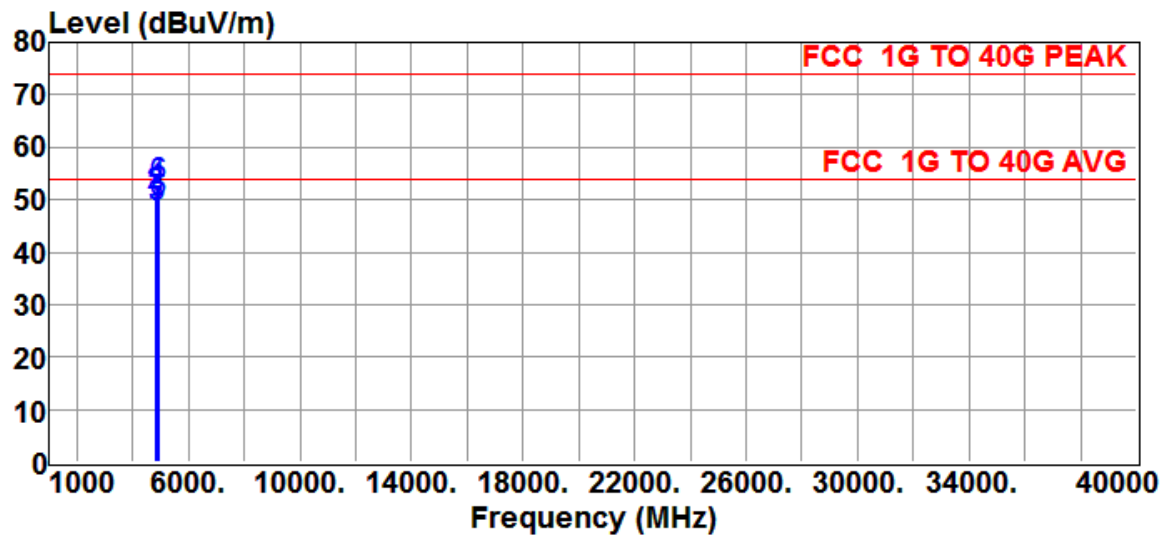


Site : Open Site #2 Date : 2014-07-28  
 EUT : Bluetooth Speaker Ant. Pol. : VERTICAL  
 Model : DCR006 Detector :  
 Power Rating : 120Vac/60Hz Engineer : Tien-Lu Liao  
 Limit : FCC 1G TO 40G PEAK Temp. : 27°C  
 Memo : BR Humi. : 56 %  
 Memo : 2402MHz, 2441MHz, 2480MHz

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4804.3600   | 8.4             | 37.8                       | 46.2             | 54.0             | -7.8             | Average  |
| 4804.3600   | 13.0            | 37.8                       | 50.8             | 74.0             | -23.2            | Peak     |
| 4881.6000   | 10.6            | 37.9                       | 48.5             | 54.0             | -5.5             | Average  |
| 4881.6000   | 14.0            | 37.9                       | 51.9             | 74.0             | -22.1            | Peak     |
| 4959.5800   | 11.2            | 38.1                       | 49.3             | 54.0             | -4.7             | Average  |
| 4959.5800   | 14.6            | 38.1                       | 52.7             | 74.0             | -21.3            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value = Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

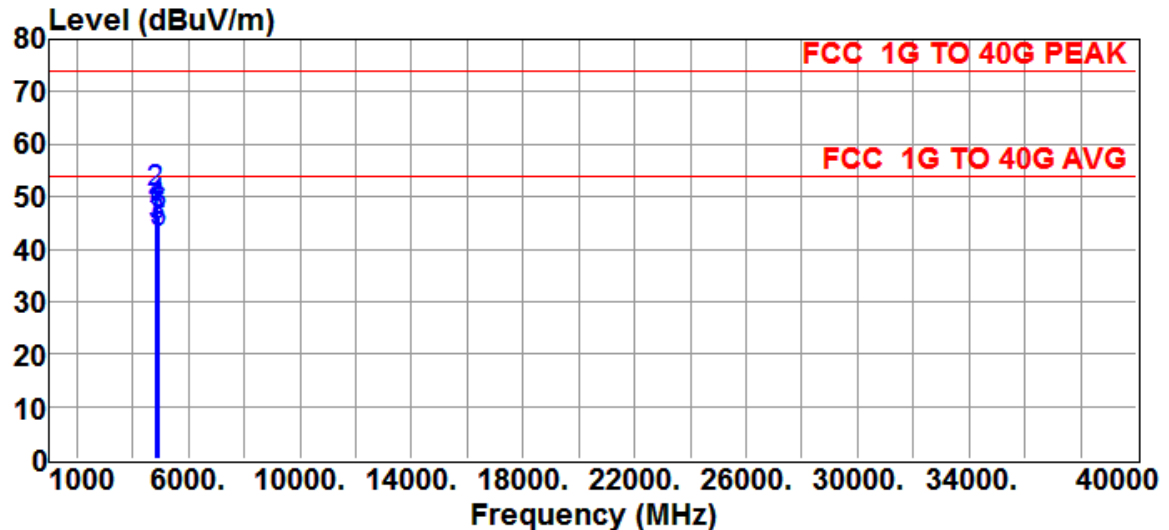
**(2) Test Mode: EDR**Test Date : Jul. 25, 2014      Temperature : 27 °C      Humidity : 56 %

|              |                             |           |                |
|--------------|-----------------------------|-----------|----------------|
| Site         | : Open Site #2              | Date      | : 2014-07-25   |
| EUT          | : Bluetooth Speaker         | Ant. Pol. | : HORIZONTAL   |
| Model        | : DCR006                    | Detector  | :              |
| Power Rating | : 120Vac/60Hz               | Engineer  | : Tien-Lu Liao |
| Limit        | : FCC 1G TO 40G PEAK        | Temp.     | : 27 °C        |
| Memo         | : EDR                       | Humi.     | : 56 %         |
| Memo         | : 2402MHz, 2441MHz, 2480MHz |           |                |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4803.6400   | 8.9             | 37.8                       | 46.7             | 54.0             | -7.3             | Average  |
| 4803.6400   | 12.8            | 37.8                       | 50.6             | 74.0             | -23.4            | Peak     |
| 4881.9200   | 6.3             | 37.9                       | 44.2             | 54.0             | -9.8             | Average  |
| 4881.9200   | 10.4            | 37.9                       | 48.3             | 74.0             | -25.7            | Peak     |
| 4959.5600   | 4.8             | 38.1                       | 42.9             | 54.0             | -11.1            | Average  |
| 4959.5600   | 8.4             | 38.1                       | 46.5             | 74.0             | -27.5            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value = Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

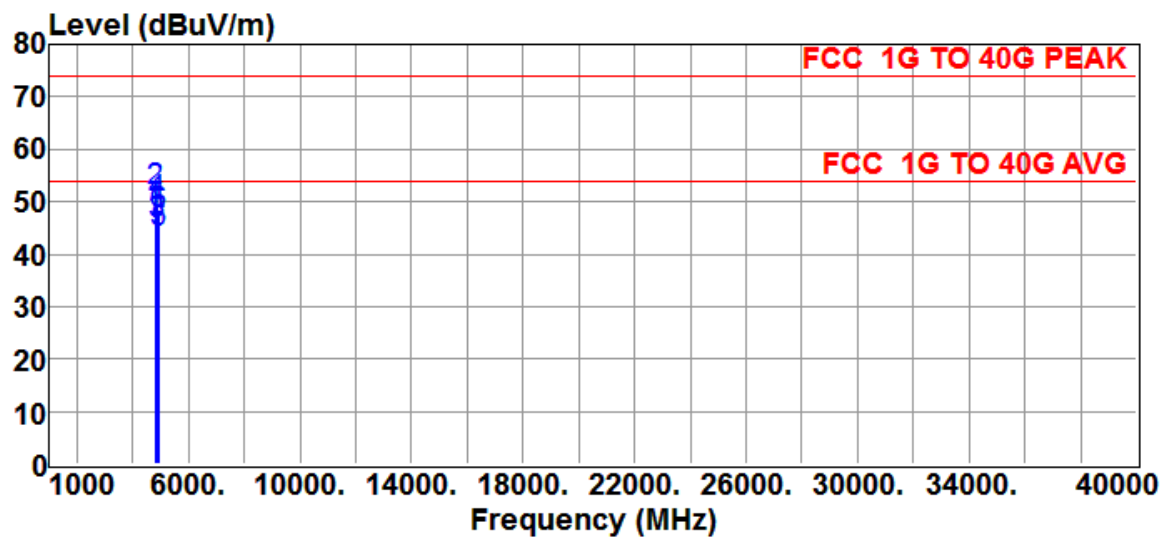


Site : Open Site #2 Date : 2014-07-25  
 EUT : Bluetooth Speaker Ant. Pol. : VERTICAL  
 Model : DCR006 Detector :  
 Power Rating : 120Vac/60Hz Engineer : Tien-Lu Liao  
 Limit : FCC 1G TO 40G PEAK Temp. : 27°C  
 Memo : EDR Humi. : 56 %  
 Memo : 2402MHz, 2441MHz, 2480MHz

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4803.6400   | 10.3            | 37.8                       | 48.1             | 54.0             | -5.9             | Average  |
| 4803.6400   | 14.1            | 37.8                       | 51.9             | 74.0             | -22.1            | Peak     |
| 4881.9200   | 7.7             | 37.9                       | 45.6             | 54.0             | -8.4             | Average  |
| 4881.9200   | 11.8            | 37.9                       | 49.7             | 74.0             | -24.3            | Peak     |
| 4959.5600   | 5.8             | 38.1                       | 43.9             | 54.0             | -10.1            | Average  |
| 4959.5600   | 9.5             | 38.1                       | 47.6             | 74.0             | -26.4            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value = Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

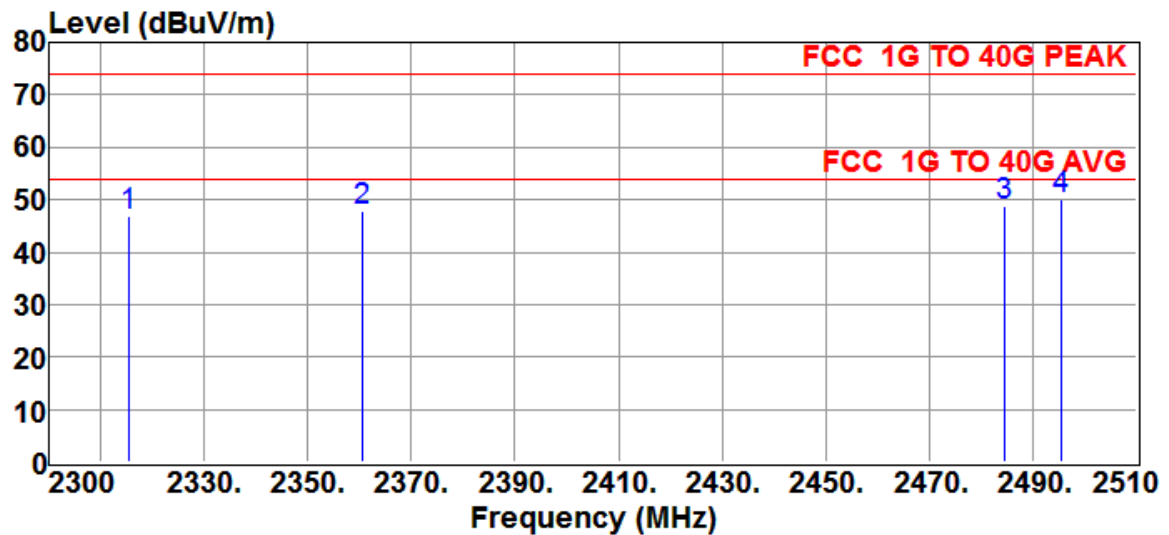
**4.4.2 Radiated Emissions in Restricted Bands****(1) Test Mode: BR**Test Date : Jul. 28, 2014      Temperature : 27 °C      Humidity : 56 %

|              |                     |           |               |
|--------------|---------------------|-----------|---------------|
| Site         | :Open Site #2       | Date      | :2014-07-28   |
| EUT          | :Bluetooth Speaker  | Ant. Pol. | :HORIZONTAL   |
| Model        | :DCR006             | Detector  | :             |
| Power Rating | :120Vac/60Hz        | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC 1G TO 40G PEAK | Temp.     | :27° C        |
| Memo         | :Restricted bands   | Humi.     | :56 %         |
| Memo         | :CH Low & CH High   |           |               |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>(AVG)<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|---------------------------|------------------|----------|
| 2315.5600   | 15.5            | 31.3                       | 46.8             | 54.0                      | -7.2             | Peak     |
| 2360.5400   | 16.4            | 31.5                       | 47.9             | 54.0                      | -6.1             | Peak     |
| 2484.5000   | 17.0            | 31.9                       | 48.9             | 54.0                      | -5.1             | Peak     |
| 2495.6400   | 18.0            | 31.9                       | 49.9             | 54.0                      | -4.1             | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

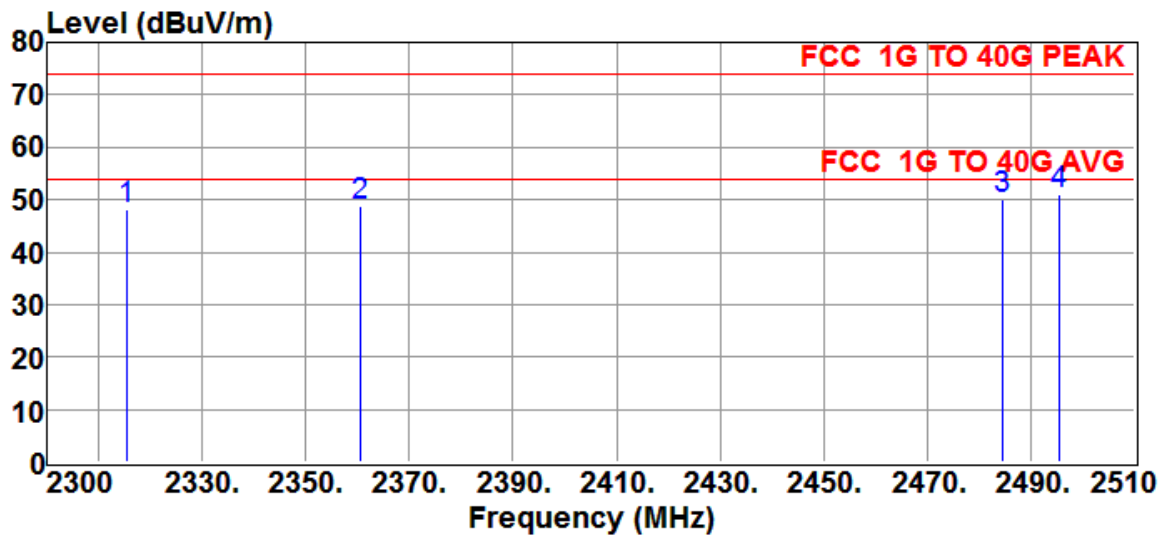


|              |                     |           |               |
|--------------|---------------------|-----------|---------------|
| Site         | :Open Site #2       | Date      | :2014-07-28   |
| EUT          | :Bluetooth Speaker  | Ant. Pol. | :VERTICAL     |
| Model        | :DCR006             | Detector  | :             |
| Power Rating | :120Vac/60Hz        | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC 1G TO 40G PEAK | Temp.     | :27°C         |
| Memo         | :Restricted bands   | Humi.     | :56 %         |
| Memo         | :CH Low & CH High   |           |               |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>(AVG)<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|---------------------------|------------------|----------|
| 2315.5600   | 16.9            | 31.3                       | 48.2             | 54.0                      | -5.8             | Peak     |
| 2360.5400   | 17.4            | 31.5                       | 48.9             | 54.0                      | -5.1             | Peak     |
| 2484.5600   | 18.0            | 31.9                       | 49.9             | 54.0                      | -4.1             | Peak     |
| 2495.6400   | 19.0            | 31.9                       | 50.9             | 54.0                      | -3.1             | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

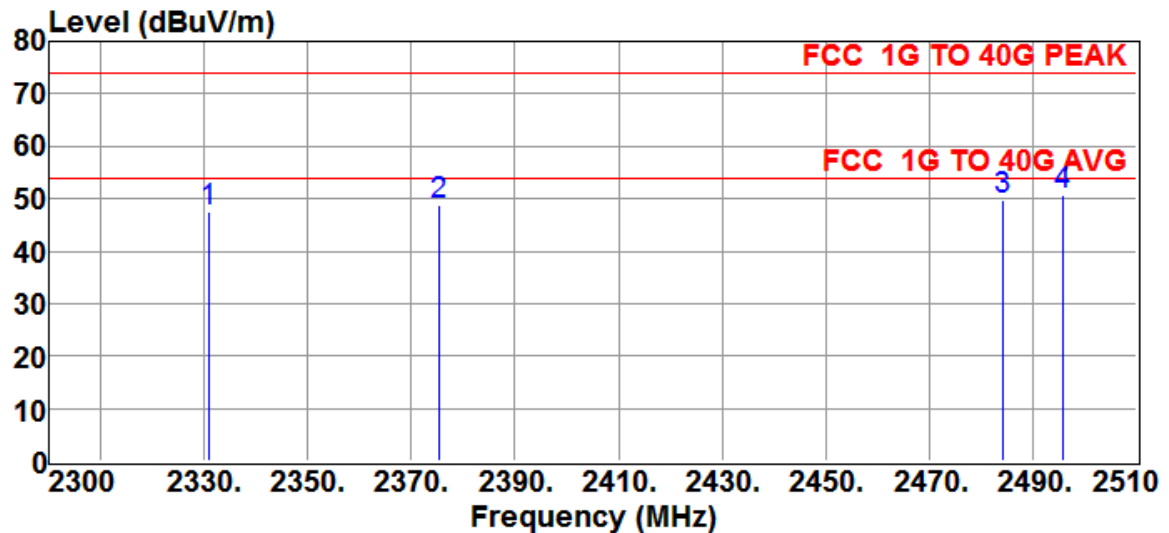
**(2) Test Mode: EDR**Test Date : Jul. 25, 2014Temperature : 27 °CHumidity : 56 %

|              |                     |           |               |
|--------------|---------------------|-----------|---------------|
| Site         | :Open Site #2       | Date      | :2014-07-25   |
| EUT          | :Bluetooth Speaker  | Ant. Pol. | :HORIZONTAL   |
| Model        | :DCR006             | Detector  | :             |
| Power Rating | :120Vac/60Hz        | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC 1G TO 40G PEAK | Temp.     | :27 °C        |
| Memo         | :Restricted bands   | Humi.     | :56 %         |
| Memo         | :CH Low & CH High   |           |               |
| Memo         | :EDR                |           |               |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>(AVG)<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|---------------------------|------------------|----------|
| 2330.8300   | 16.1            | 31.4                       | 47.5             | 54.0                      | -6.5             | Peak     |
| 2375.2500   | 17.3            | 31.6                       | 48.9             | 54.0                      | -5.1             | Peak     |
| 2484.1500   | 17.7            | 31.9                       | 49.6             | 54.0                      | -4.4             | Peak     |
| 2495.6700   | 18.7            | 31.9                       | 50.6             | 54.0                      | -3.4             | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

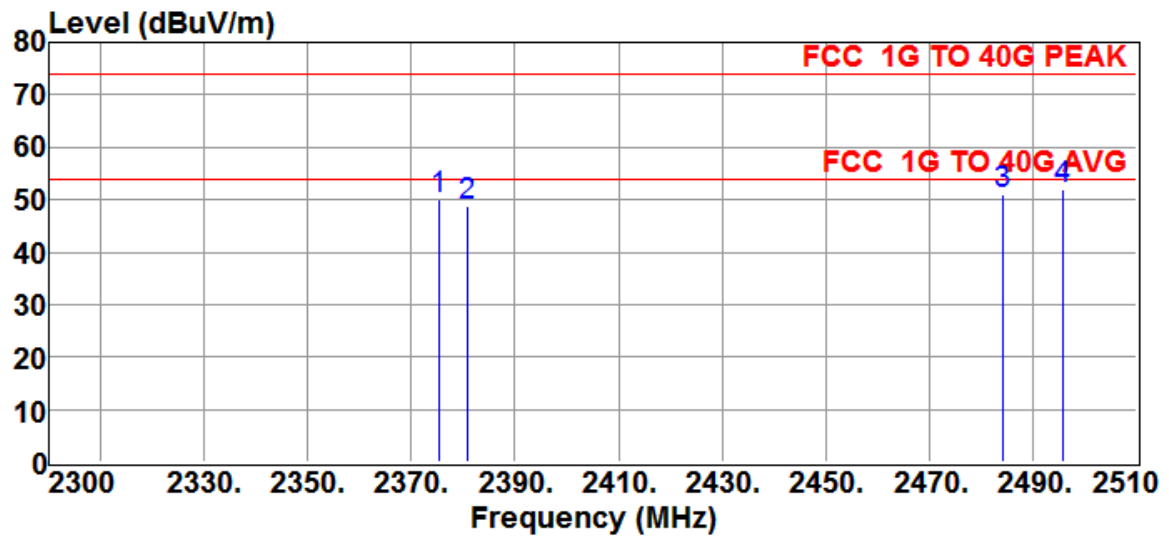

|              |                     |           |               |
|--------------|---------------------|-----------|---------------|
| Site         | :Open Site #2       | Date      | :2014-07-25   |
| EUT          | :Bluetooth Speaker  | Ant. Pol. | :VERTICAL     |
| Model        | :DCR006             | Detector  | :             |
| Power Rating | :120Vac/60Hz        | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC 1G TO 40G PEAK | Temp.     | :27°C         |
| Memo         | :Restricted bands   | Humi.     | :56 %         |
| Memo         | :CH Low & CH High   |           |               |
| Memo         | :EDR                |           |               |


| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>(AVG)<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|---------------------------|------------------|----------|
| 2375.2500   | 18.6            | 31.6                       | 50.2             | 54.0                      | -3.8             | Peak     |
| 2380.8300   | 17.2            | 31.6                       | 48.8             | 54.0                      | -5.2             | Peak     |
| 2484.1500   | 19.0            | 31.9                       | 50.9             | 54.0                      | -3.1             | Peak     |
| 2495.6700   | 20.0            | 31.9                       | 51.9             | 54.0                      | -2.1             | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**4.4.3 Other Emissions****a) Emission frequencies below 1 GHz**

1.Power Source:AC Adapter

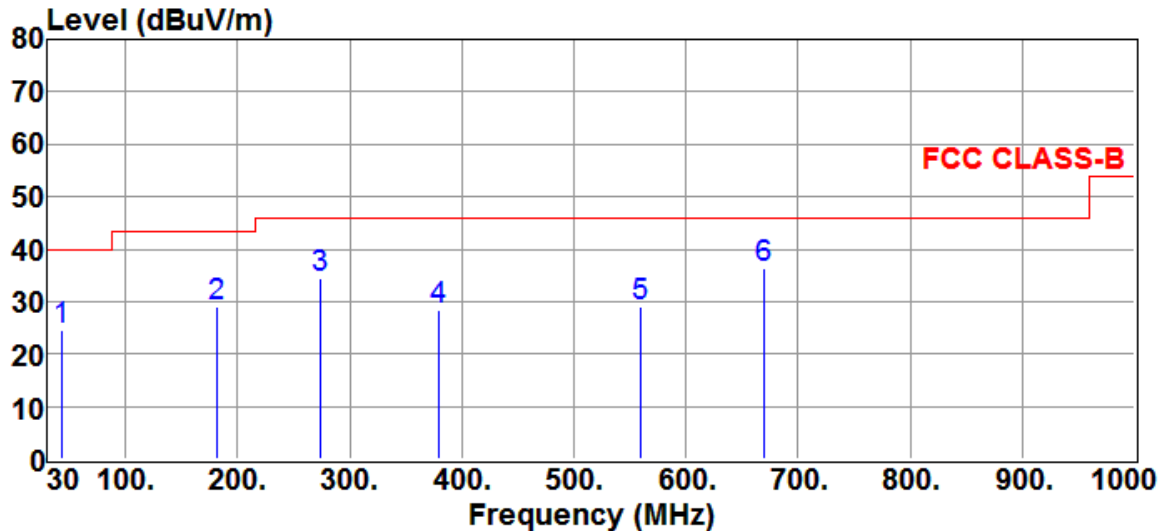


Site :Open Site #2  
 EUT :Bluetooth Speaker  
 Model :DCR006  
 Power Rating :120Vac/60Hz  
 Limit :FCC CLASS-B  
 Memo :AUX IN Play

Date :2014-07-31  
 Ant. Pol. :HORIZONTAL  
 Detector :  
 Engineer :Tien-Lu Liao  
 Temp. :35 °C  
 Humi. :56 %

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 42.6100     | 11.4            | 13.0                       | 24.4             | 40.0             | -15.6            | QP       |
| 182.2900    | 13.8            | 15.2                       | 29.0             | 43.5             | -14.5            | QP       |
| 274.4400    | 18.7            | 15.7                       | 34.4             | 46.0             | -11.6            | QP       |
| 380.1700    | 9.8             | 18.6                       | 28.4             | 46.0             | -17.6            | QP       |
| 559.6200    | 6.5             | 22.4                       | 28.9             | 46.0             | -17.1            | QP       |
| 669.2300    | 11.8            | 24.4                       | 36.2             | 46.0             | -9.8             | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

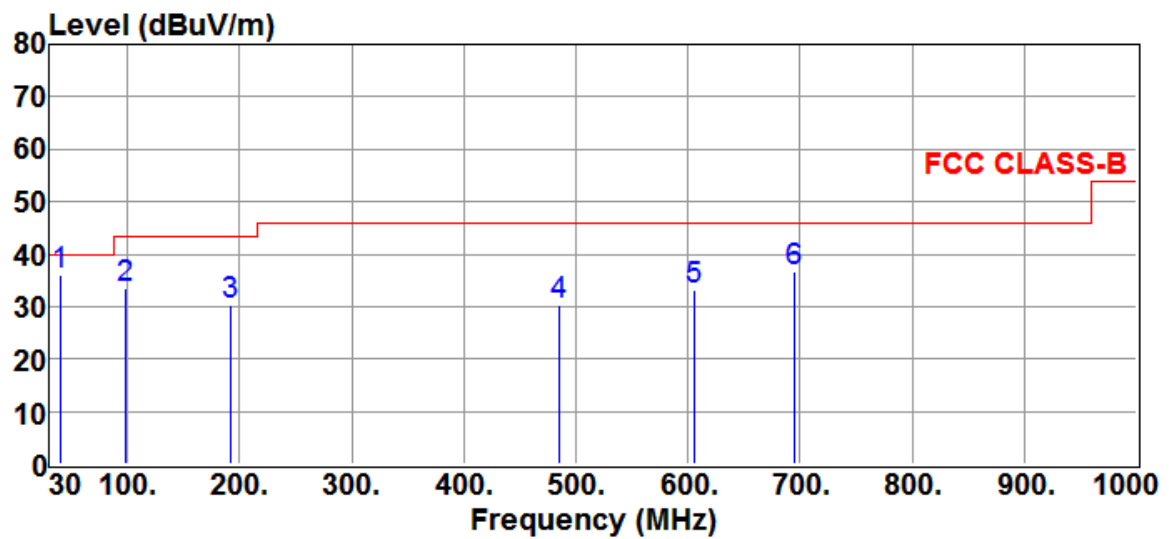


|              |                    |           |               |
|--------------|--------------------|-----------|---------------|
| Site         | :Open Site #2      | Date      | :2014-07-31   |
| EUT          | :Bluetooth Speaker | Ant. Pol. | :VERTICAL     |
| Model        | :DCR006            | Detector  | :             |
| Power Rating | :120Vac/60Hz       | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC CLASS-B       | Temp.     | :35 °C        |
| Memo         | :AUX IN Play       | Humi.     | :56 %         |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 40.6700     | 22.9            | 13.2                       | 36.1             | 40.0             | -3.9             | QP       |
| 98.8700     | 21.9            | 11.5                       | 33.4             | 43.5             | -10.1            | QP       |
| 191.9900    | 14.0            | 16.2                       | 30.2             | 43.5             | -13.3            | QP       |
| 485.9000    | 9.2             | 21.2                       | 30.4             | 46.0             | -15.6            | QP       |
| 605.2100    | 10.0            | 23.1                       | 33.1             | 46.0             | -12.9            | QP       |
| 695.4200    | 11.6            | 25.0                       | 36.6             | 46.0             | -9.4             | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

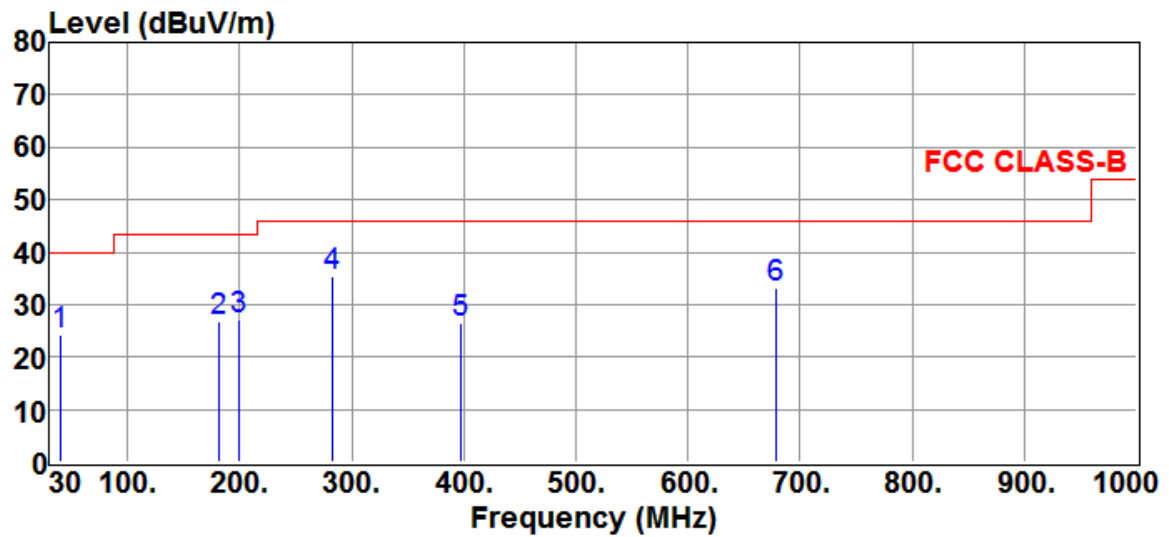


|              |                    |           |               |
|--------------|--------------------|-----------|---------------|
| Site         | :Open Site #2      | Date      | :2014-07-31   |
| EUT          | :Bluetooth Speaker | Ant. Pol. | :HORIZONTAL   |
| Model        | :DCR006            | Detector  | :             |
| Power Rating | :120Vac/60Hz       | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC CLASS-B       | Temp.     | :35 °C        |
| Memo         | :BT Play           | Humi.     | :56 %         |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 40.6700     | 10.9            | 13.2                       | 24.1             | 40.0             | -15.9            | QP       |
| 182.2900    | 11.5            | 15.2                       | 26.7             | 43.5             | -16.8            | QP       |
| 200.1200    | 10.1            | 17.1                       | 27.2             | 43.5             | -16.3            | QP       |
| 282.2000    | 19.0            | 16.3                       | 35.3             | 46.0             | -10.7            | QP       |
| 396.6600    | 7.4             | 19.0                       | 26.4             | 46.0             | -19.6            | QP       |
| 677.9600    | 8.6             | 24.7                       | 33.3             | 46.0             | -12.7            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

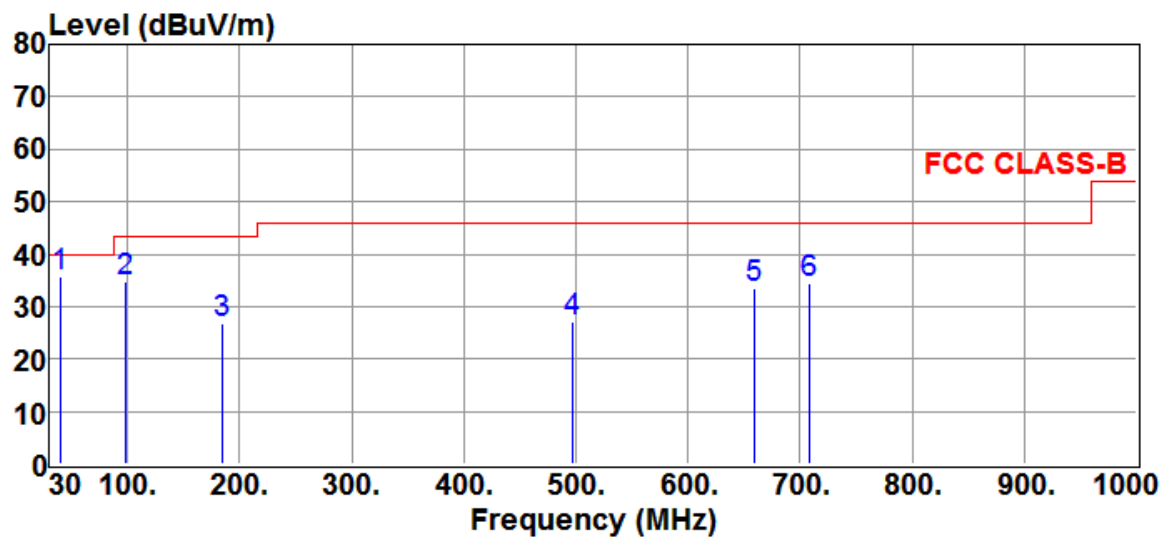


|              |                    |           |               |
|--------------|--------------------|-----------|---------------|
| Site         | :Open Site #2      | Date      | :2014-07-31   |
| EUT          | :Bluetooth Speaker | Ant. Pol. | :VERTICAL     |
| Model        | :DCR006            | Detector  | :             |
| Power Rating | :120Vac/60Hz       | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC CLASS-B       | Temp.     | :35 °C        |
| Memo         | :BT Play           | Humi.     | :56 %         |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 40.6700     | 22.5            | 13.2                       | 35.7             | 40.0             | -4.3             | QP       |
| 98.8700     | 23.1            | 11.5                       | 34.6             | 43.5             | -8.9             | QP       |
| 185.2000    | 11.5            | 15.4                       | 26.9             | 43.5             | -16.6            | QP       |
| 497.5400    | 5.6             | 21.4                       | 27.0             | 46.0             | -19.0            | QP       |
| 659.5300    | 9.2             | 24.2                       | 33.4             | 46.0             | -12.6            | QP       |
| 708.0300    | 9.2             | 25.2                       | 34.4             | 46.0             | -11.6            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

## 2.Power Source:Battery

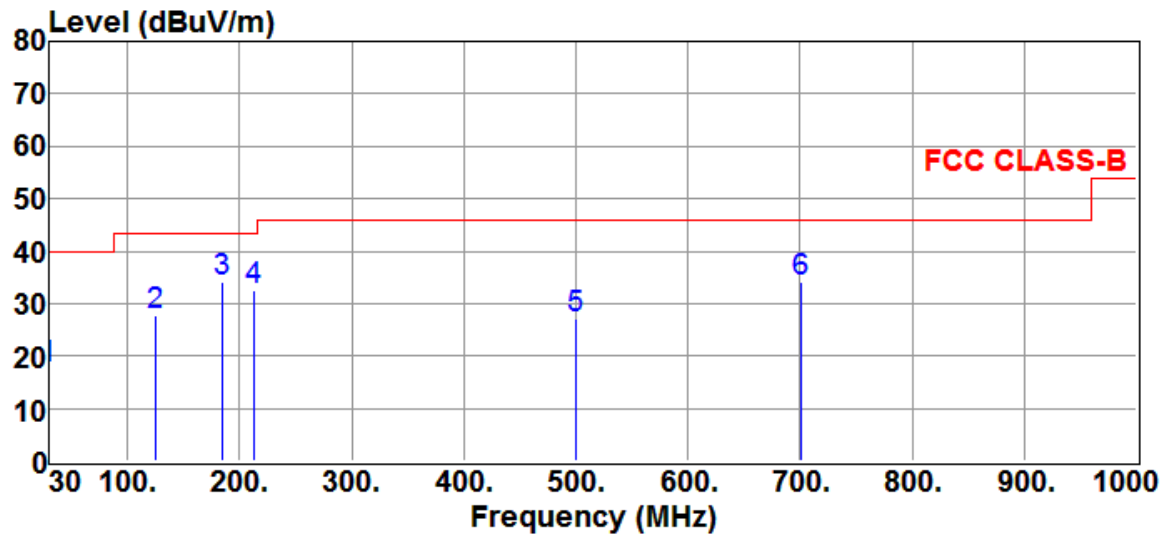


|              |                    |           |               |
|--------------|--------------------|-----------|---------------|
| Site         | :Open Site #2      | Date      | :2014-07-31   |
| EUT          | :Bluetooth Speaker | Ant. Pol. | :HORIZONTAL   |
| Model        | :DCR006            | Detector  | :             |
| Power Rating | :DC 14.4V          | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC CLASS-B       | Temp.     | :35 °C        |
| Memo         | :AUX IN Play       | Humi.     | :56 %         |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 30.0000     | 1.5             | 15.9                       | 17.4             | 40.0             | -22.6            | QP       |
| 125.0600    | 15.0            | 12.8                       | 27.8             | 43.5             | -15.7            | QP       |
| 185.2000    | 18.8            | 15.4                       | 34.2             | 43.5             | -9.3             | QP       |
| 212.3600    | 18.6            | 13.8                       | 32.4             | 43.5             | -11.1            | QP       |
| 499.4800    | 5.7             | 21.5                       | 27.2             | 46.0             | -18.8            | QP       |
| 700.2700    | 9.0             | 25.2                       | 34.2             | 46.0             | -11.8            | QP       |

## Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

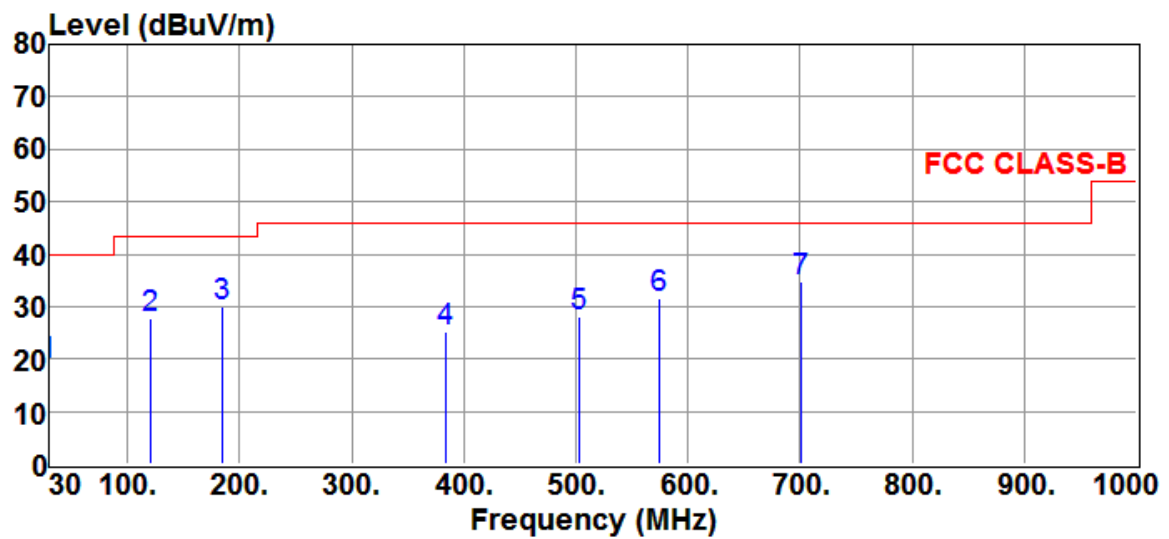


|              |                    |           |               |
|--------------|--------------------|-----------|---------------|
| Site         | :Open Site #2      | Date      | :2014-07-31   |
| EUT          | :Bluetooth Speaker | Ant. Pol. | :VERTICAL     |
| Model        | :DCR006            | Detector  | :             |
| Power Rating | :DC 14.4V          | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC CLASS-B       | Temp.     | :35 °C        |
| Memo         | :AUX IN Play       | Humi.     | :56 %         |

| Freq     | Reading | Correction | Result | Limits | Over limit | Detector |
|----------|---------|------------|--------|--------|------------|----------|
| MHz      | dBuV    | Factor     | dBuV/m | dBuV/m | dB         |          |
| 30.0000  | 2.9     | 15.9       | 18.8   | 40.0   | -21.2      | QP       |
| 120.2100 | 15.3    | 12.4       | 27.7   | 43.5   | -15.8      | QP       |
| 185.2000 | 14.7    | 15.4       | 30.1   | 43.5   | -13.4      | QP       |
| 384.0500 | 6.4     | 18.8       | 25.2   | 46.0   | -20.8      | QP       |
| 502.3900 | 6.5     | 21.5       | 28.0   | 46.0   | -18.0      | QP       |
| 574.1700 | 9.0     | 22.6       | 31.6   | 46.0   | -14.4      | QP       |
| 700.2700 | 9.5     | 25.2       | 34.7   | 46.0   | -11.3      | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

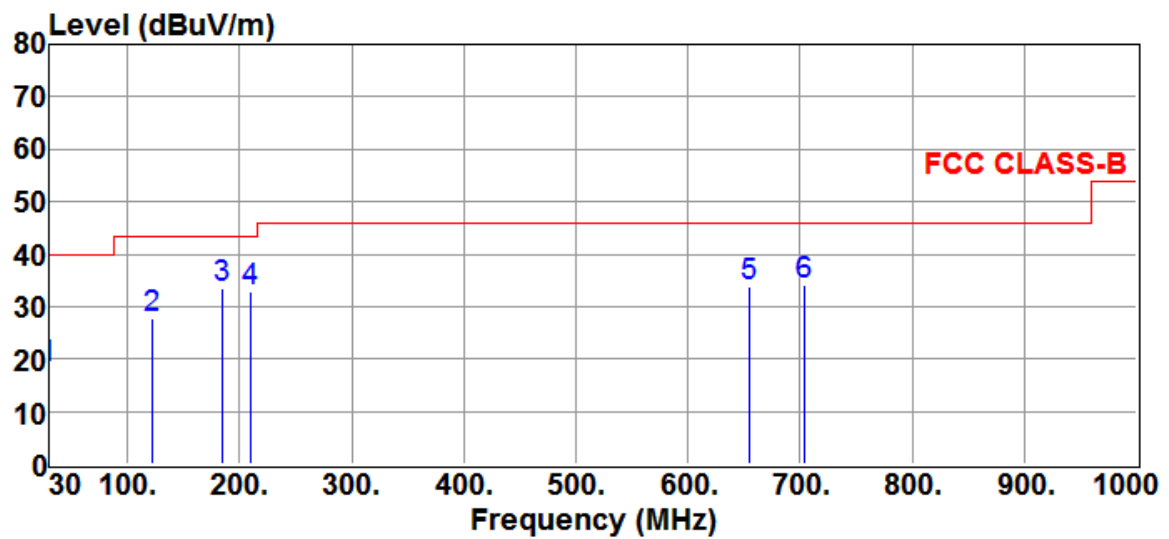


|              |                    |           |               |
|--------------|--------------------|-----------|---------------|
| Site         | :Open Site #2      | Date      | :2014-07-31   |
| EUT          | :Bluetooth Speaker | Ant. Pol. | :HORIZONTAL   |
| Model        | :DCR006            | Detector  | :             |
| Power Rating | :DC 14.4V          | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC CLASS-B       | Temp.     | :35 °C        |
| Memo         | :BT Play           | Humi.     | :56 %         |

| Freq<br>MHz | Reading<br>dBuV | Correction<br>Factor<br>dB | Result<br>dBuV/m | Limits<br>dBuV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 30.0000     | 2.3             | 15.9                       | 18.2             | 40.0             | -21.8            | QP       |
| 122.1500    | 15.0            | 12.6                       | 27.6             | 43.5             | -15.9            | QP       |
| 185.2000    | 18.0            | 15.4                       | 33.4             | 43.5             | -10.1            | QP       |
| 210.4200    | 19.3            | 13.7                       | 33.0             | 43.5             | -10.5            | QP       |
| 654.6800    | 9.7             | 24.1                       | 33.8             | 46.0             | -12.2            | QP       |
| 703.1800    | 8.9             | 25.2                       | 34.1             | 46.0             | -11.9            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

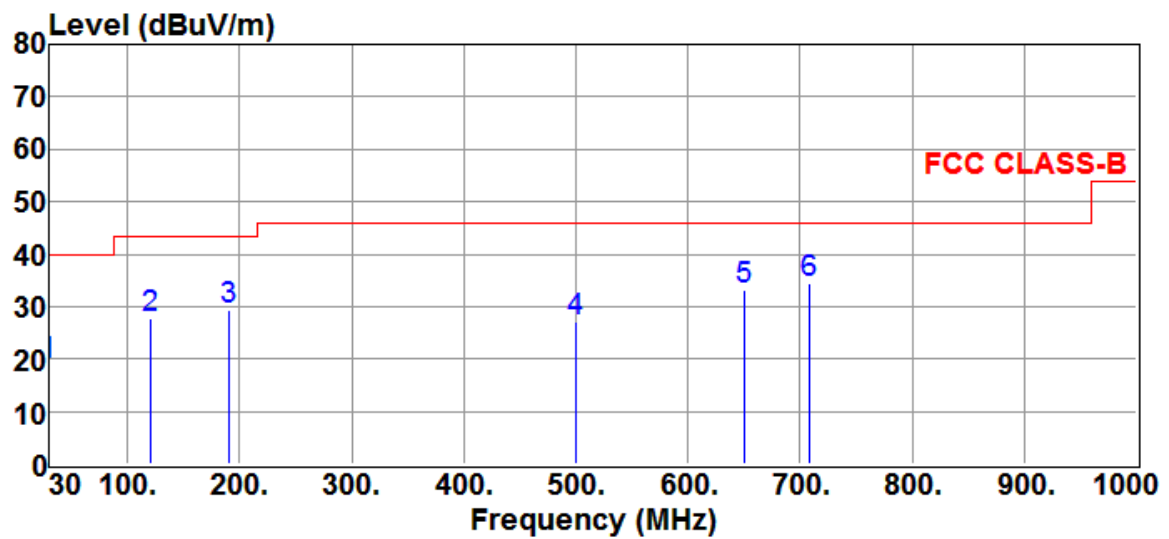

|              |                    |           |               |
|--------------|--------------------|-----------|---------------|
| Site         | :Open Site #2      | Date      | :2014-07-31   |
| EUT          | :Bluetooth Speaker | Ant. Pol. | :VERTICAL     |
| Model        | :DCR006            | Detector  | :             |
| Power Rating | :DC 14.4V          | Engineer  | :Tien-Lu Liao |
| Limit        | :FCC CLASS-B       | Temp.     | :35 °C        |
| Memo         | :BT Play           | Humi.     | :56 %         |

| Freq     | Reading | Correction | Result | Limits | Over limit | Detector |
|----------|---------|------------|--------|--------|------------|----------|
| MHz      | dBuV    | Factor     | dBuV/m | dBuV/m | dB         |          |
| 30.0000  | 2.9     | 15.9       | 18.8   | 40.0   | -21.2      | QP       |
| 120.2100 | 15.4    | 12.4       | 27.8   | 43.5   | -15.7      | QP       |
| 190.0500 | 13.3    | 16.0       | 29.3   | 43.5   | -14.2      | QP       |
| 499.4800 | 5.7     | 21.5       | 27.2   | 46.0   | -18.8      | QP       |
| 649.8300 | 9.1     | 24.0       | 33.1   | 46.0   | -12.9      | QP       |
| 708.0300 | 9.2     | 25.2       | 34.4   | 46.0   | -11.6      | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

**b) Emission frequencies above 1 GHz**

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

**4.5 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\textbf{Result} = \textbf{Reading} + \textbf{Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

## 4.6 Photos of Radiation Measuring Setup

### Test Mode: Adapter



**Test Mode: Battery**



## 5 CONDUCTED EMISSION MEASUREMENT


### 5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.

### 5.2 Measurement Procedure


1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

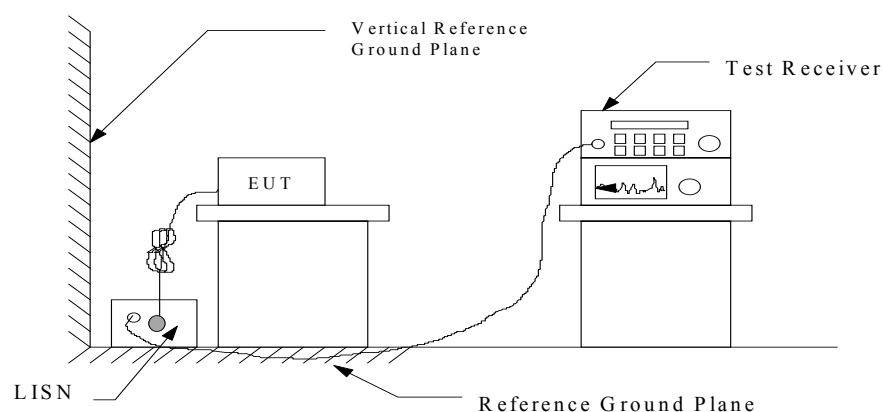

### 5.3 Conducted Emission Data

1. Power Source: AC Adapter

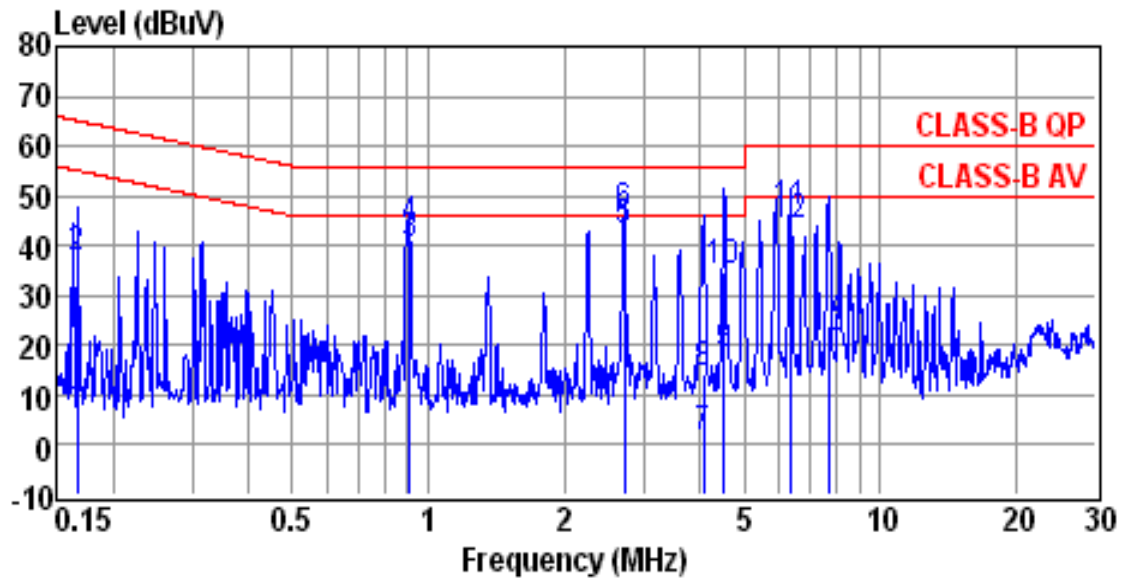

Site : conducted #1

Date : 07-29-2014

Condition : CLASS-B QP

LISN : NEUTRAL

Tem / Hum : 27 °C / 56%

Test Mode : AUX IN

EUT : Bluetooth Speaker


Power Rating : 120Vac/60Hz

| Freq (MHz) | Reading (dBUV) | Factor (dB) | Emission Level (dBUV) | Limit Line (dBUV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1668     | -4.7           | 10.2        | 5.5                   | 55.1              | -49.6           | Average |
| 0.1668     | 27.0           | 10.2        | 37.2                  | 65.1              | -27.9           | QP      |
| 0.9087     | 29.8           | 10.2        | 40.0                  | 46.0              | -6.0            | Average |
| 0.9087     | 33.2           | 10.2        | 43.4                  | 56.0              | -12.6           | QP      |
| 2.7210     | 32.5           | 10.4        | 42.9                  | 46.0              | -3.1            | Average |
| 2.7210     | 35.6           | 10.4        | 46.0                  | 56.0              | -10.0           | QP      |
| 4.0700     | -9.0           | 10.4        | 1.4                   | 46.0              | -44.6           | Average |
| 4.0700     | 3.8            | 10.4        | 14.2                  | 56.0              | -41.8           | QP      |
| 4.5250     | 7.6            | 10.4        | 18.0                  | 46.0              | -28.0           | Average |
| 4.5250     | 24.3           | 10.4        | 34.7                  | 56.0              | -21.3           | QP      |
| 6.3520     | 35.8           | 10.5        | 46.3                  | 50.0              | -3.7            | Average |
| 6.3520     | 33.3           | 10.5        | 43.8                  | 60.0              | -16.2           | QP      |
| 7.6870     | 10.9           | 10.5        | 21.4                  | 50.0              | -28.6           | Average |
| 7.6870     | 13.3           | 10.5        | 23.8                  | 60.0              | -36.2           | QP      |

Note :

1. Result = Reading + Factor

2. Factor = LISN Factor + Cable Loss

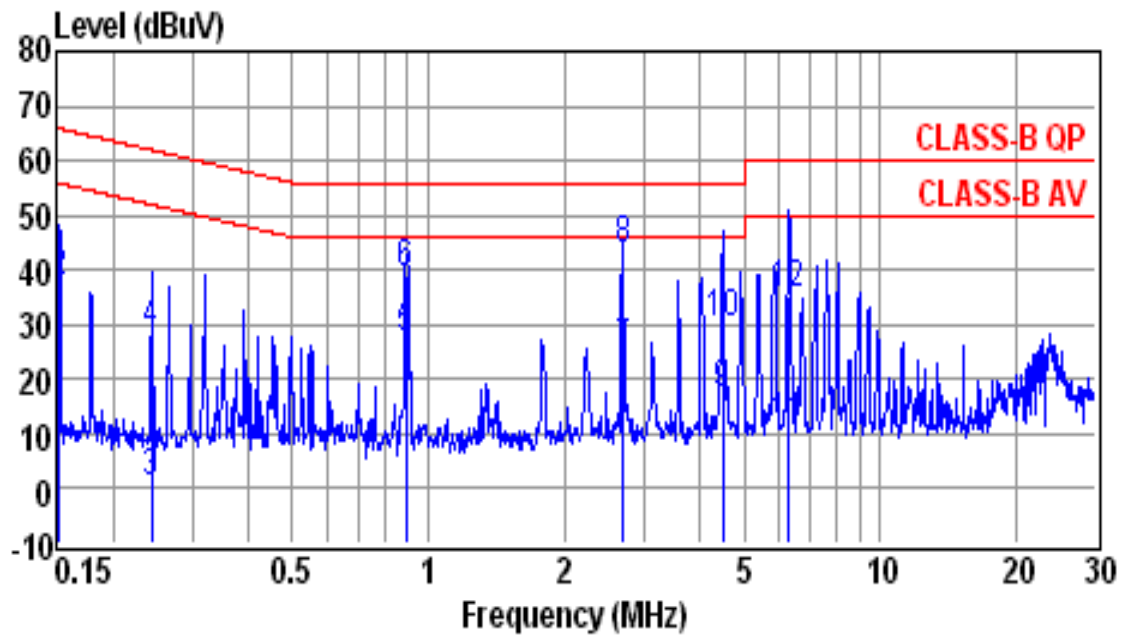

Site : conducted #1

Date : 07-29-2014

Condition : CLASS-B QP

LISN : LINE

Tem / Hum : 27 °C / 56%

Test Mode : AUX IN

EUT : Bluetooth Speaker


Power Rating : 120Vac/60Hz

| Freq (MHz) | Reading (dBuV) | Factor (dB) | Emission Level (dBuV) | Limit Line (dBuV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1524     | -5.5           | 10.1        | 4.6                   | 55.9              | -51.3           | Average |
| 0.1524     | 27.6           | 10.1        | 37.7                  | 65.9              | -28.2           | QP      |
| 0.2442     | -9.4           | 10.1        | 0.7                   | 52.0              | -51.3           | Average |
| 0.2442     | 18.4           | 10.1        | 28.5                  | 62.0              | -33.5           | QP      |
| 0.8944     | 16.8           | 10.2        | 27.0                  | 46.0              | -19.0           | Average |
| 0.8944     | 28.9           | 10.2        | 39.1                  | 56.0              | -16.9           | QP      |
| 2.7070     | 14.2           | 10.4        | 24.6                  | 46.0              | -21.4           | Average |
| 2.7070     | 33.2           | 10.4        | 43.6                  | 56.0              | -12.4           | QP      |
| 4.5010     | 6.3            | 10.4        | 16.7                  | 46.0              | -29.3           | Average |
| 4.5010     | 19.2           | 10.4        | 29.6                  | 56.0              | -26.4           | QP      |
| 6.2520     | 0.3            | 10.5        | 10.8                  | 50.0              | -39.2           | Average |
| 6.2520     | 24.8           | 10.5        | 35.3                  | 60.0              | -24.7           | QP      |

Note :

1. Result = Reading + Factor

2. Factor = LISN Factor + Cable Loss

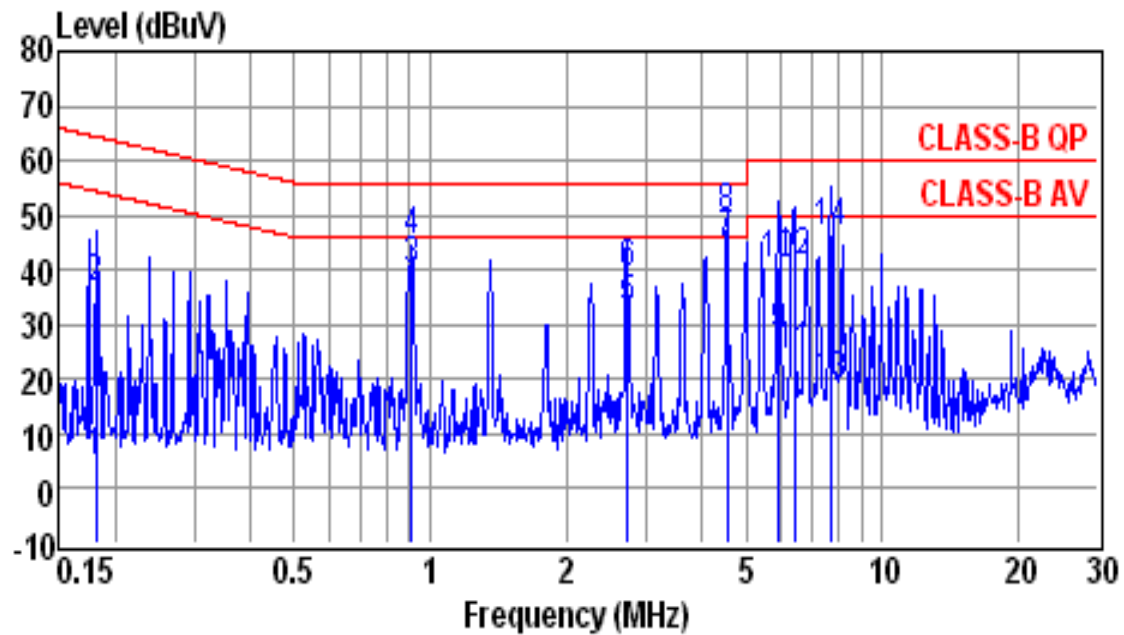


Site : conducted #1 Date : 07-29-2014  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 27 °C / 56% Test Mode : BT PLAY  
 EUT : Bluetooth Speaker Power Rating : 120Vac/60Hz

| Freq (MHz) | Reading (dBuV) | Factor (dB) | Emission Level (dBuV) | Limit Line (dBuV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1815     | -5.6           | 10.2        | 4.6                   | 54.4              | -49.8           | Average |
| 0.1815     | 26.4           | 10.2        | 36.6                  | 64.4              | -27.8           | QP      |
| 0.9087     | 29.2           | 10.2        | 39.4                  | 46.0              | -6.6            | Average |
| 0.9087     | 34.9           | 10.2        | 45.1                  | 56.0              | -10.9           | QP      |
| 2.7360     | 22.0           | 10.4        | 32.4                  | 46.0              | -13.6           | Average |
| 2.7360     | 28.9           | 10.4        | 39.3                  | 56.0              | -16.7           | QP      |
| 4.5490     | 33.8           | 10.4        | 44.2                  | 46.0              | -1.8            | Average |
| 4.5490     | 38.7           | 10.4        | 49.1                  | 56.0              | -6.9            | QP      |
| 5.8980     | 17.0           | 10.5        | 27.5                  | 50.0              | -22.5           | Average |
| 5.8980     | 30.2           | 10.5        | 40.7                  | 60.0              | -19.3           | QP      |
| 6.3860     | 13.3           | 10.5        | 23.8                  | 50.0              | -26.2           | Average |
| 6.3860     | 30.7           | 10.5        | 41.2                  | 60.0              | -18.8           | QP      |
| 7.6870     | 8.2            | 10.5        | 18.7                  | 50.0              | -31.3           | Average |
| 7.6870     | 35.8           | 10.5        | 46.3                  | 60.0              | -13.7           | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

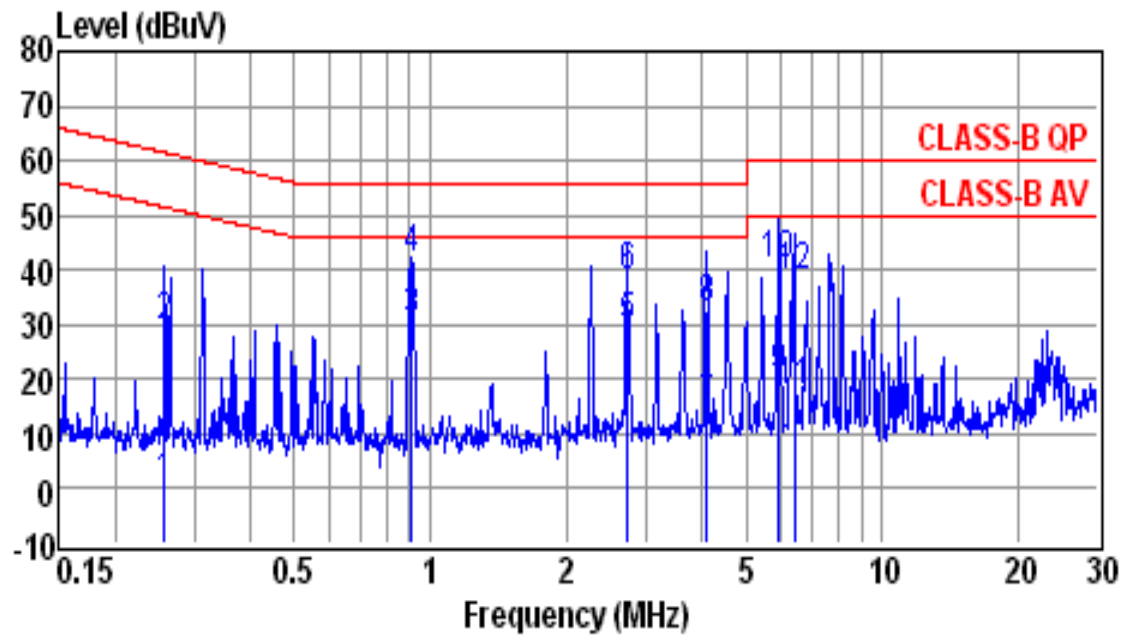

Site : conducted #1 Date : 07-29-2014  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 27 °C / 56% Test Mode : BT PLAY  
 EUT : Bluetooth Speaker Power Rating : 120Vac/60Hz

| Freq (MHz) | Reading (dBuV) | Factor (dB) | Emission Level (dBuV) | Limit Line (dBuV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.2575     | -9.7           | 10.1        | 0.4                   | 51.5              | -51.1           | Average |
| 0.2575     | 19.0           | 10.1        | 29.1                  | 61.5              | -32.4           | QP      |
| 0.9087     | 20.1           | 10.2        | 30.3                  | 46.0              | -15.7           | Average |
| 0.9087     | 31.7           | 10.2        | 41.9                  | 56.0              | -14.1           | QP      |
| 2.7360     | 18.7           | 10.4        | 29.1                  | 46.0              | -16.9           | Average |
| 2.7360     | 28.2           | 10.4        | 38.6                  | 56.0              | -17.4           | QP      |
| 4.0920     | 3.8            | 10.4        | 14.2                  | 46.0              | -31.8           | Average |
| 4.0920     | 22.2           | 10.4        | 32.6                  | 56.0              | -23.4           | QP      |
| 5.8980     | 9.5            | 10.5        | 20.0                  | 50.0              | -30.0           | Average |
| 5.8980     | 30.1           | 10.5        | 40.6                  | 60.0              | -19.4           | QP      |
| 6.3860     | 7.2            | 10.5        | 17.7                  | 50.0              | -32.3           | Average |
| 6.3860     | 27.7           | 10.5        | 38.2                  | 60.0              | -21.8           | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

## 5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB  $\mu$  V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB  $\mu$  V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

## 5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| EMI Test Receiver | Rohde & Schwarz | ESCI      | 2013/08/02       | 2014/08/01     |
| LISN              | Shibasoku       | 563       | 2014/01/21       | 2015/01/20     |
| LISN              | Rohde & Schwarz | ESH2-Z5   | 2014/04/08       | 2015/04/07     |

## 5.6 Photos of Conduction Measuring Setup



## **6 ANTENNA REQUIREMENT**

### **6.1 Standard Applicable**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2 Antenna Construction**

The antenna is permanently mounted on main PCB, no consideration of replacement.  
Please see photos submitted in Exhibit B.

## 7 HOPPING CHANNEL SEPARATION


### 7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels  
Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span  
Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



### 7.3 Measurement Equipment

| Equipment  | Manufacturer          | Model No. | Calibration Date | Next Cal. Date |
|------------|-----------------------|-----------|------------------|----------------|
| Spectrum   | Rohde & Schwarz       | FSP40     | 2014/01/21       | 2015/01/20     |
| Attenuator | Weinschel Engineering | AY7602    | 2013/09/16       | 2014/09/15     |

### 7.4 Measurement Data

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

Test Mode: BR


- a) Channel Low : Adjacent Hopping Channel Separation is 1.000 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1.000 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1.000 MHz

Test Mode: EDR


- a) Channel Low : Adjacent Hopping Channel Separation is 1.002 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1.002 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1.008 MHz


**Note : The expanded uncertainty:  $\text{frequency} \times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).**


Test Mode: BR  
Channel Low

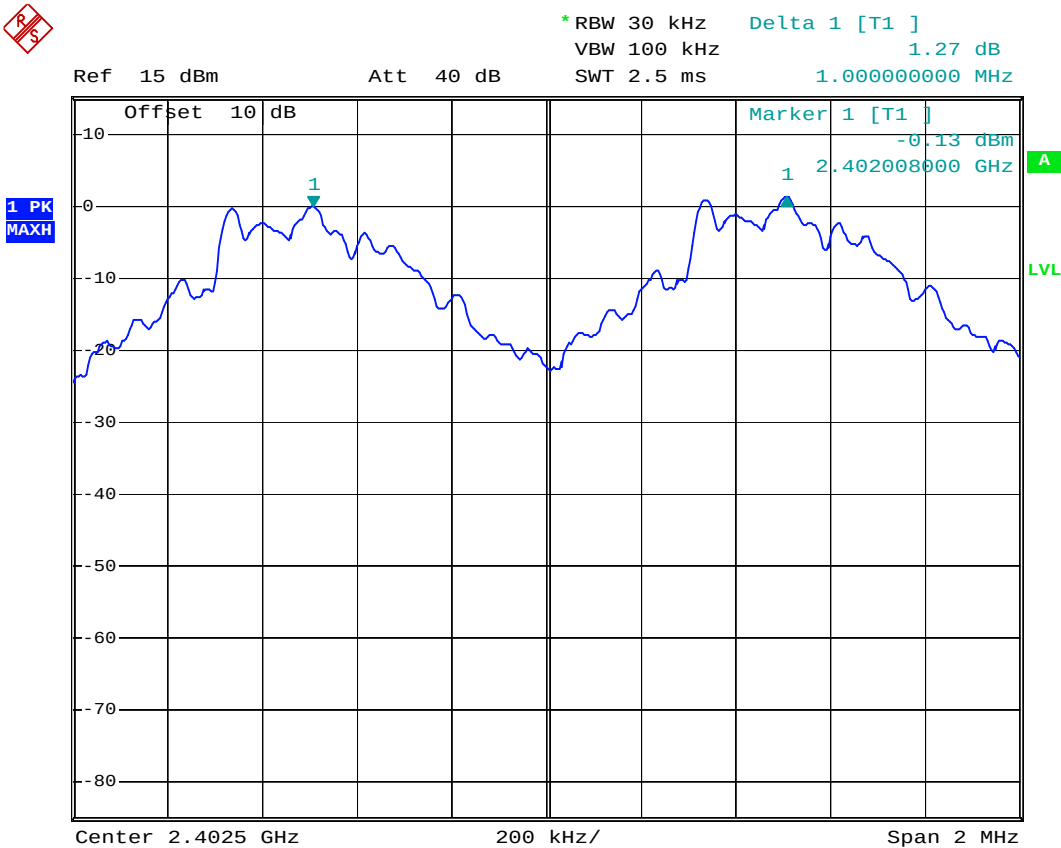


Channel Middle

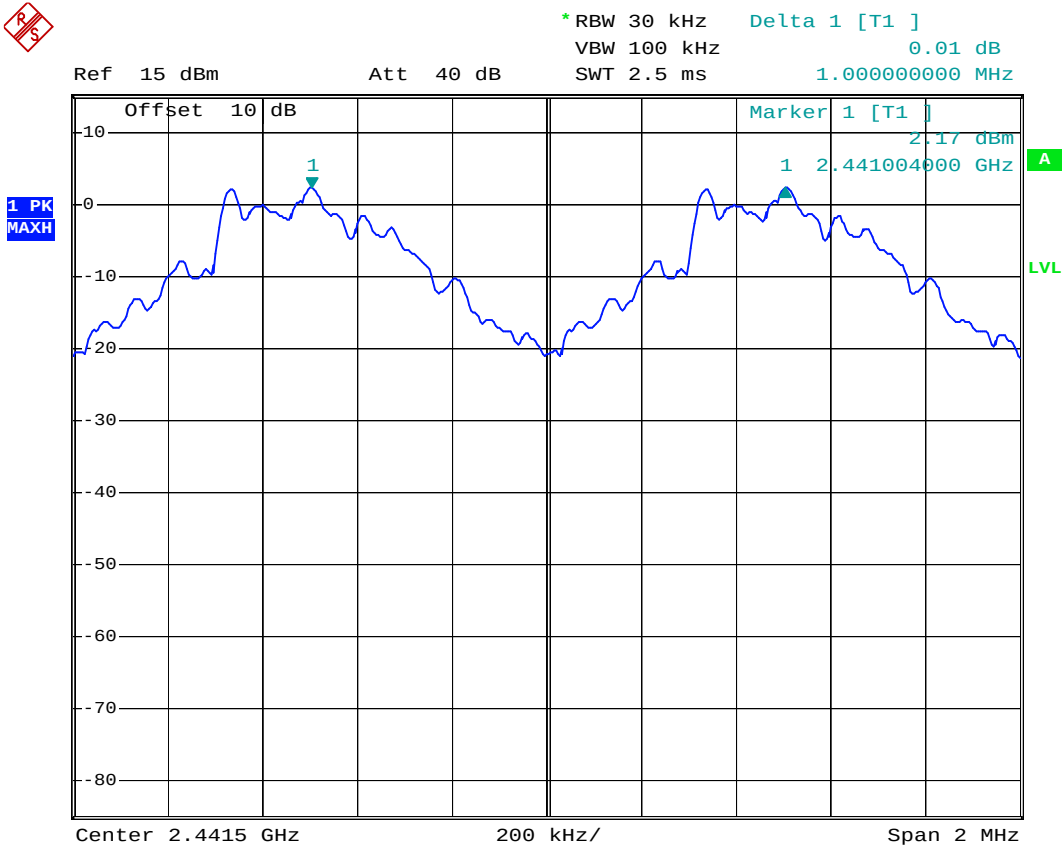




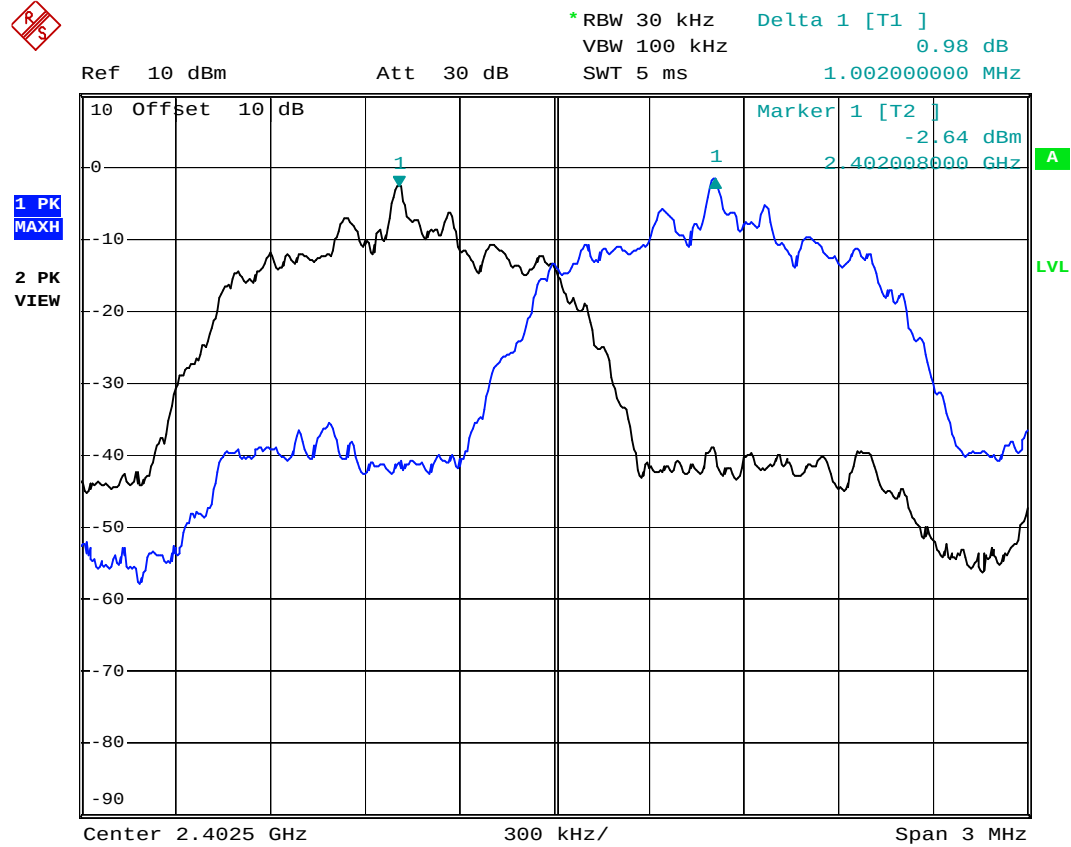**Test Mode: EDR****Channel Low**

Channel Middle

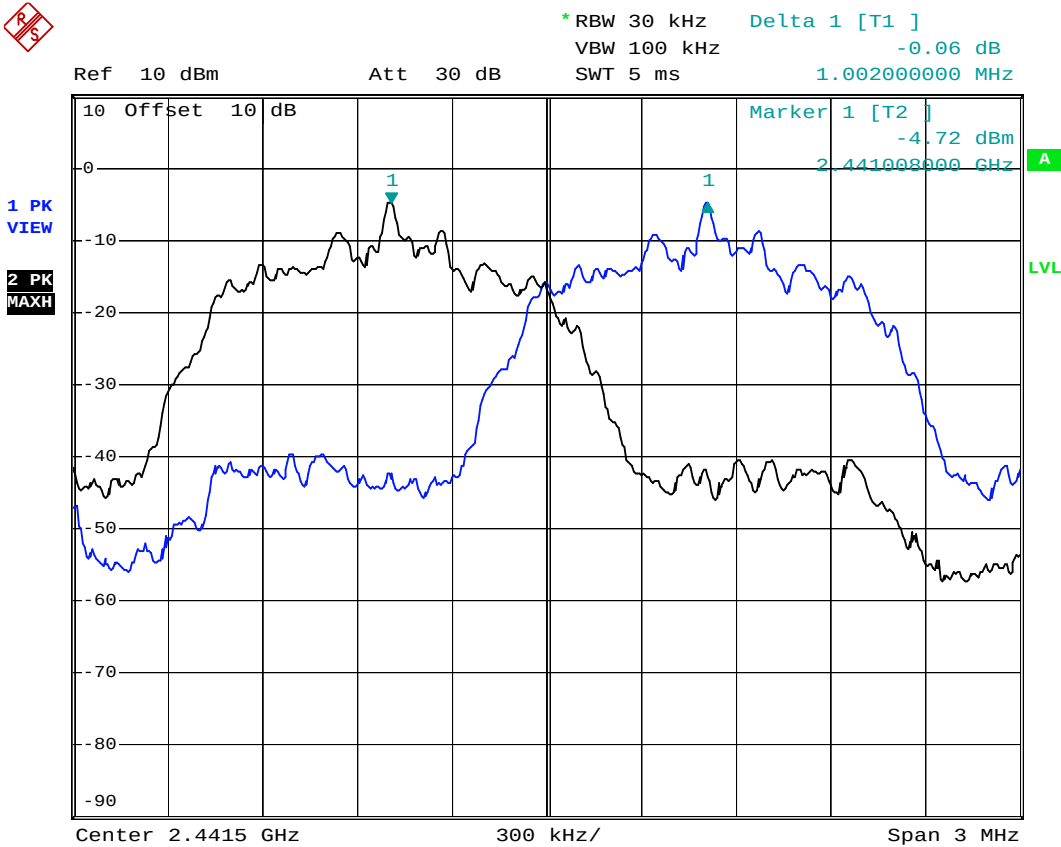

Channel High

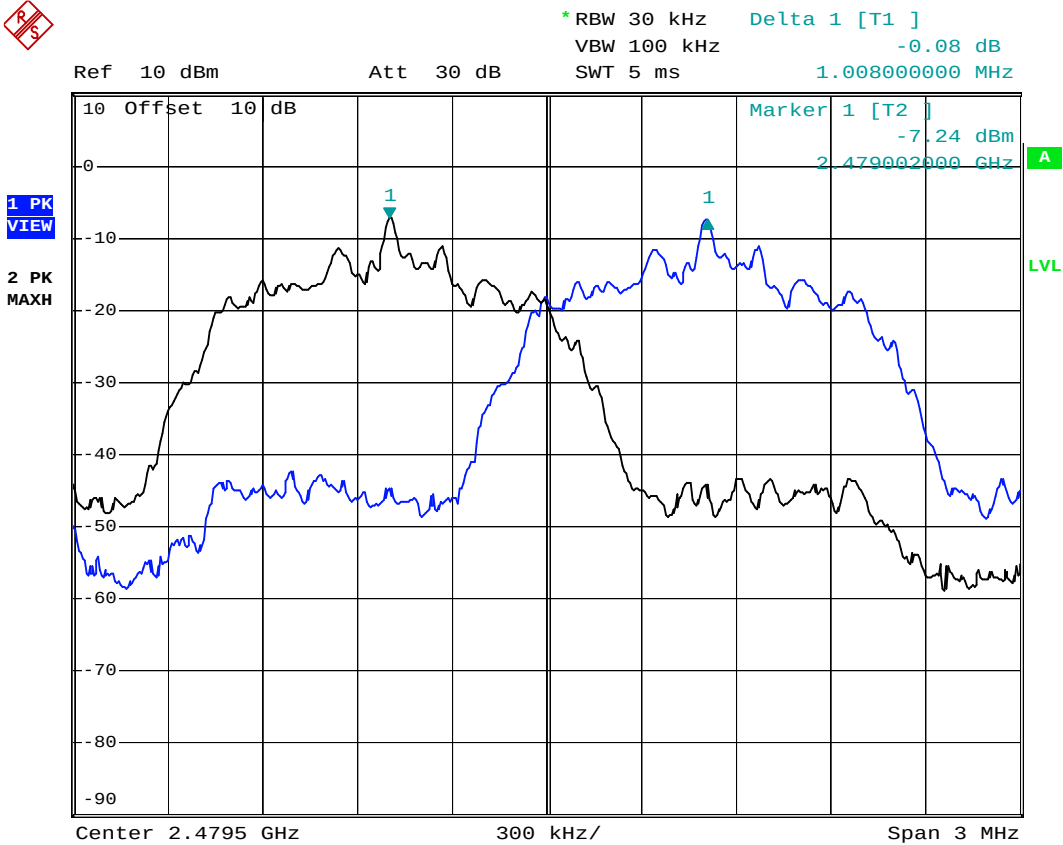

## 8 NUMBER OF HOPPING FREQUENCY USED

### 8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.  
Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:  
Span = the frequency band of operation  
RBW  $\geq$  1% of the span  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 8.3 Measurement Equipment

| Equipment  | Manufacturer             | Model No. | Calibration Date | Next Cal. Date |
|------------|--------------------------|-----------|------------------|----------------|
| Spectrum   | Rohde & Schwarz          | FSP40     | 2014/01/21       | 2015/01/20     |
| Attenuator | Weinschel<br>Engineering | AY7602    | 2013/09/16       | 2014/09/15     |

## 8.4 Measurement Data

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

Test Mode: BR

There are 79 hopping frequencies used.

### **Justification on AFH mode:**

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may reduced in AFH mode but at least 15 channels will be used, normally AFH mode has 20 channels.

***Note : The expanded uncertainty: frequency  $\times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).***

Test Mode: EDR

There are 79 hopping frequencies used.

### **Justification on AFH mode:**

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may reduced in AFH mode but at least 15 channels will be used, normally AFH mode has 20 channels.

***Note : The expanded uncertainty: frequency  $\times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).***

Test Mode: BR





\* RBW 100 kHz  
VBW 300 kHz  
SWT 5 ms

Ref 15 dBm

Att 40 dB


SWT 5 ms

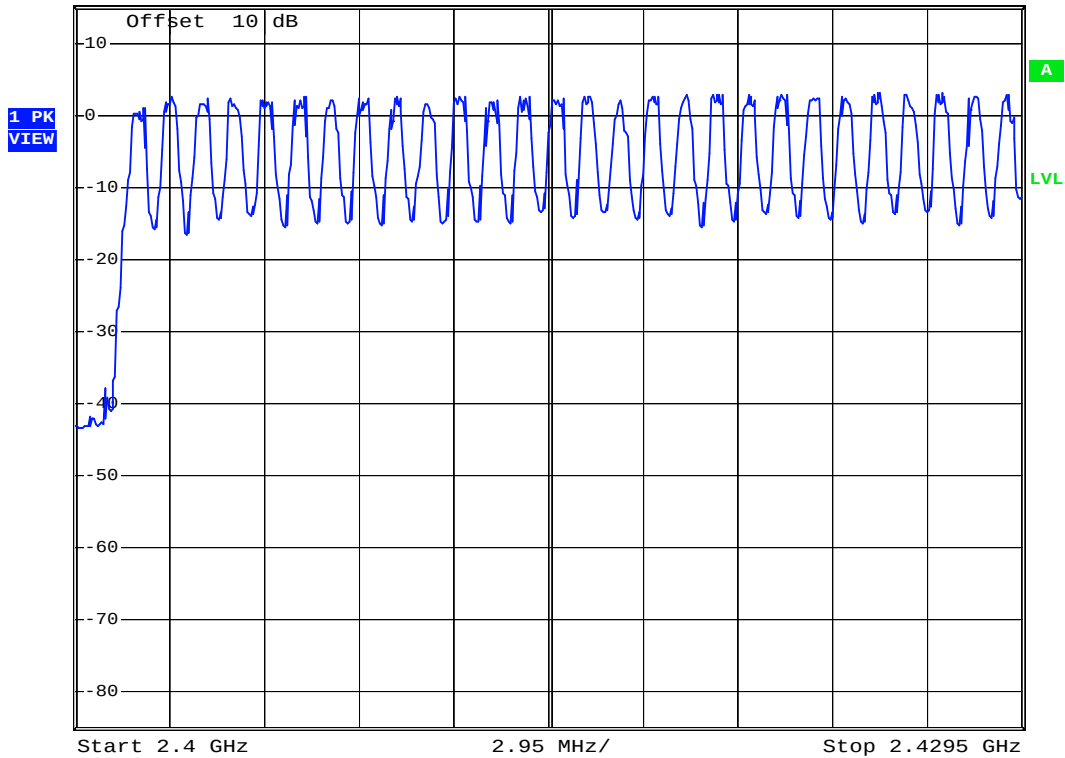






\* RBW 100 kHz  
VBW 300 kHz  
SWT 2.5 ms

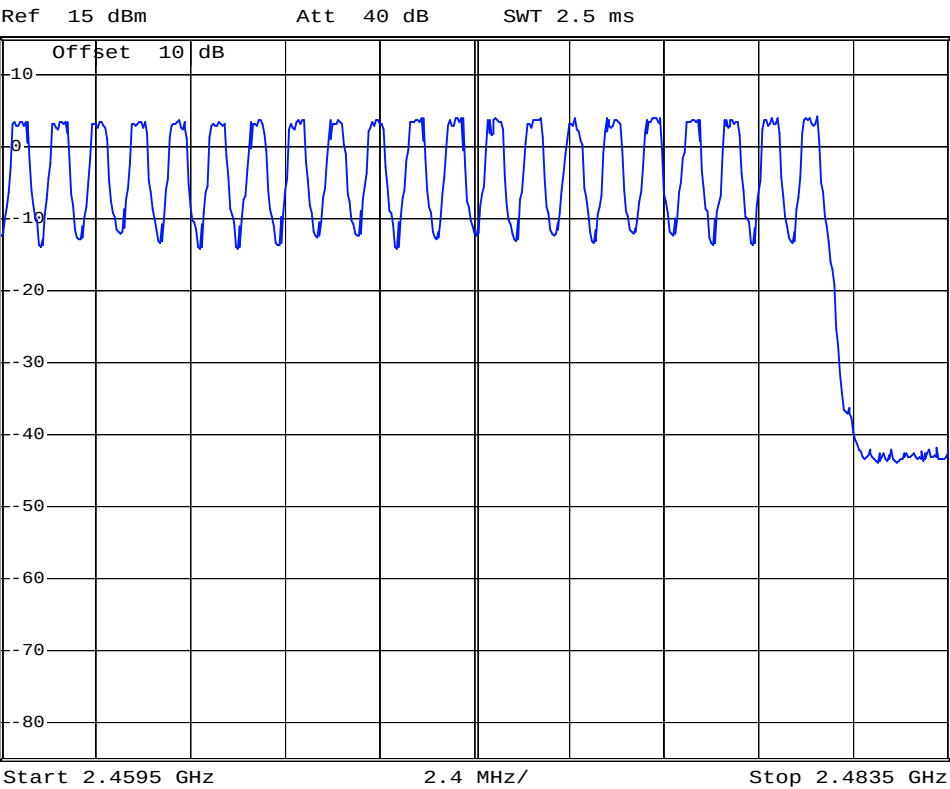

Test Mode: EDR

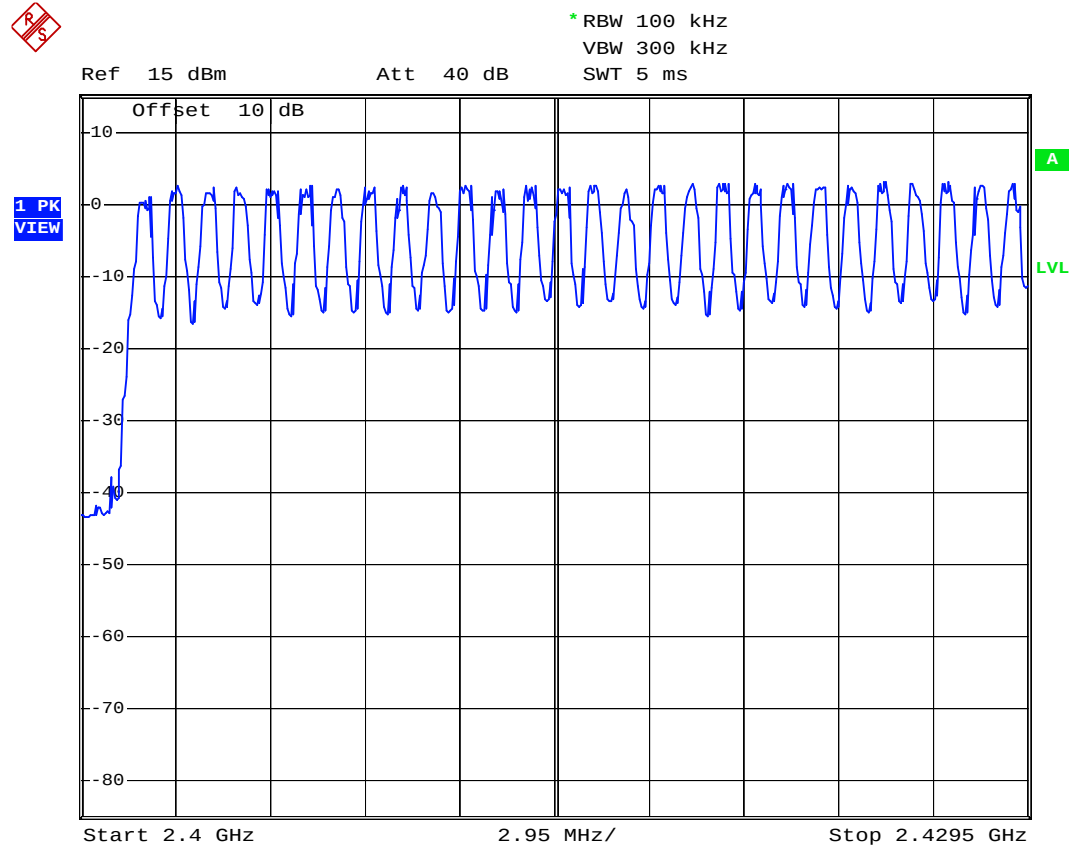




\* RBW 100 kHz  
VBW 300 kHz  
SWT 5 ms

Ref 15 dBm

Att 40 dB

SWT 5 ms

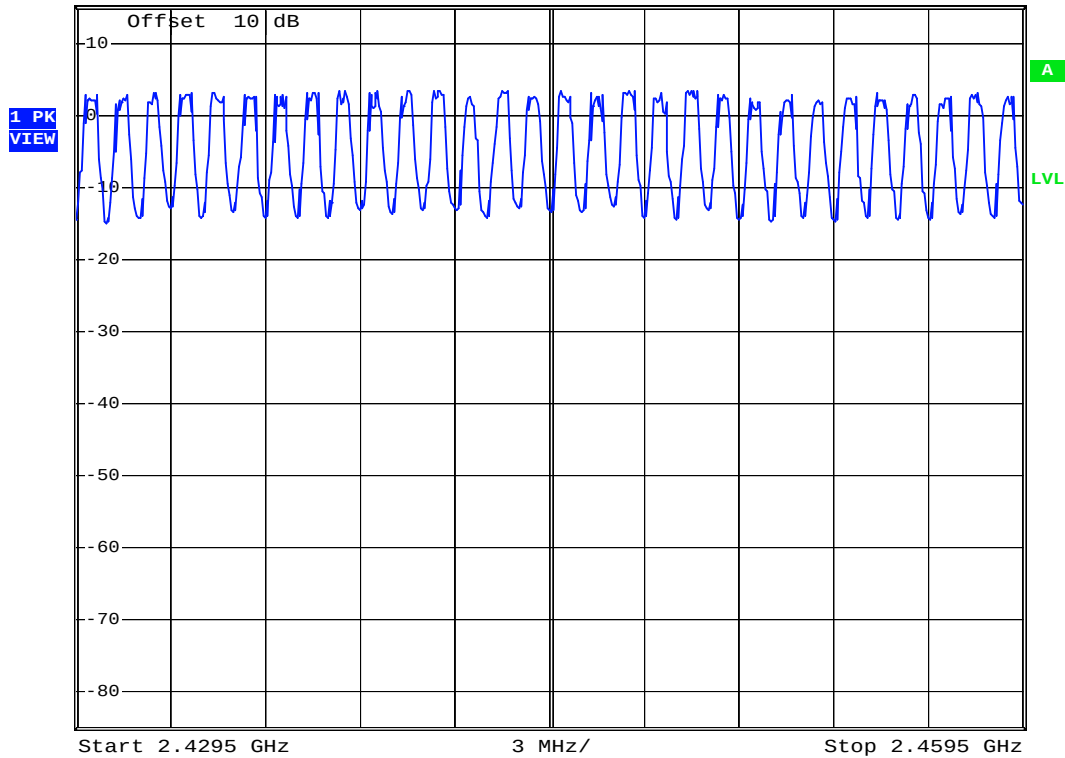




\* RBW 100 kHz  
VBW 300 kHz  
SWT 2.5 ms

Ref 15 dBm

Att 40 dB

SWT 2.5 ms

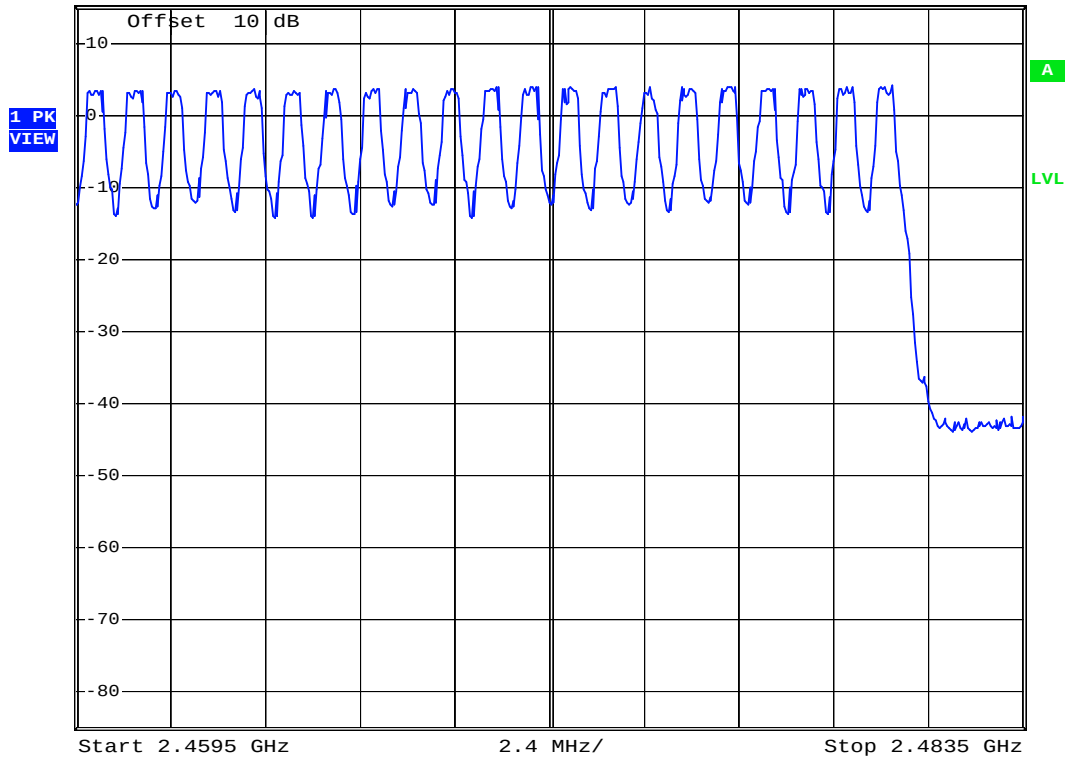

## 9 CHANNEL BANDWIDTH

### 9.1 Standard Applicable

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
  - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
  - RBW  $\geq$  1% of the 20 dB bandwidth
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 9.3 Measurement Equipment

| Equipment  | Manufacturer             | Model No. | Calibration Date | Next Cal. Date |
|------------|--------------------------|-----------|------------------|----------------|
| Spectrum   | Rohde & Schwarz          | FSP40     | 2014/01/21       | 2015/01/20     |
| Attenuator | Weinschel<br>Engineering | AY7602    | 2013/09/16       | 2014/09/15     |

### 9.4 Measurement Data

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

Test Mode: BR

- a) Channel Low : Channel Bandwidth is 0.884 MHz
- b) Channel Middle : Channel Bandwidth is 0.884 MHz
- c) Channel High : Channel Bandwidth is 0.884 MHz

Test Mode: EDR

- a) Channel Low : Channel Bandwidth is 1.208 MHz
- b) Channel Middle : Channel Bandwidth is 1.208 MHz
- c) Channel High : Channel Bandwidth is 1.208 MHz

**Note : The expanded uncertainty:  $\text{frequency} \times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).**



Ref 15 dBm Att 40 dB SWT 2.5 ms 2.402004000 GHz







Channel High



1 PK  
VIEW

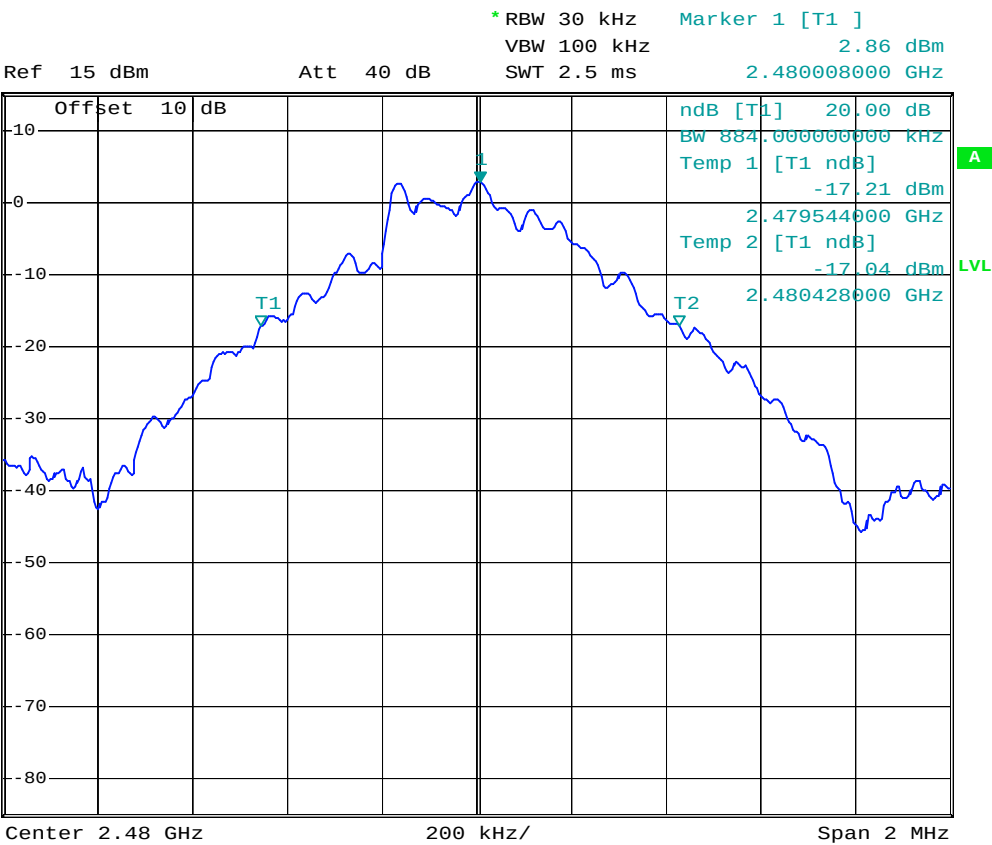


Test Mode: EDR  
Channel Low

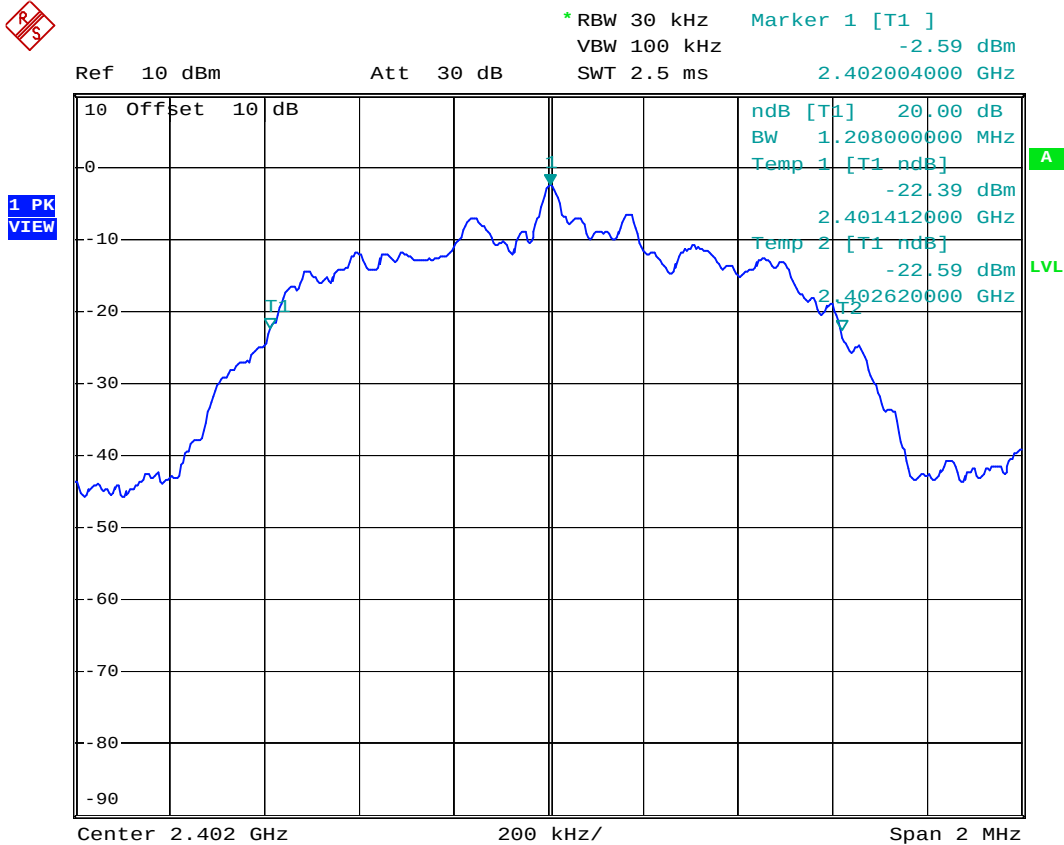

Channel Middle




1 PK  
VIEW

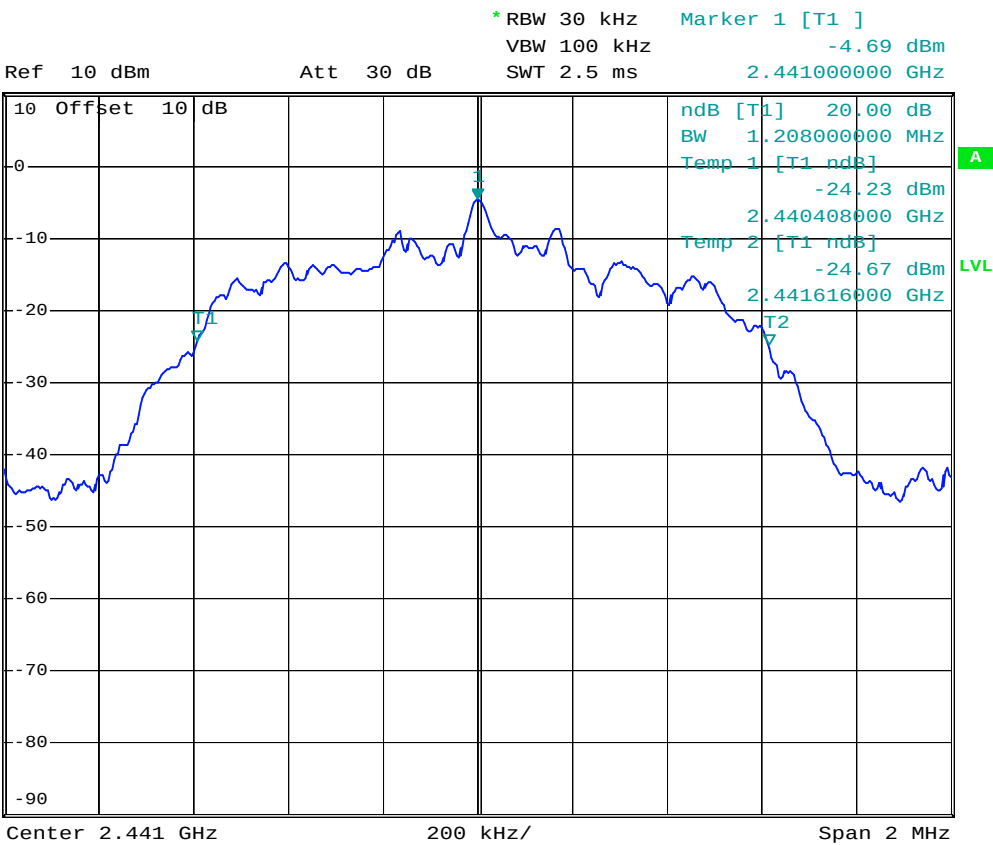

Channel High



1 PK  
VIEW

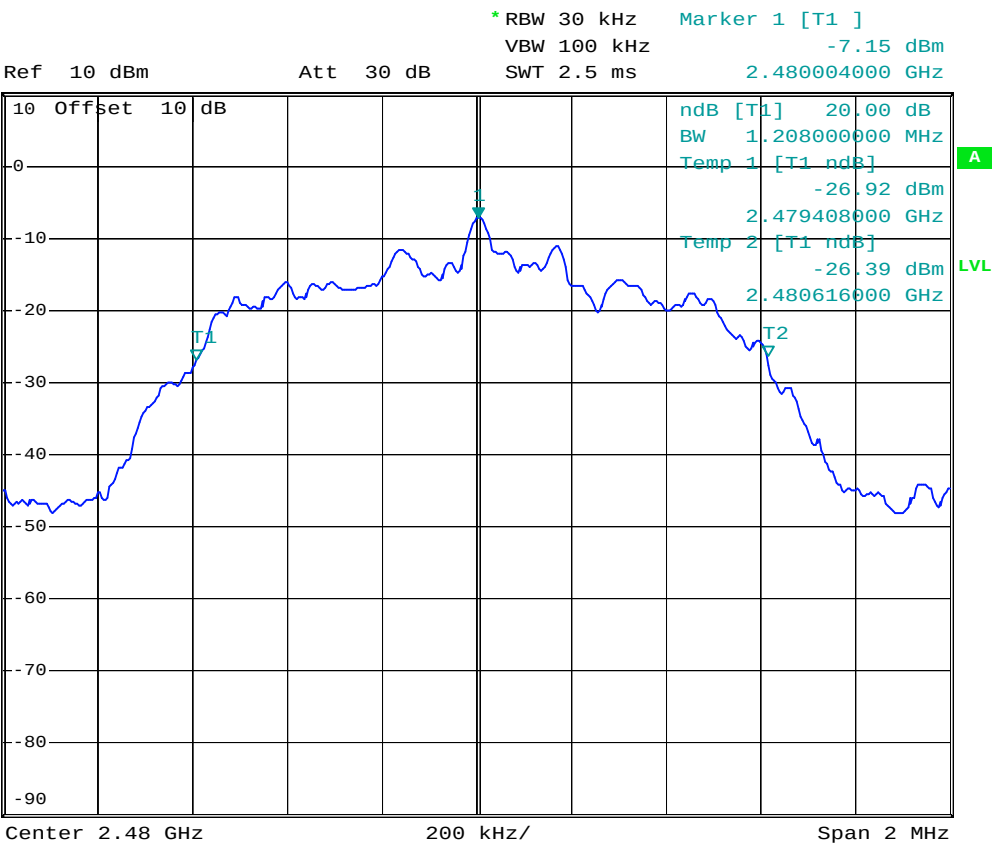

## 10 DWELL TIME ON EACH CHANNEL

### 10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel  
RBW = 1 MHz  
VBW  $\geq$  RBW  
Sweep = as necessary to capture the entire dwell time per hopping channel  
Detector function = peak  
Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

#### Justification on AFH mode:

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may reduced in AFH mode but at least 15 channels will be used, normally AFH mode has 20 channels.

### 10.3 Measurement Equipment

| Equipment  | Manufacturer          | Model No. | Calibration Date | Next Cal. Date |
|------------|-----------------------|-----------|------------------|----------------|
| Spectrum   | Rohde & Schwarz       | FSP40     | 2014/01/21       | 2015/01/20     |
| Attenuator | Weinschel Engineering | AY7602    | 2013/09/16       | 2014/09/15     |

## 10.4 Measurement Data

Test Mode: BR

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

**Period = 0.4(seconds) x 79(channels) = 31.6 seconds**

### A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $1600/(1+1) = 800$  transmissions per second. In one period for each particular channel there are  $10.13 \times 31.6 = 320.1$  times of transmissions.

- a) Channel Low : the dwell time is      0.46    ms x 320.1 =    147.246    ms
- b) Channel Middle : the dwell time is    0.46    ms x 320.1 =    147.246    ms
- c) Channel High : the dwell time is      0.46    ms x 320.1 =    147.246    ms

The maximum time of occupancy for a particular channel is 147.246ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

### B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $1600/(3+1) = 400$  transmissions per second. In one period for each particular channel there are  $5.06 \times 31.6 = 159.9$  times of transmissions.

- a) Channel Low : the dwell time is      1.74    ms x 159.9 =    278.226 ms
- b) Channel Middle : the dwell time is    1.74    ms x 159.9 =    278.226 ms
- c) Channel High : the dwell time is      1.74    ms x 159.9 =    278.226 ms

The maximum time of occupancy for a particular channel is 287.820ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

### C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $1600/(5+1) = 266.7$  transmissions per second. In one period for each particular channel there are  $3.38 \times 31.6 = 106.81$  times of transmissions.

- a) Channel Low : the dwell time is      3.06    ms x 106.81 =    326.838 ms
- b) Channel Middle : the dwell time is    3.06    ms x 106.81 =    326.838 ms
- c) Channel High : the dwell time is      3.06    ms x 106.81 =    326.838 ms

The maximum time of occupancy for a particular channel is 341.792ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

Test Mode: BR

**Test Mode: Basic GFSK (AFH mode)**

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

$$\text{Period} = 0.4(\text{seconds}) \times 20(\text{channels}) = 8 \text{ seconds}$$

**A. DH1 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $800/(1+1) = 400$  transmissions per second. In one period for each particular channel there are  $20 \times 8 = 160$  times of transmissions.

- a) Channel Low : the dwell time is  $0.46\text{ms} \times 160 = 73.6$  ms
- b) Channel Middle : the dwell time is  $0.46\text{ms} \times 160 = 73.6$  ms
- c) Channel Hi : the dwell time is  $0.46\text{ms} \times 160 = 73.6$  ms

The maximum time of occupancy for a particular channel is 73.6ms in any 8 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

**B. DH3 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $800/(3+1) = 200$  transmissions per second. In one period for each particular channel there are  $10 \times 8 = 80$  times of transmissions.

- a) Channel Low : the dwell time is  $1.74\text{ms} \times 80 = 139.200$  ms
- b) Channel Middle : the dwell time is  $1.74\text{ms} \times 80 = 139.200$  ms
- c) Channel Hi : the dwell time is  $1.74\text{ms} \times 80 = 139.200$  ms

The maximum time of occupancy for a particular channel is 139.200ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**C. DH5 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $800/(5+1) = 133.3$  transmissions per second. In one period for each particular channel there are  $6.665 \times 8 = 53.32$  times of transmissions.

- a) Channel Low : the dwell time is  $3.06\text{ms} \times 53.32 = 163.159$  ms
- b) Channel Middle : the dwell time is  $3.06\text{ms} \times 53.32 = 163.159$  ms
- c) Channel Hi : the dwell time is  $3.06\text{ms} \times 53.32 = 163.159$  ms

The maximum time of occupancy for a particular channel is 163.159ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

Test Mode: EDR

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

**D. DH1 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $1600/(1+1) = 800$  transmissions per second. In one period for each particular channel there are  $10.13 \times 31.6 = 320.1$  times of transmissions.

- a) Channel Low : the dwell time is      0.46    ms x 320.1 =    147.246    ms
- b) Channel Middle : the dwell time is    0.46    ms x 320.1 =    147.246    ms
- c) Channel High : the dwell time is      0.46    ms x 320.1 =    147.246    ms

The maximum time of occupancy for a particular channel is 147.246ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

**E. DH3 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $1600/(3+1) = 400$  transmissions per second. In one period for each particular channel there are  $5.06 \times 31.6 = 159.9$  times of transmissions.

- a) Channel Low : the dwell time is      1.74    ms x 159.9 =    278.226 ms
- b) Channel Middle : the dwell time is    1.74    ms x 159.9 =    278.226 ms
- c) Channel High : the dwell time is      1.74    ms x 159.9 =    278.226 ms

The maximum time of occupancy for a particular channel is 287.820ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**F. DH5 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $1600/(5+1) = 266.7$  transmissions per second. In one period for each particular channel there are  $3.38 \times 31.6 = 106.81$  times of transmissions.

- a) Channel Low : the dwell time is      3.06    ms x 106.81 =    326.838 ms
- b) Channel Middle : the dwell time is    3.06    ms x 106.81 =    326.838 ms
- c) Channel High : the dwell time is      3.06    ms x 106.81 =    326.838 ms

The maximum time of occupancy for a particular channel is 341.792ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

Test Mode: EDR

**Test Mode: Basic GFSK (AFH mode)**

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

$$\text{Period} = 0.4(\text{seconds}) \times 20(\text{channels}) = 8 \text{ seconds}$$

**A. DH1 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $800/(1+1) = 400$  transmissions per second. In one period for each particular channel there are  $20 \times 8 = 160$  times of transmissions.

- a) Channel Low : the dwell time is  $0.46\text{ms} \times 160 = 73.6$  ms
- b) Channel Middle : the dwell time is  $0.46\text{ms} \times 160 = 73.6$  ms
- c) Channel Hi : the dwell time is  $0.46\text{ms} \times 160 = 73.6$  ms

The maximum time of occupancy for a particular channel is 73.6ms in any 8 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

**B. DH3 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $800/(3+1) = 200$  transmissions per second. In one period for each particular channel there are  $10 \times 8 = 80$  times of transmissions.

- a) Channel Low : the dwell time is  $1.74\text{ms} \times 80 = 139.200$  ms
- b) Channel Middle : the dwell time is  $1.74\text{ms} \times 80 = 139.200$  ms
- c) Channel Hi : the dwell time is  $1.74\text{ms} \times 80 = 139.200$  ms

The maximum time of occupancy for a particular channel is 139.200ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.


**C. DH5 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $800/(5+1) = 133.3$  transmissions per second. In one period for each particular channel there are  $6.665 \times 8 = 53.32$  times of transmissions.


- a) Channel Low : the dwell time is  $3.06\text{ms} \times 53.32 = 163.159$  ms
- b) Channel Middle : the dwell time is  $3.06\text{ms} \times 53.32 = 163.159$  ms
- c) Channel Hi : the dwell time is  $3.06\text{ms} \times 53.32 = 163.159$  ms

The maximum time of occupancy for a particular channel is 163.159ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.


**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

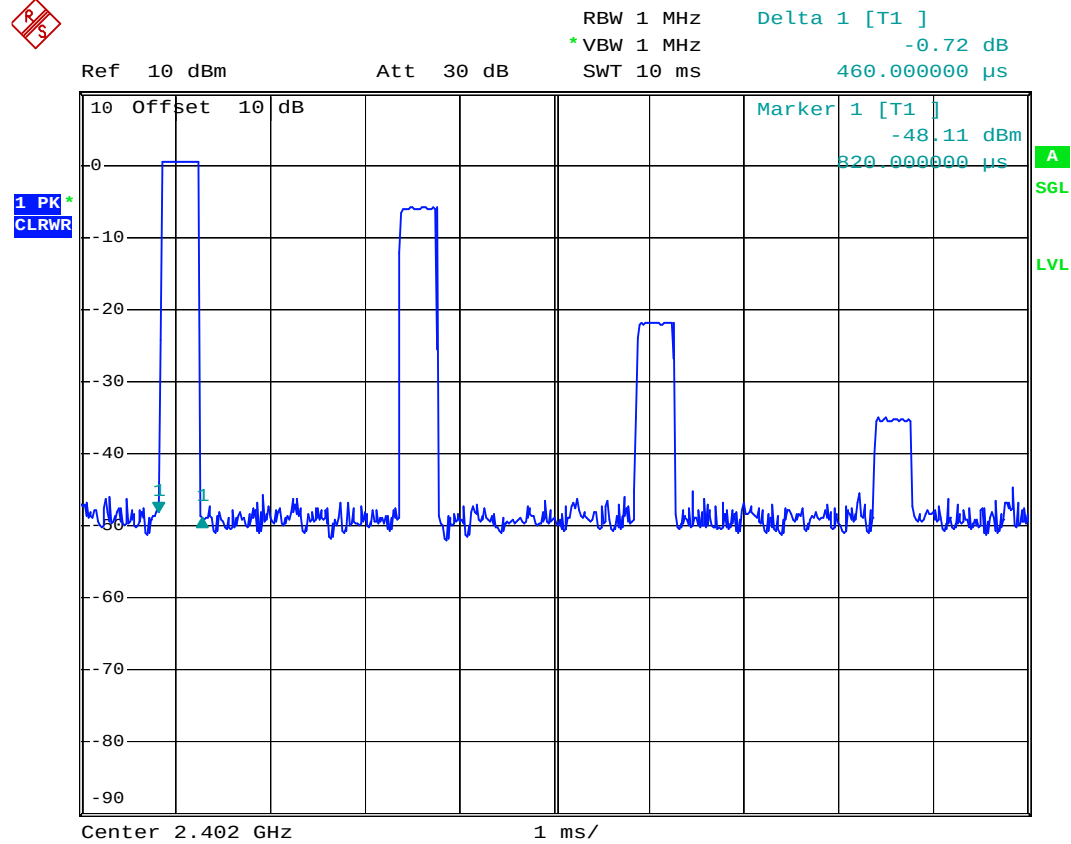**Test Mode: BR****Channel Low; DH1**


Channel Middle; DH1

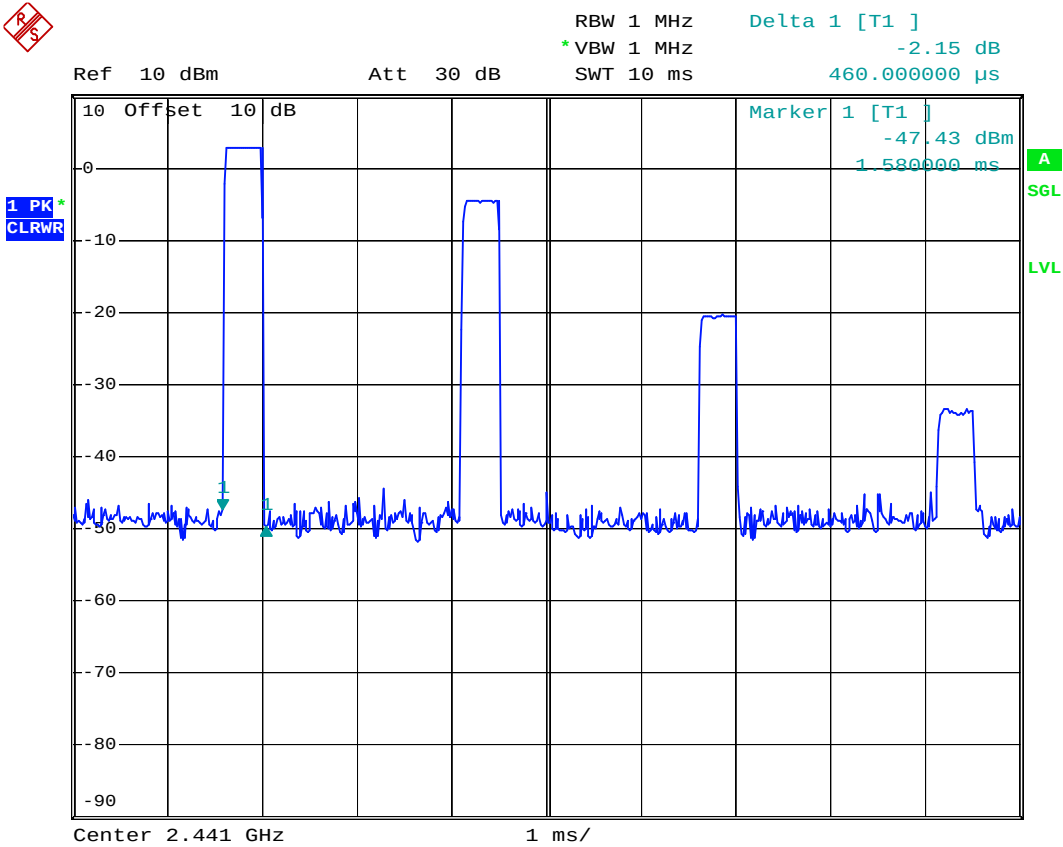


Channel High; DH1

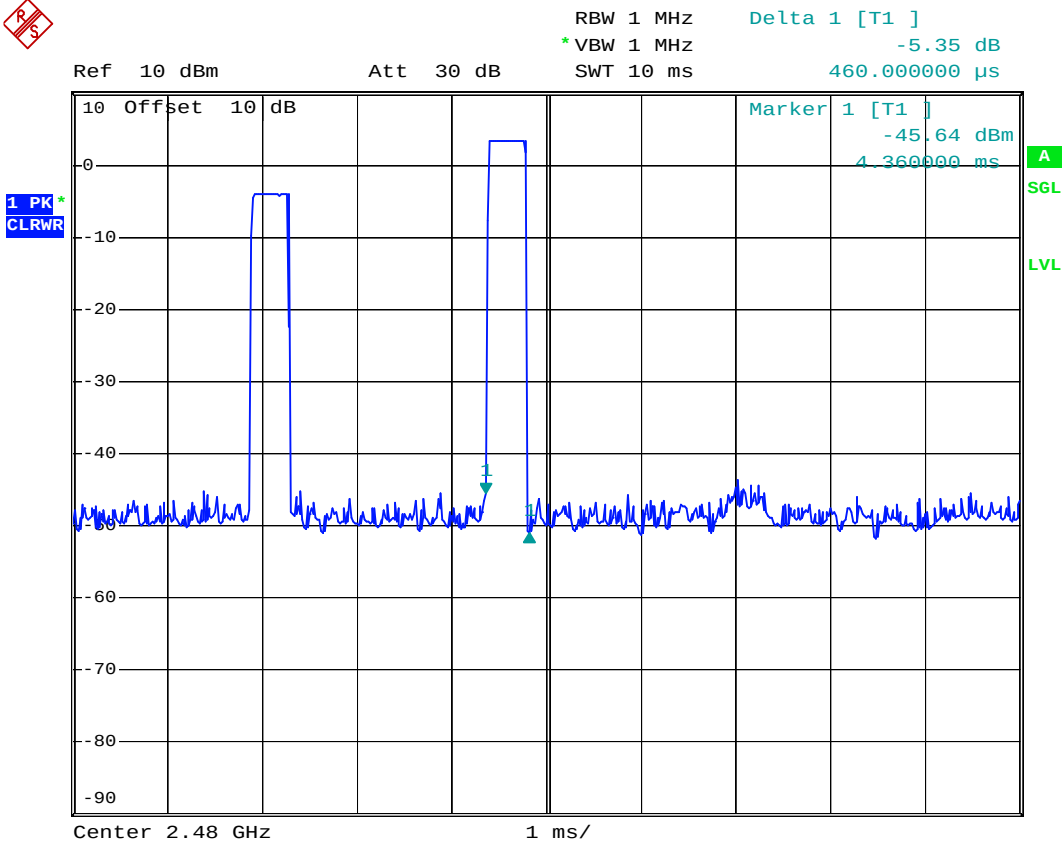


Channel Low; DH3

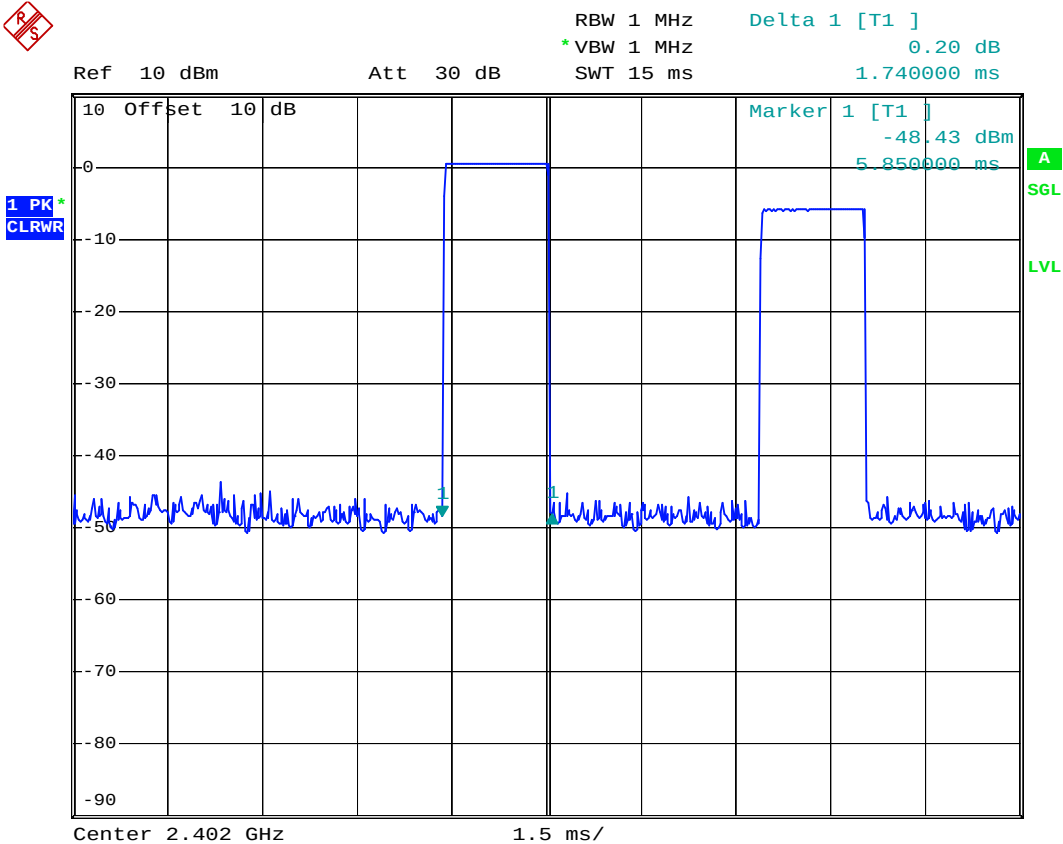


Channel Middle; DH3

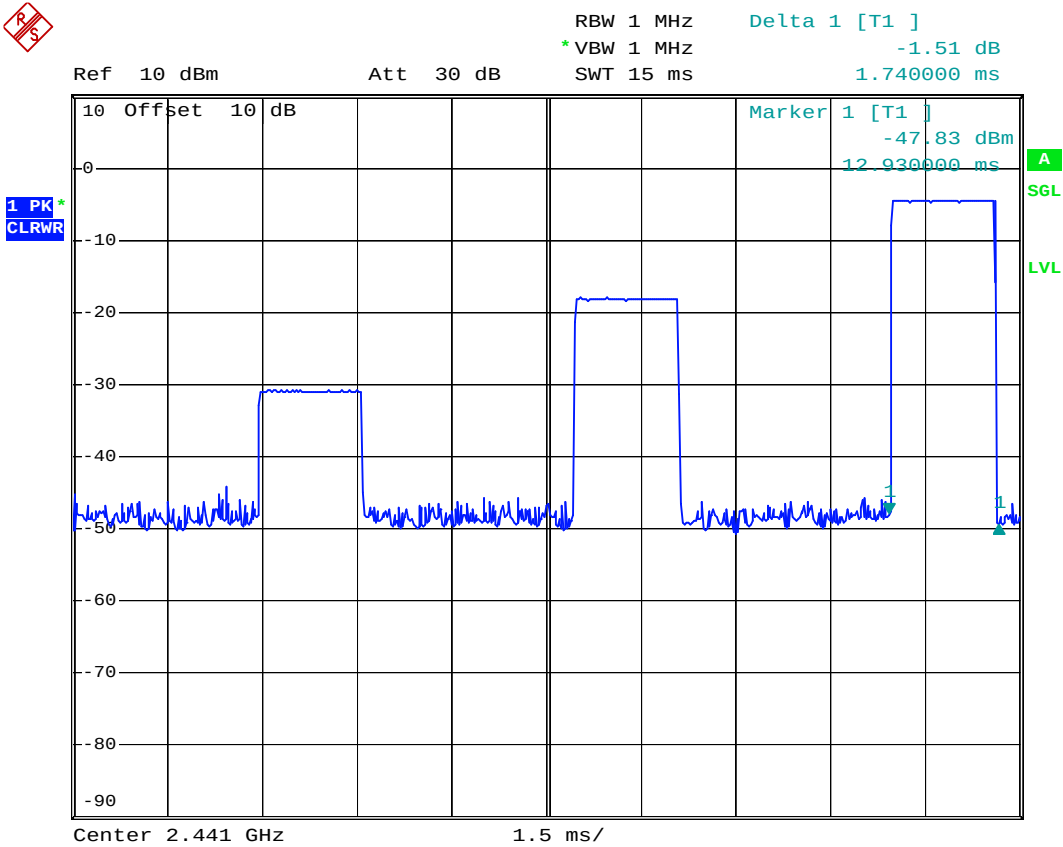


Channel High; DH3

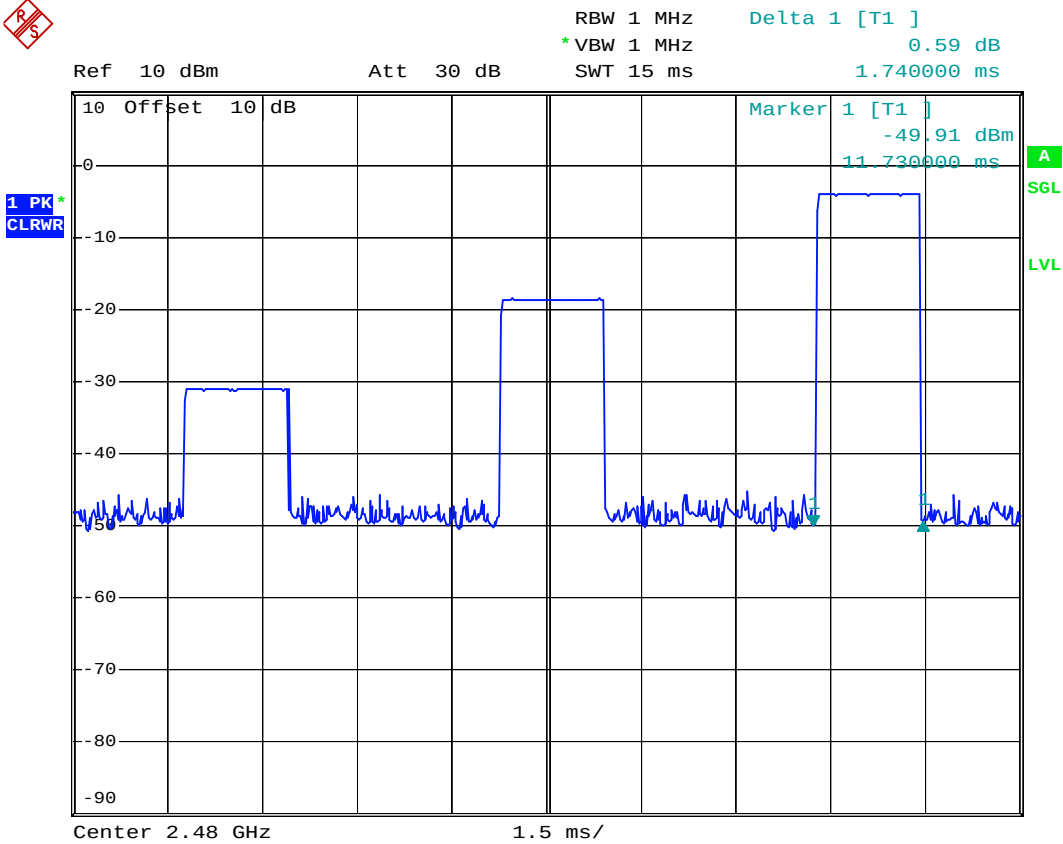


Channel Low; DH5

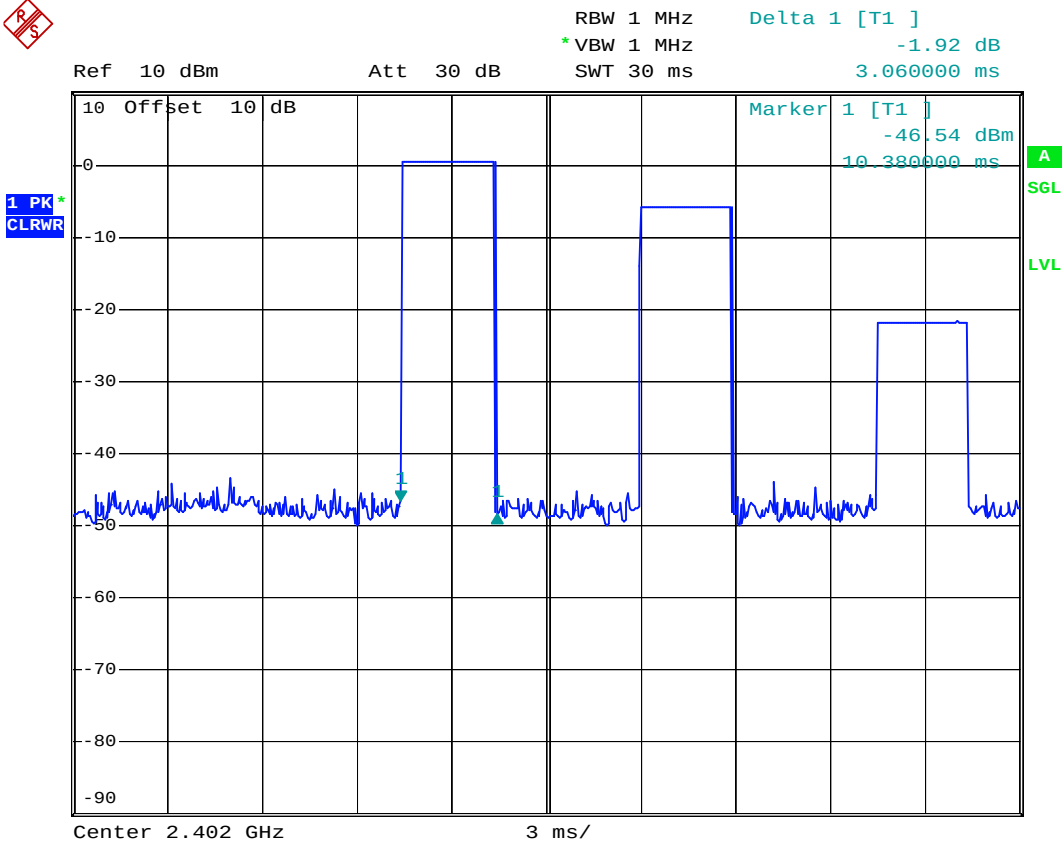


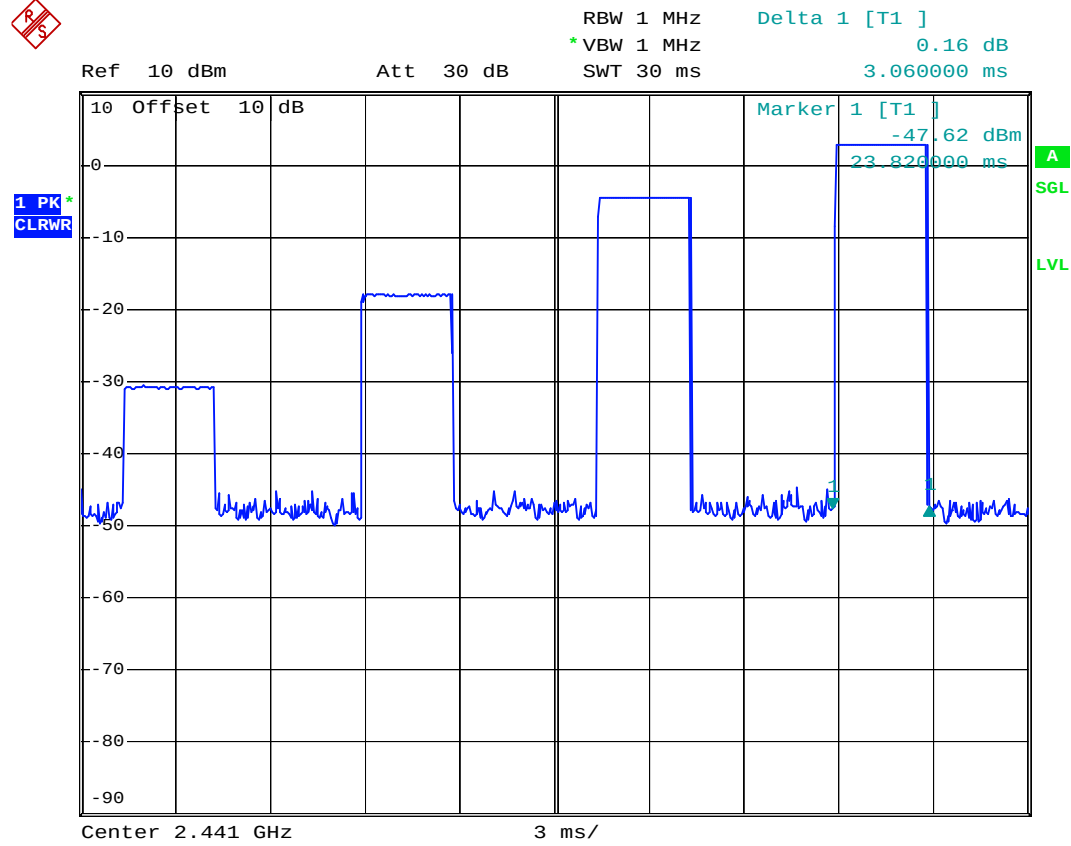
**Channel Middle; DH5**

Channel High; DH5

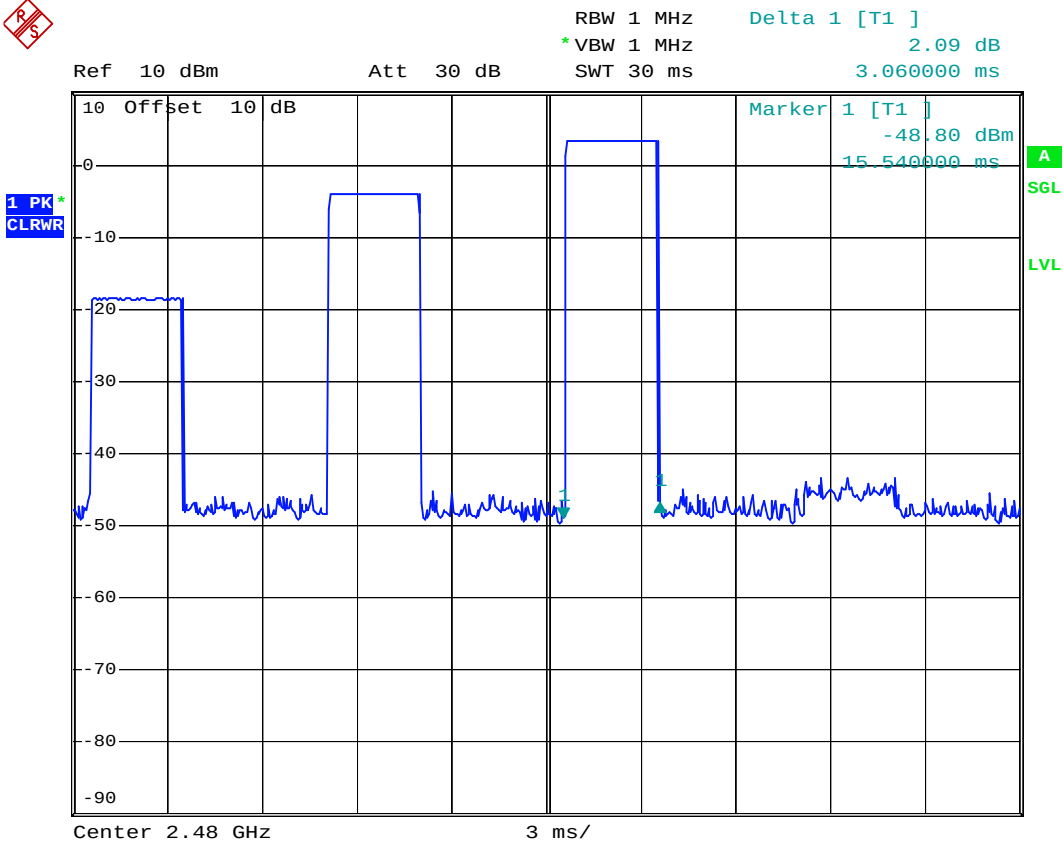


Test Mode: EDR  
Channel Low; DH1

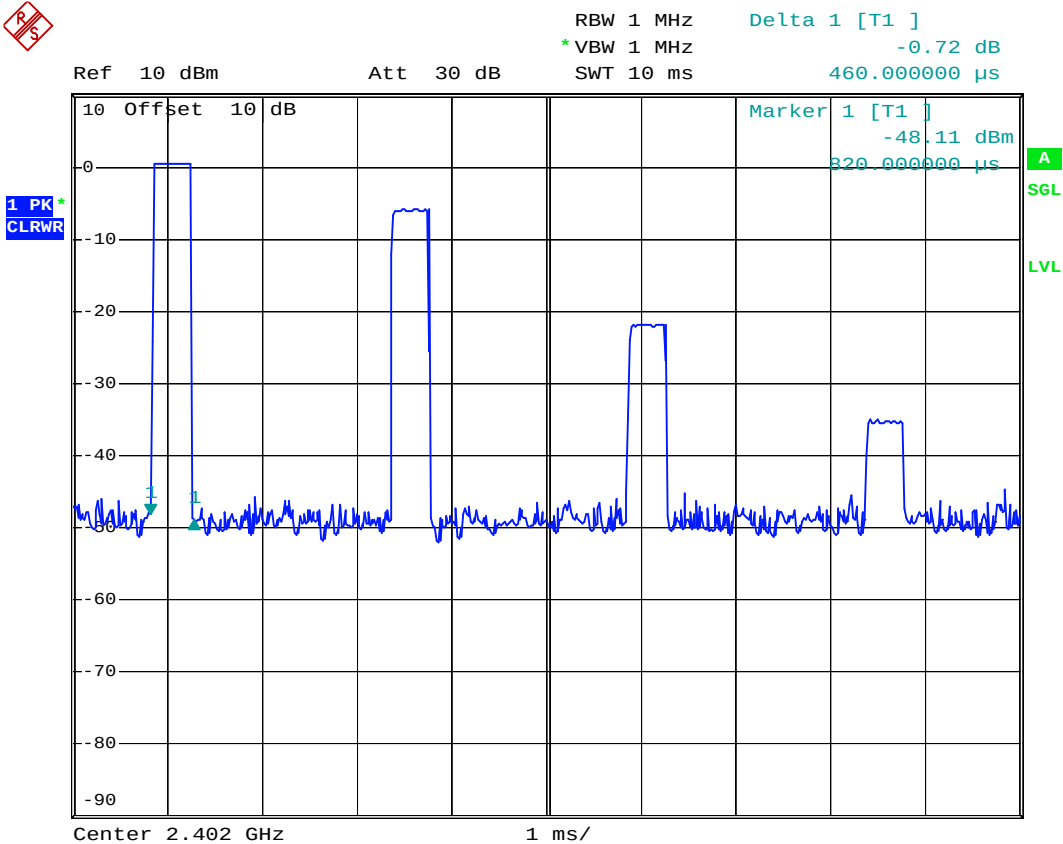


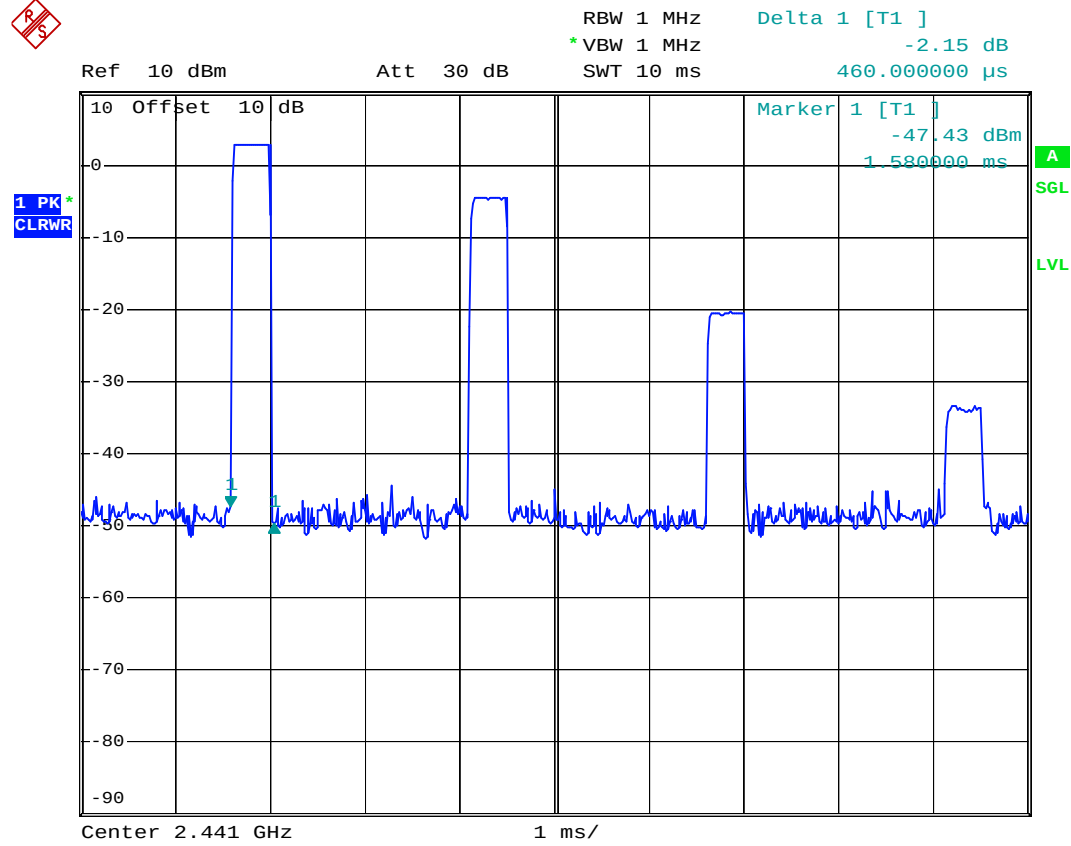**Channel Middle; DH1**


Channel High; DH1

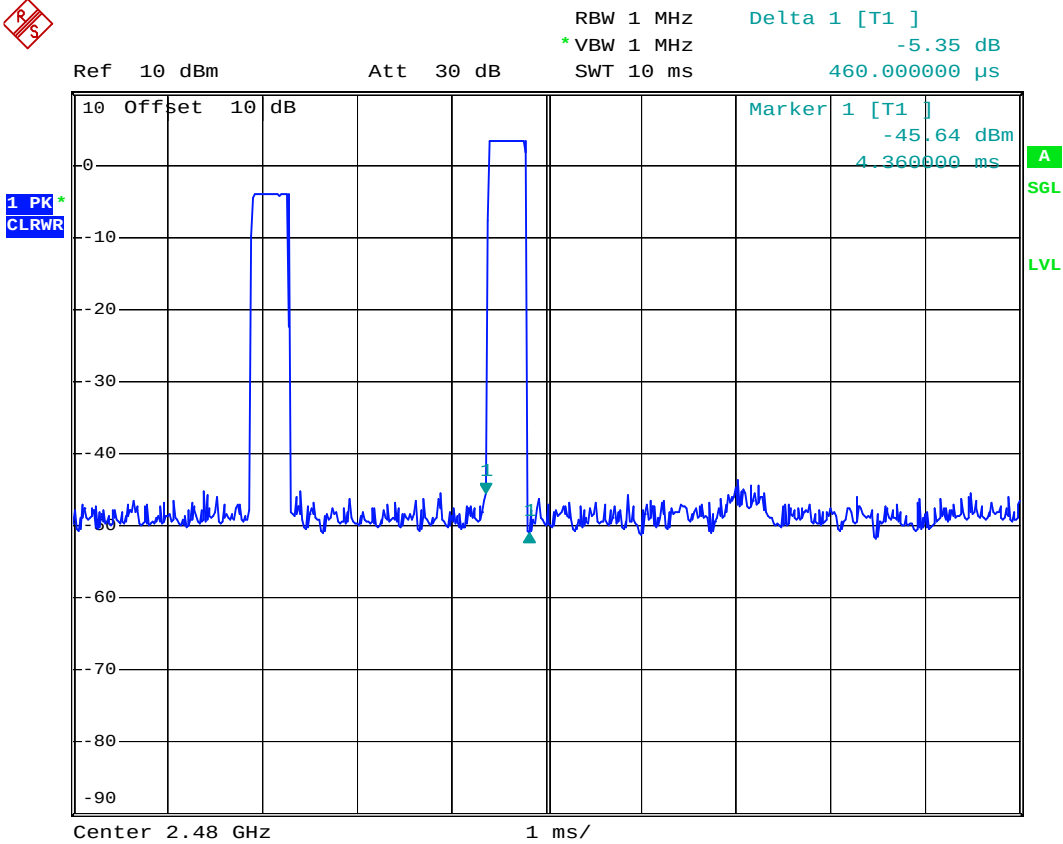


Channel Low; DH3

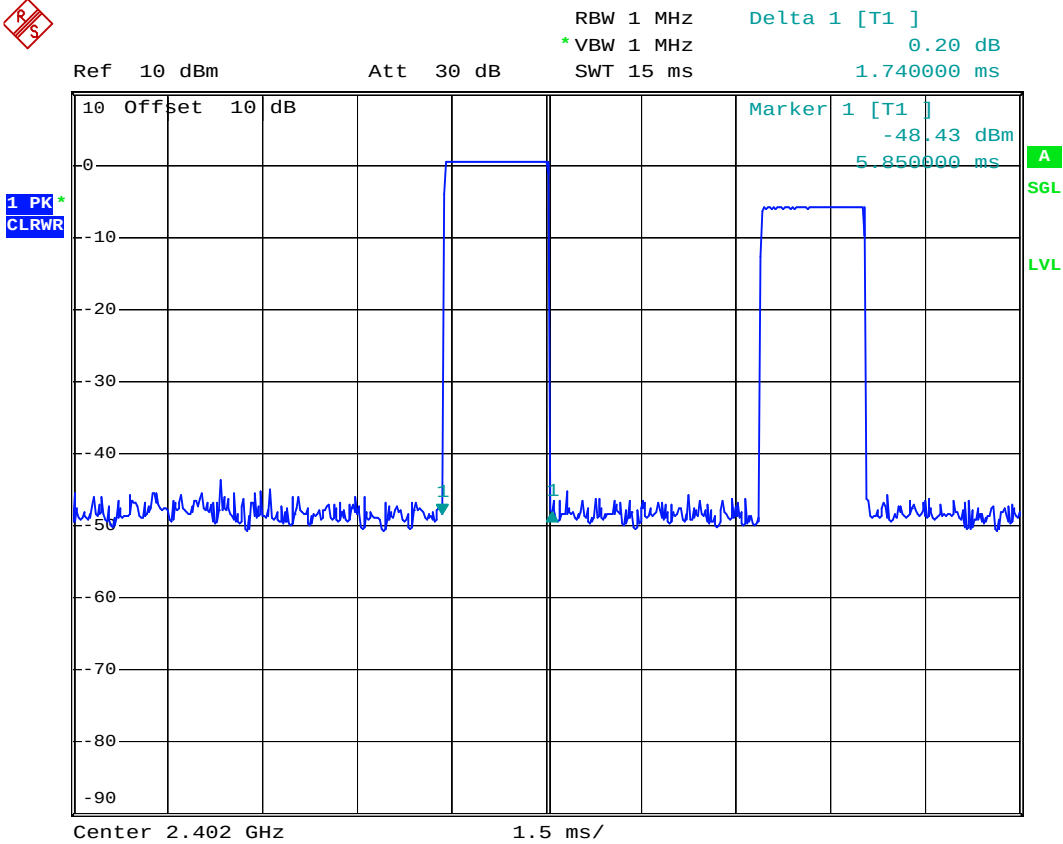


Channel Middle; DH3

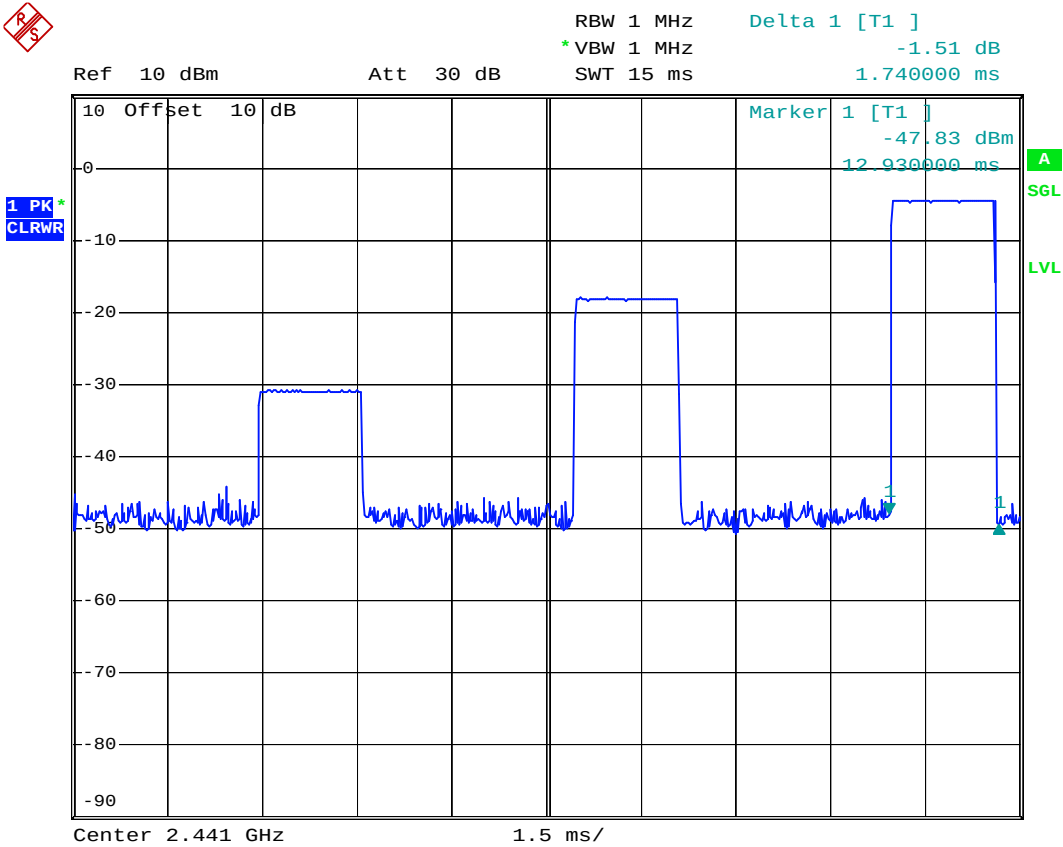


Channel High; DH3

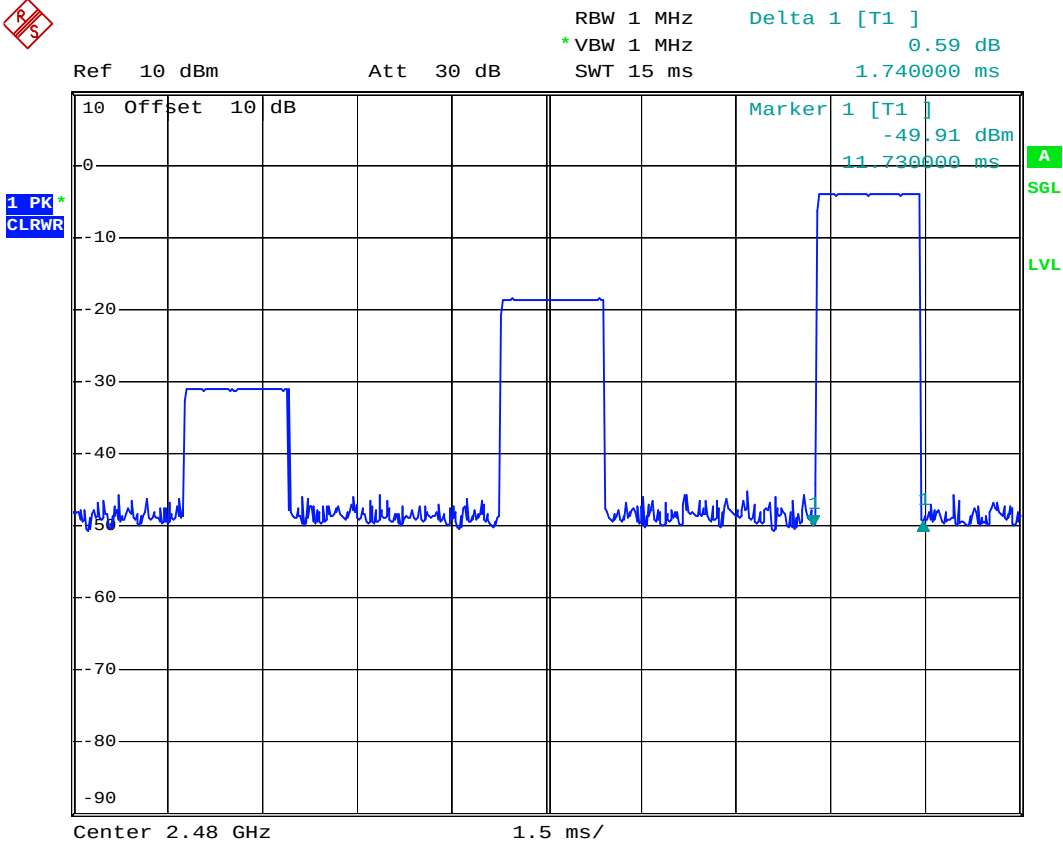




Channel Middle; DH5

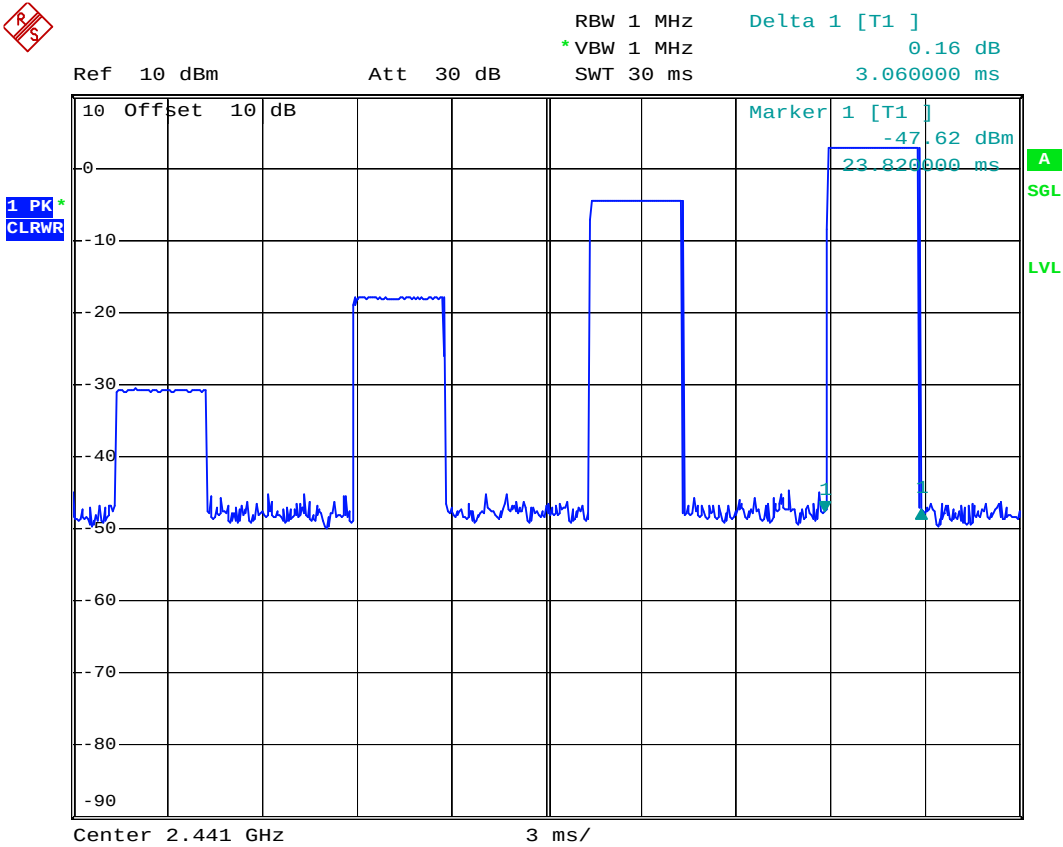

Channel High; DH5

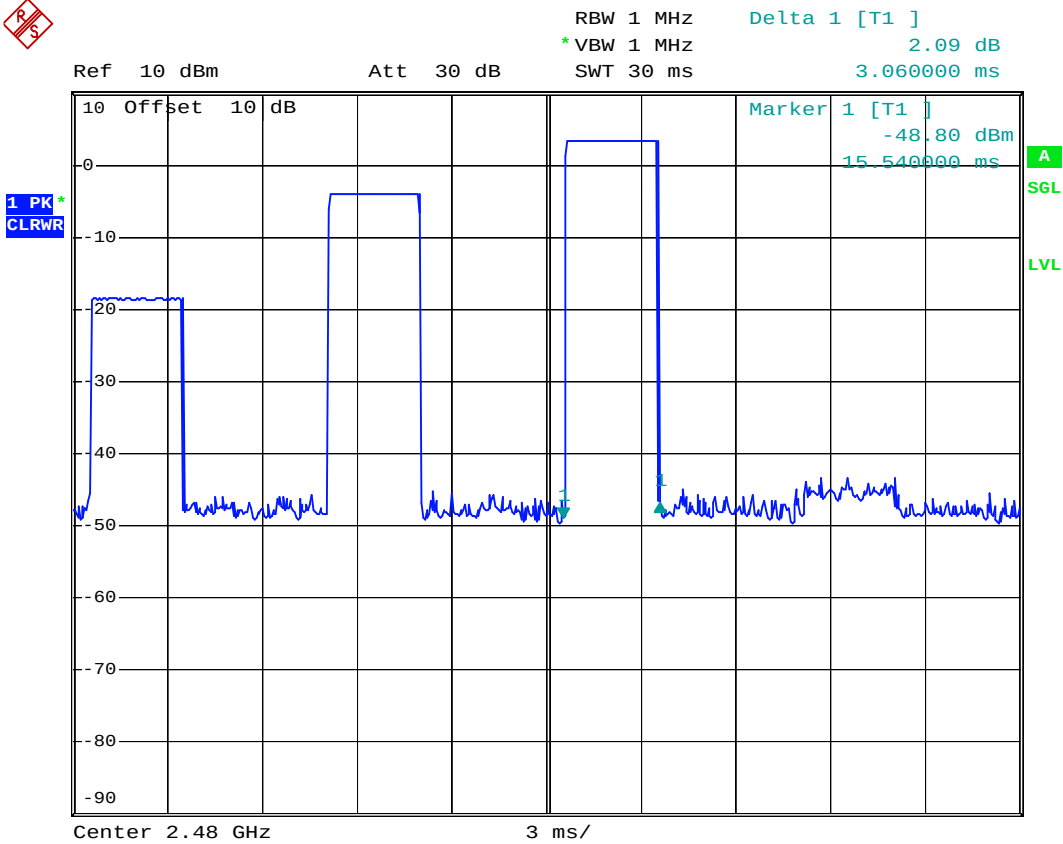

## 11 OUTPUT POWER MEASUREMENT

### 11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW > the 20 dB bandwidth of the emission being measured  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 11.3 Measurement Equipment

| Equipment  | Manufacturer          | Model No. | Calibration Date | Next Cal. Date |
|------------|-----------------------|-----------|------------------|----------------|
| Spectrum   | Rohde & Schwarz       | FSP40     | 2014/01/21       | 2015/01/20     |
| Attenuator | Weinschel Engineering | AY7602    | 2013/09/16       | 2014/09/15     |

## 11.4 Measurement Data

Test Date : Jun. 30, 2014      Temperature : 27 °C      Humidity : 65 %

### Test Mode: BR

- |                   |                        |             |            |
|-------------------|------------------------|-------------|------------|
| a) Channel Low    | : Output Peak Power is | 0.99 dBm or | 1.256 mW ° |
| b) Channel Middle | : Output Peak Power is | 3.18 dBm or | 2.080 mW ° |
| c) Channel High   | : Output Peak Power is | 3.73 dBm or | 2.360 mW ° |

### Test Mode: EDR

- |                   |                        |              |            |
|-------------------|------------------------|--------------|------------|
| a) Channel Low    | : Output Peak Power is | -1.04 dBm or | 0.787 mW ° |
| b) Channel Middle | : Output Peak Power is | -3.33 dBm or | 0.465 mW ° |
| c) Channel High   | : Output Peak Power is | -5.8 dBm or  | 0.263 mW ° |

### Justification on AFH mode:

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may be reduced in AFH mode but at least 15 channels will be used. Hence the output power limit is 125mW.

**Note : The expanded uncertainty: 2dB.**

Test Mode: BR  
Channel Low



Ref 15 dBm

Att 40 dB

SWT 2.5 ms


\*RBW 1 MHz

VBW 3 MHz

Marker 1 [T1 ]

0.99 dBm


2.402180000 GHz

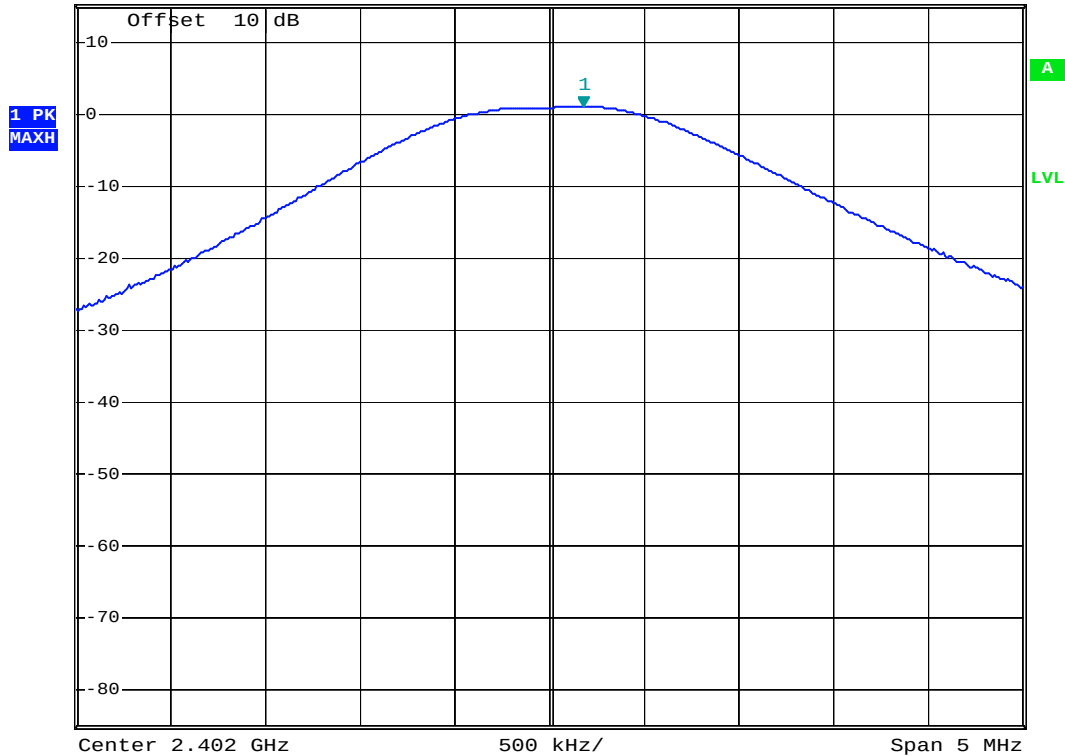

Channel Middle




\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      3.18 dBm  
SWT 2.5 ms      2.440850000 GHz

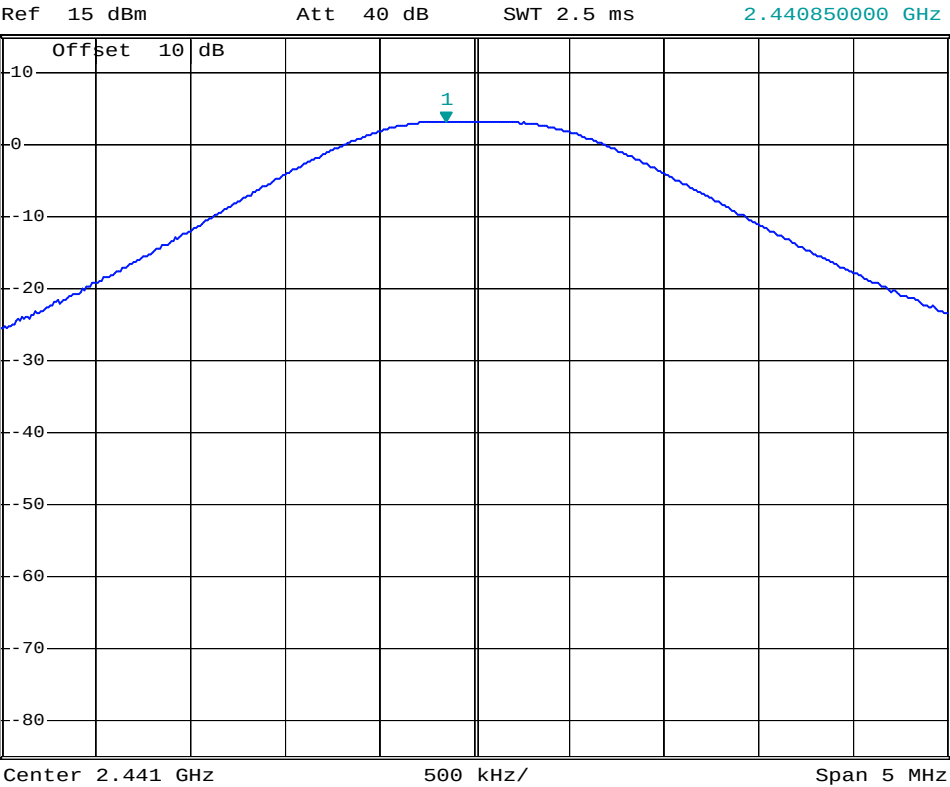

Channel High




\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      3.73 dBm  
SWT 2.5 ms      2.479880000 GHz

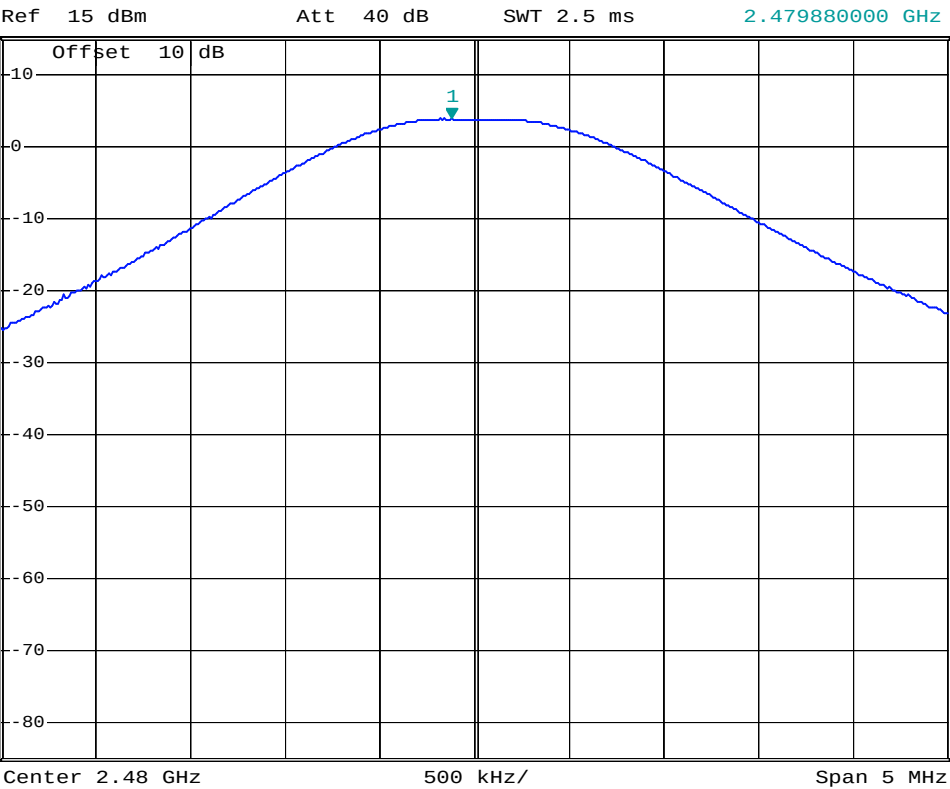

***Test Mode: EDR  
Channel Low***




```
* RBW 3 MHz      Marker 1 [T1 ]
VBW 10 MHz      -1.04 dBm
SWT 2.5 ms      2.401820000 GHz
```

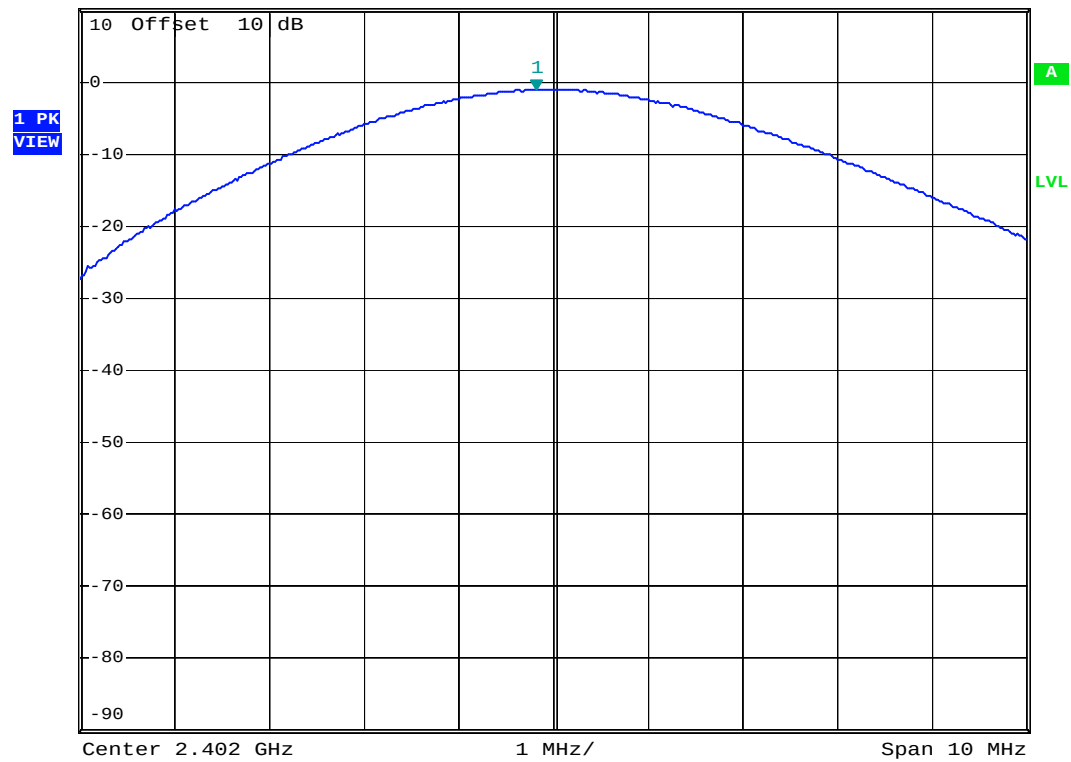

Channel Middle



\*RBW 3 MHz      Marker 1 [T1 ]  
VBW 10 MHz      -3.33 dBm  
SWT 2.5 ms      2.440960000 GHz

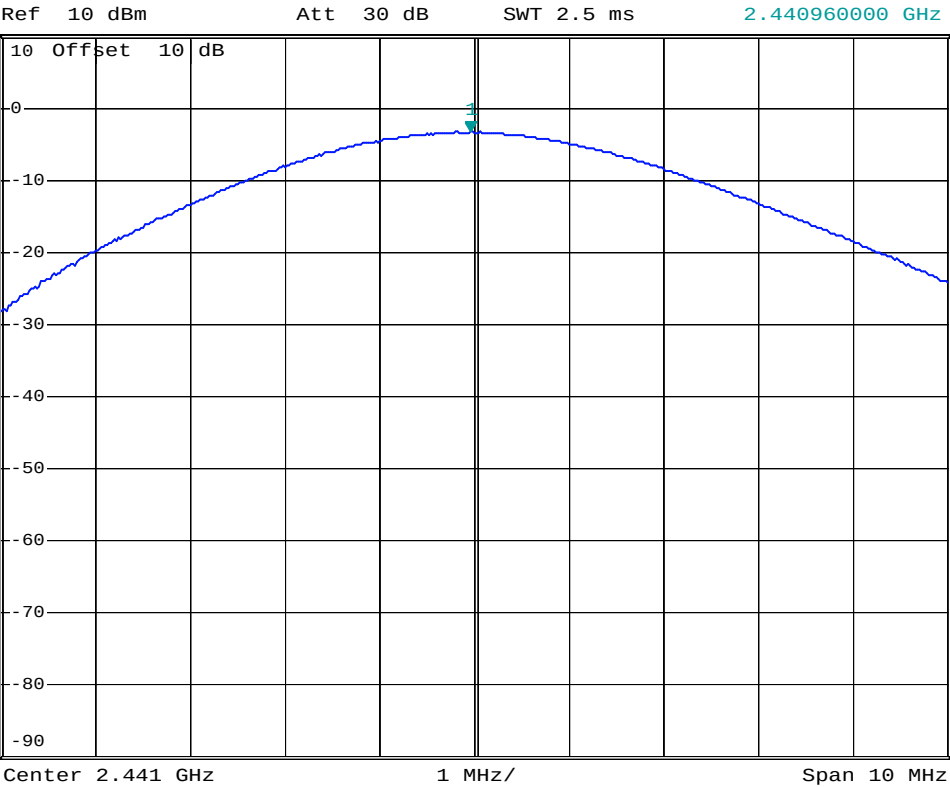

Channel High




Ref 10 dBmAtt 30 dB

\*RBW 3 MHzVBW 10 MHzSWT 2.5 ms

Marker 1 [T1 ]-5.80 dBm2.479780000 GHz

1 PK  
VIEW

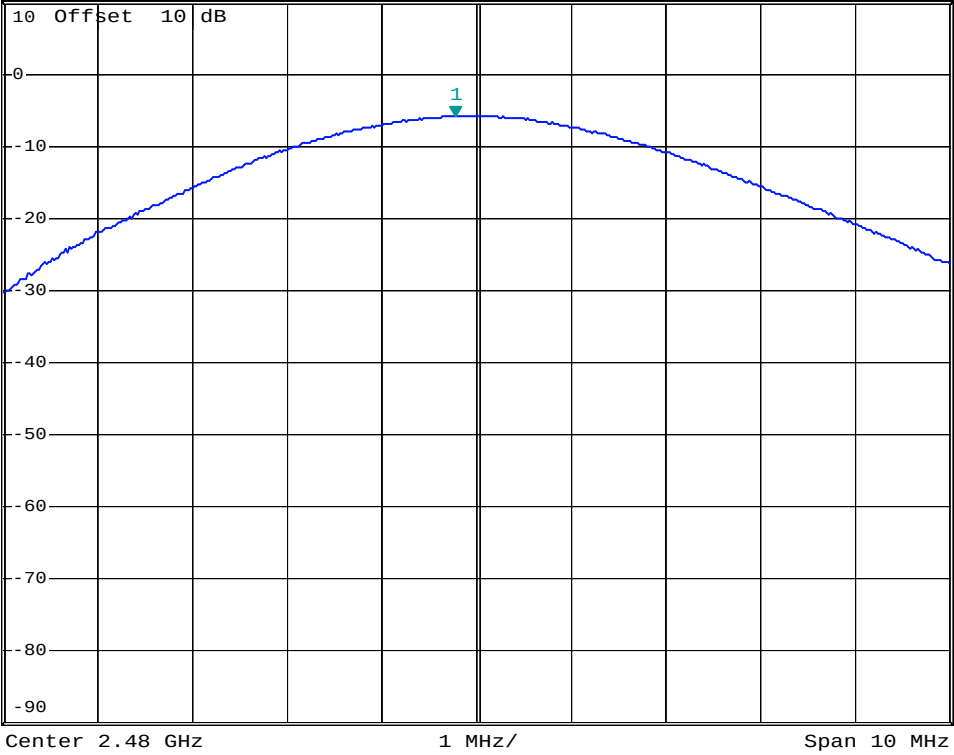

## 12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 12.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### 12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
  - $RBW \geq 1\%$  of the span
  - $VBW \geq RBW$
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 12.3 Measurement Equipment

| Equipment  | Manufacturer             | Model No. | Calibration Date | Next Cal. Date |
|------------|--------------------------|-----------|------------------|----------------|
| Spectrum   | Rohde & Schwarz          | FSP40     | 2014/01/21       | 2015/01/20     |
| Attenuator | Weinschel<br>Engineering | AY7602    | 2013/09/16       | 2014/09/15     |

### 12.4 Measurement Data

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

Test Mode: BR

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Test Mode: EDR


- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

**Note : The expanded uncertainty: 2dB.**

Test Mode: BR  
Lower Band Edge (Hoppin off)




\* RBW 100 kHz    Marker 1 [T1]  
VBW 300 kHz    -42.03 dBm  
SWT 2.5 ms    2.397500000 GHz

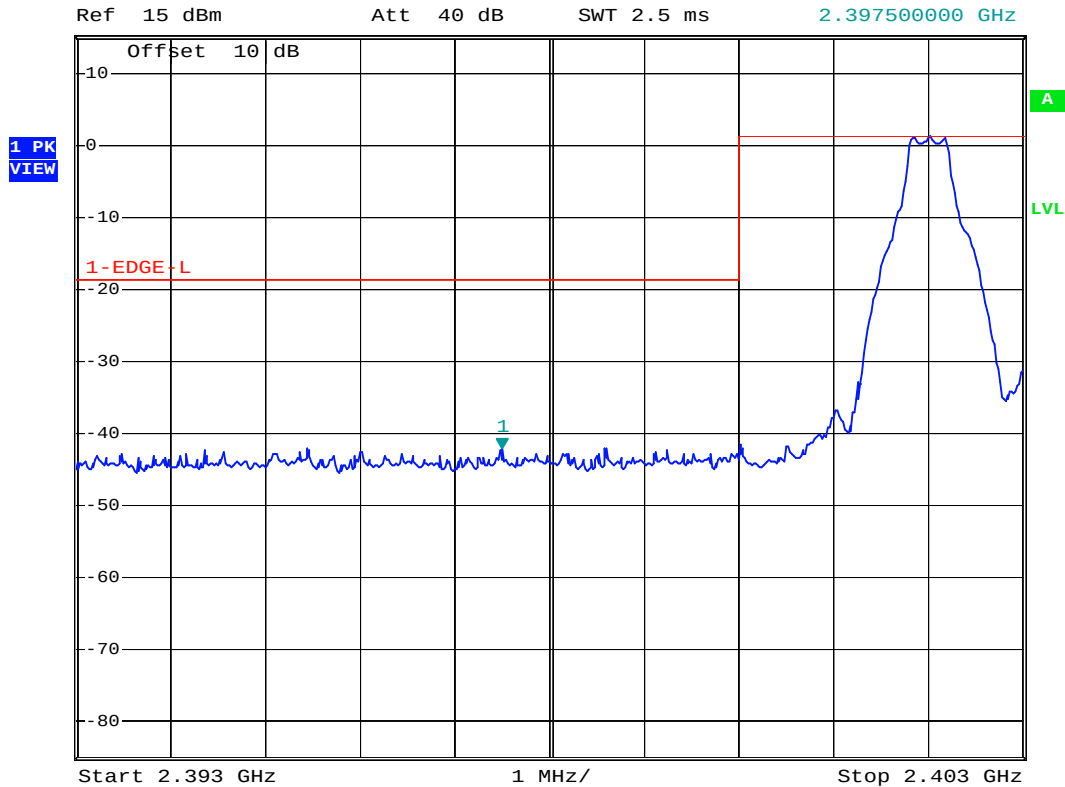

Upper Band Edge (Hoppin off)




\*RBW 100 kHz    Marker 1 [T1]  
VBW 300 kHz        -40.80 dBm  
SWT 2.5 ms         2.485680000 GHz

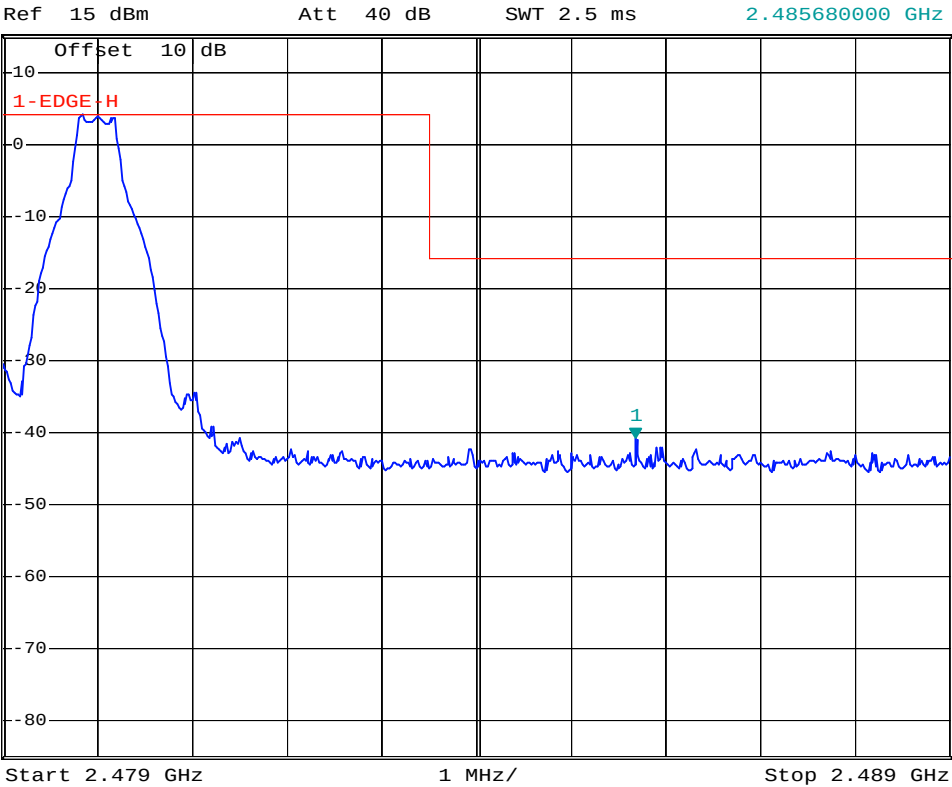


Lower Band Edge (Hoppin on)



1 PK  
VIEW

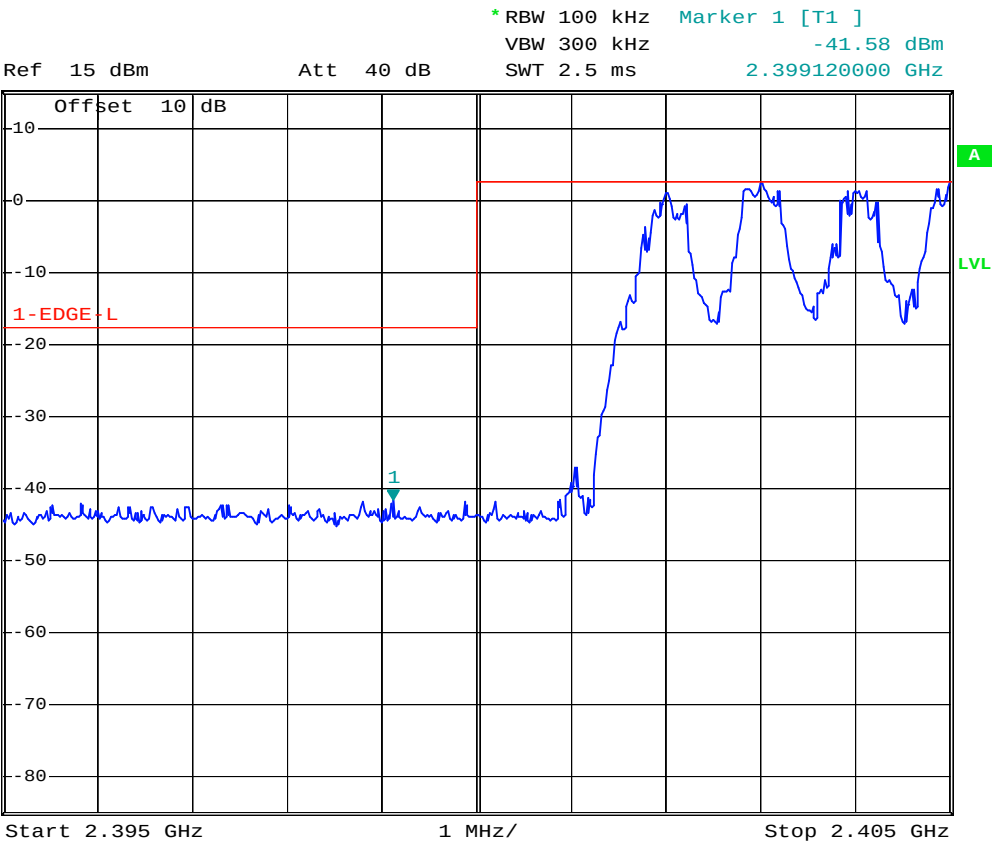


Upper Band Edge (Hoppin on)

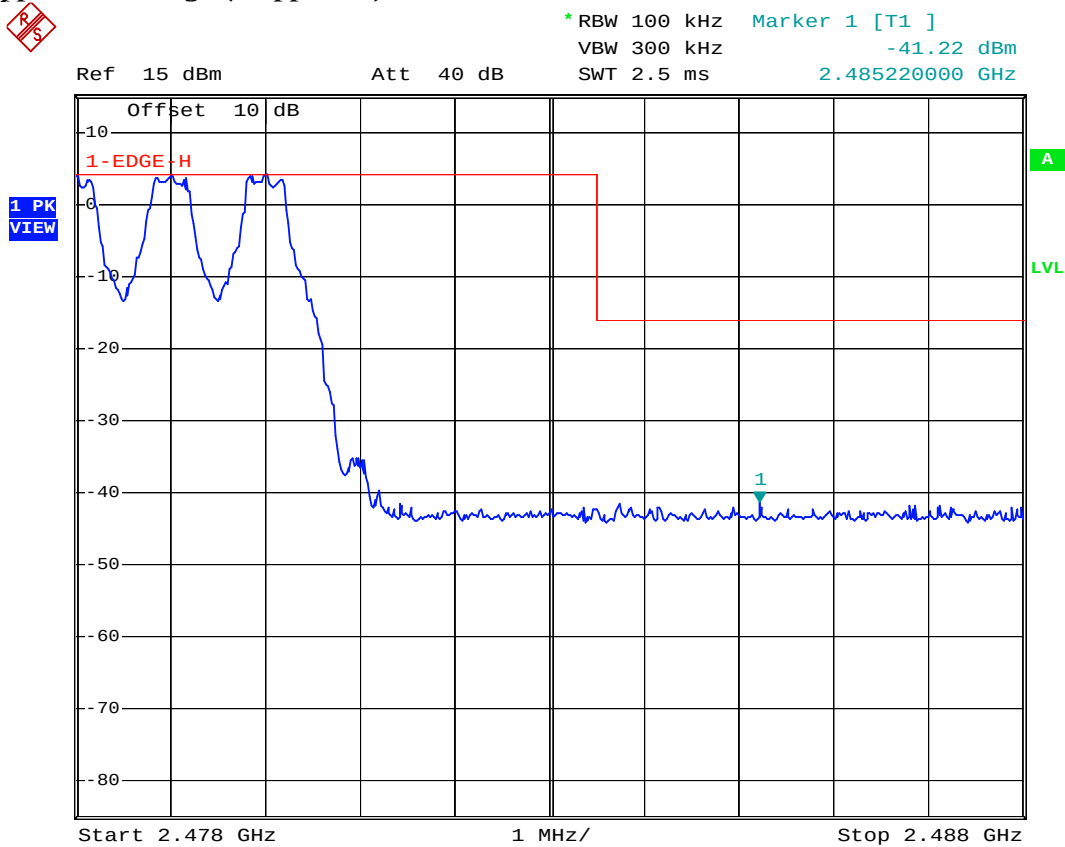


Test Mode: EDR  
Lower Band Edge (Hoppin off)




\* RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz    -52.20 dBm  
SWT 2.5 ms    2.399780000 GHz

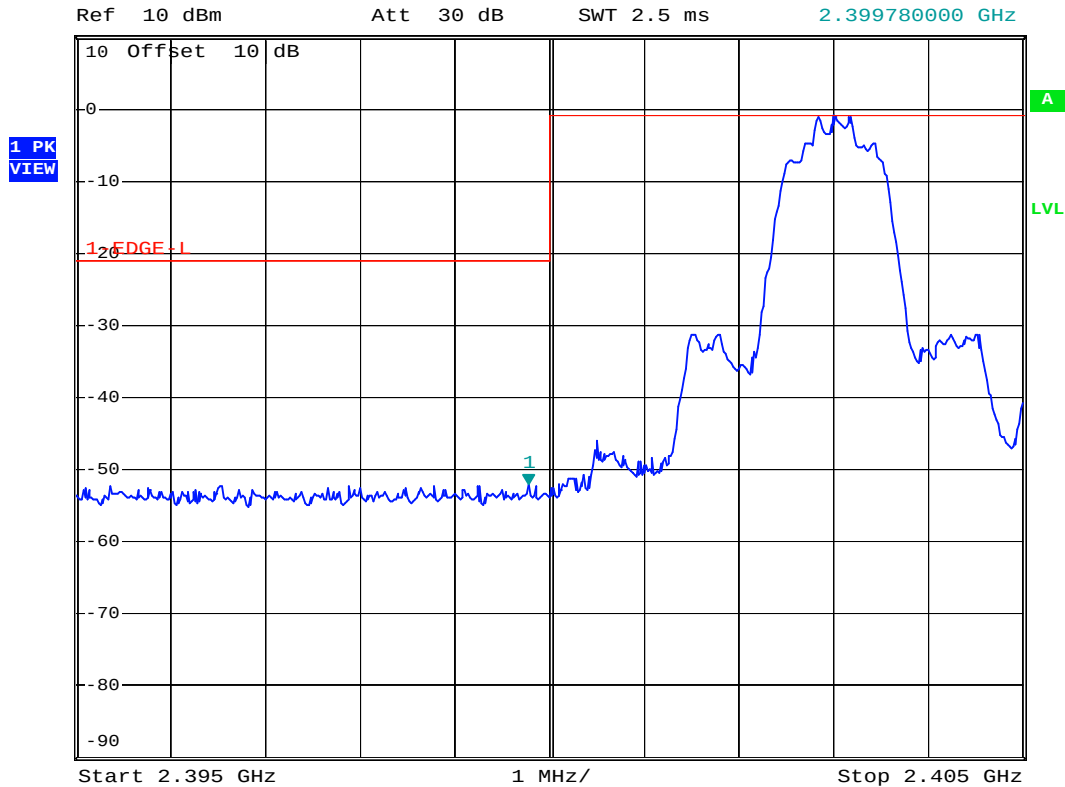


Upper Band Edge (Hoppin off)

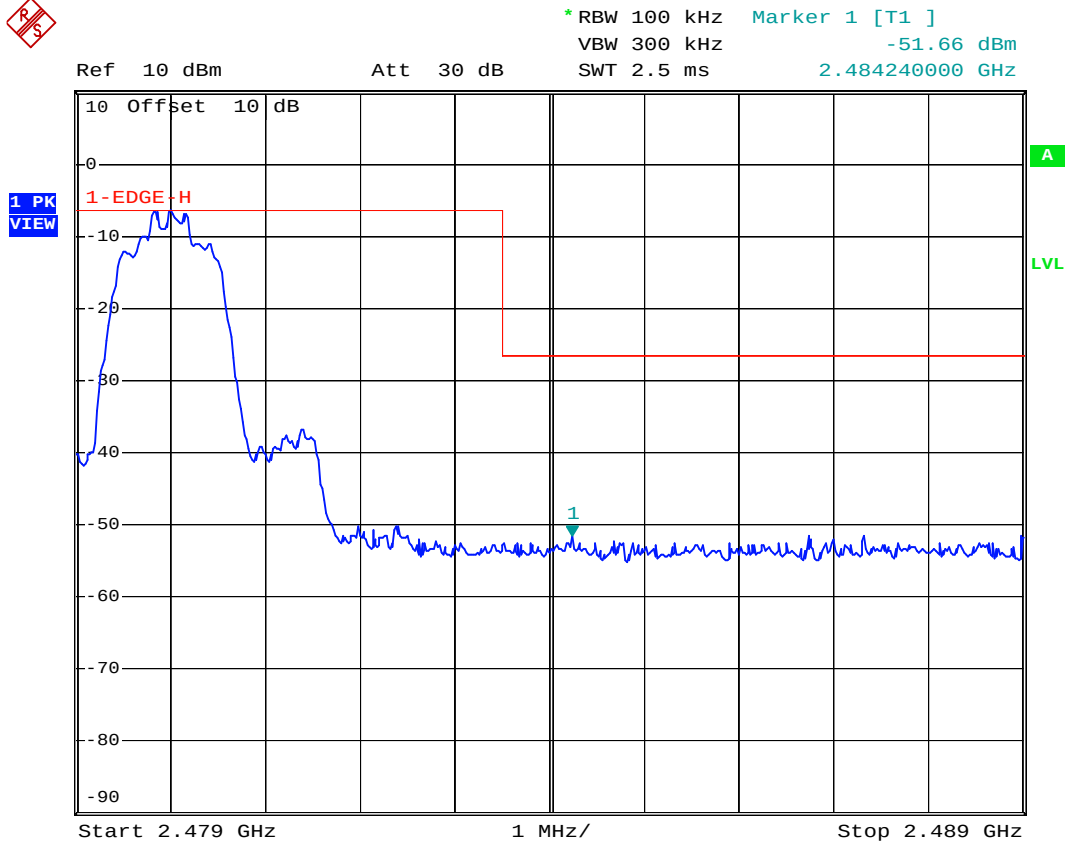

Lower Band Edge (Hoppin on)

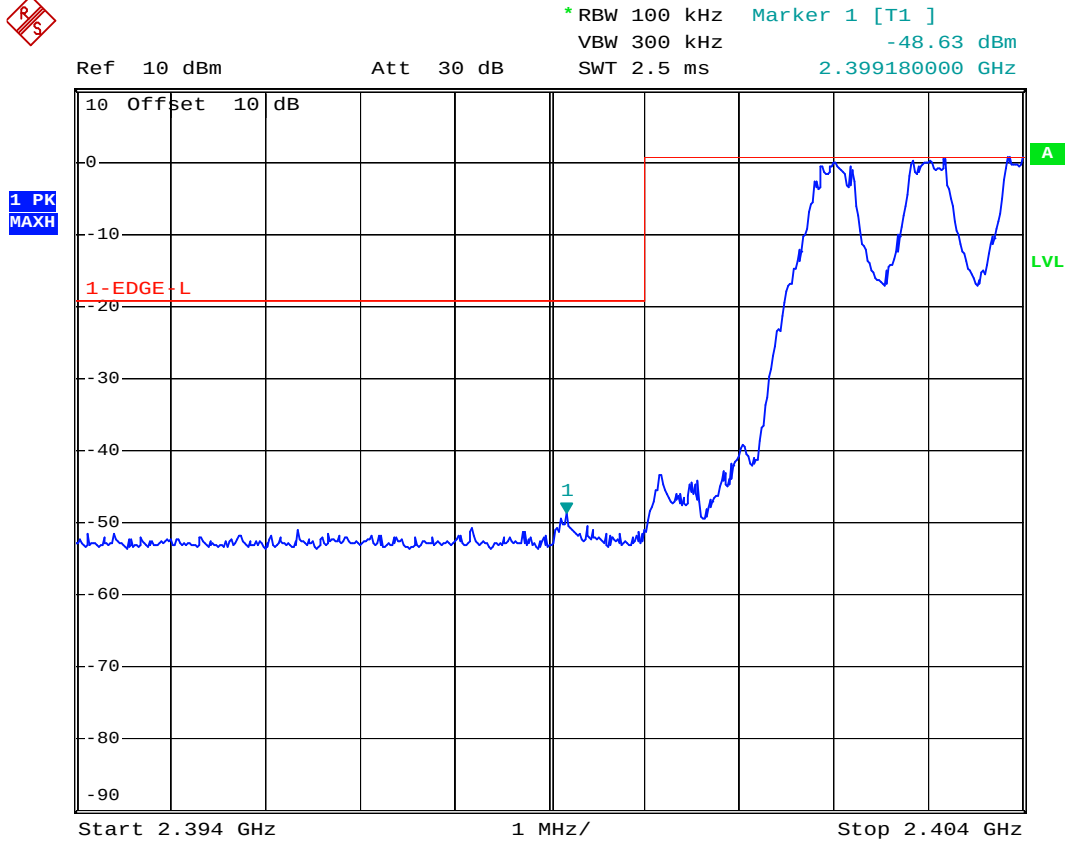

Upper Band Edge (Hoppin on)

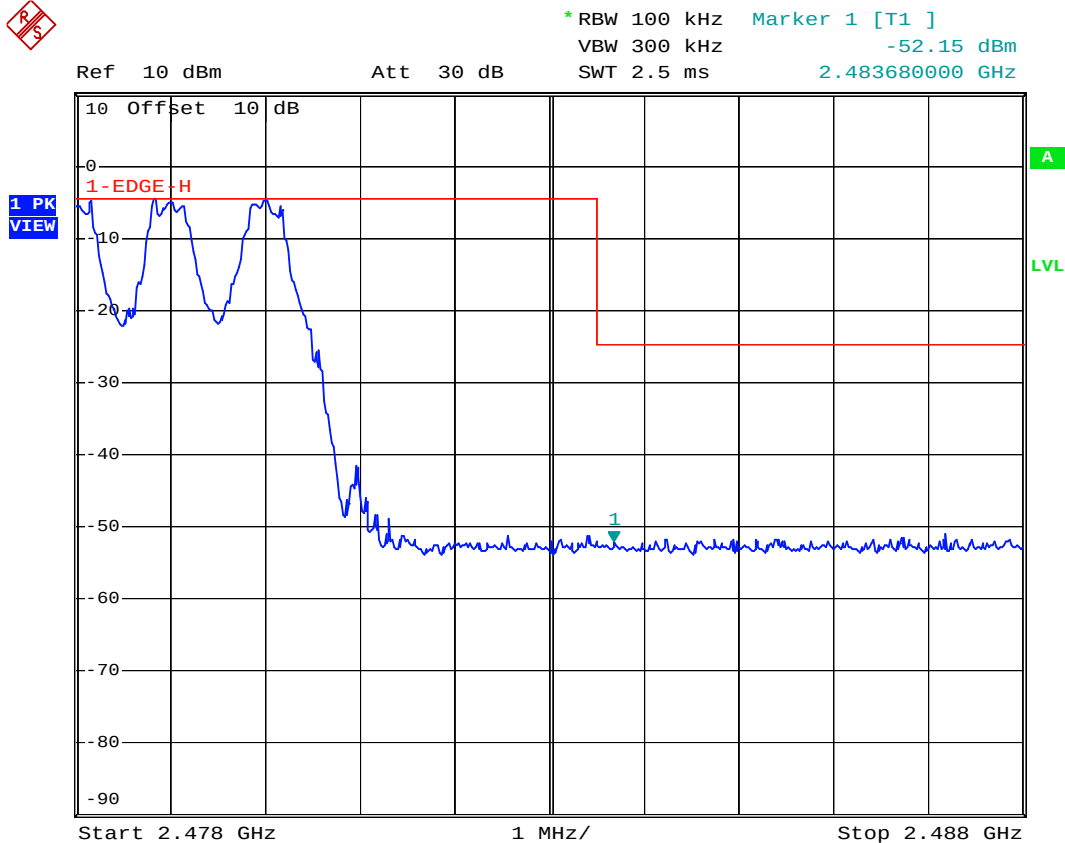

## 13 CONDUCTED SPURIOUS EMISSION MEASUREMENT

### 13.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### 13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
  - RBW = 100 kHz
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 13.3 Measurement Equipment

| Equipment  | Manufacturer          | Model No. | Calibration Date | Next Cal. Date |
|------------|-----------------------|-----------|------------------|----------------|
| Spectrum   | Rohde & Schwarz       | FSP40     | 2014/01/21       | 2015/01/20     |
| Attenuator | Weinschel Engineering | AY7602    | 2013/09/16       | 2014/09/15     |

### 13.4 Measurement Data

Test Date : Jul. 25, 2014      Temperature : 25 °C      Humidity : 65 %

**Test Mode: BR**

Mode : Low Channel

1 GHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Mid Channel

1 GHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Hi Channel

1 GHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

**Test Mode: EDR**

Mode : Low Channel

1 GHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Mid Channel


1 GHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Hi Channel


1 GHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

**Note : The expanded uncertainty: 2dB.**


Test Mode: BR  
Mode : Low Channel

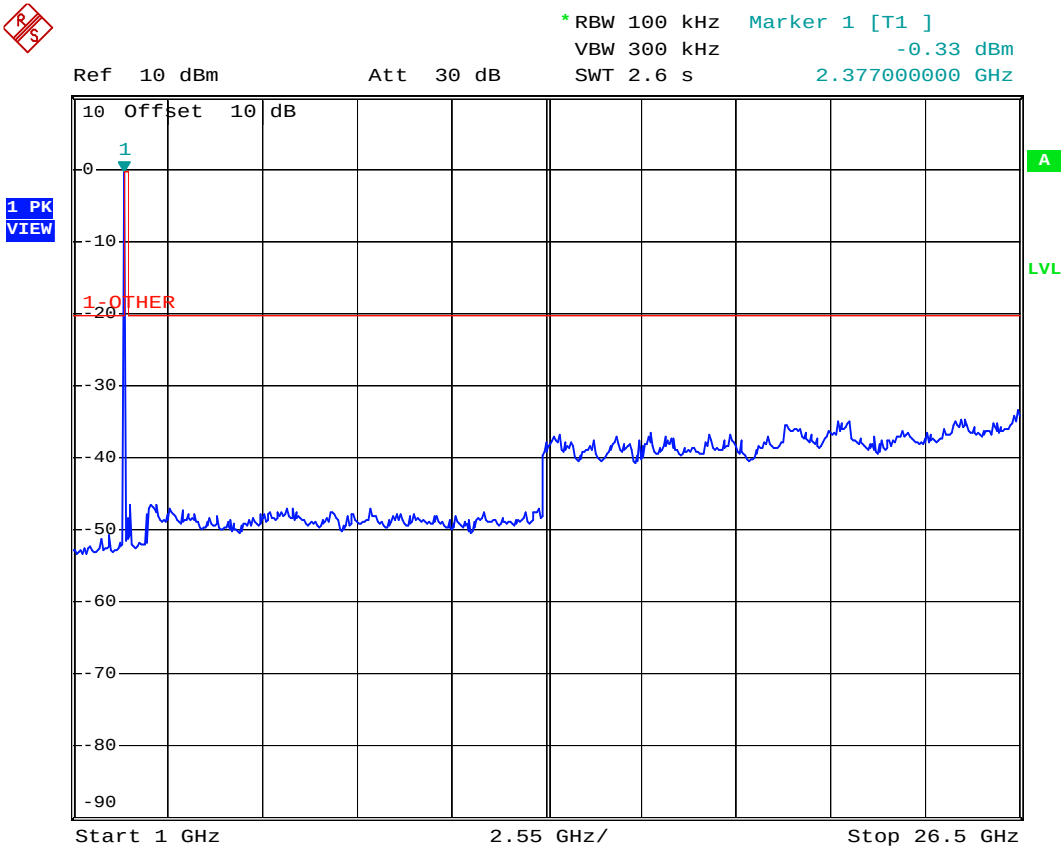

Mode : Mid Channel

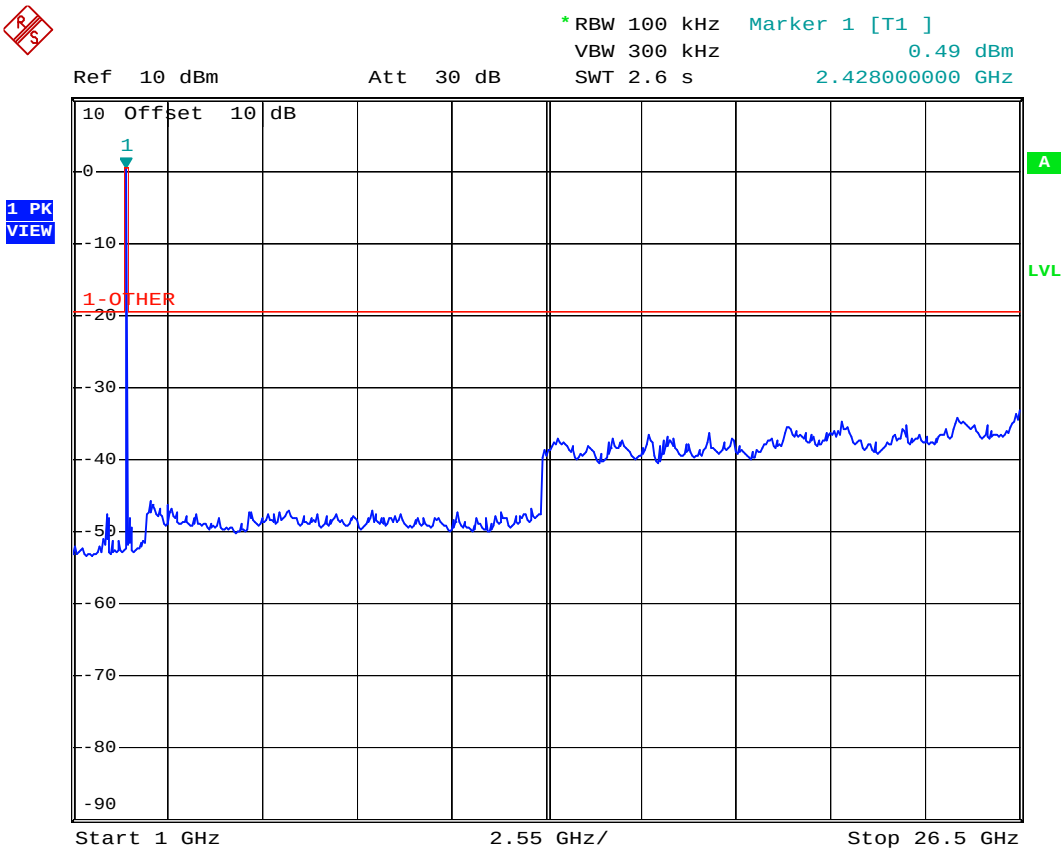


Mode : Hi Channel

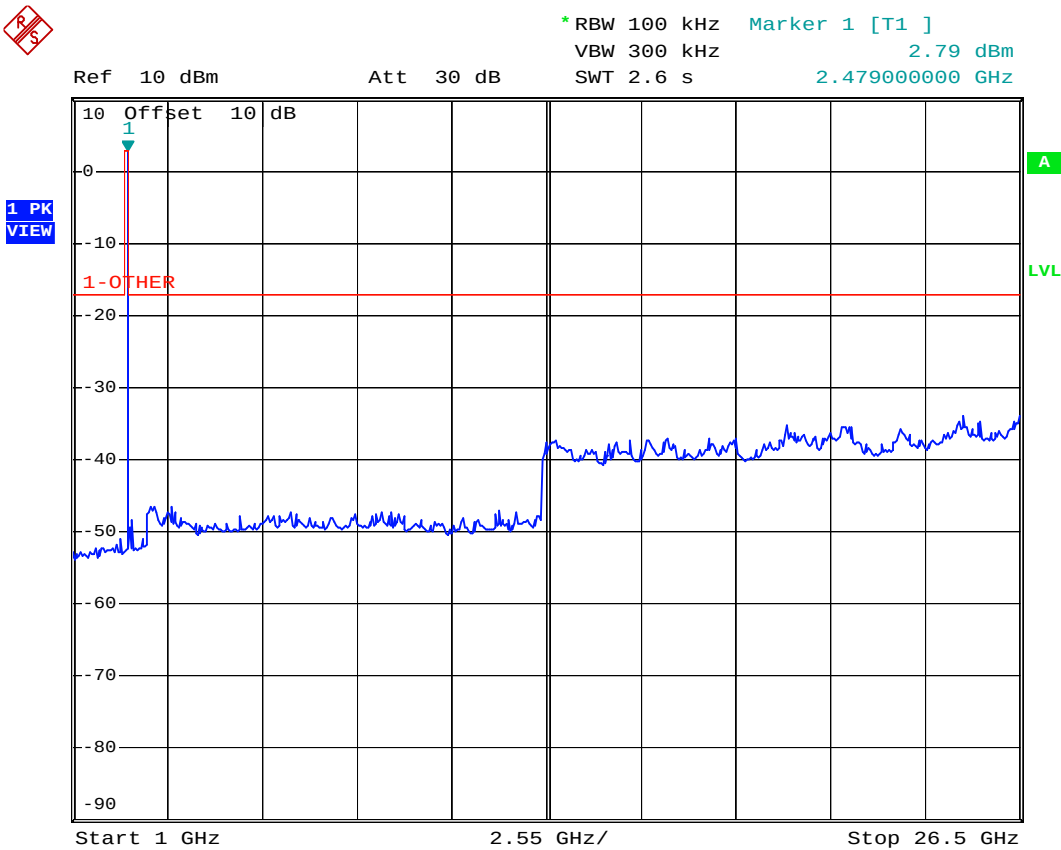


Test Mode: EDR

Mode : Low Channel

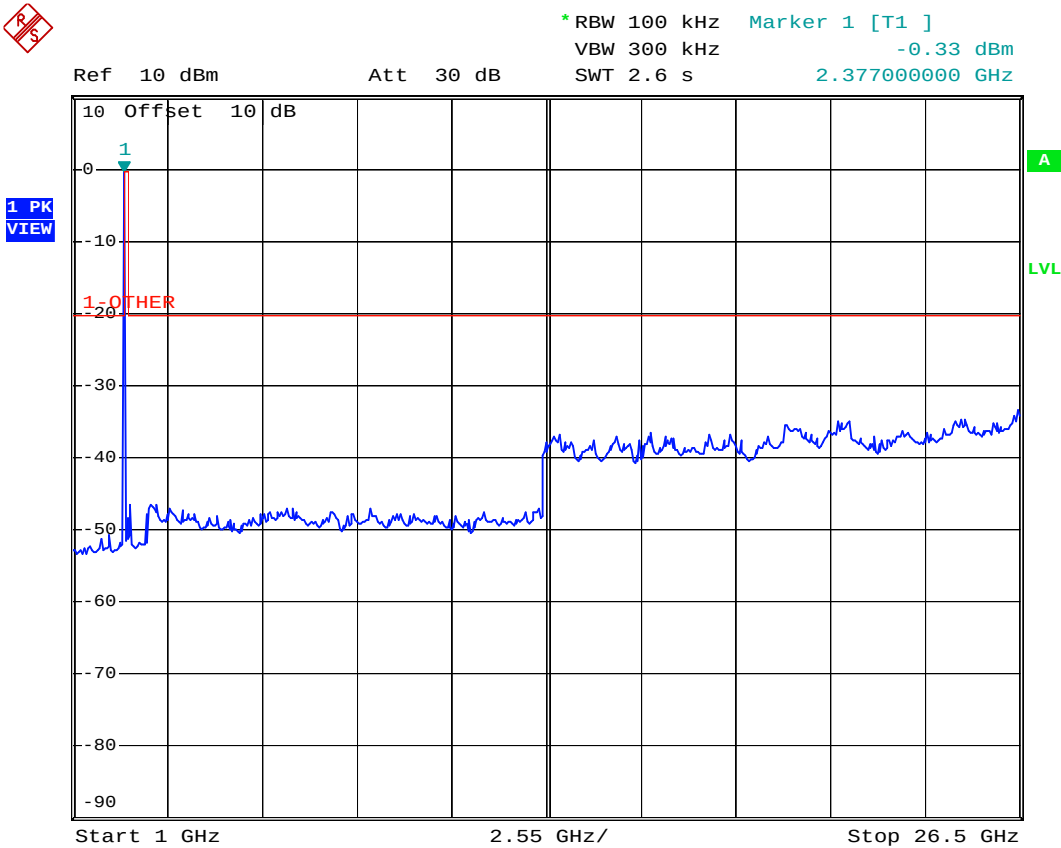

**Mode : Mid Channel**

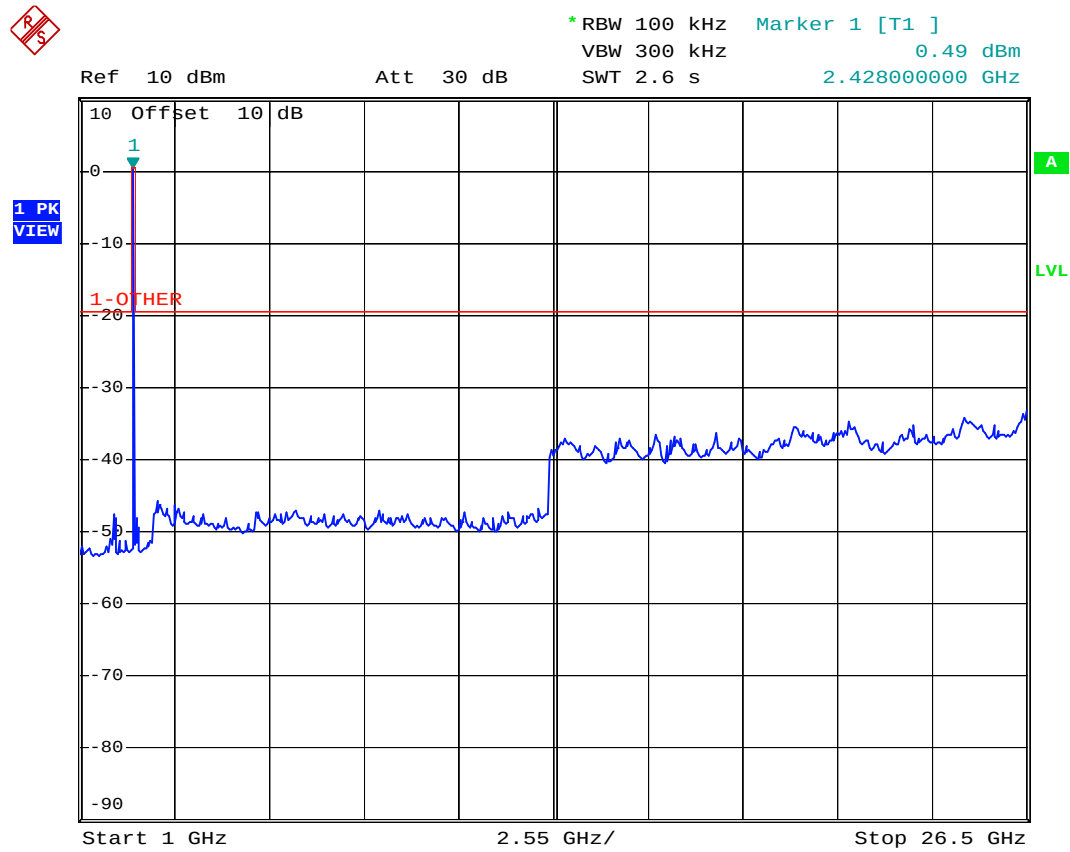

Mode : Hi Channel

