



Test Report

FCC Part15 Subpart C& RSS-247 Issue 2

Product Name : Speaker
Model No. : DCR010
FCC ID : YJ7DCR010
IC : 9082A-DCR010

Applicant : Black & Decker (Suzhou) Co., Ltd
Address : No. 200 Suhong Road, Export Processing Zone,
Suzhou Industrial Park, China

Date of Receipt : May. 24, 2018
Test Date : May. 25, 2018~ July. 09, 2018
Issued Date : July. 23, 2018
Report No. : 1852148R-RF-US-P06V03
Report Version : V 1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by A2LA, TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

Test Report Certification

Issued Date : July. 23, 2018

Report No. : 1852148R-RF-US-P06V03



Product Name : Speaker
Applicant : Black & Decker (Suzhou) Co., Ltd
Address : No. 200 Suhong Road, Export Processing Zone, Suzhou
Industrial Park, China
Manufacturer : Black & Decker (U.S.) Inc.
Address : 701 East Joppa Rd. Towson, Maryland 21286 U.S.A
Model No. : DCR010
FCC ID : YJ7DCR010
IC : 9082A-DCR010
EUT Voltage : 20Vdc/12Vdc
Test Voltage : AC120V/60Hz
Brand Name : DEWALT
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C
KDB DA 00-705 Released March 30, 2000
ANSI C63.10: 2013
RSS-Gen Issue 5/RSS-247 Issue 2
Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Designation Number: CN1199; ISED Lab Code: 4075B

Documented By

:



(Project Assistant: Kitty Li)

Reviewed By

:



(Senior Engineer: Frank He)

Approved By

:



(Engineering Manager: Harry Zhao)

TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description	7
1.2. Antenna information	9
1.3. Mode of Operation	10
1.4. Tested System Details	11
1.5. Configuration of Tested System	12
1.6. EUT Exercise Software	13
2. Technical Test	14
2.1. Summary of Test Result	14
2.2. Test Environment	16
3. Conducted Emission	17
3.1. Test Equipment	17
3.2. Test Setup	17
3.3. Limit	18
3.4. Test Procedure	18
3.5. Uncertainty	18
3.6. Test Result	19
4. Emissions in restricted frequency bands	19
4.1. Test Equipment	21
4.2. Test Setup	22
4.3. Limit	23
4.4. Test Procedure	26
4.5. Uncertainty	26
4.6. Test Result	27
5. 20dB Bandwidth	47
5.1. Test Equipment	47
5.2. Test Setup	47
5.3. Limit	47
5.4. Test Procedure	48
5.5. Uncertainty	48
5.6. Test Result	49
6. Carrier Frequency Separation	55
6.1. Test Equipment	55
6.2. Test Setup	55
6.3. Limit	56
6.4. Test Procedure	56
6.5. Uncertainty	56

6.6.	Test Result	57
7.	Number of Hopping Frequencies	63
7.1.	Test Equipment	63
7.2.	Test Setup	63
7.3.	Limit.....	63
7.4.	Test Procedure	64
7.5.	Uncertainty	64
7.6.	Test Result	65
8.	Time of Occupancy (Dwell Time)	68
8.1.	Test Equipment	68
8.2.	Test Setup	68
8.3.	Limit.....	68
8.4.	Test Procedure	69
8.5.	Uncertainty	69
8.6.	Test Result	70
9.	Peak Output Power	73
9.1.	Test Equipment	73
9.2.	Test Setup	73
9.3.	Limit.....	74
9.4.	Test Procedure	74
9.5.	Uncertainty	74
9.6.	Test Result	75
10.	Emissions in non-restricted frequency bands	78
10.1.	Test Equipment	78
10.2.	Test Setup	78
10.3.	Limit.....	79
10.4.	Test Procedure	79
10.5.	Uncertainty	79
10.6.	Test Result	80
11.	Radiated Emission Band Edge	81
11.1.	Test Equipment	81
11.2.	Test Setup	81
11.3.	Limit.....	82
11.4.	Test Procedure	82
11.5.	Uncertainty	82
11.6.	Duty Factor.....	83
11.7.	Test Result	84
12.	Antenna Requirement	96

12.1. Limit.....	96
12.2. Antenna Connector Construction	96

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1852148R-RF-US-P06V03	V1.0	Initial Issued Report	July. 23, 2018

1. General Information

1.1. EUT Description

Product Name	Speaker
Model No.	DCR010
Working Voltage	20Vdc/12Vdc
Test Voltage	AC120V/60Hz
Bluetooth Version	V3.0
Bluetooth Specification	BDR+EDR
Frequency Range	2402- 2480 MHz
Channel Number	79
Channel Separation	1MHz
Type of Modulation	GFSK, Pi/4 DQPSK, 8DPSK
Data Rate	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List
Adapter #1	Model: SW1202700-I04 Input:100-240~50/60Hz, 800mA Output: 12V,2700mA
Adapter #2	Model: GQ36-120270-AU Input:100-240~50/60Hz,1.0A Output: 12V,2.7A

Note: We have evaluated two model adapters,shown in the report is the worst data (Adapter #2)

Bluetooth Working Frequency of Each Channel: (For BDR+EDR)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

1.2 Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Sectorized		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Dipole		
			☐	Sectorized		
	☒	Internal	☐	PIFA		
			☒	PCB		
			☐	Ceramic Chip Antenna		
			☐	Monopole Antenna		
Antenna Technology	Ant Gain (dBi)					
☒ SISO	Ant1:1.5					

1.3 Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmitter-1Mbps(GFSK_DH5)
Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)
Mode 3: Transmitter-3Mbps(8DPSK_DH5)
Mode 4: Transmitter-Hopping

Note:

1. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
2. Regards to the frequency band operation for systems using FHSS modulation: normal operation (hopping) was selected to test for conducted spurious test.
3. The extreme test condition for voltage and temperature were declared by the manufacturer.
4. The reading values of all the test items contain cable loss.


1.4 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	N/A	N/A	N/A	N/A	N/A

1.5 Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

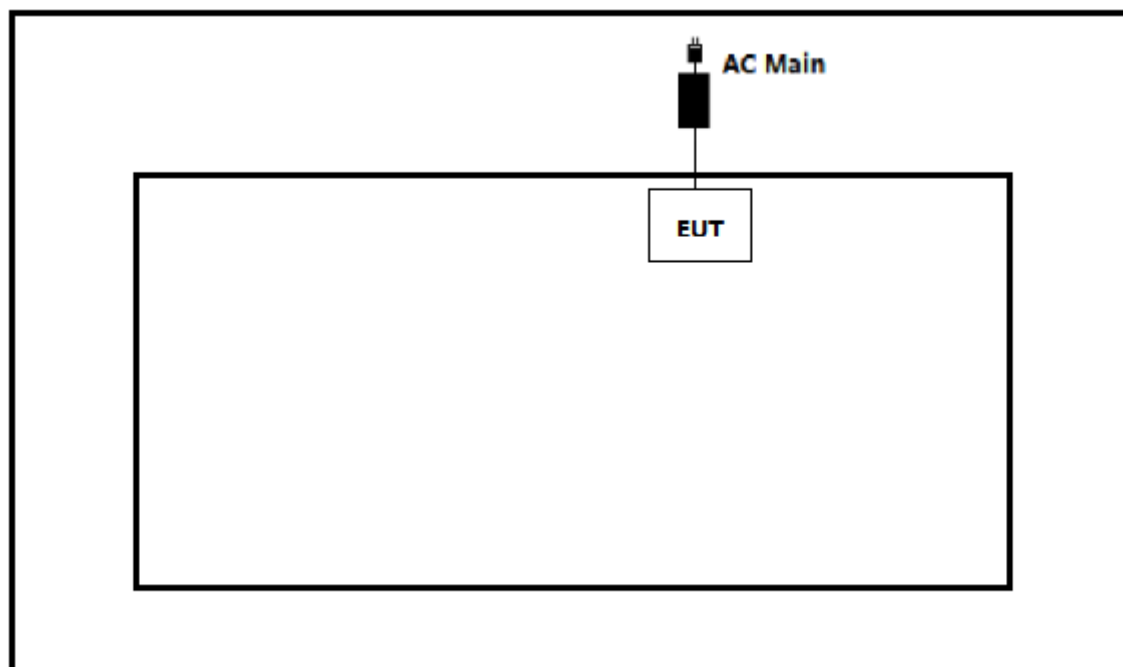

Test setup Diagram- Radiated Emission

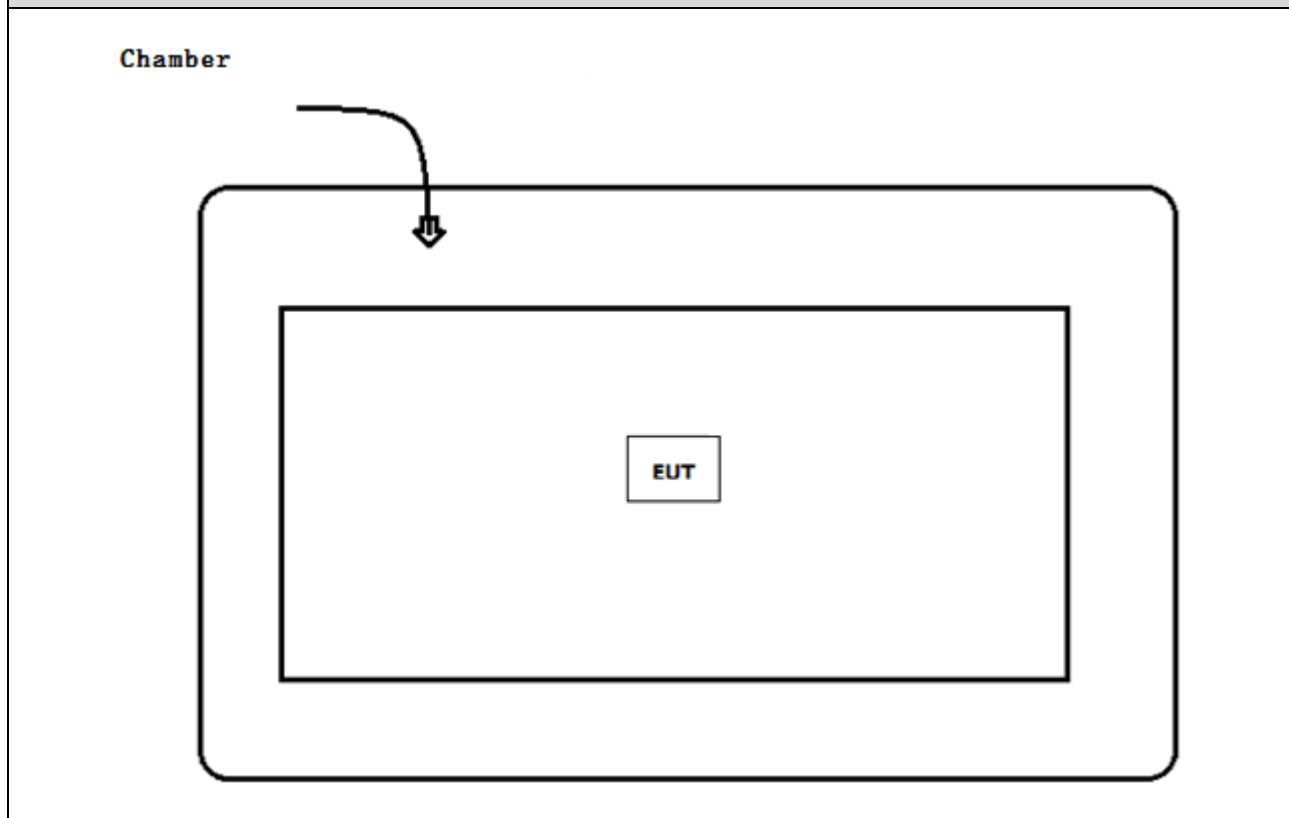

1.6 EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Scan the bar code, and set the test mode and channel, then press OK to start to continue transmit.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
- ☐ Deviations from the test standards as below description:

For FCC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C Section 15.207	Yes	No
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C Section 15.209	Yes	No
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C Section 15.247(a)(1)	Yes	No
Carrier Frequency Separation	FCC CFR Title 47 Part 15 Subpart C Section 15.247(a)(1)	Yes	No
Number of Hopping Frequencies	FCC CFR Title 47 Part 15 Subpart C Section 15.247(a)(1)(iii)	Yes	No
Time of Occupancy (Dwell Time)	FCC CFR Title 47 Part 15 Subpart C Section 15.247(a)(1)(iii)	Yes	No
Peak Output Power	FCC CFR Title 47 Part 15 Subpart C Section 15.247(b)(1)	Yes	No
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C Section 15.215(c), 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C 15.247(d)	Yes	No
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C Section 15.203	Yes	No

For ISED

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 5 Section 8.8	Yes	No
Radiated Emission	RSS-Gen Issue 5 Section 8.9	Yes	No
20dB Bandwidth	RSS-247 Issue 2 Section 5.1	Yes	No
Carrier Frequency Separation	RSS-247 Issue 2 Section 5.1	Yes	No
Number of Hopping Frequencies	RSS-247 Issue 2 Section 5.1	Yes	No
Time of Occupancy (Dwell Time)	RSS-247 Issue 2 Section 5.1	Yes	No
Peak Output Power	RSS-247 Issue 2 Section 5.4	Yes	No
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	Yes	No
Radiated Emission Band Edge	RSS-Gen Issue 5 Section 8.10	Yes	No
Antenna Requirement	RSS-Gen Issue 5 Section 8.3	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000


3. Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2018.03.05	2019.03.04
Two-Line V-Network	R&S	ENV 216	101189	2017.07.16	2018.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.15	2018.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.15	2018.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2018.01.05	2019.01.04

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

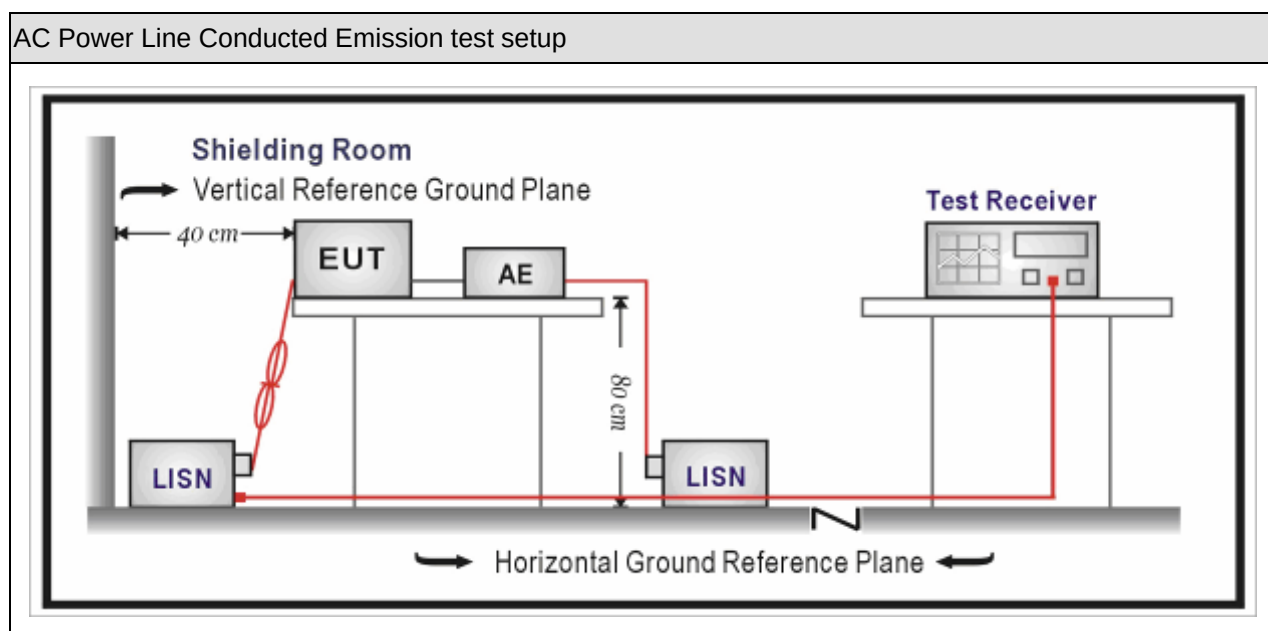

3.3. Limit

Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure


Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB

3.6. Test Result

Engineer: Lucas	
Site: TR1	Time: 2018/05/29
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1	

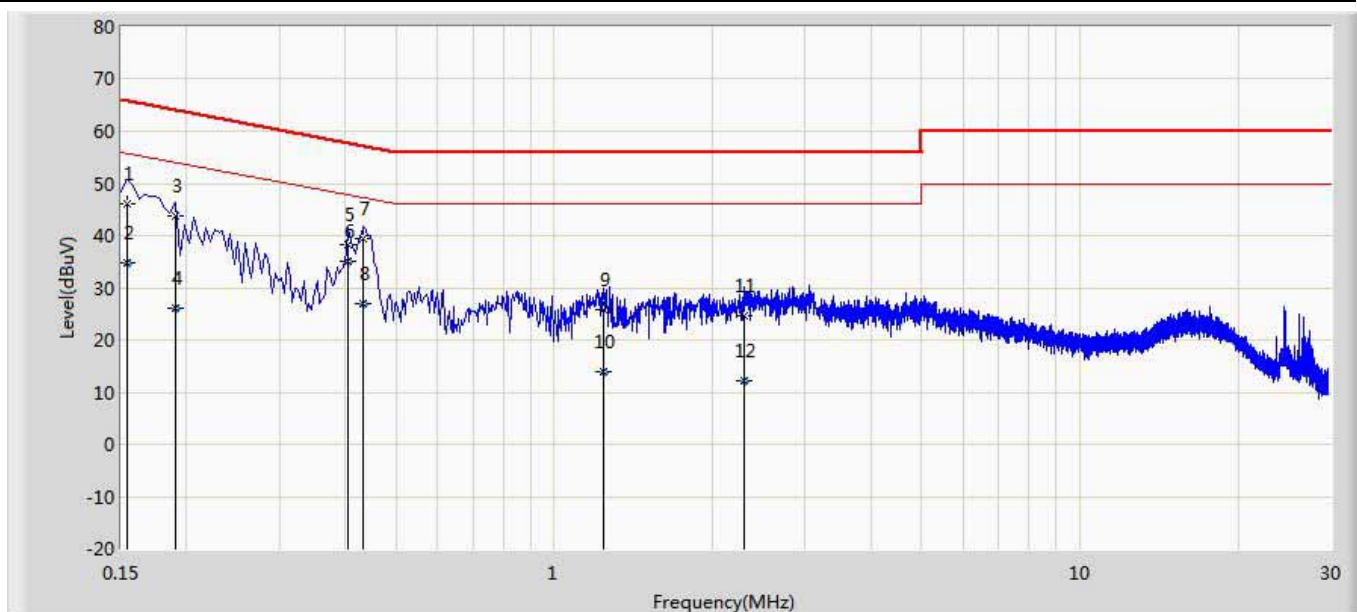


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.154	45.954	36.320	-19.931	65.886	9.609	0.025	0.000	QP
2		0.154	34.844	25.210	-21.041	55.886	9.609	0.025	0.000	AV
3		0.190	43.840	34.210	-21.017	64.857	9.602	0.028	0.000	QP
4		0.190	26.030	16.400	-28.827	54.857	9.602	0.028	0.000	AV
5		0.406	38.235	28.597	-20.451	58.686	9.600	0.039	0.000	QP
6	*	0.406	35.207	25.568	-13.479	48.686	9.600	0.039	0.000	AV
7		0.434	39.475	29.835	-18.411	57.886	9.600	0.040	0.000	QP
8		0.434	26.863	17.223	-21.023	47.886	9.600	0.040	0.000	AV
9		1.238	25.927	16.251	-30.073	56.000	9.610	0.066	0.000	QP
10		1.238	13.874	4.198	-32.126	46.000	9.610	0.066	0.000	AV
11		2.294	24.780	15.071	-31.220	56.000	9.615	0.094	0.000	QP
12		2.294	12.250	2.541	-33.750	46.000	9.615	0.094	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Lucas	
Site: TR1	Time: 2018/05/29
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1	

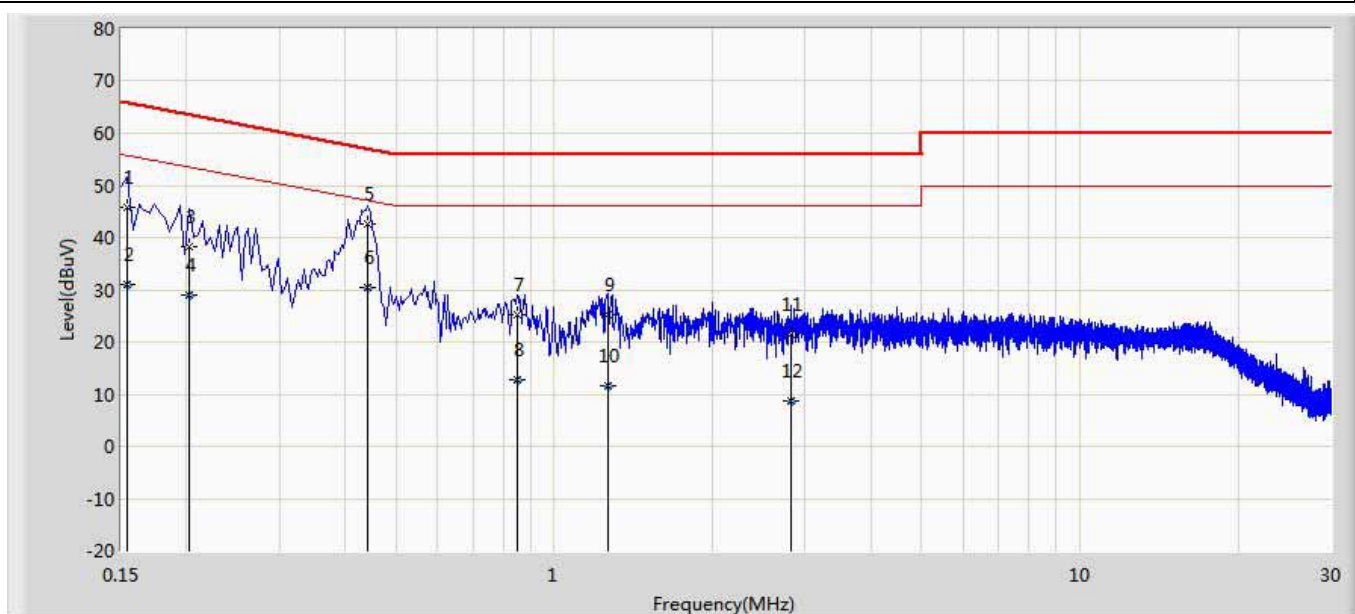

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.154	45.858	36.240	-20.027	65.886	9.593	0.025	0.000	QP
2		0.154	30.930	21.312	-24.955	55.886	9.593	0.025	0.000	AV
3		0.202	38.267	28.640	-26.247	64.514	9.598	0.029	0.000	QP
4		0.202	28.977	19.350	-25.537	54.514	9.598	0.029	0.000	AV
5	*	0.442	42.613	32.981	-15.044	57.657	9.592	0.041	0.000	QP
6		0.442	30.290	20.658	-17.367	47.657	9.592	0.041	0.000	AV
7		0.850	25.336	15.692	-30.664	56.000	9.590	0.054	0.000	QP
8		0.850	12.662	3.018	-33.338	46.000	9.590	0.054	0.000	AV
9		1.262	25.140	15.478	-30.860	56.000	9.595	0.067	0.000	QP
10		1.262	11.548	1.887	-34.452	46.000	9.595	0.067	0.000	AV
11		2.822	21.437	11.711	-34.563	56.000	9.621	0.105	0.000	QP
12		2.822	8.719	-1.007	-37.281	46.000	9.621	0.105	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.29	2019.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2017.11.16	2018.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2017.10.16	2018.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.03.02	2019.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2018.01.04	2019.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2018.05.06	2019.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2018.05.06	2019.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2018.01.22	2019.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.11.25	2018.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2018.03.02	2019.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2018.06.10	2019.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.04	2019.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

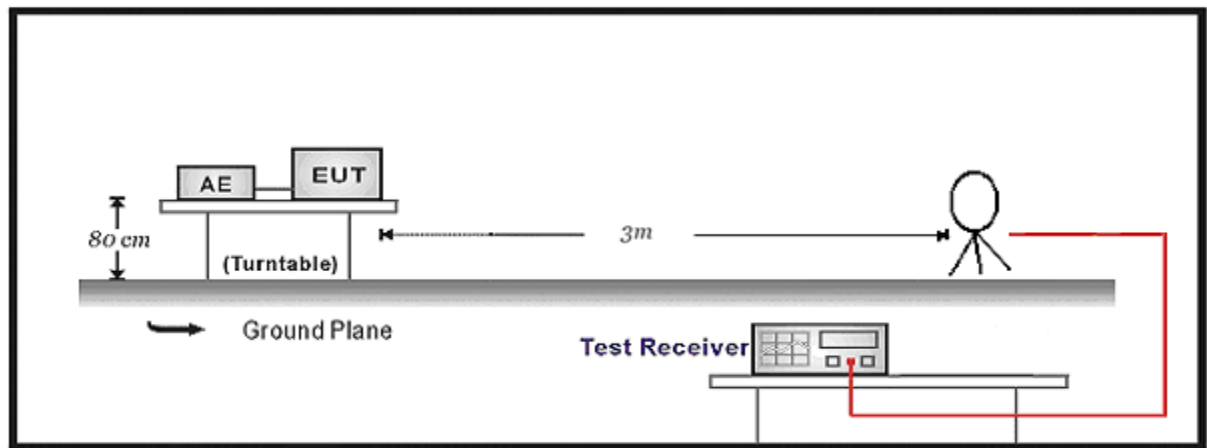

30MHz-1GHz Test Setup:

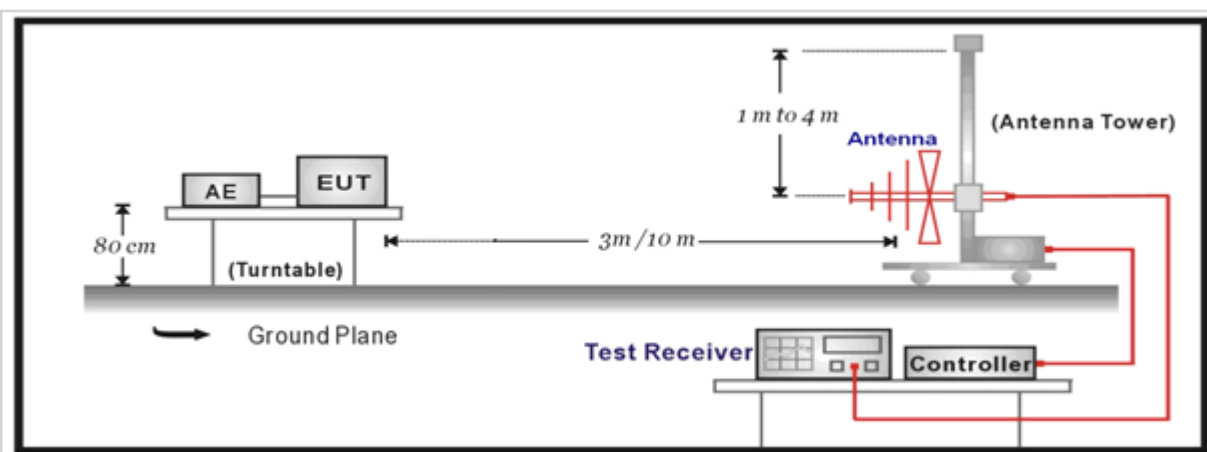

Above 1GHz Test Setup:

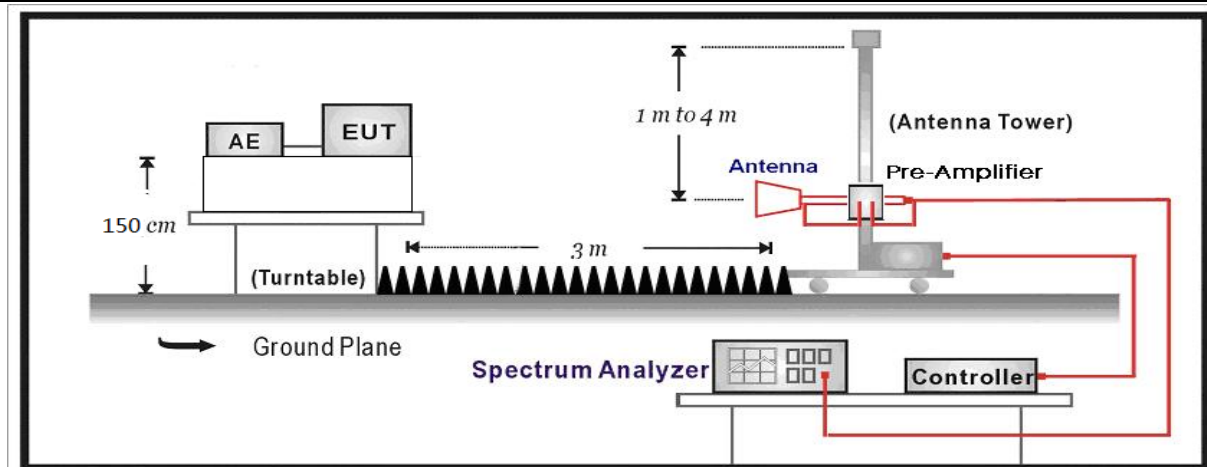

4.3. Limit

For FCC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

For ISED:

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090-0.110	13.36-13.41	1645.5-1646.5	13.25-13.4
2.1735-2.1905	16.42-16.423	1660-1710	14.47-14.5
3.020-3.026	16.69475-16.69525	1718.8-1722.2	15.35-16.2
4.125-4.128	16.80425-16.80475	2200-2300	17.7-21.4
4.17725-4.17775	25.5-25.67	2310-2390	22.01-23.12
4.20725-4.20775	37.5-38.25	2655-2900	23.6-24.0
5.677-5.683	73-74.6	3260-3267	31.2-31.8
6.215-6.218	74.8-75.2	3332-3339	36.43-36.5
6.26775-6.26825	108-138	3345.8-3358	Above 38.6
6.31175-6.31225	156.52475-156.52525	3500-4400	
8.291-8.294	156.7-156.9	4500-5150	
8.362-8.366	240-285	5350-5460	
8.37625-8.38675	322-335.4	7250-7750	
8.41425-8.41475	399.9-410	8025-8500	
12.29-12.293	608-614	9.0-9.2	
12.51975-12.52025	960-1427	9.3-9.5	
12.57675-12.57725	1435-1626.5	10.6-12.7	

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB


4.6. Test Result

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

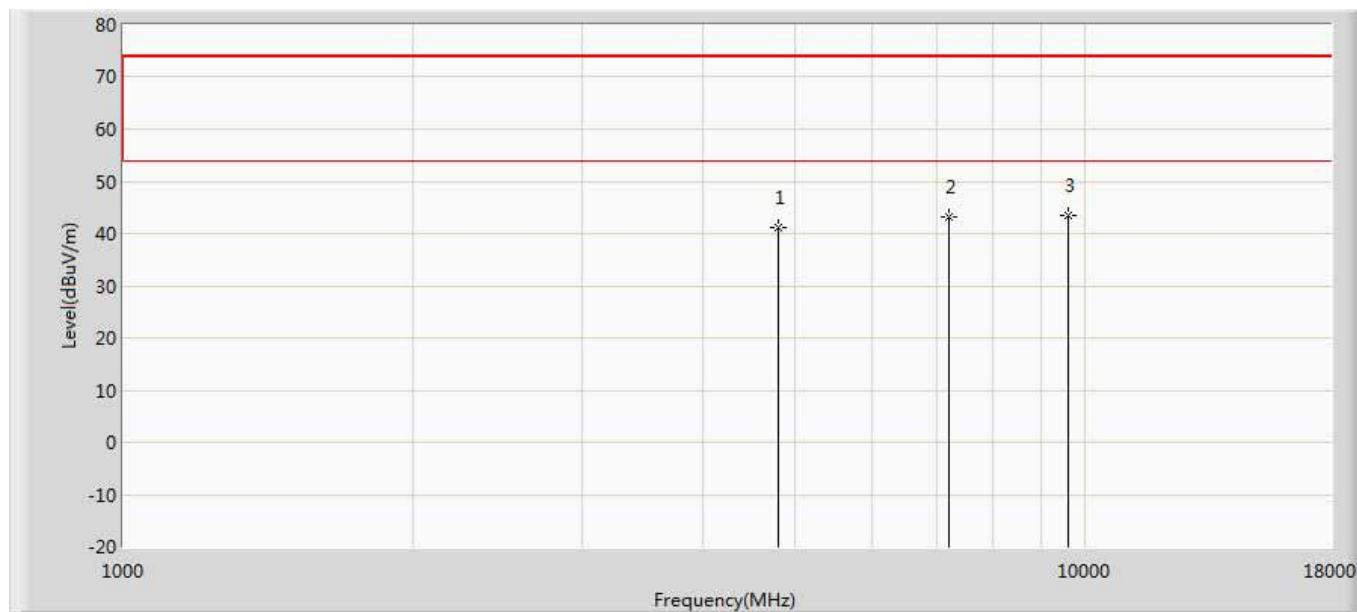


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.114	42.837	-32.886	74.000	-1.723	PK
2		7206.000	43.053	41.134	-30.947	74.000	1.919	PK
3	*	9608.000	43.478	38.579	-30.522	74.000	4.899	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

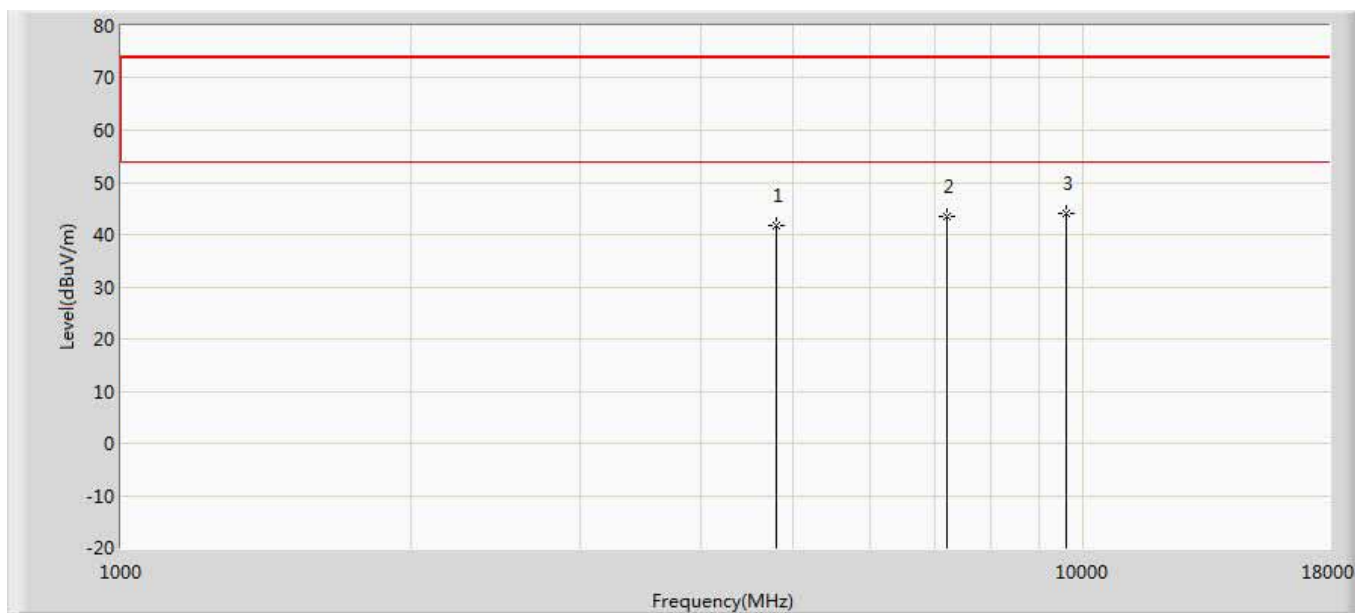


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.618	43.341	-32.382	74.000	-1.723	PK
2		7206.000	43.549	41.630	-30.451	74.000	1.919	PK
3	*	9608.000	44.161	39.262	-29.839	74.000	4.899	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2441MHz by DH5	

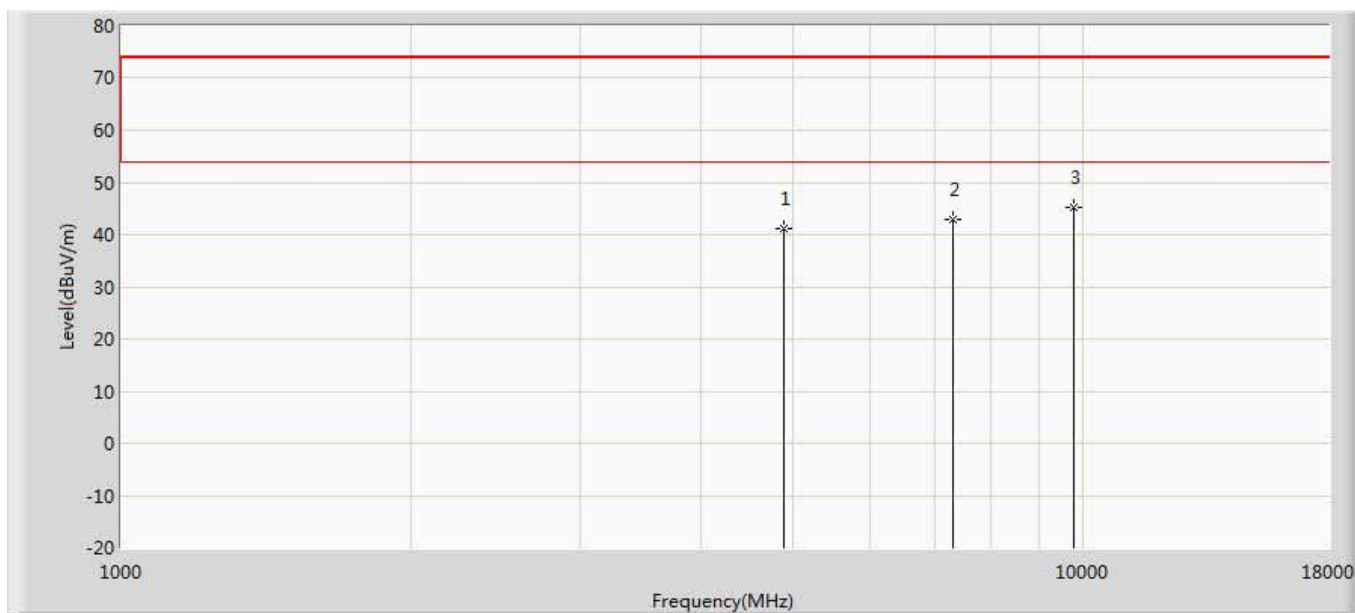


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	41.170	42.487	-32.830	74.000	-1.317	PK
2		7323.000	42.756	40.848	-31.244	74.000	1.909	PK
3	*	9764.000	45.319	39.319	-28.681	74.000	6.001	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2441MHz by DH5	

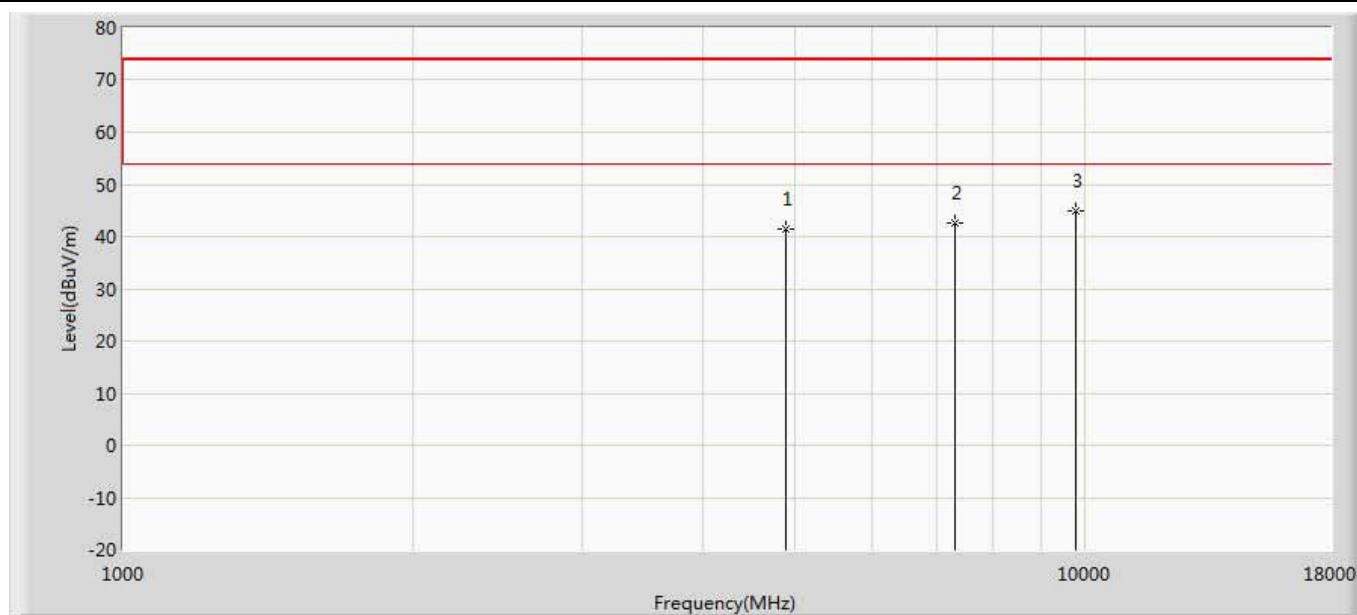


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	41.500	42.817	-32.500	74.000	-1.317	PK
2		7323.000	42.538	40.630	-31.462	74.000	1.909	PK
3	*	9764.000	44.927	38.927	-29.073	74.000	6.001	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

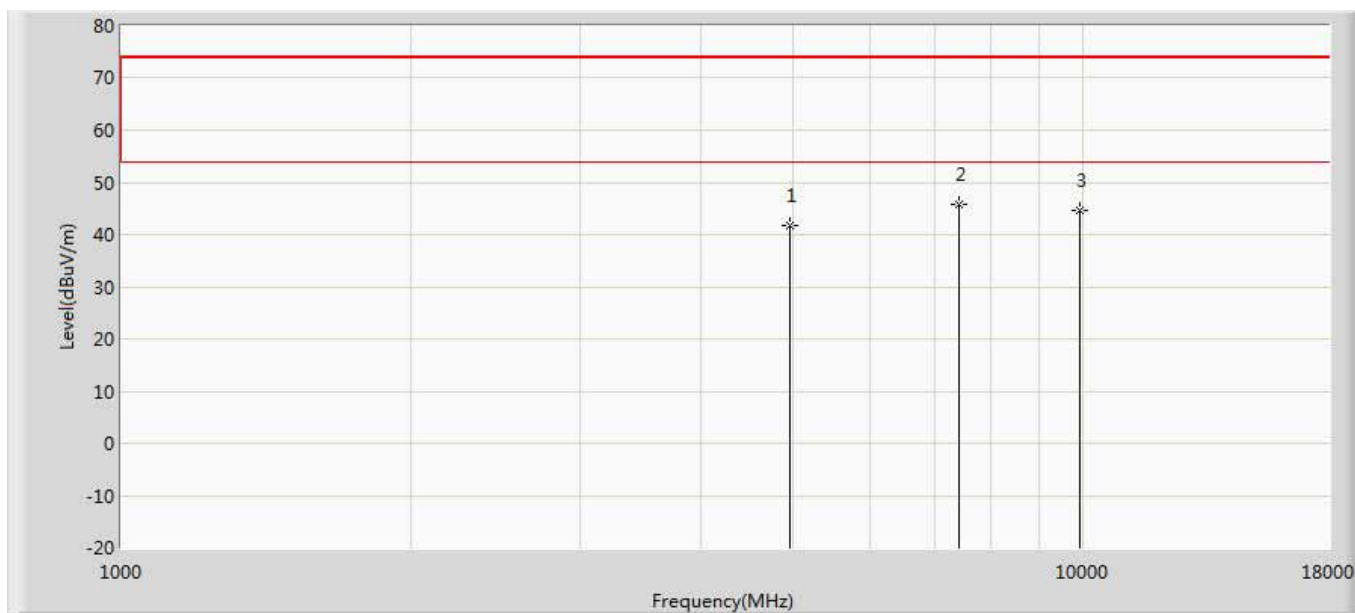


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.827	42.975	-32.173	74.000	-1.148	PK
2	*	7440.000	45.695	43.269	-28.305	74.000	2.426	PK
3		9920.000	44.723	39.469	-29.277	74.000	5.253	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

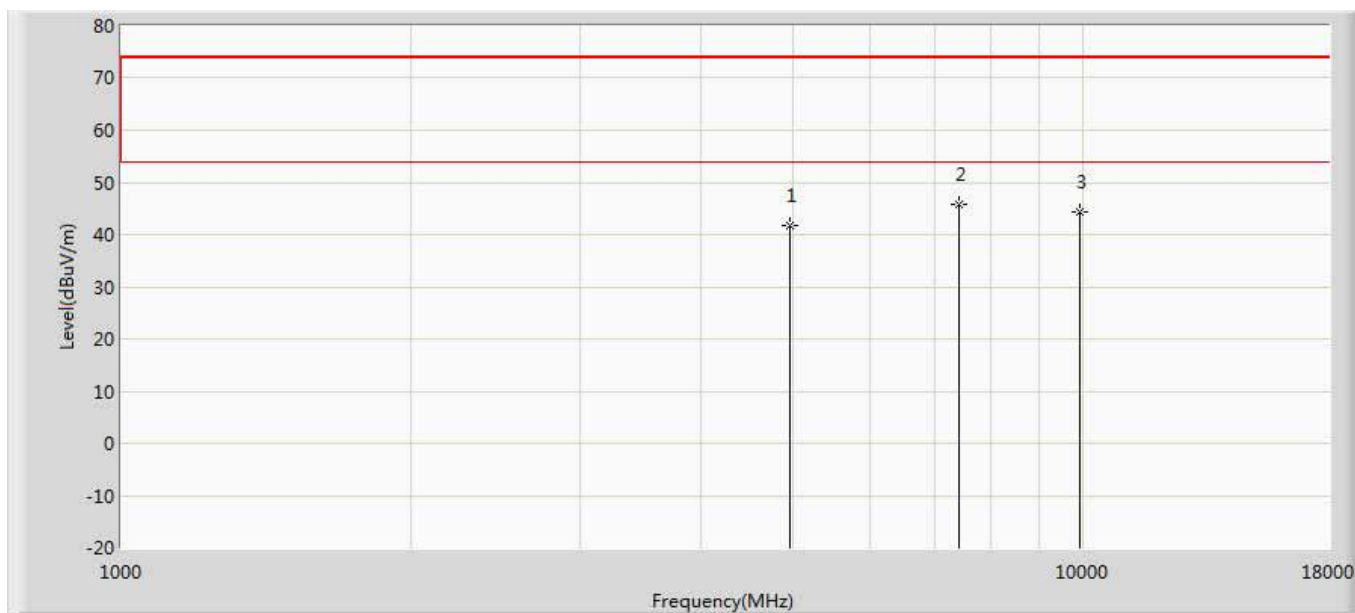


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.881	43.029	-32.119	74.000	-1.148	PK
2	*	7440.000	45.751	43.325	-28.249	74.000	2.426	PK
3		9920.000	44.367	39.113	-29.633	74.000	5.253	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

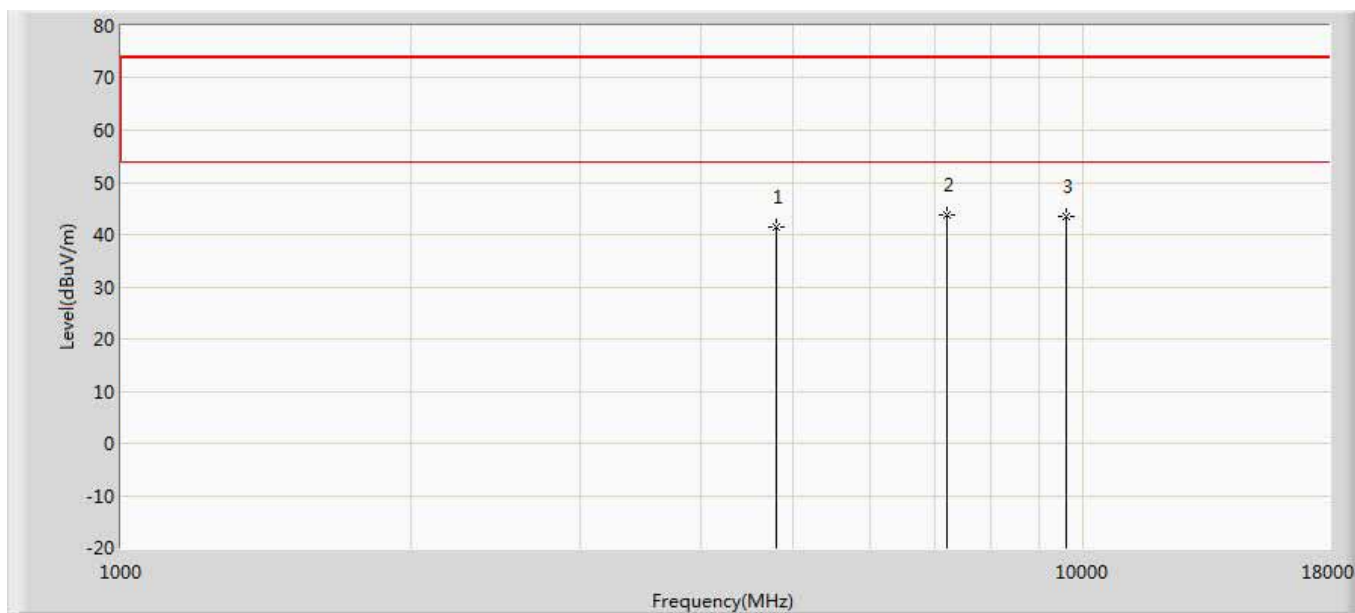


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.435	43.158	-32.565	74.000	-1.723	PK
2	*	7206.000	43.800	41.881	-30.200	74.000	1.919	PK
3		9608.000	43.512	38.613	-30.488	74.000	4.899	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

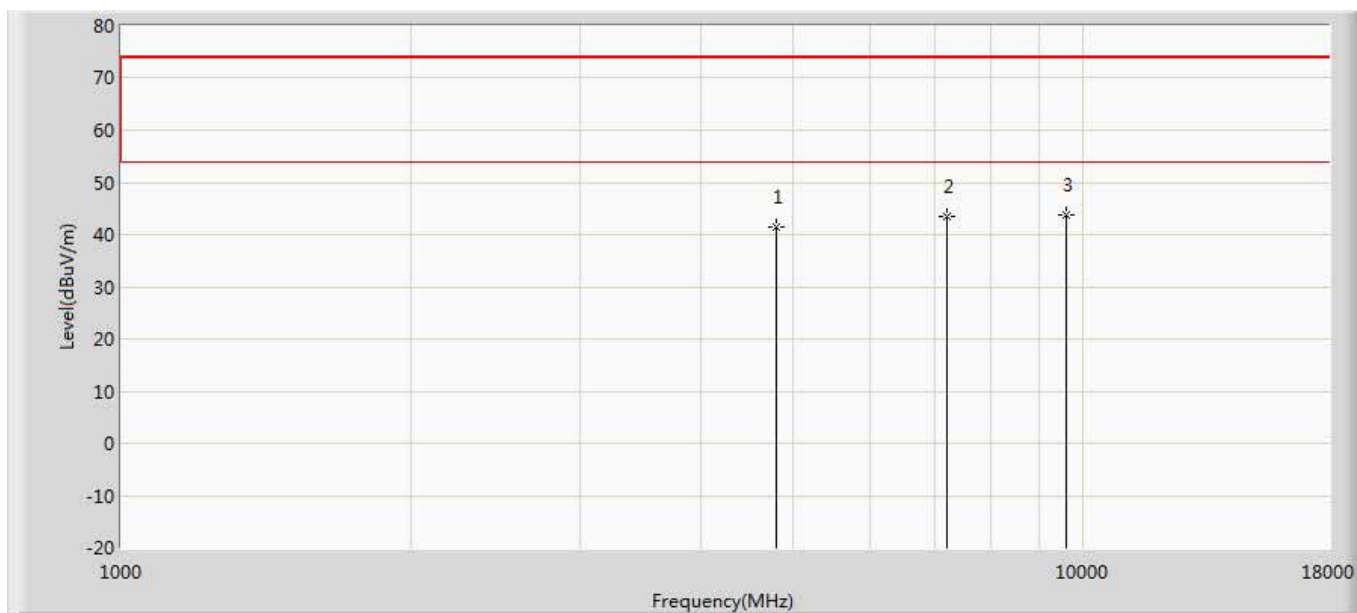


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.332	43.055	-32.668	74.000	-1.723	PK
2		7206.000	43.567	41.648	-30.433	74.000	1.919	PK
3	*	9608.000	43.823	38.924	-30.177	74.000	4.899	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2441MHz by 2DH5	

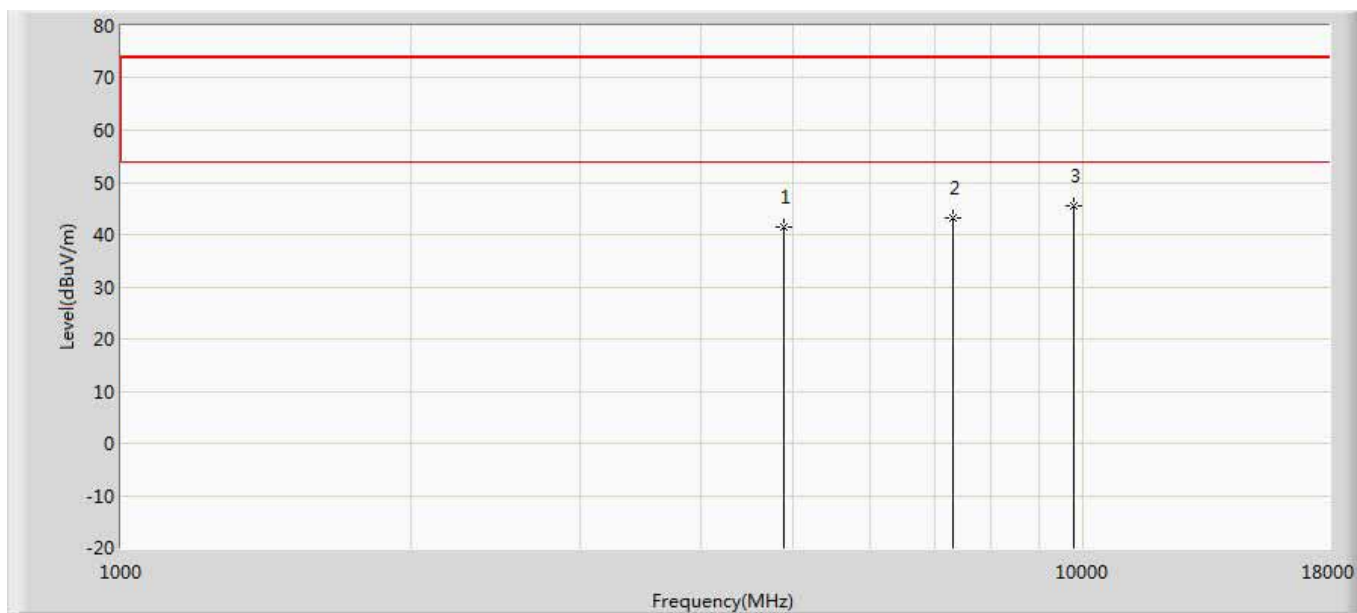


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	41.339	42.656	-32.661	74.000	-1.317	PK
2		7323.000	43.318	41.410	-30.682	74.000	1.909	PK
3	*	9764.000	45.542	39.542	-28.458	74.000	6.001	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2441MHz by 2DH5	

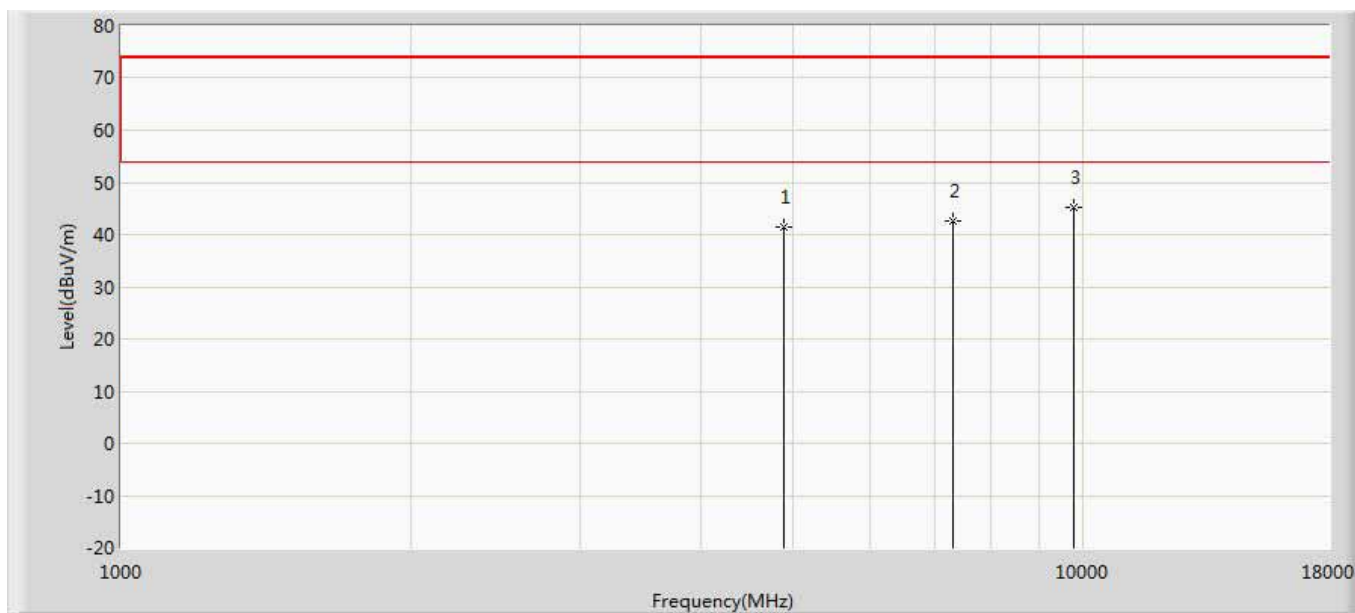


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	41.348	42.665	-32.652	74.000	-1.317	PK
2		7323.000	42.485	40.577	-31.515	74.000	1.909	PK
3	*	9764.000	45.362	39.362	-28.638	74.000	6.001	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

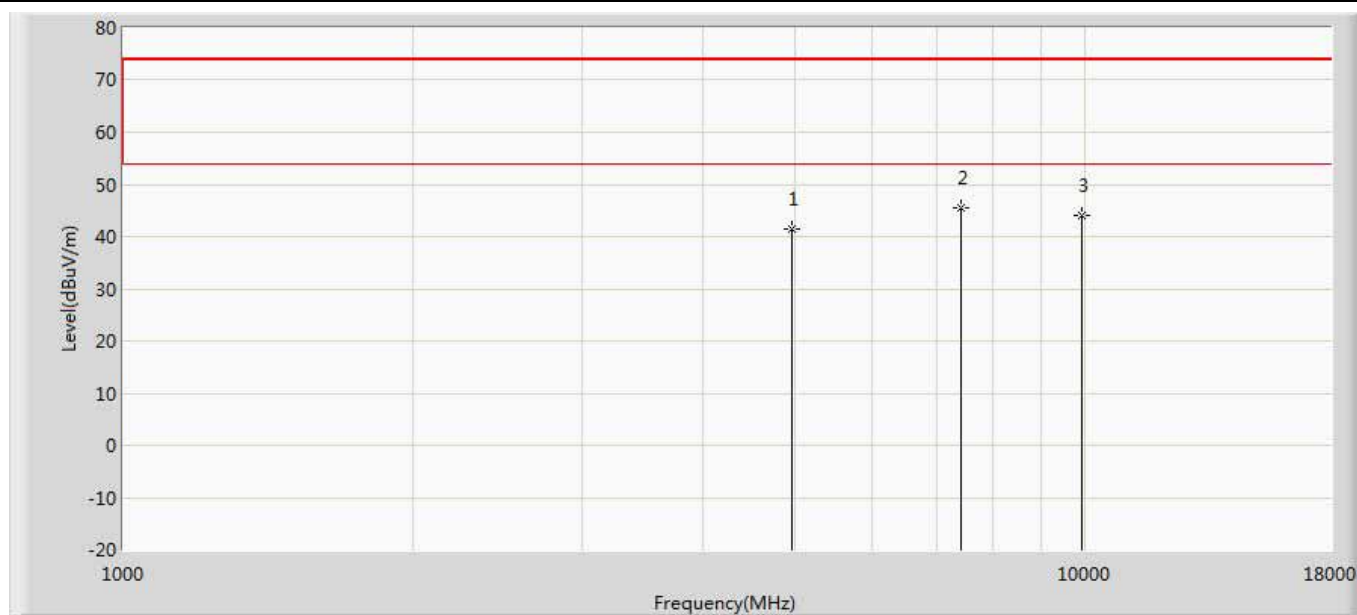


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.402	42.550	-32.598	74.000	-1.148	PK
2	*	7440.000	45.517	43.091	-28.483	74.000	2.426	PK
3		9920.000	44.180	38.926	-29.820	74.000	5.253	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

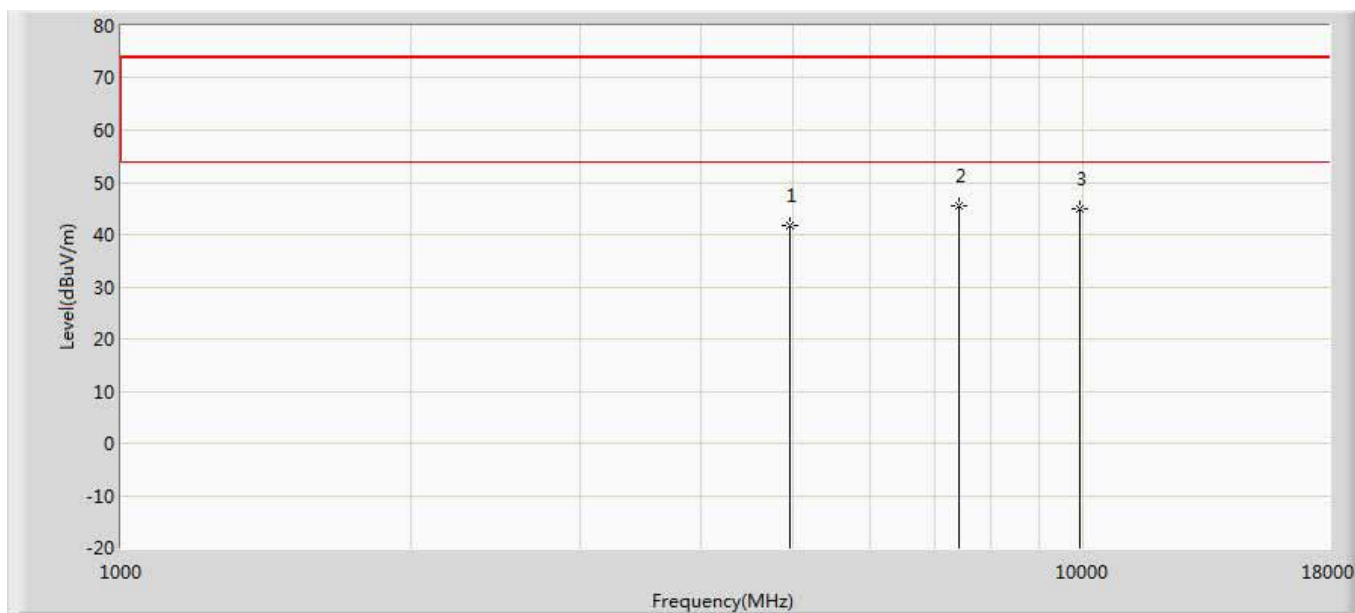


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.826	42.974	-32.174	74.000	-1.148	PK
2	*	7440.000	45.629	43.203	-28.371	74.000	2.426	PK
3		9920.000	45.032	39.778	-28.968	74.000	5.253	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

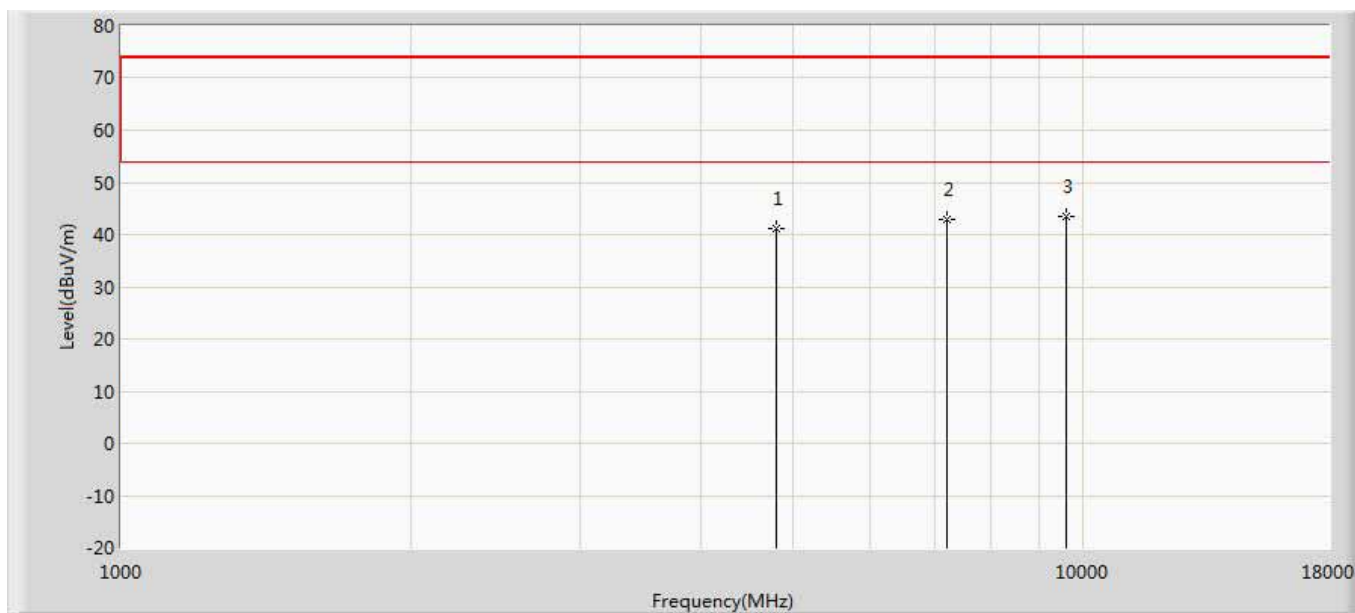


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.102	42.825	-32.898	74.000	-1.723	PK
2		7206.000	42.909	40.990	-31.091	74.000	1.919	PK
3	*	9608.000	43.376	38.477	-30.624	74.000	4.899	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

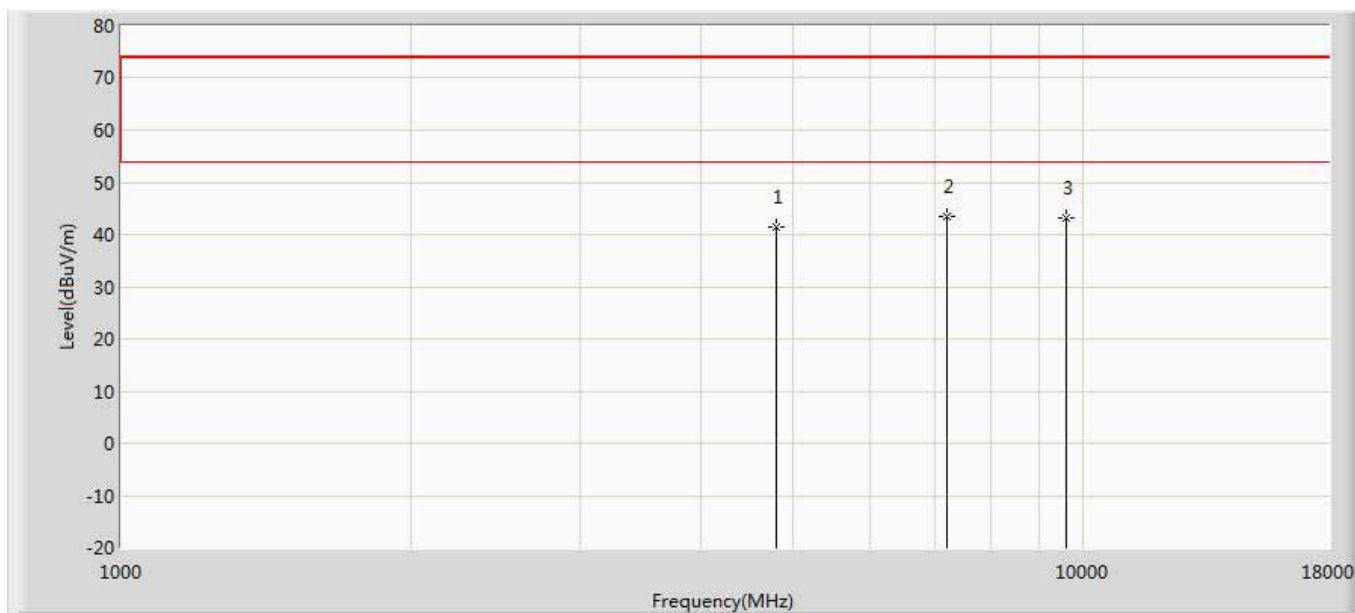


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.346	43.069	-32.654	74.000	-1.723	PK
2	*	7206.000	43.406	41.487	-30.594	74.000	1.919	PK
3		9608.000	43.301	38.402	-30.699	74.000	4.899	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2441MHz by 3DH5	

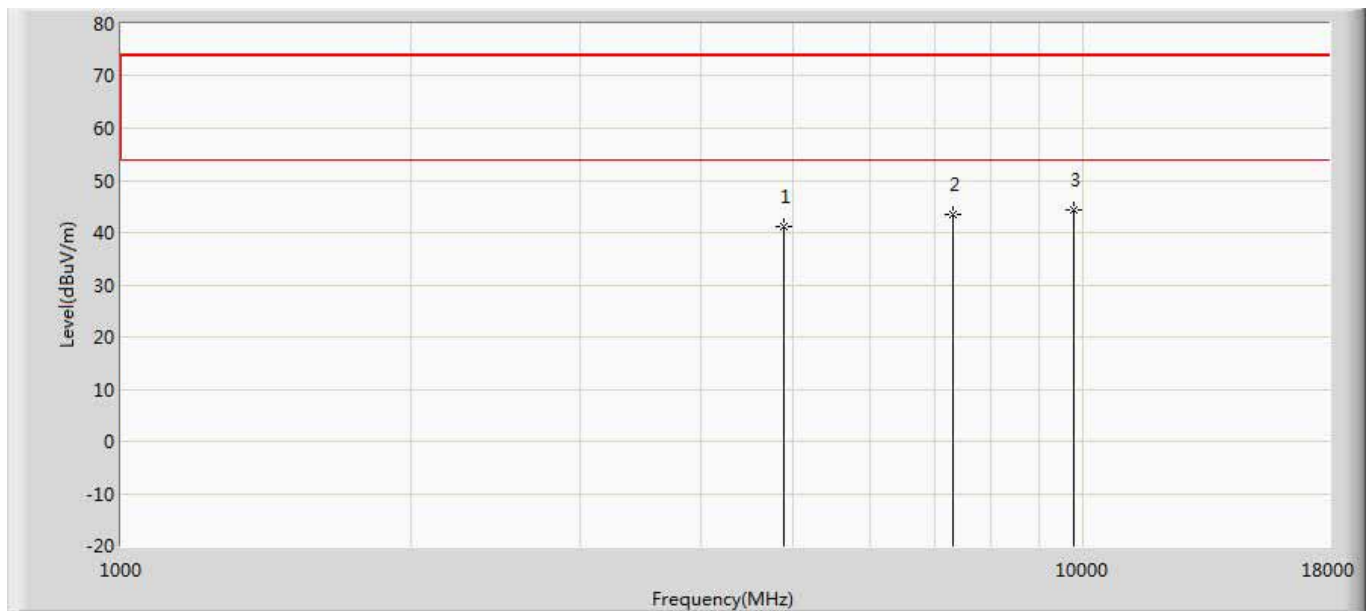


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	41.181	42.498	-32.819	74.000	-1.317	PK
2		7323.000	43.351	41.443	-30.649	74.000	1.909	PK
3	*	9764.000	44.450	38.450	-29.550	74.000	6.001	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2441MHz by 3DH5	

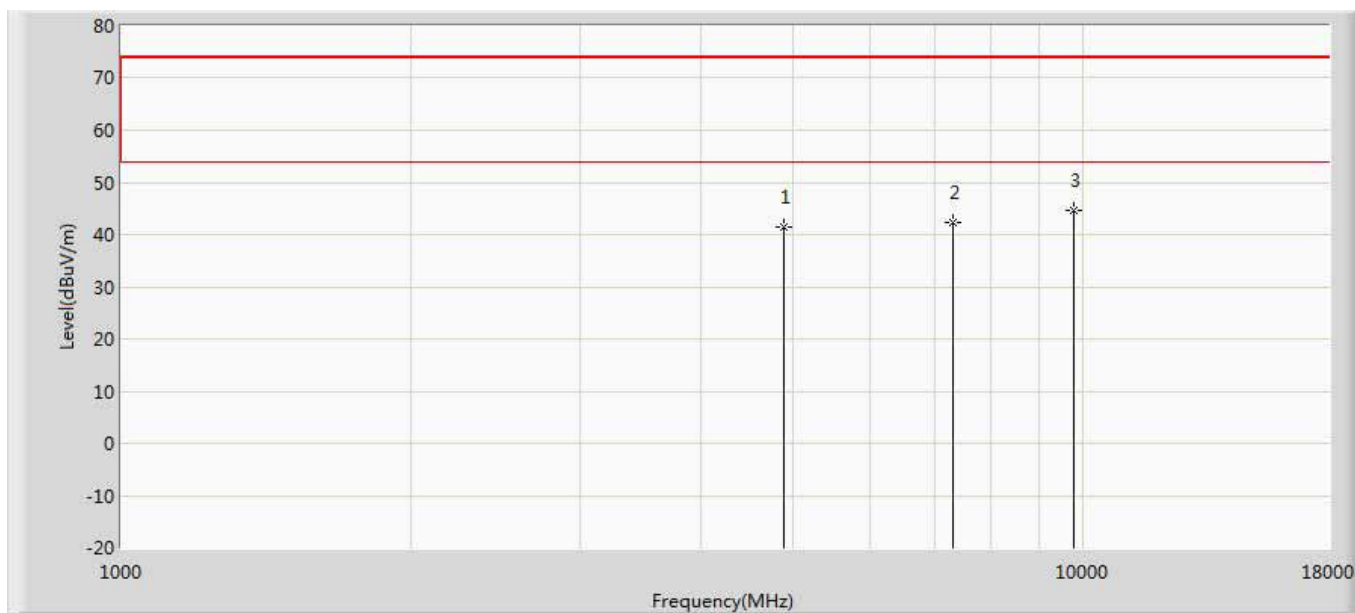


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	41.484	42.801	-32.516	74.000	-1.317	PK
2		7323.000	42.445	40.537	-31.555	74.000	1.909	PK
3	*	9764.000	44.569	38.569	-29.431	74.000	6.001	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

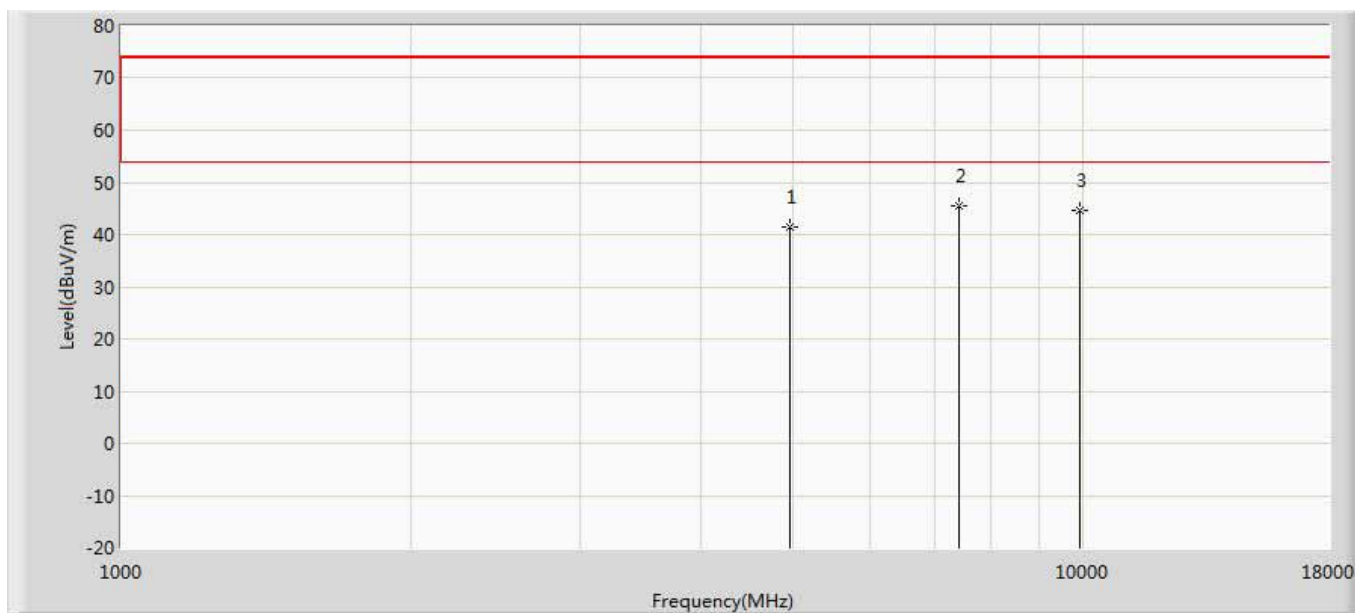

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.508	42.656	-32.492	74.000	-1.148	PK
2	*	7440.000	45.543	43.117	-28.457	74.000	2.426	PK
3		9920.000	44.723	39.469	-29.277	74.000	5.253	PK

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

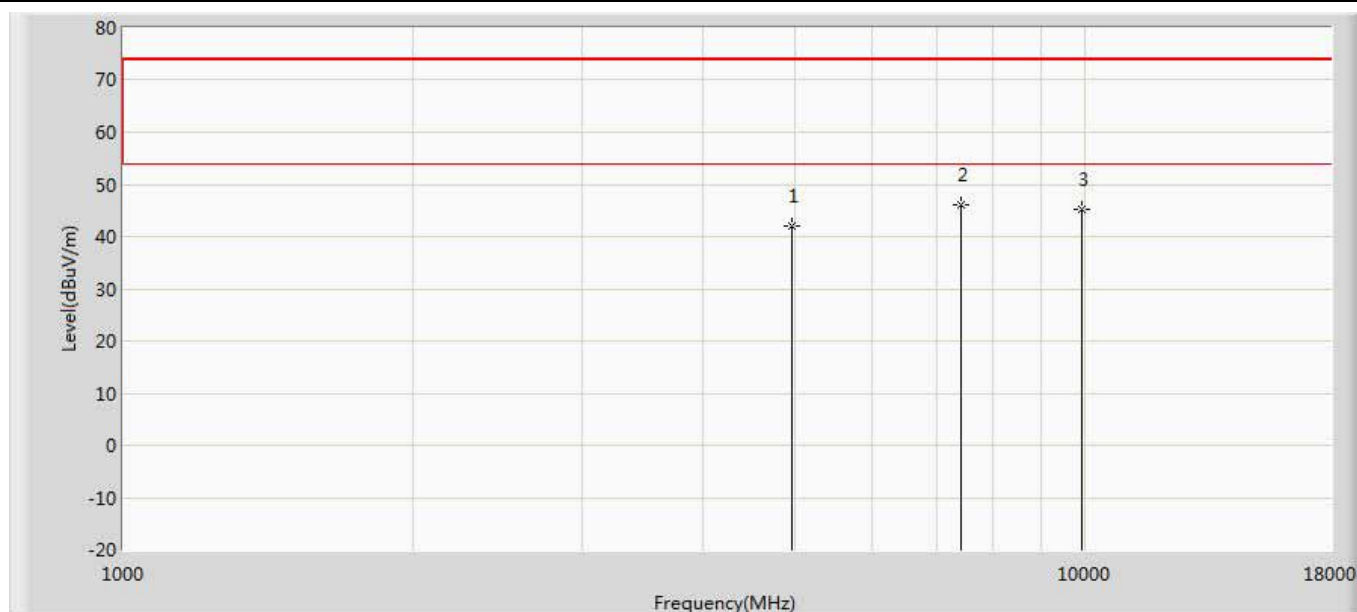


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.989	43.137	-32.011	74.000	-1.148	PK
2	*	7440.000	45.946	43.520	-28.054	74.000	2.426	PK
3		9920.000	45.315	40.061	-28.685	74.000	5.253	PK

Note :

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~40GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

The worst case of Radiated Emission below 1GHz:

Engineer: Nino	
Site: AC2	Time: 2018/05/26
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1	

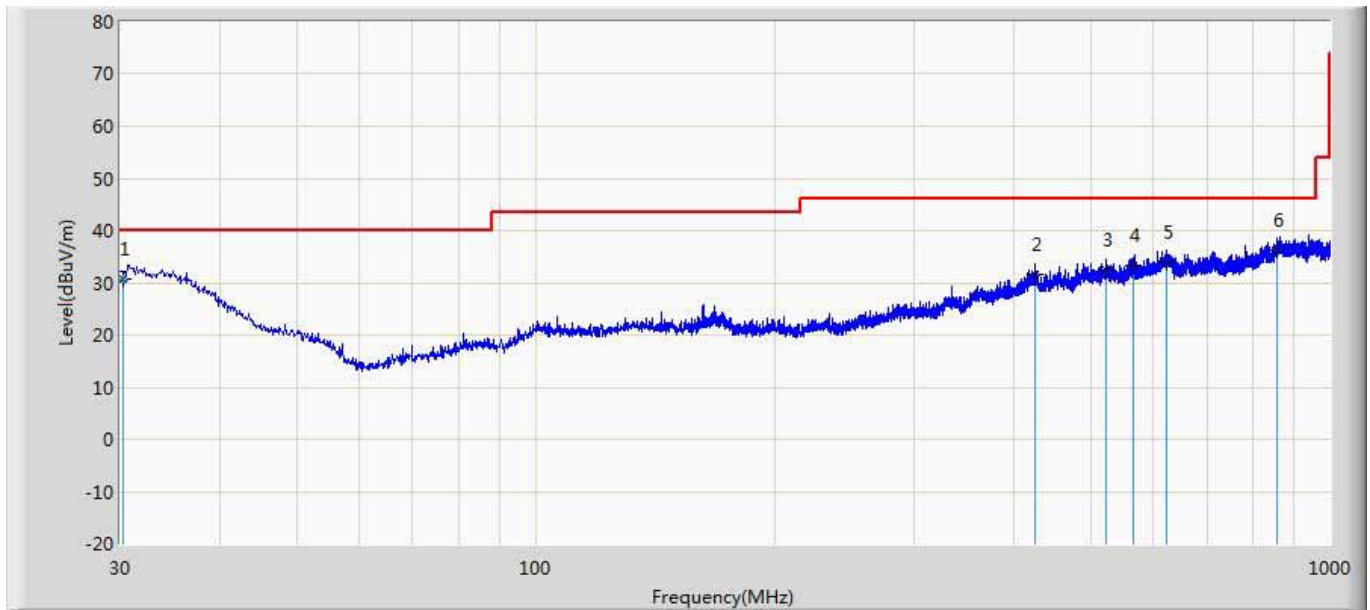


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	30.254	30.860	3.200	-9.140	40.000	21.037	6.623	0.000	100	185	QP
2		426.325	31.685	4.600	-14.315	46.000	19.111	7.974	0.000	200	7	QP
3		523.251	32.381	3.600	-13.619	46.000	20.633	8.148	0.000	100	185	QP
4		566.241	33.269	4.600	-12.731	46.000	20.320	8.349	0.000	100	51	QP
5		622.514	33.985	3.200	-12.015	46.000	22.221	8.564	0.000	100	245	QP
6		858.521	36.095	3.600	-9.905	46.000	23.345	9.150	0.000	200	211	QP

Note:

- " * ", means this data is the worst emission level.
- Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Nino	
Site: AC2	Time: 2018/05/26
Limit: FCC_Part15.209_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1	

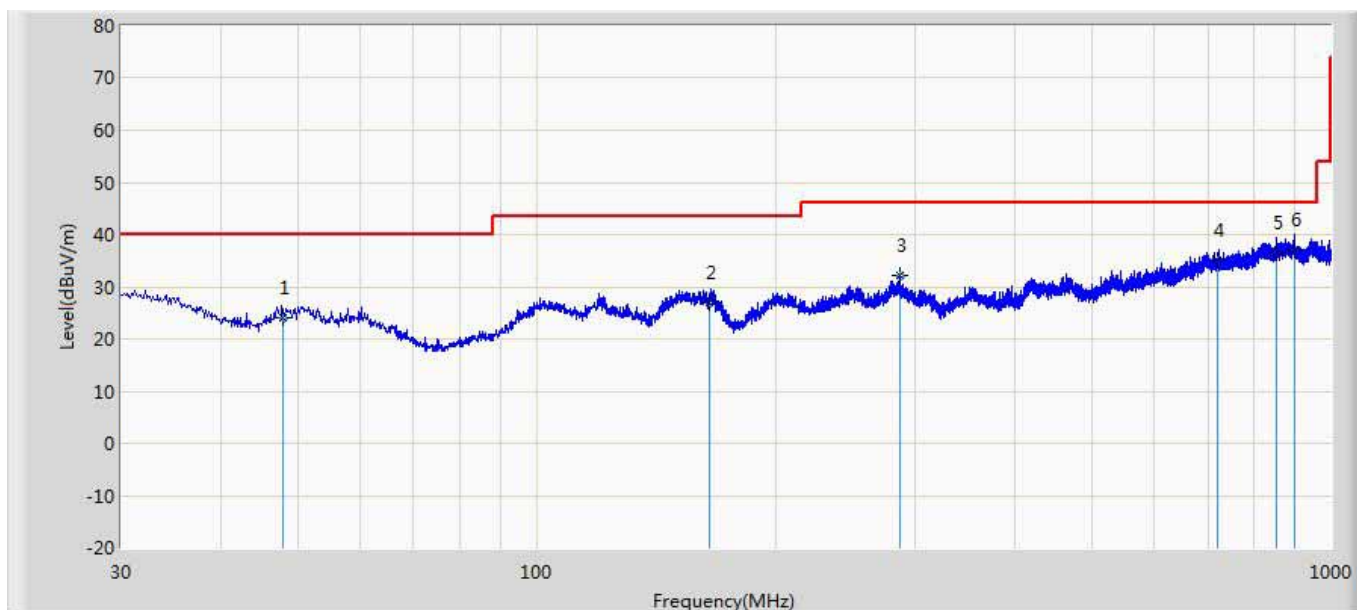

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		47.863	24.038	5.100	-15.962	40.000	12.368	6.571	0.000	100	182	QP
2		165.251	26.861	7.200	-16.639	43.500	12.398	7.263	0.000	100	233	QP
3		286.531	32.221	7.100	-13.779	46.000	17.514	7.606	0.000	200	85	QP
4		721.256	35.120	4.300	-10.880	46.000	22.015	8.805	0.000	200	201	QP
5		855.351	36.399	3.600	-9.601	46.000	23.657	9.143	0.000	100	163	QP
6	*	901.251	37.203	4.200	-8.797	46.000	23.751	9.252	0.000	200	282	QP

Note:


1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

5. 20dB Bandwidth

5.1 Test Equipment

20dB Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

5.2 Test Setup

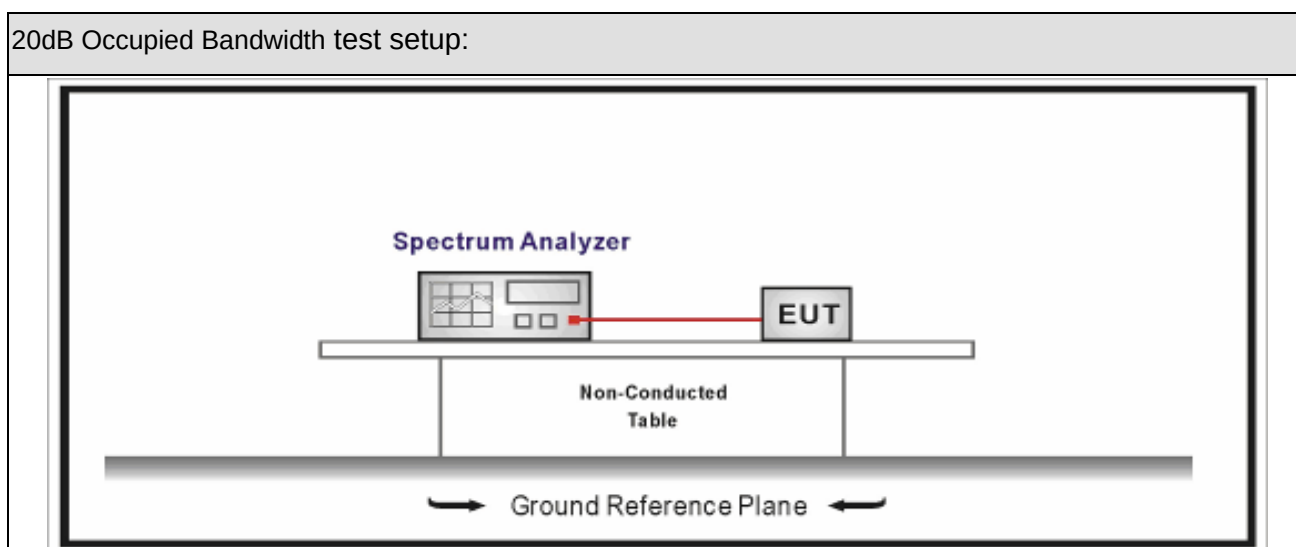

5.3 Limit

Carrier Frequency Separation	
☒	For frequency hopping systems operating in 2400-2483.5 MHz band, within frequency range.
☐	For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
☐	For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

5.4 Test Procedure


Test Method			
	References Rule	Chapter	Description
☒	DA 00-705	N/A	20 dB Bandwidth

5.5 Uncertainty


The measurement uncertainty is defined as ± 1 kHz

Product Name	:	Speaker	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2018.05.28	Test Engineer	:	Eric


Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1024	921.57
39	2441	1024	920.11
78	2480	1025	920.43

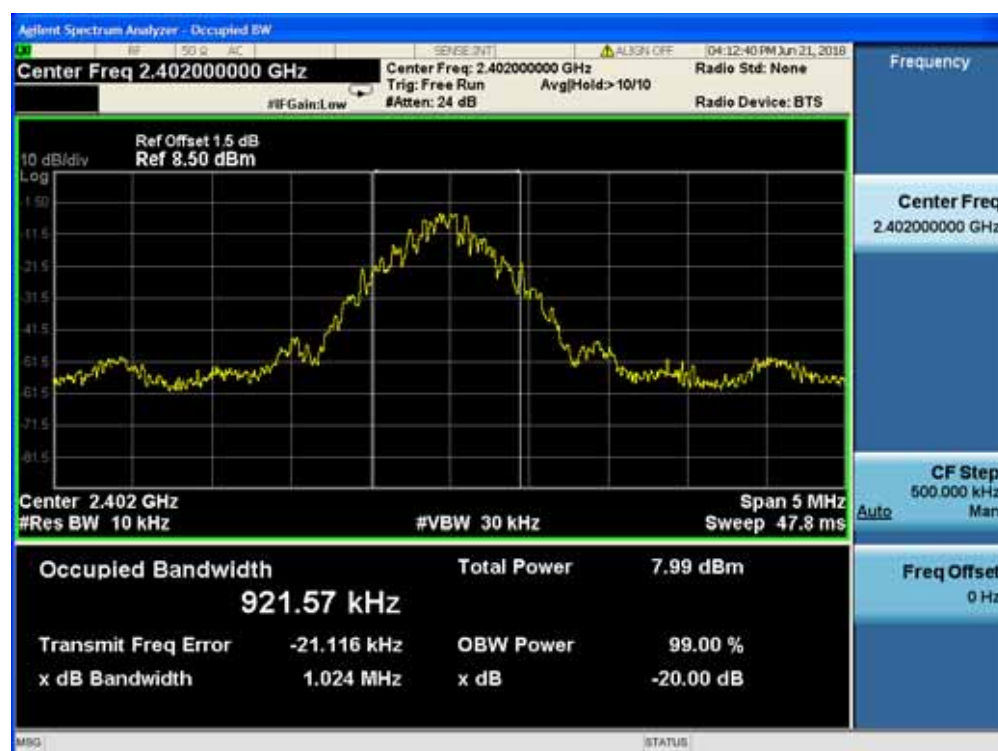

Channel 39 (2441MHz)

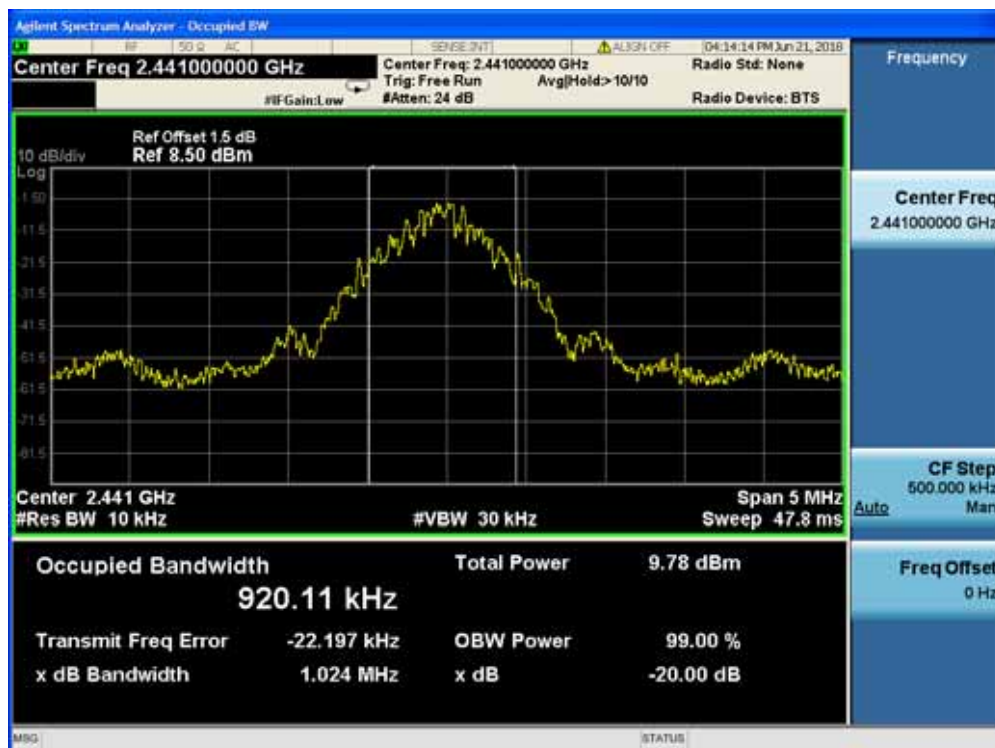


Channel 78 (2480MHz)

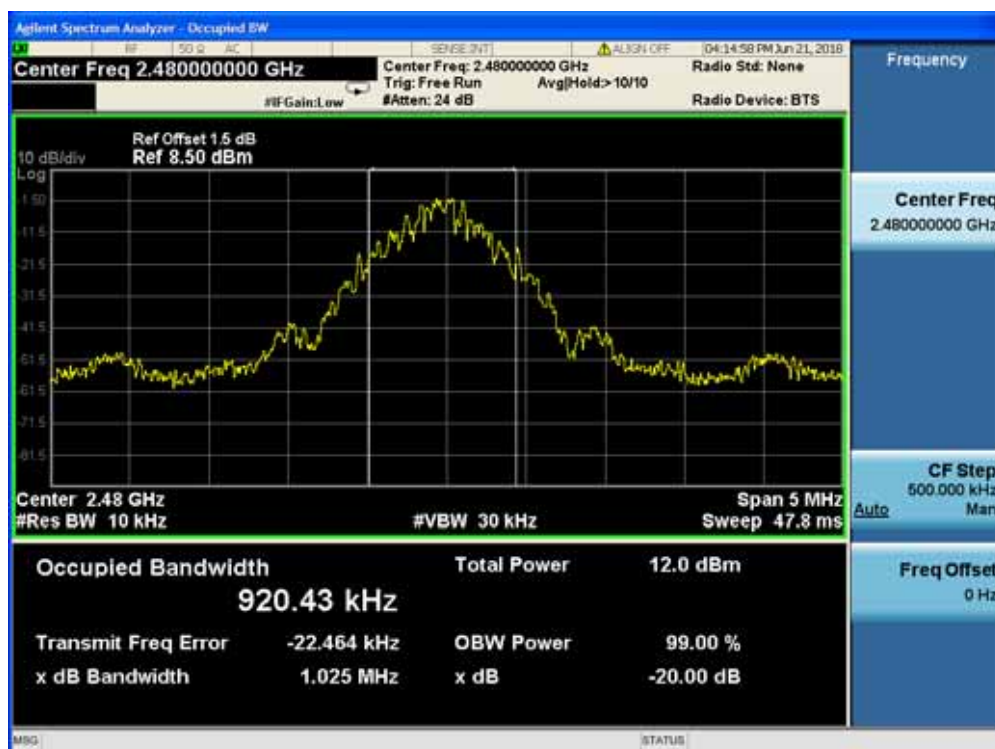


Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 2	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1332	1187.8
39	2441	1335	1191.6
78	2480	1339	1202.2

Channel 00 (2402MHz)

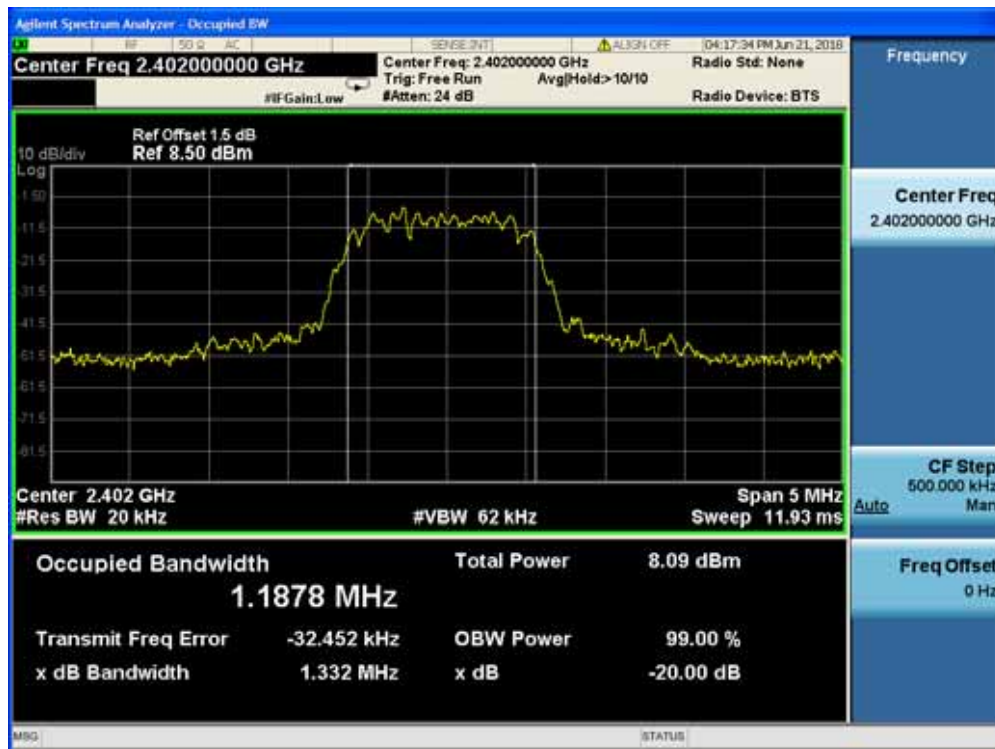

Channel 39 (2441MHz)

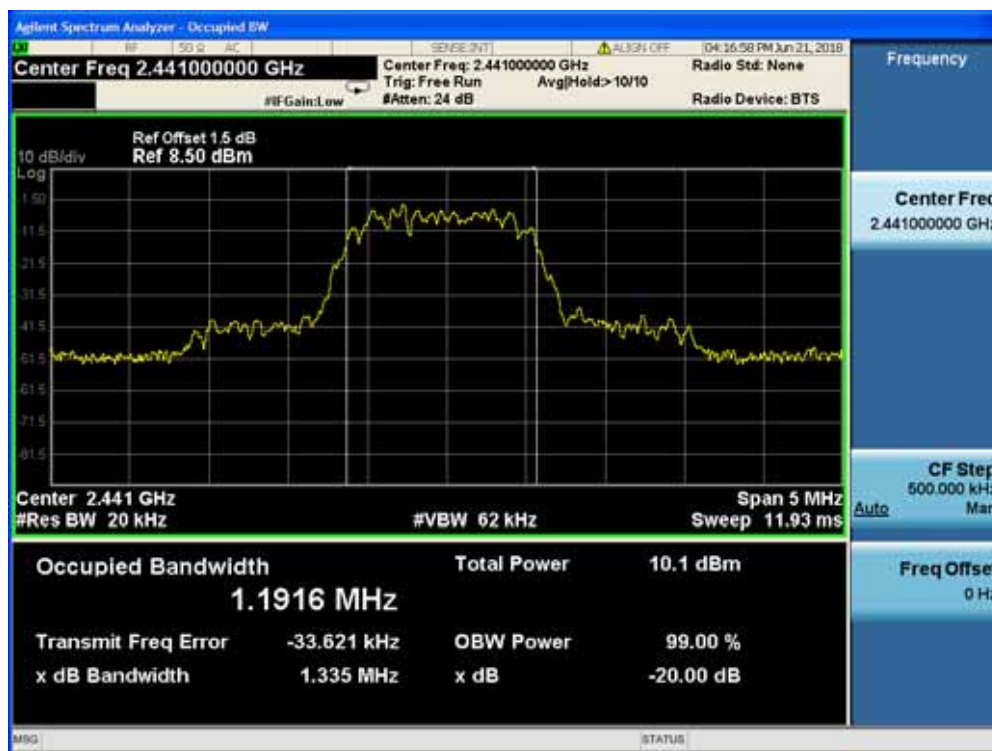


Channel 78 (2480MHz)



Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 3	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1315	1224.7
39	2441	1316	1228.2
78	2480	1371	1238.7

Channel 00 (2402MHz)

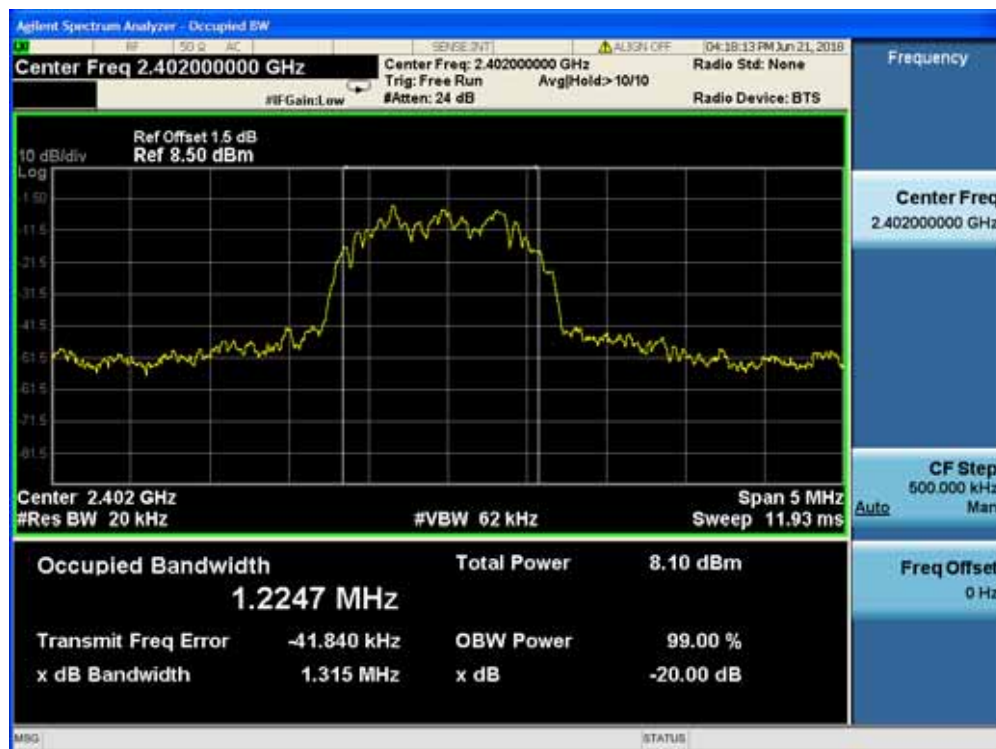

Channel 39 (2441MHz)



Channel 78 (2480MHz)



6. Carrier Frequency Separation


6.1. Test Equipment

Carrier Frequency Separation / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

Carrier Frequency Separation test setup:

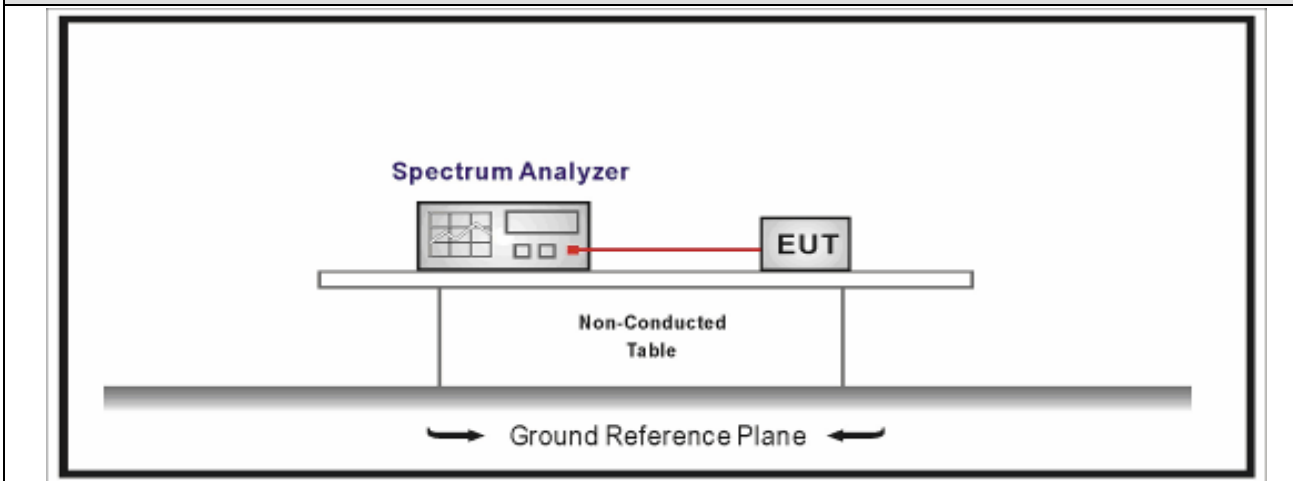

6.3. Limit

Carrier Frequency Separation	
☒	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
☐	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.
☐	The 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;
☐	The 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz.

6.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	7.8.2	Carrier frequency separation

6.5. Uncertainty

The measurement uncertainty is defined as ± 1 kHz

6.6. Test Result

Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	682.67	Pass
39	2441	1000	682.67	Pass
78	2480	1000	683.33	Pass

Channel 00 (2402MHz)



Channel 39 (2441MHz)




Channel 78 (2480MHz)




Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 2	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	888.00	Pass
39	2441	1000	890.00	Pass
78	2480	1000	892.67	Pass


Channel 00 (2402MHz)

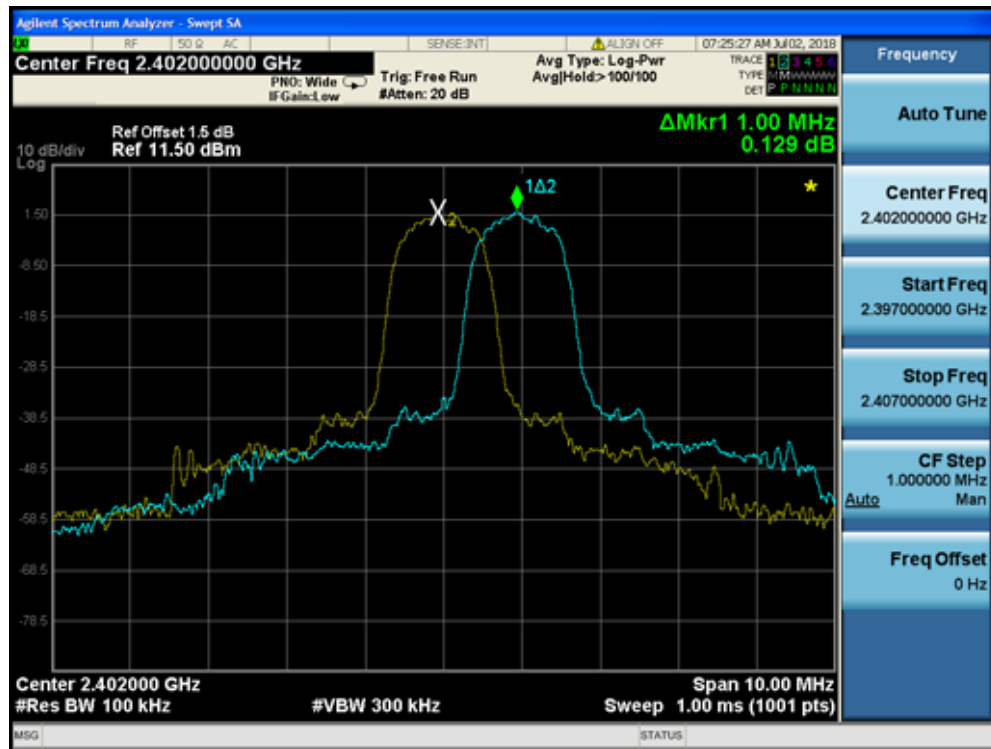

Channel 39 (2441MHz)

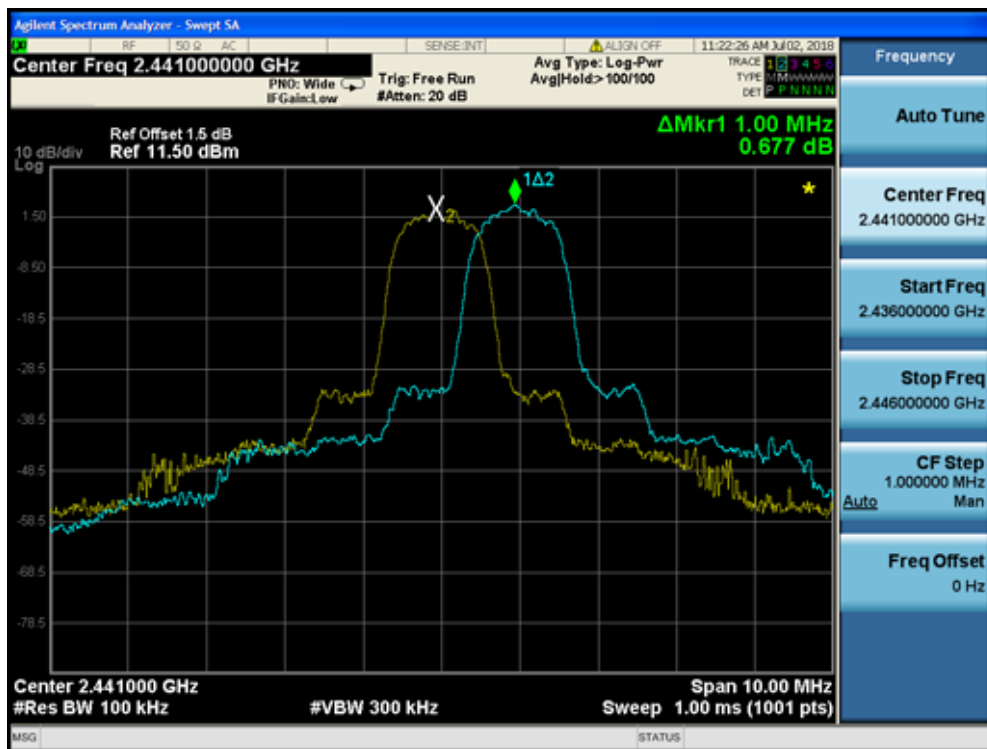


Channel 78 (2480MHz)

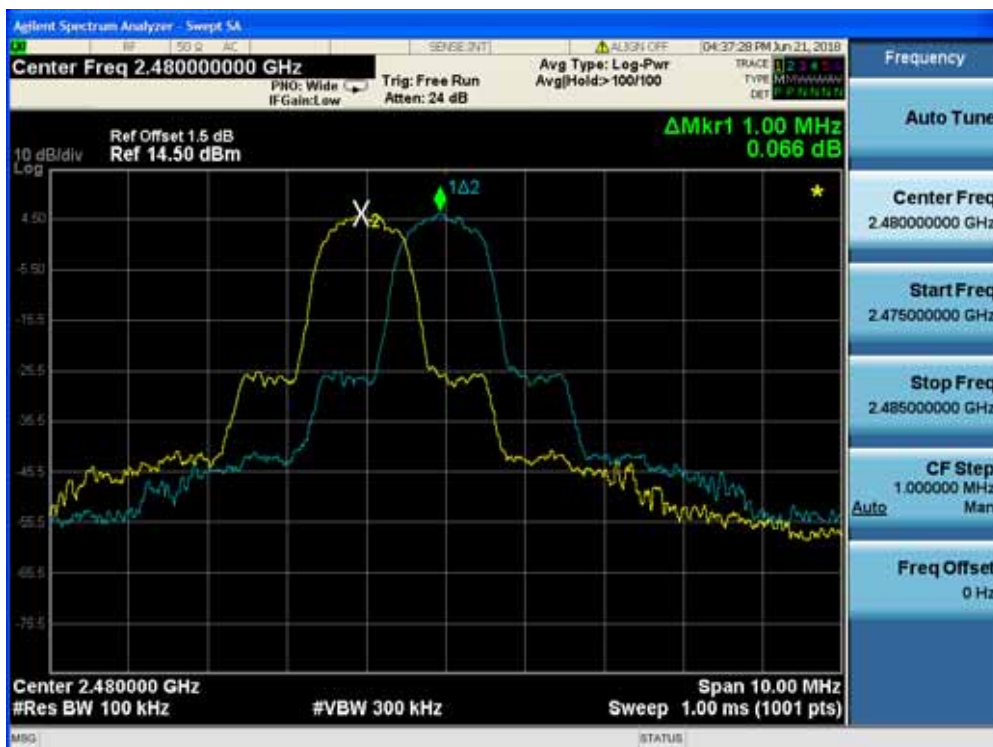


Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 3	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	876.67	Pass
39	2441	1000	877.33	Pass
78	2480	1000	914.00	Pass


Channel 00 (2402MHz)

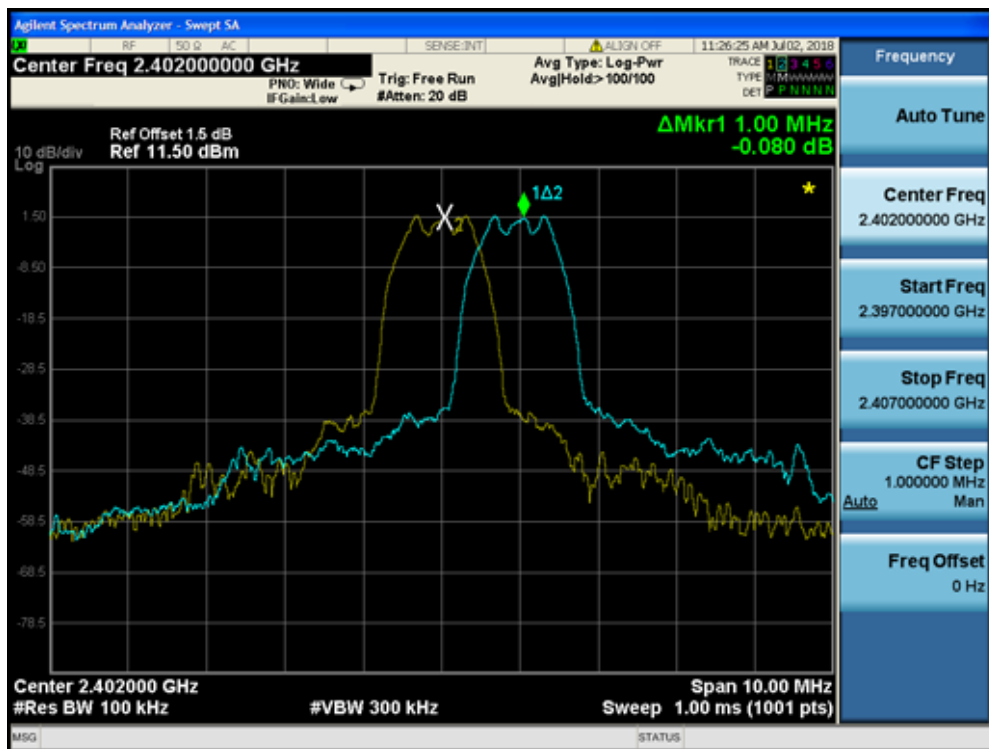

Channel 39 (2441MHz)

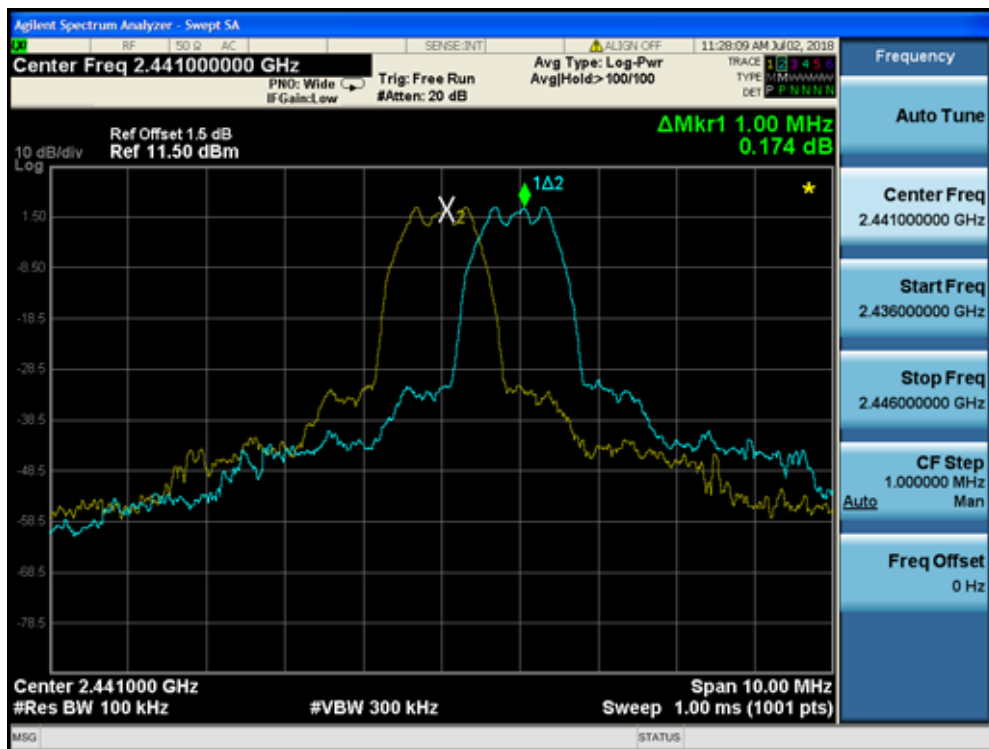

Channel 78 (2480MHz)

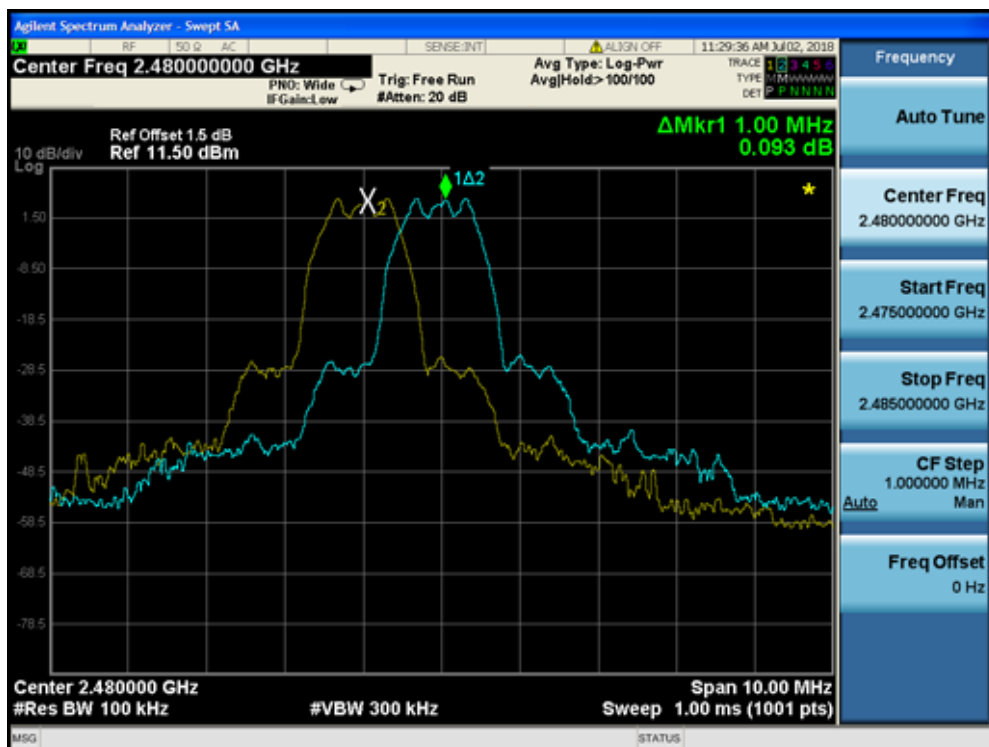


7. Number of Hopping Frequencies

7.1. Test Equipment

Number of Hopping Frequencies / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

7.2. Test Setup

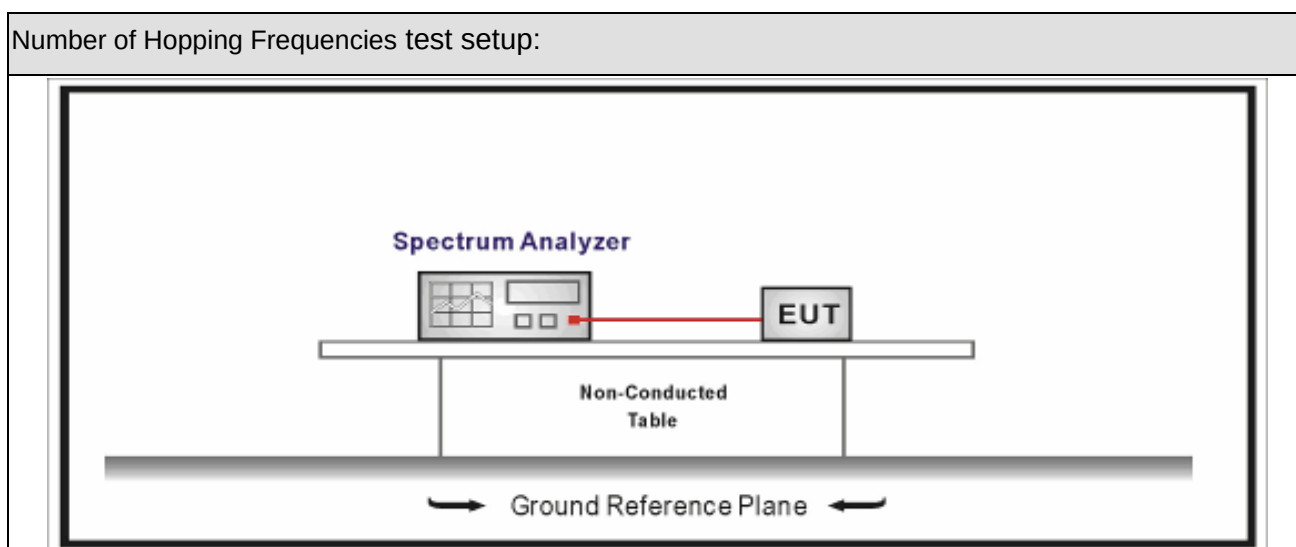

7.3. Limit

Carrier Frequency Separation	
☒	For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
☐	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, shall use at least 50 hopping frequencies.
☐	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is higher than 250 kHz, shall use at least 25 hopping frequencies.
☐	For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

7.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	7.8.3	Number of Hopping Frequencies

7.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result

Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2480MHz

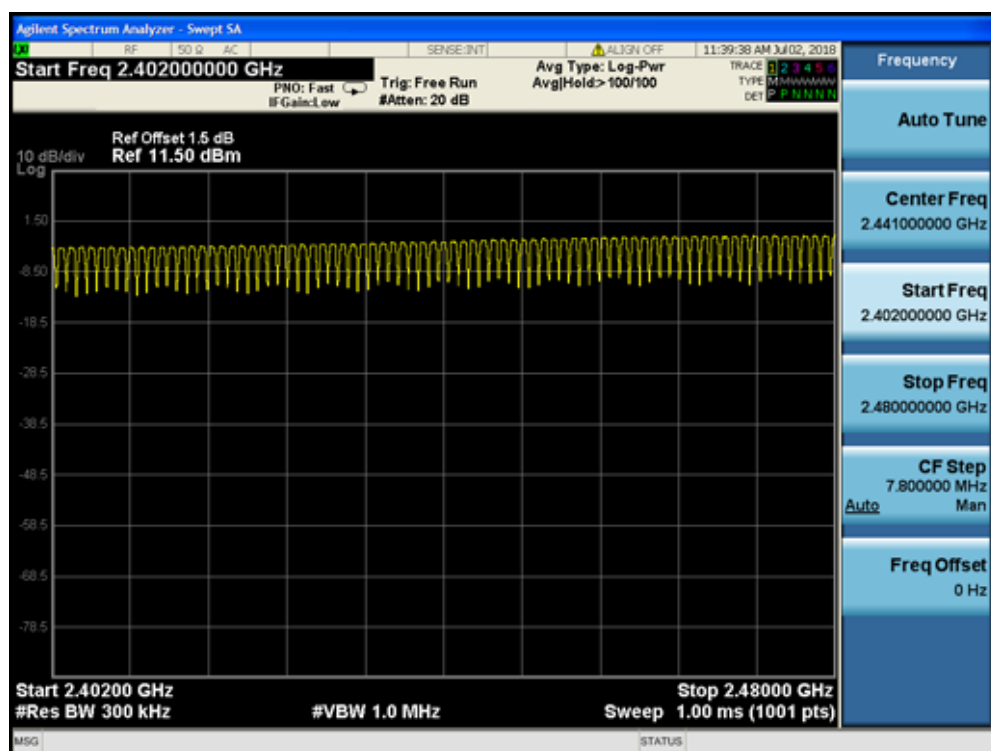

Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 2	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2480 MHz

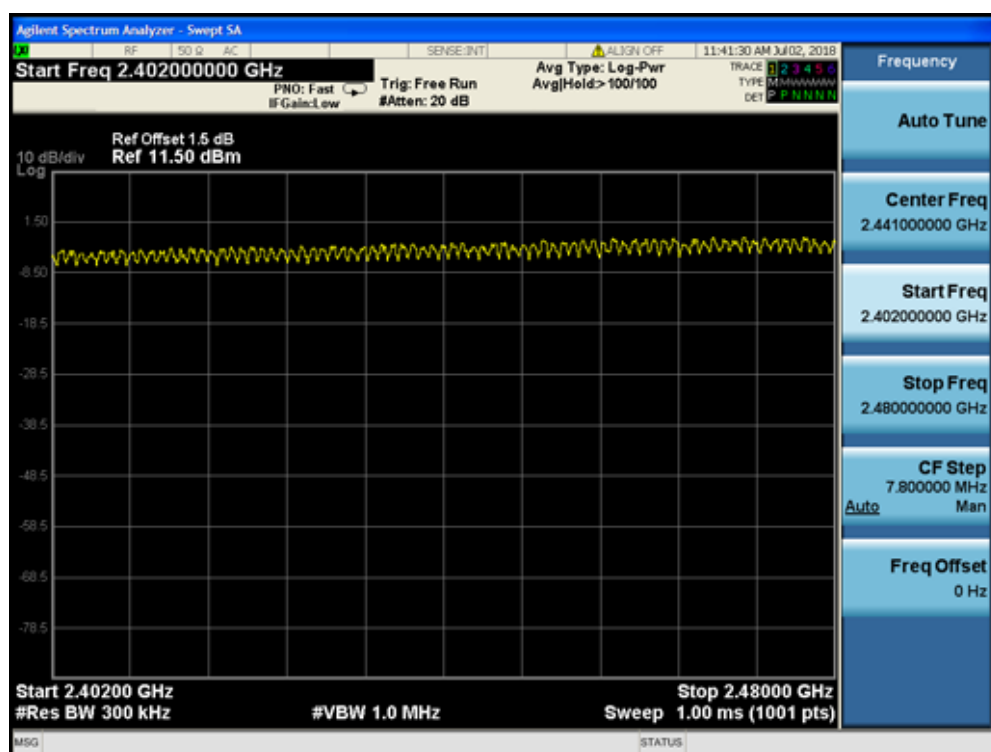

Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 3	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass

2402 - 2480 MHz

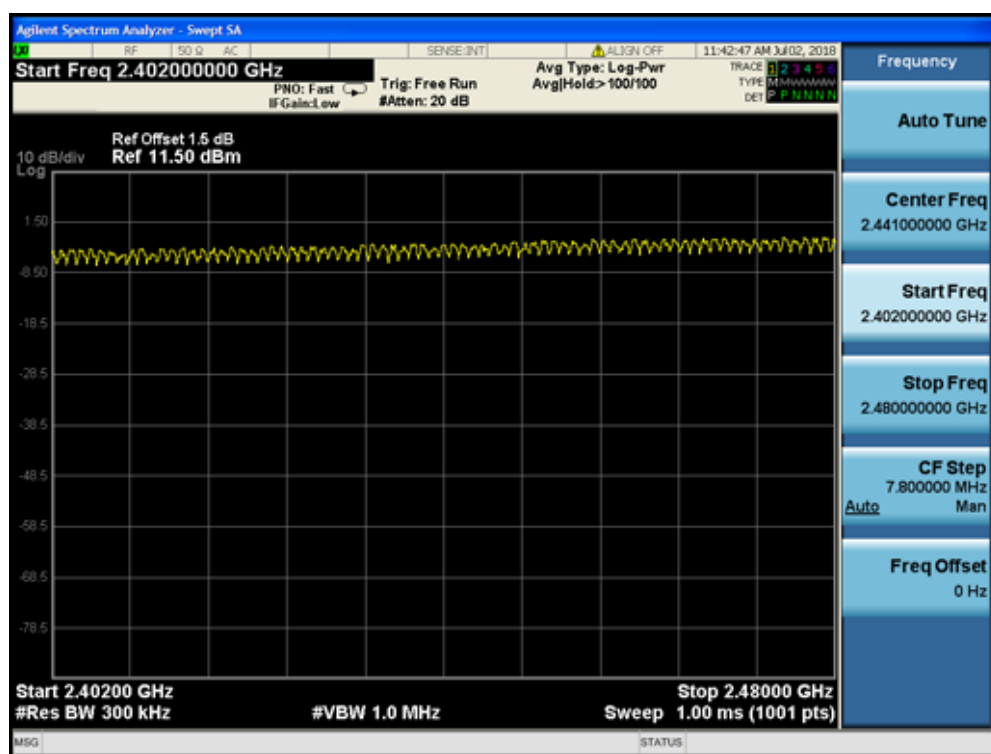


8. Time of Occupancy (Dwell Time)

8.1. Test Equipment

Time of Occupancy (Dwell Time) / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

8.2. Test Setup

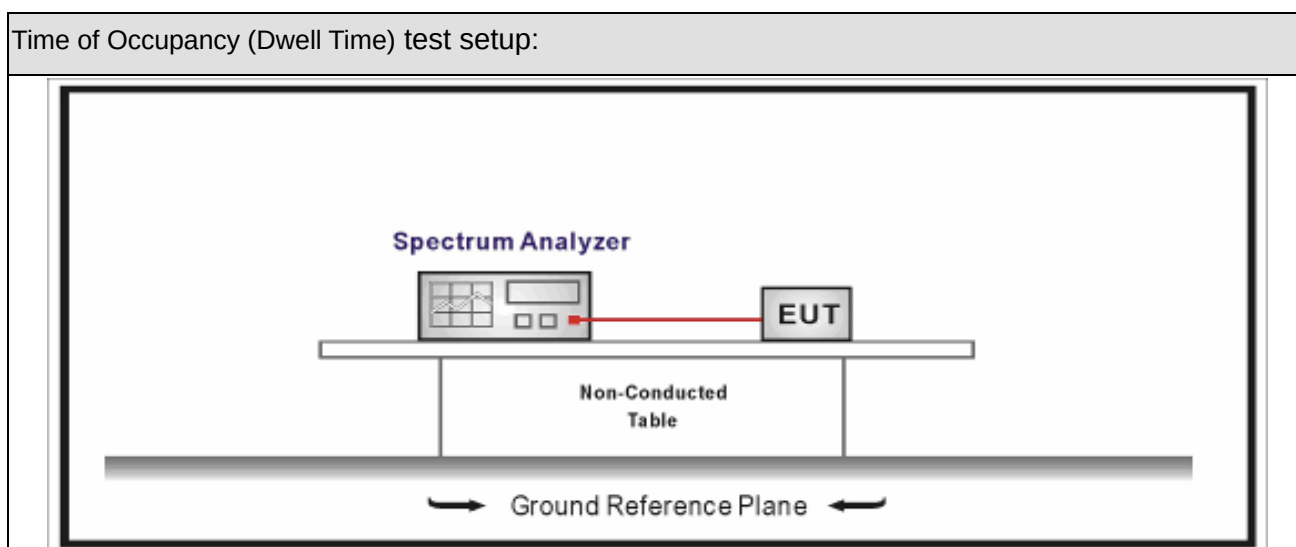

8.3. Limit

Time of Occupancy (Dwell Time)	
☒	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping

	frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

8.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	7.8.4	Time of Occupancy (Dwell Time)

8.5. Uncertainty

The measurement uncertainty is defined as $\pm 0.1 \text{ us}$

8.6. Test Result

Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 1(GFSK_DH5)	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	309.34	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy= pulse time $\times (1600 / (6 \times 79)) \times 31.6$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz)-(DH5)

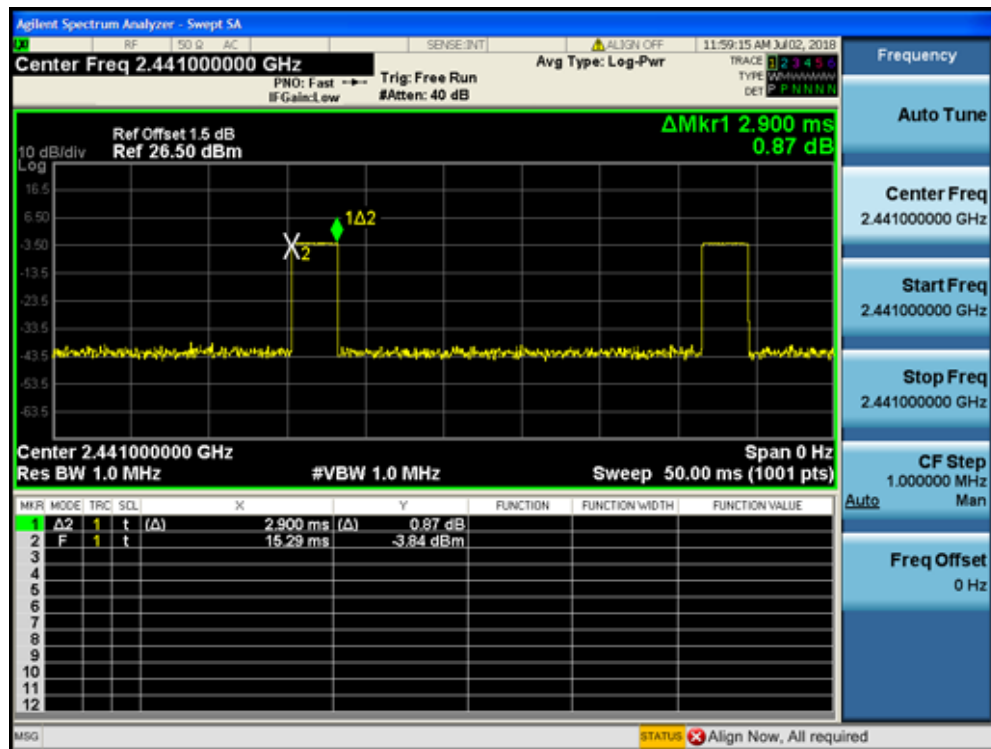

Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 2(Pi/4 DQPSK_2DH5)	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	307.2	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy= pulse time*(1600/(6*79))*31.6

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz) - (2DH5)

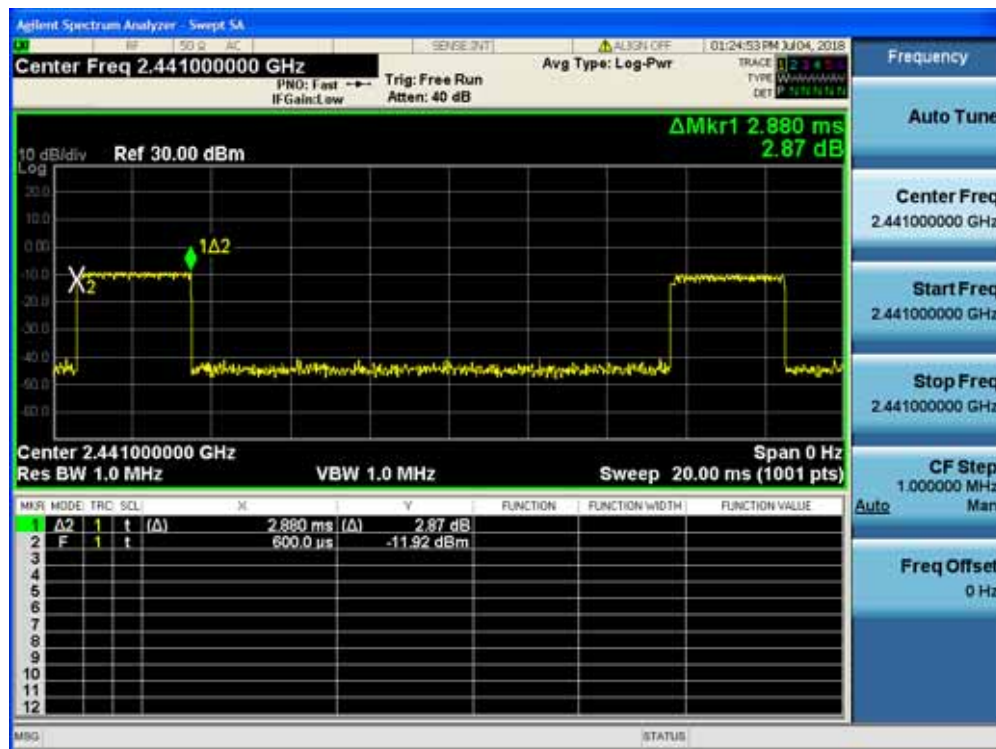

Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 3(8DPSK_3DH5)	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	304.01	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy= pulse time*(1600/(6*79))*31.6

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz) - (3DH5)

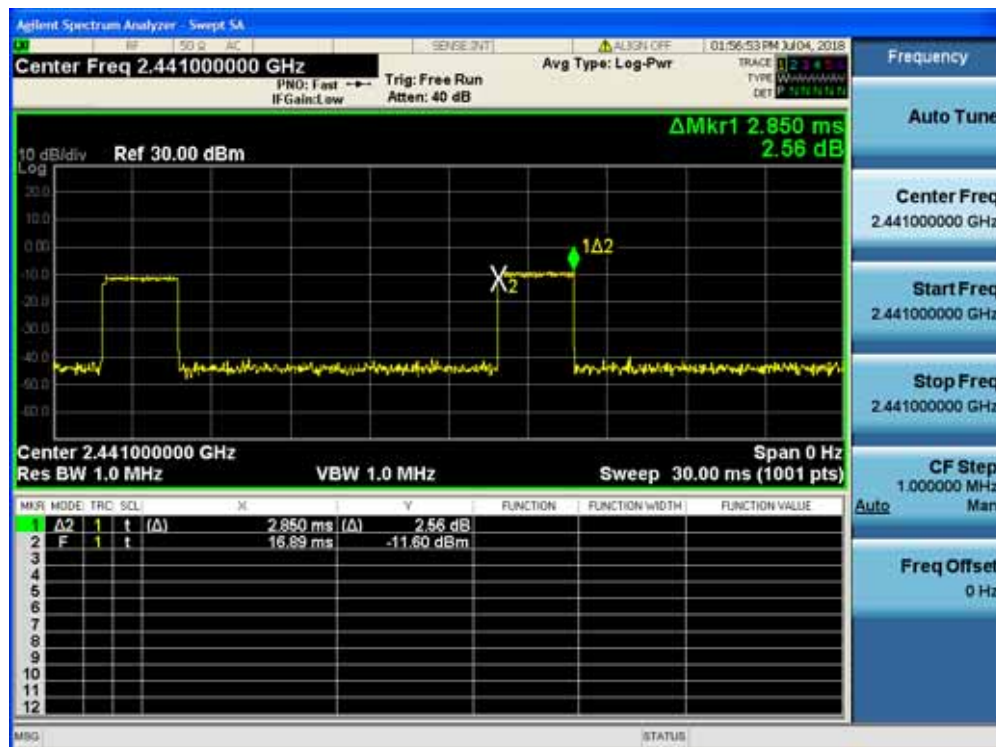


9. Peak Output Power

9.1. Test Equipment

Peak Output Power / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

9.2. Test Setup

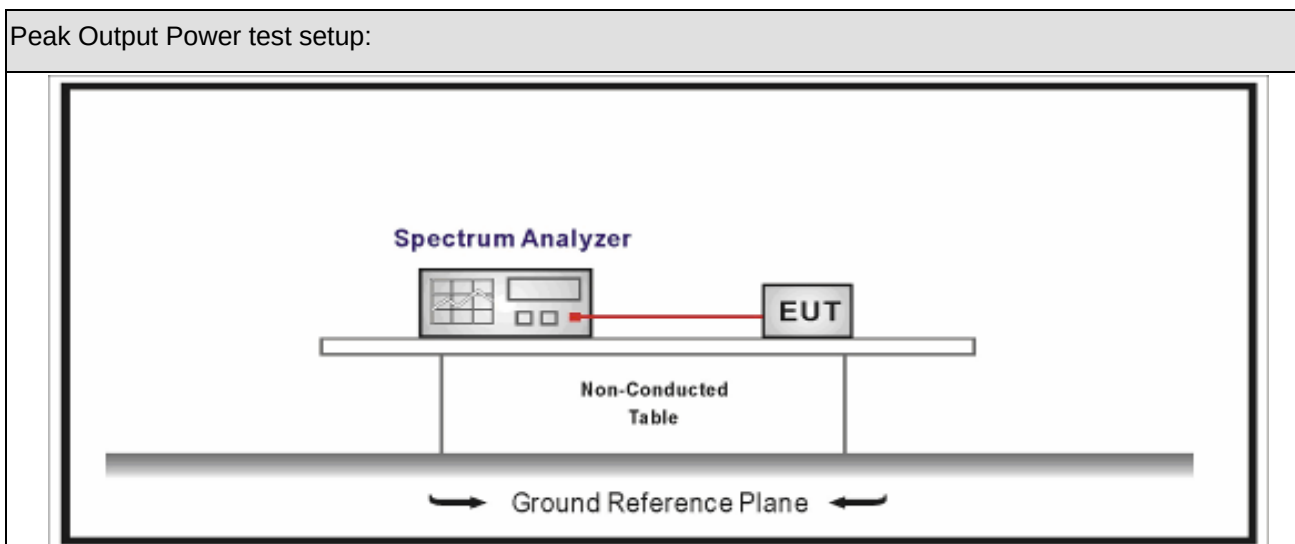

9.3. Limit

Peak Output Power	
☐	Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
☒	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
☐	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels

9.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

9.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

9.6. Test Result

Product Name	:	Speaker	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2018.05.28	Test Engineer	:	Eric

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
00	2402	5.17	30.00	Pass
39	2441	6.73	30.00	Pass
78	2480	8.55	30.00	Pass

Product Name	:	Speaker	Power	:	AC 120V/60Hz
Test Mode	:	Mode 2	Test Site	:	TR-8
Test Date	:	2018.05.28	Test Engineer	:	Eric

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
00	2402	6.20	21.00	Pass
39	2441	7.66	21.00	Pass
78	2480	9.33	21.00	Pass

Product Name	:	Speaker	Power	:	AC 120V/60Hz
Test Mode	:	Mode 3	Test Site	:	TR-8
Test Date	:	2018.05.28	Test Engineer	:	Eric


Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
00	2402	6.43	21.00	Pass
39	2441	7.88	21.00	Pass
78	2480	9.58	21.00	Pass

10. Emissions in non-restricted frequency bands

10.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

10.2. Test Setup

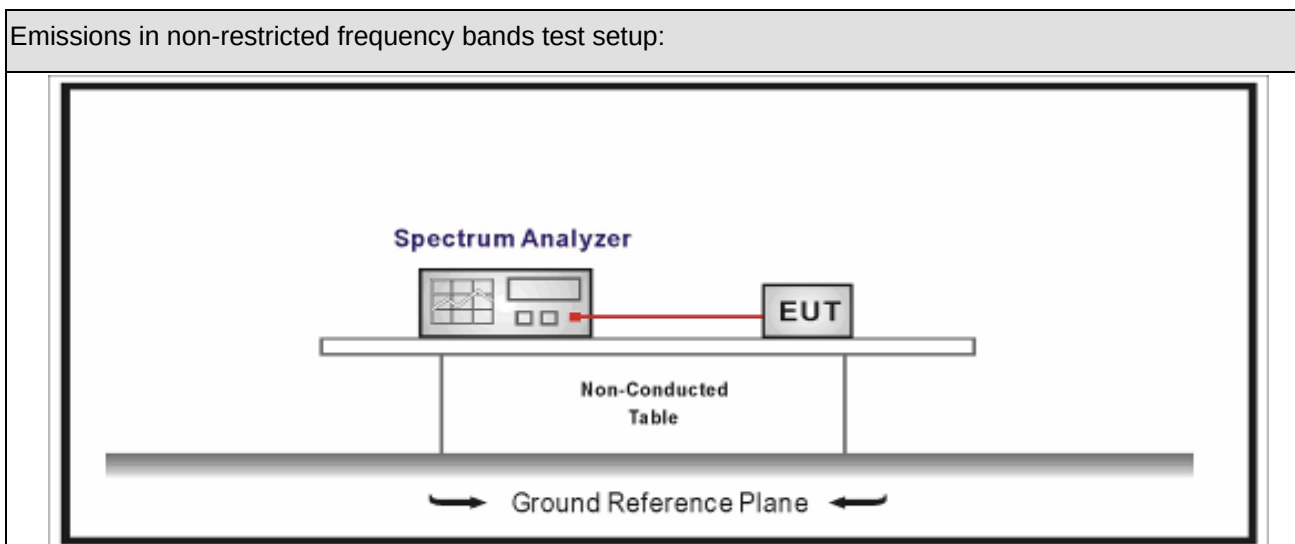

10.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).	

10.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	7.8.6	Band-edge Compliance of RF Conducted Emissions

10.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

10.6. Test Result


Product Name	: Speaker	Power	: AC 120V/60Hz
Test Mode	: Mode 1~4	Test Site	: TR-8
Test Date	: 2018.05.28	Test Engineer	: Eric

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	3.720	2400.00	-42.919	46.639	>20	Pass
1	78	2480	7.308	2500.00	-55.218	62.526	>20	Pass
2	00	2402	1.440	2400.00	-45.421	46.861	>20	Pass
2	78	2480	4.993	2500.00	-57.513	62.506	>20	Pass
3	00	2402	1.402	2400.00	-45.289	46.691	>20	Pass
3	78	2480	4.877	2500.00	-56.162	61.039	>20	Pass
4	00~78	00~78	3.253	2400.00	-45.213	48.466	>20	Pass

Note1: The worst case of Emissions in non-restricted frequency bands as below:

2: Mode 1-3, The In-Band PSD is the highest PSD of All channels.

Mode1 CH00(2402MHz)

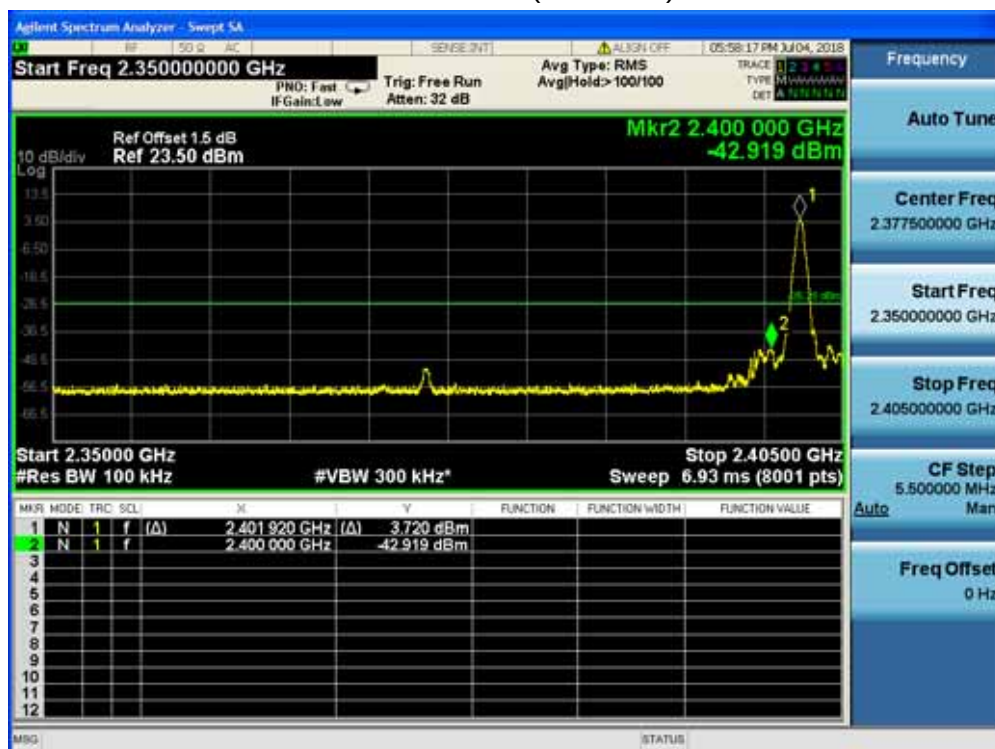


11. Radiated Emission Band Edge

11.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2017.07.16	2018.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2018.05.03	2019.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2017.07.12	2018.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.09.18	2018.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.02.28	2019.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.02.28	2019.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.05	2019.01.04

11.2. Test Setup

Above 1GHz Test Setup:

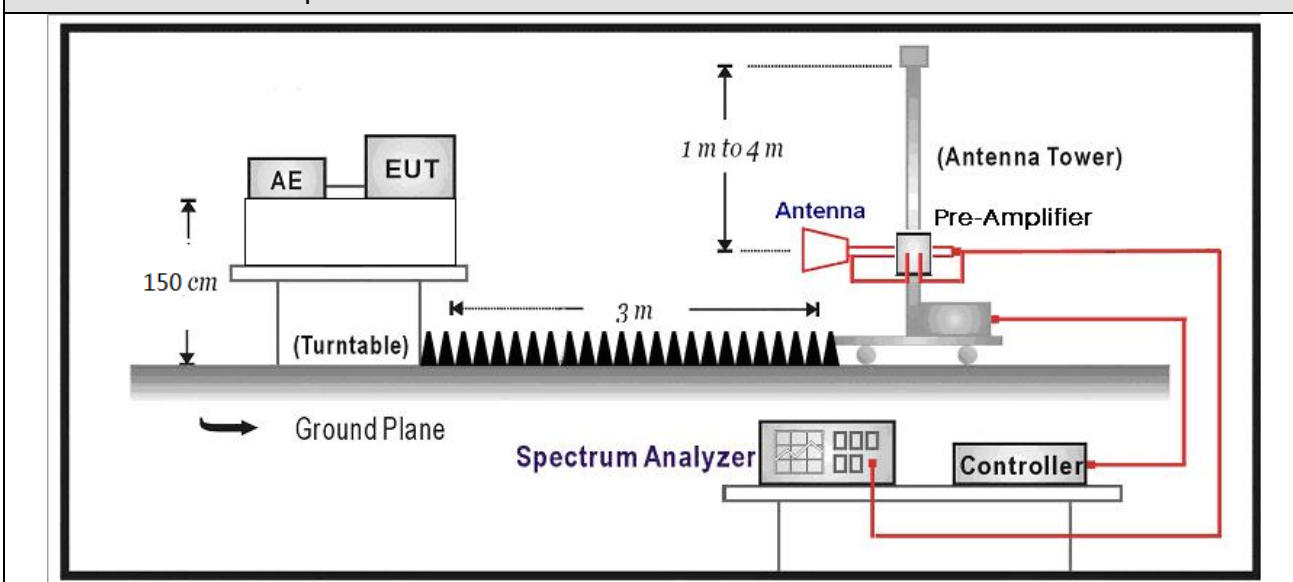

11.3. Limit

Band edge Limit				
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

11.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	DA 00-705	N/A	duty cycle correction factor
☒	ANSI C63.10	6.10	Band-edge testing
☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	ANSI C63.10	6.10.6	Marker-delta method
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


11.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB

11.6. Duty Factor

Test Mode	Pluse Time (ms)	Pluse Number	Accumulated Transmit Time (ms)	Duty Factor (dB)
Mode 4	2.900	1	2.900	-30.75


Pulse Number

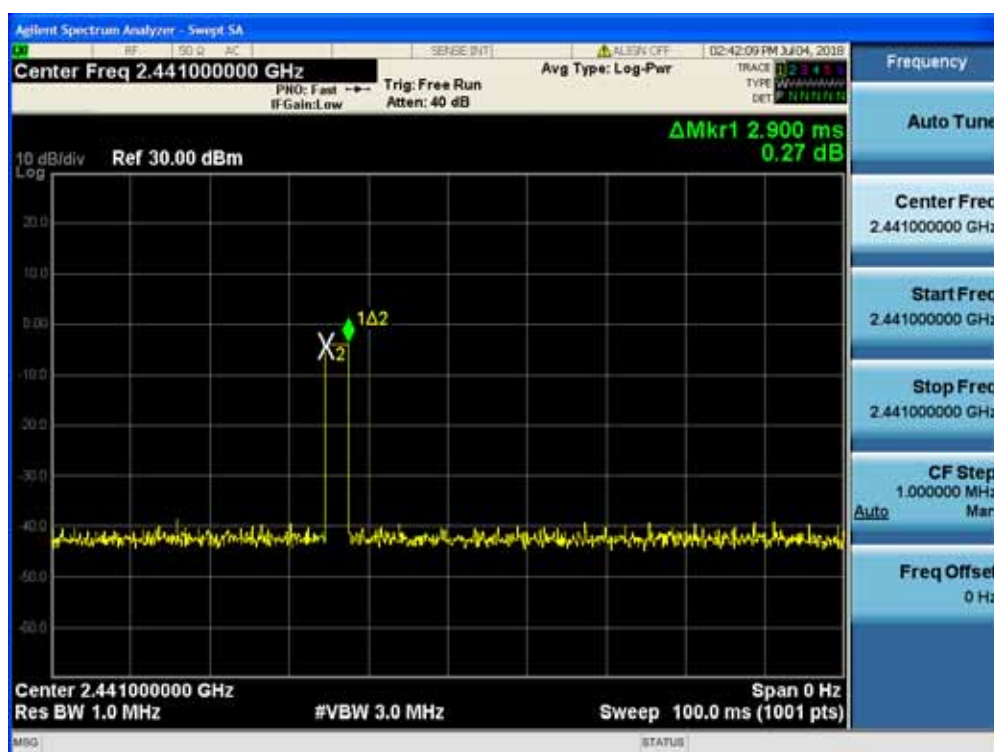

Note: Duty Factor = $20\log(\text{Accumulated Transmit Time} / 100\text{ms})$

11.7. Test Result


Engineer: Eric	
Site: AC5	Time: 2018/07/03 - 09:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

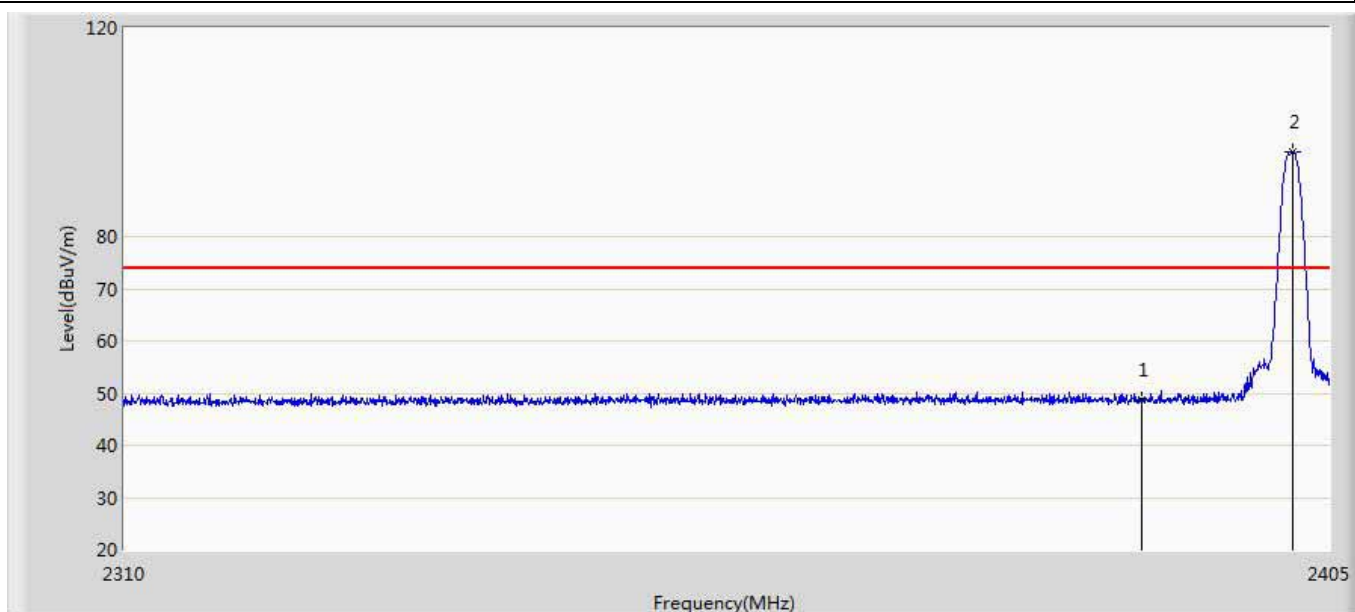

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.577	12.895	-25.423	74.000	35.682	PK
2	*	2402.055	96.118	60.405	22.118	74.000	35.712	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.577	17.825	-36.175	54.000	-30.752	AV
2	*	2402.055	96.118	65.366	N/A	N/A	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

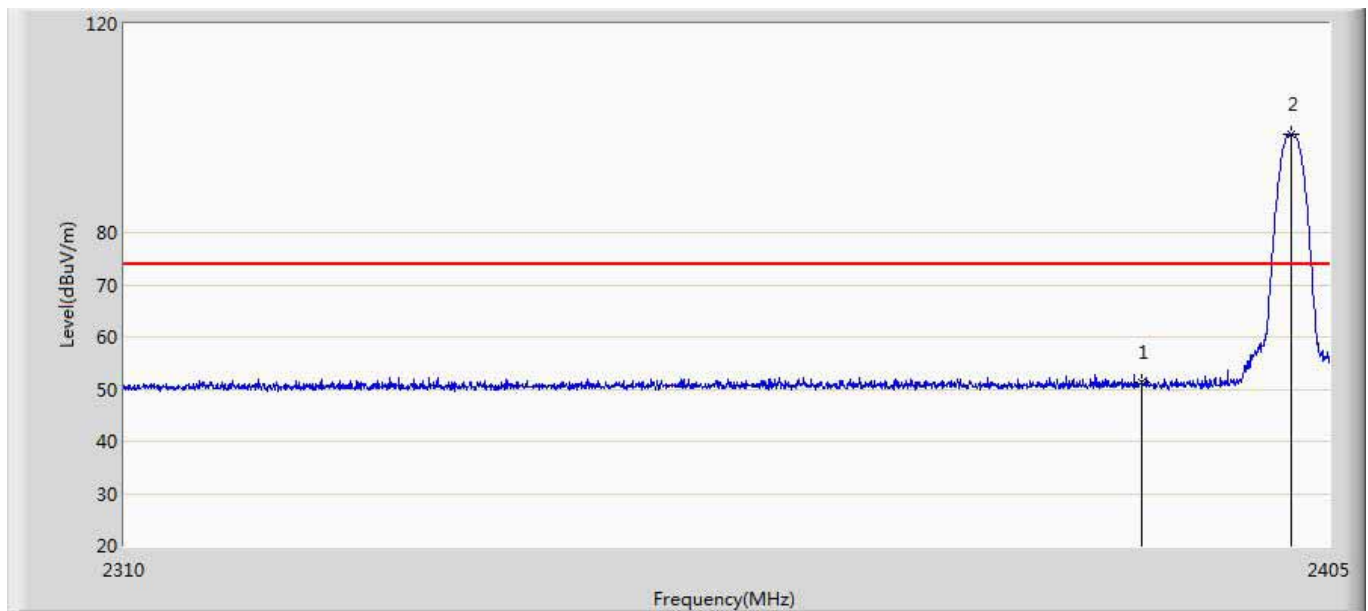

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.373	15.691	-22.627	74.000	35.682	PK
2	*	2401.913	98.796	63.084	24.796	74.000	35.712	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.373	20.621	-33.379	54.000	-30.752	AV
2	*	2401.913	98.796	68.044	N/A	N/A	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

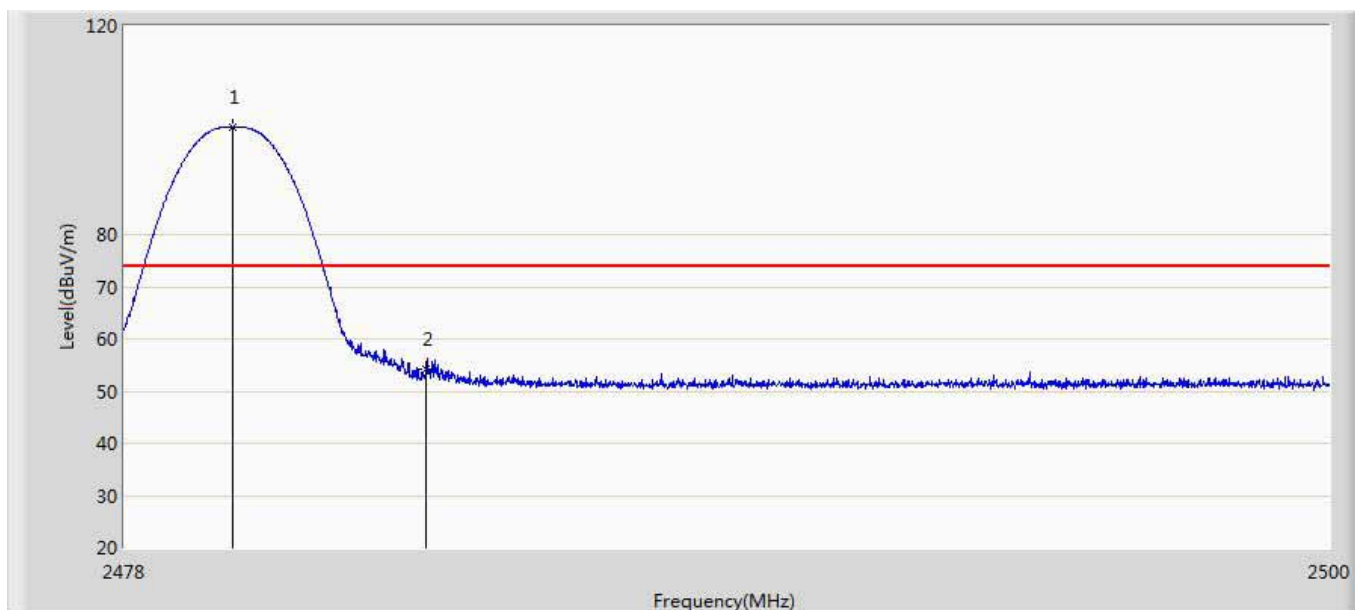

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.980	100.499	64.633	26.499	74.000	35.866	PK
2		2483.500	54.318	18.426	-19.682	74.000	35.891	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.980	100.499	69.747	N/A	N/A	-30.752	AV
2	*	2483.500	54.318	23.566	-30.434	54.000	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

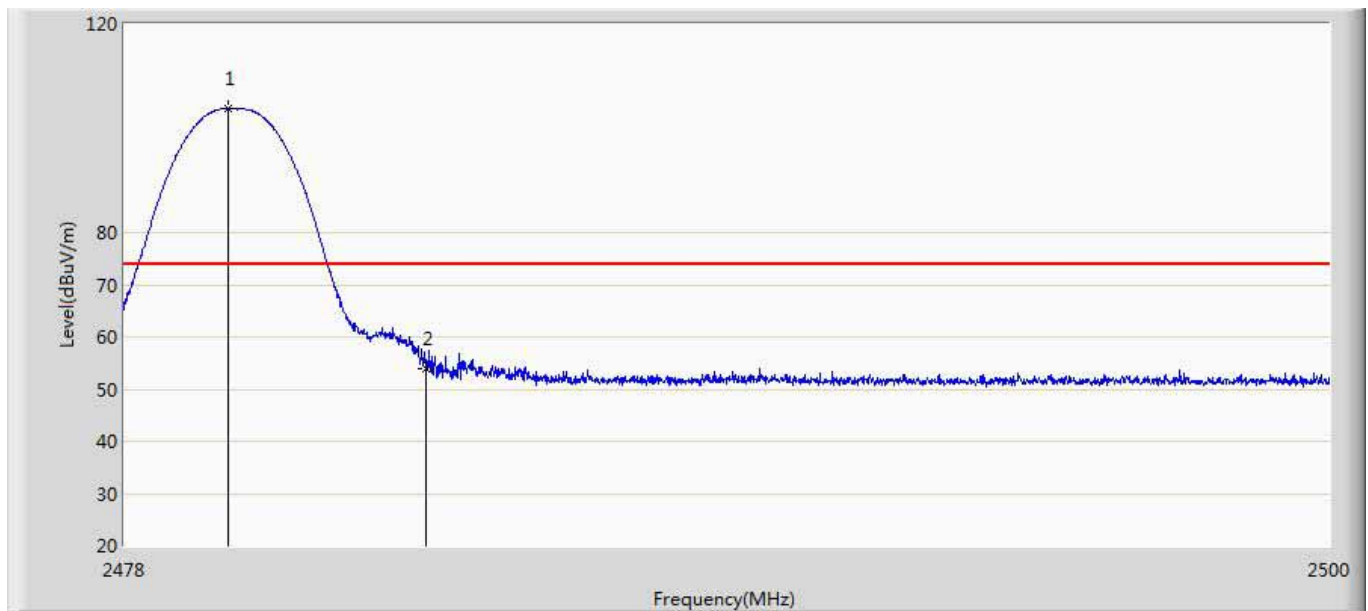

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.892	103.696	67.830	29.696	74.000	35.866	PK
2		2483.500	53.844	17.952	-20.156	74.000	35.891	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.892	103.696	72.944	N/A	N/A	-30.752	AV
2	*	2483.500	53.844	23.092	-30.908	54.000	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

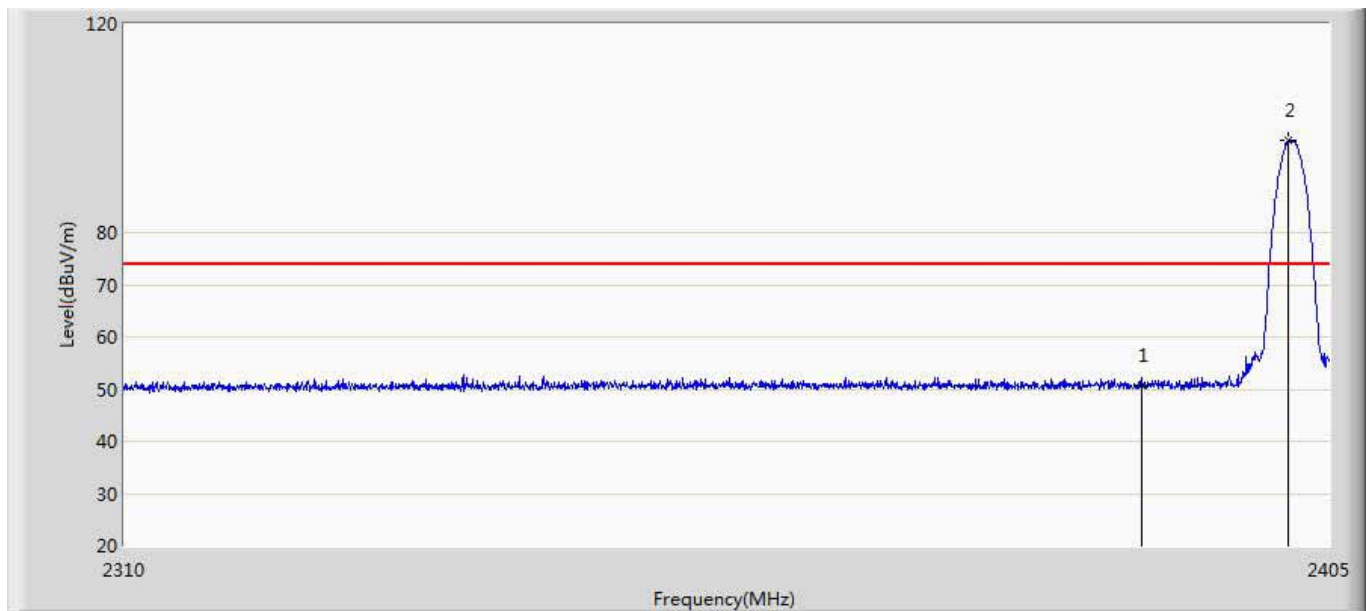

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.639	14.957	-23.361	74.000	35.682	PK
2	*	2401.770	97.615	61.903	23.615	74.000	35.712	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.639	19.887	-34.113	54.000	-30.752	AV
2	*	2401.770	97.615	66.863	N/A	N/A	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

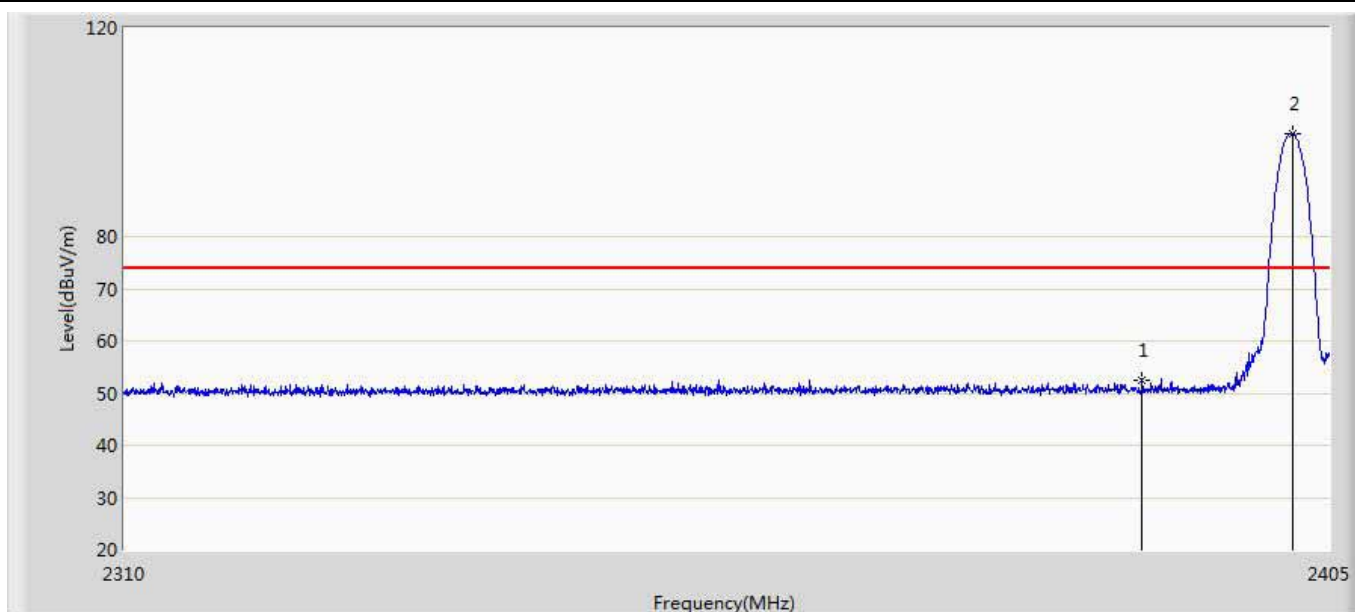

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.490	16.808	-21.510	74.000	35.682	PK
2	*	2402.103	99.751	64.038	25.751	74.000	35.713	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.490	21.738	-32.262	54.000	-30.752	AV
2	*	2402.103	99.751	68.999	N/A	N/A	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

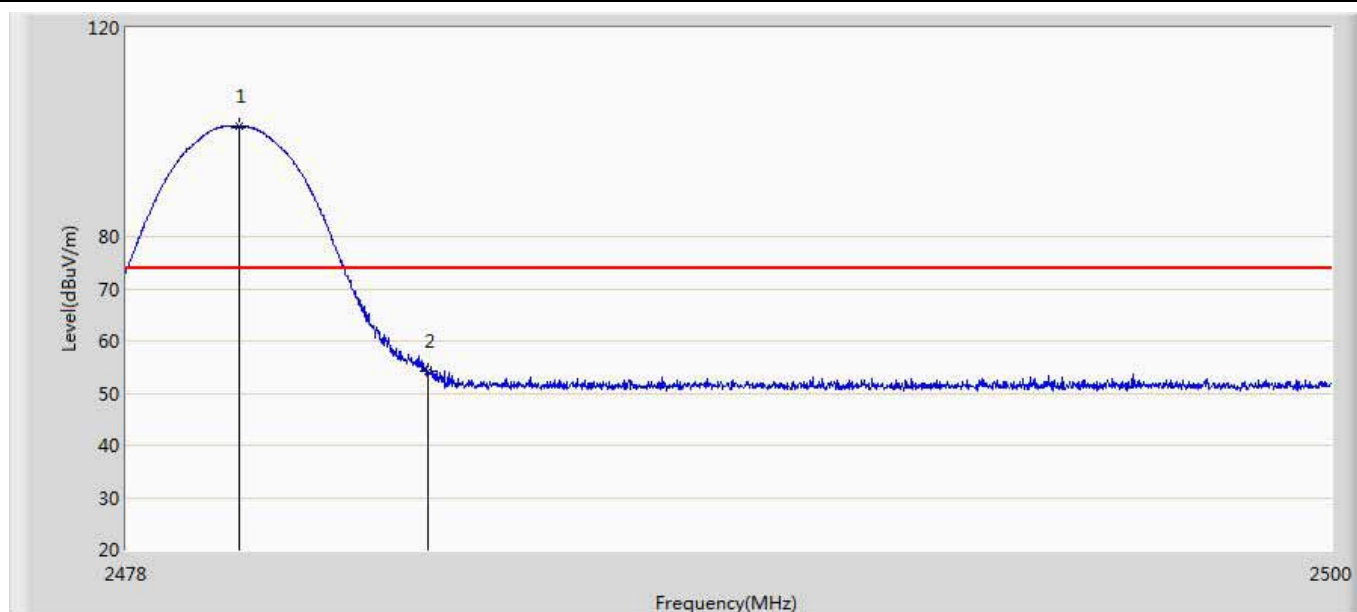

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	101.026	65.159	27.026	74.000	35.866	PK
2		2483.500	54.149	18.257	-19.851	74.000	35.891	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2480.046	101.026	70.274	N/A	N/A	-30.752	AV
2	*	2483.500	54.149	23.397	-30.603	54.000	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

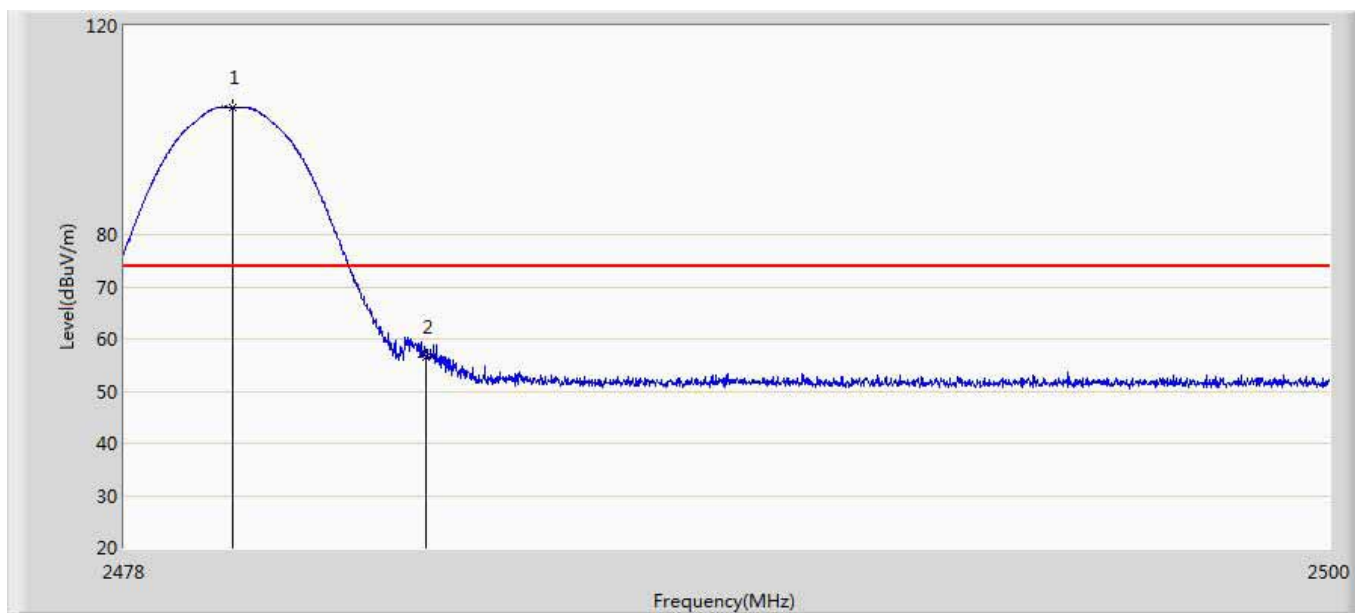

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.980	104.329	68.463	30.329	74.000	35.866	PK
2		2483.500	56.480	20.588	-17.520	74.000	35.891	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.980	104.329	73.577	N/A	N/A	-30.752	AV
2	*	2483.500	56.480	25.728	-28.272	54.000	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

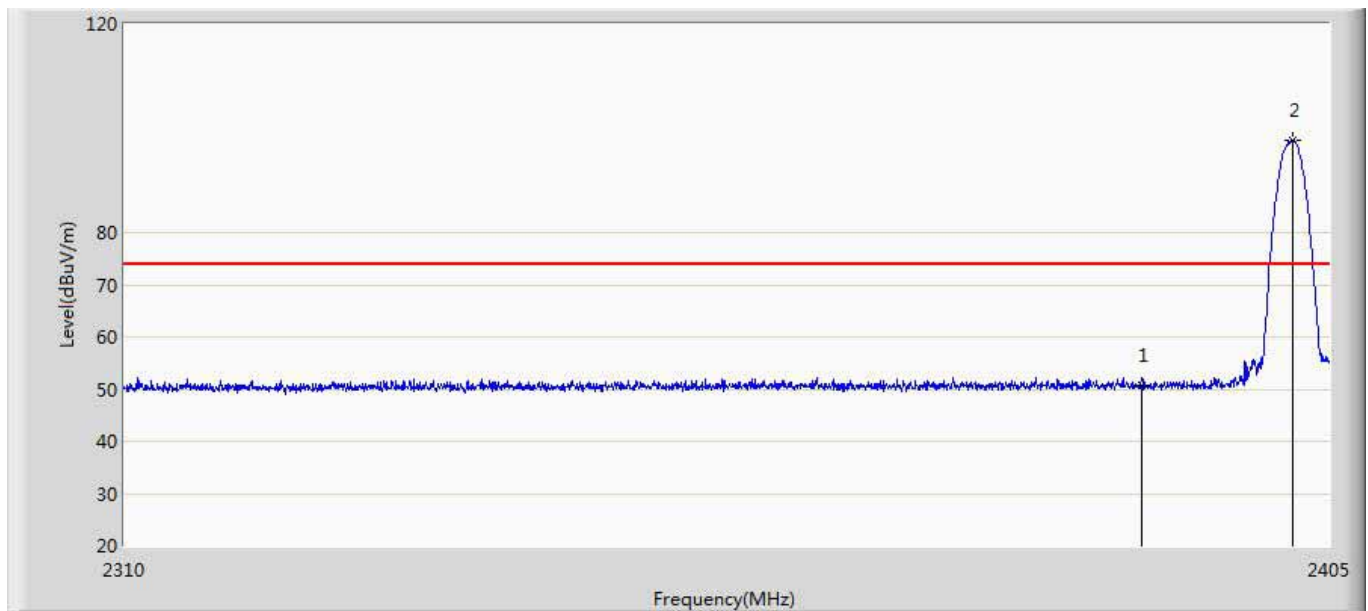

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.659	14.977	-23.341	74.000	35.682	PK
2	*	2402.055	97.665	61.952	23.665	74.000	35.712	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.659	19.907	-34.093	54.000	-30.752	AV
2	*	2402.055	97.665	66.913	N/A	N/A	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

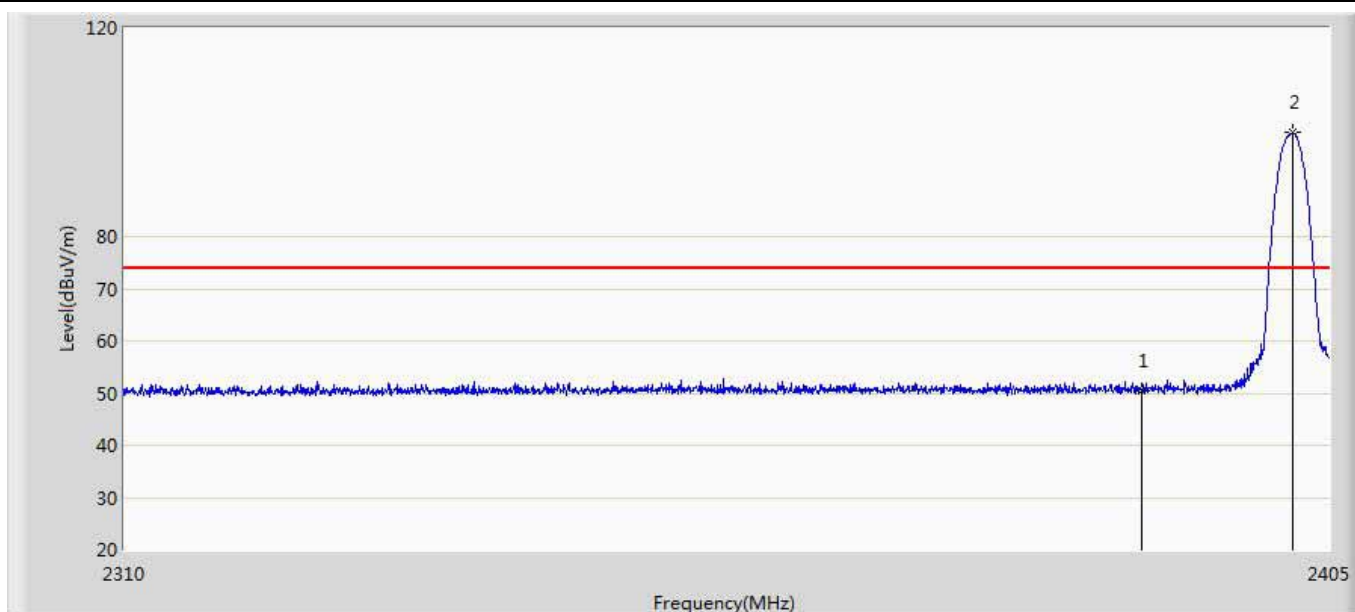

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.418	14.736	-23.582	74.000	35.682	PK
2	*	2402.055	99.895	64.182	25.895	74.000	35.712	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.418	19.666	-34.334	54.000	-30.752	AV
2	*	2402.055	99.895	69.143	N/A	N/A	-30.752	AV


Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

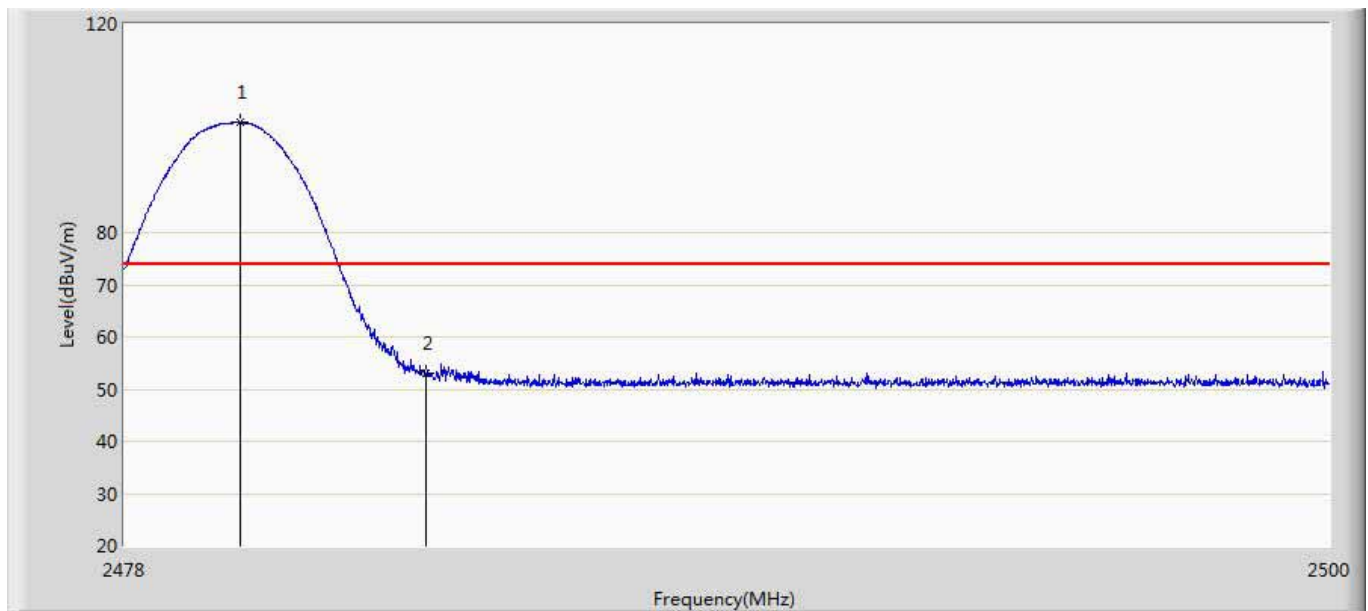

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.112	101.029	65.162	27.029	74.000	35.867	PK
2		2483.500	52.946	17.054	-21.054	74.000	35.891	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2480.112	101.029	70.277	N/A	N/A	-30.752	AV
2	*	2483.500	52.946	22.194	-31.806	54.000	-30.752	AV

Engineer: Eric	
Site: AC5	Time: 2018/07/05 - 19:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Speaker	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

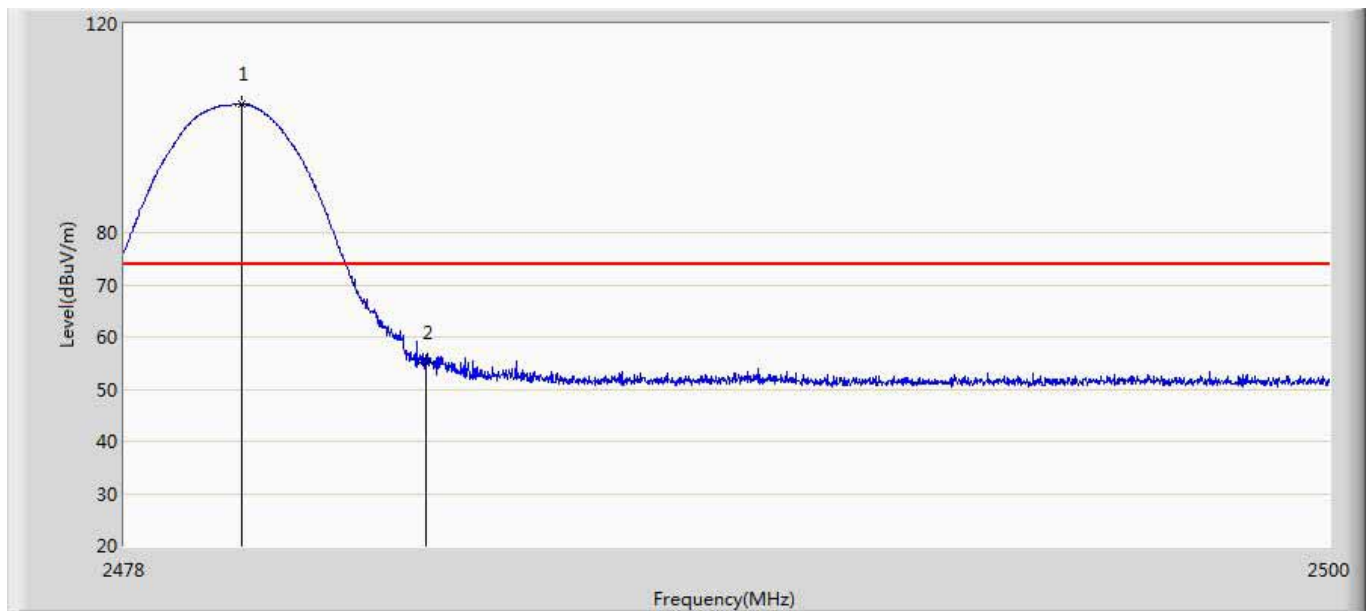

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.145	104.538	68.671	30.538	74.000	35.867	PK
2		2483.500	55.167	19.275	-18.833	74.000	35.891	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2480.145	104.538	73.786	N/A	N/A	-30.752	AV
2	*	2483.500	55.167	24.415	-29.585	54.000	-30.752	AV

12. Antenna Requirement

12.1. Limit

Antenna Requirement Limit	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

12.2. Antenna Connector Construction

Antenna Connector Construction	
☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

_____ The End _____