

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



产品规格书

PRODUCT SPECIFICATION

客 户:	Shenzhen Beilike Technology Co., Ltd.
CUSTOMER:	_____
客户料号:	3-122DX01010AA-160
CUST P/N:	_____
金赞料号:	J30-000920-001
K C P/N:	_____
产品型号:	20.5*38*0.08*55P*11TS*70MM
D E S E :	_____
日 期:	2025. 12. 10
D A T E :	_____
版 本:	A. 0
VERSION :	_____

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY
Wang zhenwei			

Address: No.2, Xisha Road, ShijieTown, Dongguan City

Tel: 86-076986018114

Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED


规格内容
Specification客户料号:
CUST P/N

3-122DX01010AA-160

金赞型号:
KC DESE

20.5*38*0.08*55P*11TS*70MM

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

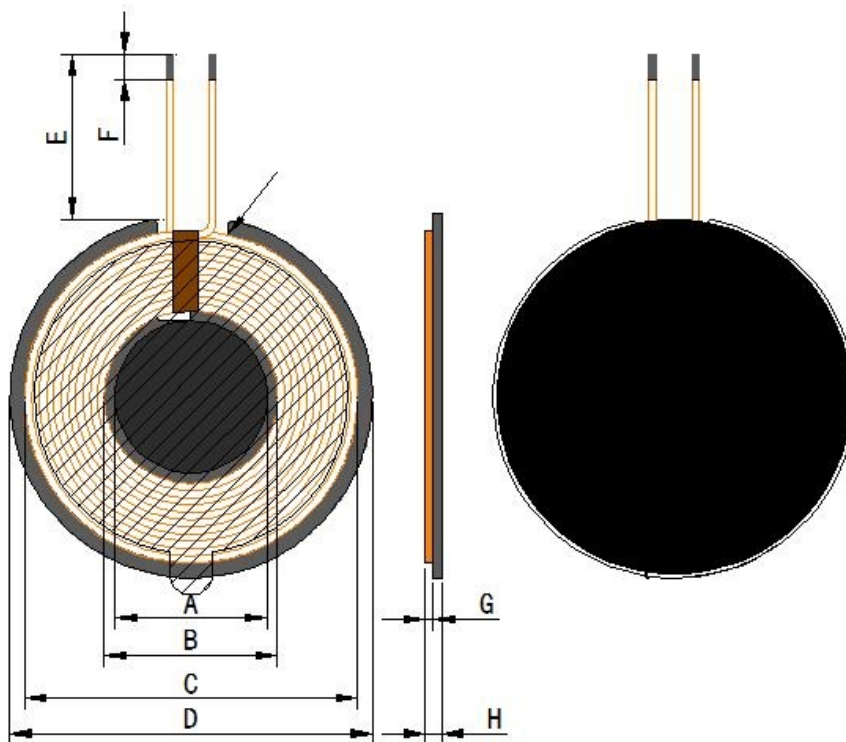

单位(Unit):毫米(mm)

A	B	C	D	E	F	G	H	
18±0.5	20.5±0.5	38±1	43+0/-1	70±2	3±1	0.75±0.1	1.9MAX	

PS: 1. (E) represents the length of the external magnetic lead;
 2. (H) includes the inlet but excludes the release paper;

圈数 Turns	线径 Wire Dia.	绕线方式 疏/ 密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/ 否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08*55P 热风绞线 (Stranded wire)	密绕 (Close)	逆时针 (Anticlockwise)	是 (Yes)	反贴 (Anti/Paste)

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
Wang Zhenwei	li jin

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N

3-122DX01010AA-160

金赞型号:
KC DESE

20.5*38*0.08*55P*11TS*70MM

All materials must meet the ROHS standards.

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, 湿度 RELATIVE HUMIDITY: $65 \pm 10\%$

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	Coil with magnetic sheet: $8.2\mu\text{H} \pm 5\%$	100kHz/1V	LCZ METER 1062
2	DCR	S-F	value of resistance: $85\text{m}\Omega \text{ MAX}$		LCZ METER 1062
3	Q value	S-F	Q value: 55MIN	100kHz/1V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIALS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code	
1	wire rod	0.08 * 55P hot air twisted wire	/	/	
2	ferrite	Hard magnetic G42.9*5.2*0.5H with holes and slots	GCP-T-00581	LX	
3	Small magnetic core	18*0.5H	GCP-T-00181	LX	
4	Small double-sided adhesive tape	Round double-sided adhesive tape 15*0.08H with tear-off handle	SMJ-T-0056	HWD	
5	Double-sided adhesive tape	Circular 36*0.12H with tearable 3M 9448A	SMJ-3M-00155	FL	
6	tin bar	Environmentally friendly lead-free solder wire	Lead-free high-temperature solder wire	XC	
7	glue	JS-E7202 (Thickened) White Adhesive	E7202W	HZY	
8	high-temperature adhesive tape	High-temperature adhesive tape 3mm	High-temperature adhesive tape 3mm		
9	Round matte black film	Round matte black film, 40*0.05H	SMJ-PET-00106	MYS	

拟制
PREPARED BY工程审核
ENGINEER CHECKED BY

Wang Zhenwei

li jin

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008