

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称 : 深圳市高易电子有限公司
: Shenzhen Gaoyi Electronics Co., Ltd.
CUSTOMER'S NAME

客 户 料 号 : EL.X.XQ00000050
CUSTOMER'S P/N

产 品 规 格 : Y. A11. 421
PRODUCT SPEC

制 作 日 期 : 2024.10.29
ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE



东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

ADD: 4th Floor, No. 533, Fumin Middle Road,
Dalong Town, Dongguan City

TEL: 0769-82866410

FAX: 0769-82866409

SPECIFICATION FOR APPROVAL

[illegible]

SPECIFICATION FOR APPROVAL

[illegible]


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	Gaoyi	CUSTOMER'S P/N	ELX.XQ00000050
ISSUE DATE	2024.10.29	PRODUCT SPEC	Y. A11. 421

2.DIMENSION: mm

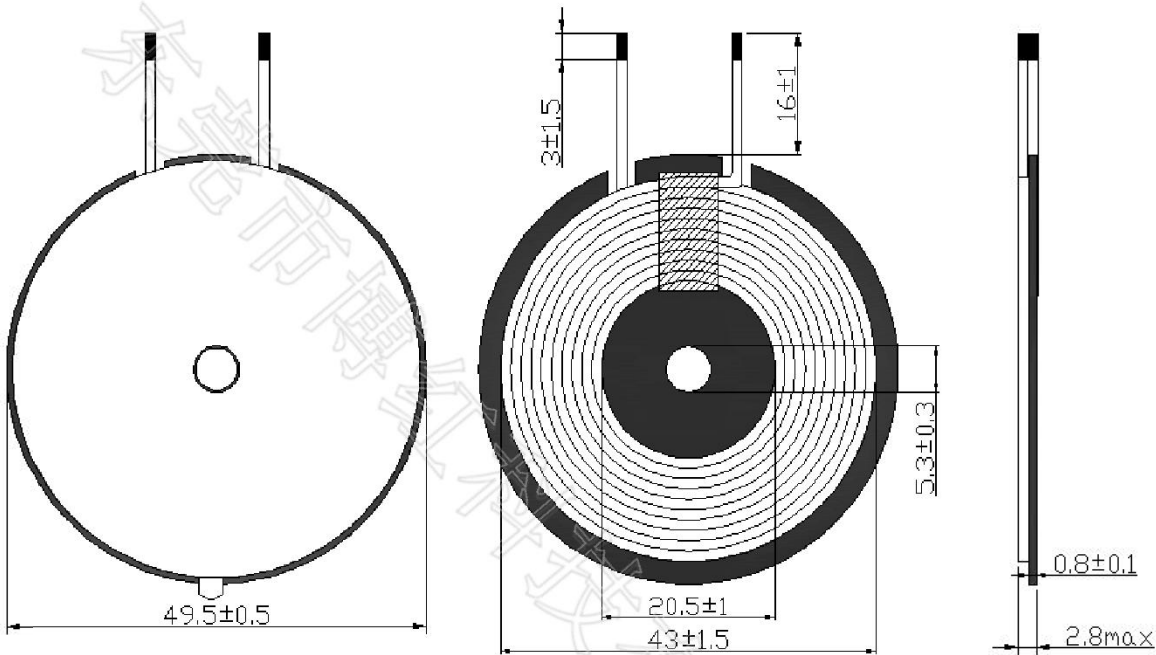

Note

- 1.The coils should be wound closely together, and the gap should not be greater than 1/2 of the wire diameter.
- 2.The coil must not extend beyond the edge of the ferrite magnetic sheet.
- 3.The appearance of the coil is neat, and the components used in the product comply with environmental standards: RoHS, HF.
- 4.The high-temperature adhesive tape is 8mm in width.

ISSUE		CHECK		APPROVAL	
BY		BY		BY	


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	Gaoyi	CUSTOMER'S P/N	ELX.XQ00000050
ISSUE DATE	2024.10.29	PRODUCT SPEC	Y. A11. 421

4.CIRCUIT DIAGRAM



" • " : POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.08*105P	10	/	CCW

6.CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	6.5uH±10%	LCR1062 100KHz/1V AT 25℃±2℃
Q	S-F	60 Min	LCR1062 100KHz/1V AT 25℃±2℃
DCR	S-F	48mΩ Max	LCR1062 1KHz/0.3V AT 25℃±2℃