



How do you program your scanner?


1.Scan Start Configuration

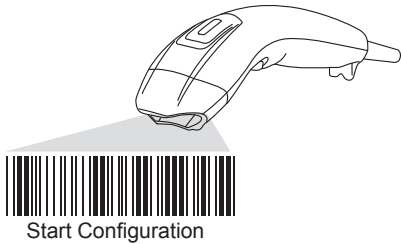

2.Scan all necessary able for parameters that Meet your application

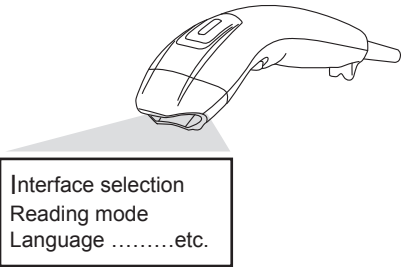

3.Scan end configuration to save the changes.

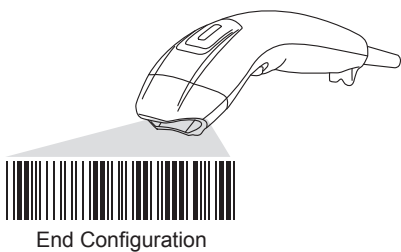

Resetting The Standard Product Defaults

If you aren't sure what programming options are in your scanner, or you've changed some options and want the factory settings restored, scan the bar code below.



Symbologies setting

- Enable	- Disable
* UPC-A on	UPC-A off
* UPC-E on	UPC-E off
* EAN13 on	EAN13 off
* EAN8 on	EAN8 off
* Code39 on	Code39 off
*Codabar on	Codabar off
* Code93 on	Code93 off
* Code128 on	Code128 off
Interleaved 2of 5 on	* Interleaved 2of 5 off
Industrial 2 of 5 on	* Industrial 2 of 5 off
Matrix 2 of 5 on	* Matrix 2 of 5 off
MSI/Plessey on	* MSI/Plessey off
Code32 on (Italian Pharma Code)	*Code32 off (Italian Pharma Code)
Code11 on	*Code11 off
Telepen on	*Telepen off
GS1 DataBar Omnidirectional on	*GS1 DataBar Omnidirectional off
GS1 DataBar Limited on	*GS1 DataBar Limited off
GS1 DataBar Expanded on	*GS1 DataBar Expanded off

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT


This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: -Reorient or relocate the receiving antenna. -Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/ TV technician for help.

CAUTION:
Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.
Labeling requirements


This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

RF exposure warning
The equipment complies with FCC RF exposure limits set forth for an uncontrolled environment.The equipment must not be co-located or operating in conjunction with any other antenna or transmitter.


Before Getting Started




Wireless Scanner




USB Receiver



USB docking station



USB recharge cable



Strap

About your wireless scanner

It is one on one wireless data communication protocol. The scanner is already paired with the USB receiver. Just easily plug USB receiver and start the operation. The scanner on a real time basis, if the scanner is connected, the barcode is decoded and transmitted to the remote host without any delay. If the scanner is not connected or out of range, the data is lost (status: 2 beeps/4 beeps).

Note:
New batteries should be fully charged before their first use

Wake up your wireless scanner

Press and release the trigger on your scanner to activate it. Your scanner is ready to work when orange LED comes on .

Connect USB receiver to a host computer

The device can be quickly recognized by host computer without any software/driver installation. Within less than 10 seconds the receiver will flash red to inform the Initialization is completed.

Recharging the battery

The Red LED comes on when the battery level is low, please recharge the scanner immediately. When the scanner is charging, the LED is green (solid). A full recharge (from completely drained battery) takes approximately 4 hours. When the scanner is fully charged, the green LED will go off.

How to pair (repair) you scanner and receiver?

- Step 1: Plug the USB receiver to the scanner
- Step 2: Trigger the button on the scanner.
- Step 3: Devices are successful paired with 1 beep from scanner and 1 blink from the USB receiver.

Scanner LED indicator

Status / indicator	Beeper	Blue LED	Green LED	Red LED	Orange LED
Good Scan	1 beep	1 blink			
Transmission failure	4 beeps	4 blink			
Trasmission failure (in memory mode)	2 beeps	2 blink			
Low battery				On	
Recharge			On		
Operation mode					On
Sleeping	None	None	None	None	None

USB receiver LED indicator

Color	Indication
Red	LED will flash to present the success of transmission

Default setting of wireless scanner

- Buzzer : High
 - Vibrator: Disable
 - Memory mode: Disable
 - Power saving (sleep mode): 10min
- The default values can be modified by scanning the following options.

Note: Please scan the following barcode directly with your USB receiver on. No need to scan start and end configuration barcodes.

<Buzzer>

*High

Low

Off

<Vibration motor>

Enable

*Disable

<Memory mode>

*Disable

Enable

<Sleep mode>

*10min

30min

always on

HID USB Keyboard Country

Scan the appropriate country code below to program the keyboard for your country. As a general rule, the following characters are supported, but need special care for countries other than the United States: @ | \$ # { } [] = / ' \ < > ~

Note: Please scan the following barcode directly with your USB receiver on. No need to scan start and end configuration barcodes.

US

German

Italian

Danish

Spanish

Japanese

French

Turkey

Terminator selection

* CR+LF

CR

Tab

LF