

# RF Test Report

**Project Number: 5214055****Offer Number: SUW-202408006976****Report Number: 5214055EMC03****Revision Level: 4****Client: Alarm.com Incorporated****Equipment Under Test: Alarm.com 4MP Indoor/Outdoor Spotlight Battery Camera****Model Number: ADC-V731B****FCC ID: YL6-143V731B****IC ID: 9111A-143V731B****Applicable Standards: ANSI C63.10: 2020 (FCC Part 15 Subpart C, § 15.247)****RSS-247, Issue 3****RSS-GEN Issue 5****Report issued on: 30 May 2025****Report revised on: 17 July 2025****Test Result: Compliant**

FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER: 3212.01

Report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Prepared by:

  
Dan Alvarez, RF/EMC Sr Staff Engineer

Reviewed by:

  
Martin Taylor, Project Engineer

Remarks: This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. And for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 30 days only.

## Table of Contents

|          |                                                            |            |
|----------|------------------------------------------------------------|------------|
| <b>1</b> | <b>SUMMARY OF TEST RESULTS .....</b>                       | <b>4</b>   |
| 1.1      | MODIFICATIONS REQUIRED FOR COMPLIANCE .....                | 4          |
| <b>2</b> | <b>GENERAL INFORMATION.....</b>                            | <b>5</b>   |
| 2.1      | CLIENT INFORMATION .....                                   | 5          |
| 2.2      | TEST LABORATORY .....                                      | 5          |
| 2.3      | GENERAL INFORMATION OF EUT .....                           | 5          |
| 2.4      | OPERATING MODES AND CONDITIONS .....                       | 5          |
| 2.5      | EUT CONNECTION BLOCK DIAGRAM – CONDUCTED MEASUREMENTS..... | 6          |
| 2.6      | EUT CONNECTION BLOCK DIAGRAM – RADIATED MEASUREMENTS ..... | 6          |
| 2.7      | SYSTEM CONFIGURATIONS .....                                | 6          |
| 2.8      | CABLE LIST .....                                           | 6          |
| <b>3</b> | <b>BANDWIDTH .....</b>                                     | <b>7</b>   |
| 3.1      | TEST RESULT.....                                           | 7          |
| 3.2      | TEST METHOD.....                                           | 7          |
| 3.3      | TEST SITE.....                                             | 7          |
| 3.4      | TEST EQUIPMENT .....                                       | 7          |
| 3.5      | TEST DATA - 99%OBW .....                                   | 8          |
| <b>4</b> | <b>PEAK OUTPUT POWER .....</b>                             | <b>14</b>  |
| 4.1      | TEST RESULT.....                                           | 14         |
| 4.2      | TEST METHOD.....                                           | 14         |
| 4.3      | TEST SITE.....                                             | 14         |
| 4.4      | TEST EQUIPMENT .....                                       | 14         |
| 4.5      | TEST DATA.....                                             | 15         |
| <b>5</b> | <b>POWER SPECTRAL DENSITY .....</b>                        | <b>18</b>  |
| 5.1      | TEST RESULT.....                                           | 18         |
| 5.2      | TEST METHOD.....                                           | 18         |
| 5.3      | TEST SITE.....                                             | 18         |
| 5.4      | TEST EQUIPMENT .....                                       | 18         |
| 5.5      | TEST DATA.....                                             | 19         |
| <b>6</b> | <b>CONDUCTED SPURIOUS EMISSIONS / BAND EDGE.....</b>       | <b>22</b>  |
| 6.1      | TEST RESULT.....                                           | 22         |
| 6.2      | TEST METHOD.....                                           | 22         |
| 6.3      | TEST SITE.....                                             | 22         |
| 6.4      | TEST EQUIPMENT .....                                       | 22         |
| 6.5      | TEST DATA – DTS BAND EDGE.....                             | 23         |
| <b>7</b> | <b>FIELD STRENGTH OF SPURIOUS RADIATION.....</b>           | <b>66</b>  |
| 7.1      | TEST RESULT.....                                           | 66         |
| 7.2      | TEST METHOD.....                                           | 66         |
| 7.3      | TEST SITE.....                                             | 66         |
| 7.4      | TEST EQUIPMENT .....                                       | 67         |
| 7.5      | TEST DATA.....                                             | 68         |
| <b>8</b> | <b>EMISSIONS IN RESTRICTED FREQUENCY BANDS .....</b>       | <b>106</b> |
| 8.1      | TEST RESULT.....                                           | 106        |
| 8.2      | TEST METHOD.....                                           | 106        |
| 8.3      | TEST SITE.....                                             | 106        |
| 8.4      | TEST EQUIPMENT .....                                       | 106        |
| 8.5      | TEST DATA – BAND EDGE .....                                | 107        |



|           |                                      |            |
|-----------|--------------------------------------|------------|
| <b>9</b>  | <b>ANTENNA REQUIREMENT.....</b>      | <b>113</b> |
| 9.1       | RESULT.....                          | 113        |
| 9.2       | REQUIREMENT.....                     | 113        |
| 9.3       | CONCLUSION.....                      | 113        |
| <b>10</b> | <b>MEASUREMENT UNCERTAINTY .....</b> | <b>114</b> |
| <b>11</b> | <b>REVISION HISTORY.....</b>         | <b>114</b> |

# 1 Summary of Test Results

| Test Description                            | Test Specification |                                  | Test Result |
|---------------------------------------------|--------------------|----------------------------------|-------------|
| Bandwidth                                   | 15.247(a)(2)       | RSS-247 S5.2 (a)<br>RSS-GEN S6.6 | Compliant   |
| Peak Output Power                           | 15.247(b)(3)       | RSS-247 S5.4 (d)                 | Compliant   |
| Power Spectral Density                      | 15.247(e)          | RSS-247 S5.2 (b)                 | Compliant   |
| Conducted Spurious Emissions<br>/ Band Edge | 15.247(d)          | RSS-247 S5.5                     | Compliant   |
| Field Strength of Spurious<br>Radiation     | 15.247(d), 15.209  | RSS-247 S5.5                     | Compliant   |
| Emissions in Restricted<br>Frequency Bands  | 15.205, 15.209     | RSS-GEN S8.9, S8.10              | Compliant   |
| Antenna Requirement                         | 15.203             | RSS-GEN S8.3                     | Compliant   |
| AC Powerline Conducted<br>Emissions         | 15.107, 15.207     | RSS-GEN S8.8                     | N/A (1)     |

1) Product is battery powered. Conducted Emissions is not applicable.

## 1.1 Modifications Required for Compliance

None

## 2 General Information

### 2.1 Client Information

Name: Alarm.com Incorporated  
Address: 8281 Greensboro Drive, Suite 100  
City, State, Zip, Country: Tysons, VA 22102, USA

### 2.2 Test Laboratory

Name: SGS North America, Inc.  
Address: 620 Old Peachtree Road NW, Suite 100  
City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA  
Type of lab: Testing Laboratory  
Certificate Number: 3212.01

### 2.3 General Information of EUT

Product Marketing Name (PMN): Alarm.com 4MP Indoor/Outdoor Spotlight Battery Camera  
Model Number (HVIN): ADC-V731B  
Firmware Version ID (FVIN): v0.0.22-v731b-20240927-dev  
Serial Number: 50407410F2F1 (Conducted Sample); 50407410F2B2 (Radiated Sample)

Frequency Range: 2412 – 2462 MHz

Data Modes: **Supported standards and data rate**

|           |          | 2.4GHz         |
|-----------|----------|----------------|
| Standards | PHY      | 20MHz          |
| 802.11b   | DSSS/CCK | 1Mbps ~ 11Mbps |
| 802.11a   | OFDM     | x              |
| 802.11g   | OFDM     | 6Mbps ~ 54Mbps |
| 802.11n   | HT       | MCS0 ~ MCS7    |
| 802.11ac  | VHT      | x              |

**\*\*\*Only supports 20MHz**

Antenna:

| 2.4GHz | Frequency(MHz) | 2400 | 2450 | 2500 |
|--------|----------------|------|------|------|
| Ant.1  | Peak Gain(dBi) | 1.7  | 1.5  | 1.4  |
|        | Efficiency(%)  | 62   | 60   | 59   |
| Ant.2  | Peak Gain(dBi) | 1.9  | 2.0  | 1.7  |
|        | Efficiency(%)  | 62   | 60   | 57   |

Rated Voltage: Battery (3.6VDC)

Test Voltage: Battery (3.6VDC)


Sample Received Date: 30 October 2024

Dates of testing: 26 November 2024 – 17 July 2025


### 2.4 Operating Modes and Conditions

The EUT was programmed by the manufacturer to transmit on low, mid and high channels in all necessary modulation and modes of operation.

## 2.5 EUT Connection Block Diagram – Conducted Measurements

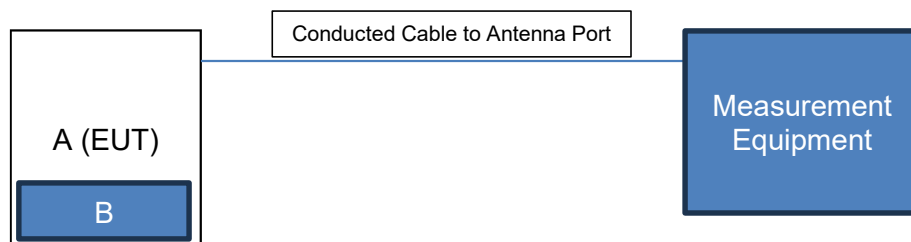

## 2.6 EUT Connection Block Diagram – Radiated Measurements



Inside Chamber

-----

Outside Chamber

## 2.7 System Configurations

| Device Reference | Manufacturer                         | Description                                                              | Model Number | Serial Number      |
|------------------|--------------------------------------|--------------------------------------------------------------------------|--------------|--------------------|
| A                | Alarm.com Incorporated               | Alarm.com 4MP Indoor/Outdoor Spotlight Battery Camera (Conducted Sample) | ADC-V731B    | 50407410F2F1       |
| A                | Alarm.com Incorporated               | Alarm.com 4MP Indoor/Outdoor Spotlight Battery Camera (Radiated Sample)  | ADC-V731B    | 50407410F2B2       |
| B                | Fuji Electronics (Shenzhen) Co., LTD | Battery                                                                  | 833002       | FJ8330022401000139 |

## 2.8 Cable List

| Cable reference | Port Name | Start | End | Cable Length (m) | Ferrite installed? | Shielded? |
|-----------------|-----------|-------|-----|------------------|--------------------|-----------|
| 1               | None      |       |     |                  |                    |           |

### 3 Bandwidth

#### 3.1 Test Result

| Test Description | Test Specification |                                  | Test Result |
|------------------|--------------------|----------------------------------|-------------|
| 6 dB bandwidth   | 15.247(a)(2)       | RSS-247 S5.2 (a)<br>RSS-GEN S6.6 | Compliant   |

#### 3.2 Test Method

The procedures from ANSI C63.10: 2020 clause 11.8 and KBD 558074 D01 15.247 Meas Guidance v05r02 were used to determine the 6 dB bandwidth.

#### 3.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.10 °C

Relative Humidity: 19.9 %

Atmospheric Pressure: 98.58 kPa

#### 3.4 Test Equipment

Test End Date: 3-Dec-2024


Tester: SGM

| Equipment                       | Manufacturer             | Model        | Asset Number | Cal Date    | Cal Due Date |
|---------------------------------|--------------------------|--------------|--------------|-------------|--------------|
| RF CABLE SMA TO SMA, 0.01-40GHZ | TELEDYNE STORM MICROWAVE | 084-0505-059 | 20108        | 20-Mar-2024 | 20-Mar-2025  |
| RF CABLE SMA TO SMA, 0.01-40GHZ | TELEDYNE STORM MICROWAVE | 084-0505-059 | 20109        | 20-Mar-2024 | 20-Mar-2025  |
| SIGNAL ANALYZER (TS8997)        | ROHDE & SCHWARZ          | FSV30        | B085749      | 3-Jan-2024  | 3-Jan-2025   |
| TSTPASS SWITCHBOX               | TSTPASS                  | SB2          | 23009        | 8-Apr-2024  | 8-Apr-2025   |


### 3.5 Test Data - 99%OBW

| Mode           | TX Type | Frequency (MHz) | ANT | 99% Occupied Bandwidth (MHz) |
|----------------|---------|-----------------|-----|------------------------------|
|                |         |                 |     | Result                       |
| 802.11b        | SISO    | 2412            | 1   | 11.496                       |
|                |         | 2437            | 1   | 11.736                       |
|                |         | 2462            | 1   | 11.531                       |
| 802.11g        | SISO    | 2412            | 1   | 17.888                       |
|                |         | 2437            | 1   | 17.893                       |
|                |         | 2462            | 1   | 17.972                       |
| 802.11n (HT20) | SISO    | 2412            | 1   | 18.464                       |
|                |         | 2437            | 1   | 18.421                       |
|                |         | 2462            | 1   | 18.485                       |

### 3.5.1 Example Plots

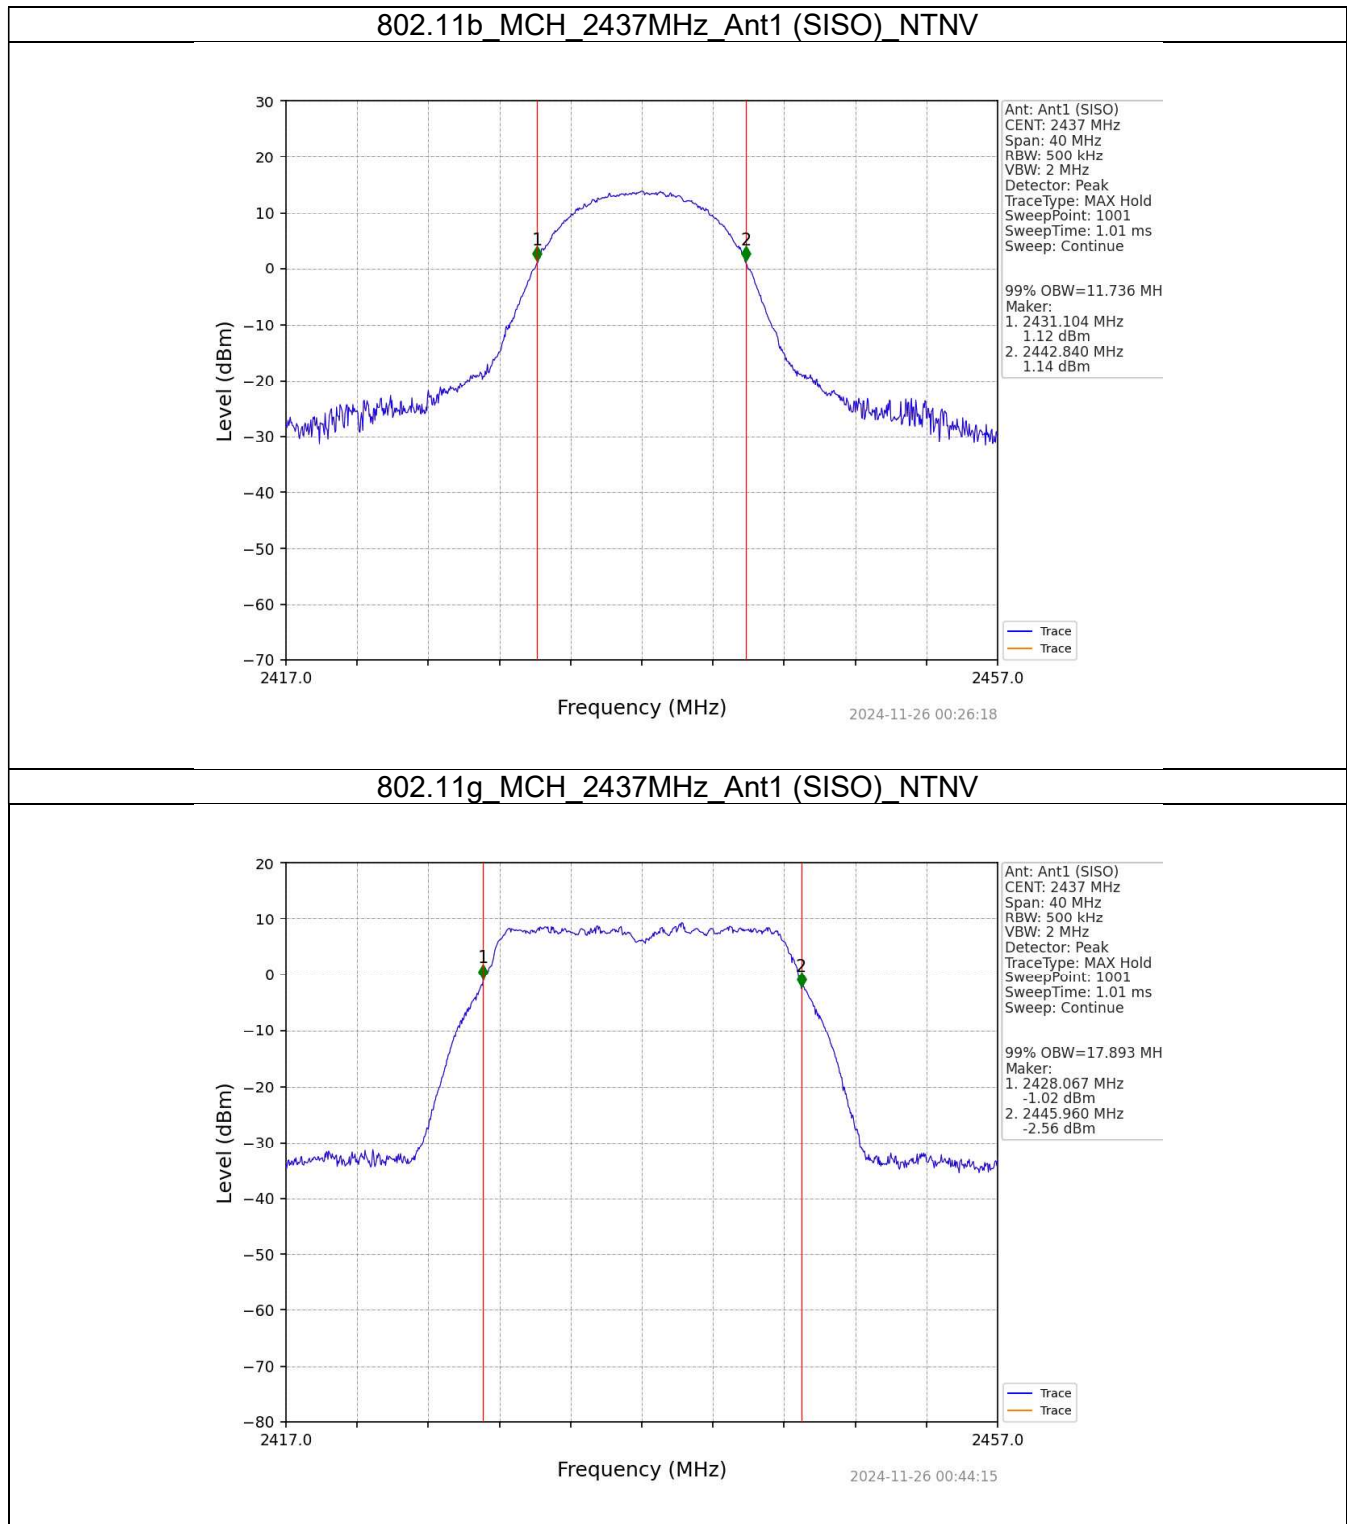

802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

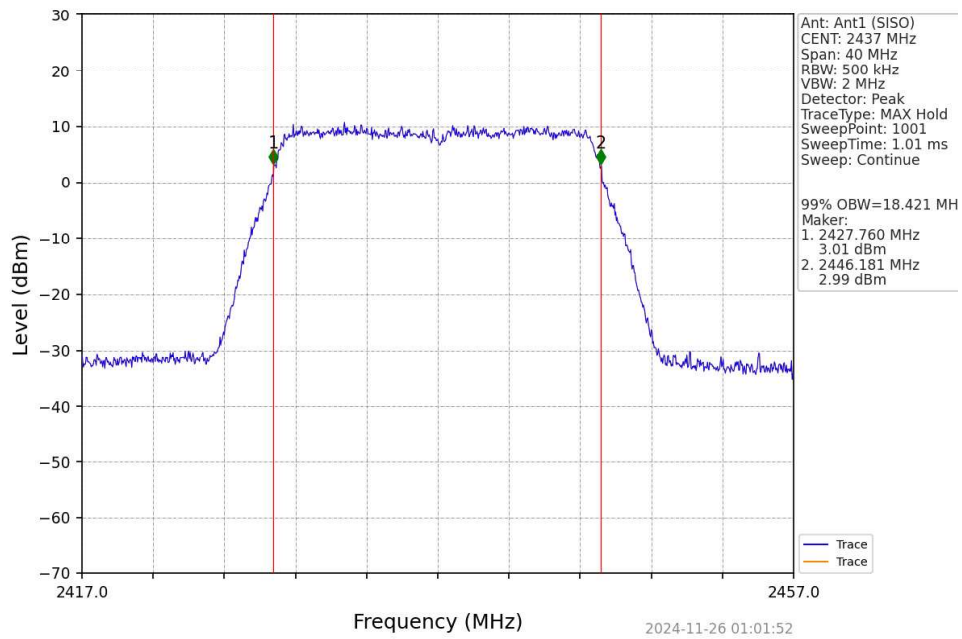


### 3.5.2 Test Data - 6dB down


| Mode           | TX Type | Frequency (MHz) | ANT | 6dB Bandwidth (MHz) |
|----------------|---------|-----------------|-----|---------------------|
|                |         |                 |     | Result              |
| 802.11b        | SISO    | 2412            | 1   | 8.874               |
|                |         | 2437            | 1   | 8.940               |
|                |         | 2462            | 1   | 8.838               |
| 802.11g        | SISO    | 2412            | 1   | 16.786              |
|                |         | 2437            | 1   | 16.811              |
|                |         | 2462            | 1   | 16.800              |
| 802.11n (HT20) | SISO    | 2412            | 1   | 18.034              |
|                |         | 2437            | 1   | 17.960              |
|                |         | 2462            | 1   | 17.965              |

### 3.5.3 Example Plots


802.11b\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

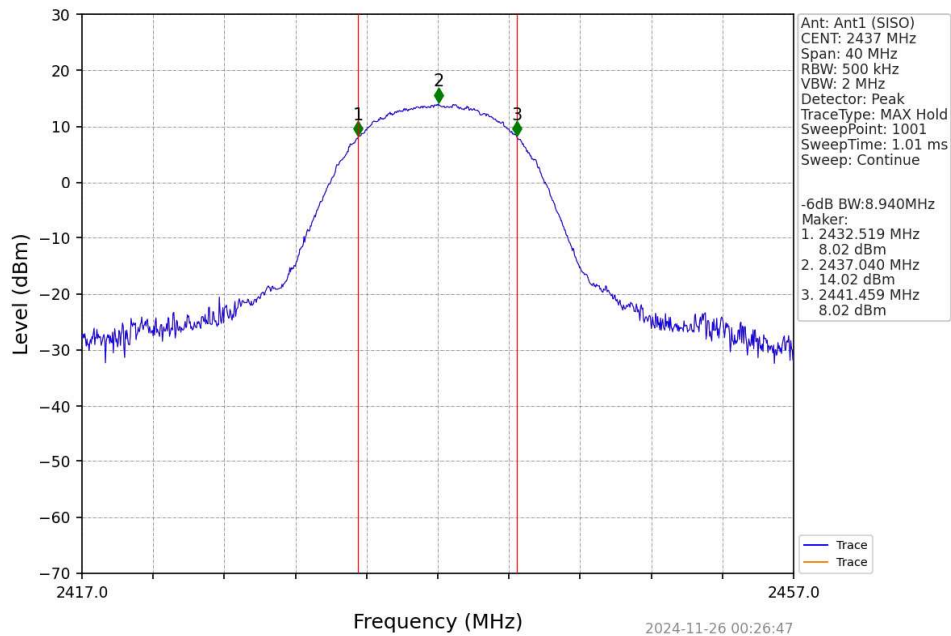

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

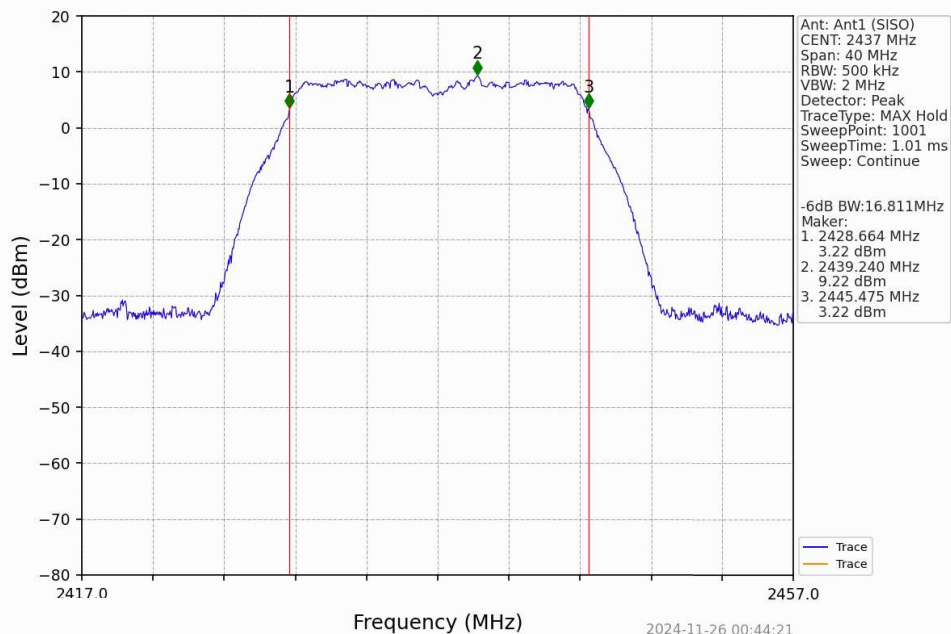

802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

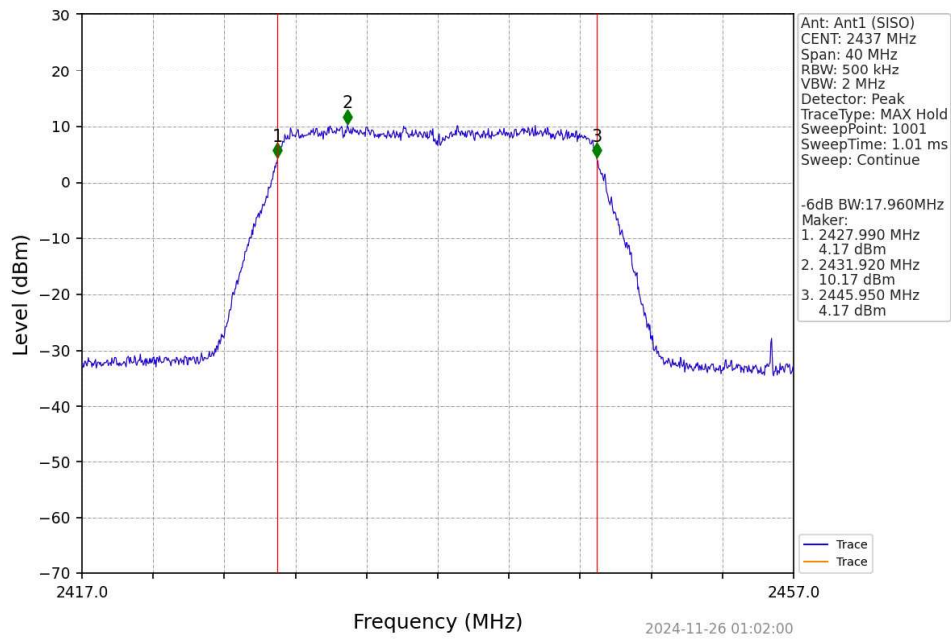

## 4 Peak Output Power

### 4.1 Test Result

| Test Description  | Test Specification |                  | Test Result |
|-------------------|--------------------|------------------|-------------|
| Peak Output Power | 15.247(b)(3)       | RSS-247 S5.4 (d) | Compliant   |

### 4.2 Test Method

Fundamental peak power measurements were recorded using the procedures from ANSI C63.10: 2020 clause 11.9 and KDB 558074 D01 15.247 Meas Guidance v05r02.

#### Limit

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. For using antennas with greater than 6dBi of gain, the limit is reduced in dB by the amount the gain exceeds 6dBi (e.g. for a 7.4dBi antenna, the limit is reduced from 30dBm to 28.6dBm)

### 4.3 Test Site

SGS EMC Laboratory, Suwanee, GA

#### Environmental Conditions

Temperature: 23.06 °C

Relative Humidity: 53.9 %

Atmospheric Pressure: 98.26 kPa

### 4.4 Test Equipment

Test End Date: 2-May-2025

Tester: SGM

| Equipment                       | Manufacturer             | Model        | Asset Number | Cal Date   | Cal Due Date |
|---------------------------------|--------------------------|--------------|--------------|------------|--------------|
| RF CABLE SMA TO SMA, 0.01-40GHZ | TELEDYNE STORM MICROWAVE | 084-0505-059 | 20108        | 3-Apr-2025 | 3-Apr-2026   |
| SIGNAL ANALYZER (TS8997)        | ROHDE & SCHWARZ          | FSV30        | B085749      | 4-Mar-2025 | 4-Mar-2026   |
| TSTPASS SWITCHBOX               | TSTPASS                  | SB2          | 23009        | 4-Apr-2025 | 4-Apr-2026   |

#### 4.5 Test Data

| Mode           | TX Type | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) |       |       | Verdict |
|----------------|---------|-----------------|-------------------------------------------|-------|-------|---------|
|                |         |                 | ANT1                                      | ANT2  | Limit |         |
| 802.11b        | SISO    | 2412            | 18.93                                     | 19.76 | <=30  | Pass    |
|                |         | 2437            | 23.13                                     | 24.22 | <=30  | Pass    |
|                |         | 2462            | 19.07                                     | 19.82 | <=30  | Pass    |
| 802.11g        | SISO    | 2412            | 19.51                                     | 20.38 | <=30  | Pass    |
|                |         | 2437            | 22.87                                     | 23.46 | <=30  | Pass    |
|                |         | 2462            | 20.35                                     | 21.16 | <=30  | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 18.77                                     | 19.77 | <=30  | Pass    |
|                |         | 2437            | 23.42                                     | 24.04 | <=30  | Pass    |
|                |         | 2462            | 19.08                                     | 19.86 | <=30  | Pass    |

Note1: Antenna Gain: Ant1: 1.70dBi; Ant2: 2.00dBi;


| Mode           | TX Type | Frequency (MHz) | E.I.R.P (dBm) |       |         | Verdict |
|----------------|---------|-----------------|---------------|-------|---------|---------|
|                |         |                 | ANT1          | ANT2  | Limit   |         |
| 802.11b        | SISO    | 2412            | 20.69         | 21.76 | <=36.02 | Pass    |
|                |         | 2437            | 24.81         | 26.18 | <=36.02 | Pass    |
|                |         | 2462            | 20.68         | 21.76 | <=36.02 | Pass    |
| 802.11g        | SISO    | 2412            | 21.62         | 22.78 | <=36.02 | Pass    |
|                |         | 2437            | 24.55         | 25.42 | <=36.02 | Pass    |
|                |         | 2462            | 22.75         | 23.49 | <=36.02 | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 21.07         | 21.98 | <=36.02 | Pass    |
|                |         | 2437            | 25.10         | 26.00 | <=36.02 | Pass    |
|                |         | 2462            | 20.80         | 22.09 | <=36.02 | Pass    |

Note1: Antenna Gain: Ant1: 1.70dBi; Ant2: 2.00dBi;


Note2: E.I.R.P = Measured Power + Antenna Gain

#### 4.5.1 Example Plots


802.11b\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

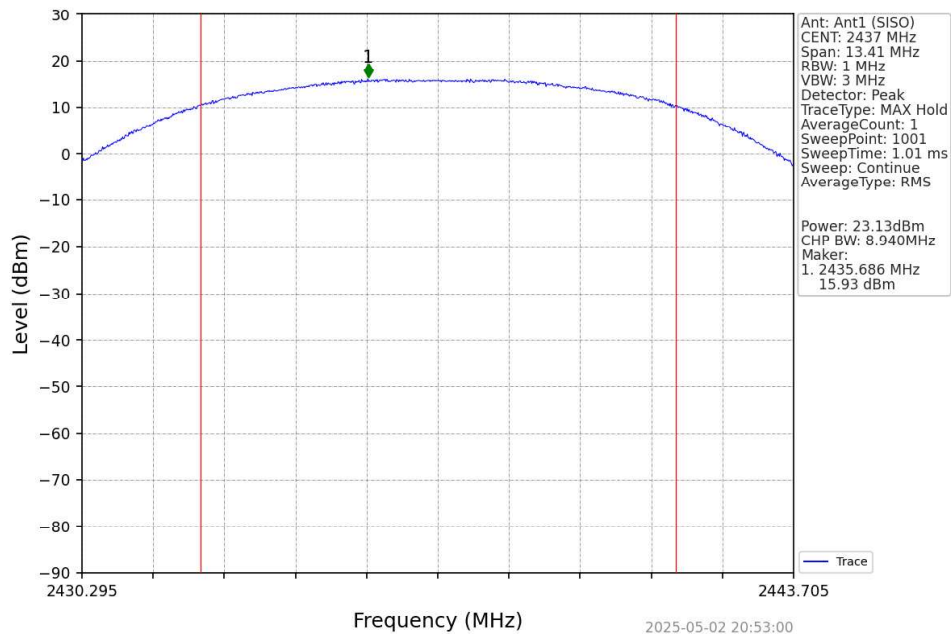

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

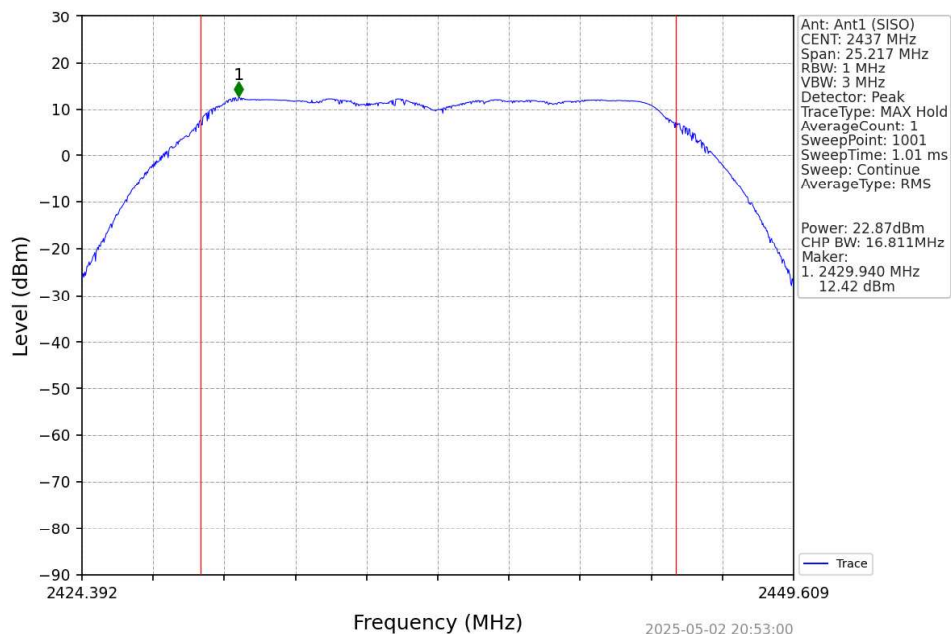

802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

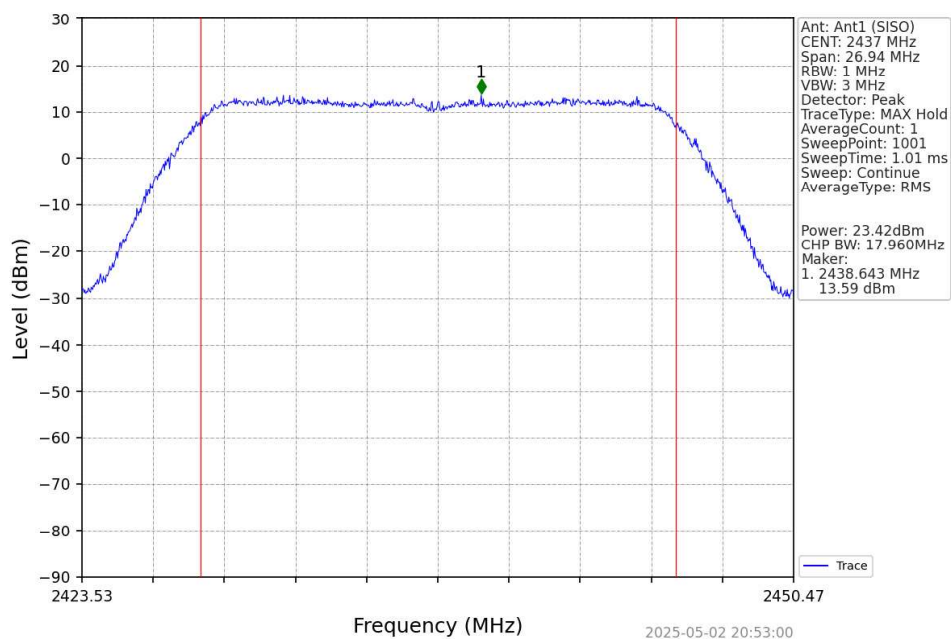

## 5 Power Spectral Density

### 5.1 Test Result

| Test Description       | Test Specification |                  | Test Result |
|------------------------|--------------------|------------------|-------------|
| Power Spectral Density | 15.247(e)          | RSS-247 S5.2 (b) | Compliant   |

### 5.2 Test Method

Power spectral density measurements were recorded using the procedures from ANSI C63.10: 2020 clause 11.10 and KDB 558074 D01 15.247 Meas Guidance v05r02.

#### Limit

The limit is 8 dBm.

### 5.3 Test Site

SGS EMC Laboratory, Suwanee, GA

#### Environmental Conditions

Temperature: 23.06 °C

Relative Humidity: 53.9 %

Atmospheric Pressure: 98.26 kPa

### 5.4 Test Equipment

Test End Date: 2-May-2025


Tester: SGM

| Equipment                       | Manufacturer             | Model        | Asset Number | Cal Date   | Cal Due Date |
|---------------------------------|--------------------------|--------------|--------------|------------|--------------|
| RF CABLE SMA TO SMA, 0.01-40GHZ | TELEDYNE STORM MICROWAVE | 084-0505-059 | 20108        | 3-Apr-2025 | 3-Apr-2026   |
| SIGNAL ANALYZER (TS8997)        | ROHDE & SCHWARZ          | FSV30        | B085749      | 4-Mar-2025 | 4-Mar-2026   |
| TSTPASS SWITCHBOX               | TSTPASS                  | SB2          | 23009        | 4-Apr-2025 | 4-Apr-2026   |


## 5.5 Test Data

| Mode                                               | TX Type | Frequency (MHz) | Maximum PSD (dBm/3kHz) |        |       | Verdict |
|----------------------------------------------------|---------|-----------------|------------------------|--------|-------|---------|
|                                                    |         |                 | ANT1                   | ANT2   | Limit |         |
| 802.11b                                            | SISO    | 2412            | -9.86                  | -8.98  | <=8   | Pass    |
|                                                    |         | 2437            | -6.24                  | -4.72  | <=8   | Pass    |
|                                                    |         | 2462            | -10.00                 | -9.21  | <=8   | Pass    |
| 802.11g                                            | SISO    | 2412            | -13.99                 | -13.18 | <=8   | Pass    |
|                                                    |         | 2437            | -10.80                 | -10.02 | <=8   | Pass    |
|                                                    |         | 2462            | -13.29                 | -12.54 | <=8   | Pass    |
| 802.11n (HT20)                                     | SISO    | 2412            | -15.65                 | -14.32 | <=8   | Pass    |
|                                                    |         | 2437            | -10.51                 | -9.74  | <=8   | Pass    |
|                                                    |         | 2462            | -14.99                 | -12.84 | <=8   | Pass    |
| Note1: Antenna Gain: Ant1: 1.70dBi; Ant2: 2.00dBi; |         |                 |                        |        |       |         |

### 5.5.1 Example Plots

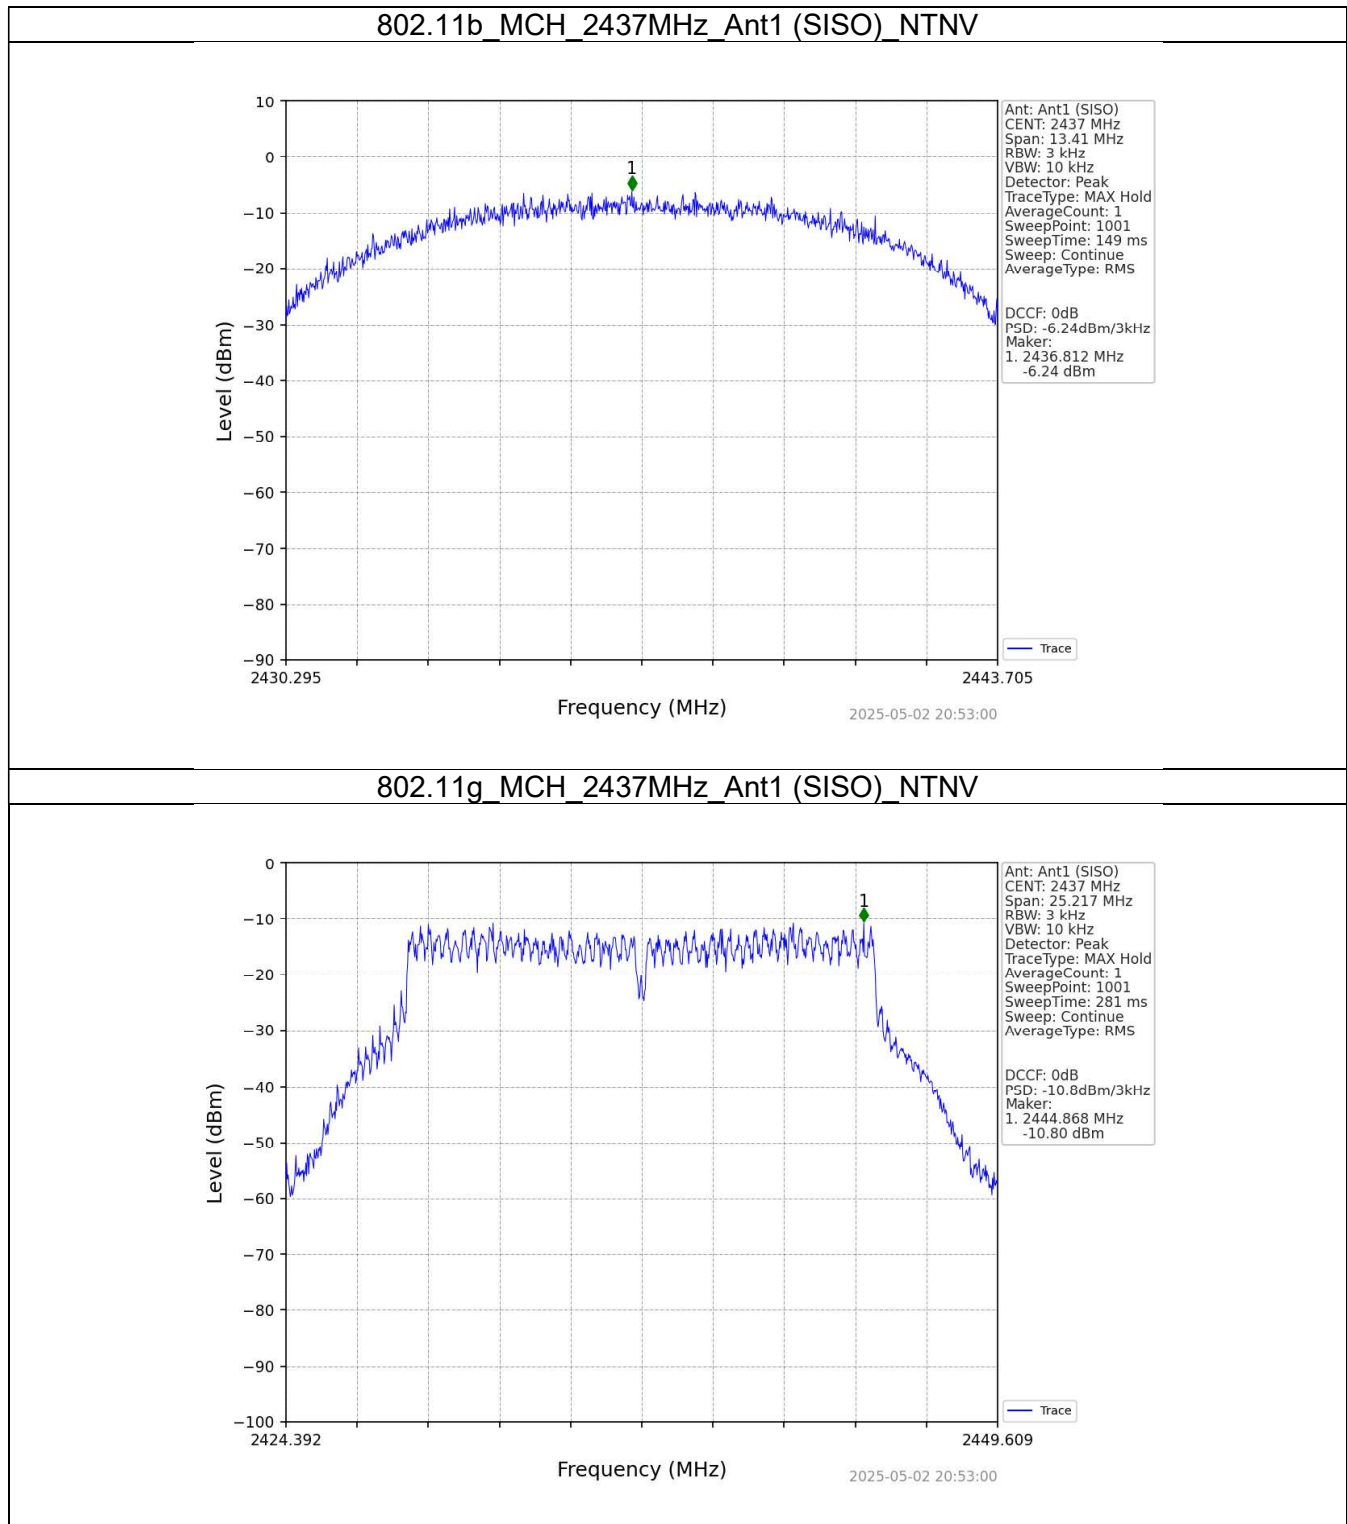

802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

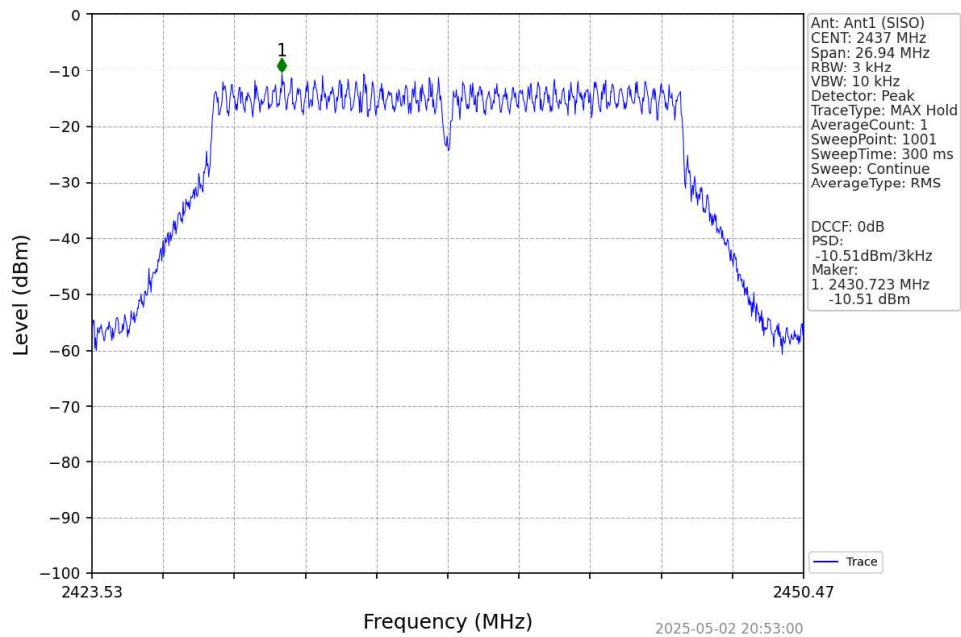

## 6 Conducted Spurious Emissions / Band Edge

### 6.1 Test Result

| Test Description             | Test Specification |              | Test Result |
|------------------------------|--------------------|--------------|-------------|
| Conducted Spurious Emissions | 15.247(d)          | RSS-247 S5.5 | Compliant   |

### 6.2 Test Method

Spurious emissions in non-restricted frequency bands were recorded using the methods defined in ANSI C63.10 clause 11.11 and KDB 558074 D01 15.247 Meas Guidance v05r02.

Lowest, middle, and highest channels were investigated.

Because the maximum conducted peak output power was used to determine compliance with the output power limits, the limit in any 100 kHz band outside of the authorized band is 20 dB below the maximum in-band peak level.

### 6.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.06 °C

Relative Humidity: 53.9 %

Atmospheric Pressure: 98.26 kPa

### 6.4 Test Equipment

Test End Date: 2-May-2025

Tester: SGM

| Equipment                       | Manufacturer             | Model        | Asset Number | Cal Date   | Cal Due Date |
|---------------------------------|--------------------------|--------------|--------------|------------|--------------|
| RF CABLE SMA TO SMA, 0.01-40GHZ | TELEDYNE STORM MICROWAVE | 084-0505-059 | 20108        | 3-Apr-2025 | 3-Apr-2026   |
| SIGNAL ANALYZER (TS8997)        | ROHDE & SCHWARZ          | FSV30        | B085749      | 4-Mar-2025 | 4-Mar-2026   |
| TSTPASS SWITCHBOX               | TSTPASS                  | SB2          | 23009        | 4-Apr-2025 | 4-Apr-2026   |

## 6.5 Test Data – DTS Band Edge

Reference:

| Mode           | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) |
|----------------|---------|-----------------|-----|--------------------------|
| 802.11b        | SISO    | 2412            | 1   | 4.62                     |
|                |         |                 | 2   | 5.41                     |
|                |         | 2437            | 1   | 8.71                     |
|                |         |                 | 2   | 10.64                    |
|                |         | 2462            | 1   | 4.29                     |
|                |         |                 | 2   | 5.60                     |
| 802.11g        | SISO    | 2412            | 1   | 0.46                     |
|                |         |                 | 2   | 1.50                     |
|                |         | 2437            | 1   | 4.09                     |
|                |         |                 | 2   | 4.32                     |
|                |         | 2462            | 1   | 1.19                     |
|                |         |                 | 2   | 1.88                     |
| 802.11n (HT20) | SISO    | 2412            | 1   | -1.02                    |
|                |         |                 | 2   | 0.04                     |
|                |         | 2437            | 1   | 3.36                     |
|                |         |                 | 2   | 4.43                     |
|                |         | 2462            | 1   | -0.57                    |
|                |         |                 | 2   | -0.09                    |


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

## CSE


| Mode           | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) | Limit (dBm) | Verdict |
|----------------|---------|-----------------|-----|--------------------------|-------------|---------|
| 802.11b        | SISO    | 2412            | 1   | 8.71                     | -11.29      | Pass    |
|                |         |                 | 2   | 10.64                    | -9.36       | Pass    |
|                |         | 2437            | 1   | 8.71                     | -11.29      | Pass    |
|                |         |                 | 2   | 10.64                    | -9.36       | Pass    |
|                |         | 2462            | 1   | 8.71                     | -11.29      | Pass    |
|                |         |                 | 2   | 10.64                    | -9.36       | Pass    |
| 802.11g        | SISO    | 2412            | 1   | 4.09                     | -15.91      | Pass    |
|                |         |                 | 2   | 4.32                     | -15.68      | Pass    |
|                |         | 2437            | 1   | 4.09                     | -15.91      | Pass    |
|                |         |                 | 2   | 4.32                     | -15.68      | Pass    |
|                |         | 2462            | 1   | 4.09                     | -15.91      | Pass    |
|                |         |                 | 2   | 4.32                     | -15.68      | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 1   | 3.36                     | -16.64      | Pass    |
|                |         |                 | 2   | 4.43                     | -15.57      | Pass    |
|                |         | 2437            | 1   | 3.36                     | -16.64      | Pass    |
|                |         |                 | 2   | 4.43                     | -15.57      | Pass    |
|                |         | 2462            | 1   | 3.36                     | -16.64      | Pass    |
|                |         |                 | 2   | 4.43                     | -15.57      | Pass    |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


## 802.11b\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

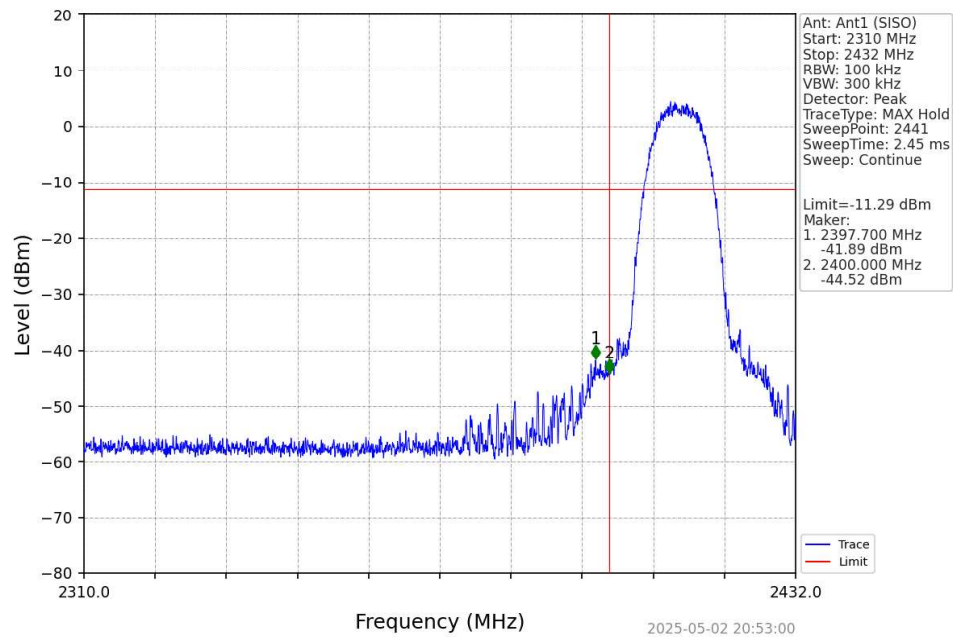


## 802.11b\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

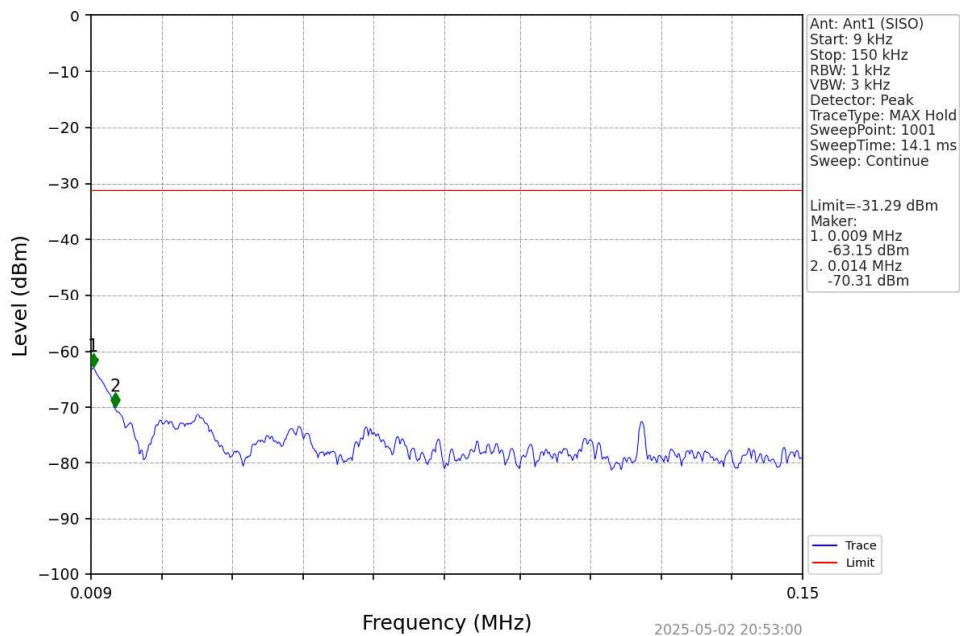


## 802.11b\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

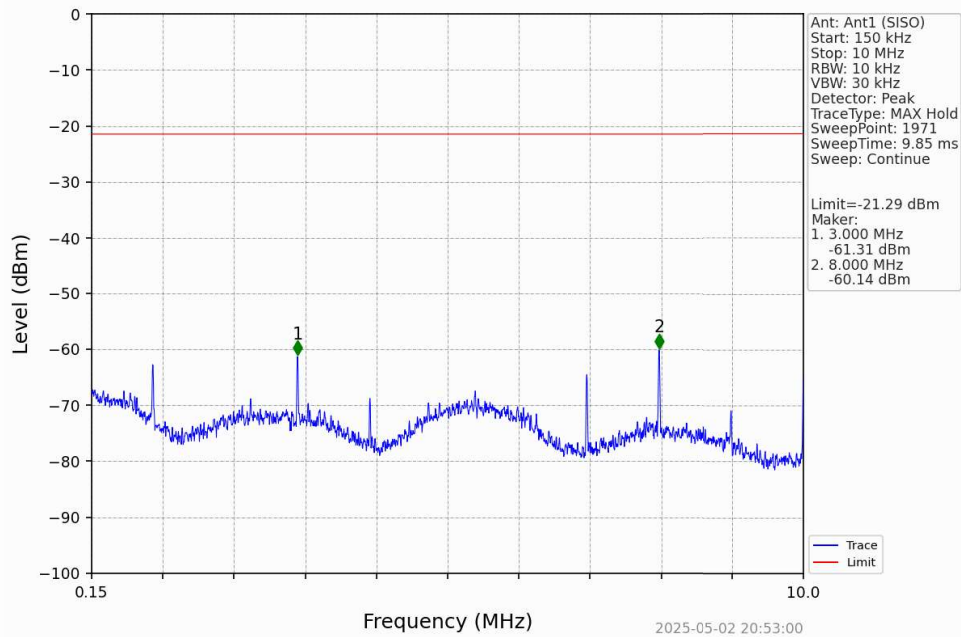


## 802.11b\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

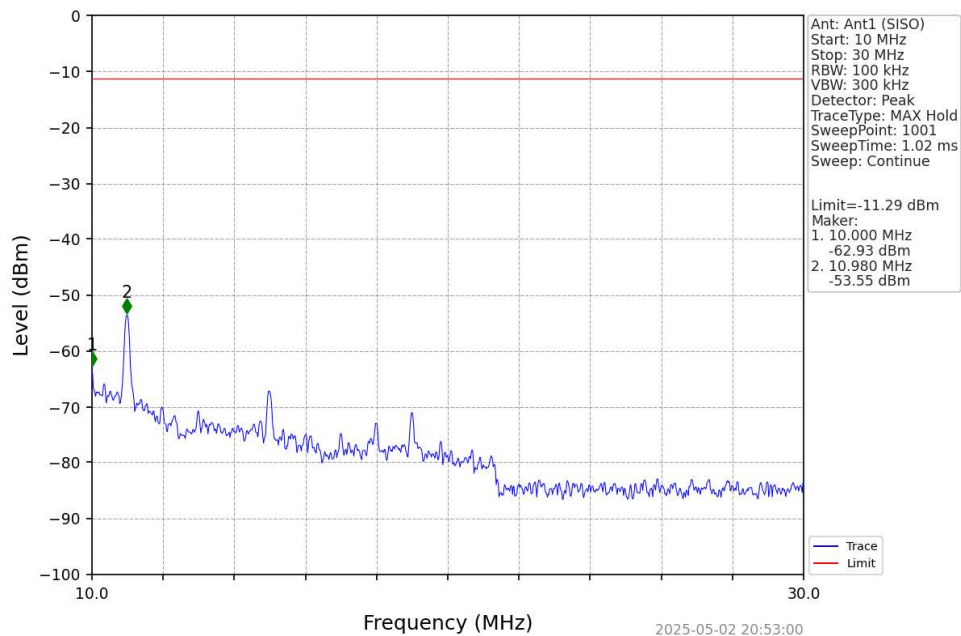


## 802.11b\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

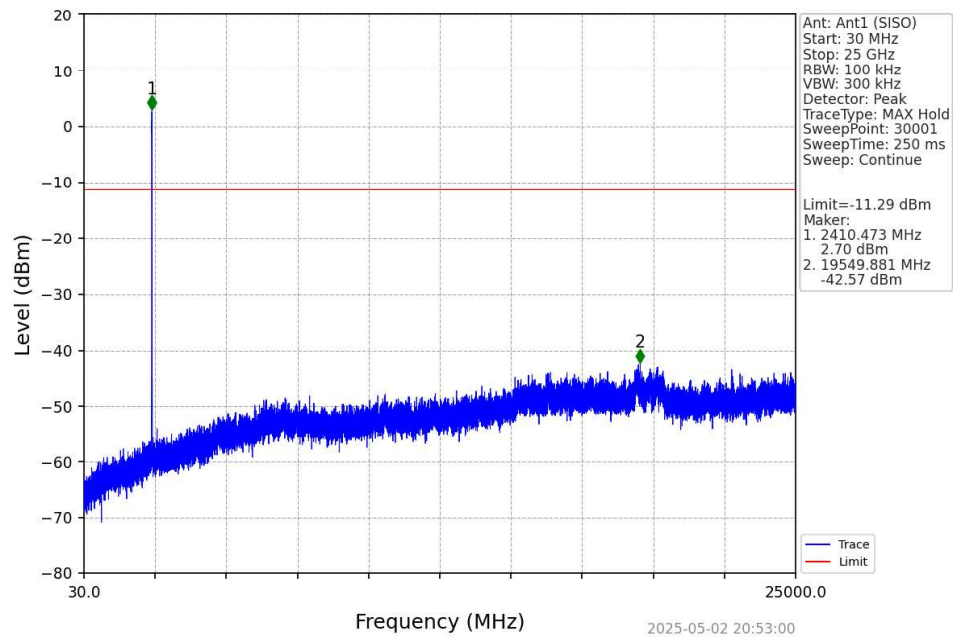


## 802.11b\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

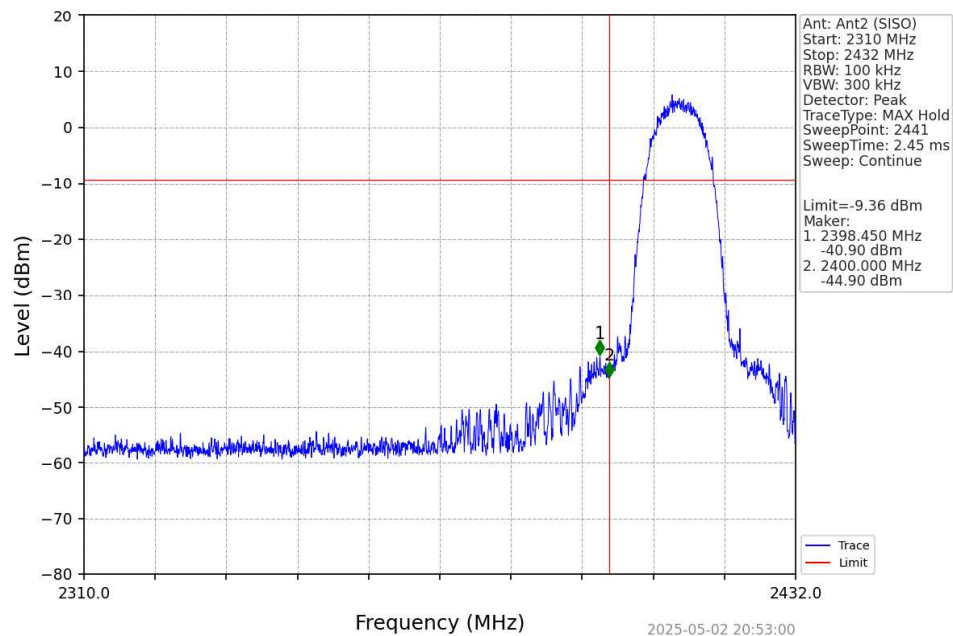


## 802.11b\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

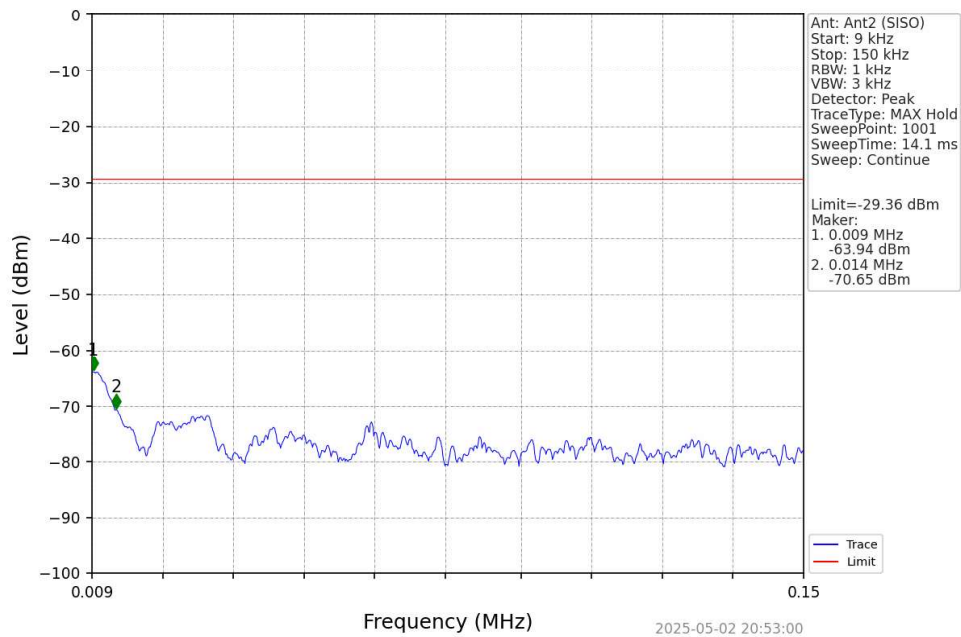


## 802.11b\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

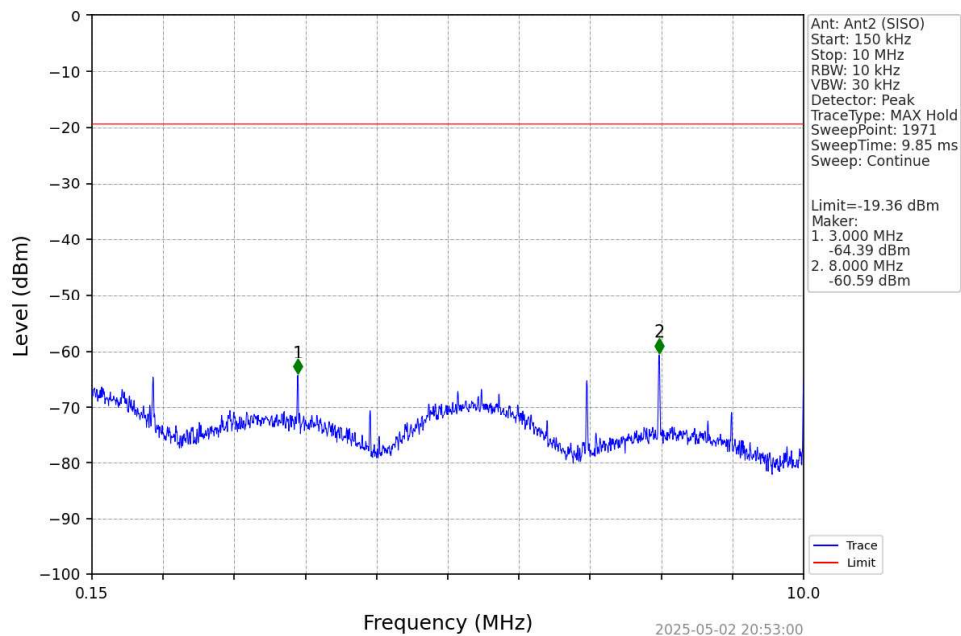


## 802.11b\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

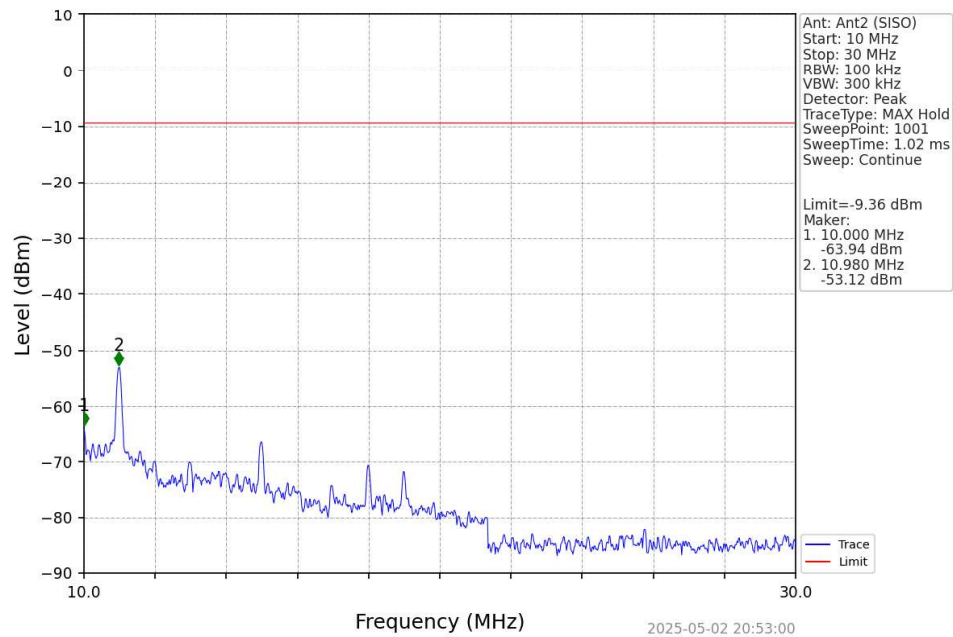


## 802.11b\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

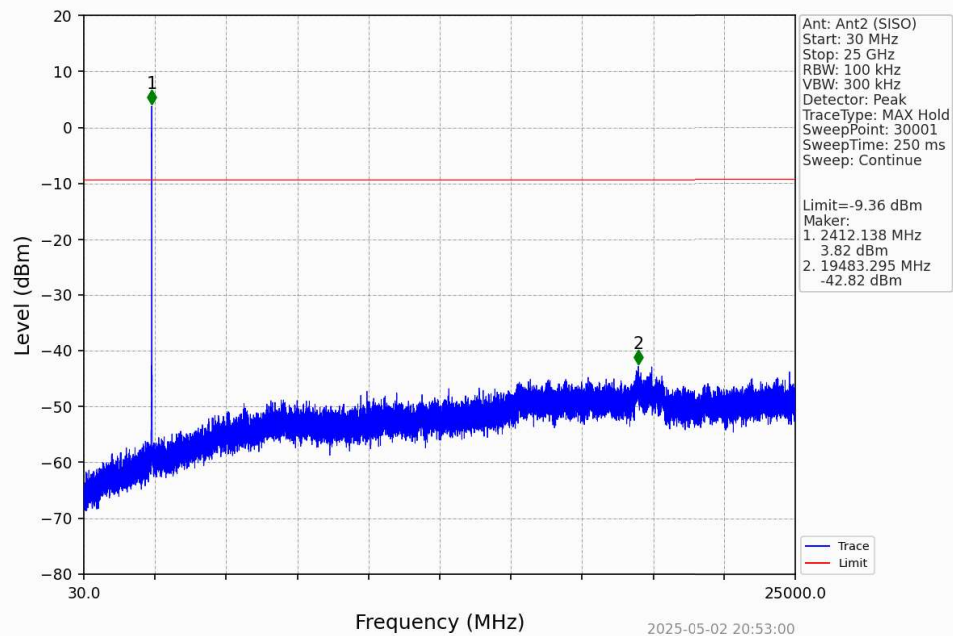


## 802.11b\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

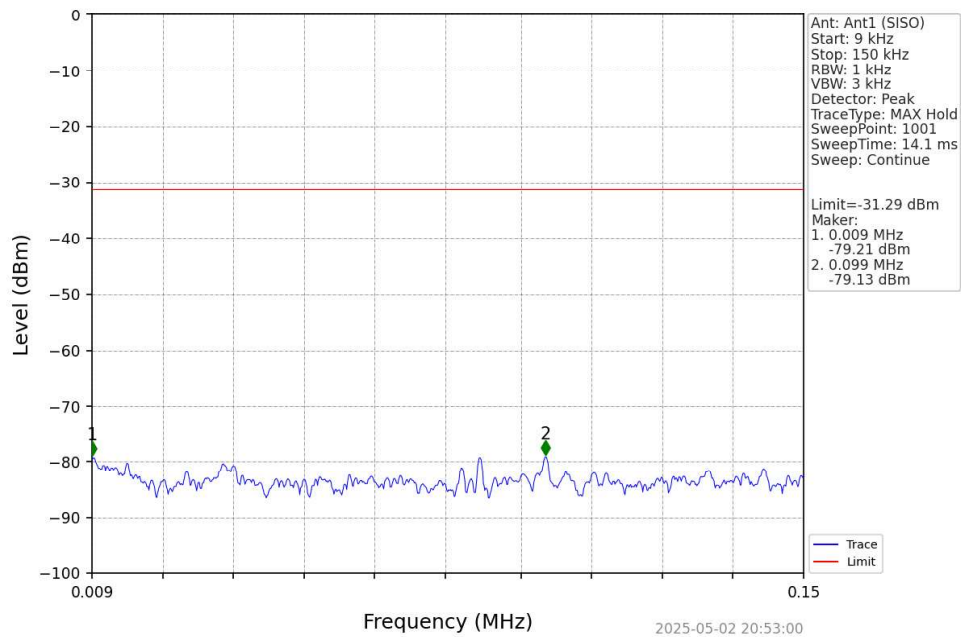


## 802.11b\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

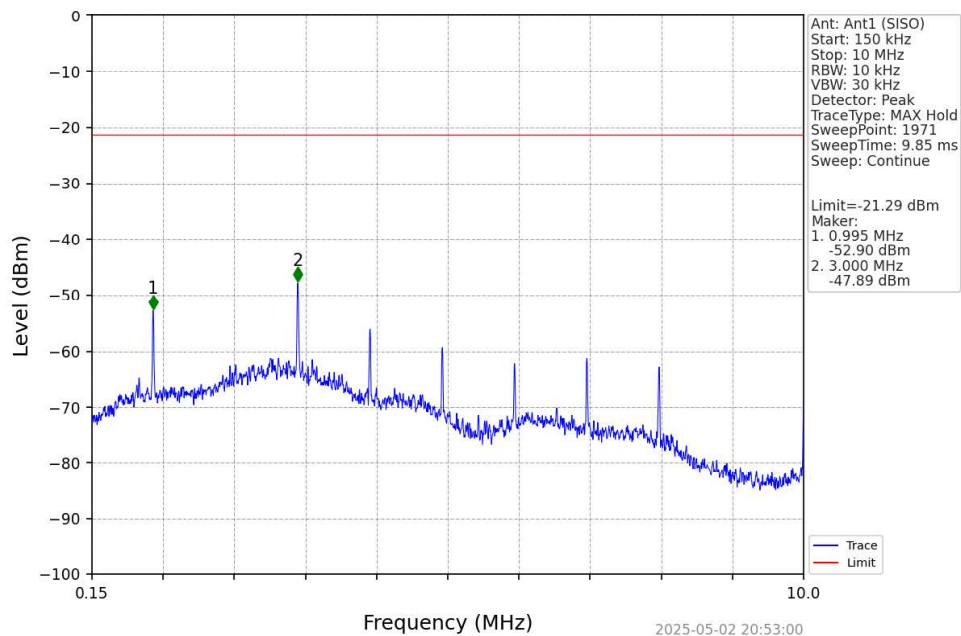


## 802.11b\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

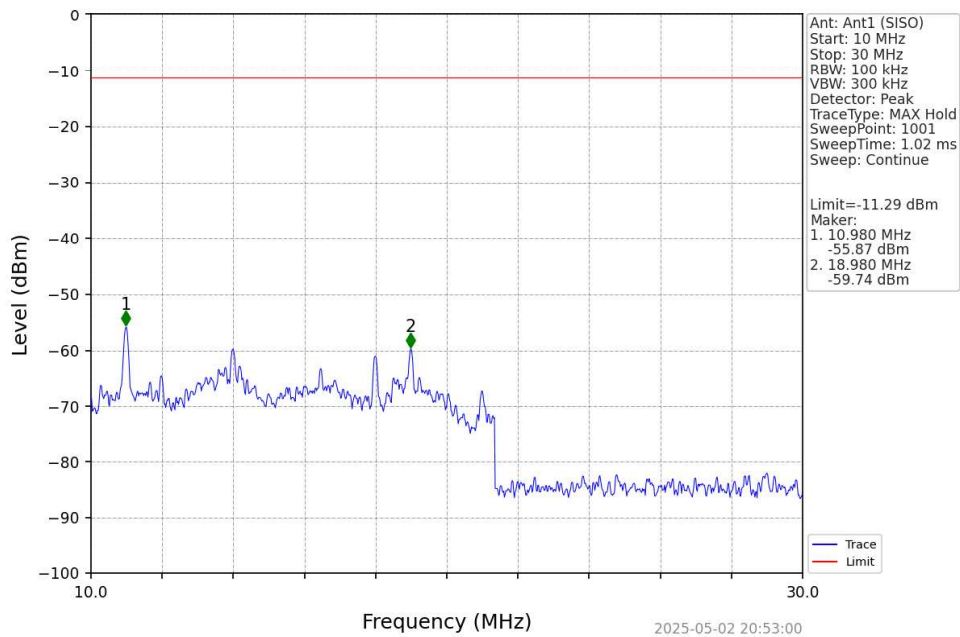


## 802.11b\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

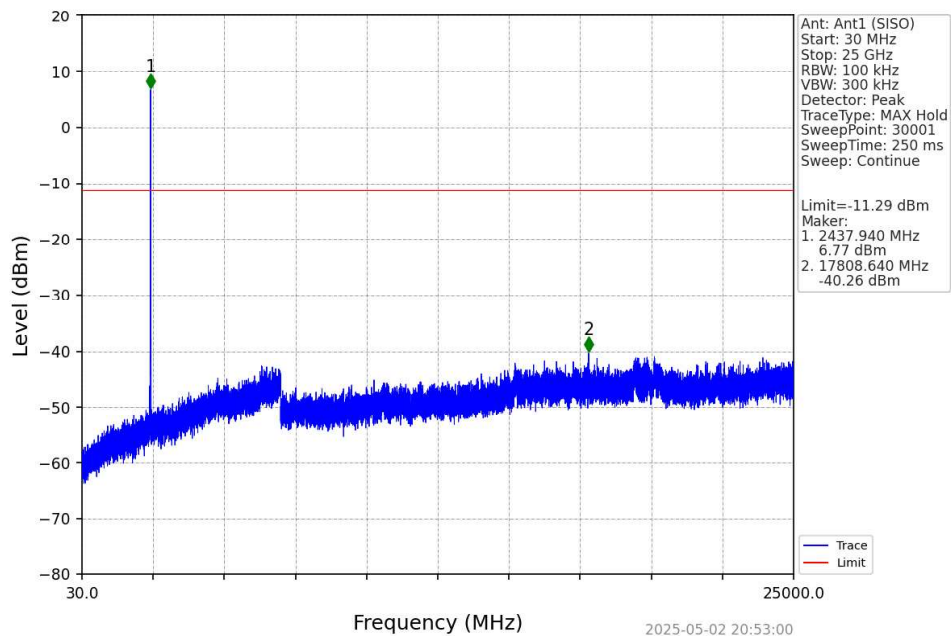


## 802.11b\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

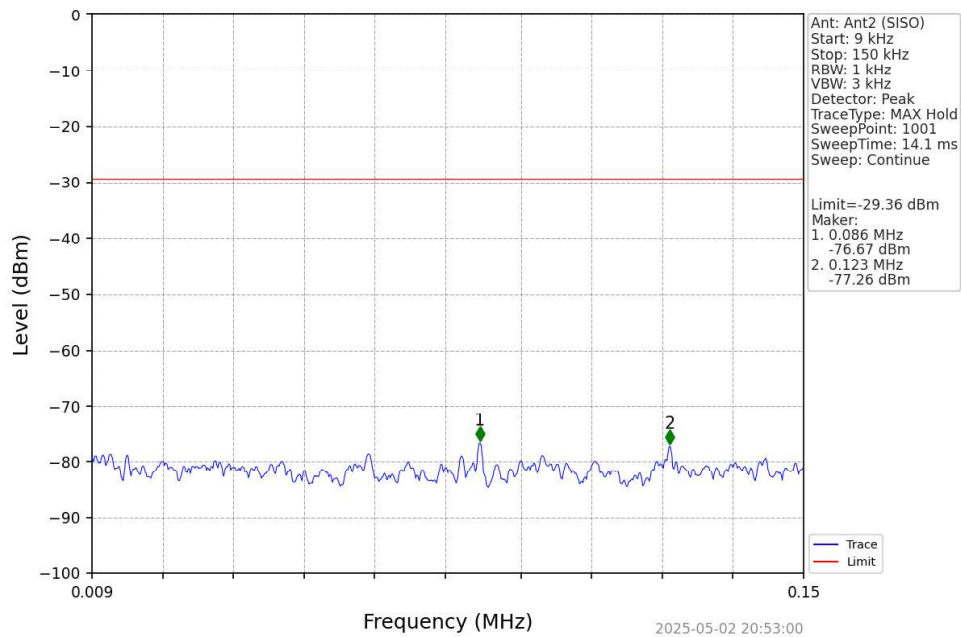


## 802.11b\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

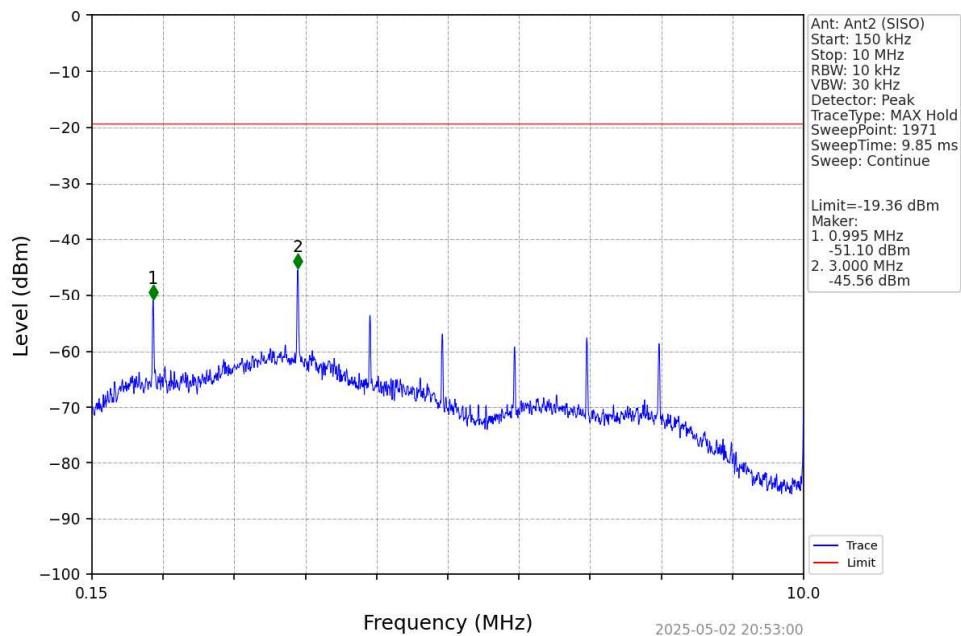


## 802.11b\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

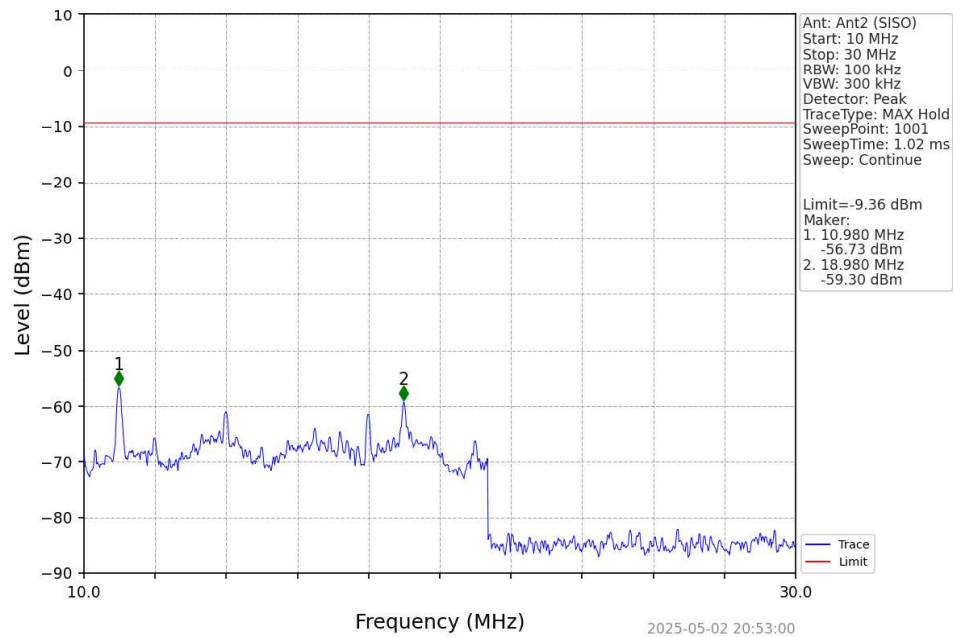


## 802.11b\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

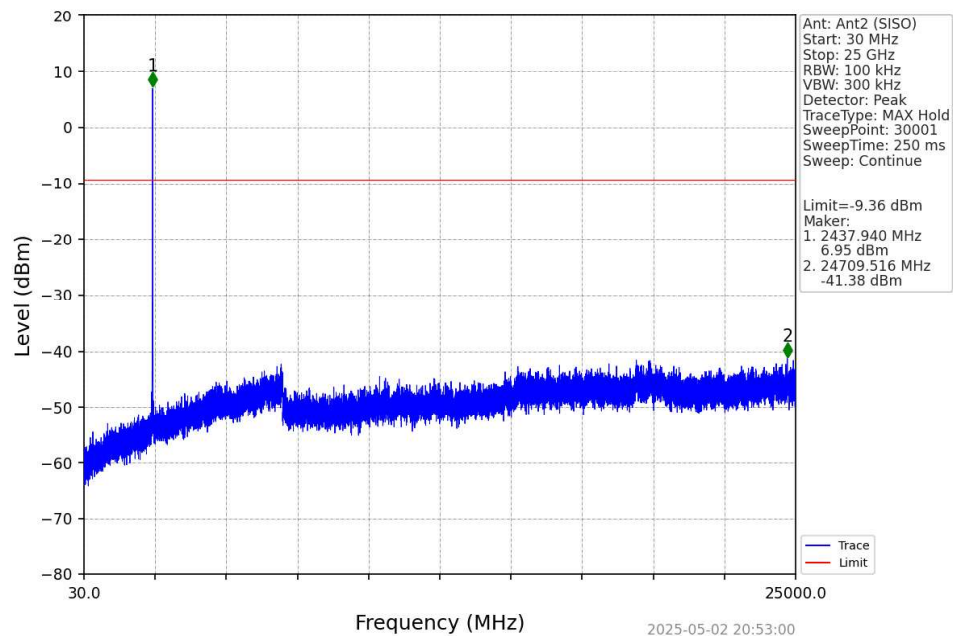


## 802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

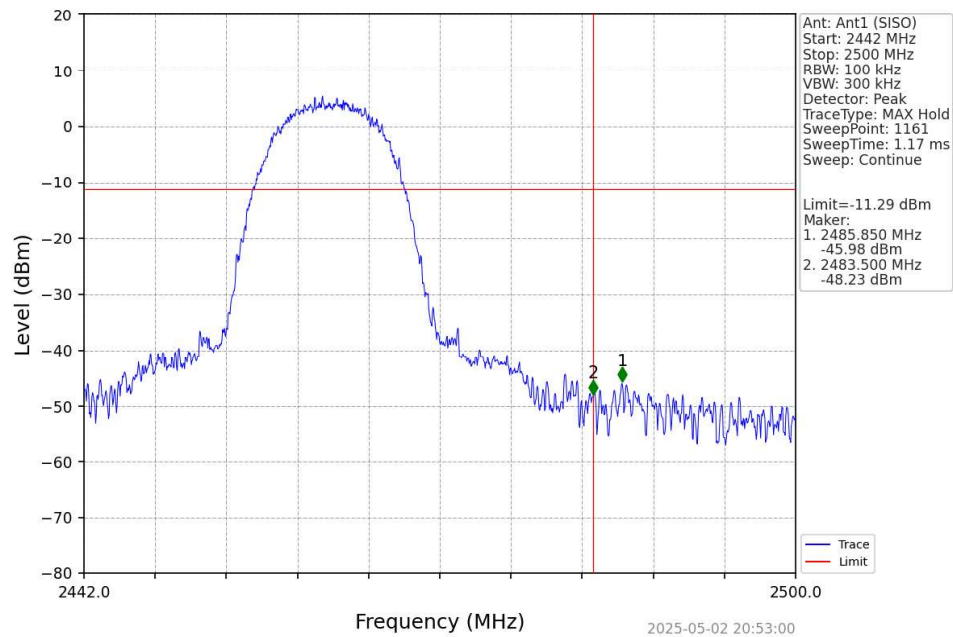


## 802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

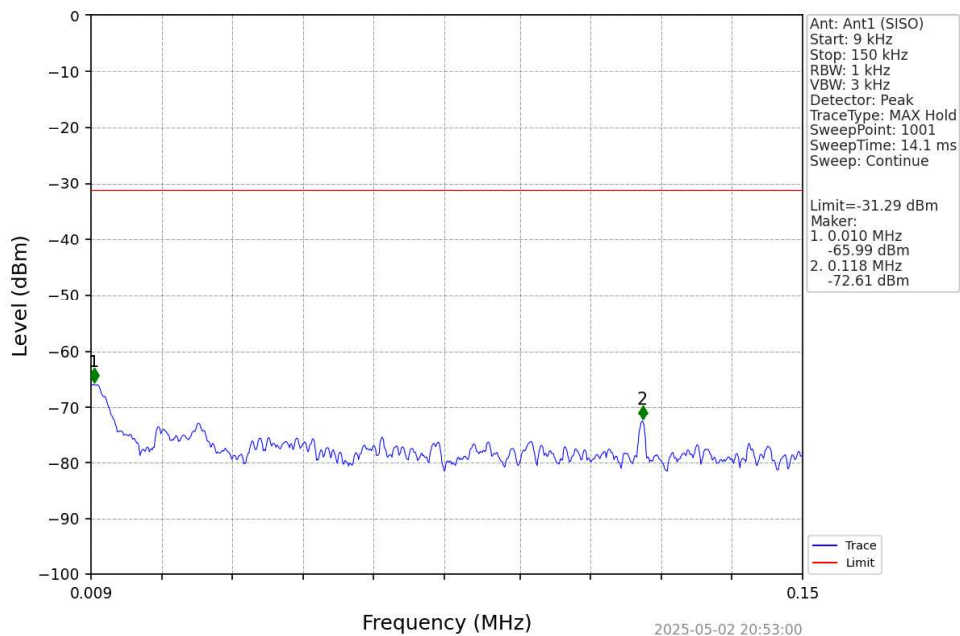


## 802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

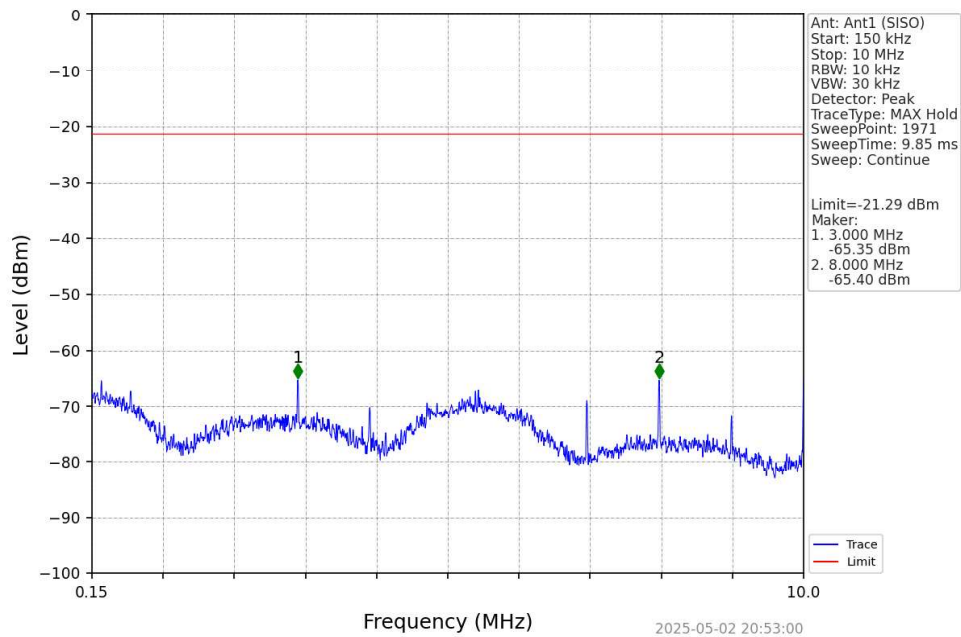


## 802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

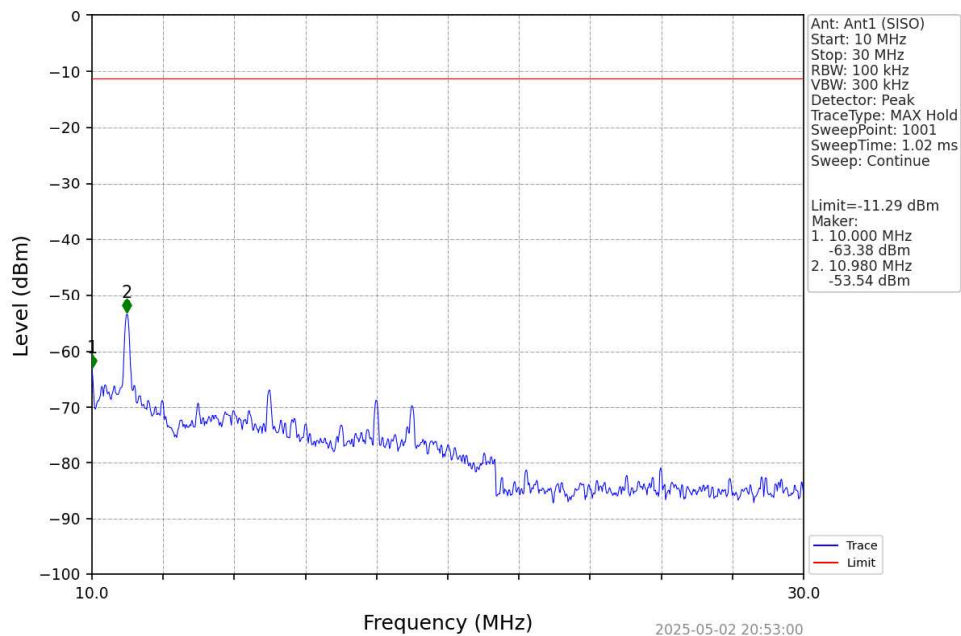


## 802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

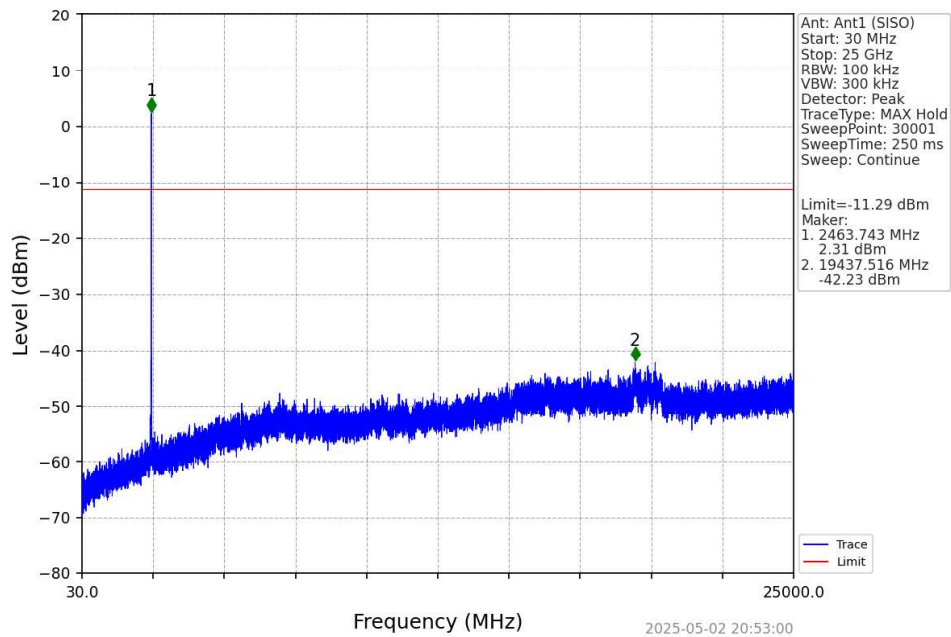


## 802.11b\_HCH\_2462MHz\_Ant2 (SISO)\_NTNV

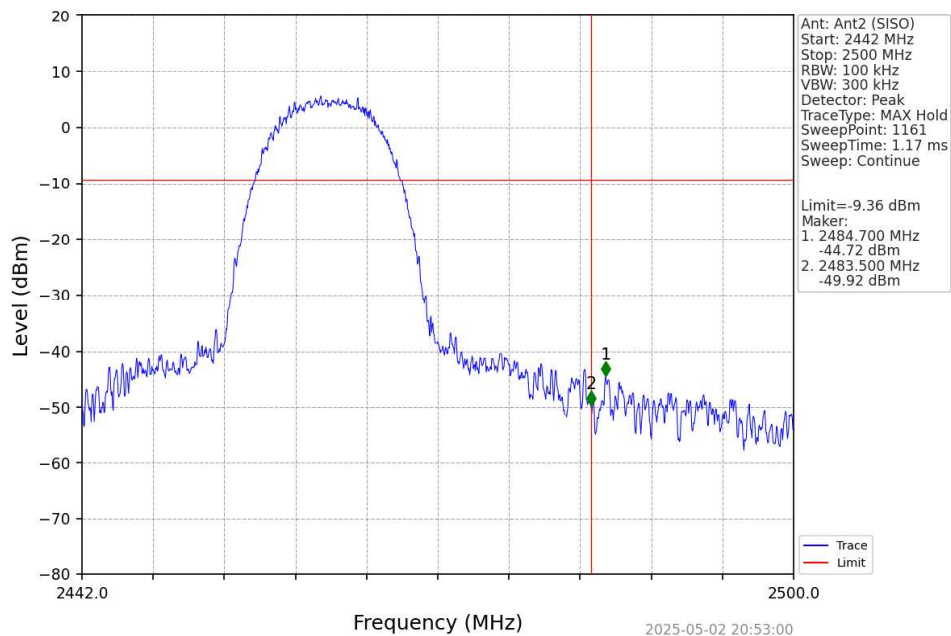


## 802.11b\_HCH\_2462MHz\_Ant2 (SISO)\_NTNV

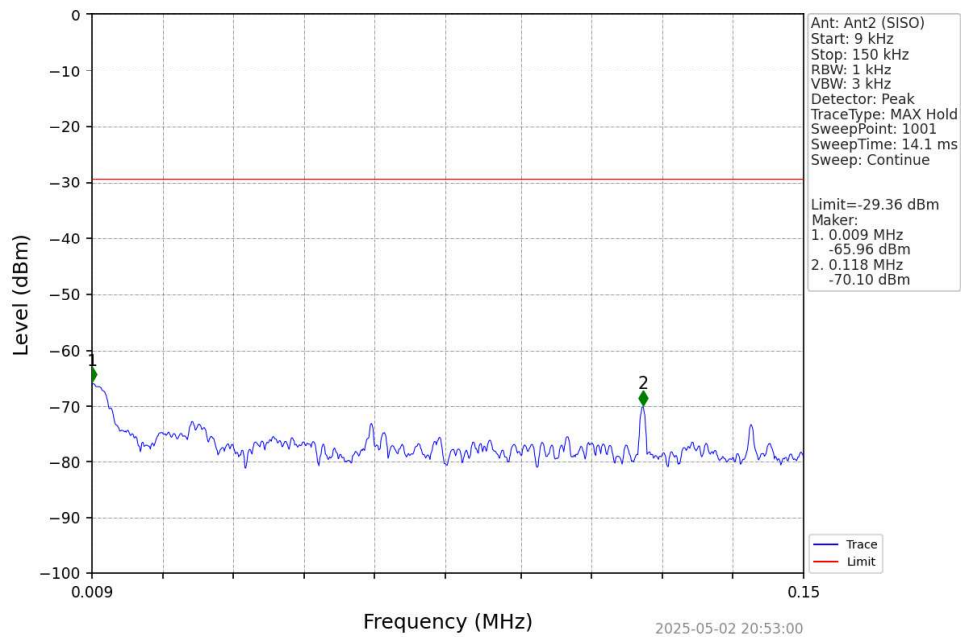


## 802.11b\_HCH\_2462MHz\_Ant2 (SISO)\_NTNV

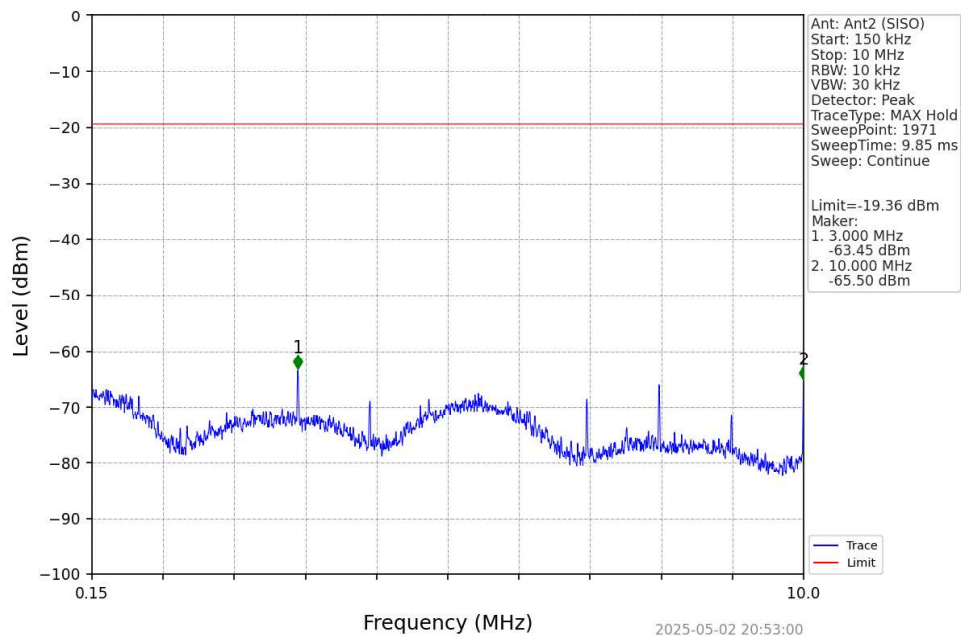


## 802.11b\_HCH\_2462MHz\_Ant2 (SISO)\_NTNV

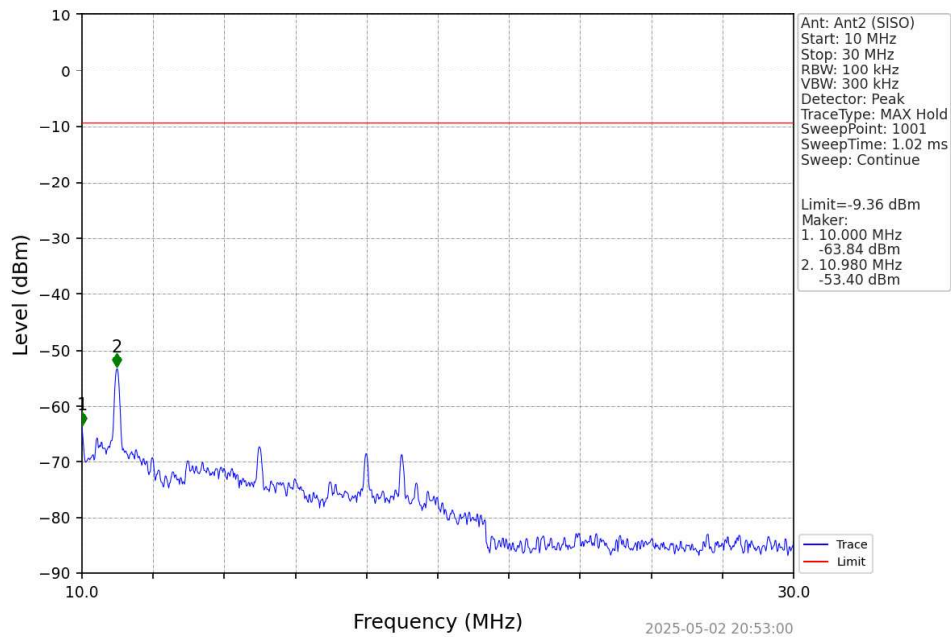


## 802.11b\_HCH\_2462MHz\_Ant2 (SISO)\_NTNV

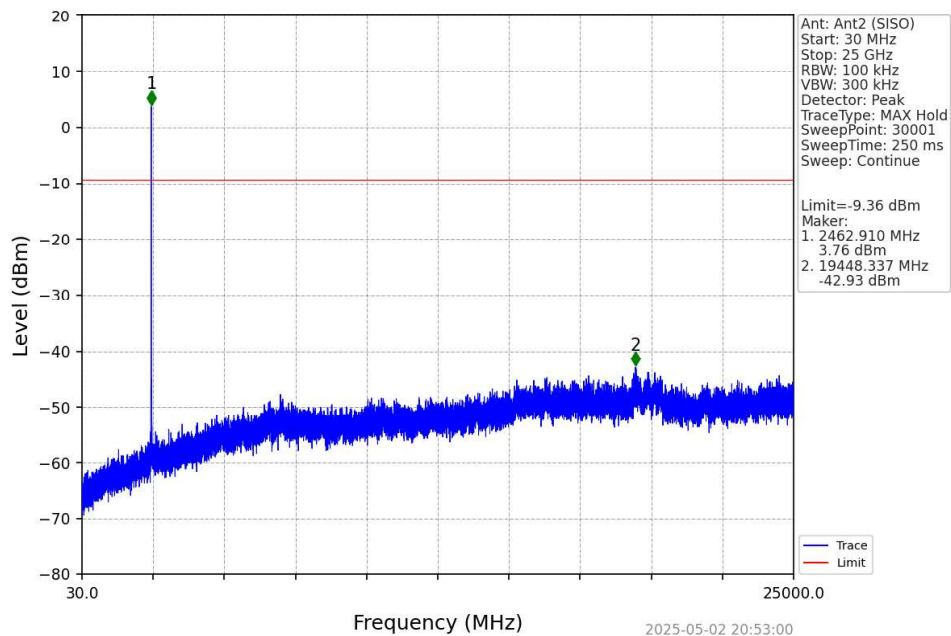


## 802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

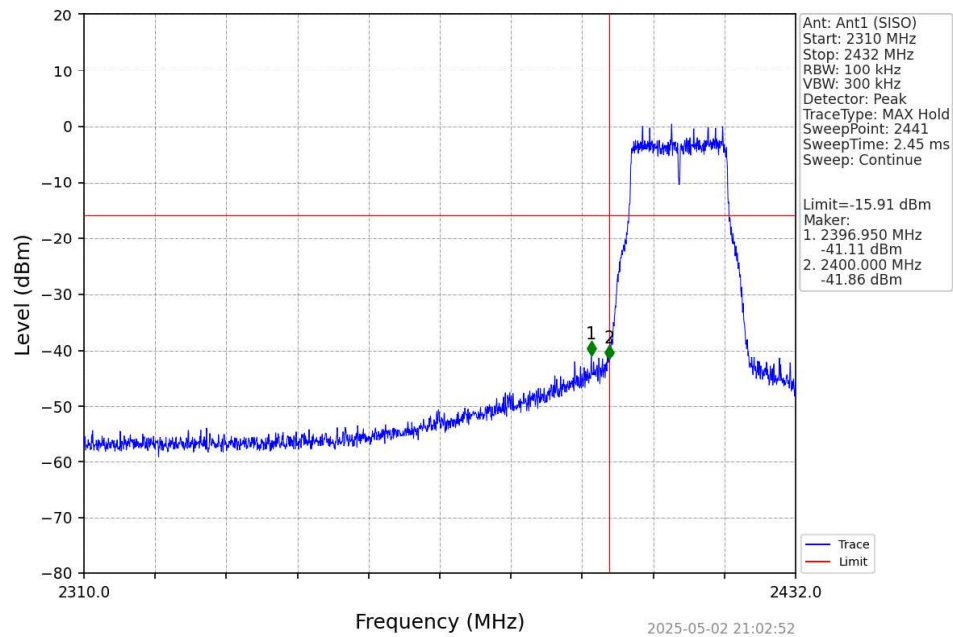


## 802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

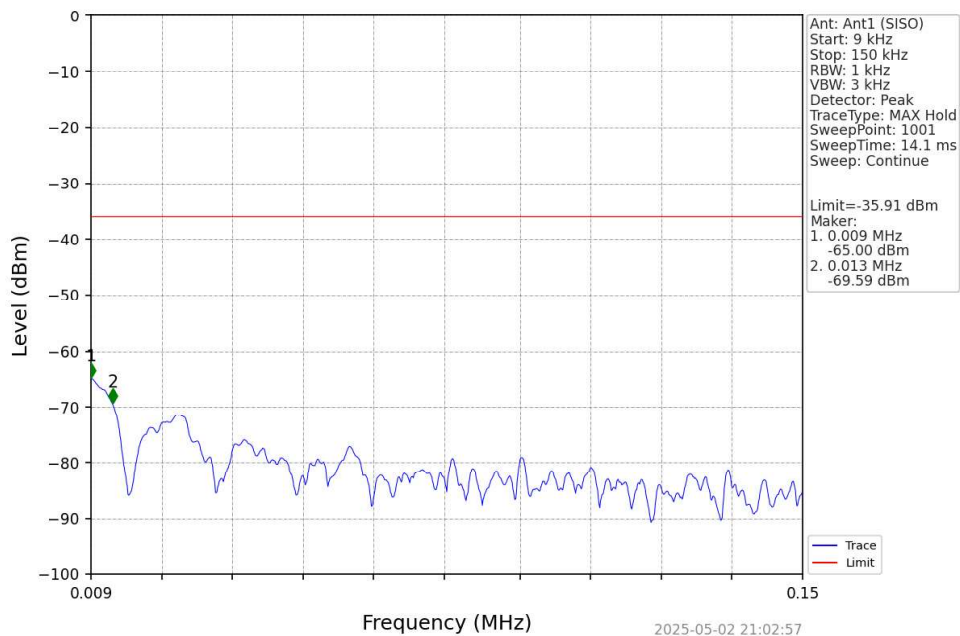


## 802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

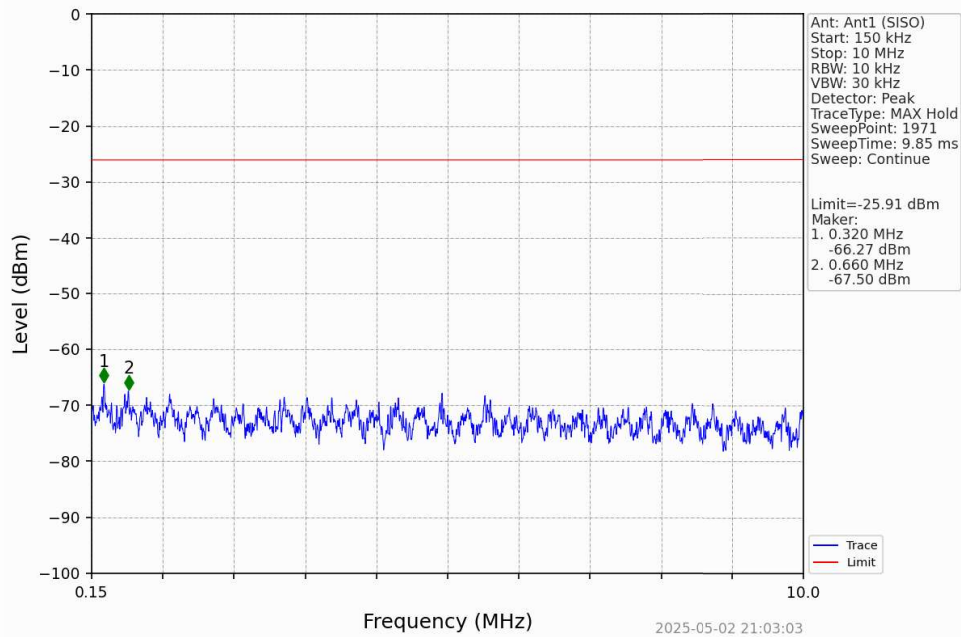


## 802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

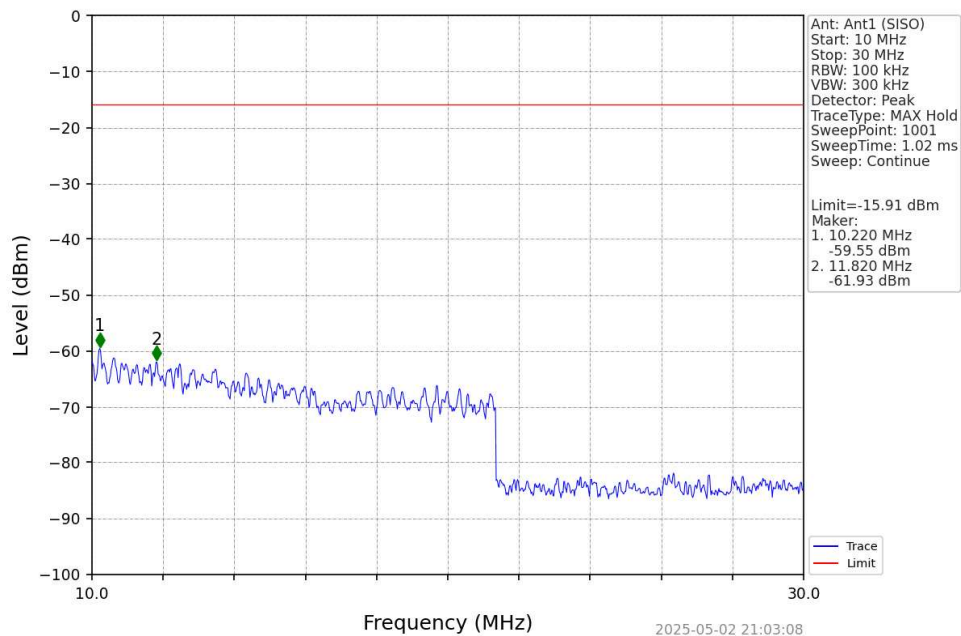


## 802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

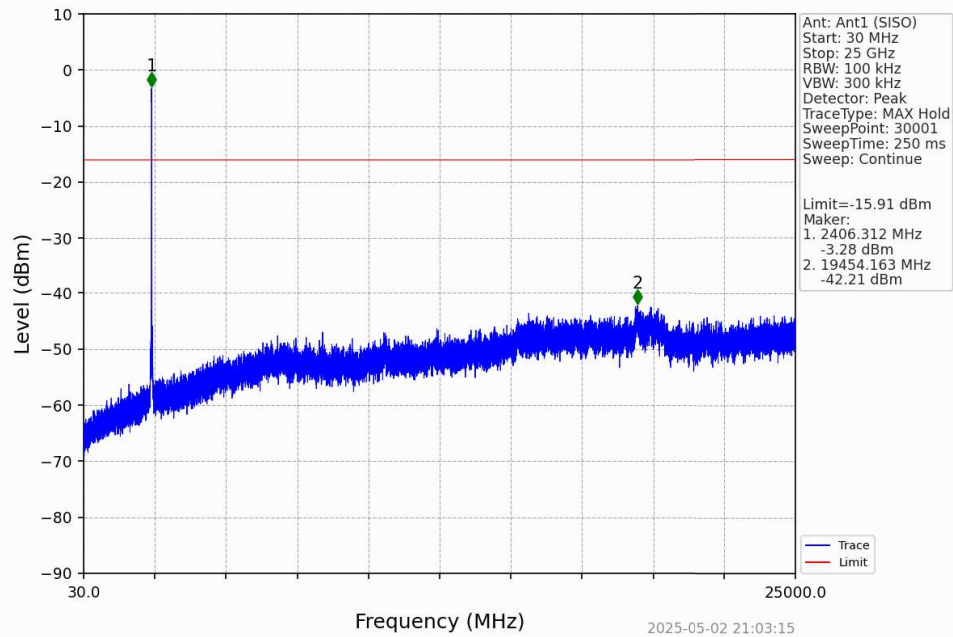


## 802.11g\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

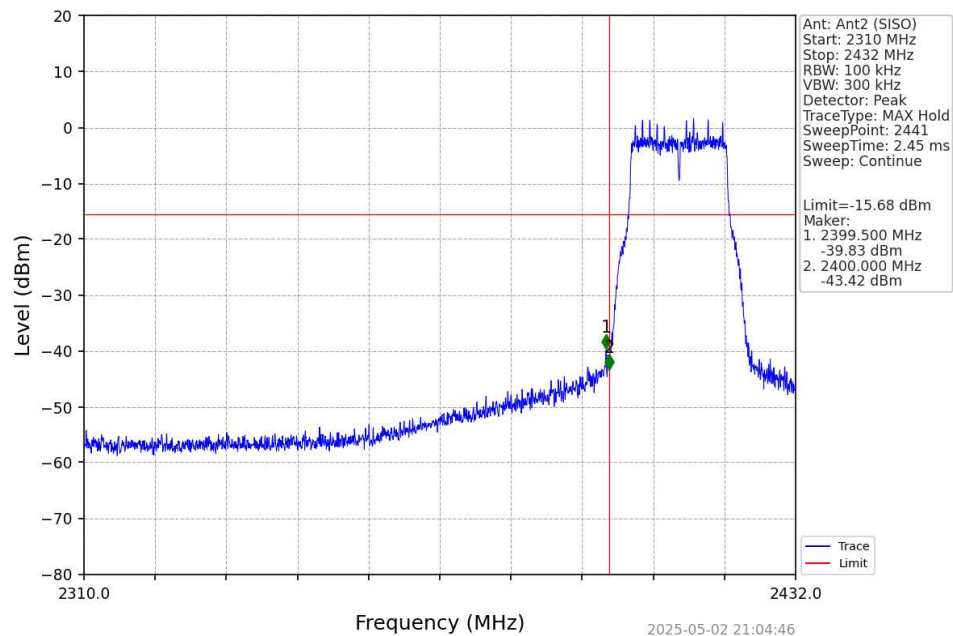


## 802.11g\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

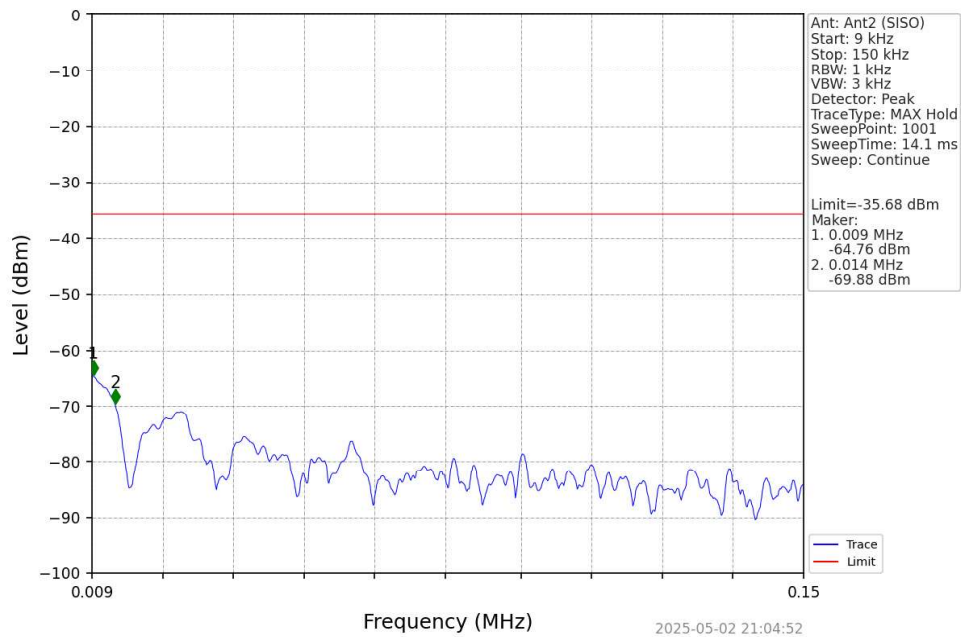


## 802.11g\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

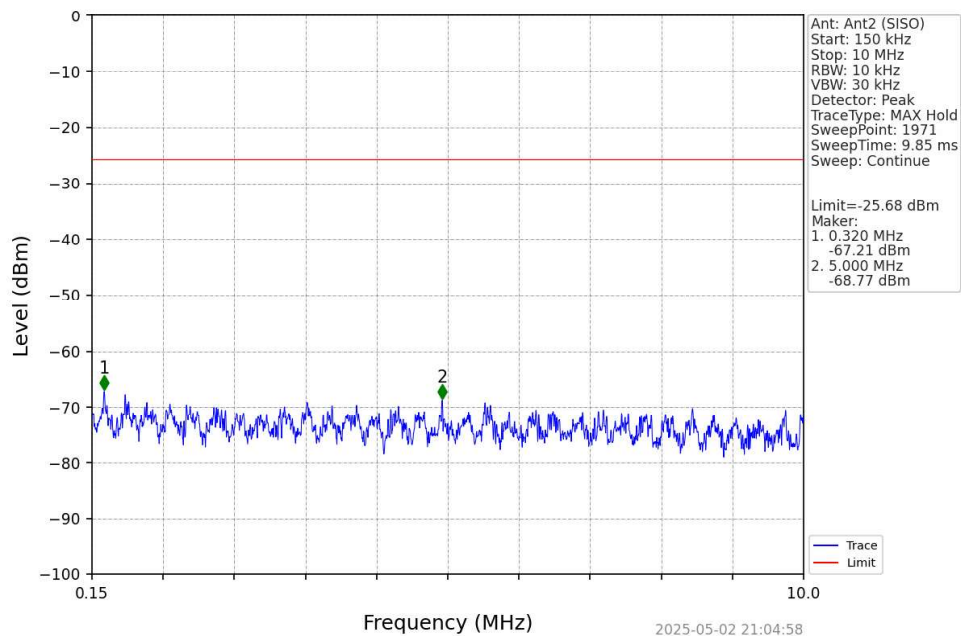


## 802.11g\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

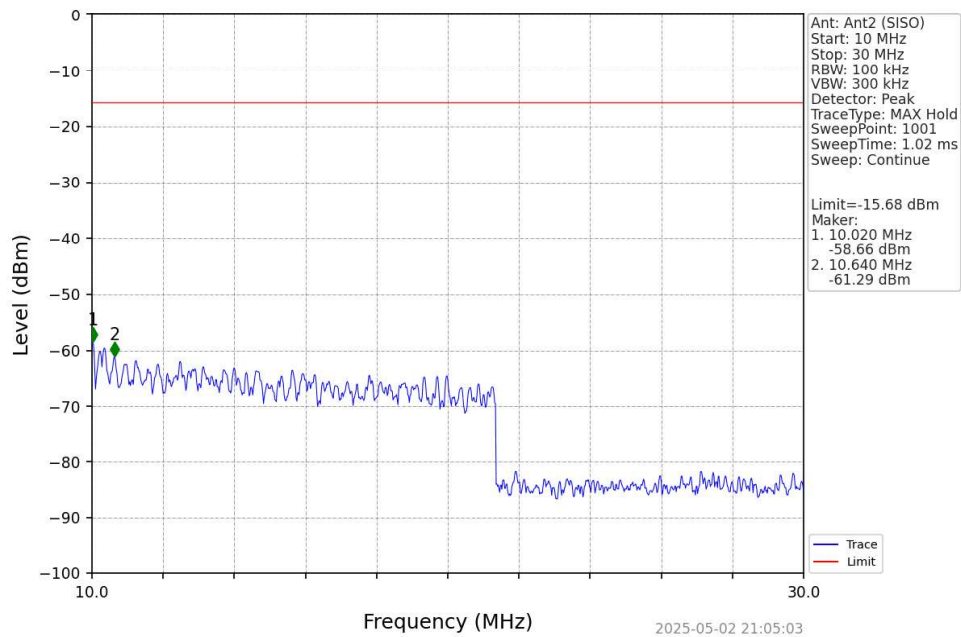


## 802.11g\_LCH\_2412MHz\_Ant2 (SISO)\_NTNV

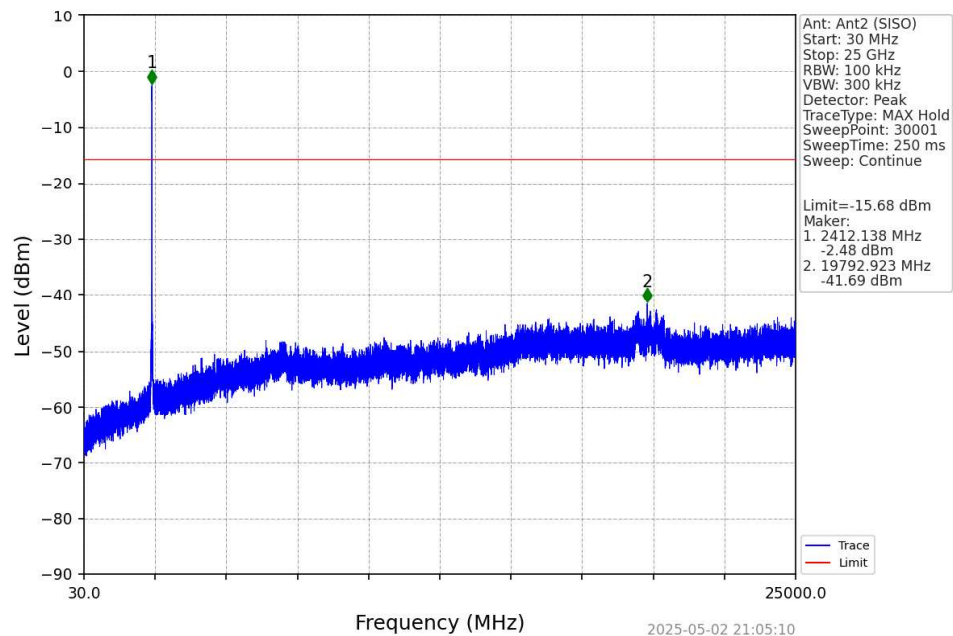


## 802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

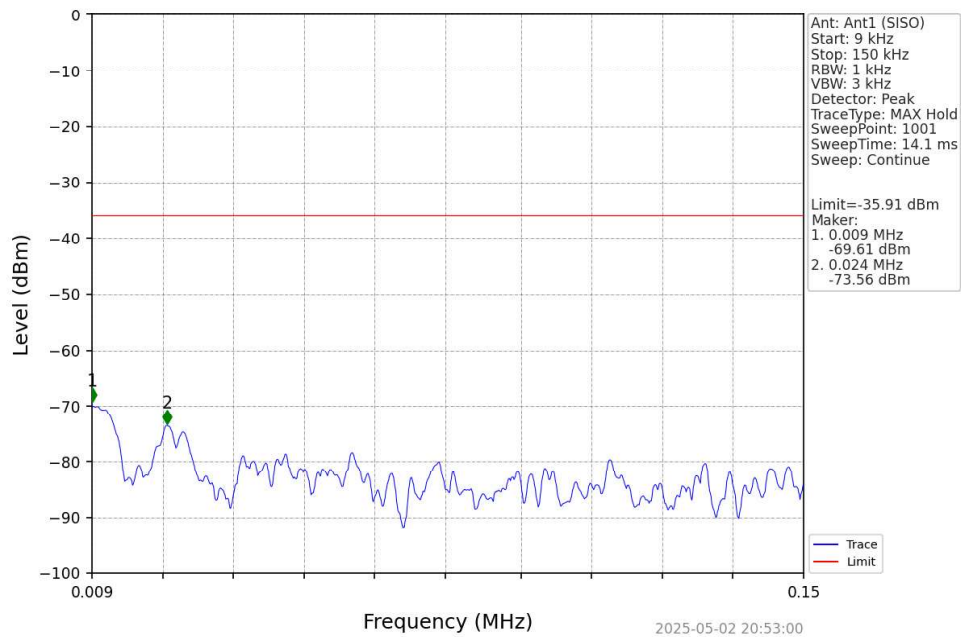


## 802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

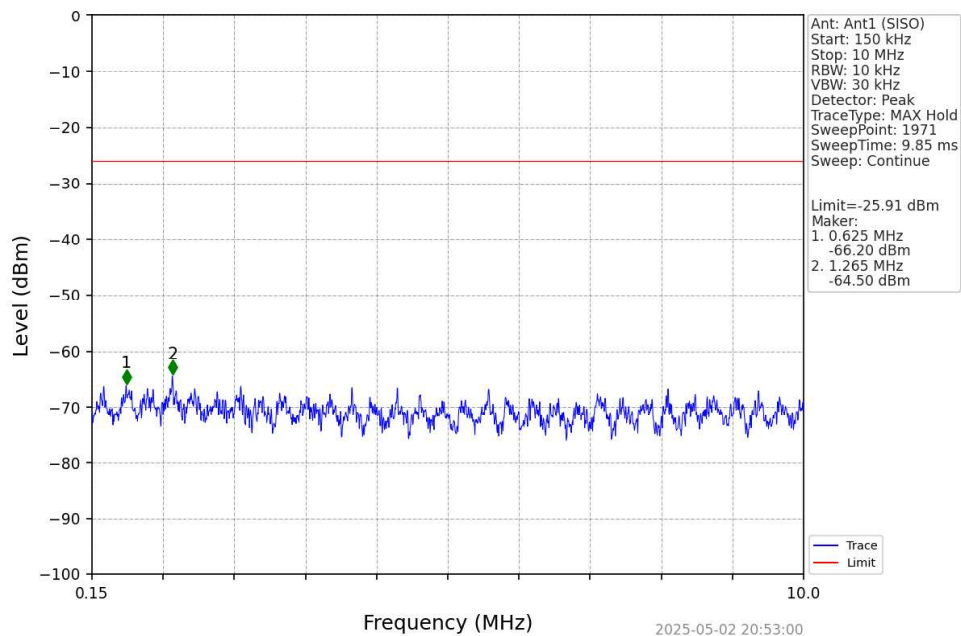


## 802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

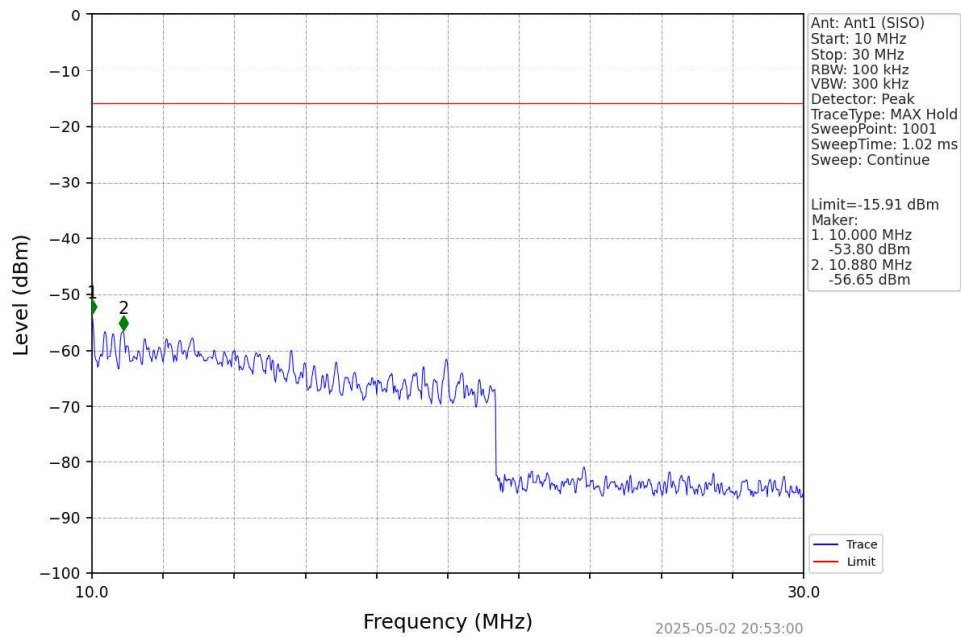


## 802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

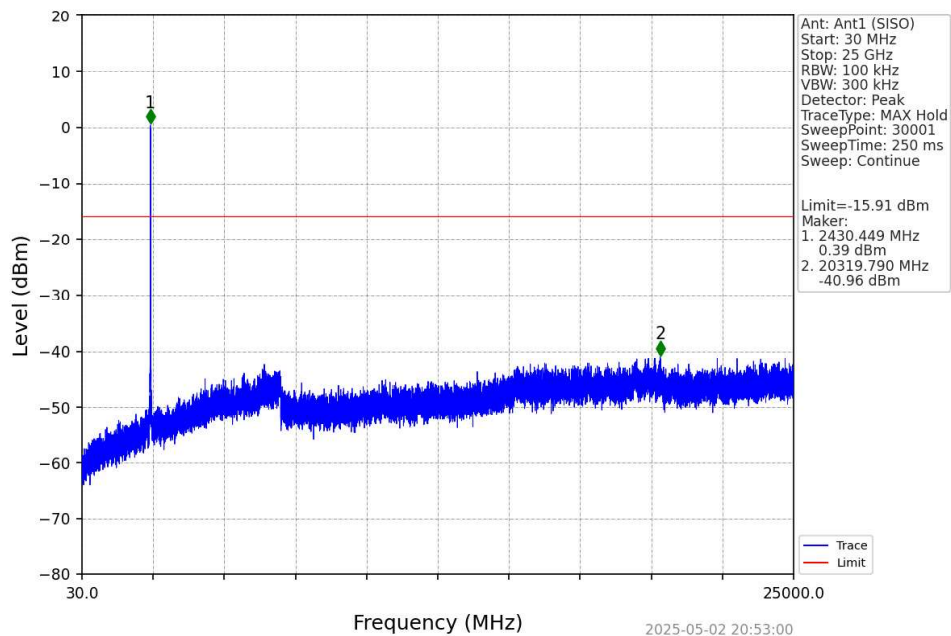


## 802.11g\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

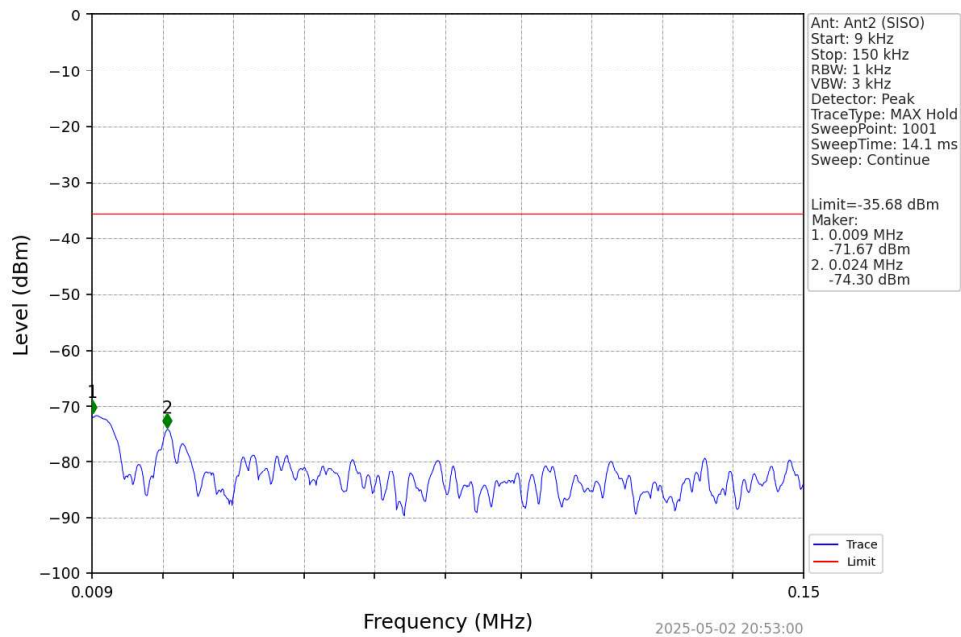


## 802.11g\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

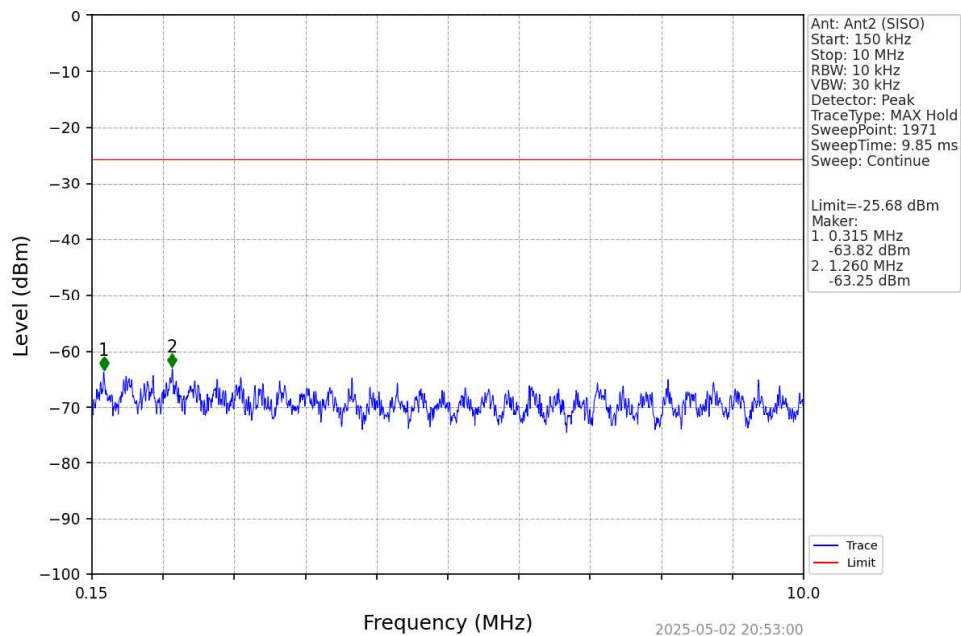


## 802.11g\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

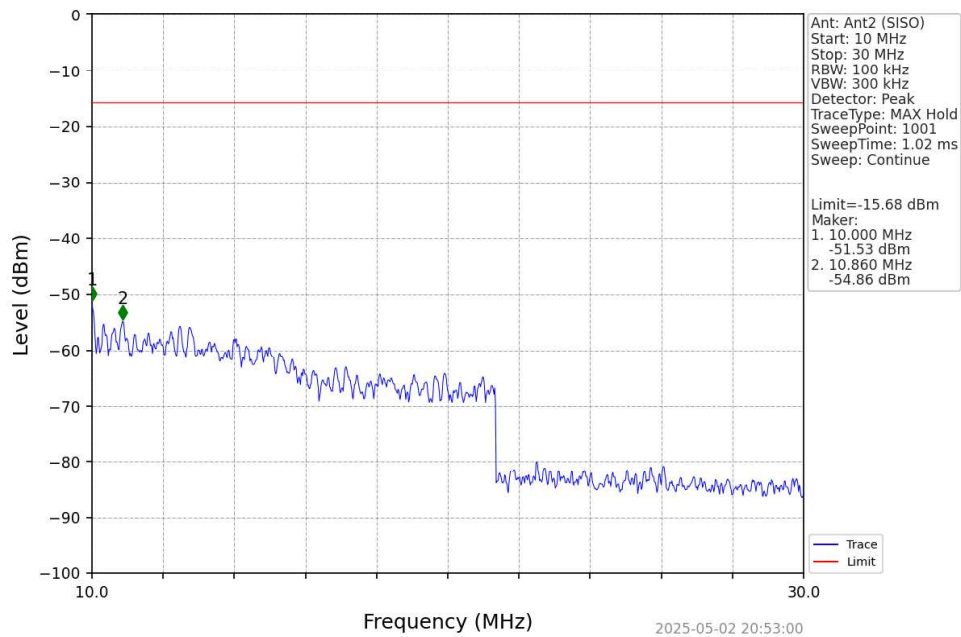

## 802.11g\_MCH\_2437MHz\_Ant2 (SISO)\_NTNV

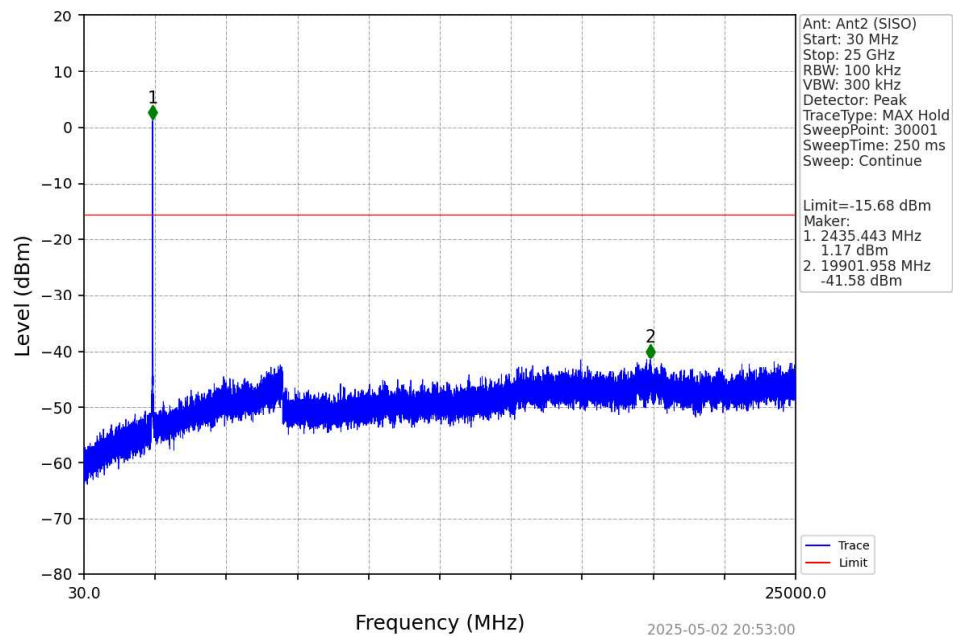

## 802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

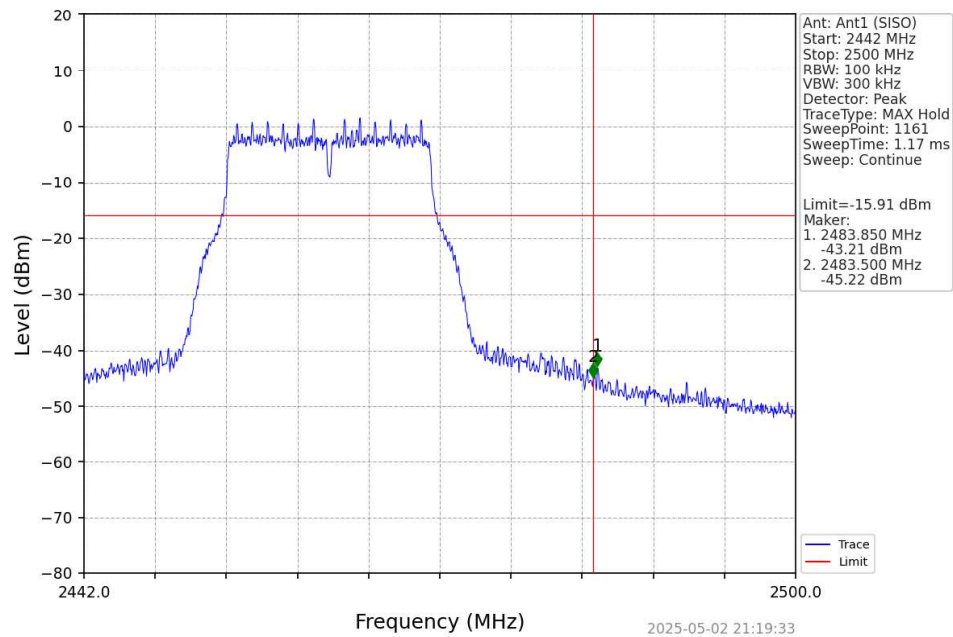

## 802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

