


ALA25F-020AA2-00

Features

- LoRa indoor embedded Omni-directional antenna
- High efficiency and quick integration with MHF compatible connector mounting
- Available in customized cable lengths and connectors

Applications

- Camera




Azimuth

Electrical Specification

Category	Specification
Frequency (MHz)	865 – 928
Peak Gain (dBi)	-1.7
VSWR	2.0 : 1
Polarization	Linear
Power (Watts)	1
Impedance (Ohms)	50
Type	Monopole

Mechanical Specification

Category	Specification
Dimension (mm)	32.7 x 13
Thickness (mm)	1.29
Weight (g)	0.64
Connector	IPEX
Cable	Low Loss RF-1.13
Cable Length (mm)	90
Material	FPCB
Operating Temp (°C)	-40°C ~ +85°C
Storage Temp (°C)	25 ± 5 °C
Storage Humidity (%)	30 ~ 70%

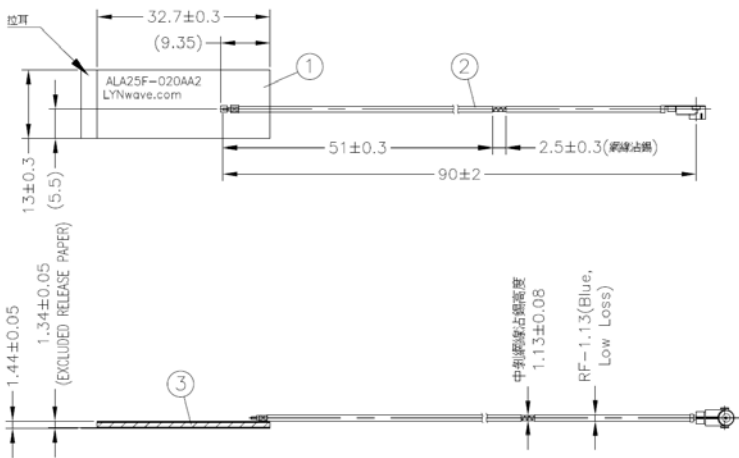

LYNwave Technology Ltd.
3F-6, No.327, Xuecheng Rd., Sanxia Dist.,
New Taipei City,
237624, Taiwan

Website: www.lynwave.com
Tel: +886 2 3501 8700
Email: service@lynwave.com

