

FCC Radio Test Report

FCC ID: YOPGS2100MIE

This report concerns (check one): ☐ Original Grant ☒ Class II Change


Project No. : 1412211
Equipment : Wifi Module
Model Name : GS2100MIE
Applicant : Gainspan Corporation.
Address : 3590 N. First Street Suite 300 San Jose California
United States 95134.

Date of Receipt : Jan.21, 2015
Date of Test : Jan.21, 2015~Feb.05, 2015
Issued Date : Feb.06, 2015
Tested by : BTL Inc.


Testing Engineer

: 
(Josh Lin)

Technical Manager

: 
(Jeff Yang)

Authorized Signatory

: 
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 EUT TEST CONDITIONS	14
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS	19
5.1.5 EUT TEST CONDITIONS	19
5.1.6 TEST RESULTS	19

Table of Contents	Page
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	20
6.1 APPLIED PROCEDURES / LIMIT	20
6.1.1 TEST PROCEDURE	20
6.1.2 DEVIATION FROM STANDARD	20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD	21
7.1.3 TEST SETUP	21
7.1.4 EUT OPERATION CONDITIONS	21
7.1.5 EUT TEST CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE	22
8.1.2 DEVIATION FROM STANDARD	22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS	22
8.1.5 EUT TEST CONDITIONS	22
8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
ATTACHMENT A - CONDUCTED EMISSION	29
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	34
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	37
ATTACHMENT E - BANDWIDTH	74
ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER	81
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	83
ATTACHMENT H - POWER SPECTRAL DENSITY	96

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
R1404031-247	Original Report.	Jun.17, 2014
BTL-FCCP-1-1412211	Compared with the previous report (R1404031-247), Added a new PCB antenna, the gain value (3.56 dBi) is higher than the original PCB antenna (1 dBi). All tests are performed and test results are recorded in this report.	Feb.06, 2015

1. CERTIFICATION

Equipment : Wifi Module
Brand Name : XYZprinting
Model Name : GS2100MIE
Applicant : Gainspan Corporation.
Manufacturer : Cal-Comp Electronics (Thailand) Public Company Limited
Address : 138, Moo 4, Phechkasem Road, Sapang, Koawyoi, Petchaburi 76140, Thailand.
Factory : Cal-Comp Electronics (Thailand) Public Company Limited
Address : 138, Moo 4, Phechkasem Road, Sapang, Koawyoi, Petchaburi 76140, Thailand.
Date of Test : Jan.21, 2015~Feb.05, 2015
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart C: 2013 (15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1412211) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C: 2013			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.209/15.205	Transmitter Radiated Emissions	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C02: (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428A-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428A-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by Canada Industry for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U,(dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
	Vertical Polarization		30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wifi Module	
Brand Name	XYZprinting	
Model Name	GS2100MIE	
Model Difference	N/A	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 72.2 Mbps
	Output Power (Max.)	802.11b: 14.94dBm 802.11g: 19.48dBm 802.11n(20MHz): 19.45dBm
Power Source	System supplied.	
Power Rating	DC 3.3V/355mA	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	WIESON	GY196HT0131C-002	PCB	U.F.L	3.56	TX/RX

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
 802.11g mode: OFDM (6Mbps)
 802.11n HT20 mode : BPSK (6.5Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	teraterm-4.84		
Frequency (MHz)	2412	2437	2462
802.11b	18	18	18
802.11g	27	27	27
802.11n (20MHz)	27	27	27

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

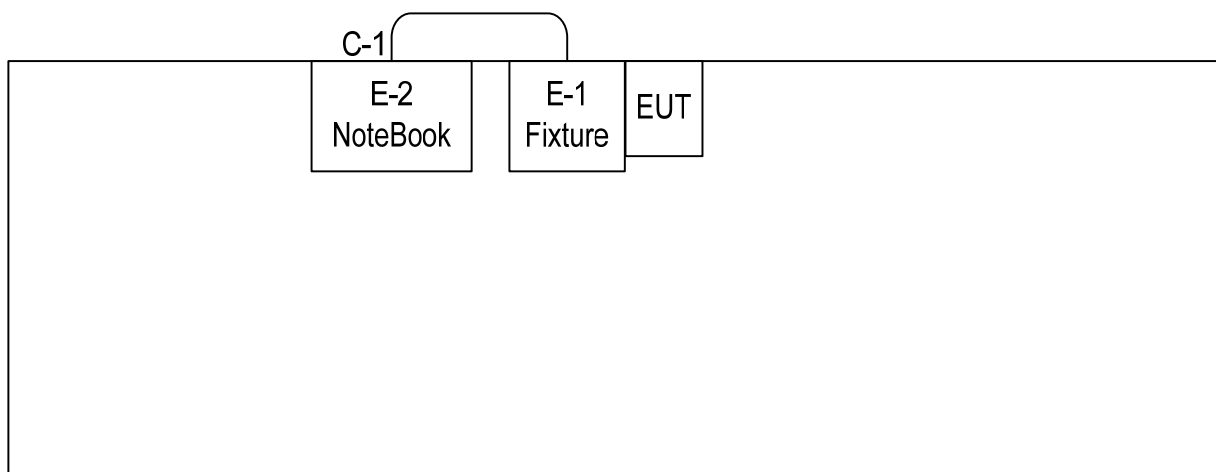

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
E-1	Notebook PC	DELL	PP18L	DOC	PF329 A01	
E-2	Fixture	N/A	N/A	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	YES	1M	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

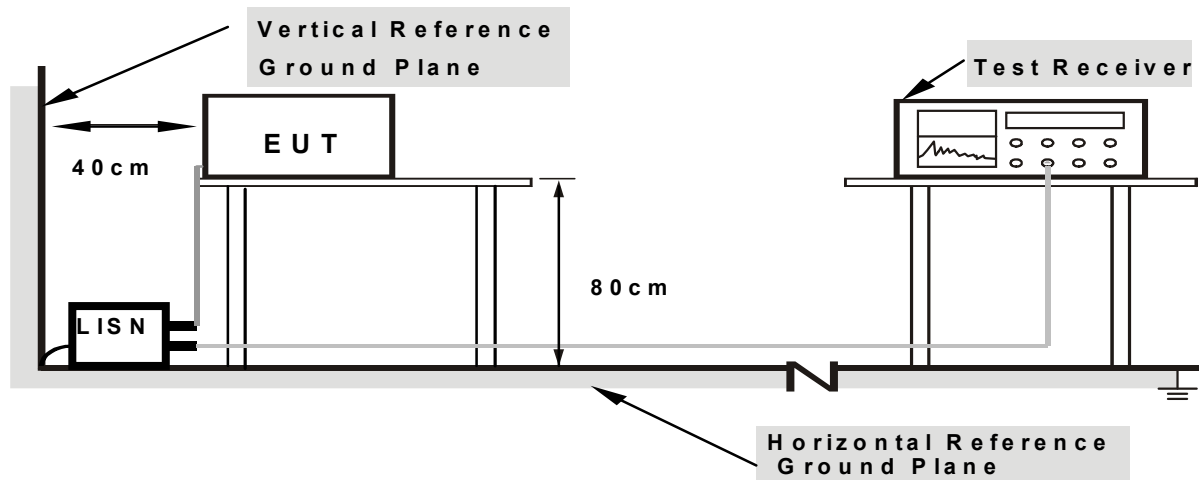

Note: 1.Support units were connected to second LISN .
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

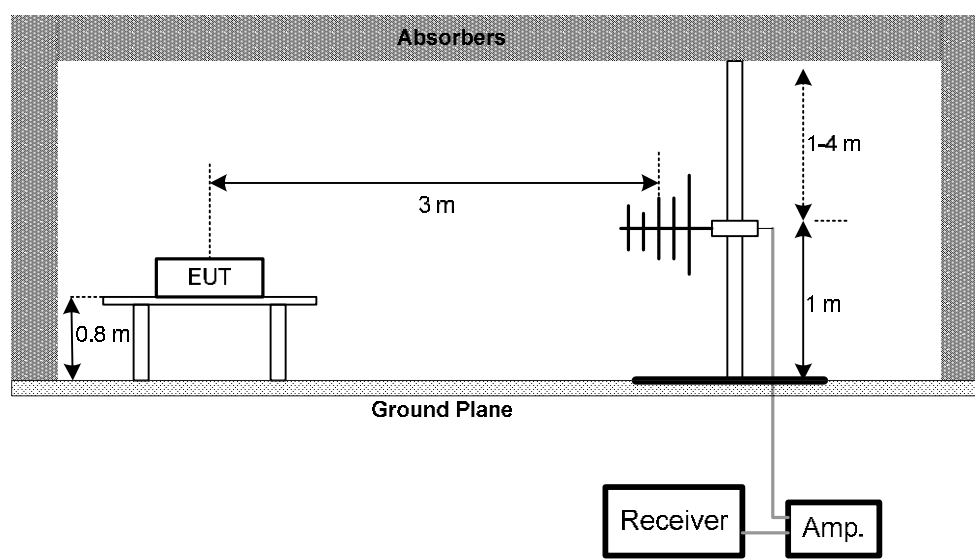

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

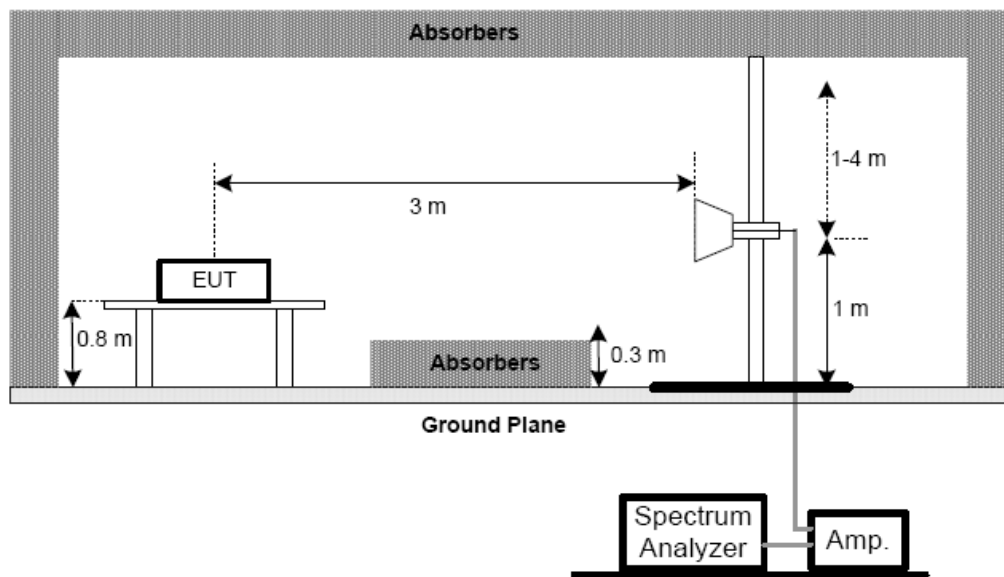

(C) For radiated emissions below 30MHz

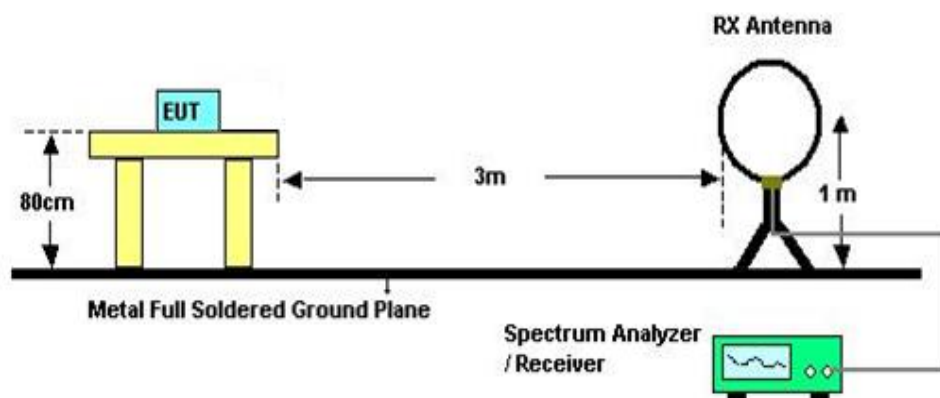

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5 Unless** otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing. Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

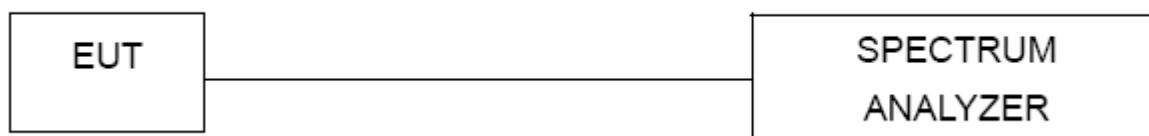

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	100087	Dec. 7, 2015
2	Test Cable	TIMES	CFD300-NL	C01	Jun. 15, 2015
3	EMI Test Receiver	R&S	ESCI	100082	Apr. 13, 2015
4	Measurement Software	EZ	EZ EMC (Version NB-02A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Jun. 12, 2016
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 15, 2015
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 12, 2015
5	Microflex Cable	EMC	S104-SMA	8m	May. 12, 2015
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 12, 2015
7	Test Cable	LMR	LMR-400	12m	May. 13, 2015
8	Test Cable	LMR	LMR-400	3m	May. 13, 2015
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 17, 2015
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	July. 10, 2015

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015


Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP30	100854	Oct. 26, 2015

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.


10. EUT TEST PHOTO

Conducted Measurement Photos

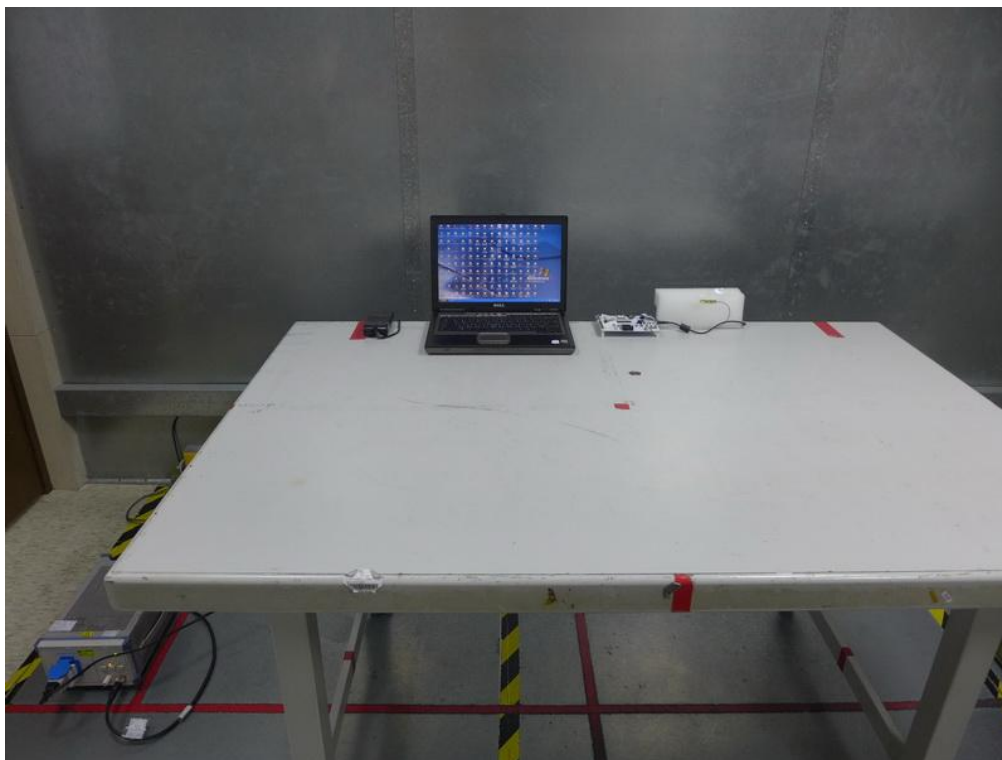



Radiated Measurement Photos

9KHz to 30MHz

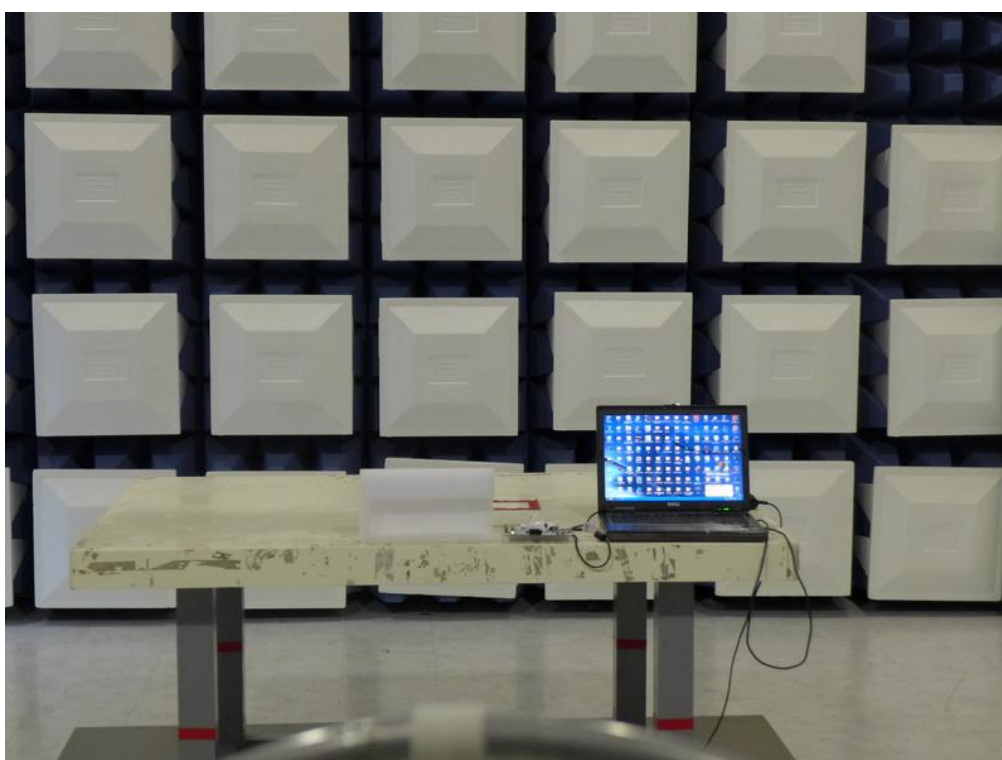


Radiated Measurement Photos

30MHz to 1000MHz

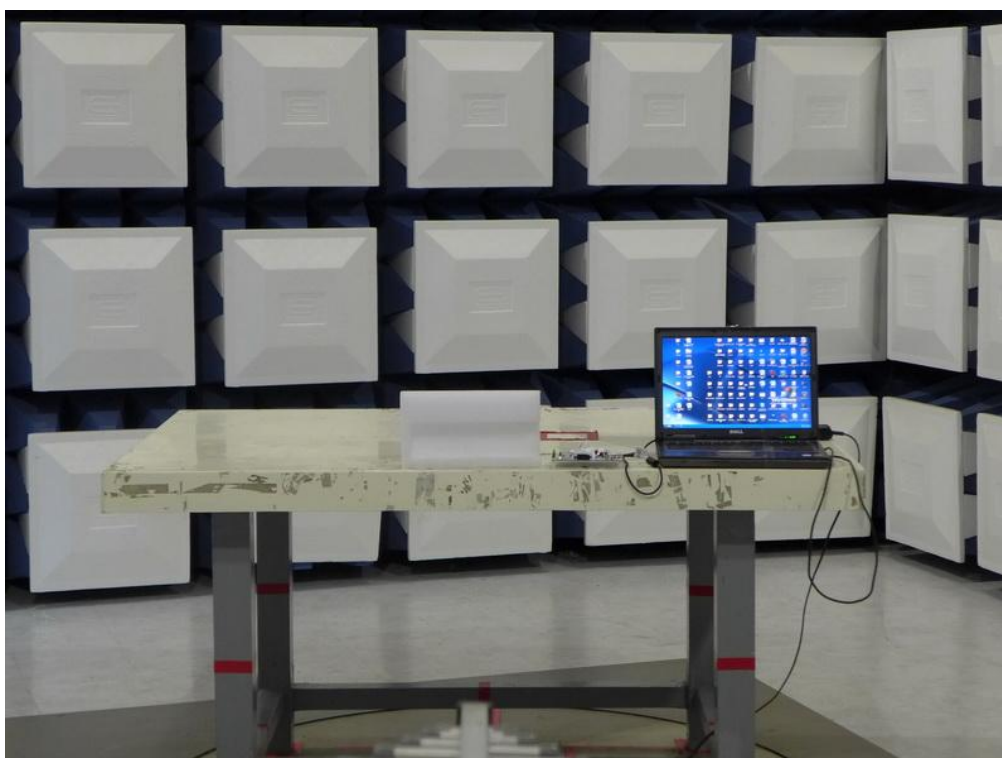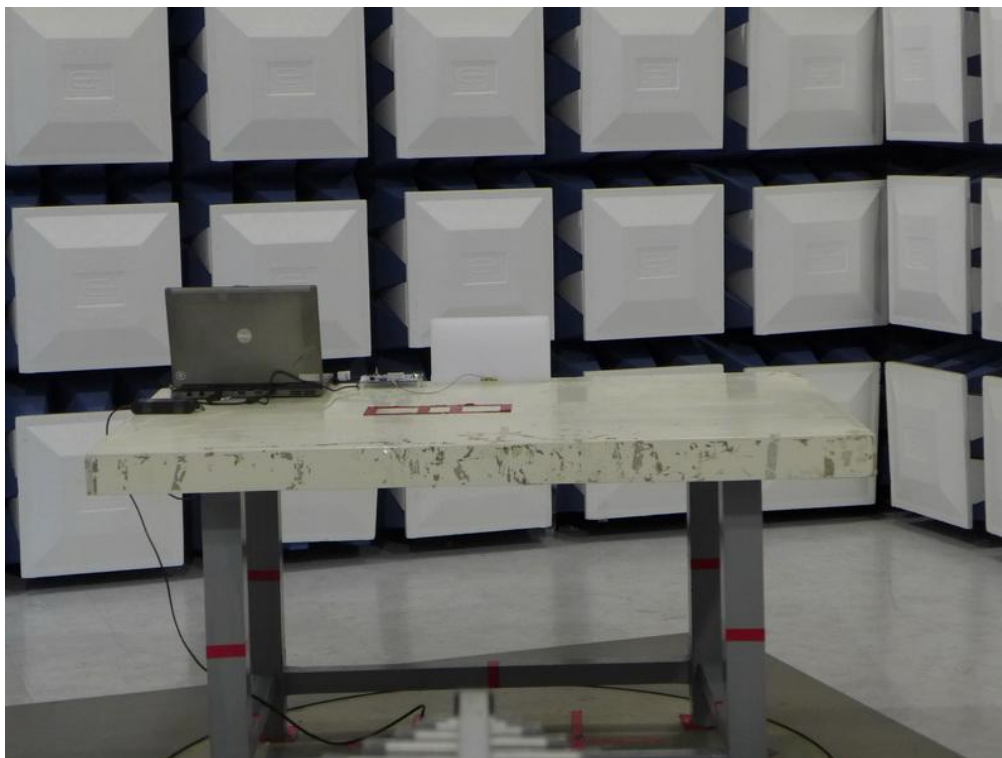

Radiated Measurement Photos


Above 1000MHz

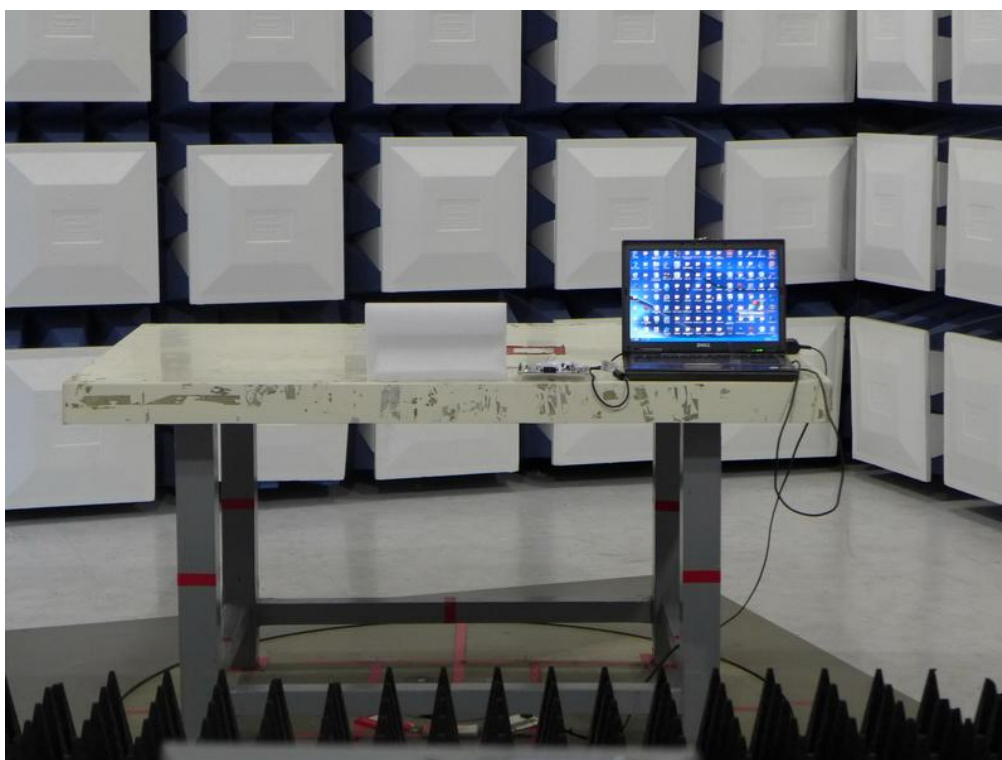

ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX MODE


Line

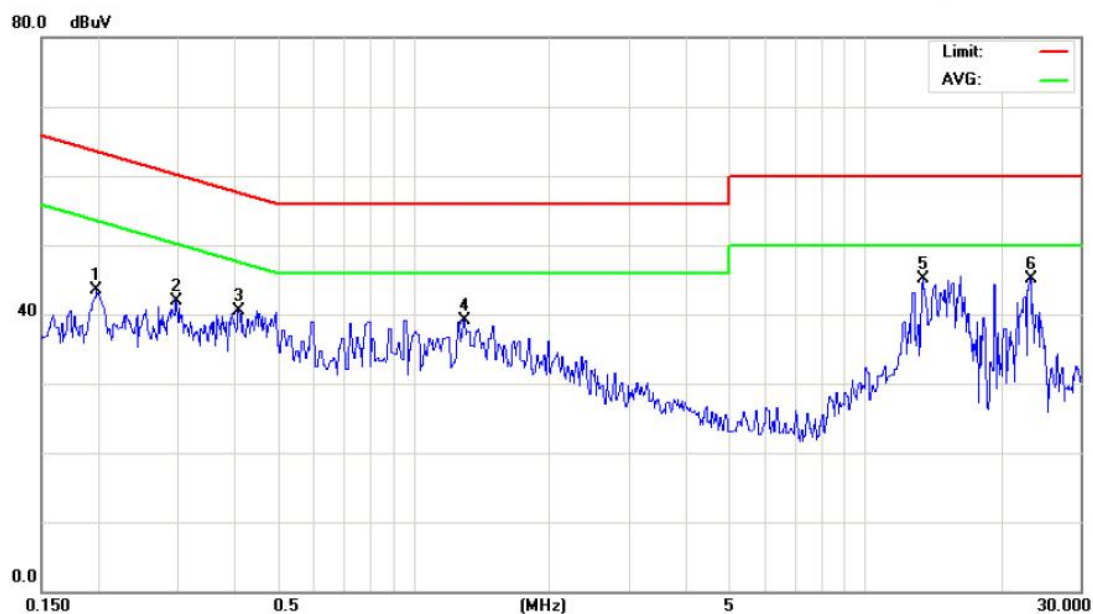

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1983	33.91	9.65	43.56	63.68	-20.12	peak	
2	0.2974	32.22	9.76	41.98	60.31	-18.33	peak	
3	0.4087	30.71	9.88	40.59	57.67	-17.08	peak	
4	1.2919	29.33	9.72	39.05	56.00	-16.95	peak	
5	13.4000	34.96	10.11	45.07	60.00	-14.93	peak	
6 *	23.1498	34.67	10.46	45.13	60.00	-14.87	peak	

Test Mode : TX MODE

Neutral

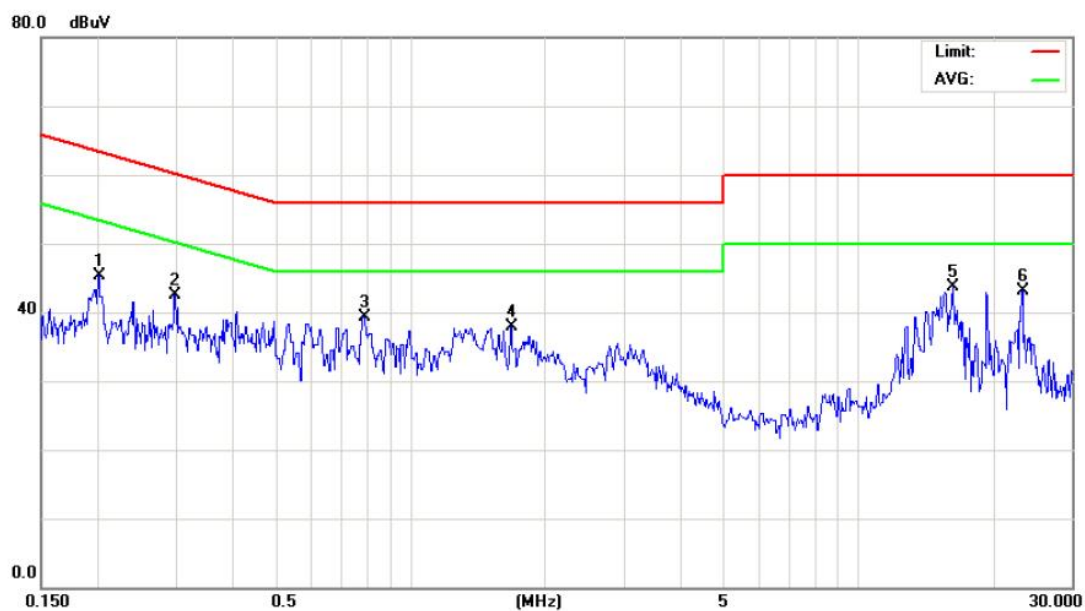

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2011	35.71	9.64	45.35	63.56	-18.21	peak	
2	0.2973	32.89	9.65	42.54	60.32	-17.78	peak	
3	0.7880	29.54	9.68	39.22	56.00	-16.78	peak	
4	1.6789	28.22	9.73	37.95	56.00	-18.05	peak	
5 *	16.2500	33.45	10.24	43.69	60.00	-16.31	peak	
6	23.1496	32.59	10.49	43.08	60.00	-16.92	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode 2412MHz


Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0102	0°	42.66	19.11	61.77	107.43	-45.66	AVG
0.0102	0°	51.74	19.11	70.85	127.43	-56.58	PK
0.0241	0°	41.68	16.14	57.82	99.96	-42.14	AVG
0.0241	0°	51.26	16.14	67.40	119.96	-52.56	PK
0.0346	0°	44.31	14.49	58.80	96.82	-38.03	AVG
0.0346	0°	52.53	14.49	67.02	116.82	-49.81	PK
0.2820	0°	39.48	11.21	50.69	78.60	-27.91	AVG
0.2820	0°	50.42	11.21	61.63	98.60	-36.97	PK
0.5330	0°	34.77	11.23	46.00	73.07	-27.07	QP
1.1890	0°	31.69	11.48	43.17	66.10	-22.93	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0098	90°	43.55	19.30	62.85	107.78	-44.93	AVG
0.0098	90°	51.87	19.30	71.17	127.78	-56.61	PK
0.0245	90°	41.28	16.05	57.33	99.82	-42.49	AVG
0.0245	90°	52.69	16.05	68.74	119.82	-51.08	PK
0.0339	90°	44.51	14.55	59.06	97.00	-37.94	AVG
0.0339	90°	53.61	14.55	68.16	117.00	-48.84	PK
0.2810	90°	39.56	11.22	50.78	78.63	-27.85	AVG
0.2810	90°	50.66	11.22	61.88	98.63	-36.75	PK
0.5310	90°	34.51	11.23	45.74	73.10	-27.36	QP
1.1880	90°	30.77	11.48	42.25	66.11	-23.86	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX B MODE CHANNEL 06
------------	----------------------

Vertical

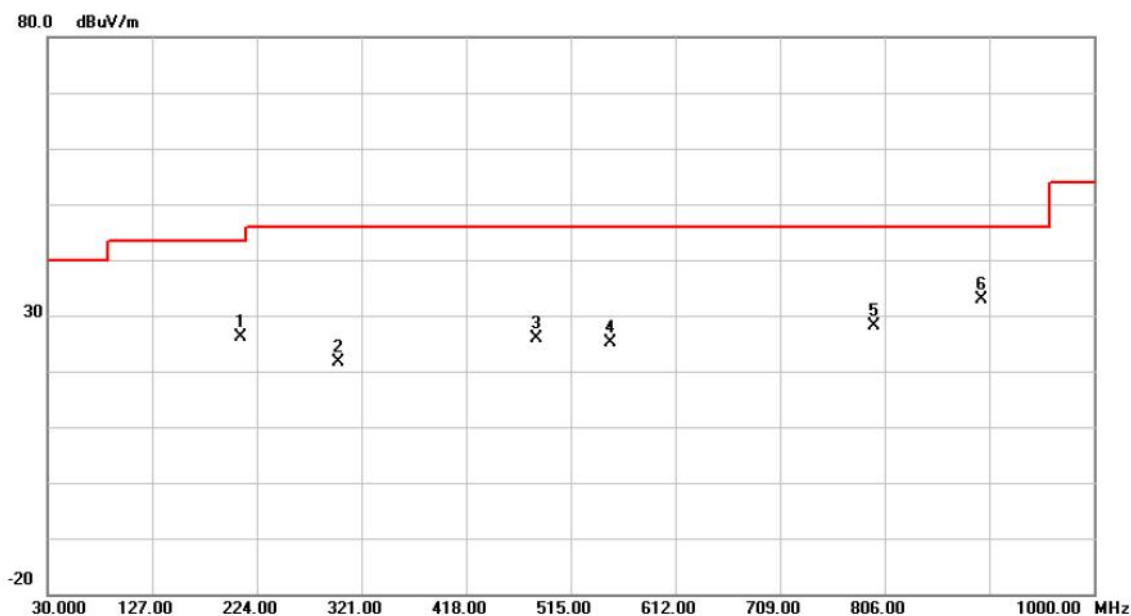

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		209.4500	42.64	-16.57	26.07	43.50	-17.43	peak	
2		299.1750	35.18	-13.51	21.67	46.00	-24.33	peak	
3		483.4750	35.36	-9.42	25.94	46.00	-20.06	peak	
4		551.3750	33.17	-7.97	25.20	46.00	-20.80	peak	
5		796.3000	32.80	-4.75	28.05	46.00	-17.95	peak	
6	*	895.7250	35.86	-2.91	32.95	46.00	-13.05	peak	

Test Mode: TX B MODE CHANNEL 06

Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		71.2250	38.08	-16.48	21.60	40.00	-18.40	peak	
2	*	207.0250	53.92	-16.61	37.31	43.50	-6.19	peak	
3		299.1750	45.55	-13.51	32.04	46.00	-13.96	peak	
4		422.8500	38.51	-10.44	28.07	46.00	-17.93	peak	
5		696.8750	33.53	-5.51	28.02	46.00	-17.98	peak	
6		762.3500	33.33	-4.94	28.39	46.00	-17.61	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	26.04	31.02	57.06	74.00	-16.94	peak	
2		2390.000	17.07	31.02	48.09	54.00	-5.91	AVG	
3	X	2411.250	71.16	31.12	102.28	74.00	28.28	peak	NO LIMIT
4	*	2411.250	69.18	31.12	100.30	54.00	46.30	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical

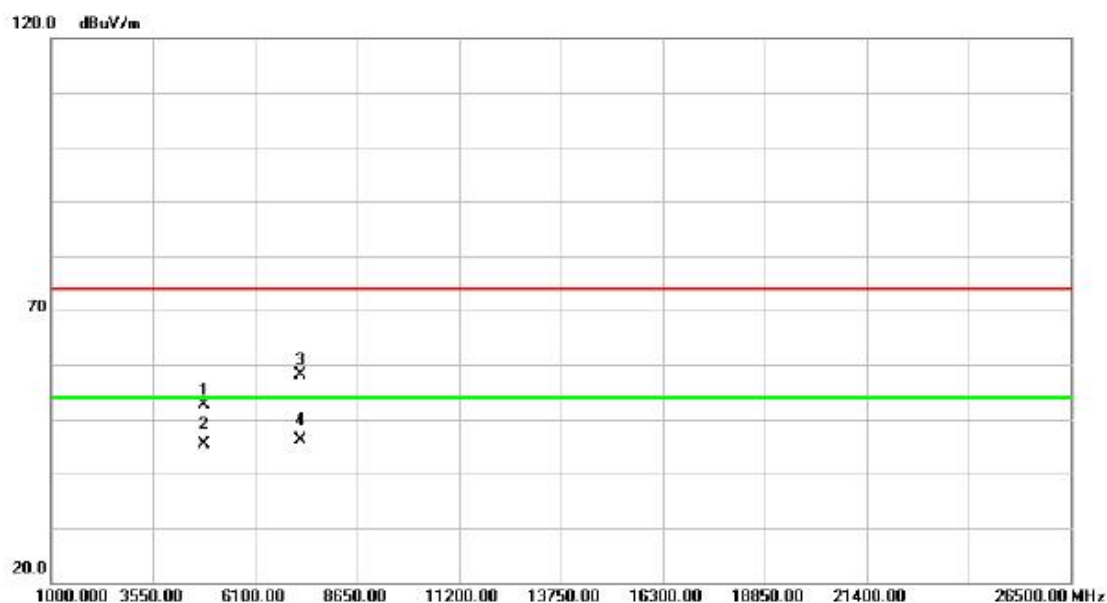

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4823.980	45.86	6.78	52.64	74.00	-21.36	peak	
2		4823.980	38.53	6.78	45.31	54.00	-8.69	AVG	
3		7233.825	42.85	15.16	58.01	74.00	-15.99	peak	
4	*	7233.825	31.05	15.16	46.21	54.00	-7.79	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	26.44	31.02	57.46	74.00	-16.54	peak	
2		2390.000	17.12	31.02	48.14	54.00	-5.86	AVG	
3	X	2411.250	71.10	31.12	102.22	74.00	28.22	peak	NO LIMIT
4	*	2411.250	69.74	31.12	100.86	54.00	46.86	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

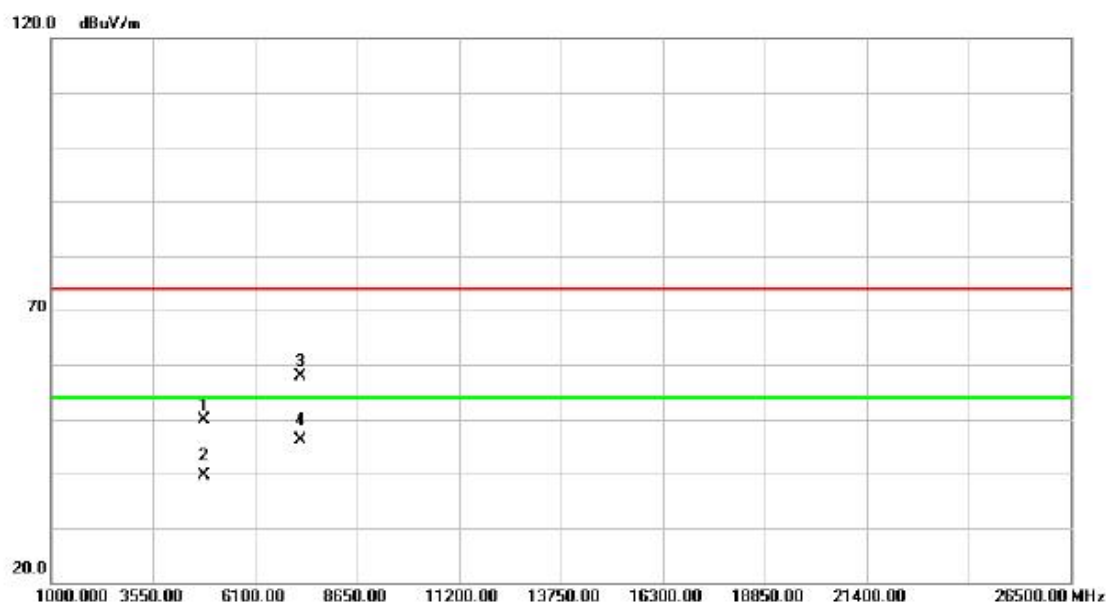

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.813	43.18	6.78	49.96	74.00	-24.04	peak	
2		4824.813	32.77	6.78	39.55	54.00	-14.45	AVG	
3		7235.350	42.82	15.17	57.99	74.00	-16.01	peak	
4	*	7235.350	31.05	15.17	46.22	54.00	-7.78	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2436.250	70.48	31.24	101.72	74.00	27.72	peak	NO LIMIT
2	*	2436.250	68.56	31.24	99.80	54.00	45.80	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Vertical

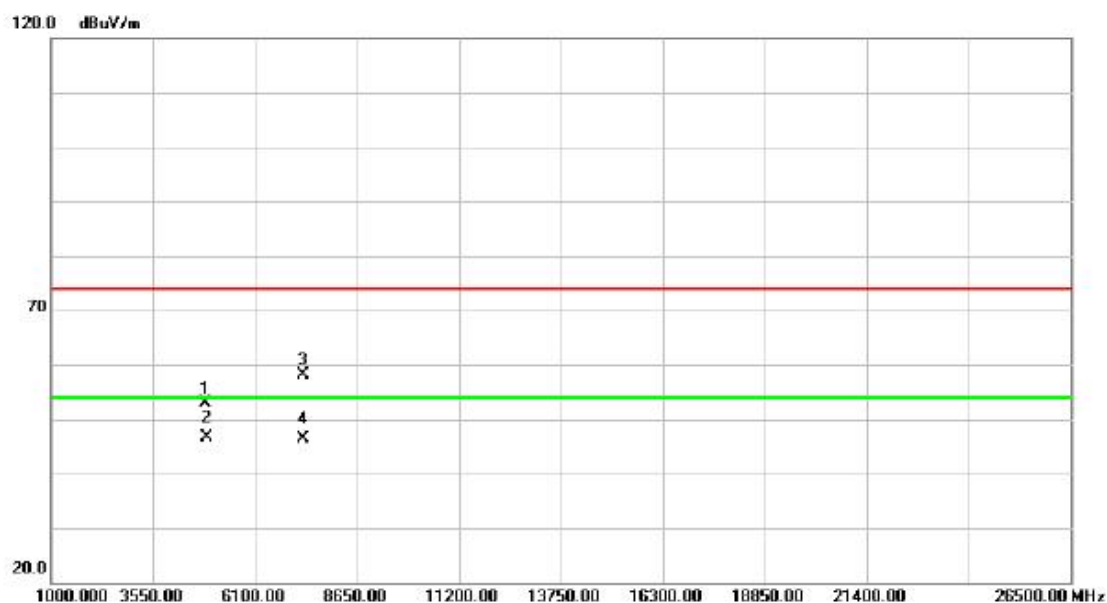

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.038	46.01	6.78	52.79	74.00	-21.21	peak	
2	*	4874.038	39.74	6.78	46.52	54.00	-7.48	AVG	
3		7310.100	42.47	15.57	58.04	74.00	-15.96	peak	
4		7310.100	30.76	15.57	46.33	54.00	-7.67	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2436.250	70.24	31.24	101.48	74.00	27.48	peak	NO LIMIT
2	*	2436.250	68.29	31.24	99.53	54.00	45.53	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal

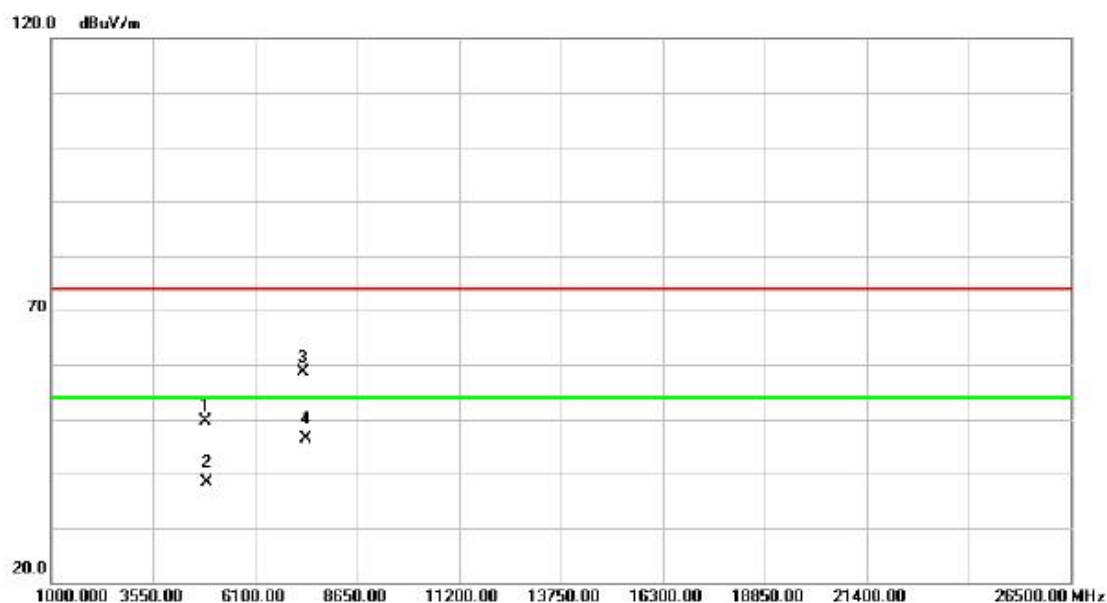

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4873.975	42.78	6.78	49.56	74.00	-24.44	peak	
2		4873.975	31.59	6.78	38.37	54.00	-15.63	AVG	
3		7311.387	43.05	15.58	58.63	74.00	-15.37	peak	
4	*	7311.387	30.75	15.58	46.33	54.00	-7.67	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2461.250	69.45	31.36	100.81	74.00	26.81	peak	NO LIMIT
2	*	2461.250	67.50	31.36	98.86	54.00	44.86	AVG	NO LIMIT
3		2483.500	25.81	31.46	57.27	74.00	-16.73	peak	
4		2483.500	15.50	31.46	46.96	54.00	-7.04	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical

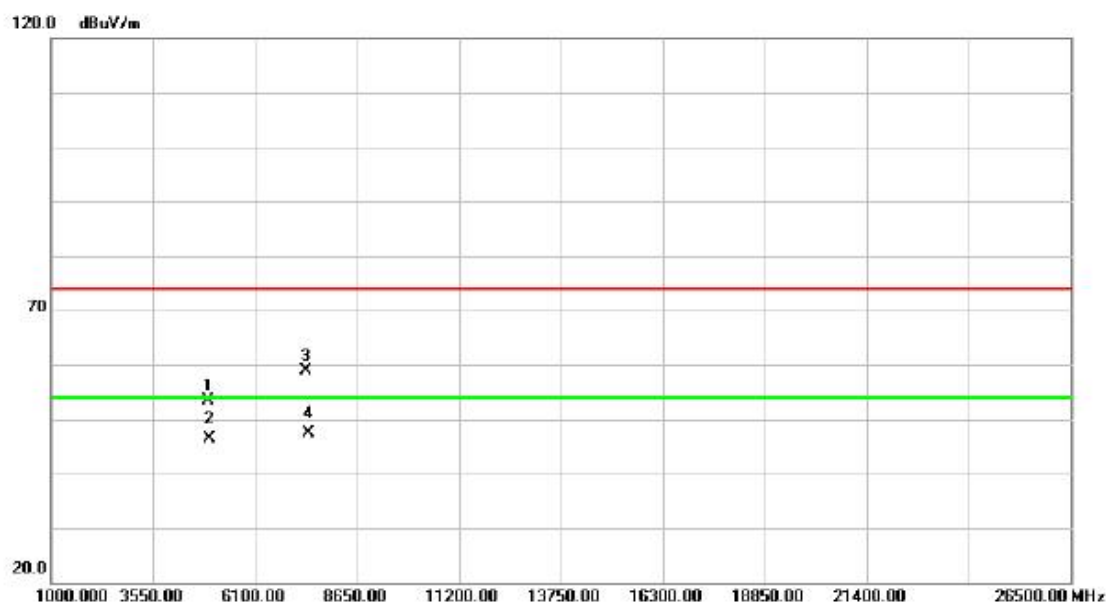

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4923.925	46.56	6.77	53.33	74.00	-20.67	peak	
2		4923.925	39.73	6.77	46.50	54.00	-7.50	AVG	
3		7386.740	42.81	15.98	58.79	74.00	-15.21	peak	
4	*	7386.740	31.33	15.98	47.31	54.00	-6.69	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2461.250	69.58	31.36	100.94	74.00	26.94	peak	NO LIMIT
2	*	2461.250	67.63	31.36	98.99	54.00	44.99	AVG	NO LIMIT
3		2483.500	25.35	31.46	56.81	74.00	-17.19	peak	
4		2483.500	14.83	31.46	46.29	54.00	-7.71	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4923.130	42.72	6.77	49.49	74.00	-24.51	peak	
2		4923.130	31.82	6.77	38.59	54.00	-15.41	AVG	
3		7389.400	41.93	16.00	57.93	74.00	-16.07	peak	
4	*	7389.400	31.48	16.00	47.48	54.00	-6.52	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical

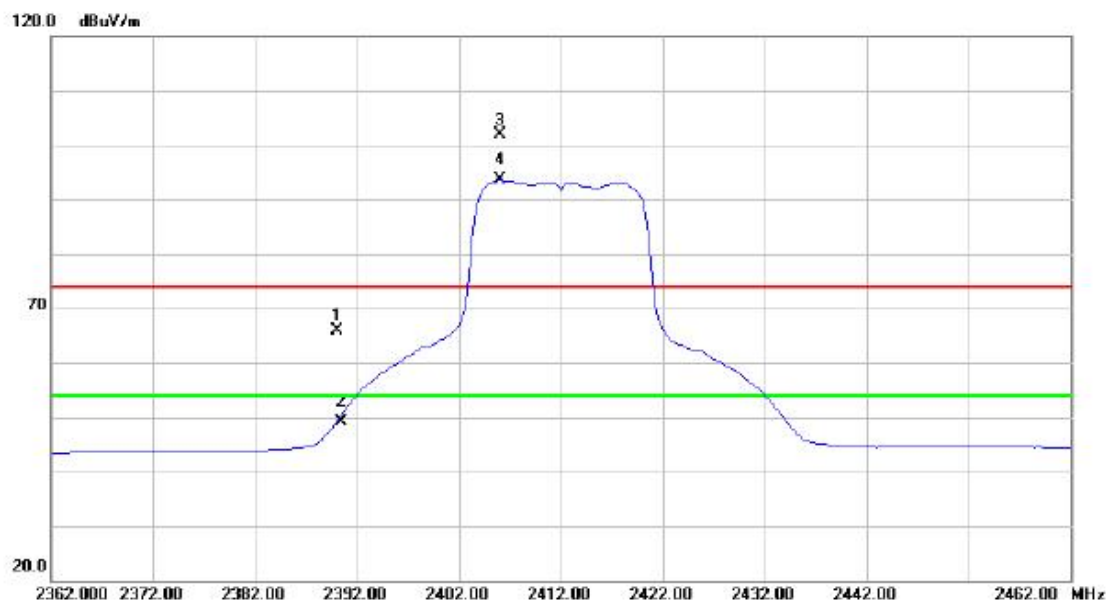

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	34.74	31.02	65.76	74.00	-8.24	peak	
2		2390.000	18.15	31.02	49.17	54.00	-4.83	AVG	
3	X	2406.000	70.78	31.10	101.88	74.00	27.88	peak	NO LIMIT
4	*	2406.000	62.43	31.10	93.53	54.00	39.53	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.025	45.29	6.78	52.07	74.00	-21.93	peak	
2		4824.025	38.15	6.78	44.93	54.00	-9.07	AVG	
3		7234.150	42.38	15.17	57.55	74.00	-16.45	peak	
4	*	7234.150	31.01	15.17	46.18	54.00	-7.82	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Horizontal

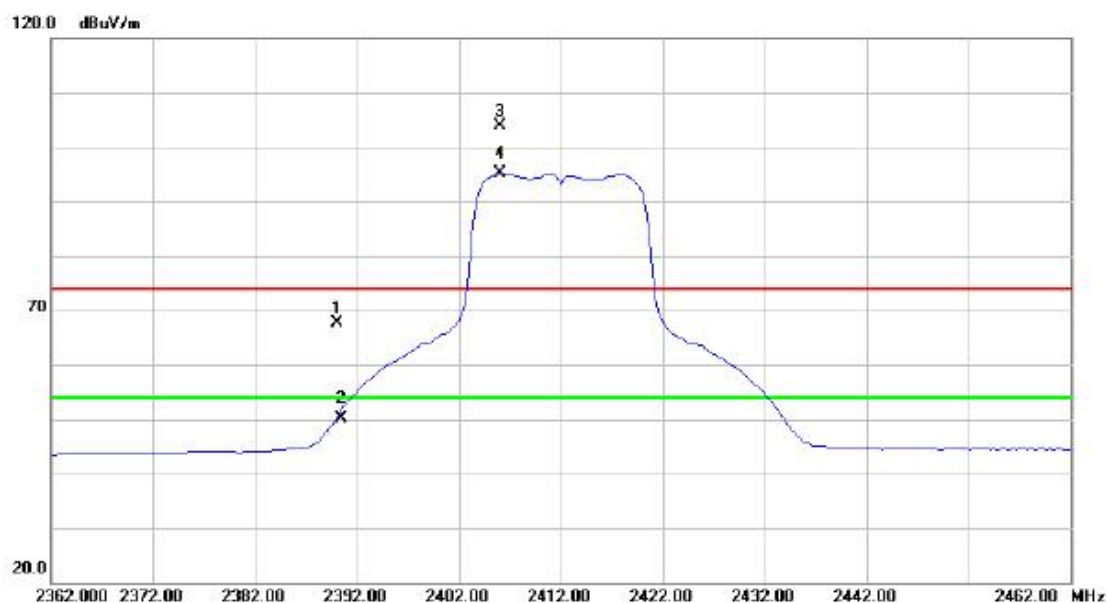

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	36.60	31.02	67.62	74.00	-6.38	peak	
2		2390.000	19.22	31.02	50.24	54.00	-3.76	AVG	
3	X	2406.000	72.67	31.10	103.77	74.00	29.77	peak	NO LIMIT
4	*	2406.000	64.01	31.10	95.11	54.00	41.11	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Horizontal

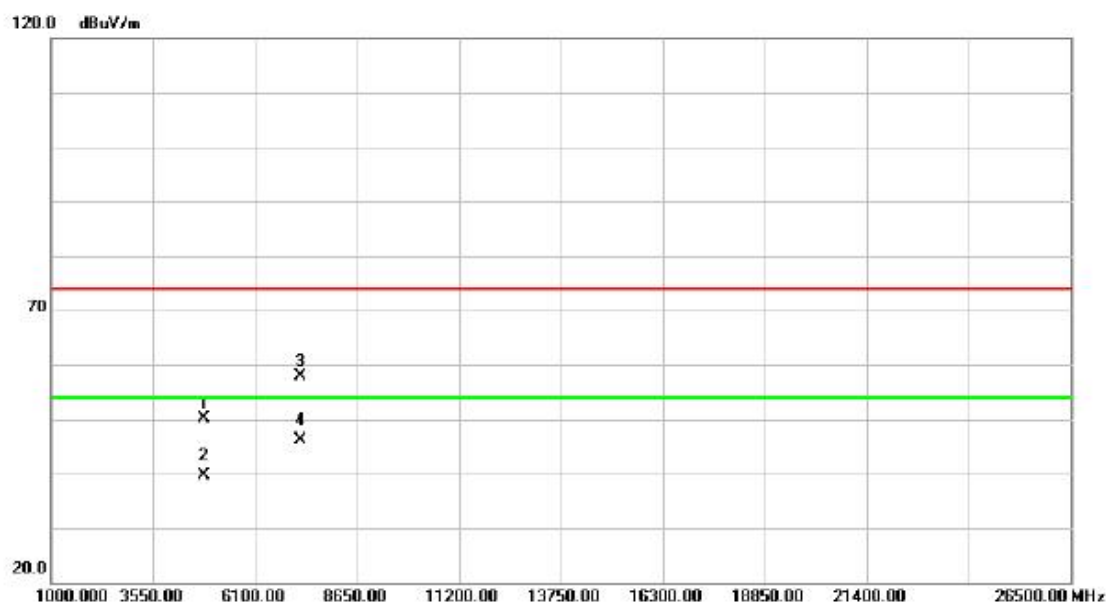

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4823.800	43.43	6.78	50.21	74.00	-23.79	peak	
2		4823.800	32.87	6.78	39.65	54.00	-14.35	AVG	
3		7234.775	42.76	15.17	57.93	74.00	-16.07	peak	
4	*	7234.775	30.92	15.17	46.09	54.00	-7.91	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

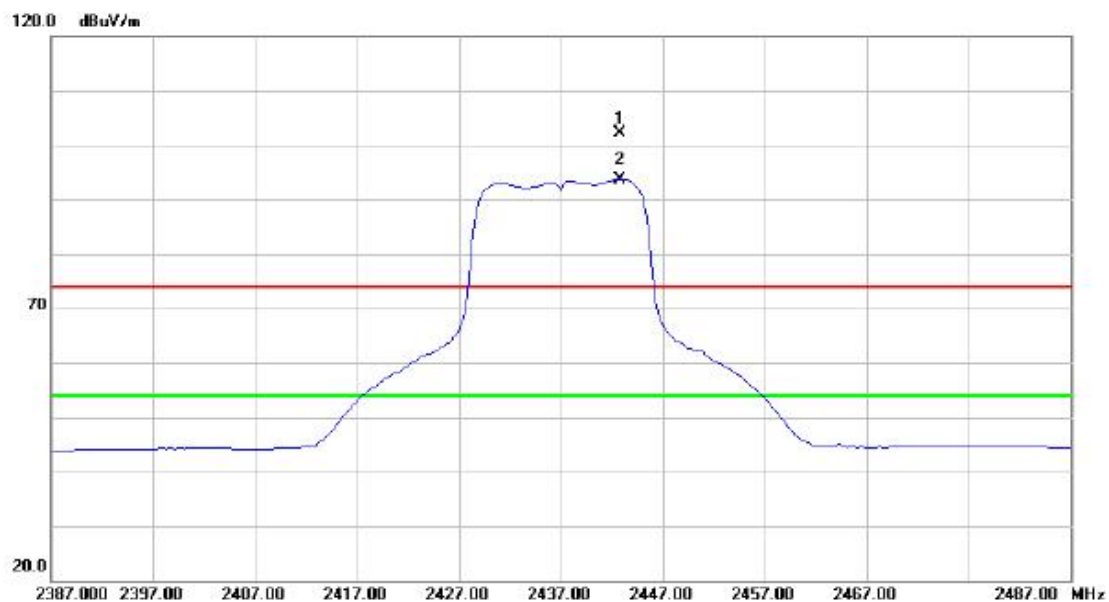

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2442.750	70.96	31.27	102.23	74.00	28.23	peak	NO LIMIT
2	*	2442.750	62.34	31.27	93.61	54.00	39.61	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

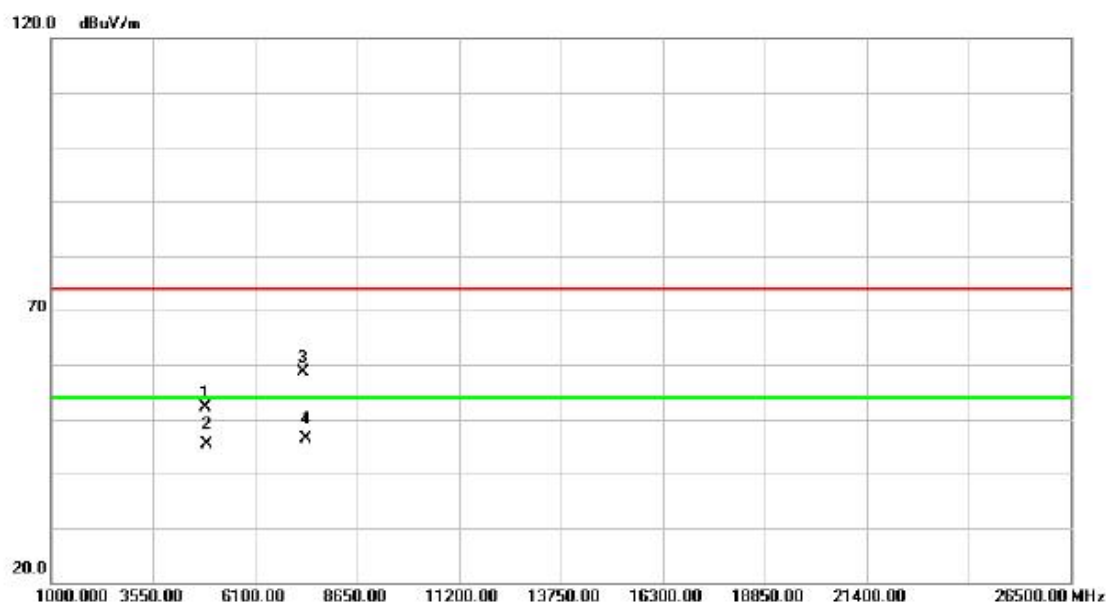

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.038	45.35	6.78	52.13	74.00	-21.87	peak	
2		4874.038	38.69	6.78	45.47	54.00	-8.53	AVG	
3		7311.800	42.99	15.58	58.57	74.00	-15.43	peak	
4	*	7311.800	30.70	15.58	46.28	54.00	-7.72	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

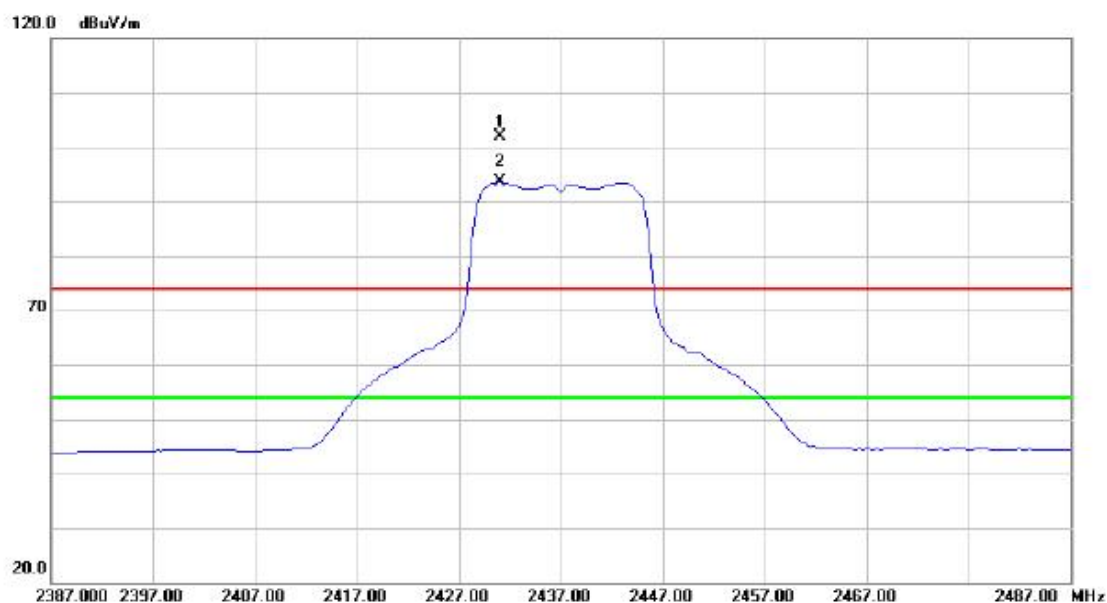

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2431.000	70.75	31.22	101.97	74.00	27.97	peak	NO LIMIT
2	*	2431.000	62.30	31.22	93.52	54.00	39.52	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

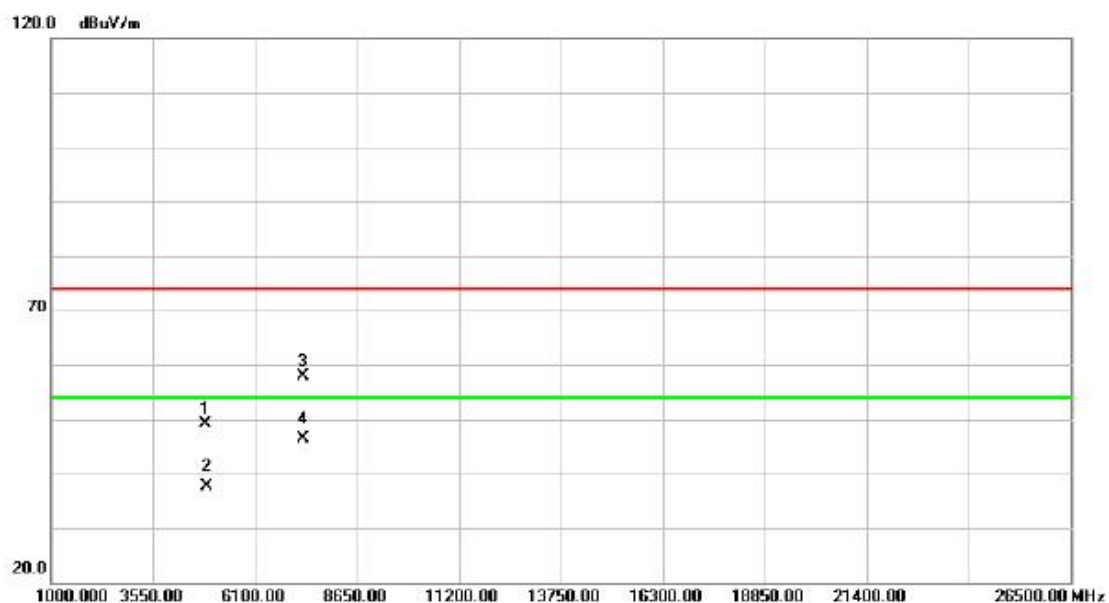

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4875.900	42.33	6.77	49.10	74.00	-24.90	peak	
2		4875.900	30.83	6.77	37.60	54.00	-16.40	AVG	
3		7309.900	42.36	15.57	57.93	74.00	-16.07	peak	
4	*	7309.900	30.69	15.57	46.26	54.00	-7.74	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

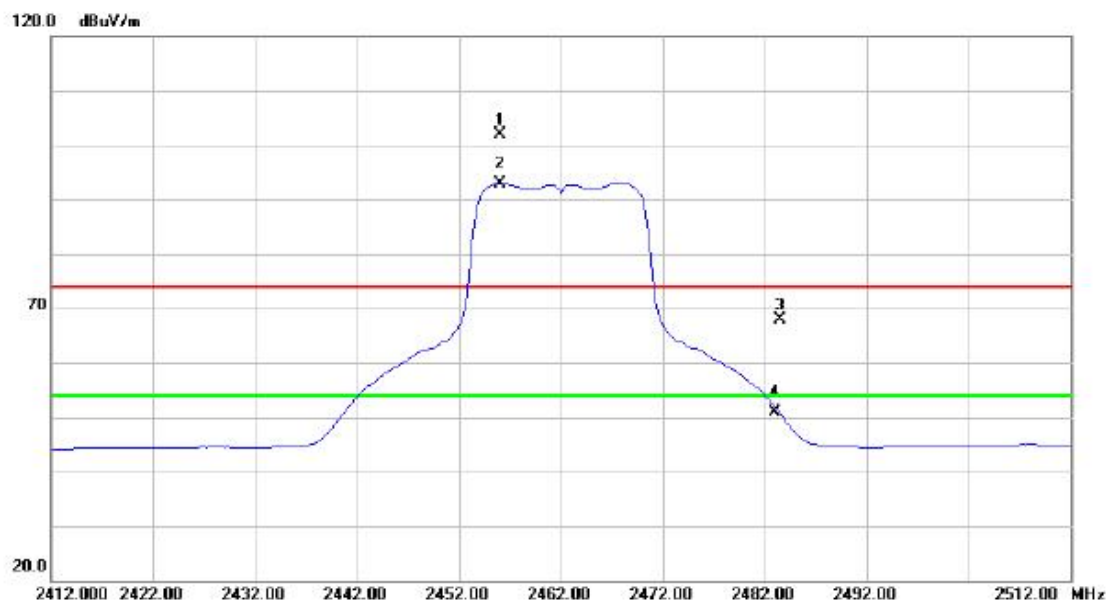

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.000	70.60	31.33	101.93	74.00	27.93	peak	NO LIMIT
2	*	2456.000	61.64	31.33	92.97	54.00	38.97	AVG	NO LIMIT
3		2483.500	36.32	31.46	67.78	74.00	-6.22	peak	
4		2483.500	19.30	31.46	50.76	54.00	-3.24	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

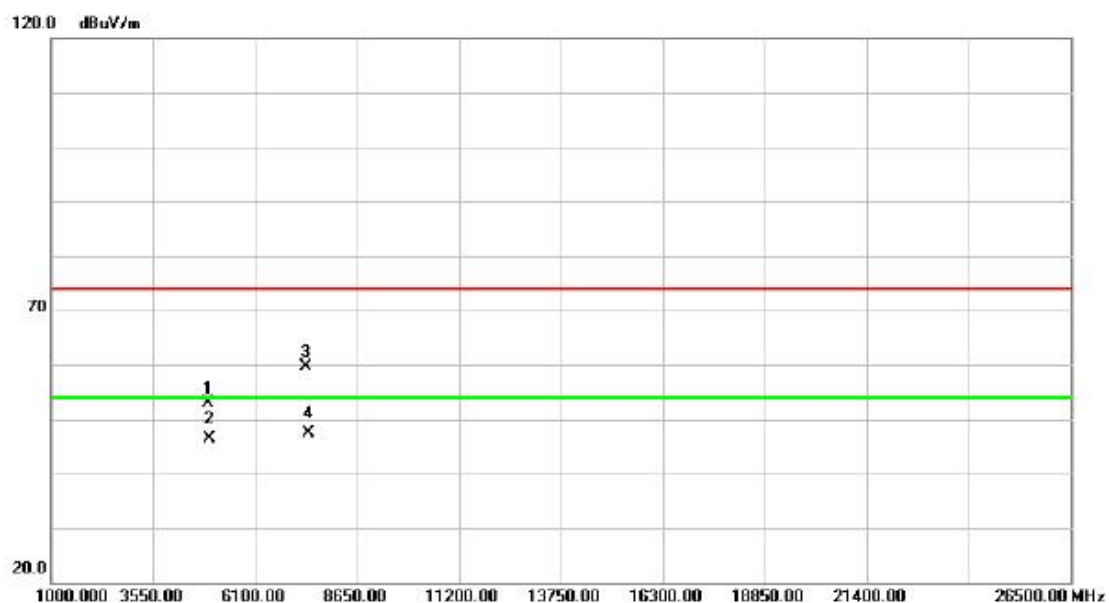

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4923.860	46.15	6.77	52.92	74.00	-21.08	peak	
2		4923.860	39.69	6.77	46.46	54.00	-7.54	AVG	
3		7385.580	43.56	15.98	59.54	74.00	-14.46	peak	
4	*	7385.580	31.35	15.98	47.33	54.00	-6.67	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

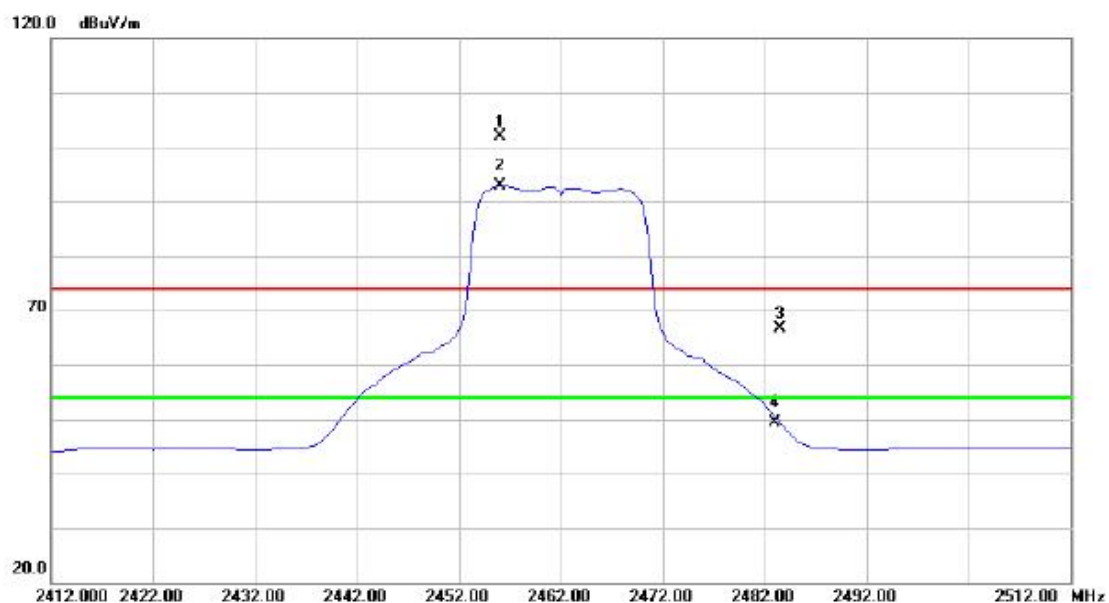

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.000	70.67	31.33	102.00	74.00	28.00	peak	NO LIMIT
2	*	2456.000	61.57	31.33	92.90	54.00	38.90	AVG	NO LIMIT
3		2483.500	35.11	31.46	66.57	74.00	-7.43	peak	
4		2483.500	18.03	31.46	49.49	54.00	-4.51	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

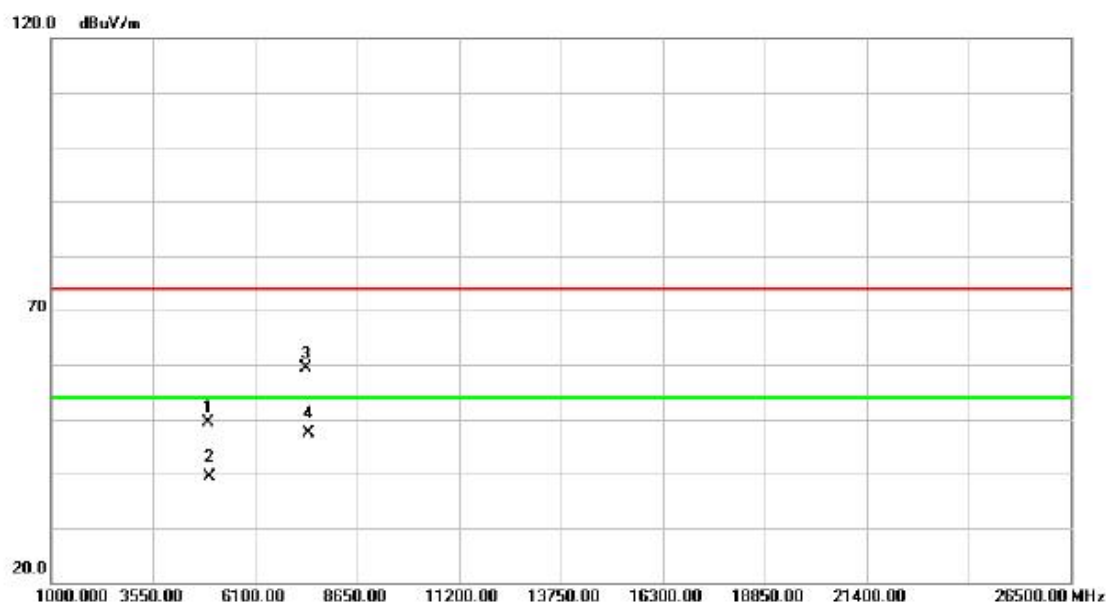

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4923.105	42.65	6.77	49.42	74.00	-24.58	peak	
2		4923.105	32.67	6.77	39.44	54.00	-14.56	AVG	
3		7385.545	43.41	15.98	59.39	74.00	-14.61	peak	
4	*	7385.545	31.30	15.98	47.28	54.00	-6.72	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

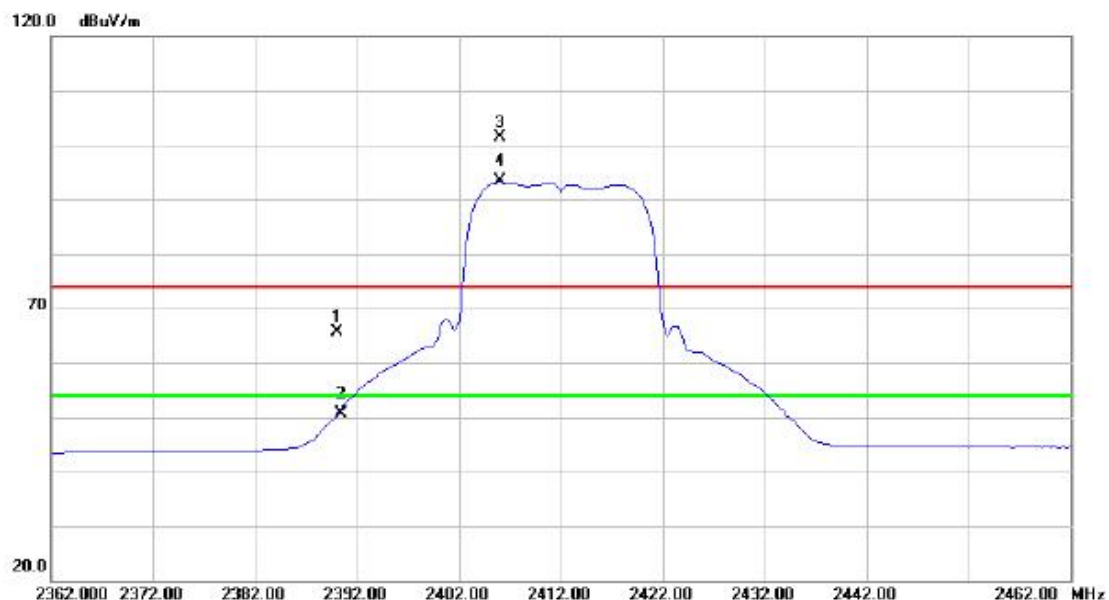

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	34.50	31.02	65.52	74.00	-8.48	peak	
2		2390.000	19.55	31.02	50.57	54.00	-3.43	AVG	
3	X	2406.000	70.34	31.10	101.44	74.00	27.44	peak	NO LIMIT
4	*	2406.000	62.18	31.10	93.28	54.00	39.28	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

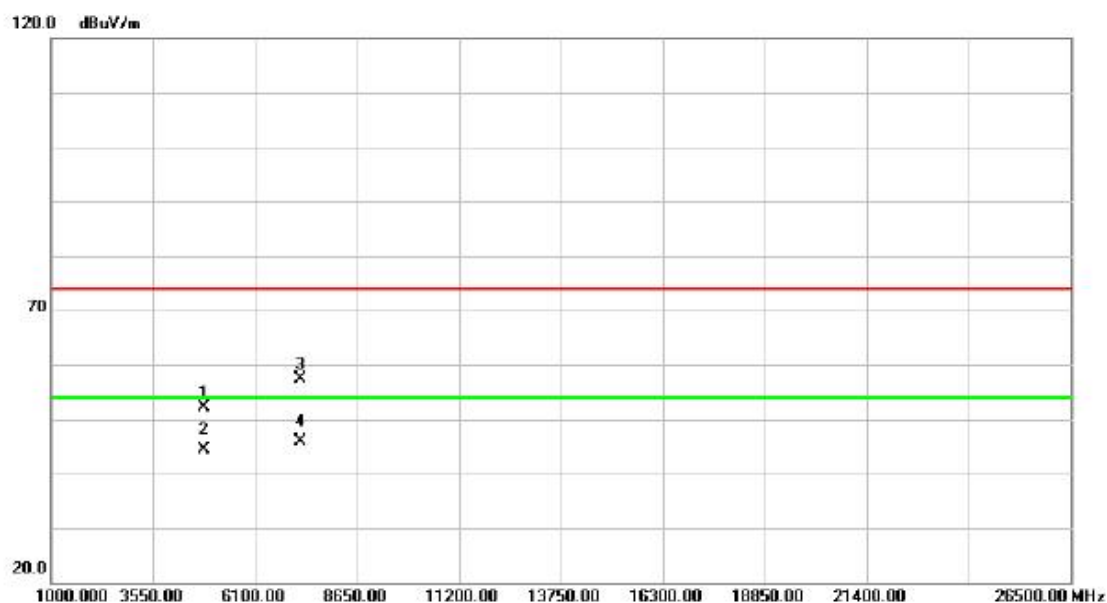

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.110	45.31	6.78	52.09	74.00	-21.91	peak	
2		4824.110	37.55	6.78	44.33	54.00	-9.67	AVG	
3		7235.700	42.30	15.17	57.47	74.00	-16.53	peak	
4	*	7235.700	30.82	15.17	45.99	54.00	-8.01	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

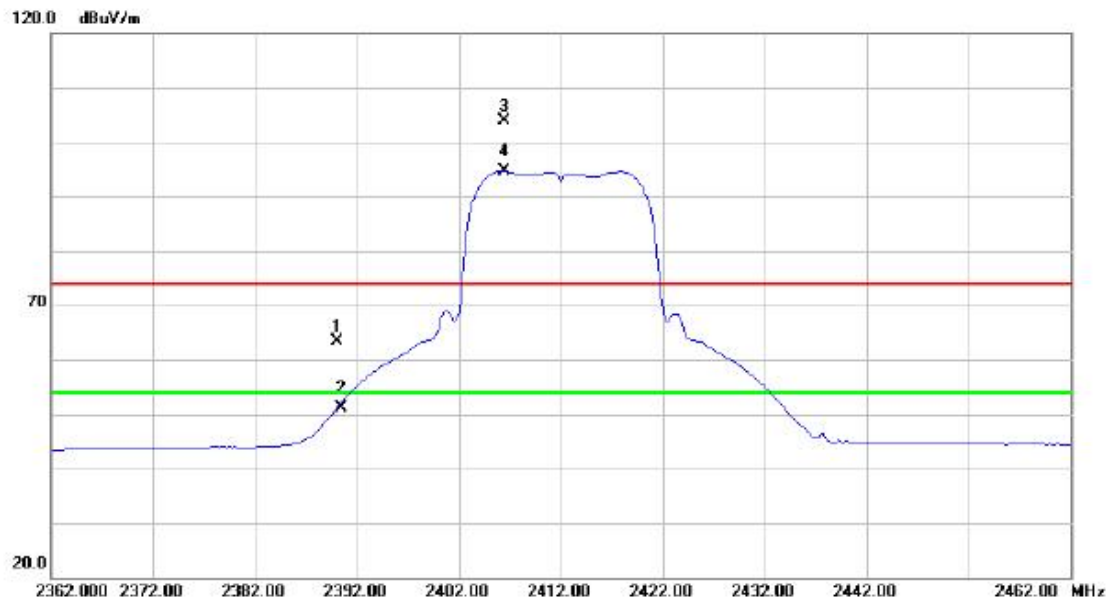

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	32.41	31.02	63.43	74.00	-10.57	peak	
2		2390.000	20.18	31.02	51.20	54.00	-2.80	AVG	
3	X	2406.500	72.70	31.10	103.80	74.00	29.80	peak	NO LIMIT
4	*	2406.500	63.46	31.10	94.56	54.00	40.56	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

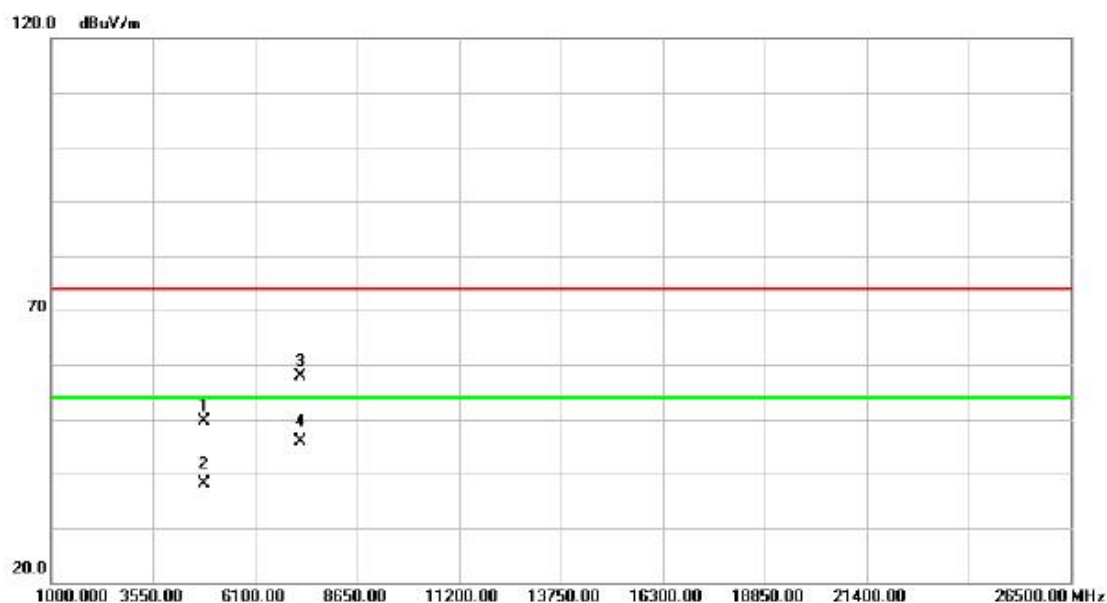

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4823.305	42.76	6.78	49.54	74.00	-24.46	peak	
2		4823.305	31.38	6.78	38.16	54.00	-15.84	AVG	
3		7236.245	42.79	15.17	57.96	74.00	-16.04	peak	
4	*	7236.245	30.82	15.17	45.99	54.00	-8.01	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

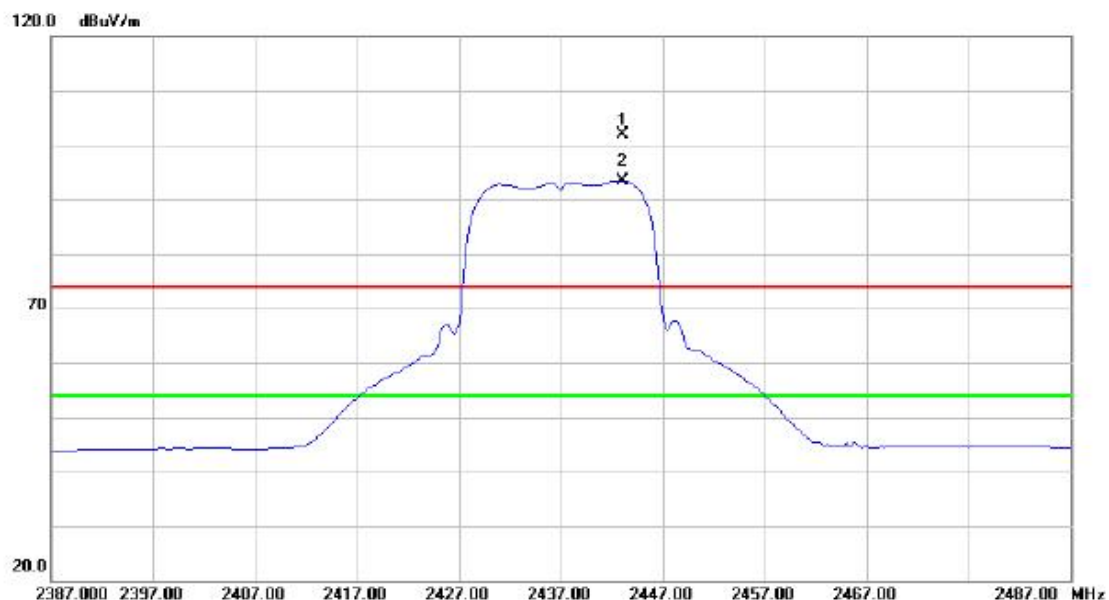

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2443.000	70.52	31.27	101.79	74.00	27.79	peak	NO LIMIT
2	*	2443.000	62.20	31.27	93.47	54.00	39.47	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

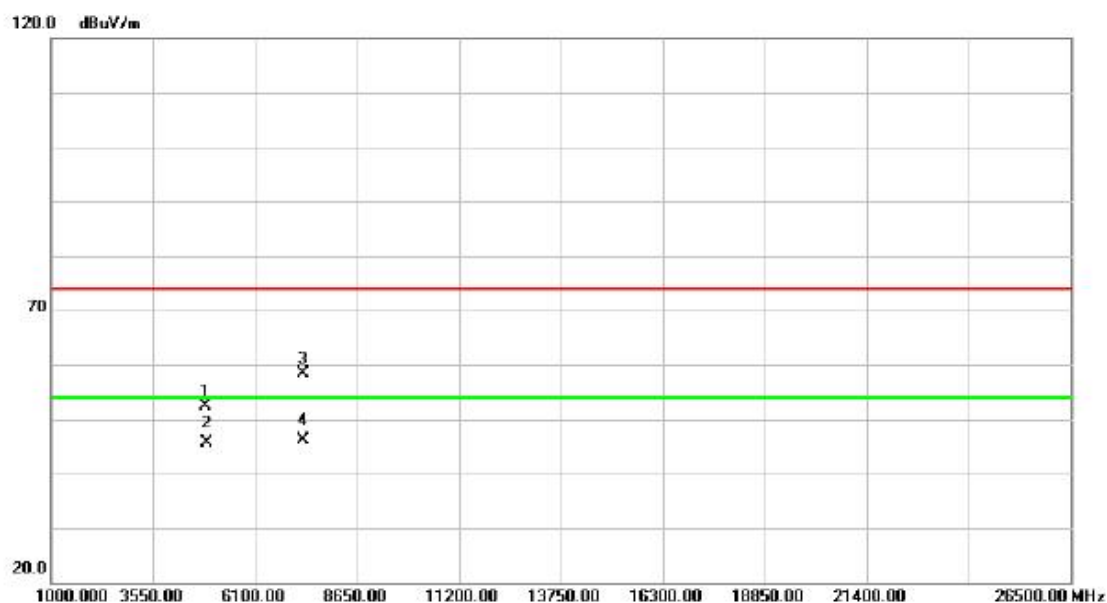

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4873.940	45.51	6.78	52.29	74.00	-21.71	peak	
2		4873.940	38.80	6.78	45.58	54.00	-8.42	AVG	
3		7310.855	42.89	15.57	58.46	74.00	-15.54	peak	
4	*	7310.855	30.67	15.57	46.24	54.00	-7.76	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

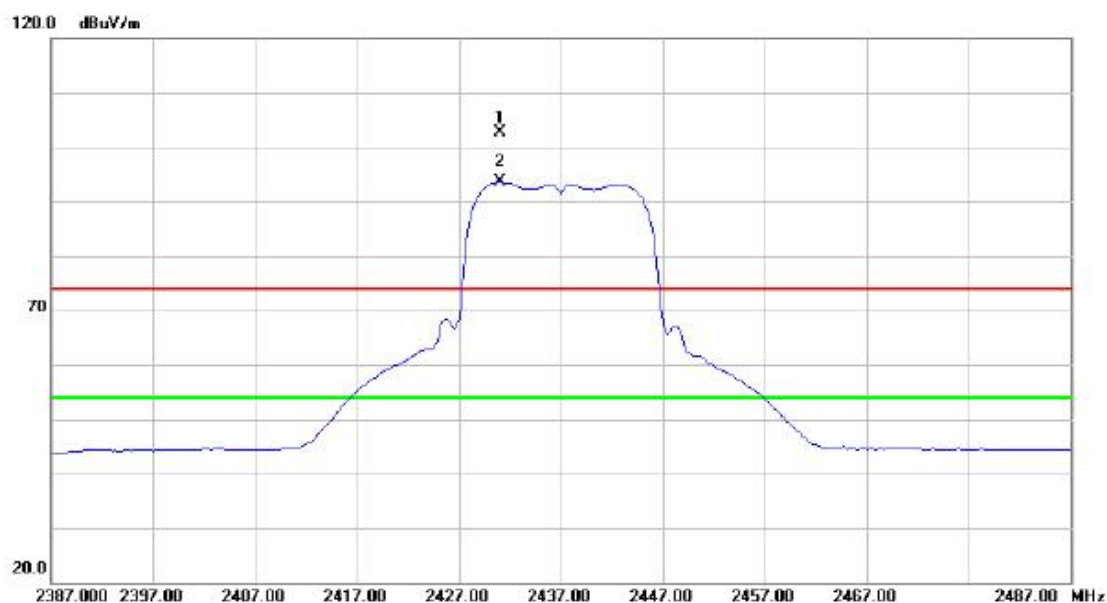

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2431.000	71.34	31.22	102.56	74.00	28.56	peak	NO LIMIT
2	*	2431.000	62.33	31.22	93.55	54.00	39.55	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

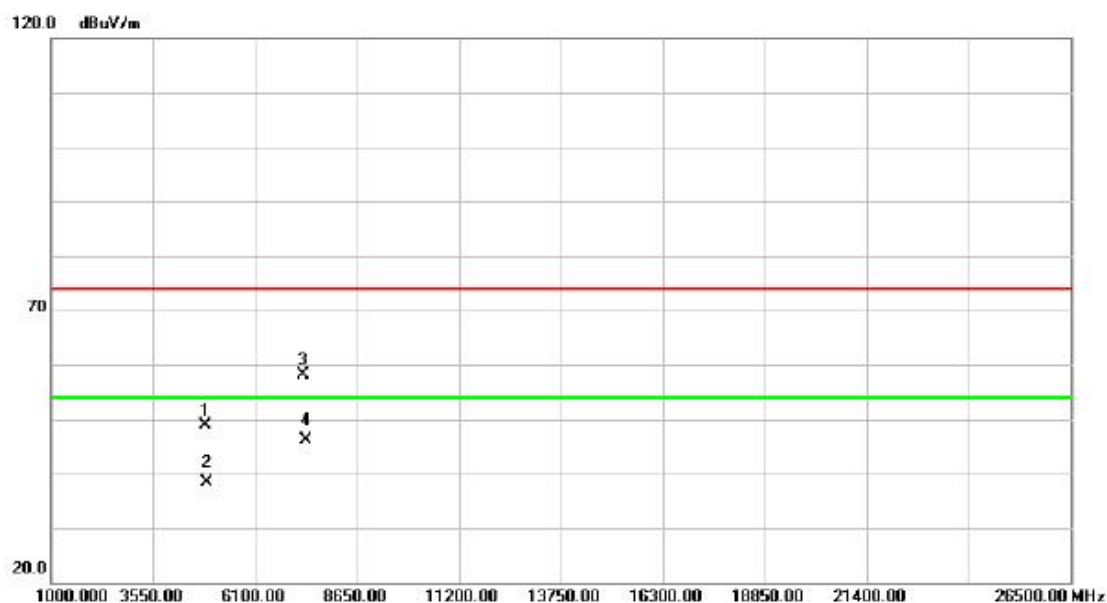

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.055	42.00	6.78	48.78	74.00	-25.22	peak	
2		4874.055	31.50	6.78	38.28	54.00	-15.72	AVG	
3		7311.390	42.64	15.58	58.22	74.00	-15.78	peak	
4	*	7311.390	30.64	15.58	46.22	54.00	-7.78	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical

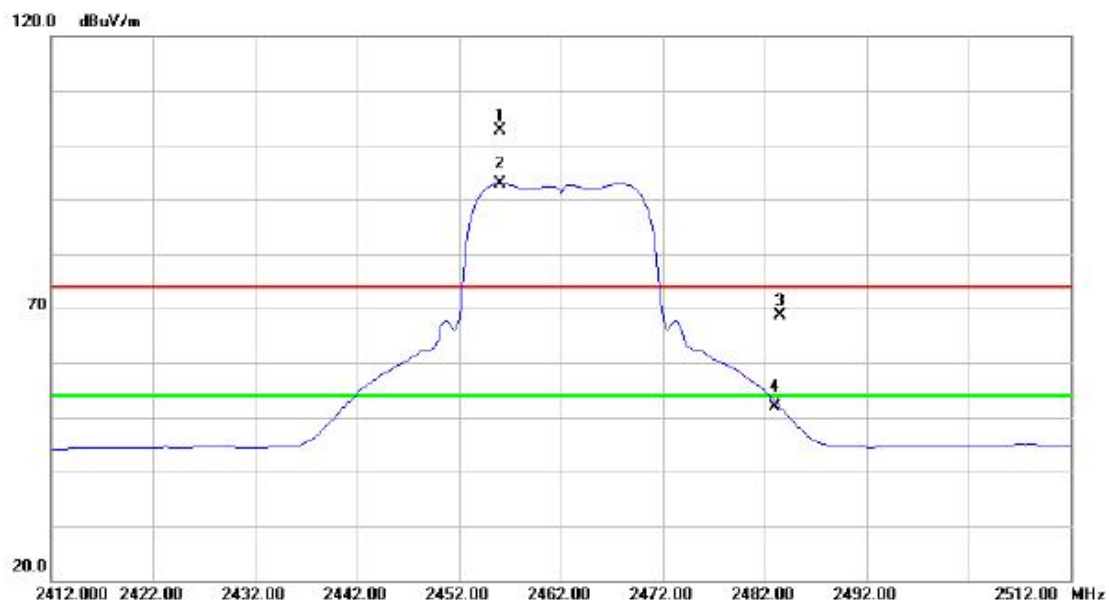

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.000	71.33	31.33	102.66	74.00	28.66	peak	NO LIMIT
2	*	2456.000	61.64	31.33	92.97	54.00	38.97	AVG	NO LIMIT
3		2483.500	37.15	31.46	68.61	74.00	-5.39	peak	
4		2483.500	20.50	31.46	51.96	54.00	-2.04	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4923.875	45.85	6.77	52.62	74.00	-21.38	peak	
2		4923.875	39.15	6.77	45.92	54.00	-8.08	AVG	
3		7385.540	42.21	15.98	58.19	74.00	-15.81	peak	
4	*	7385.540	31.37	15.98	47.35	54.00	-6.65	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Horizontal

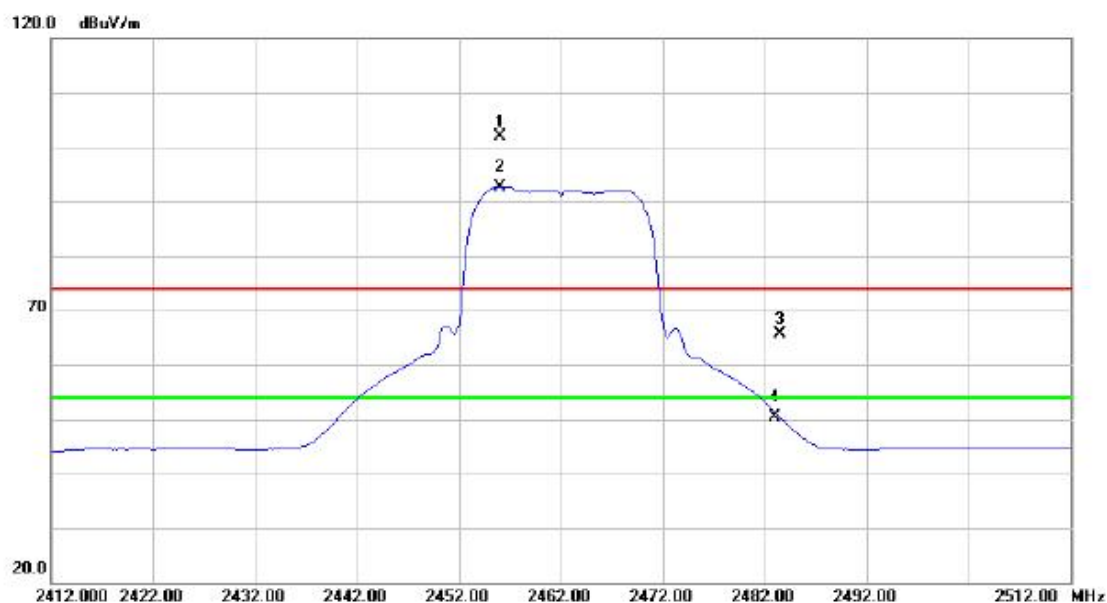

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.000	70.43	31.33	101.76	74.00	27.76	peak	NO LIMIT
2	*	2456.000	61.39	31.33	92.72	54.00	38.72	AVG	NO LIMIT
3		2483.500	34.17	31.46	65.63	74.00	-8.37	peak	
4		2483.500	19.04	31.46	50.50	54.00	-3.50	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

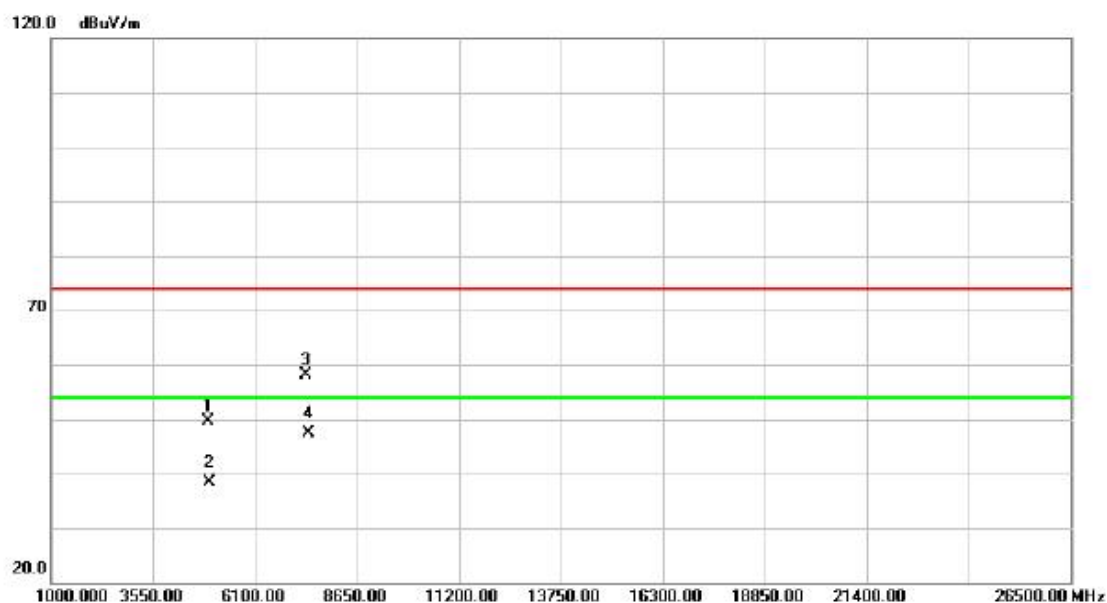


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.400	42.75	6.77	49.52	74.00	-24.48	peak	
2		4924.400	31.63	6.77	38.40	54.00	-15.60	AVG	
3		7386.980	42.04	15.98	58.02	74.00	-15.98	peak	
4	*	7386.980	31.32	15.98	47.30	54.00	-6.70	AVG	

ATTACHMENT E - BANDWIDTH

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.07	15.90	500	Complies
2437	10.02	15.90	500	Complies
2462	10.12	15.90	500	Complies

TX CH01

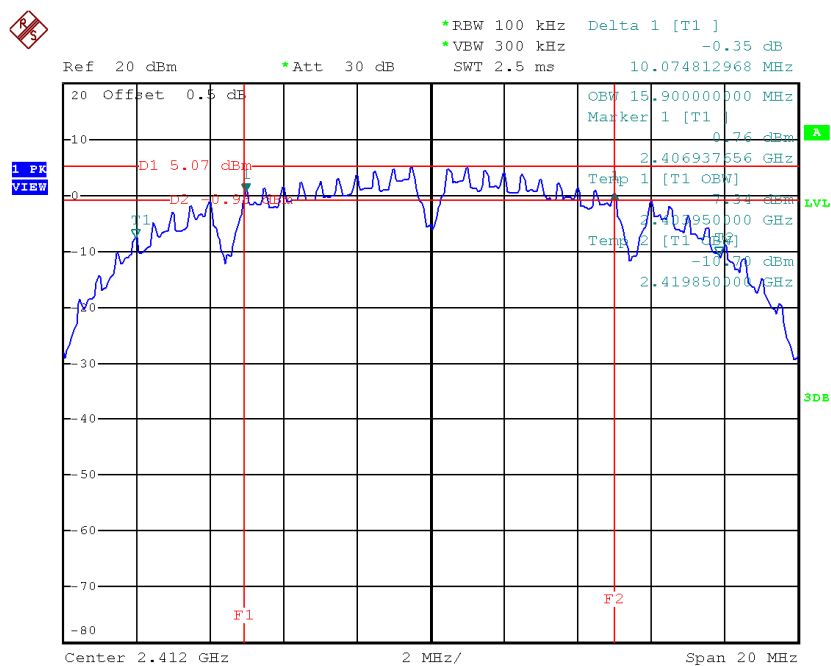


Date: 8.JAN.2015 19:17:19

TX CH06

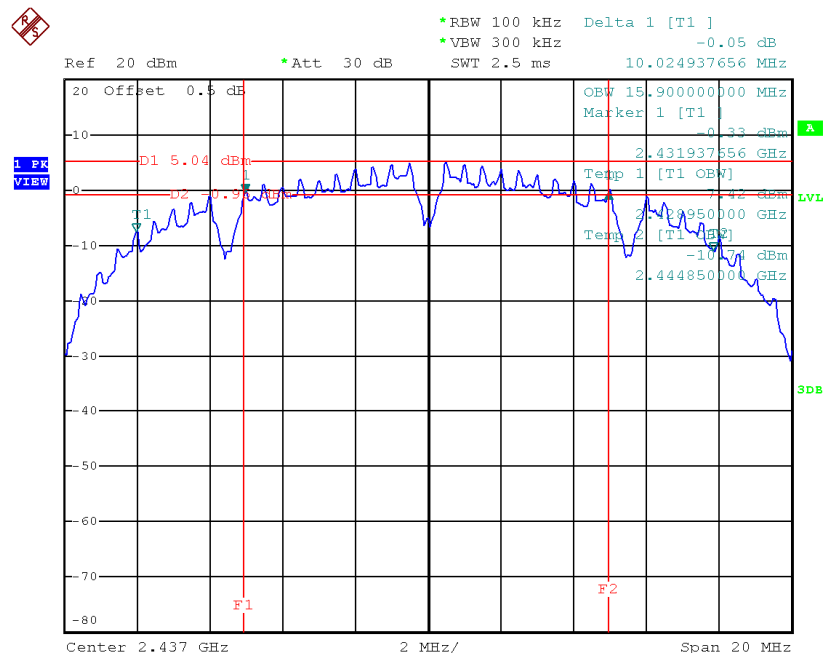


Date: 8.JAN.2015 19:22:21

TX CH11

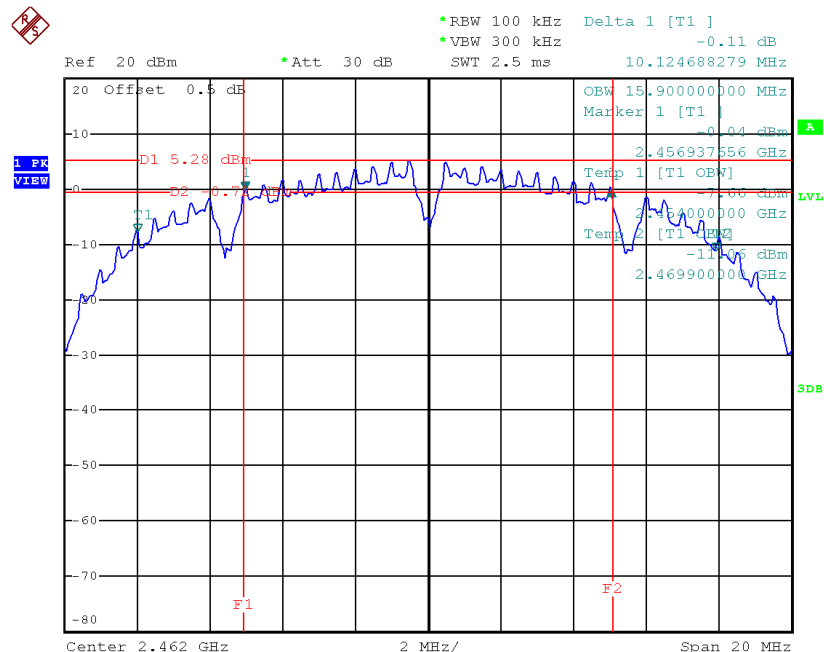


Date: 8.JAN.2015 19:25:35

TX CH06

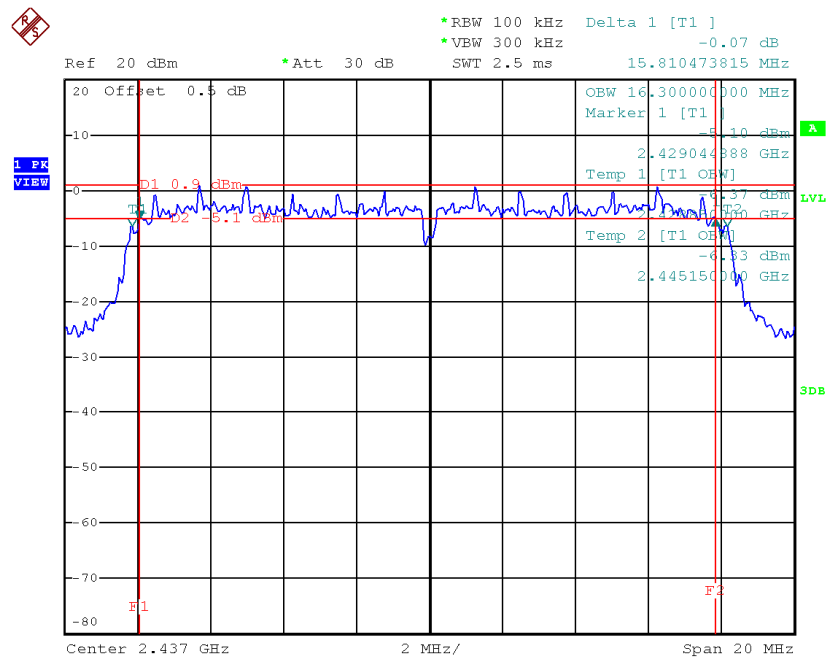

Date: 8.JAN.2015 19:32:22

TX CH11

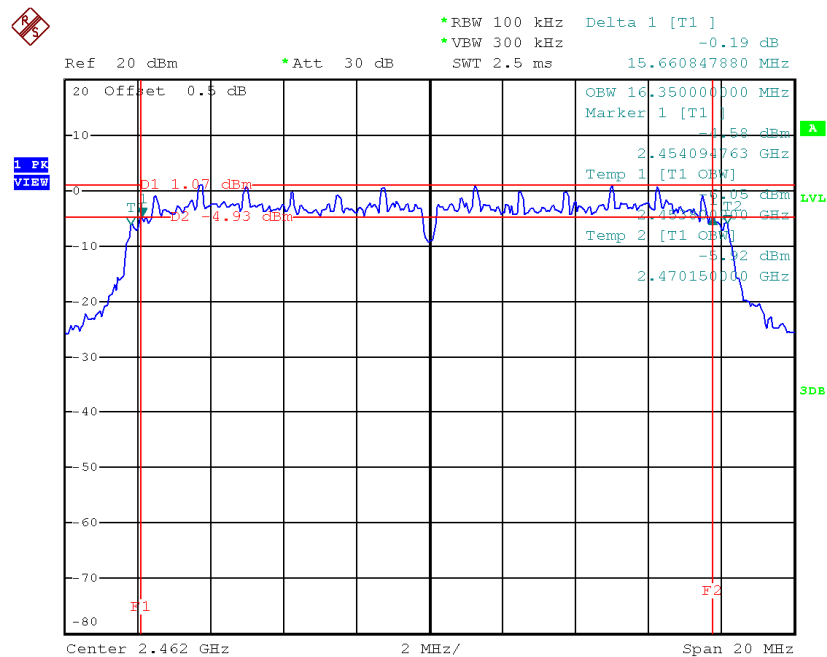


Date: 8.JAN.2015 19:37:52

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.51	17.25	500	Complies
2437	15.51	17.25	500	Complies
2462	15.16	17.25	500	Complies

TX CH01

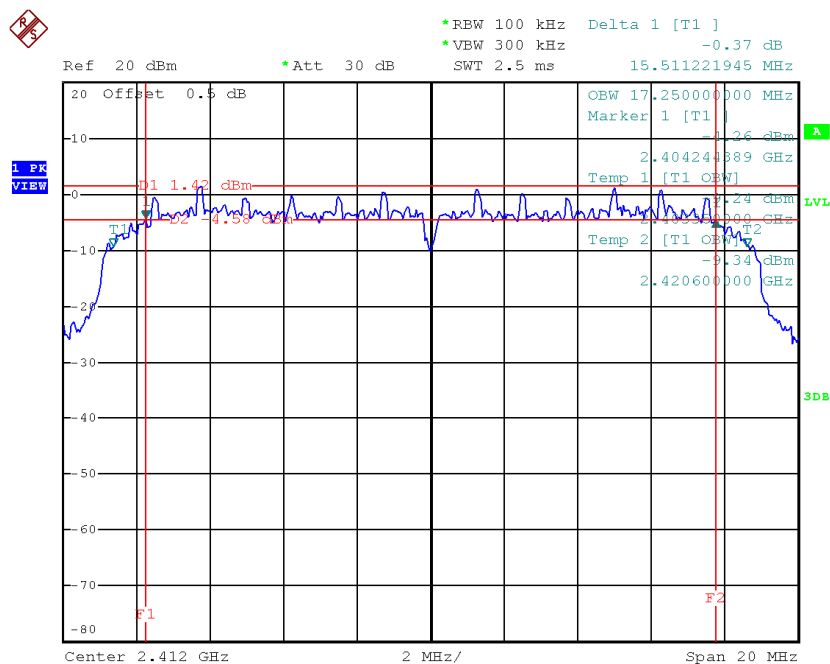


Date: 8.JAN.2015 19:41:31

TX CH06

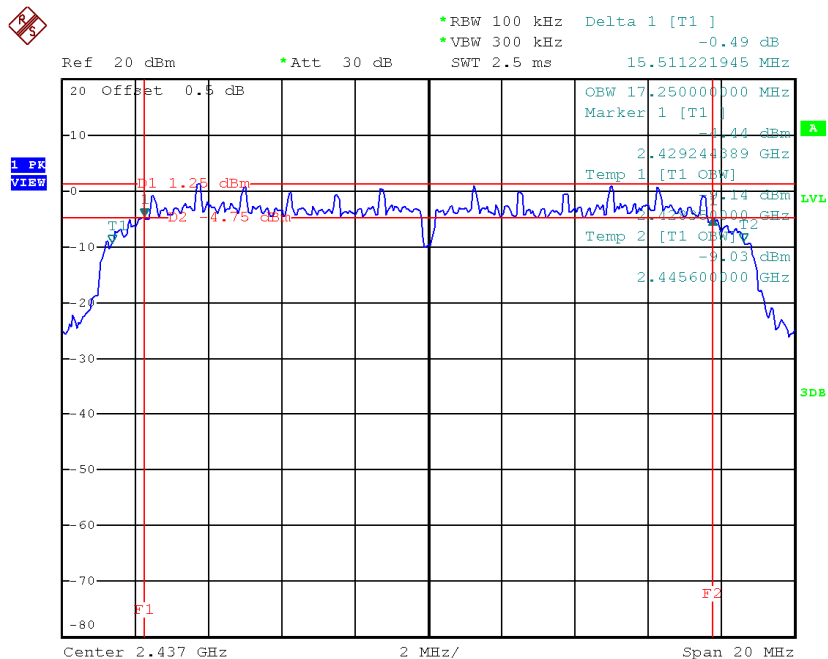

Date: 8.JAN.2015 19:44:37

TX CH11

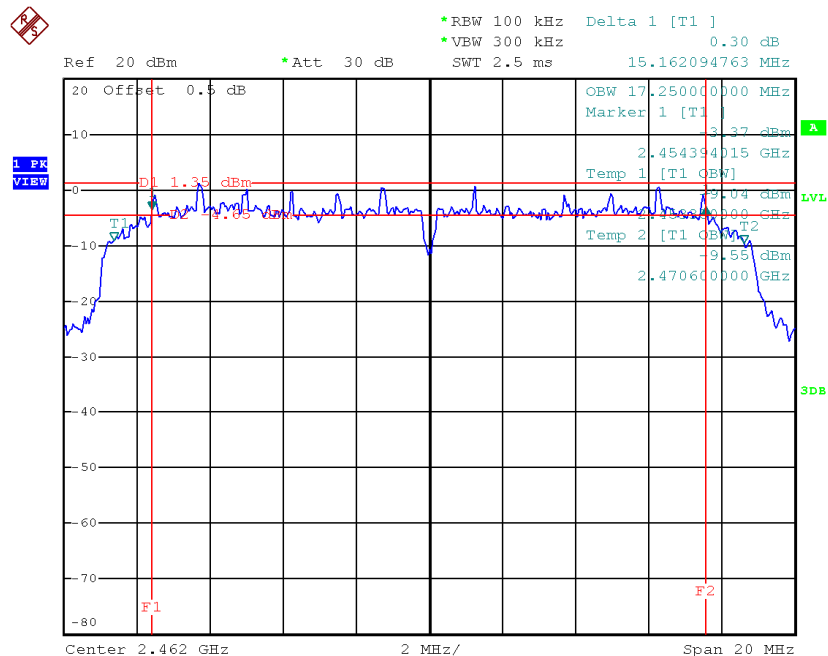

Date: 8.JAN.2015 20:04:35

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	14.94	0.03	30.00	1.00	Complies
2437	14.89	0.03	30.00	1.00	Complies
2462	14.74	0.03	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.47	0.09	30.00	1.00	Complies
2437	19.33	0.09	30.00	1.00	Complies
2462	19.48	0.09	30.00	1.00	Complies


Test Mode :TX N20 Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.45	0.09	30.00	1.00	Complies
2437	19.24	0.08	30.00	1.00	Complies
2462	19.03	0.08	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode :	TX B Mode
--------------------	------------------

TX B mode CH01

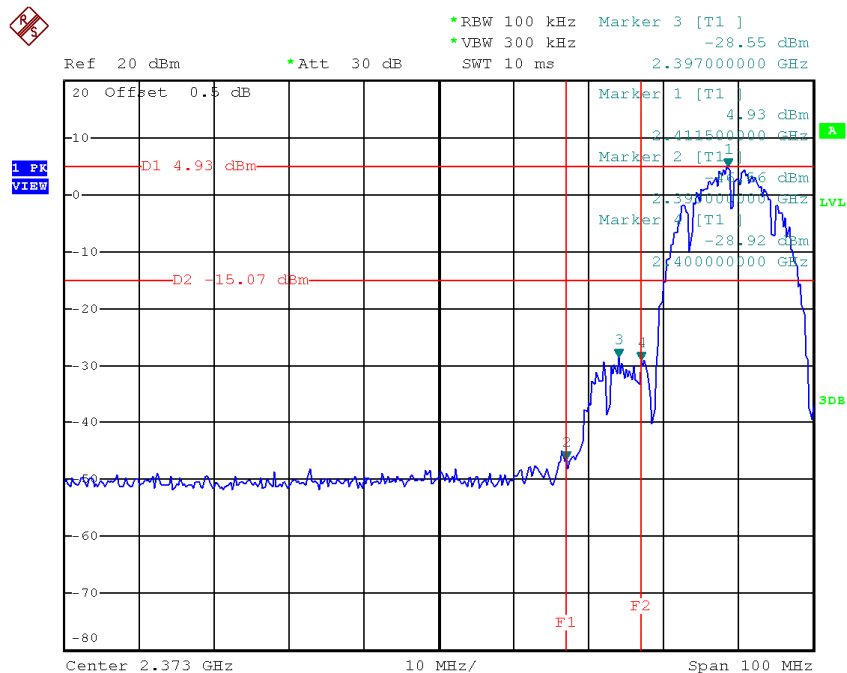


Date: 8.JAN.2015 19:17:32

TX B mode CH11

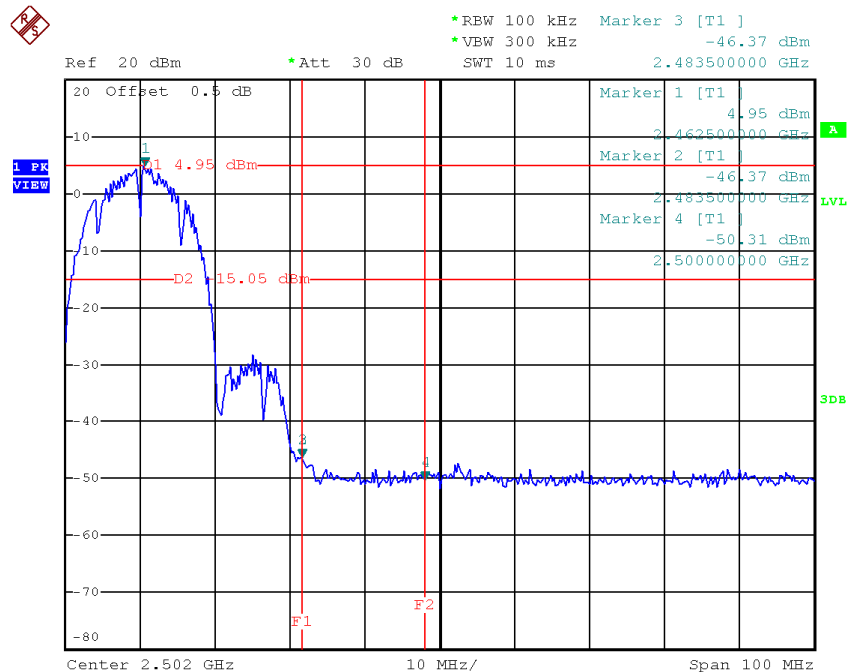


Date: 8.JAN.2015 19:25:51

TX B mode CH01 (10 Harmonic of the frequency)

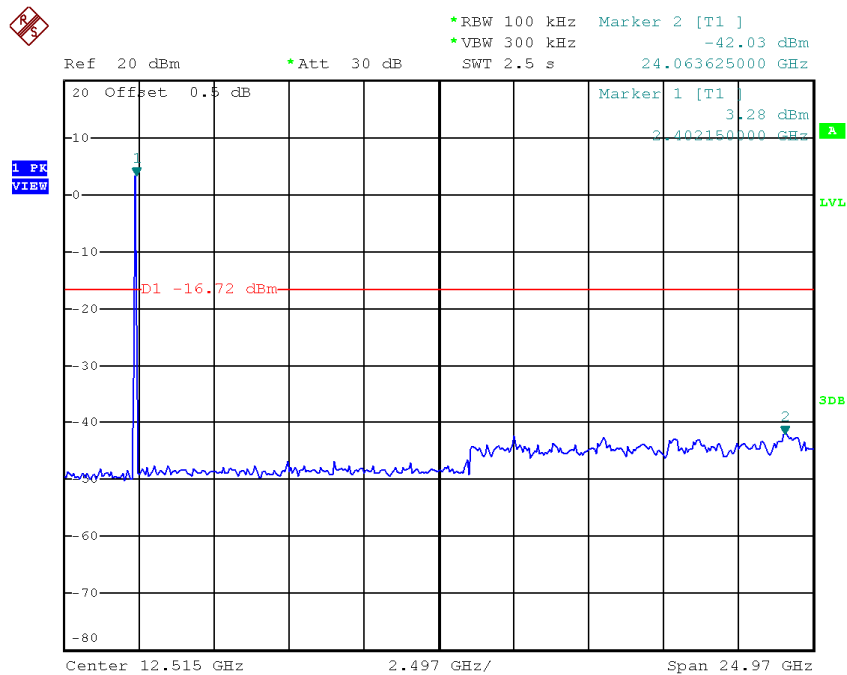


Date: 8.JAN.2015 19:19:18

TX B mode CH06 (10 Harmonic of the frequency)

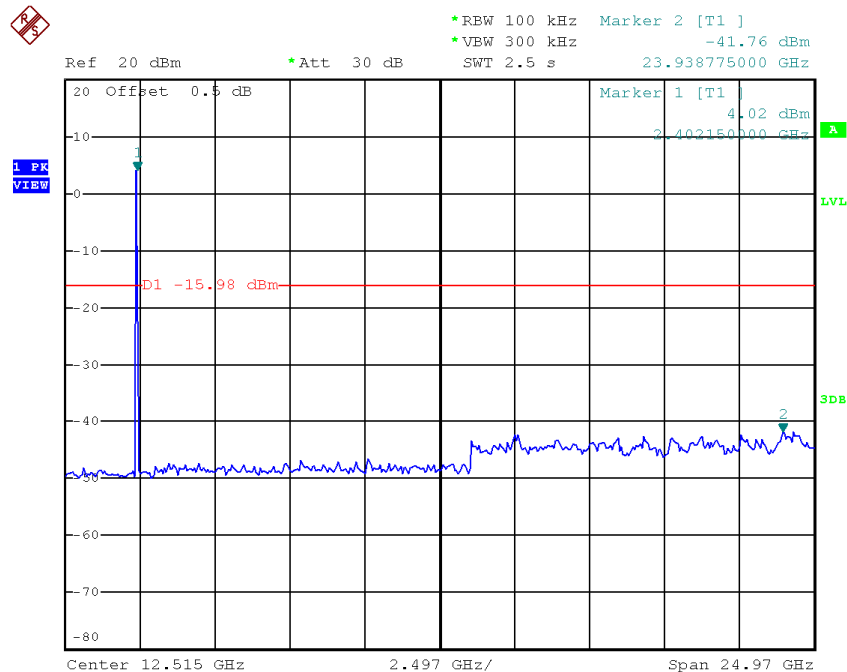

Date: 8.JAN.2015 19:21:41


TX B mode CH11 (10 Harmonic of the frequency)

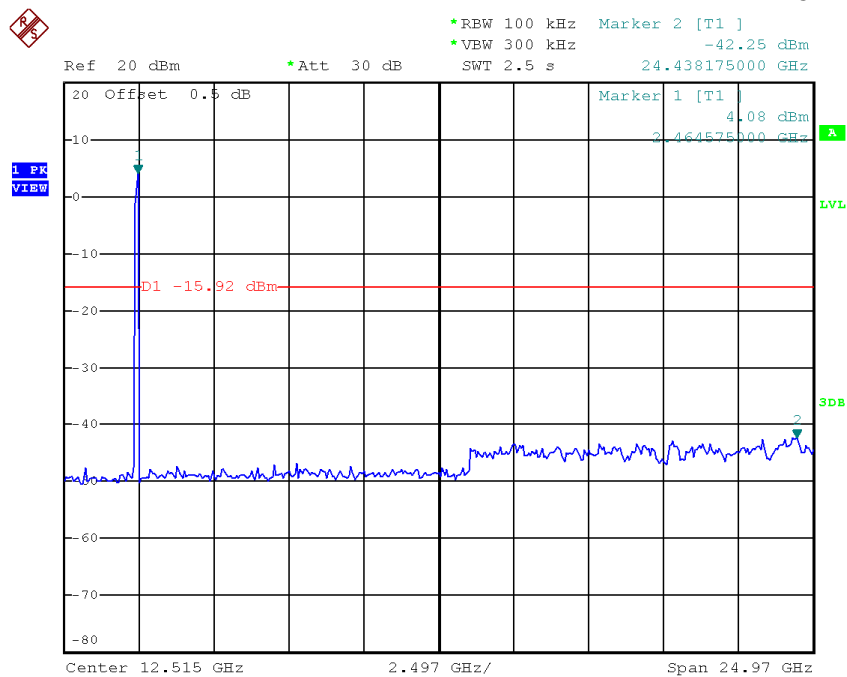

Date: 8.JAN.2015 19:25:14


Test Mode :	TX G Mode
--------------------	------------------

TX G mode CH01

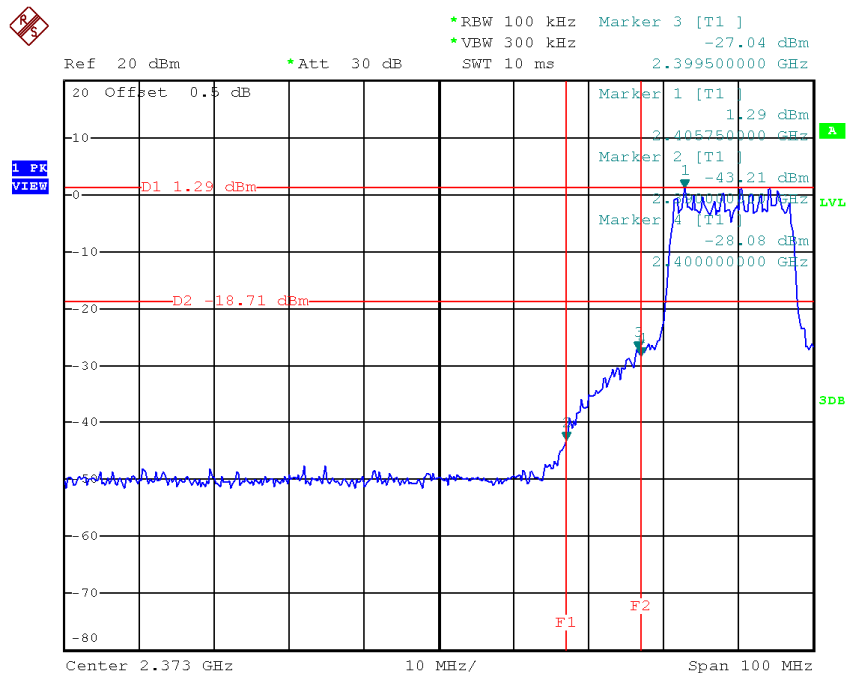


Date: 8.JAN.2015 19:29:50

TX G mode CH11

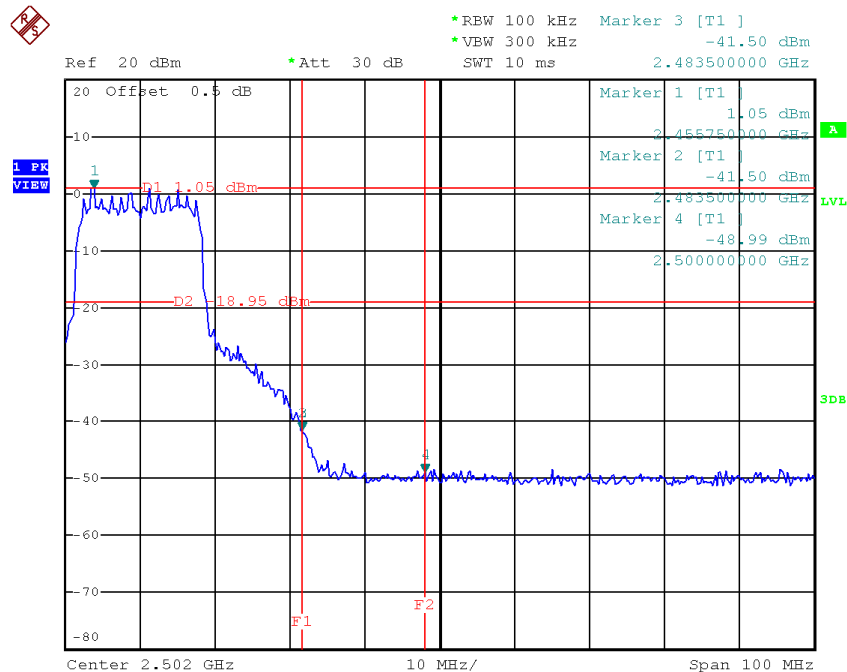


Date: 8.JAN.2015 19:38:11

TX G mode CH01 (10 Harmonic of the frequency)

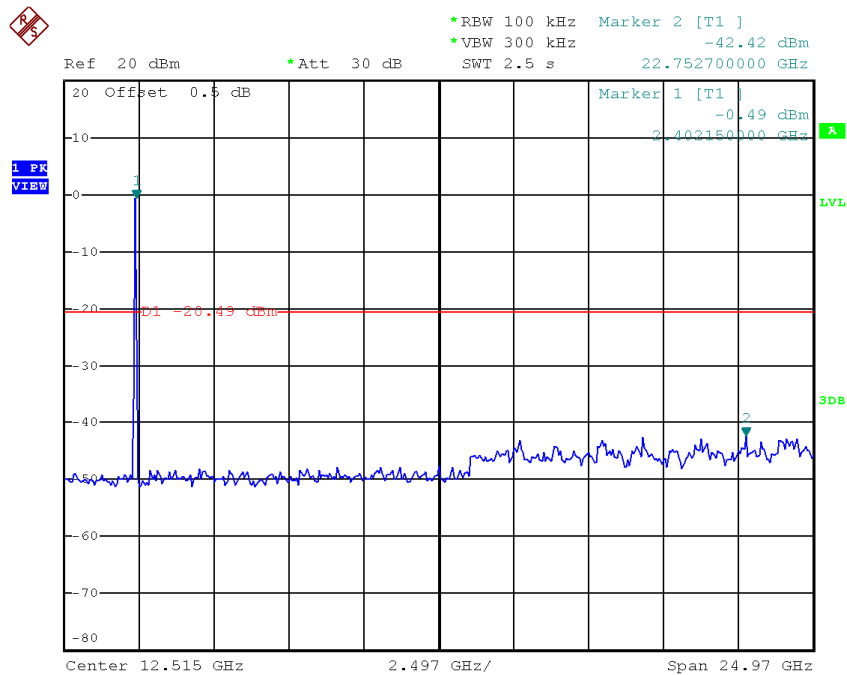


Date: 8.JAN.2015 19:29:15

TX G mode CH06 (10 Harmonic of the frequency)

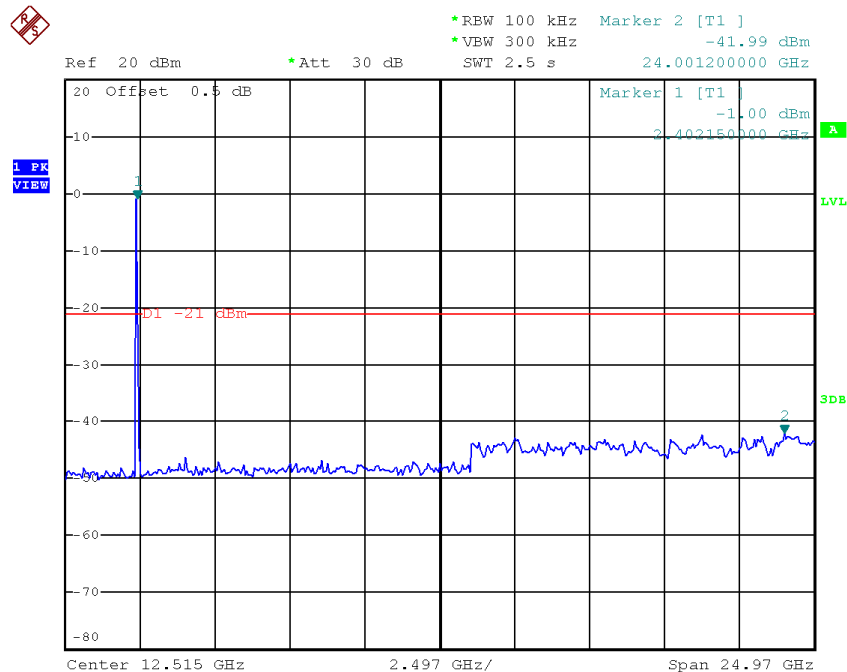

Date: 8.JAN.2015 19:32:06


TX G mode CH11 (10 Harmonic of the frequency)

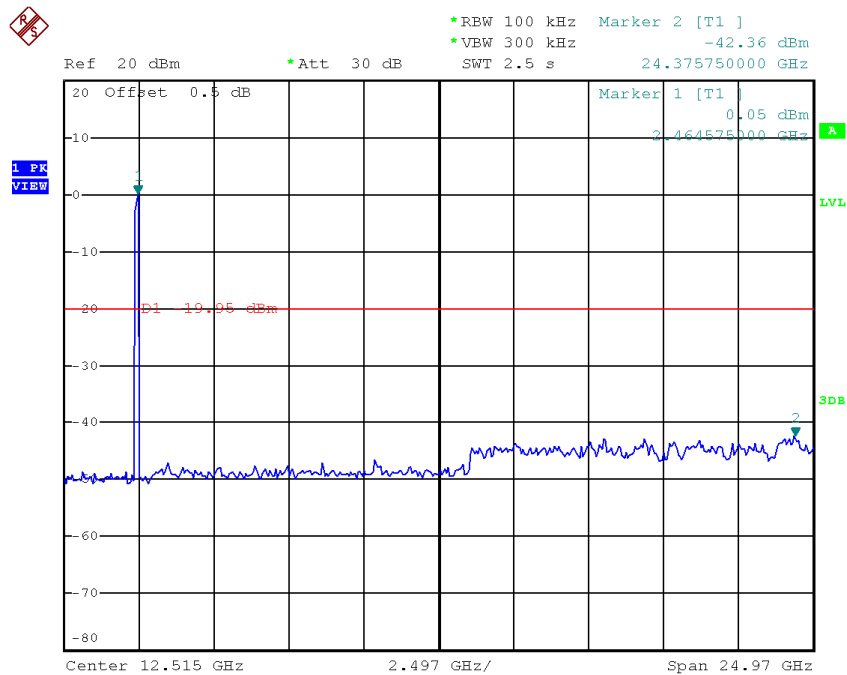

Date: 8.JAN.2015 19:37:25


Test Mode :	TX N-20M Mode
--------------------	----------------------

TX HT20 mode CH01

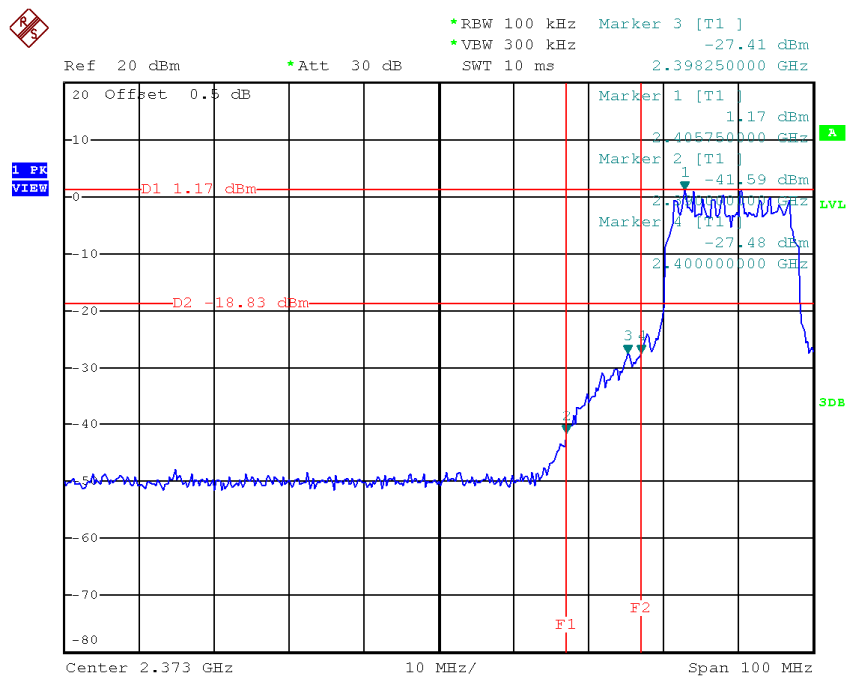


Date: 8.JAN.2015 19:41:49

TX HT20 mode CH11

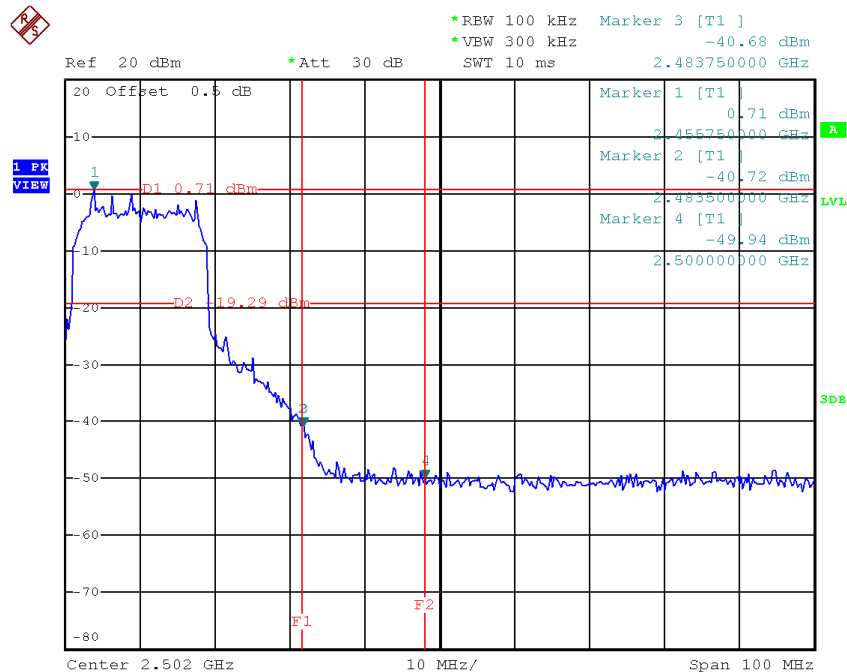


Date: 8.JAN.2015 20:04:47

TX HT20 mode CH01 (10 Harmonic of the frequency)

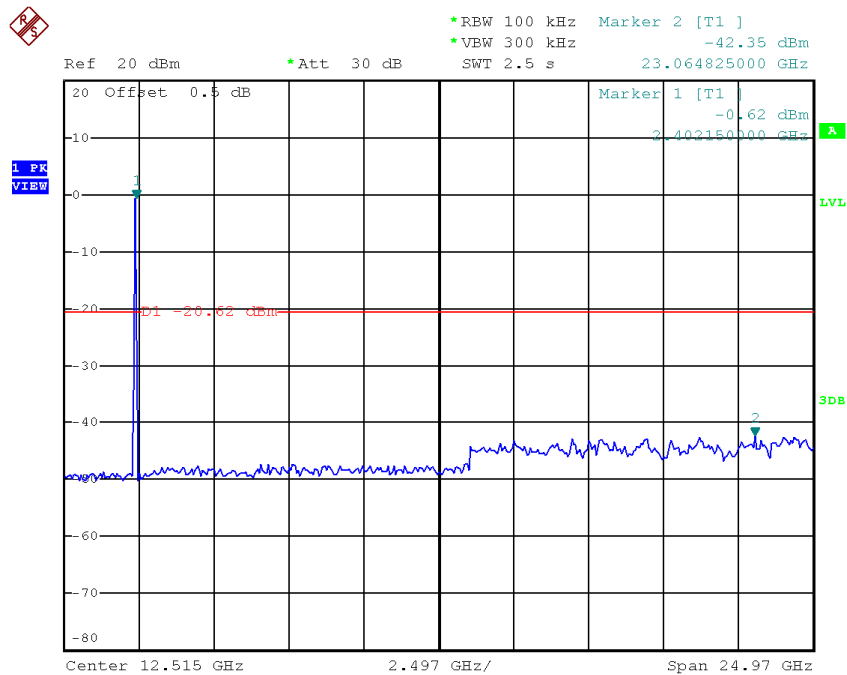


Date: 8.JAN.2015 19:41:11

TX HT20 mode CH06 (10 Harmonic of the frequency)

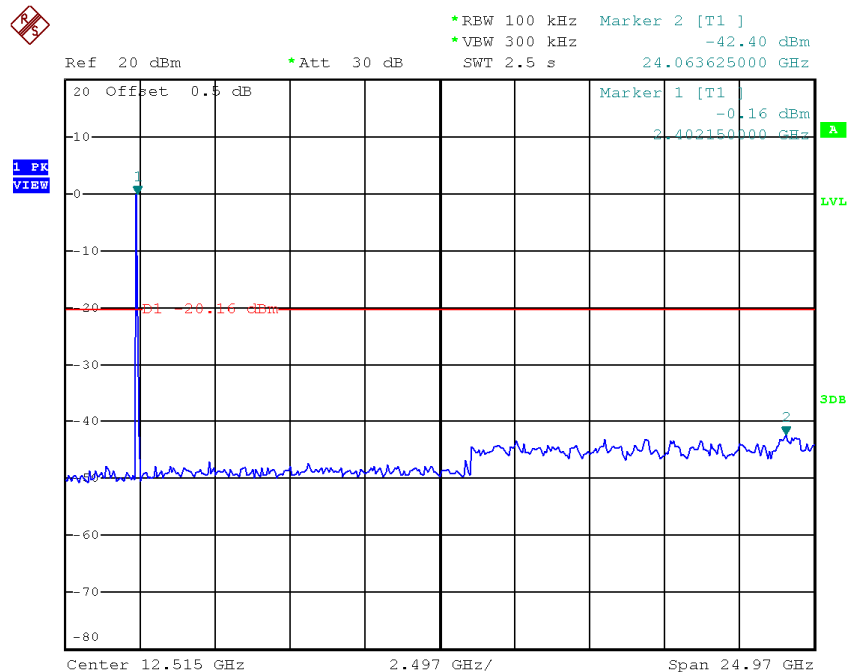

Date: 8.JAN.2015 19:43:57

TX HT20 mode CH11 (10 Harmonic of the frequency)

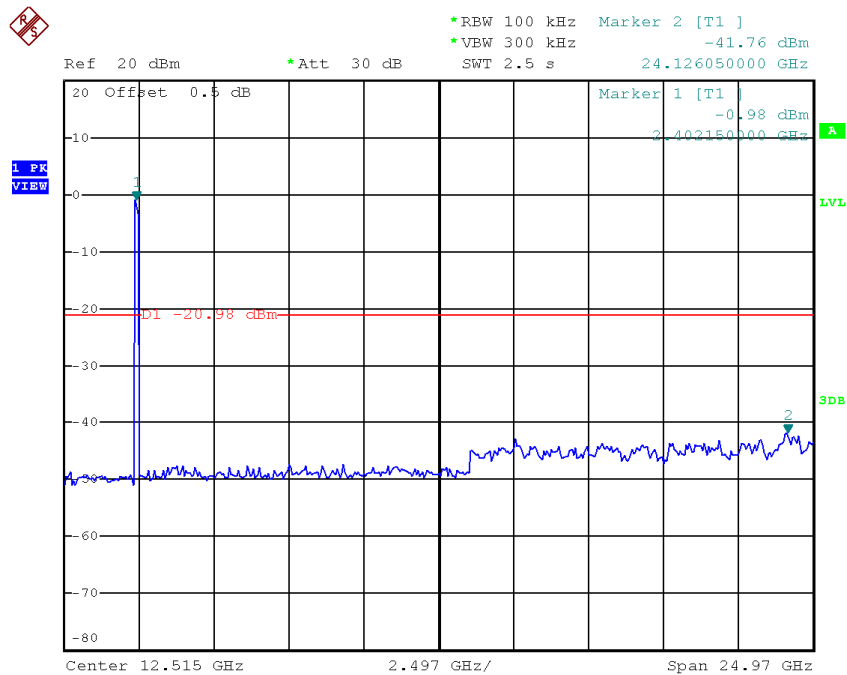


Date: 8.JAN.2015 20:05:32

ATTACHMENT H - POWER SPECTRAL DENSITY

Test Mode :TX B Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-8.18	0.15	8.00	Complies
2437	-9.33	0.12	8.00	Complies
2462	-8.60	0.14	8.00	Complies

TX CH01

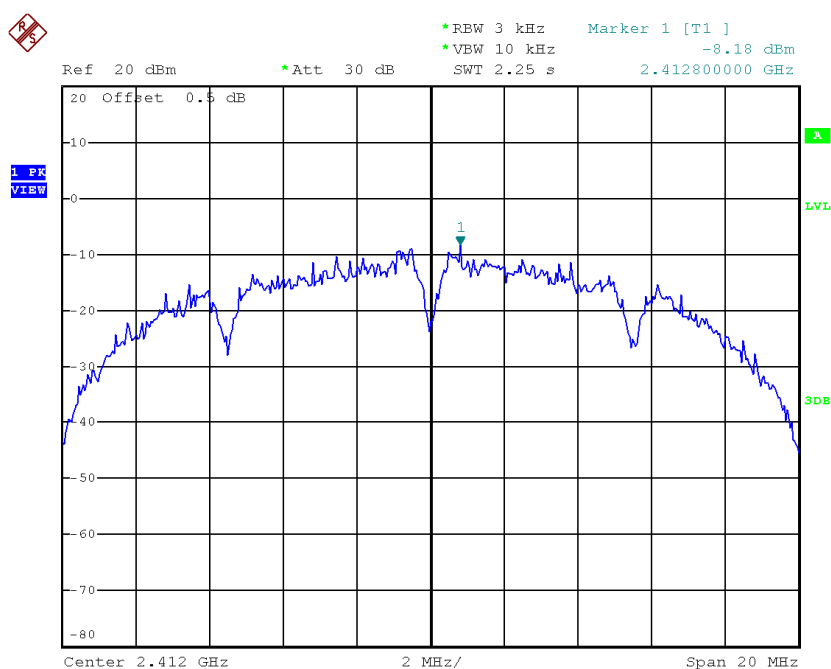


Date: 8.JAN.2015 19:17:52

TX CH06

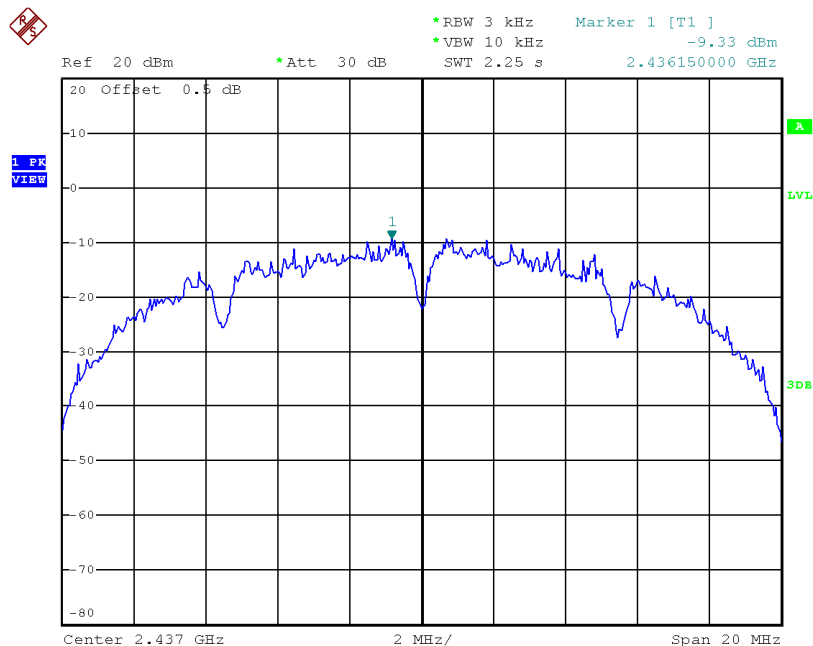

Date: 8.JAN.2015 19:22:46

TX CH11

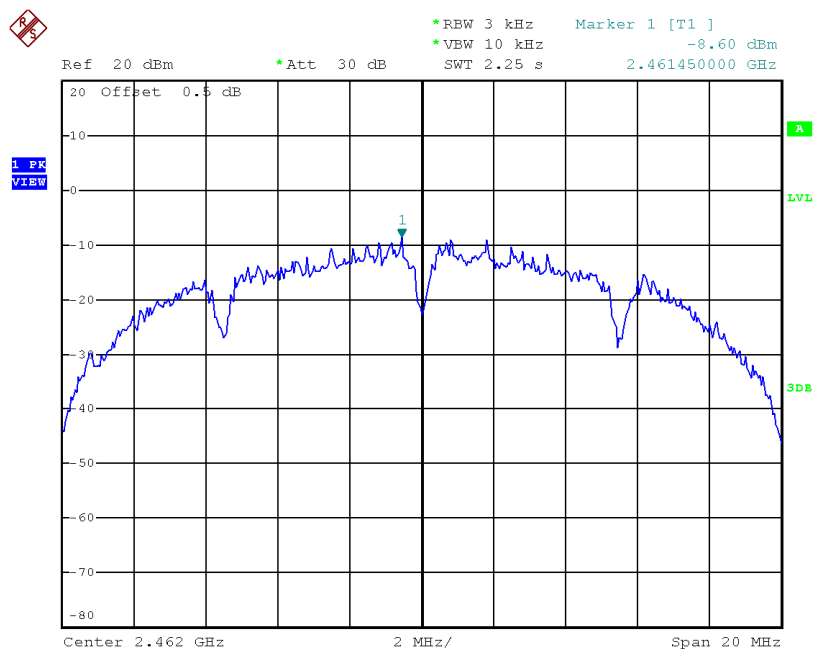


Date: 8.JAN.2015 19:26:11

Test Mode :TX G Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.05	0.08	8.00	Complies
2437	-14.05	0.04	8.00	Complies
2462	-12.45	0.06	8.00	Complies

TX CH01

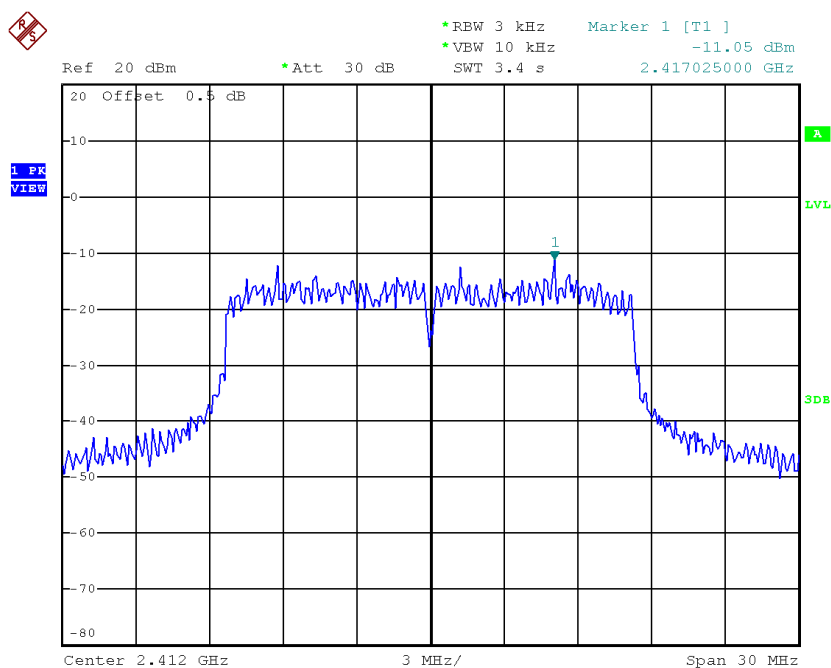


Date: 8.JAN.2015 19:30:15

TX CH06

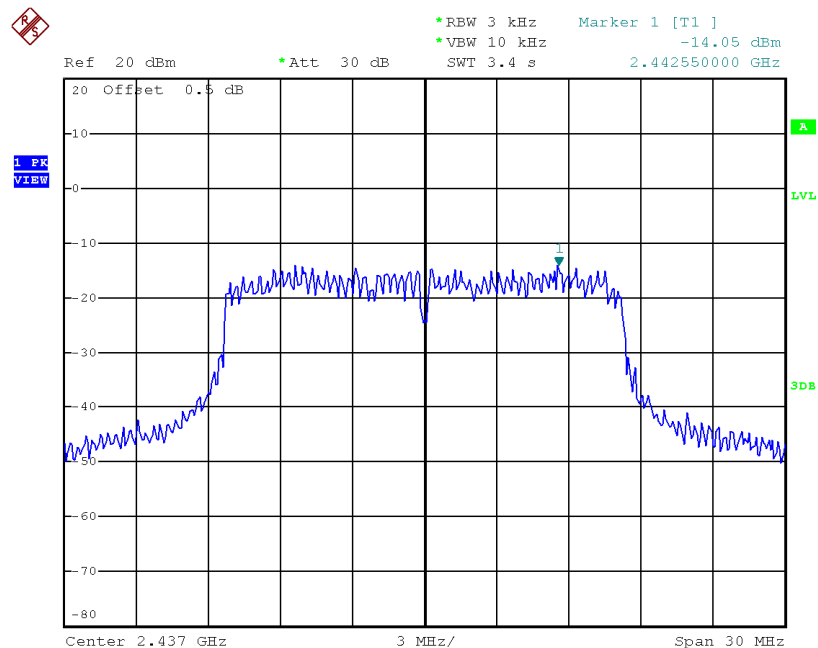

Date: 8.JAN.2015 19:32:47

TX CH11

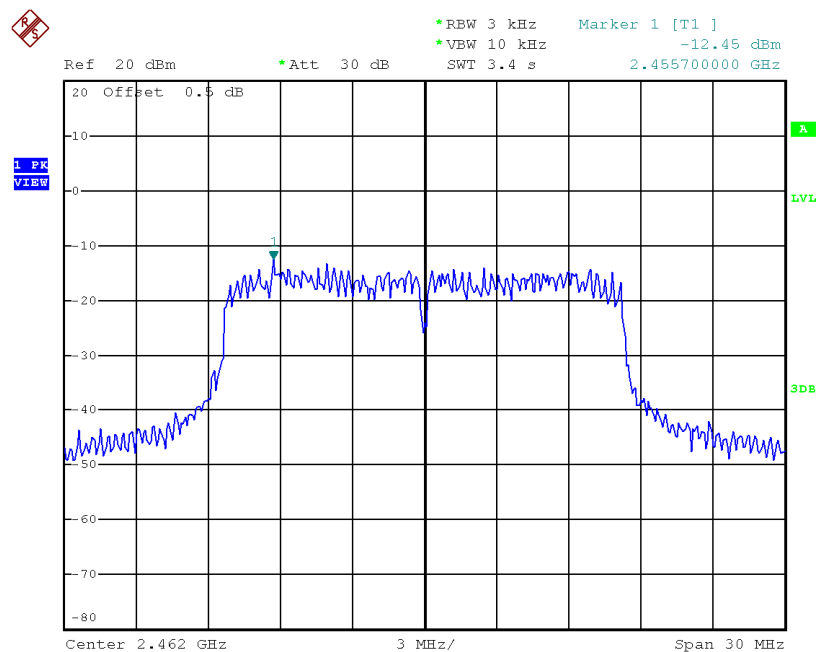


Date: 8.JAN.2015 19:38:57

Test Mode : TX N-20M Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-13.54	0.04	8.00	Complies
2437	-13.58	0.04	8.00	Complies
2462	-13.92	0.04	8.00	Complies

TX CH01

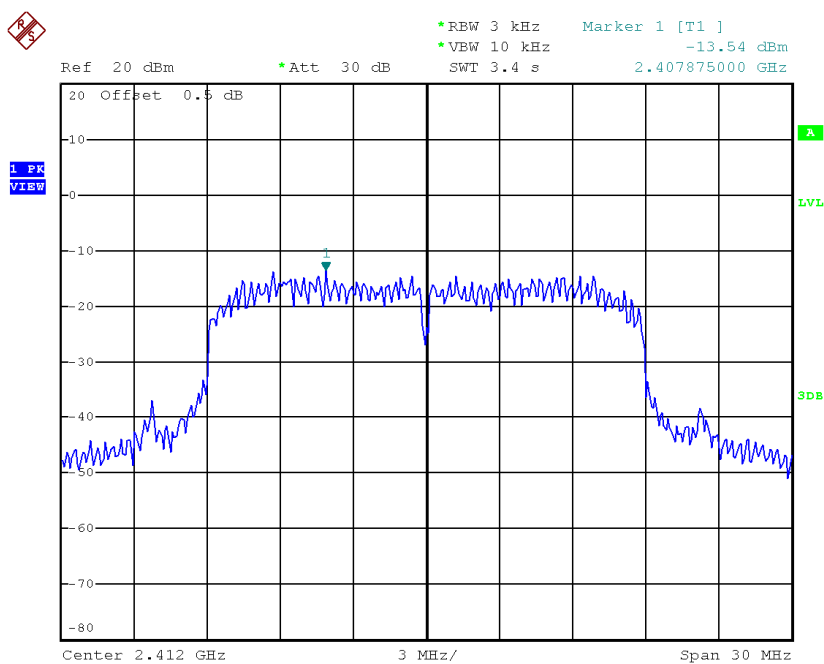


Date: 8.JAN.2015 19:42:17

TX CH06

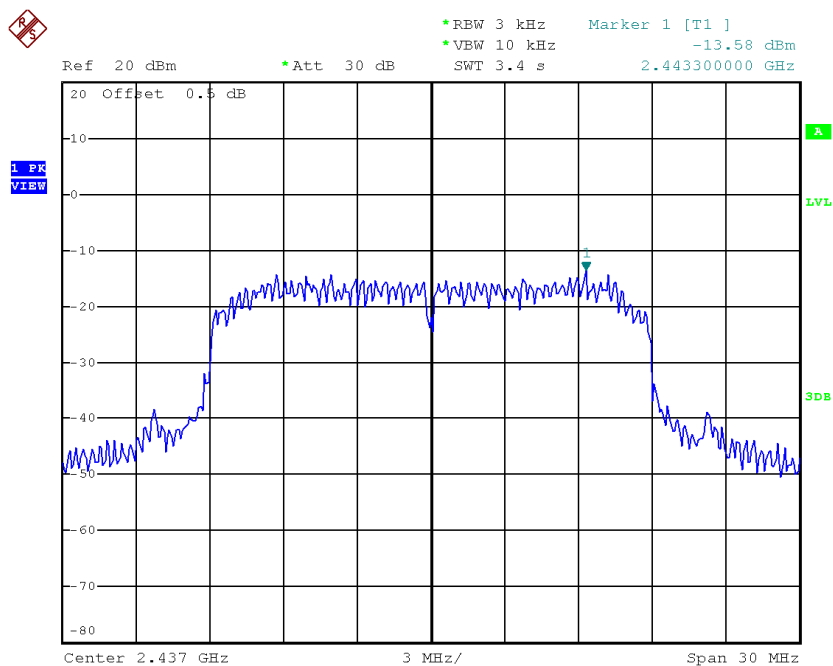

Date: 8.JAN.2015 19:45:07

TX CH11

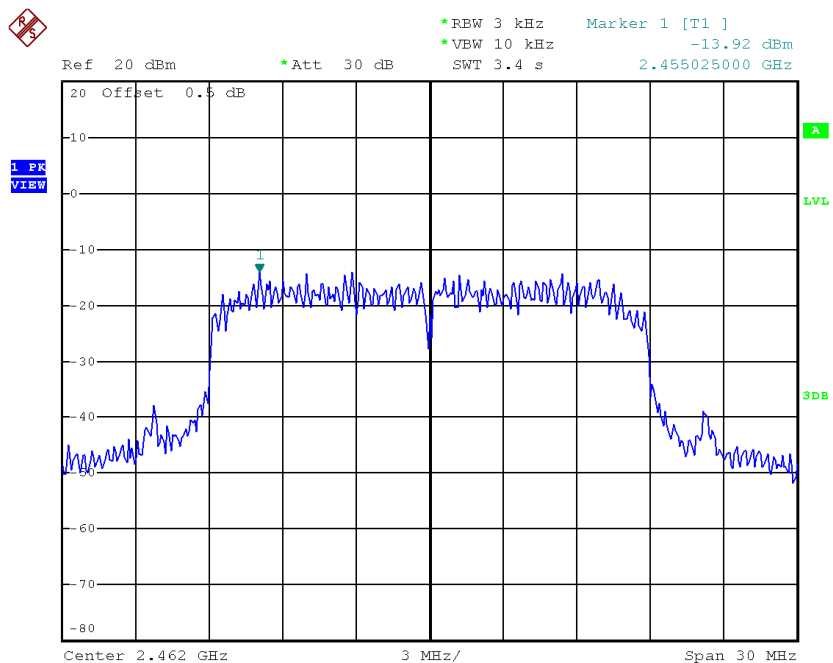

Date: 8.JAN.2015 20:05:03