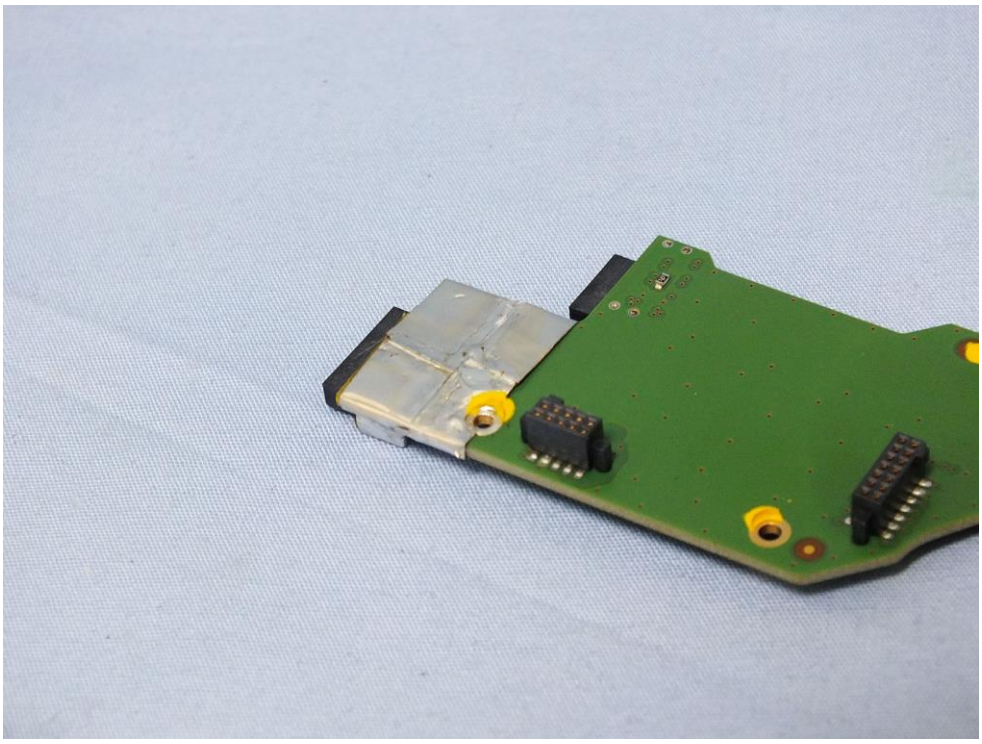
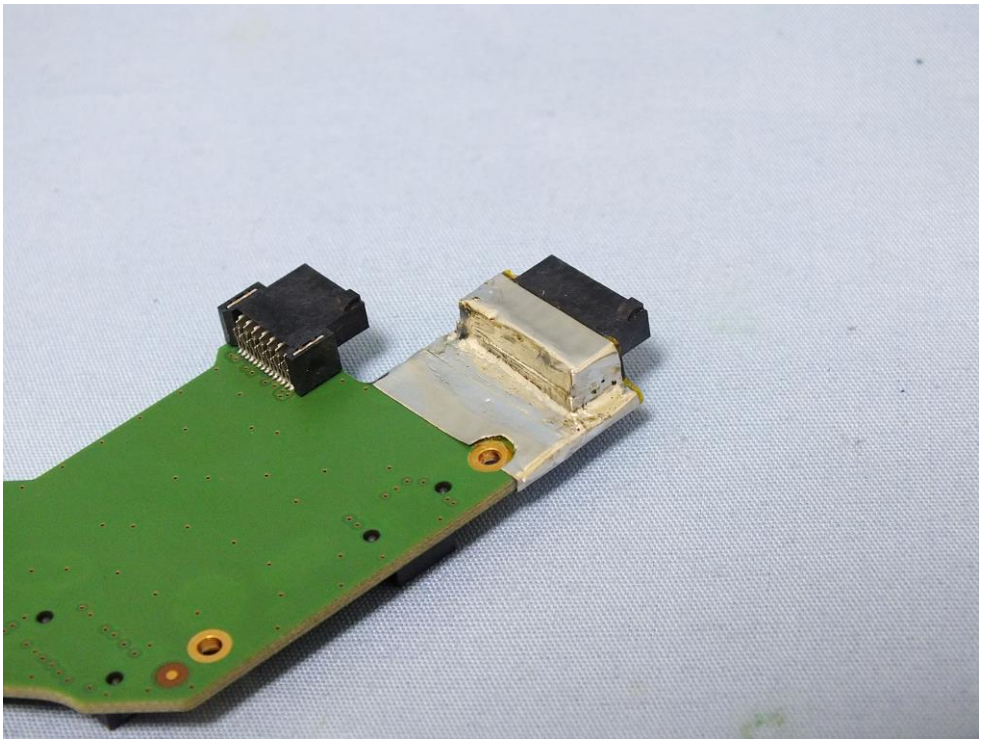
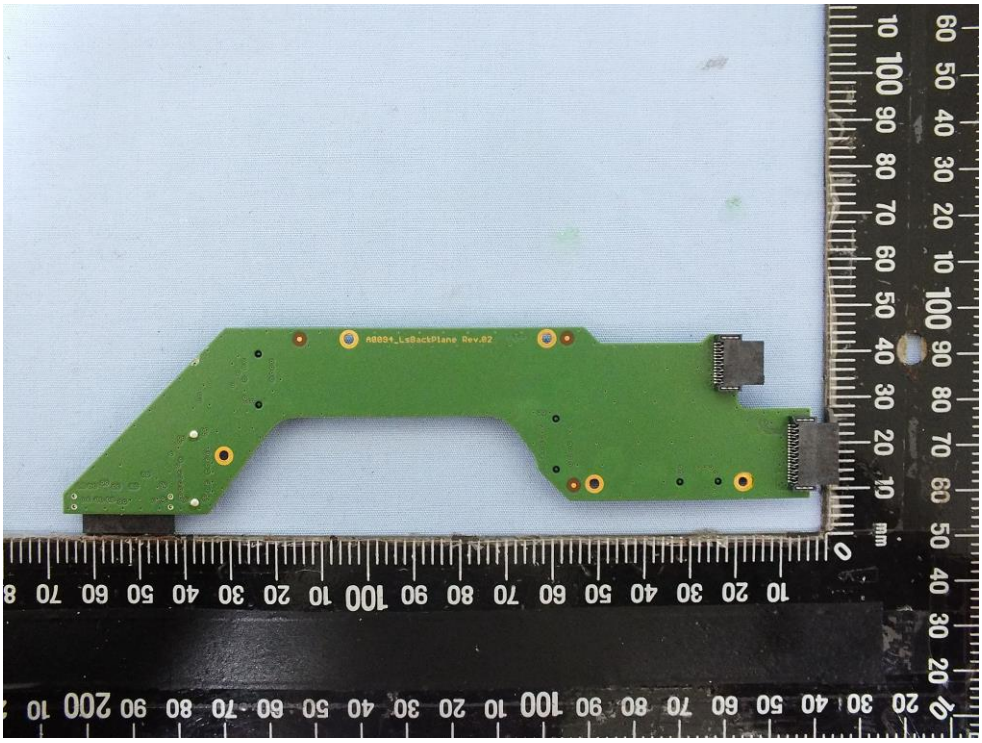
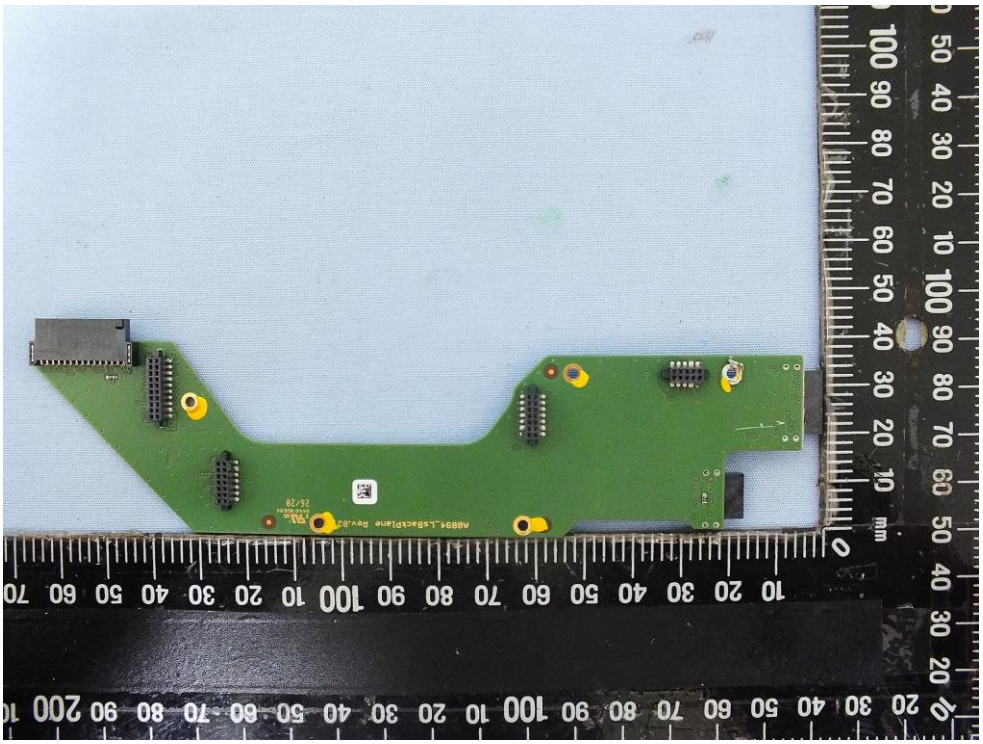
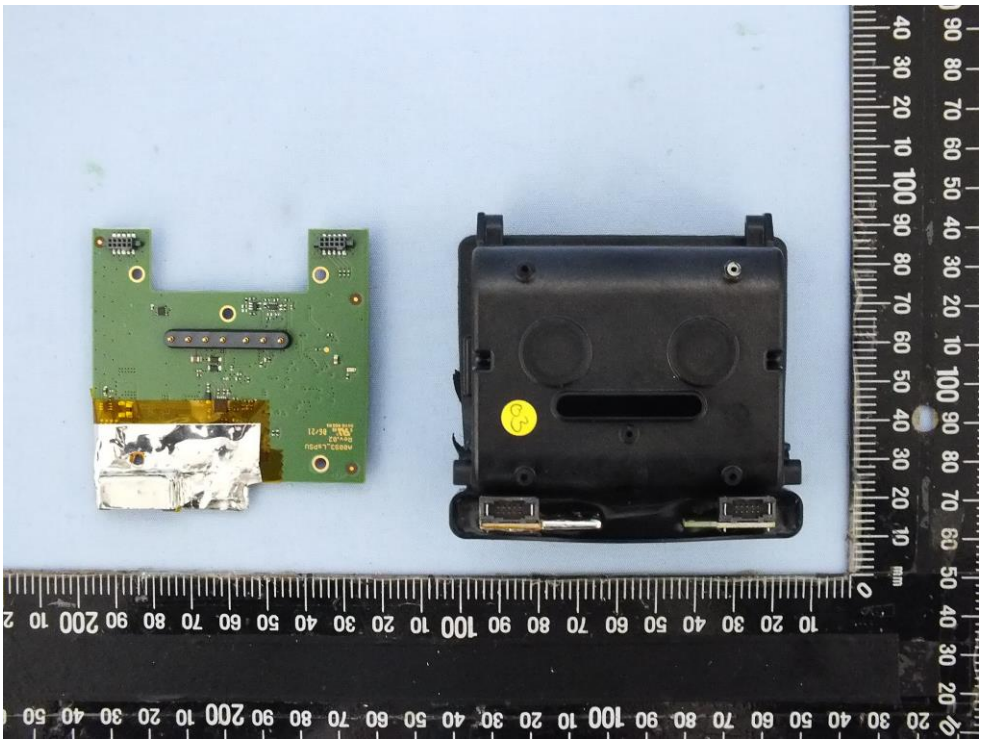

MRSR038B-010C-1C8BS-FB0GSN-NNN
CSN A2502_05.00-R0-14168
KW 31/21
U_{DC}=12 V M_0=16 Ncm P_n=47 W k_e=0,018 V_s
WITTENSTEIN cyber motor GmbH D-97999 Igersheim

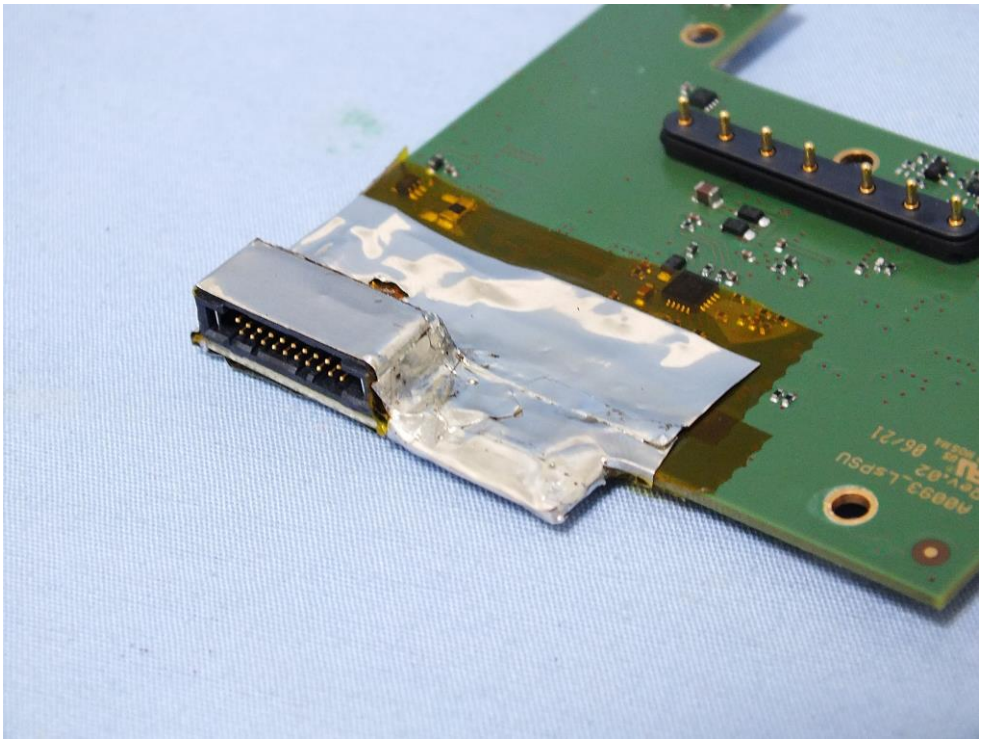


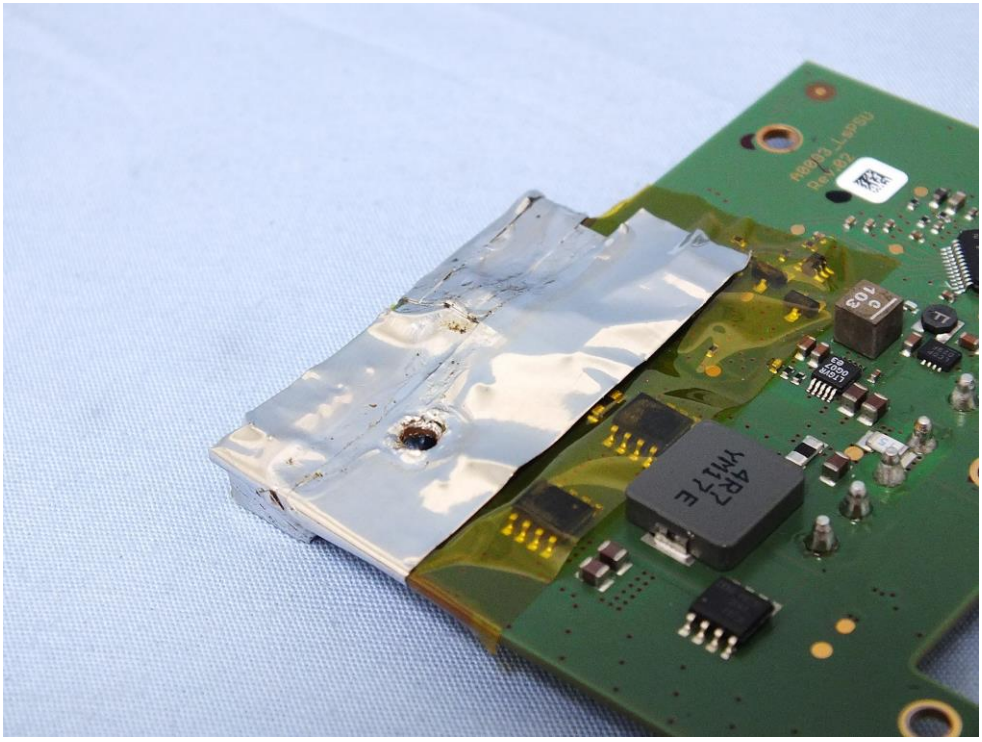


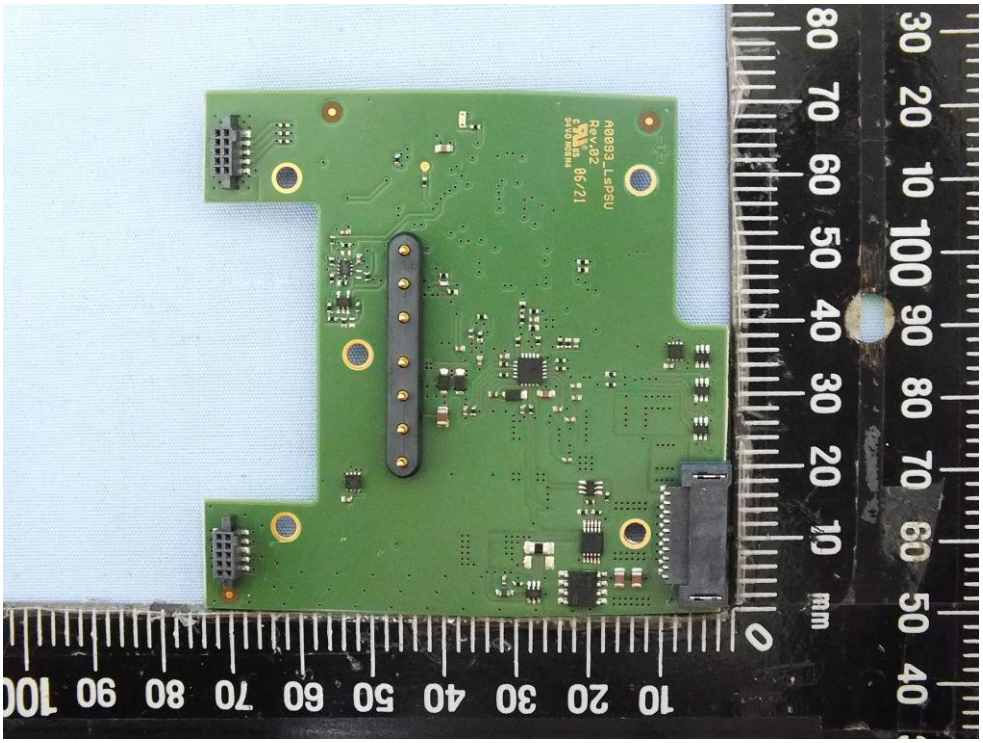

A0004_LsBackPlane Rev.02

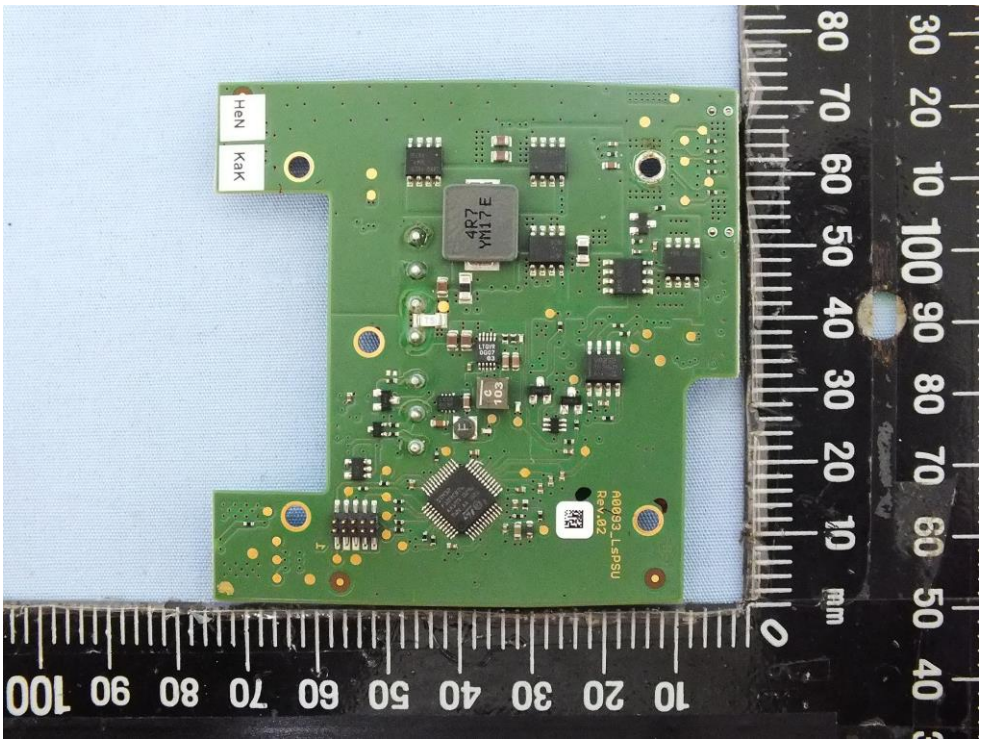


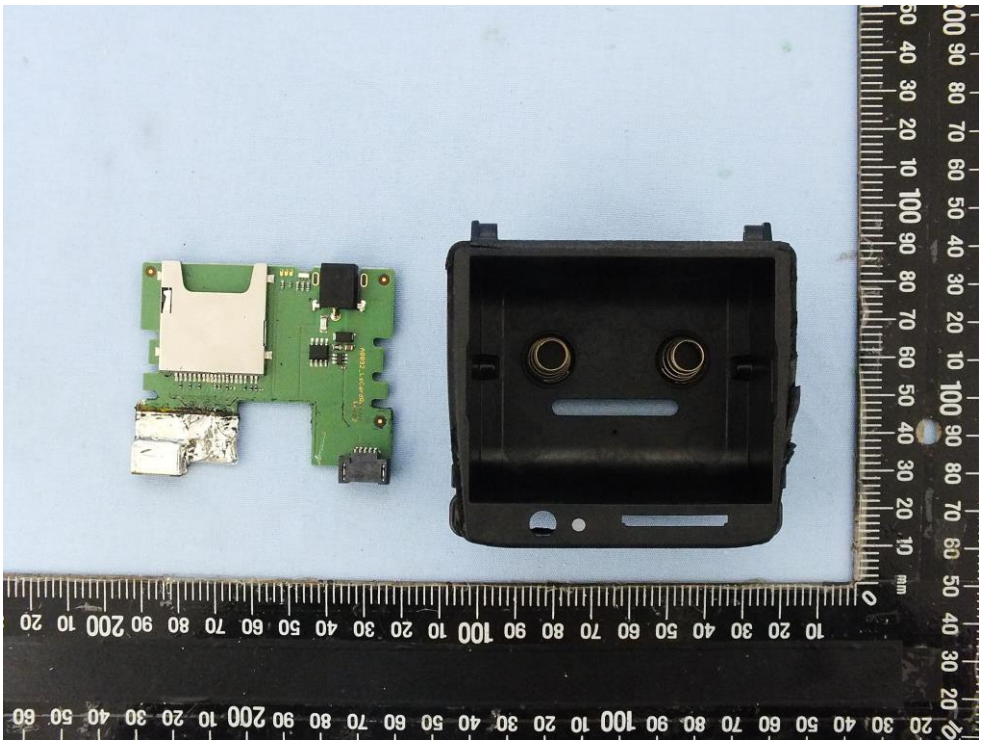


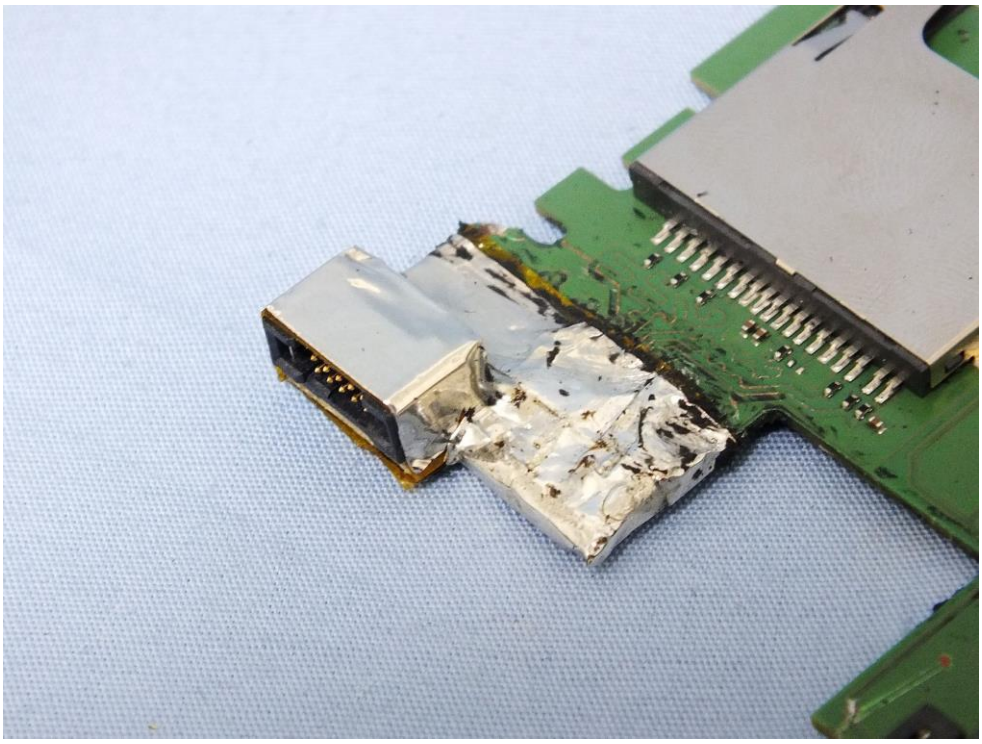


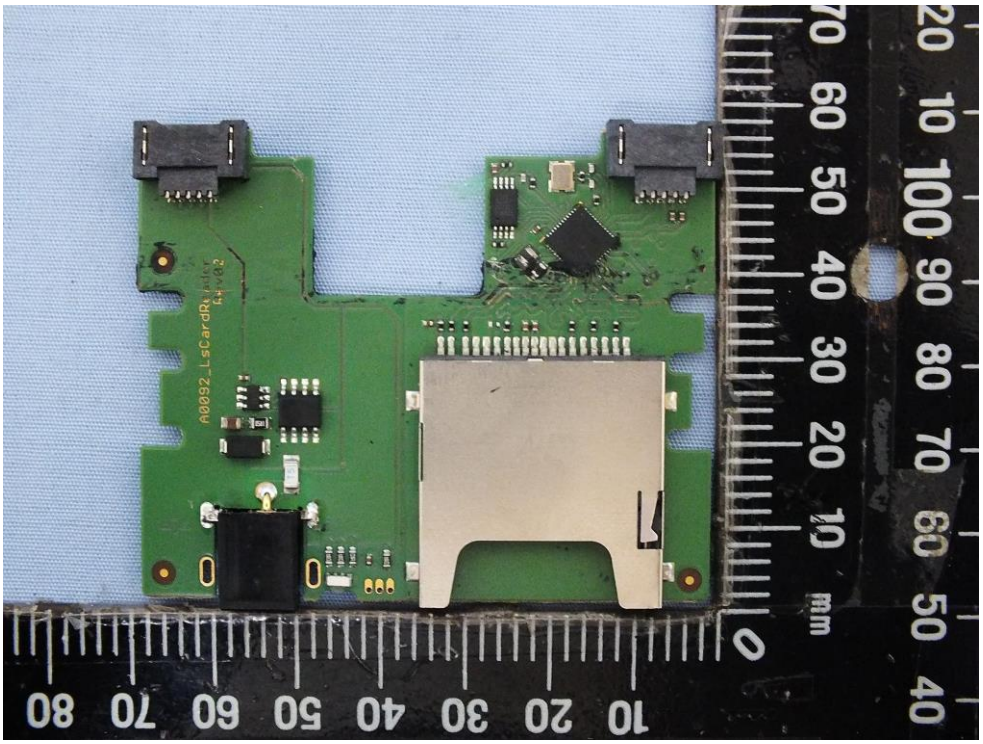


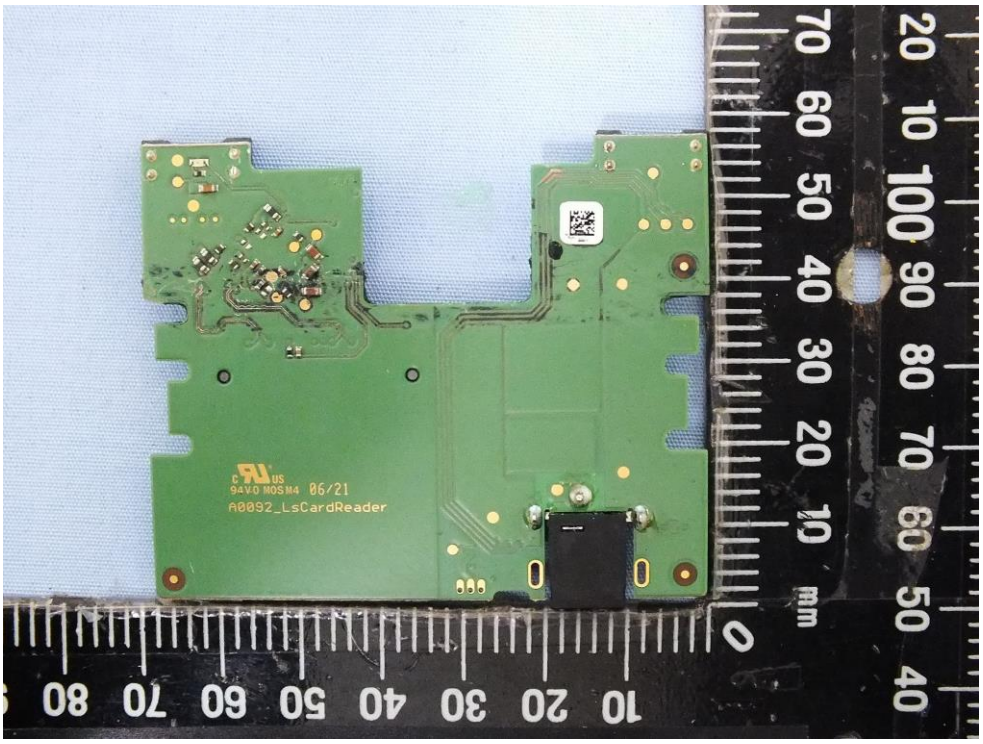

A0093_LsPSU
Rev.02
86/21
mm

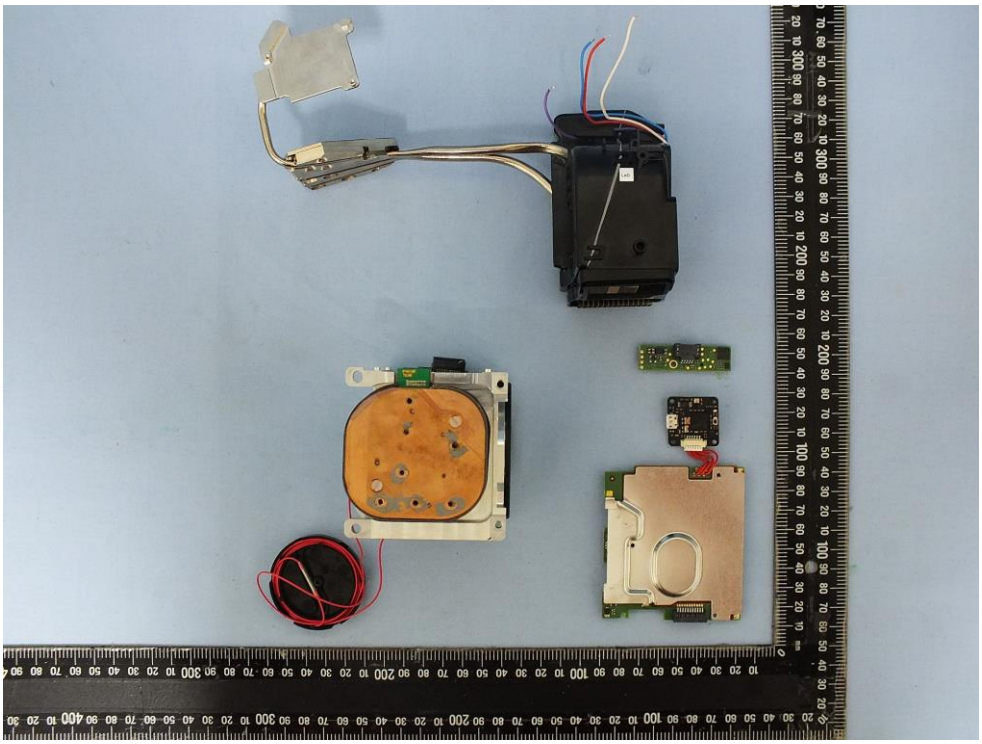

HeN
KaK
4R7
YM17E
A0093_LsPSU
Rev.02
mm

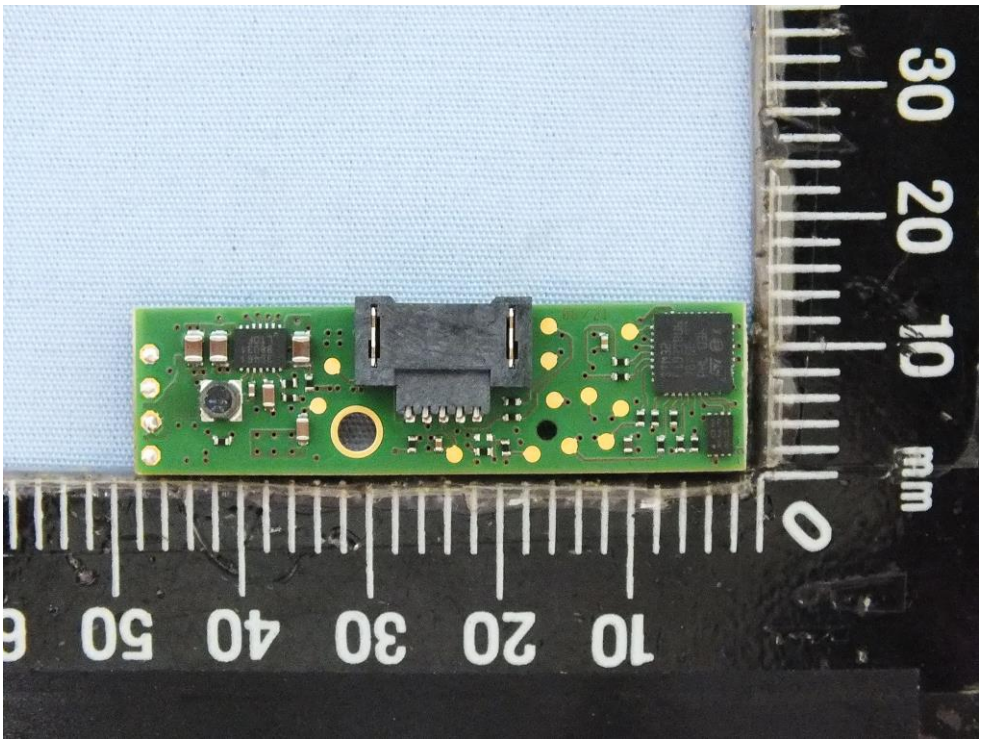


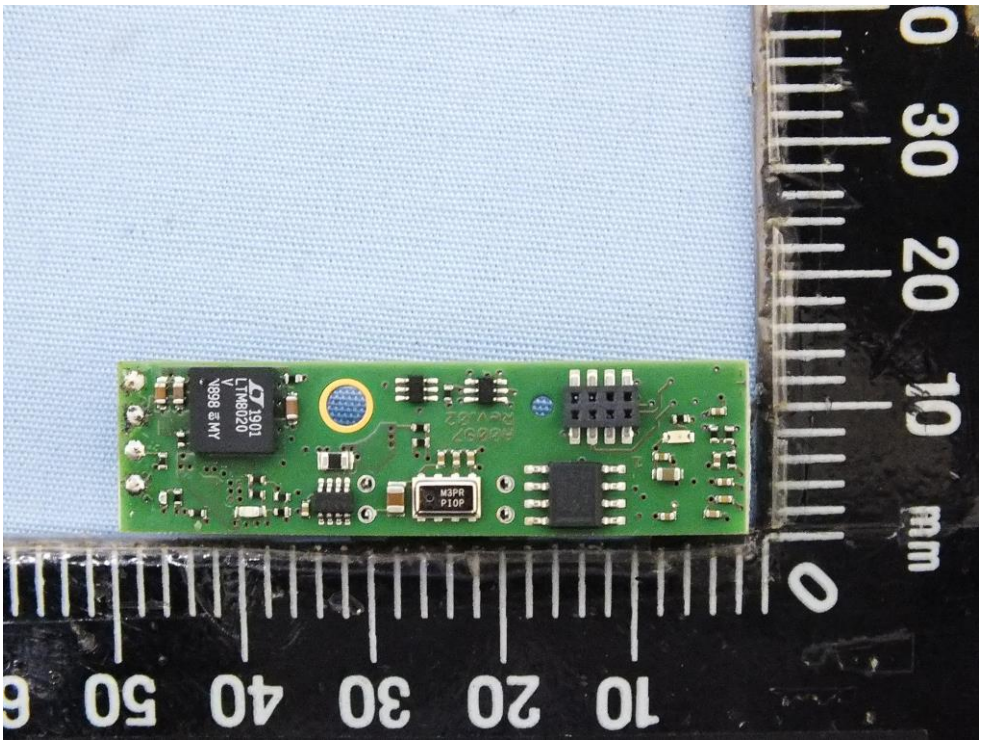


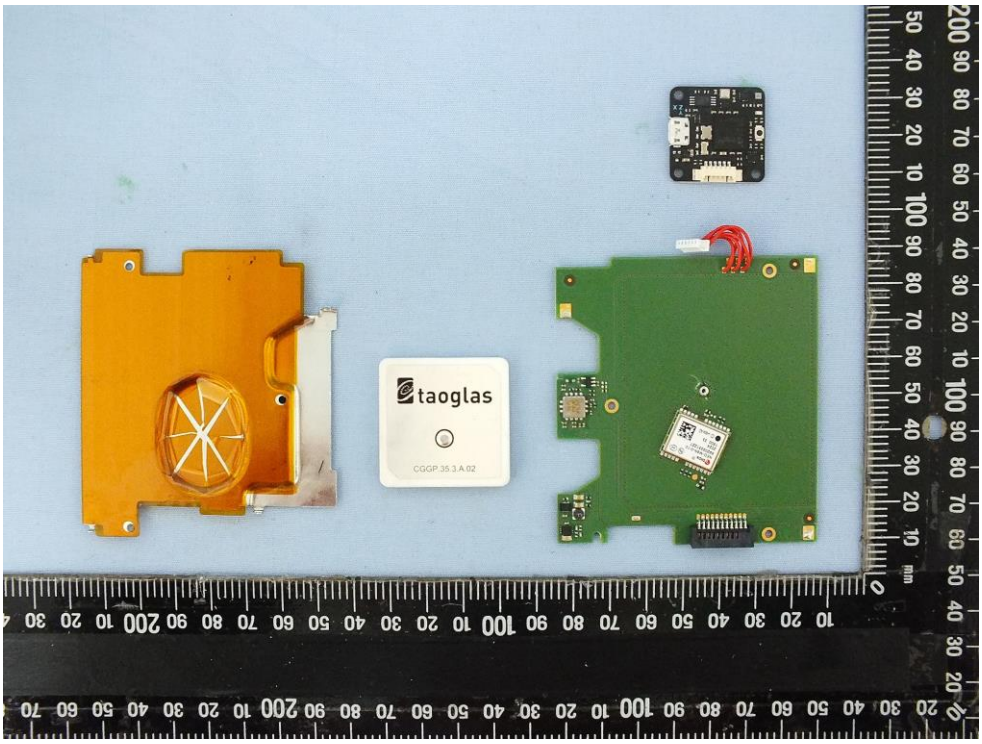



94V-0 MOSM4 06/21
A0092_LsCardReader

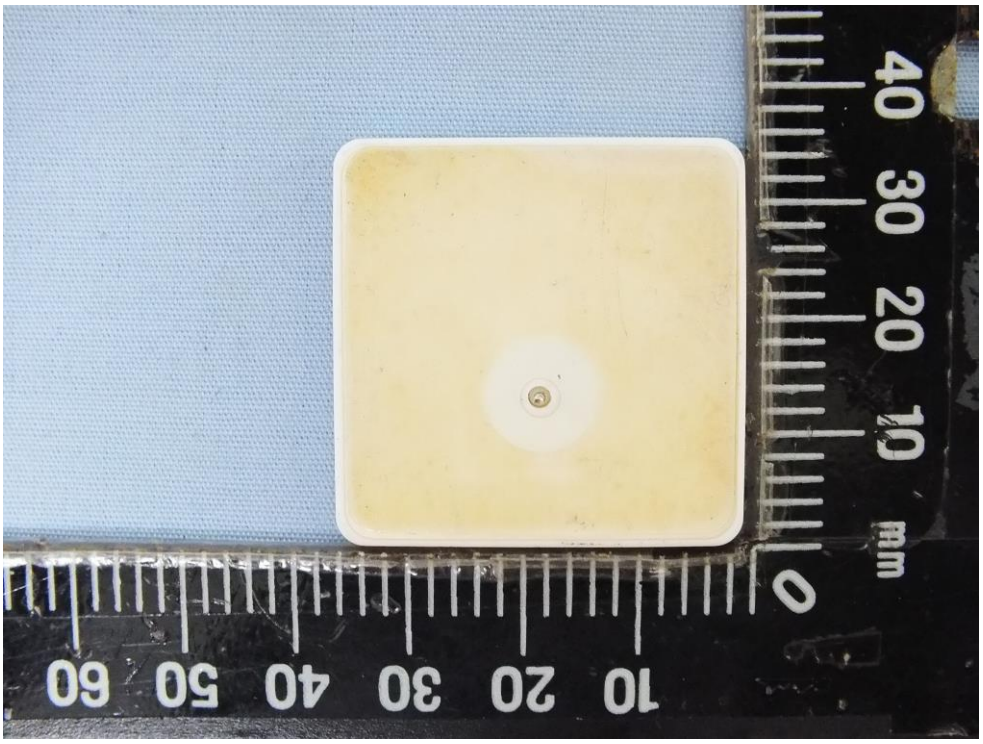


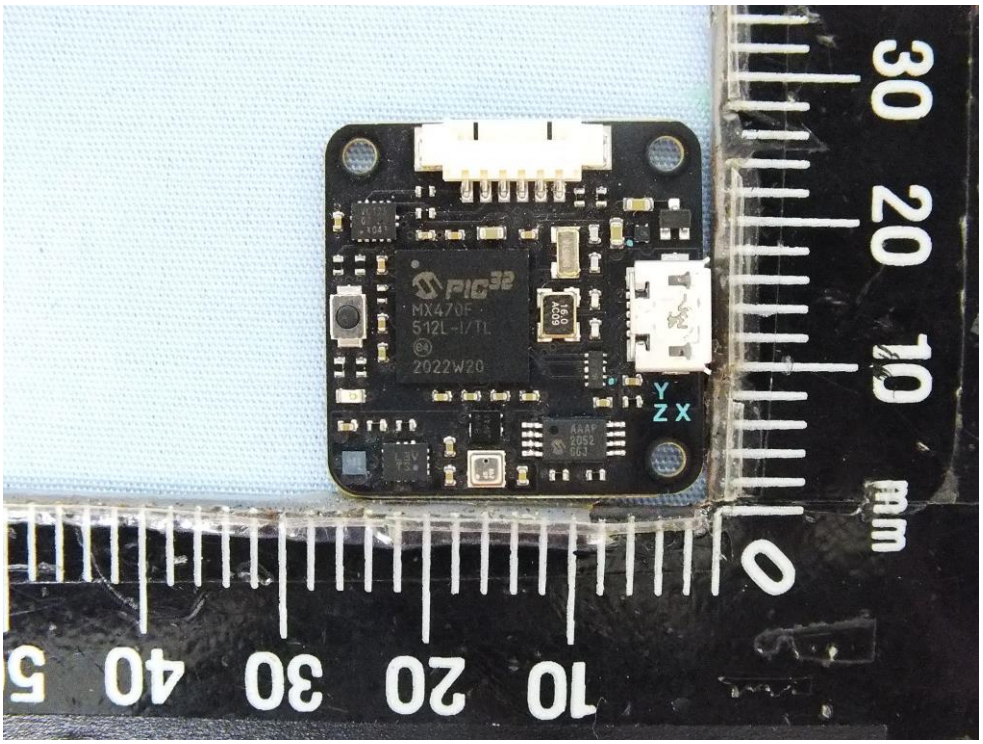


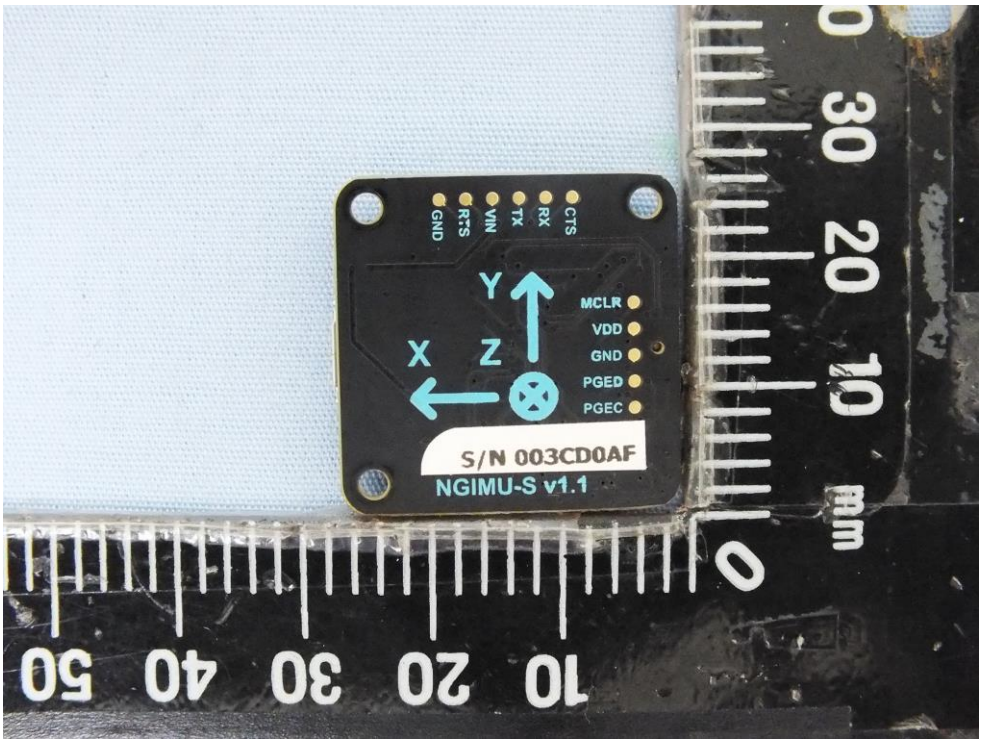

LTM8020
M3PR
P10P


taoglas
CGGP.35.3.A.02

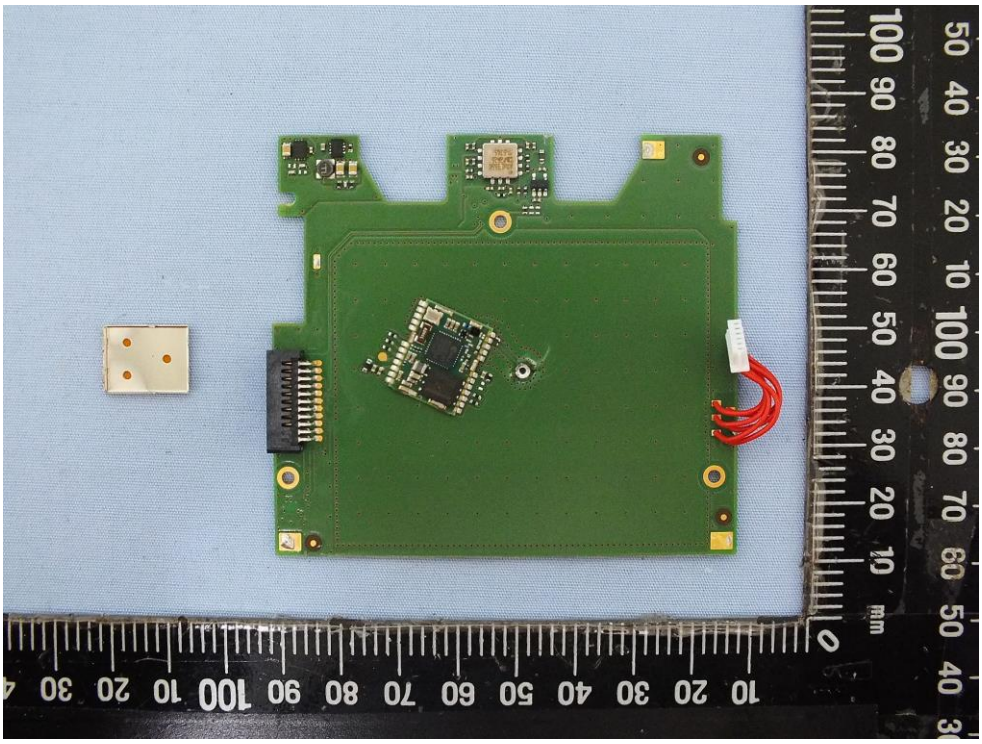

taoglas
CGGP.35.3.A.02
40 30 20 10 mm 0
10 20 30 40 50 60

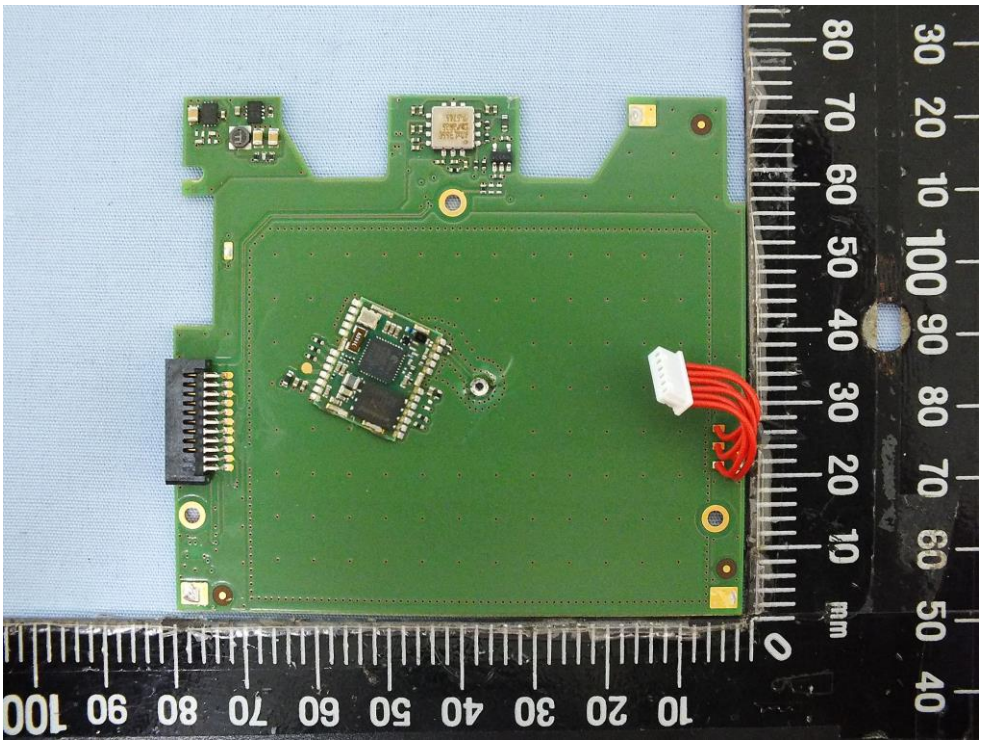

40 30 20 10 mm 0
10 20 30 40 50 60

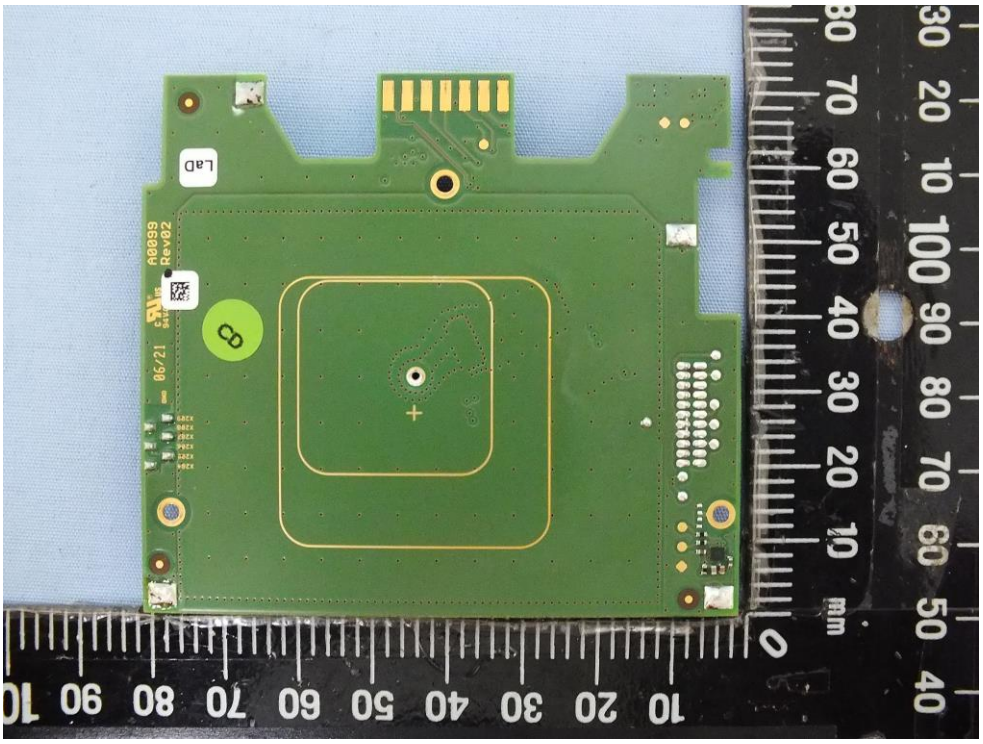

PIC32
MX470F
512L-I/TL
2022W20
Y
Z X

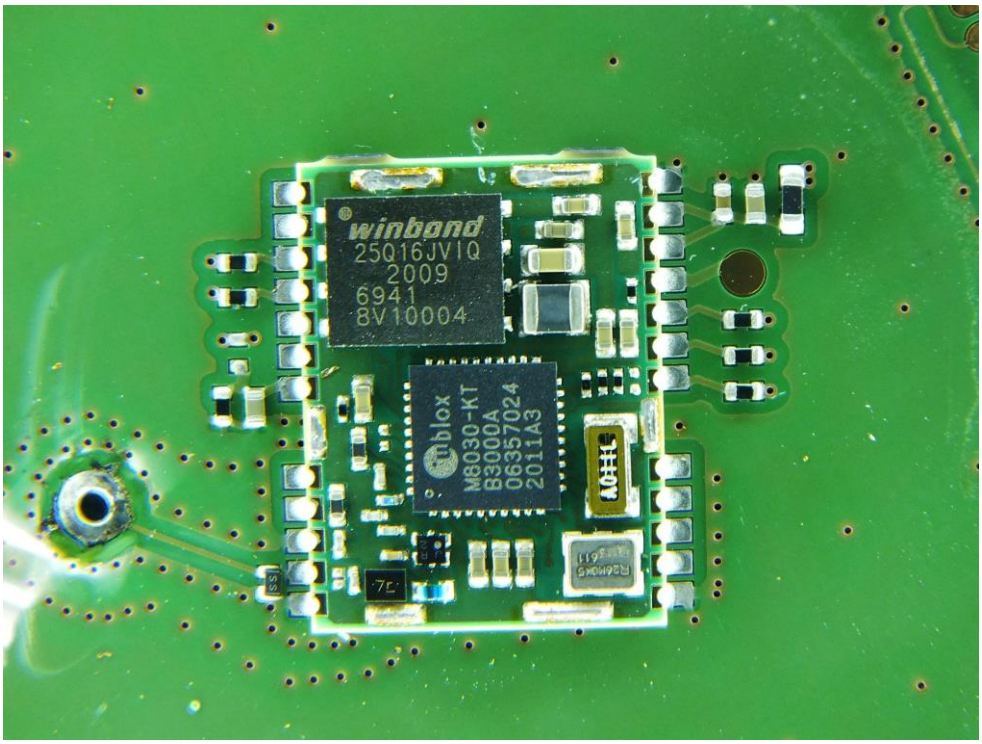

GND
RTS
VIN
TX
RX
CTS
Y
X
Z
MCLR
VDD
GND
PGED
PGEC
S/N 003CD0AF
NGIMU-S v1.1

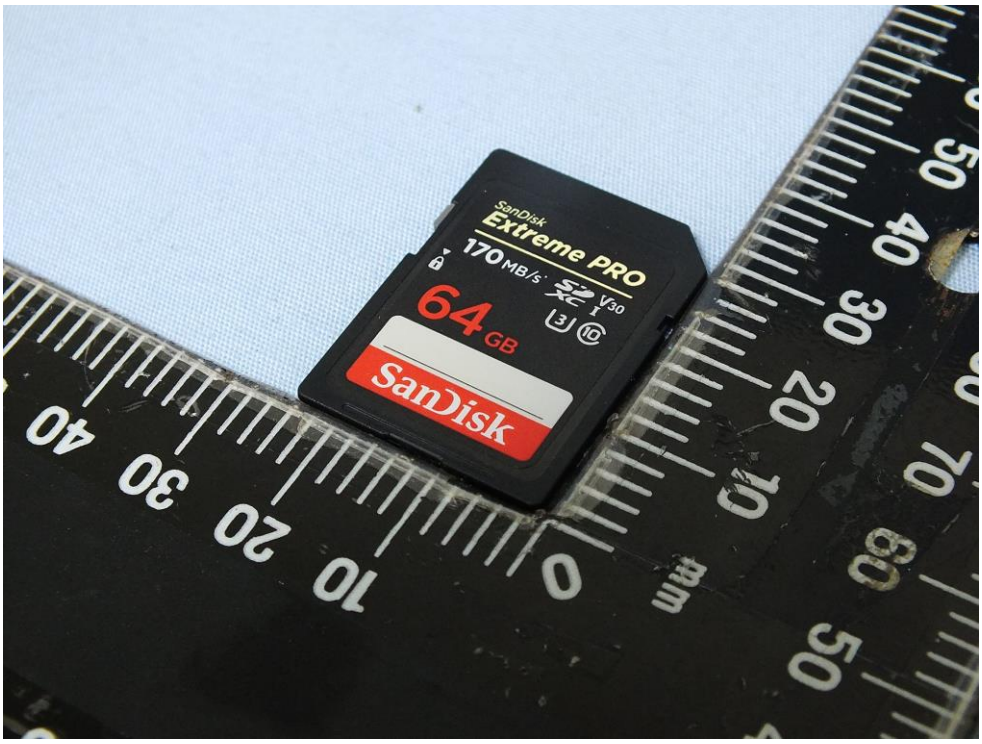

ublox
NEO-M8N-0-10
69205551227
2024
1600 33
© u-blox AG

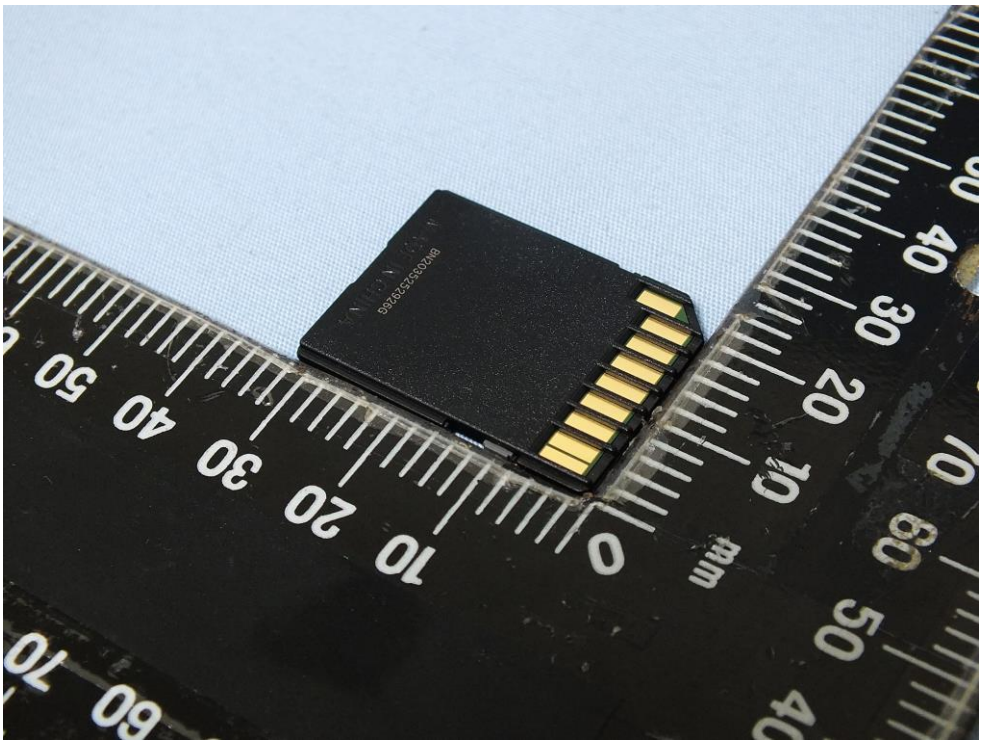


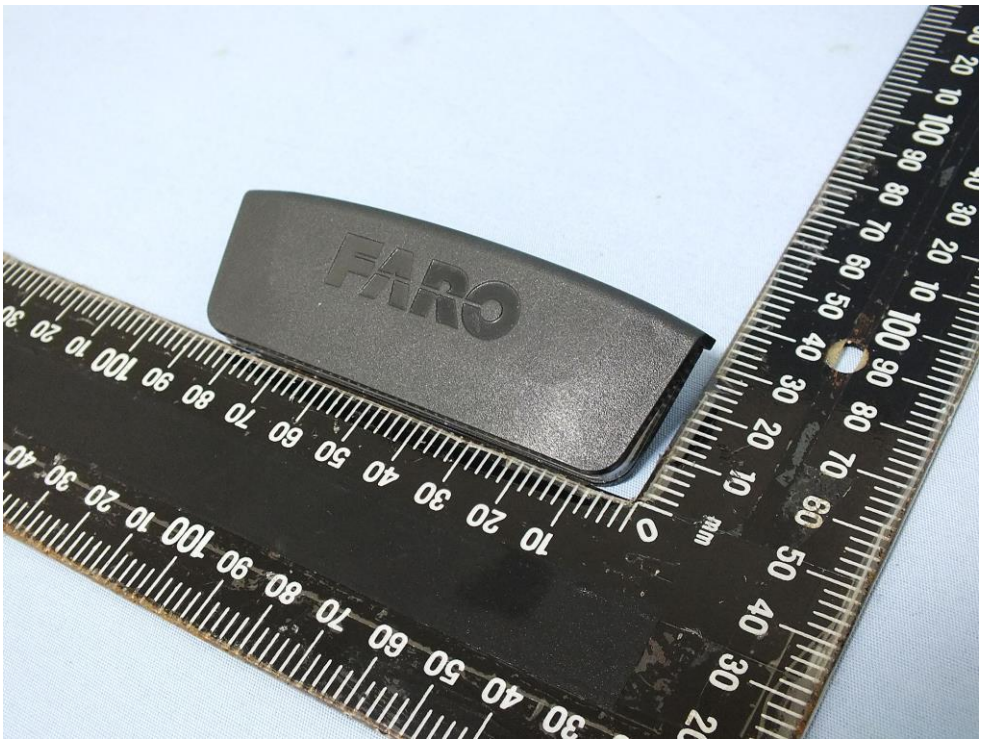


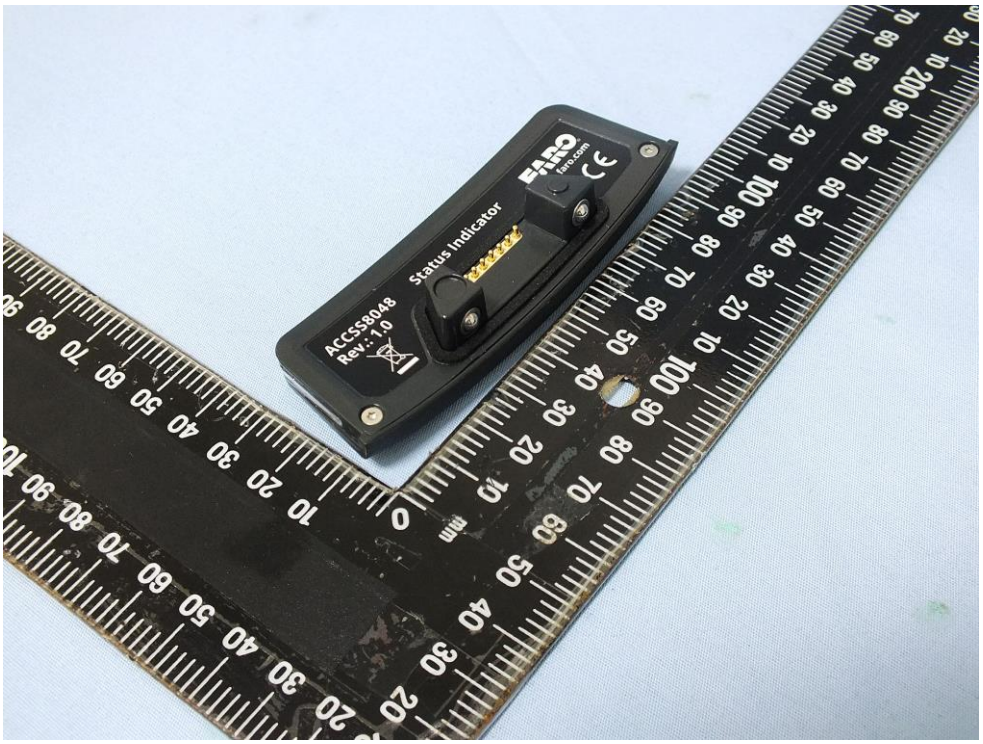

LAD
A0099
Rev02


winbond
25Q16JVIQ
2009
6941
8V10004
ublox
M8030-KT
B3000A
06357024
2011A3

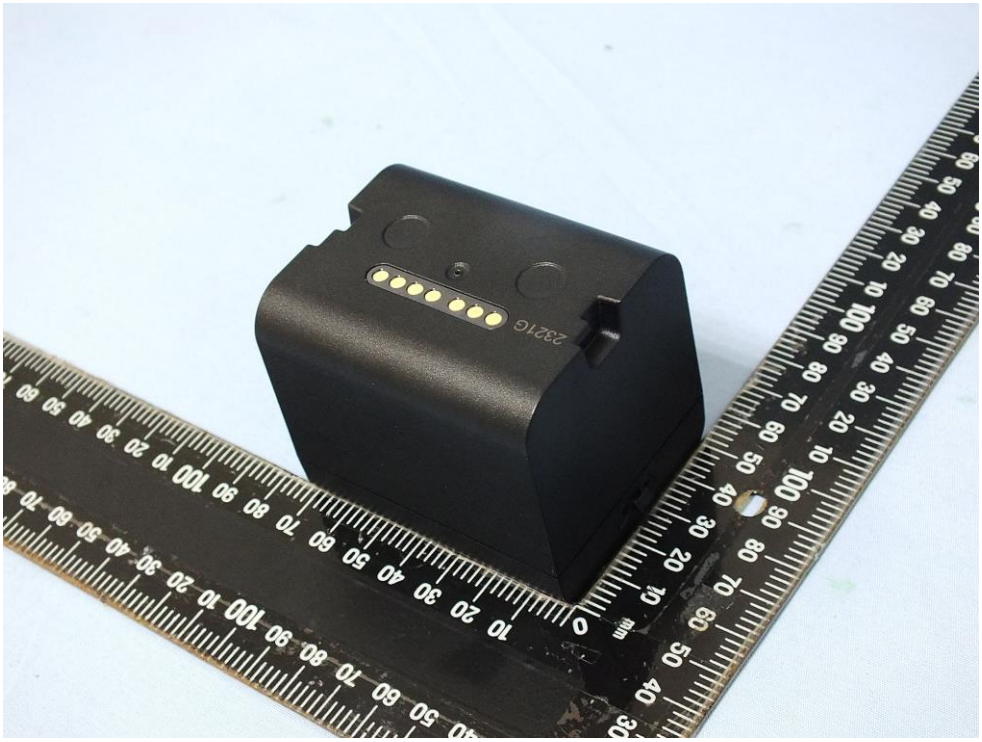

SanDisk
Extreme PRO
170MB/s
64GB
SanDisk

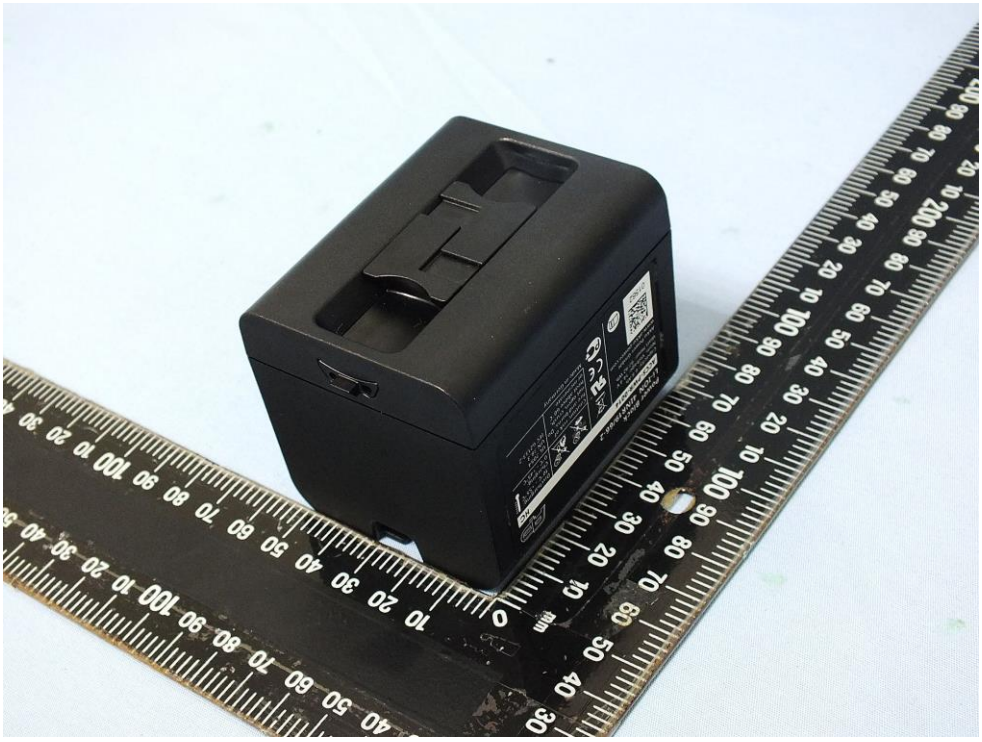



FARO

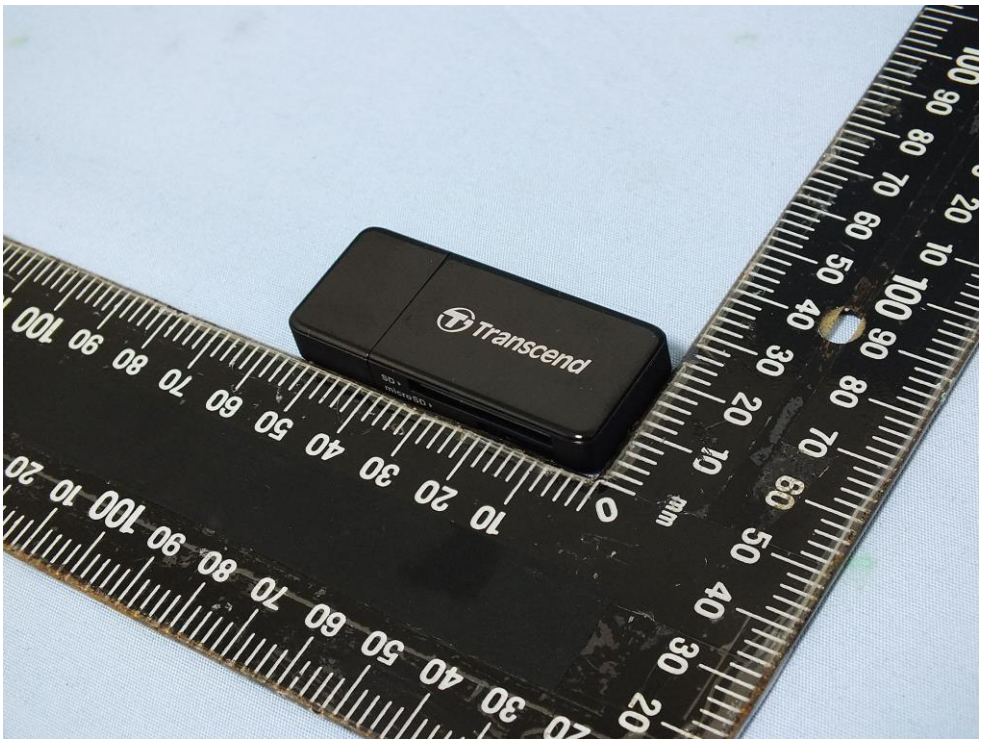

ACCSS8048
Rev.: 1.0
Status Indicator
FARO
faro.com
CE

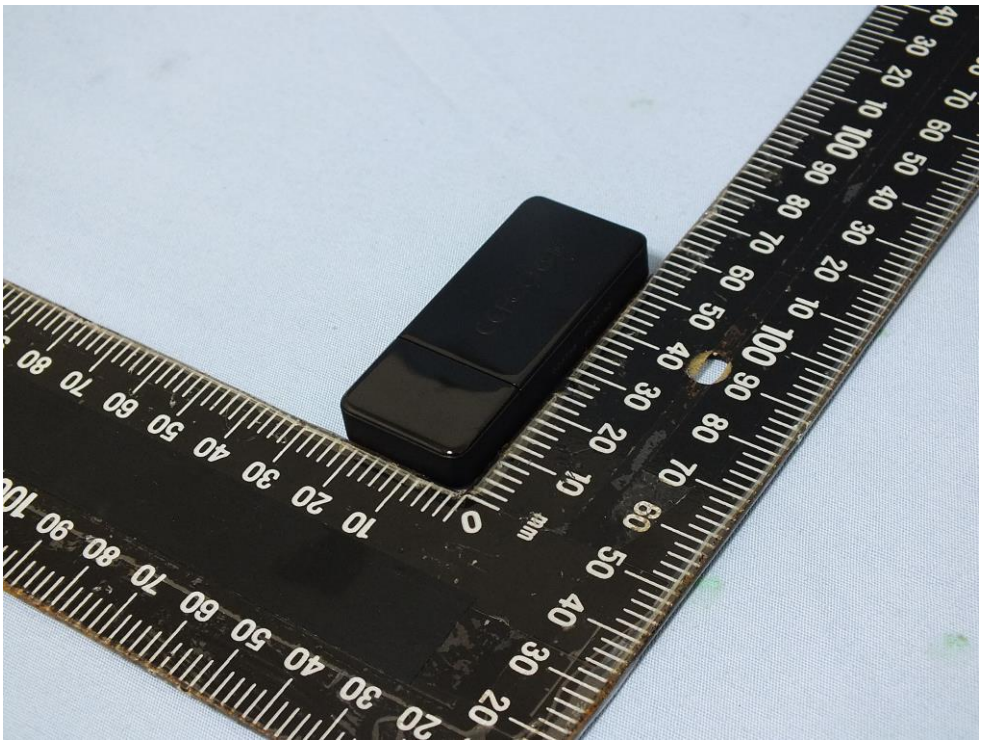

ACCSS8048
Rev.: 1.0
Status Indicator
FARO
faro.com
CE






Power Block
Li-ION 4INR19/66-2
ACCS-PWR-0014
HC
Capacity: 6.8 Ah
Nom. Voltage: 14.4 V
Watt Hour: 97.92 Wh
Akku Power GmbH
www.akku-power.com
01562
Discharging:
-10°C – +55°C
Charging:
0°C – +45°C
Caution: risk of fire and burns. Do not open, crush, heat above 60°C or incinerate.
UL 2054
UN 38.3
IEC 62133-2
Made in Germany


Transcend




Transcend
SD
microSD

