



FARO
FOCUS



taoglas



taoglas

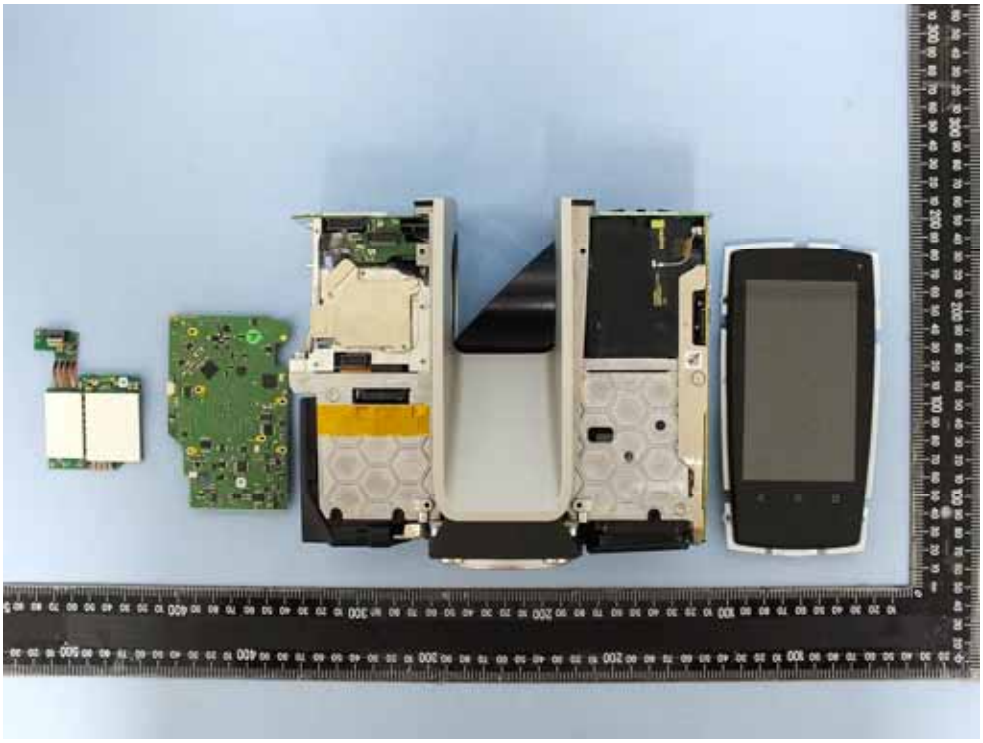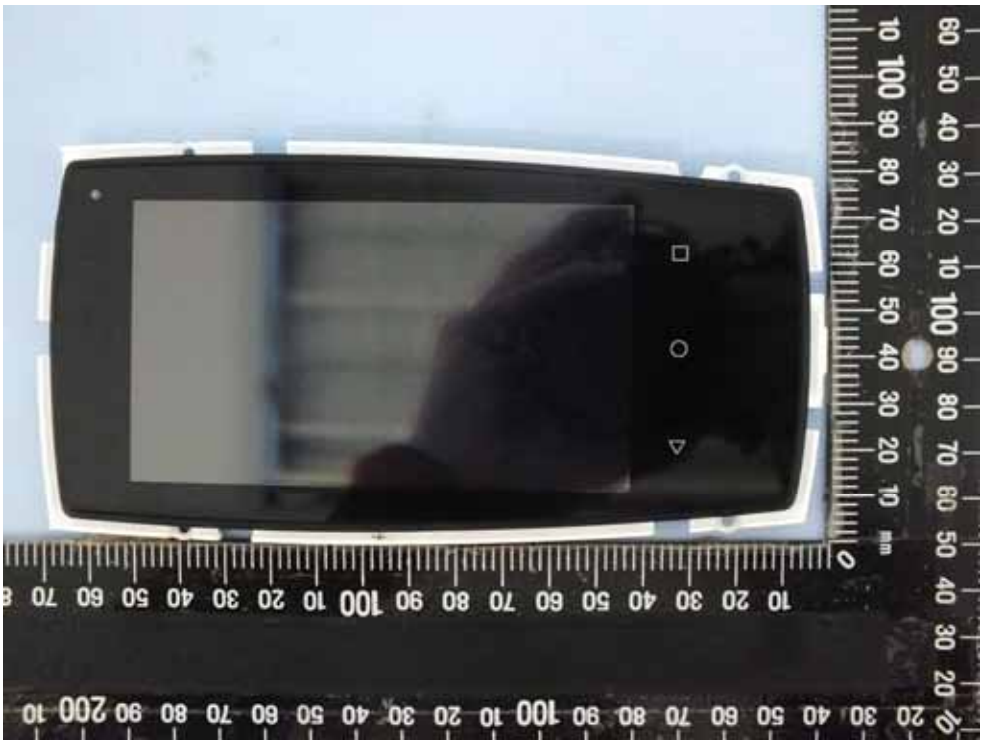

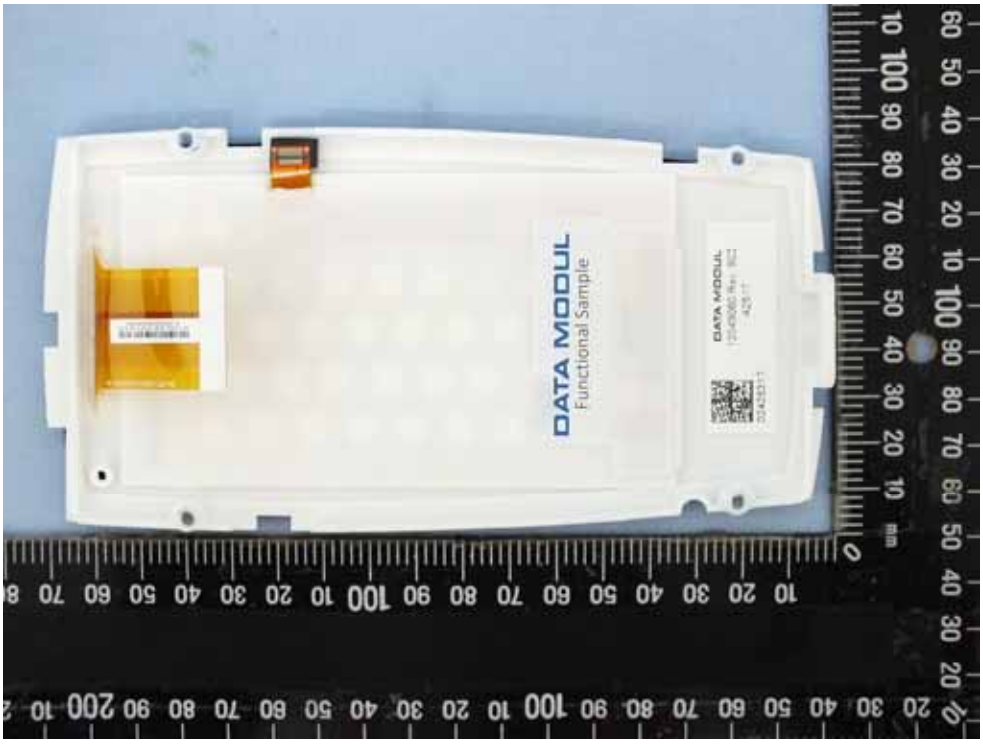




DATA MODUL
Functional Sample

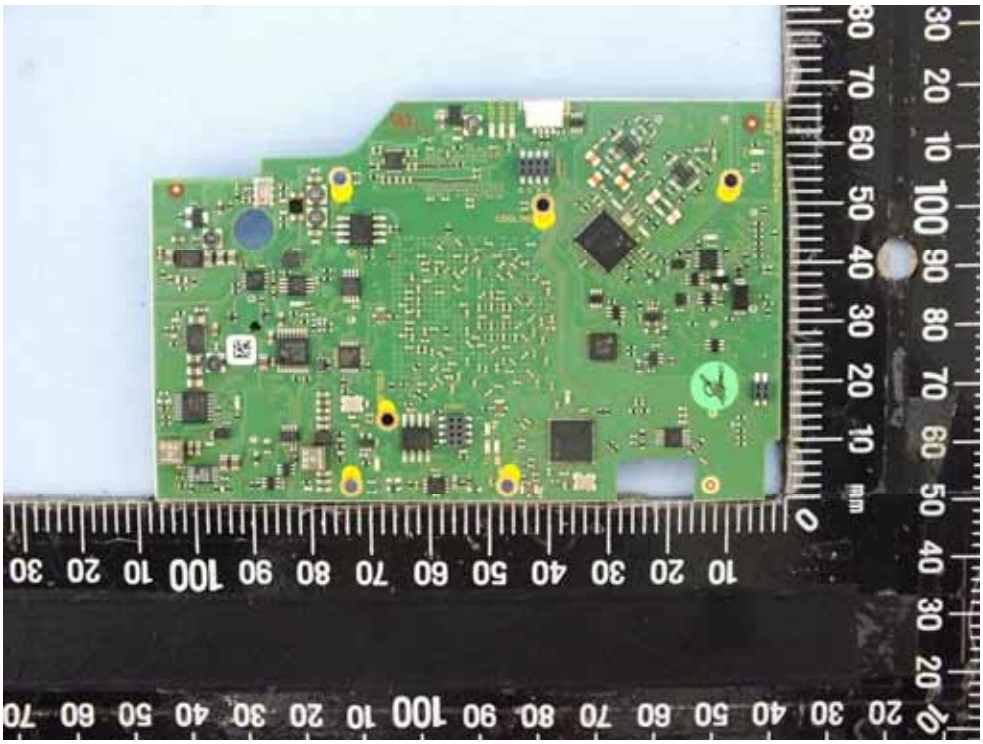


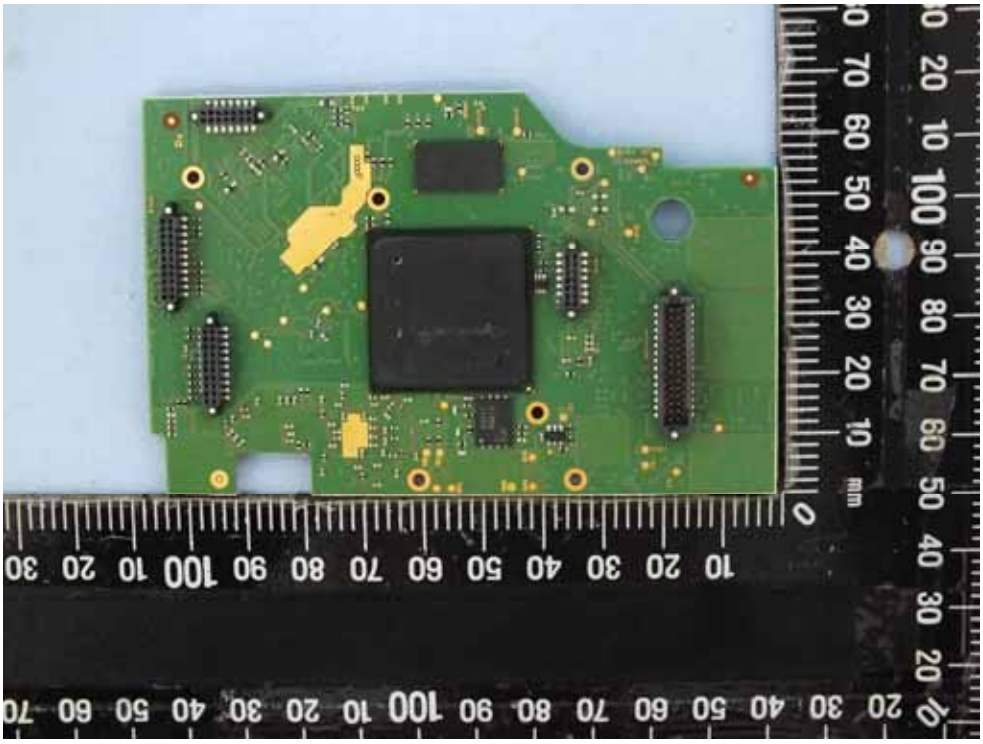




ALTERA
Cyclone V
5CEFA9F27I7N
F BBBAU2037A
TAIWAN

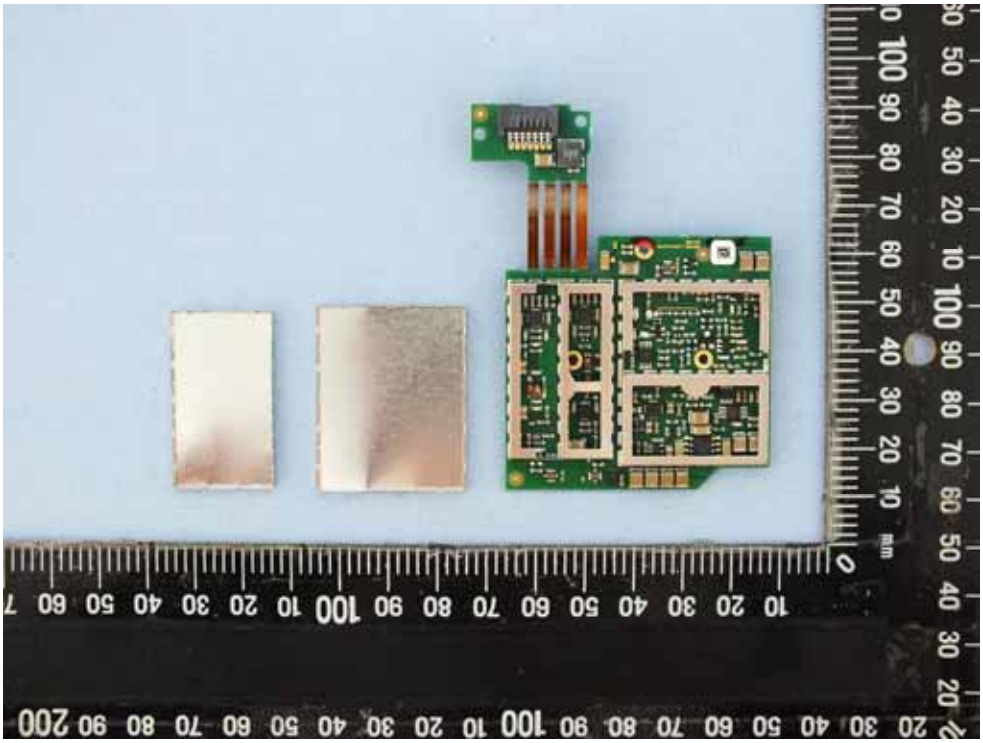

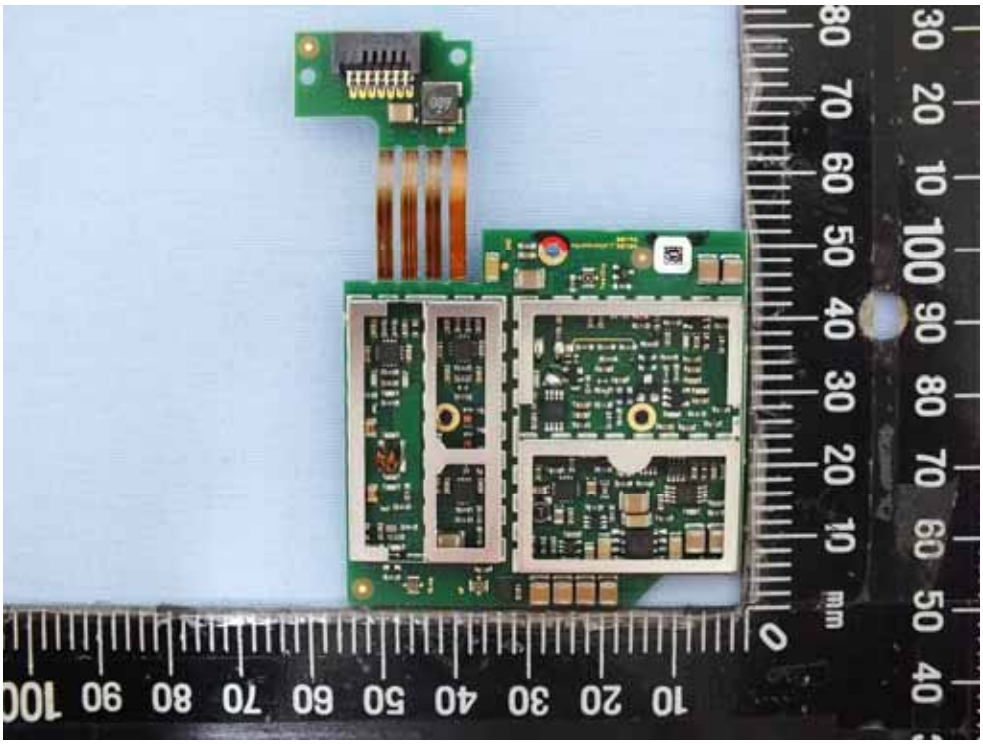


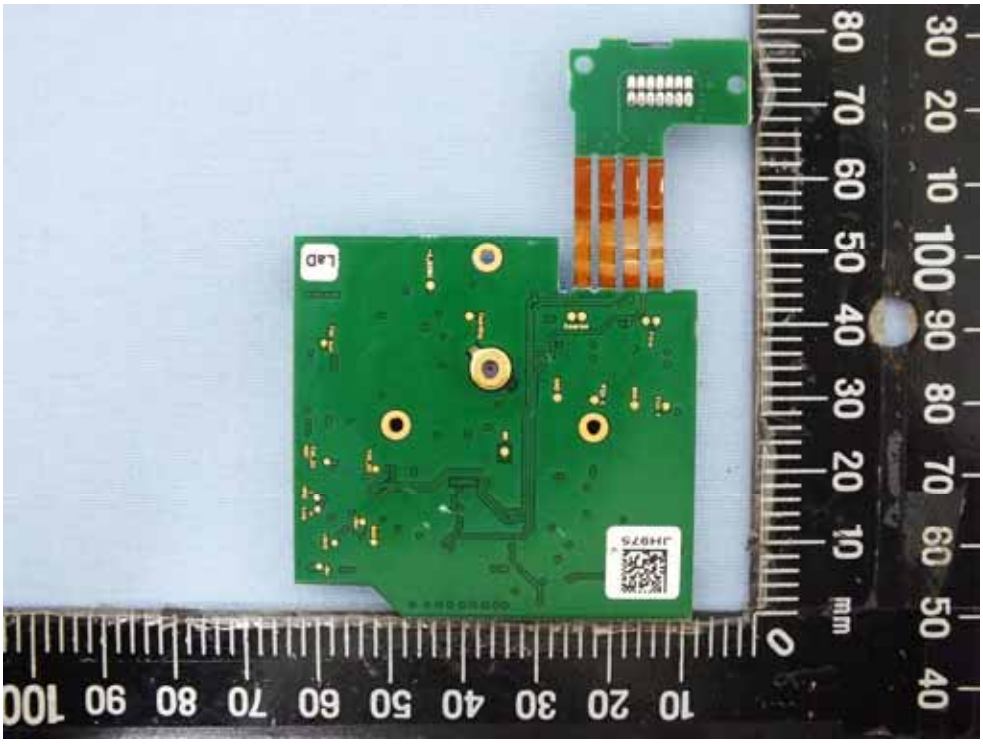


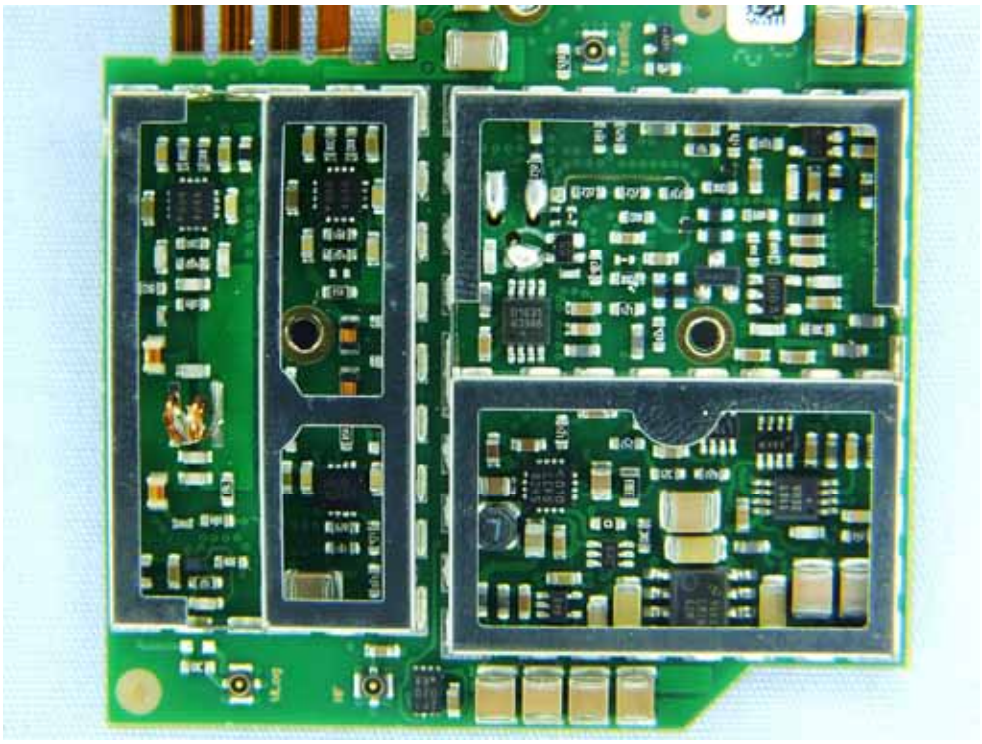


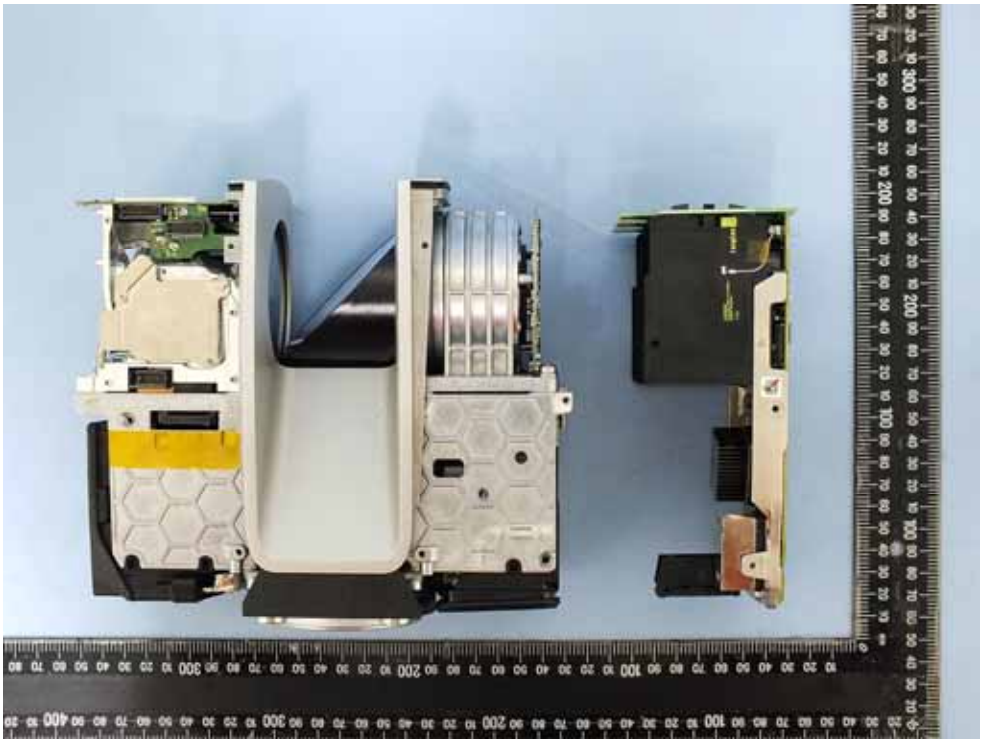




innodisk
128GB

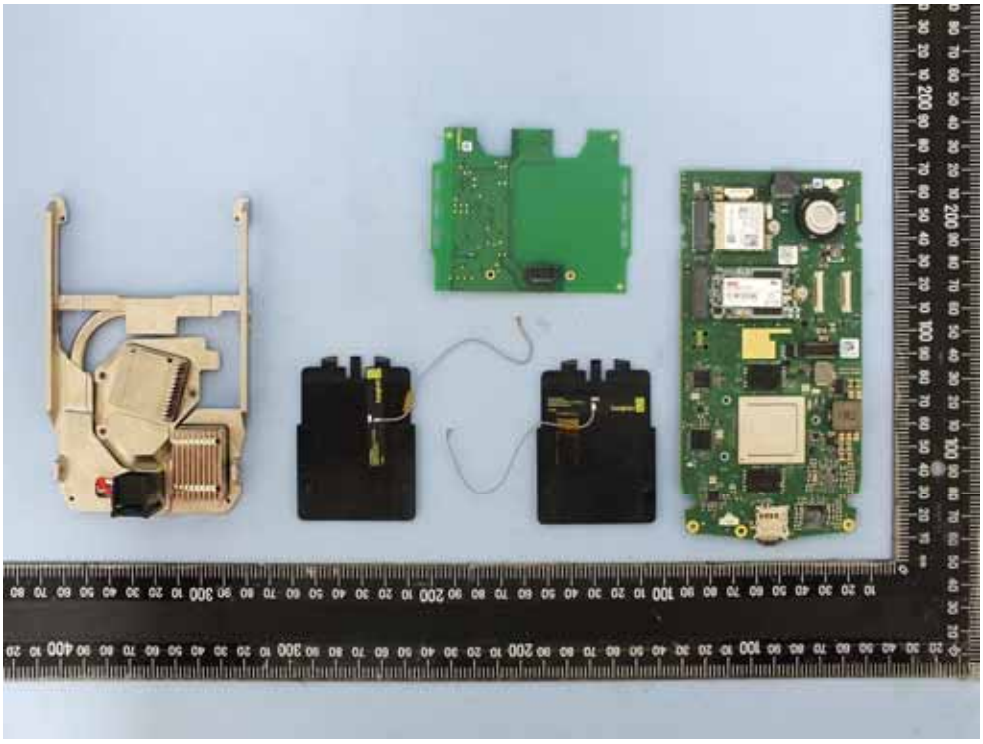


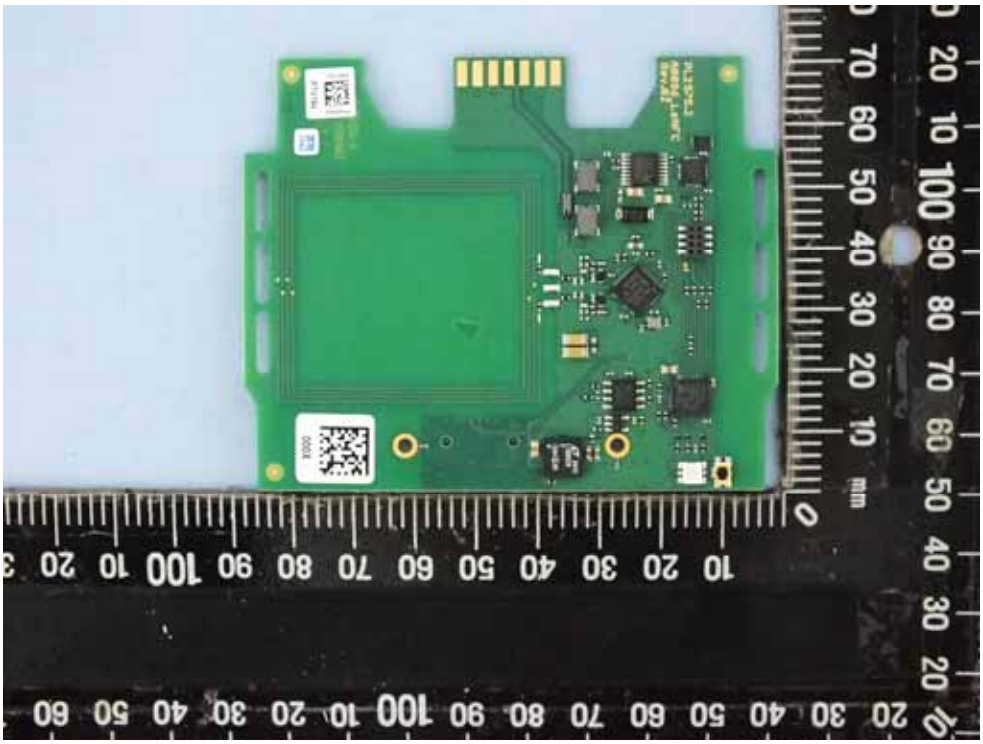

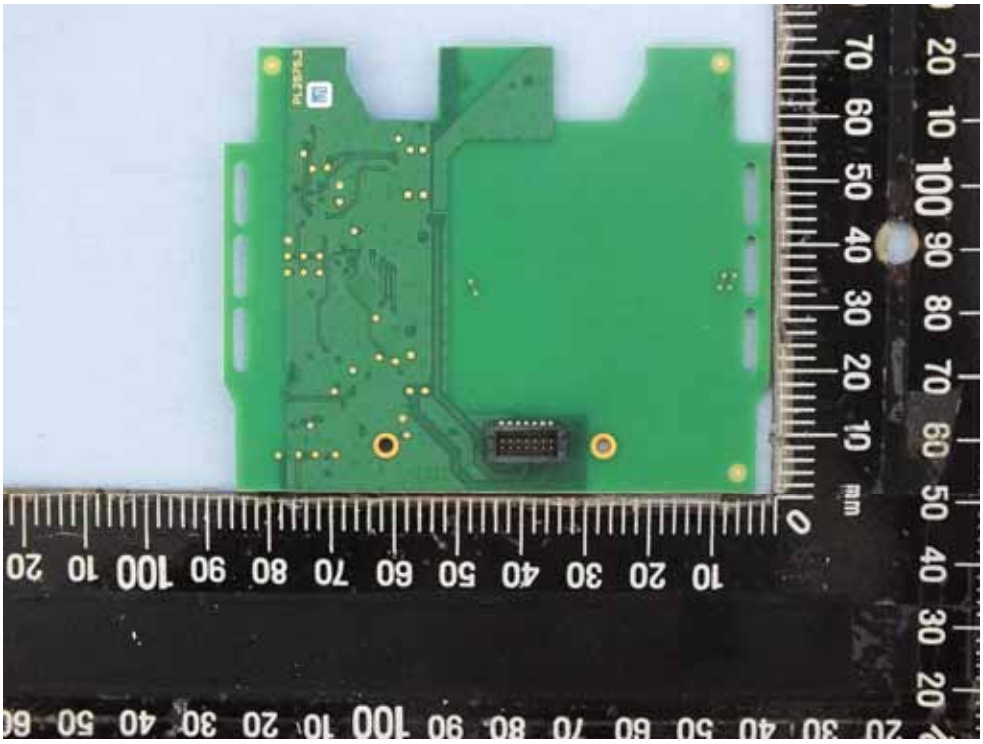


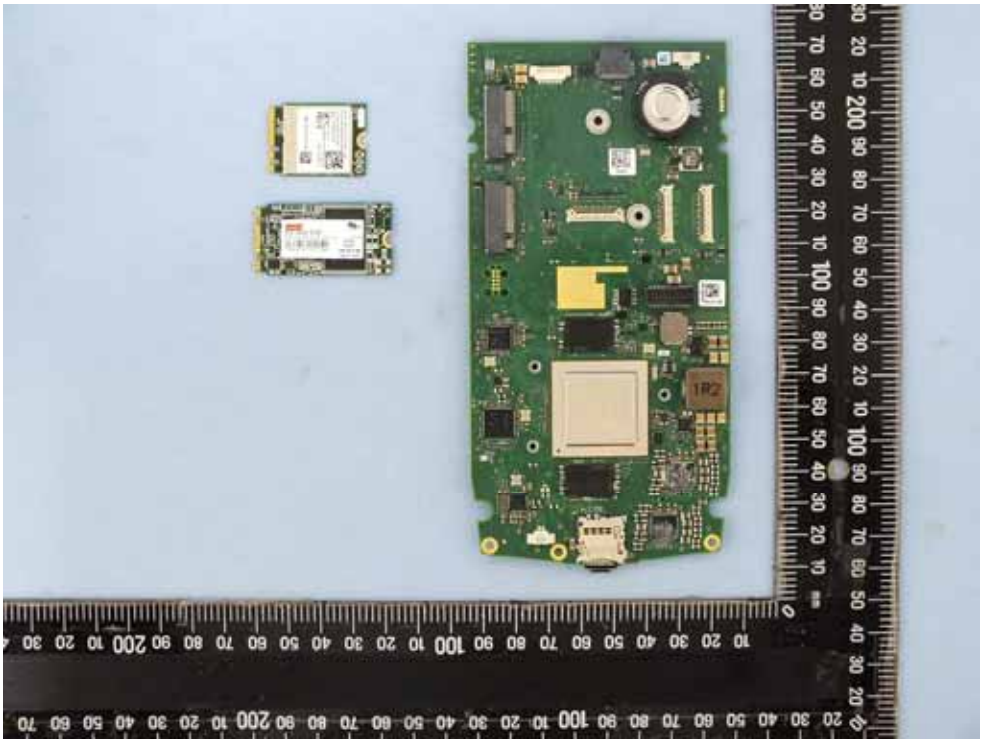


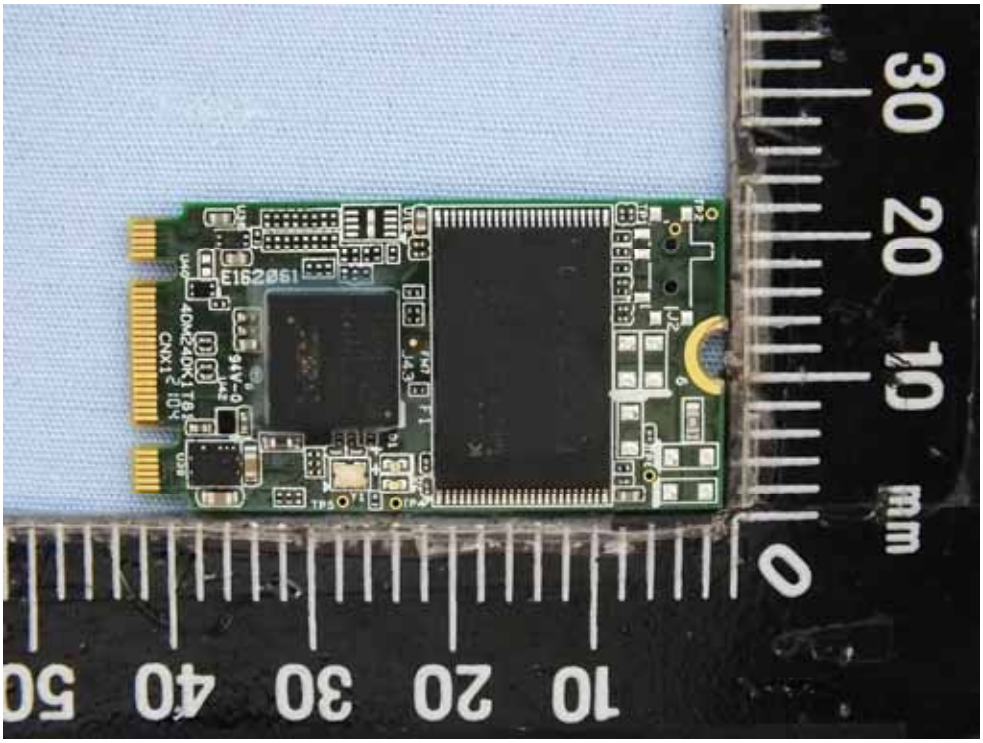


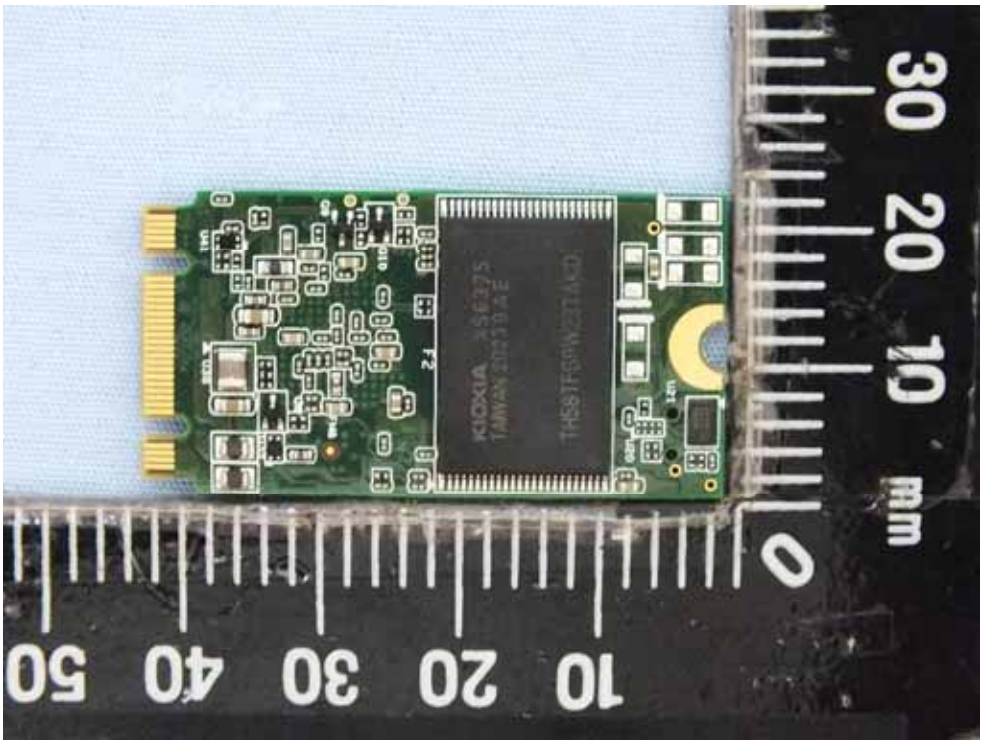

KIOXIA
30 20 10 0 mm
10 20 30 40 50



Model: WNFQ-261ACNI(BT)
FCC ID:RYKWNFQ261ACNIBT
IC:6158A-FQ261ACNIBT
MAC: 000E8EA2304E
SN: 20C60X2001146
WLAN
WLAN/BT
30 20 10 0 mm
10 20 30 40

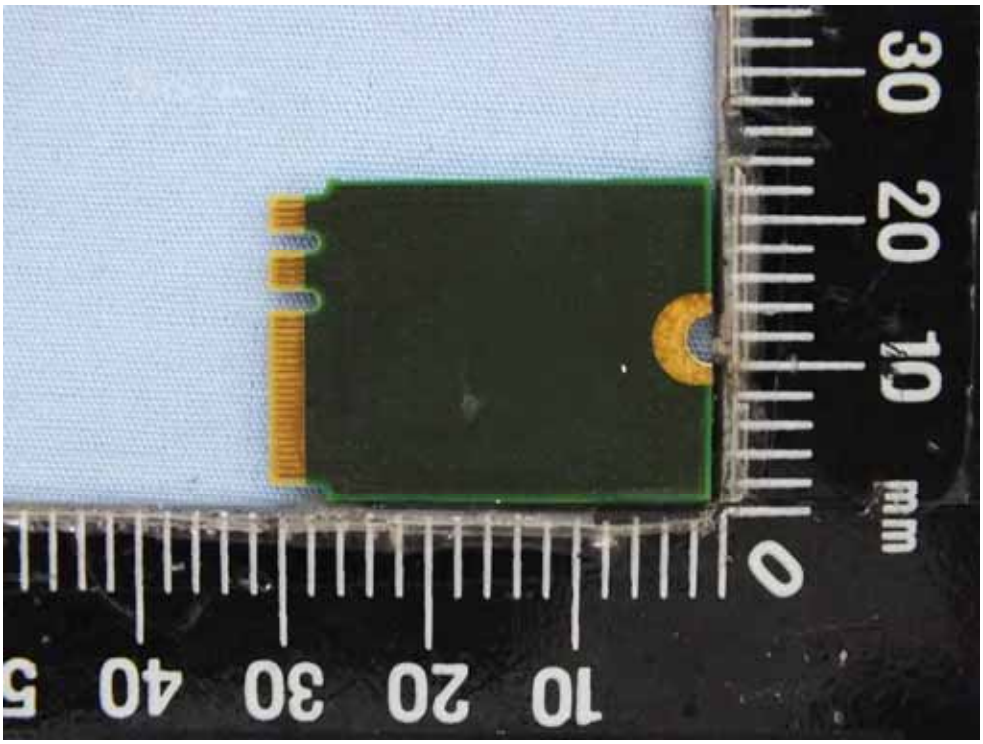
30 20 10 mm 0
10 20 30 40 5

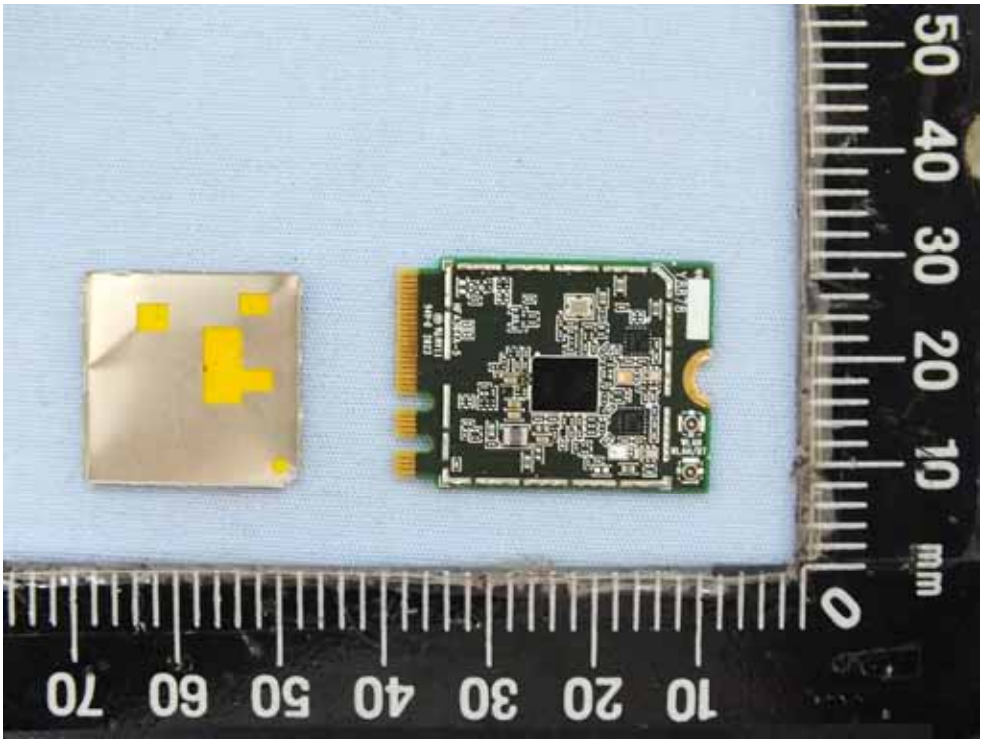

50 40 30 20 10 mm 0
10 20 30 40 50 60 70

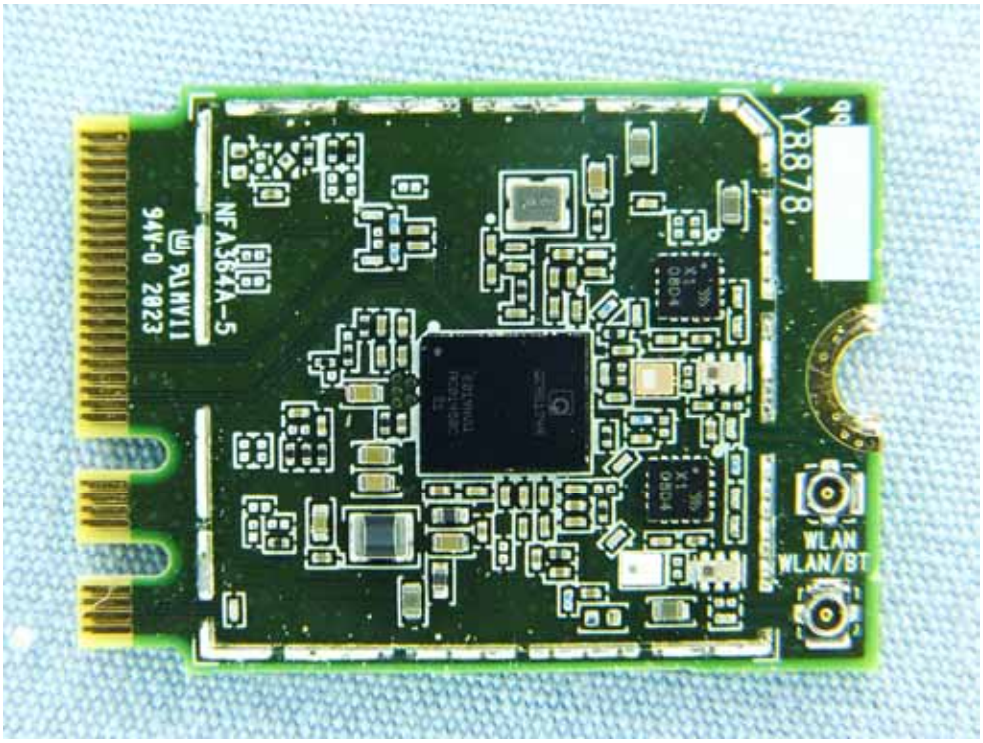

Y8878
NFA364A-5
94V-0 2023
WLAN
WLAN/BT

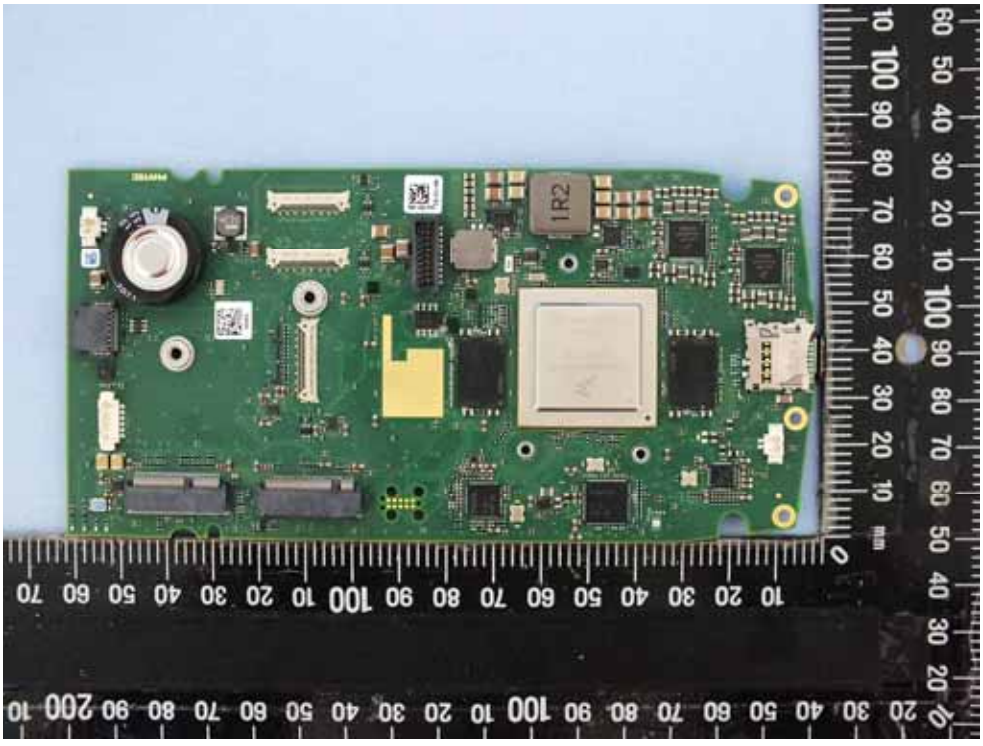

1R2

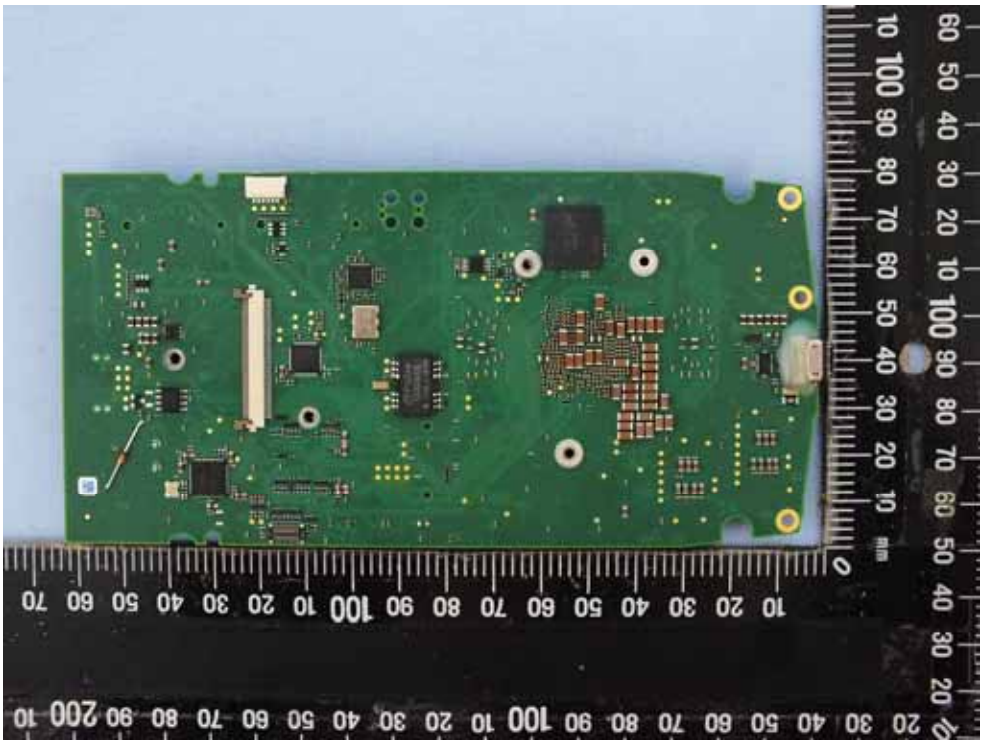



MIMX8QM6AVUFFAB
SBAD2108
1N84W
KOREA GHADSBB

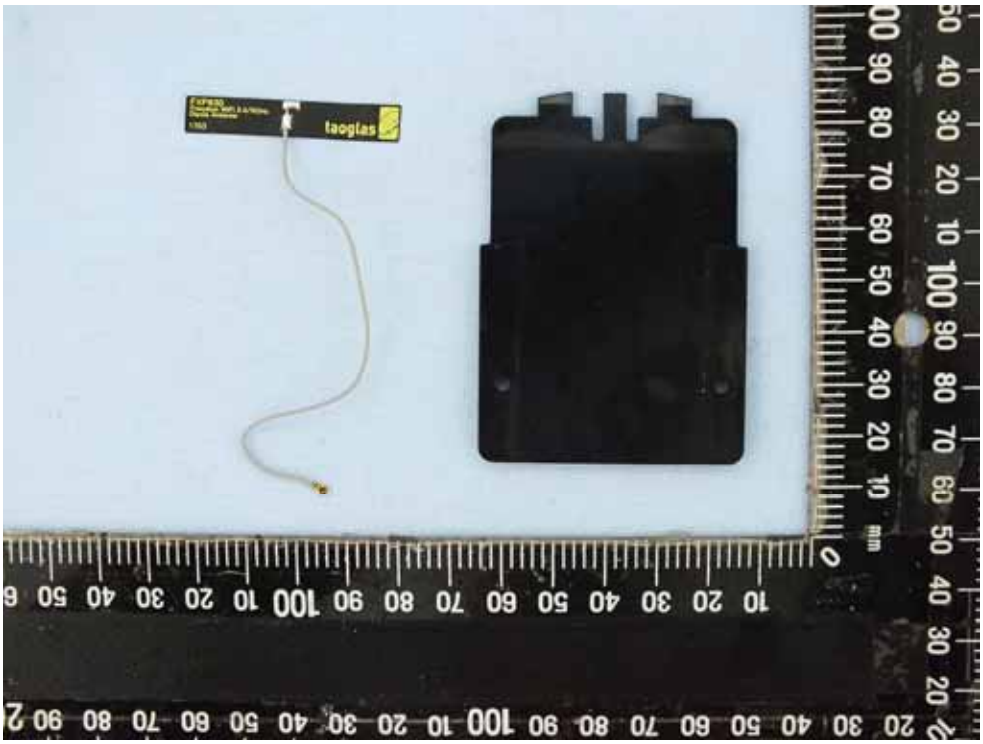

taoglas

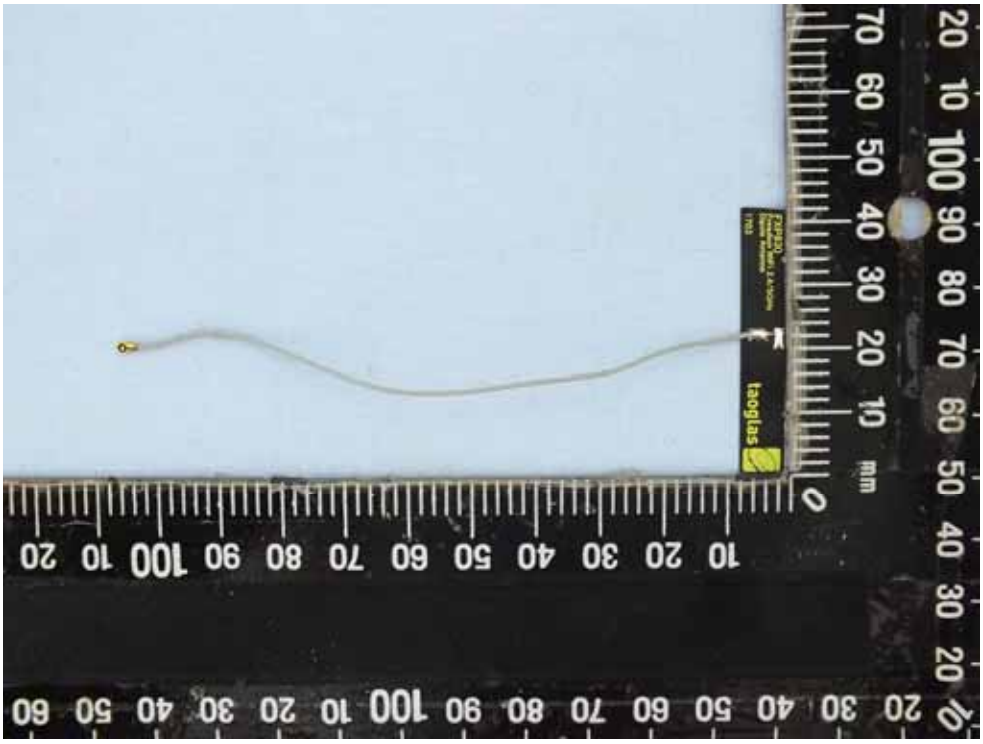

taoglas

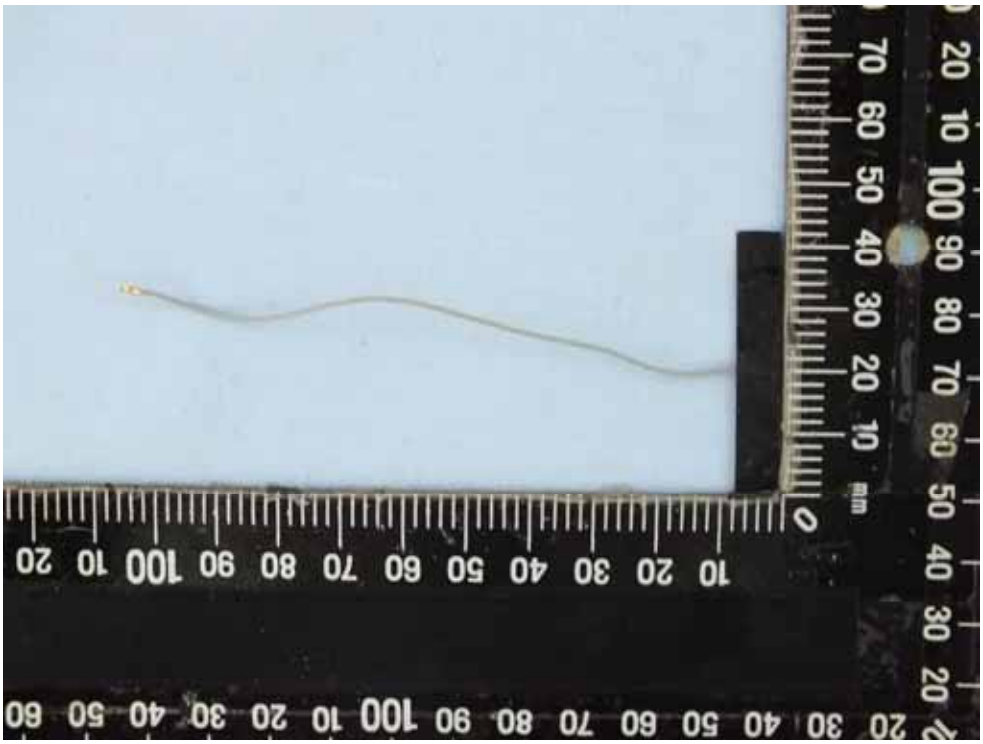





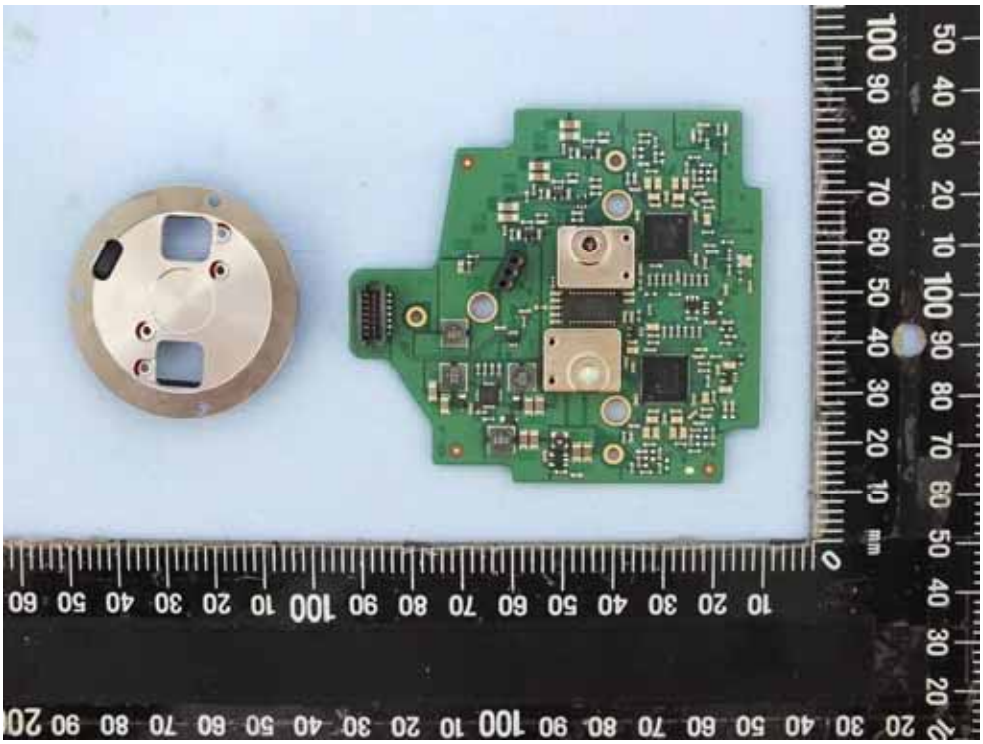


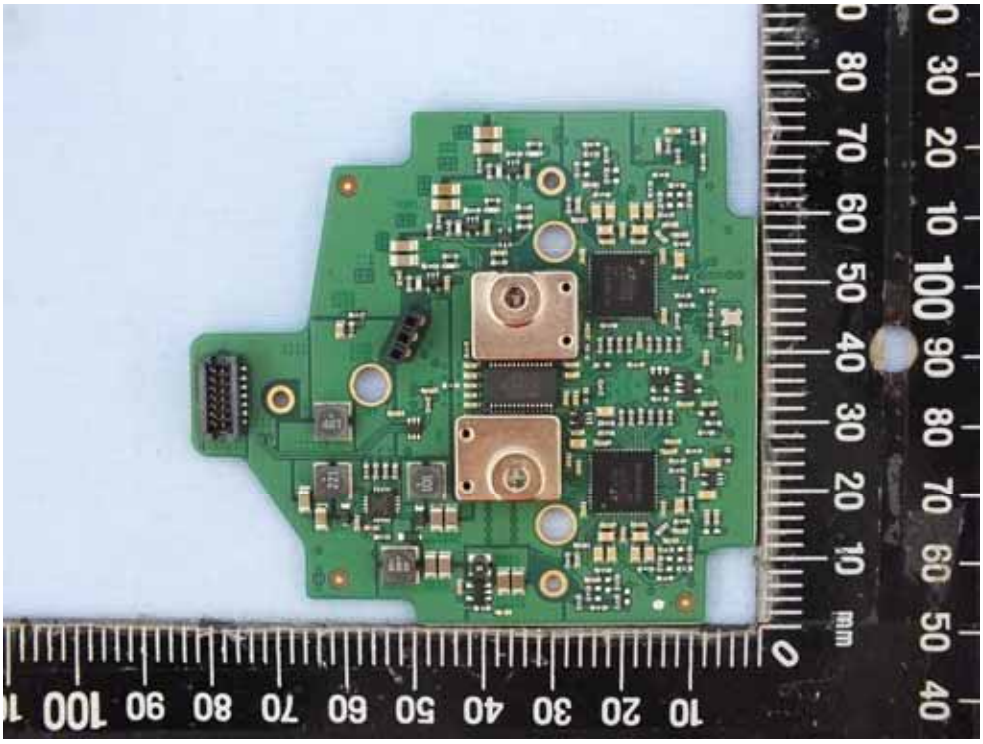


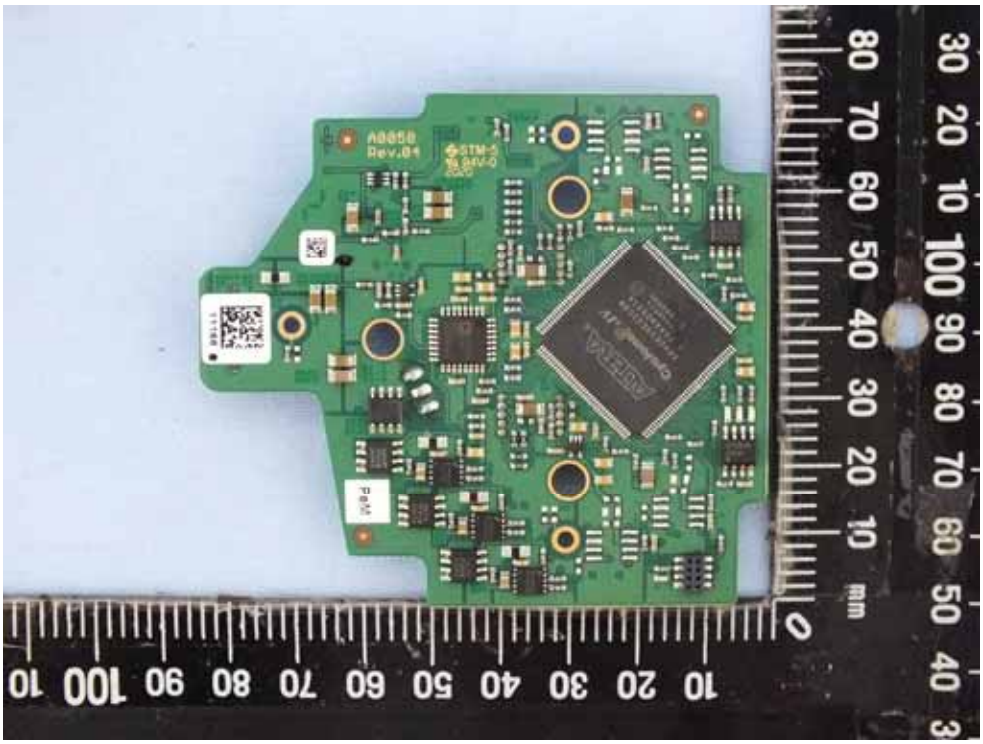


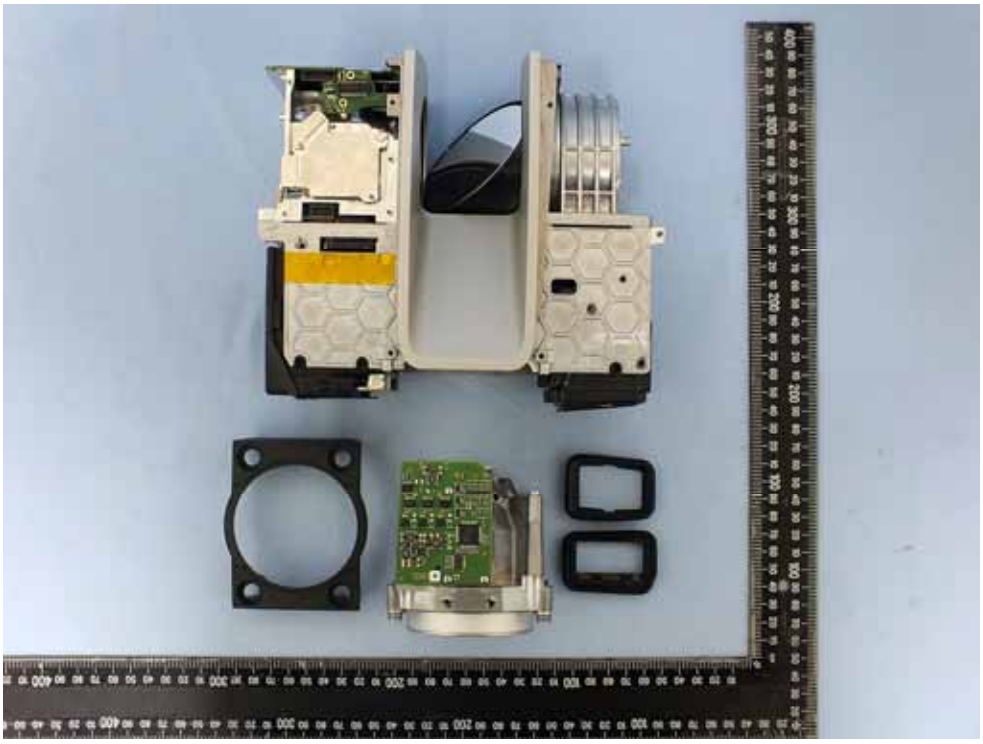


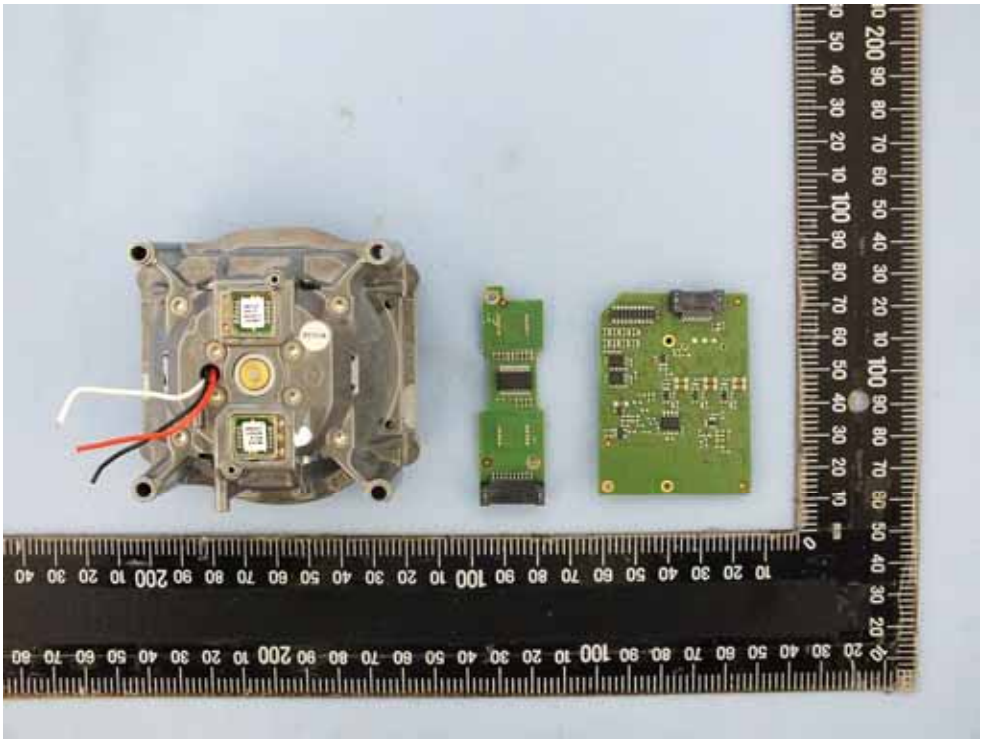


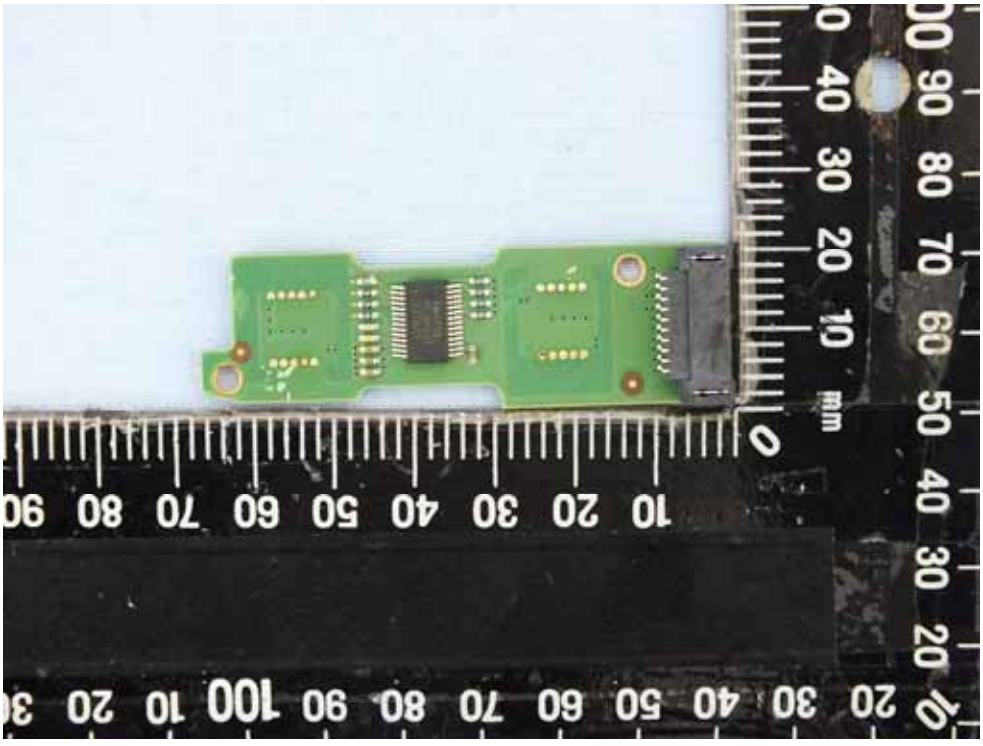


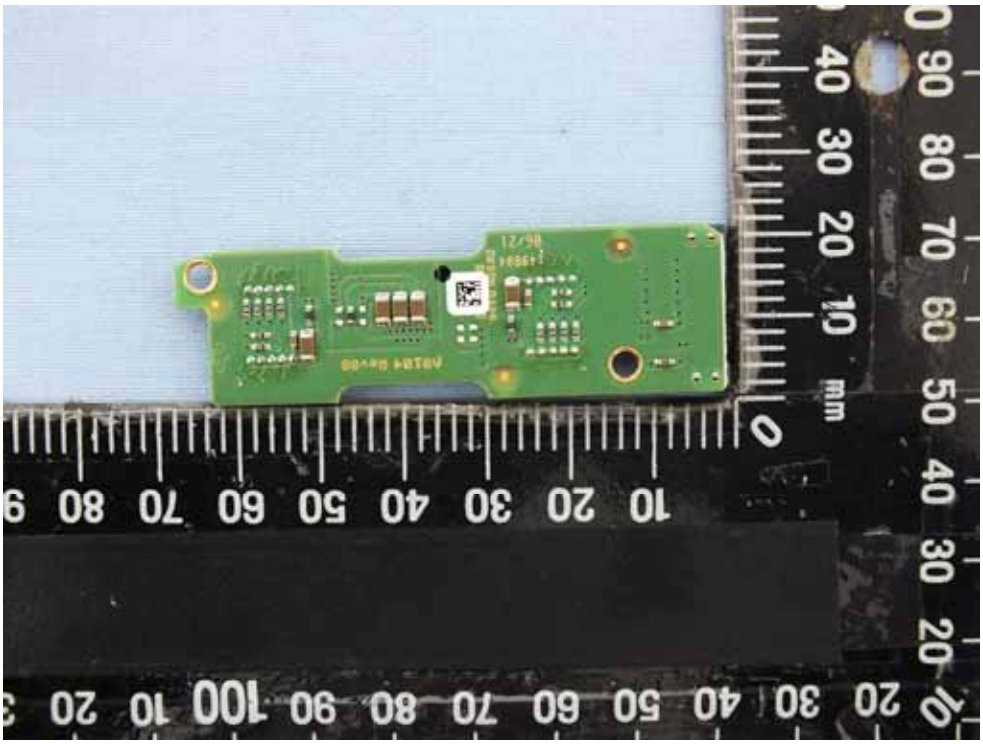


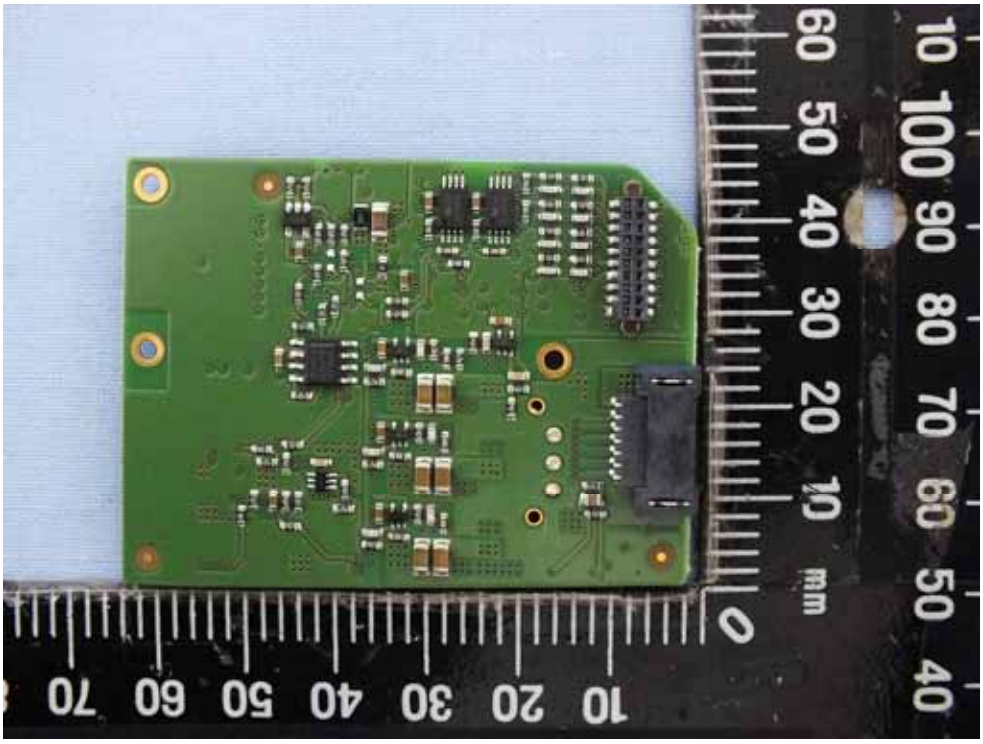

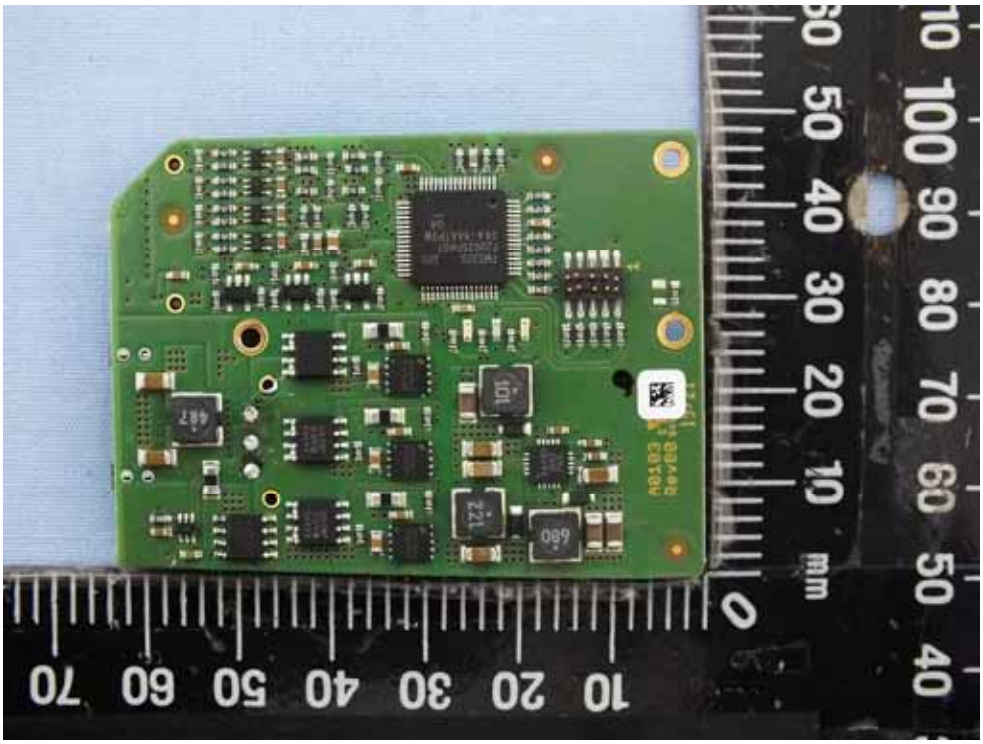


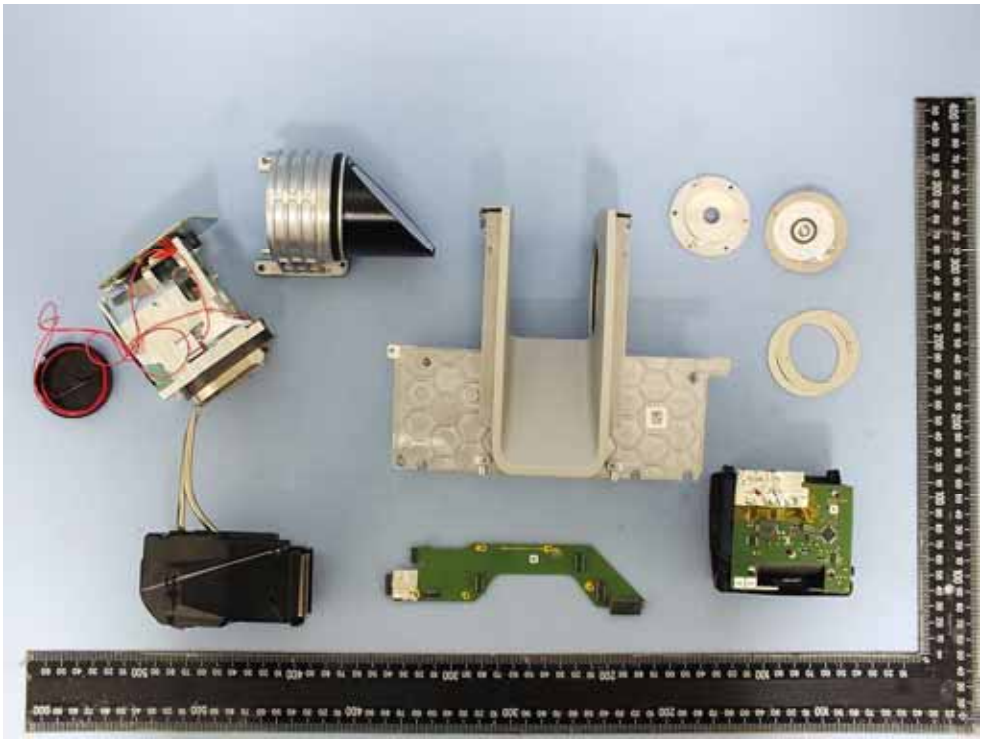


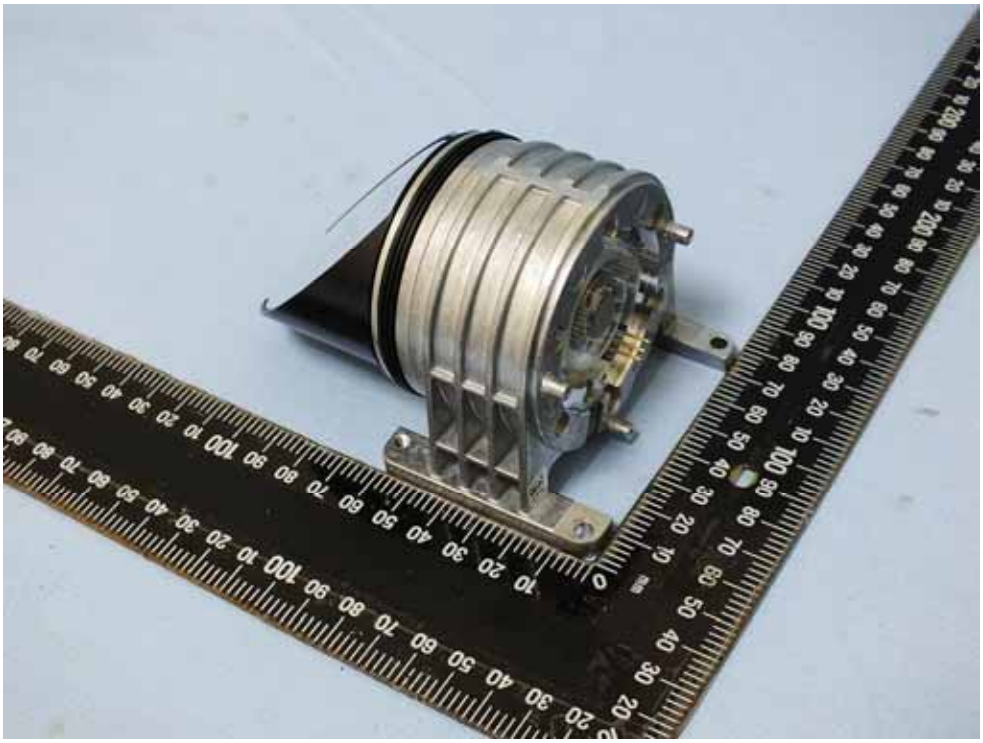


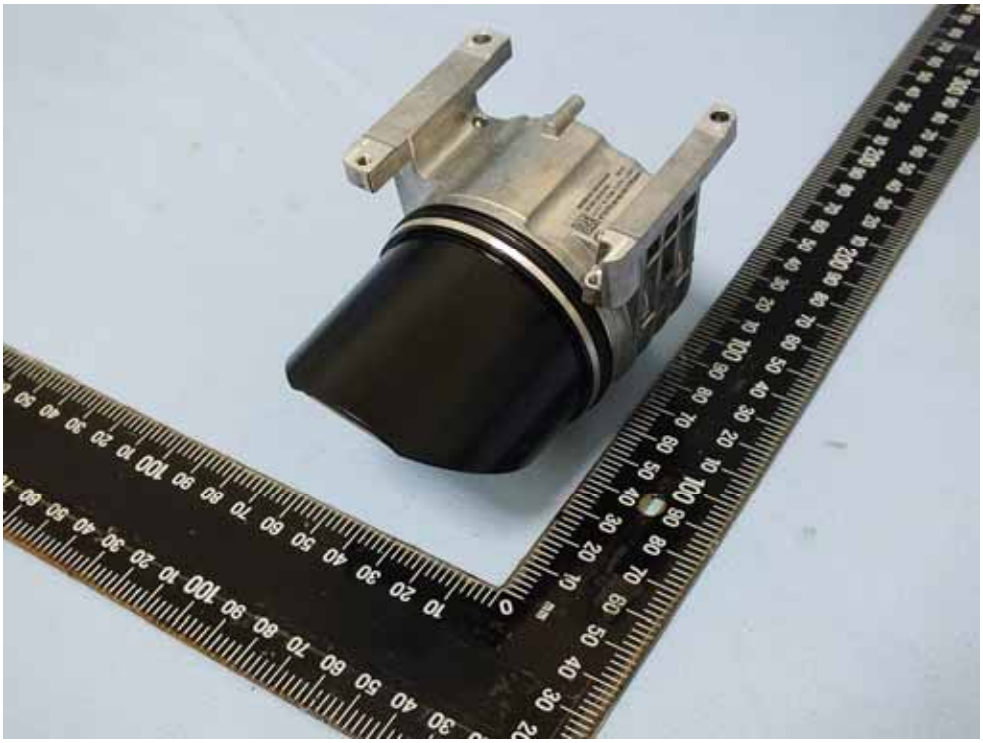




MRSR038B-010C-1C8BS-FB0GSN-NNN
CSN A2502_05.00-R0-14168
KW 31/21
WITTENSTEIN cyber motor GmbH D-97999 Igersheim

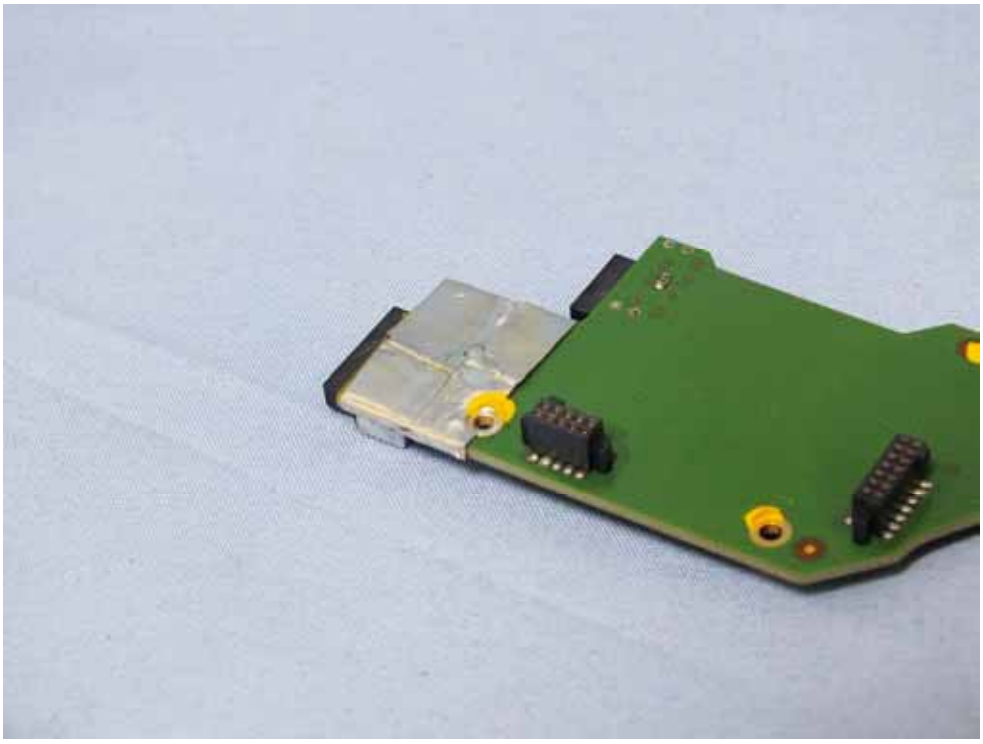


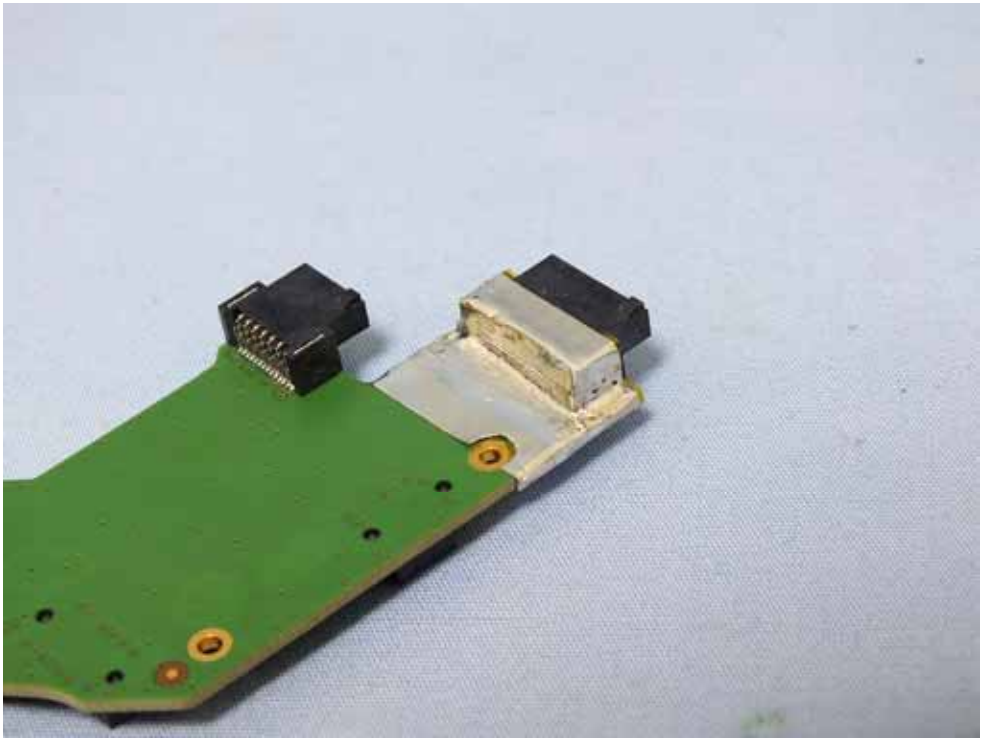


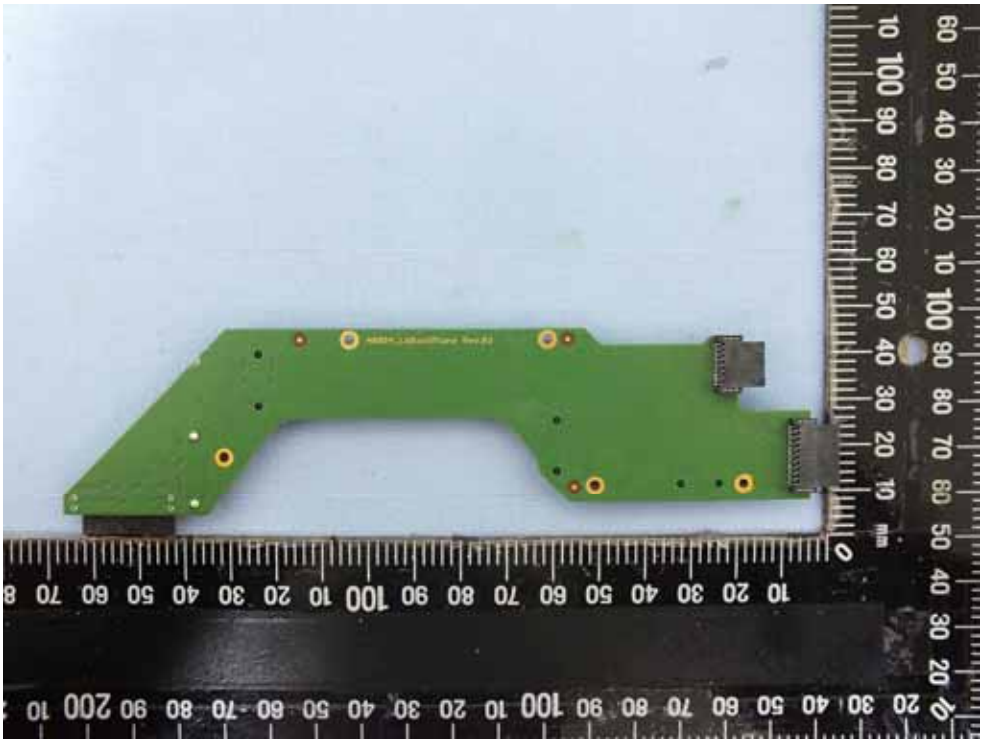


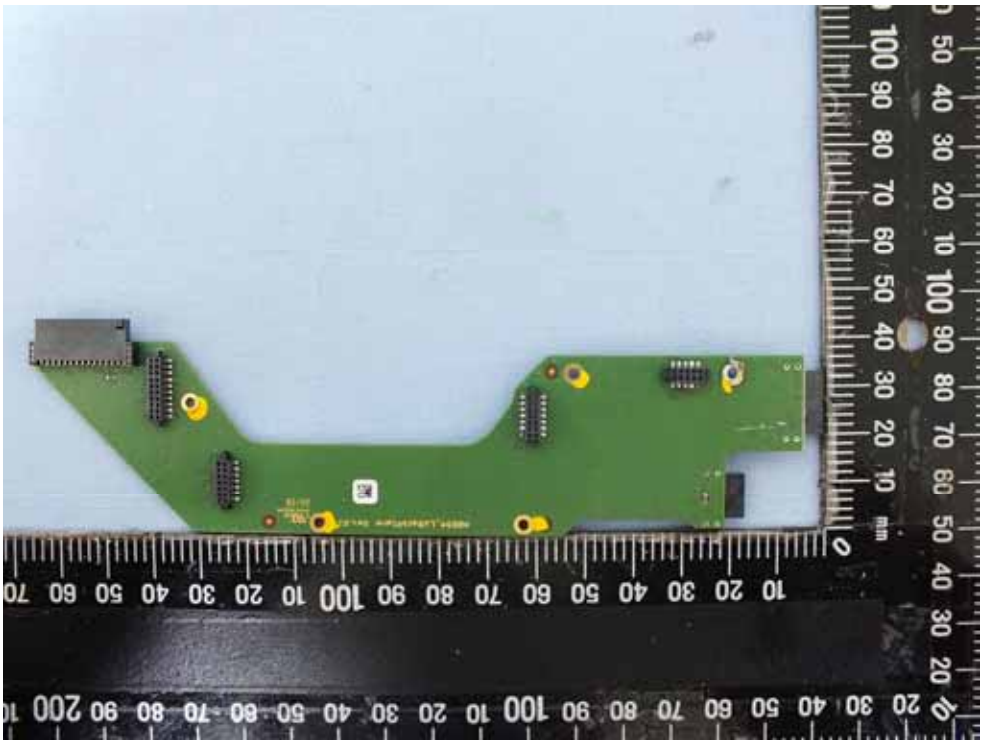


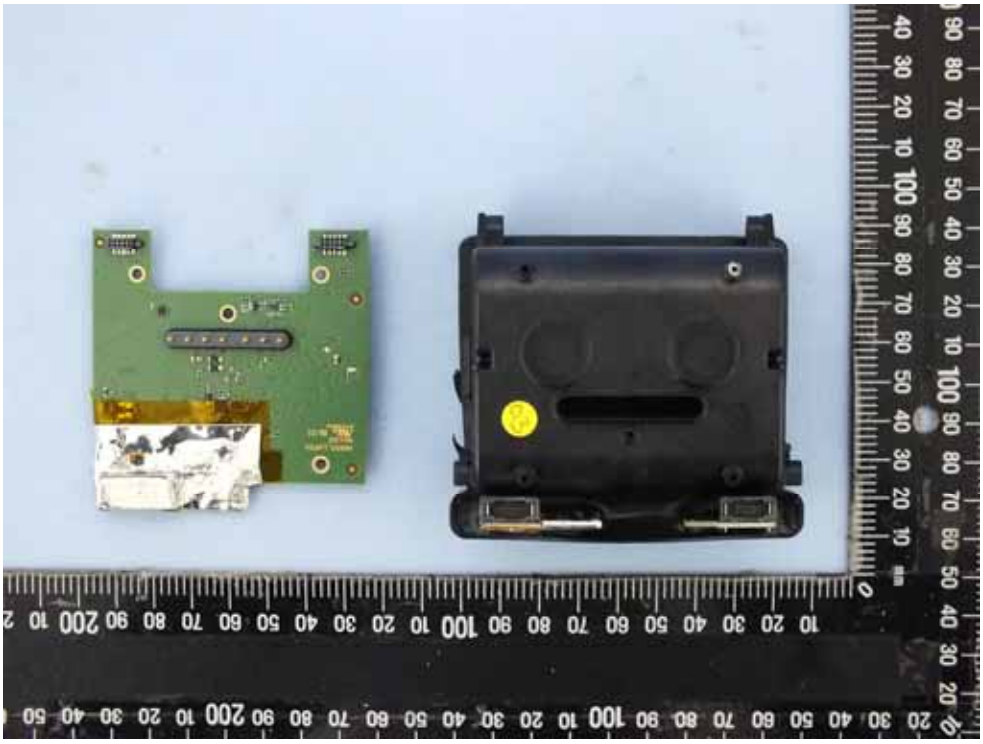


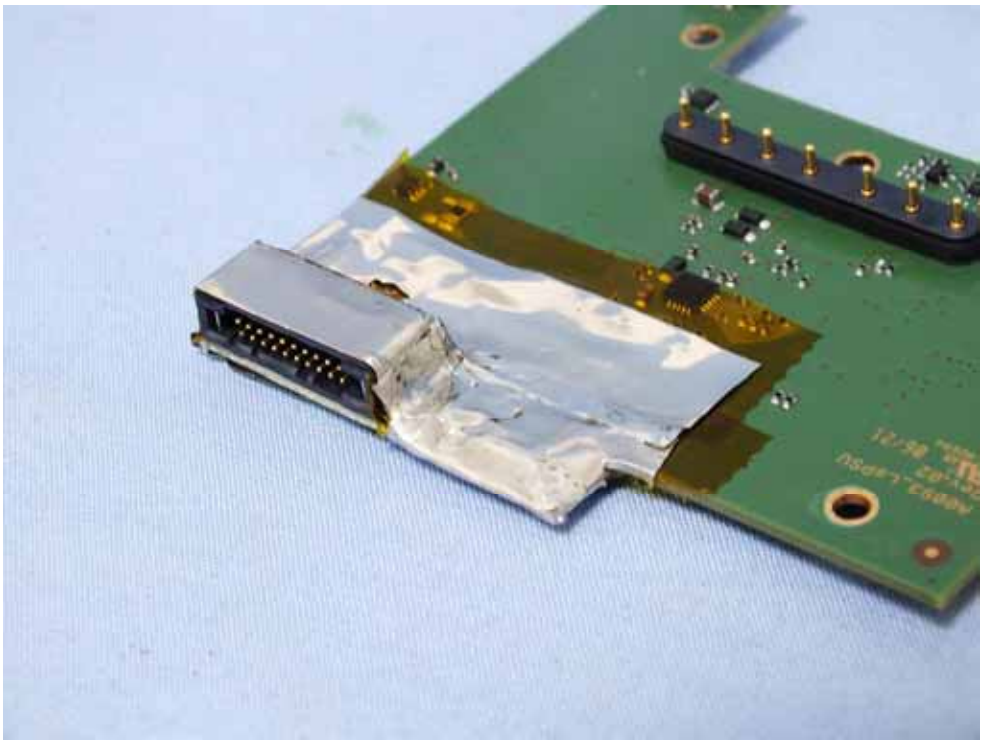


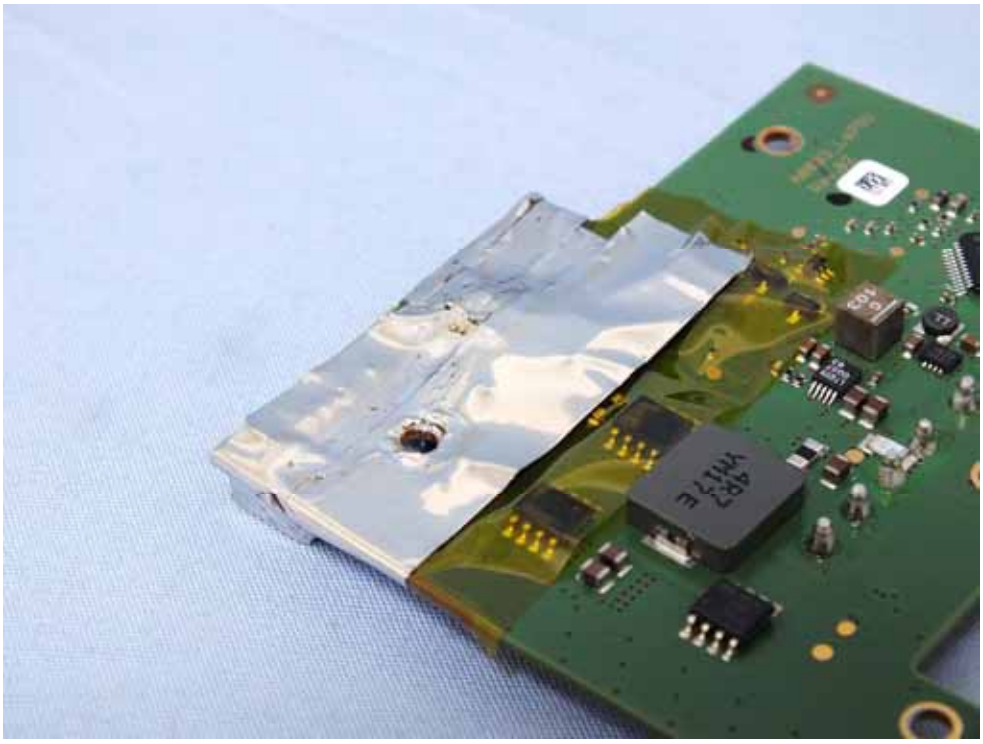


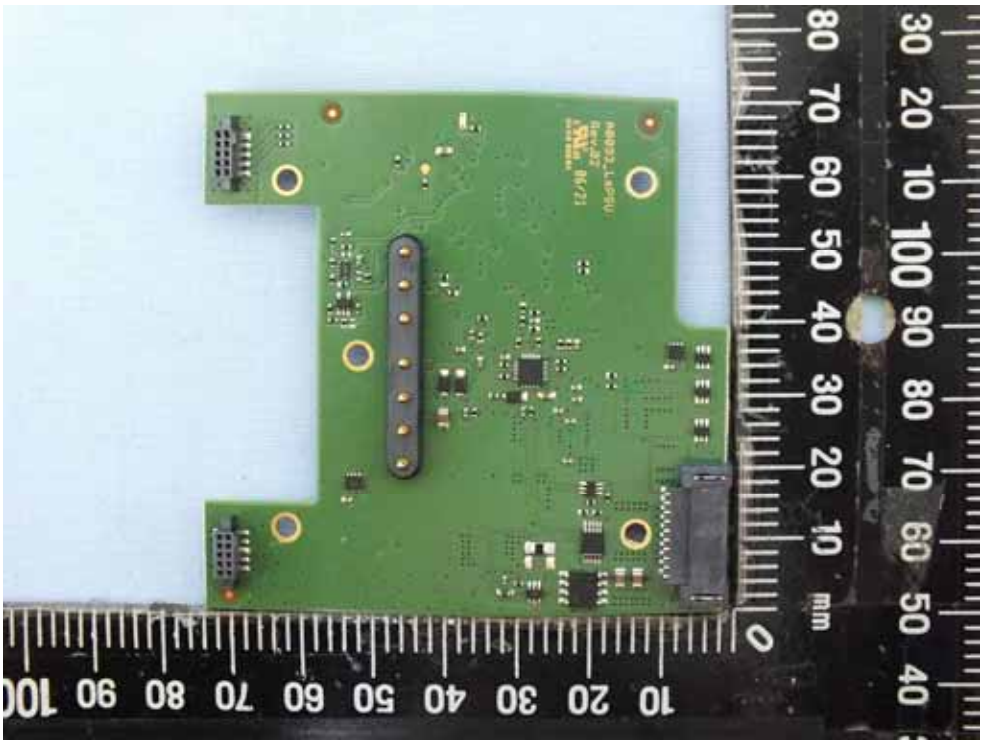


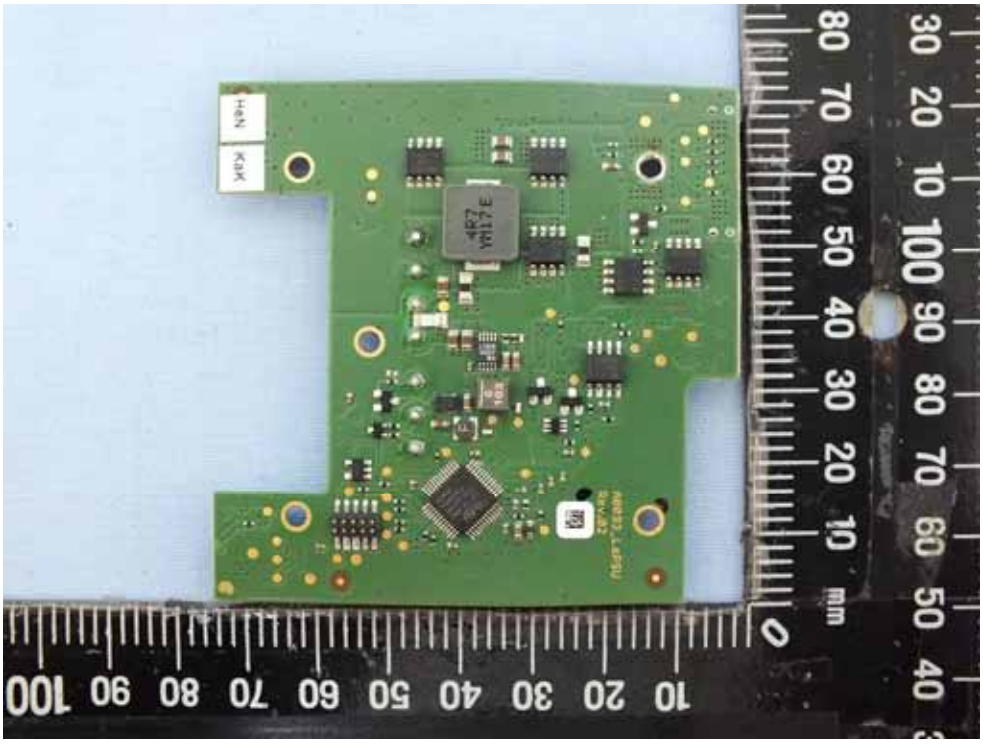


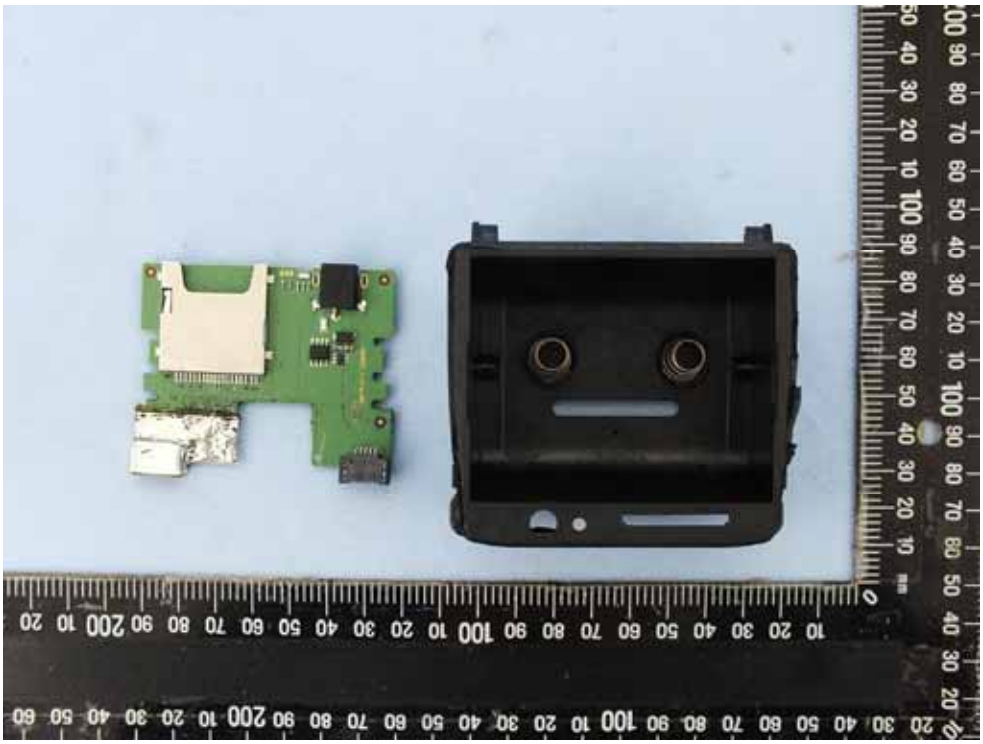


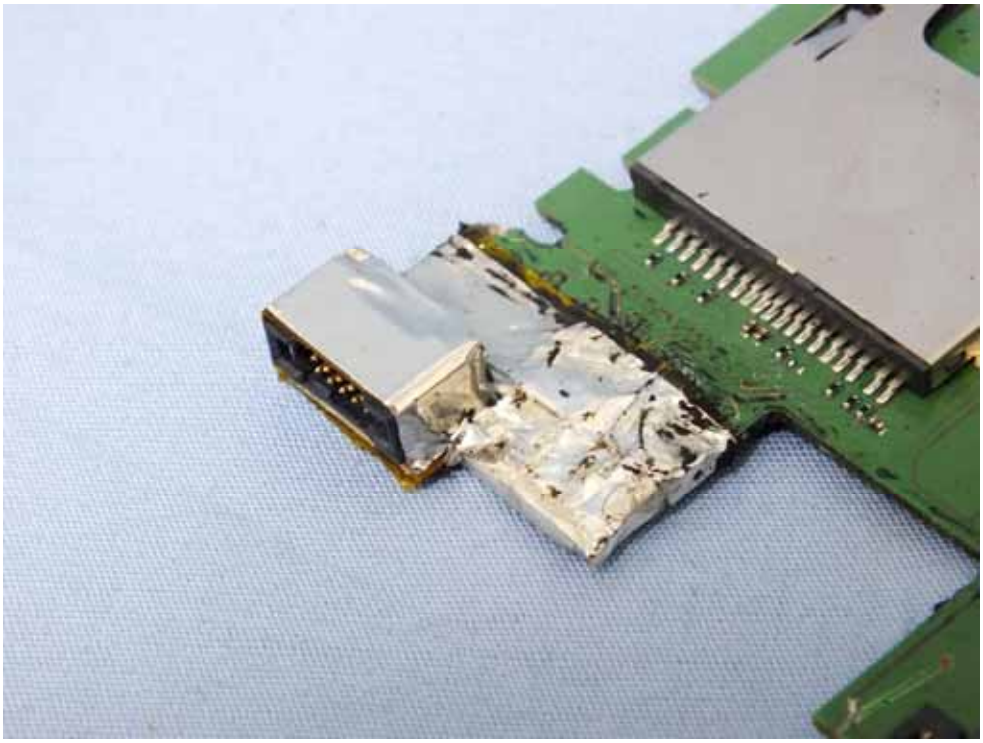


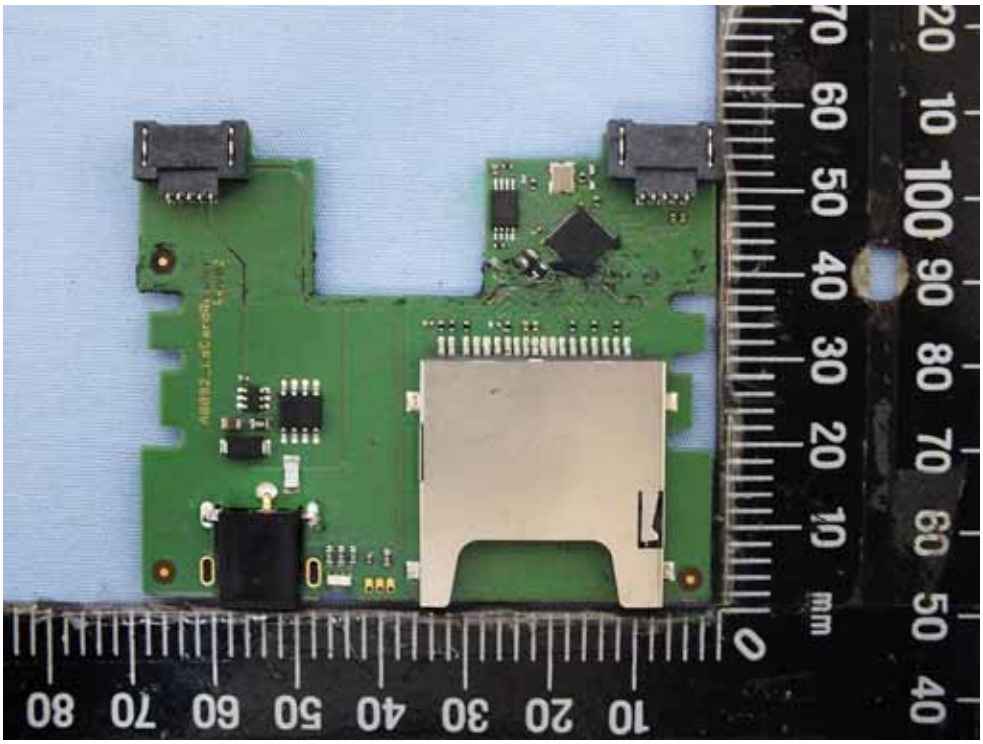


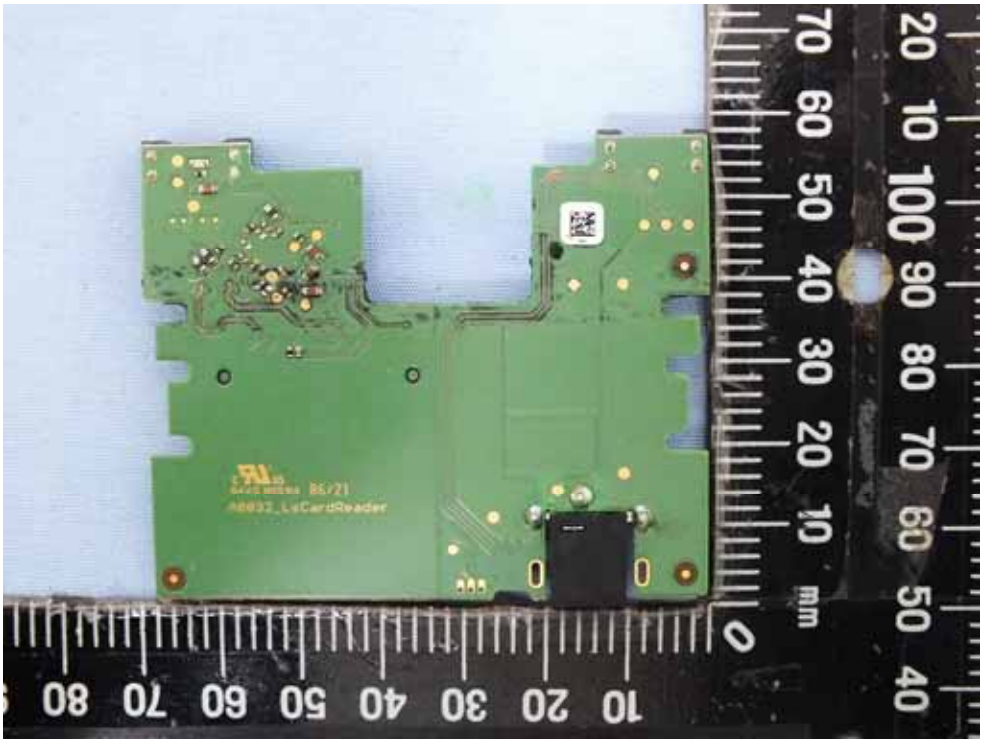

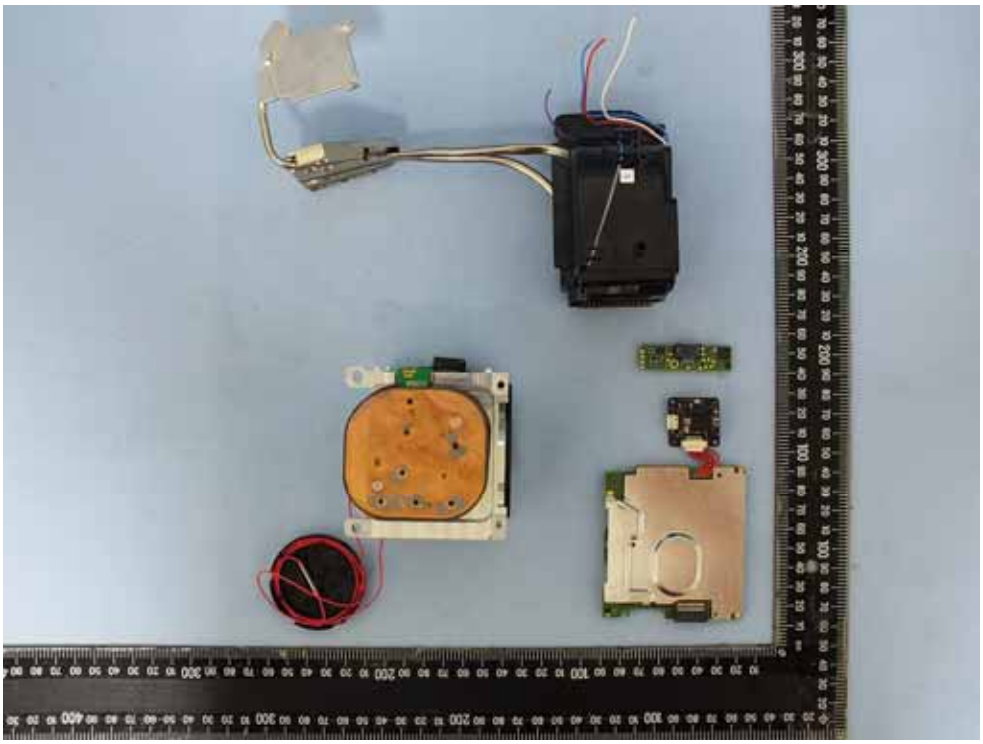


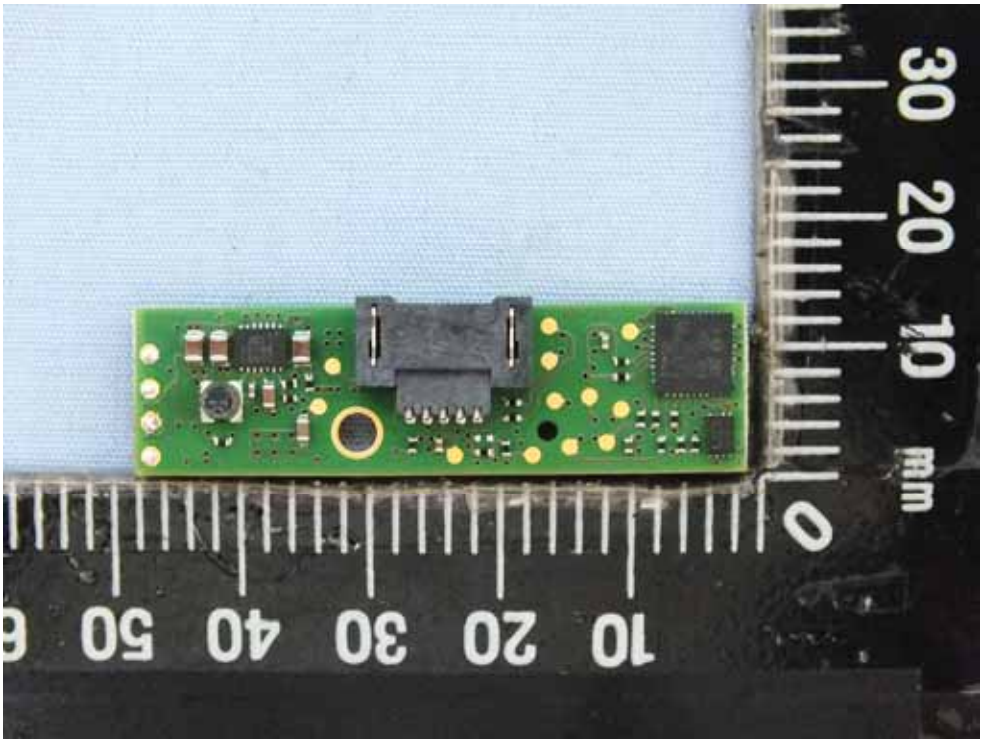

30 20 10 0 mm
10 20 30 40 50

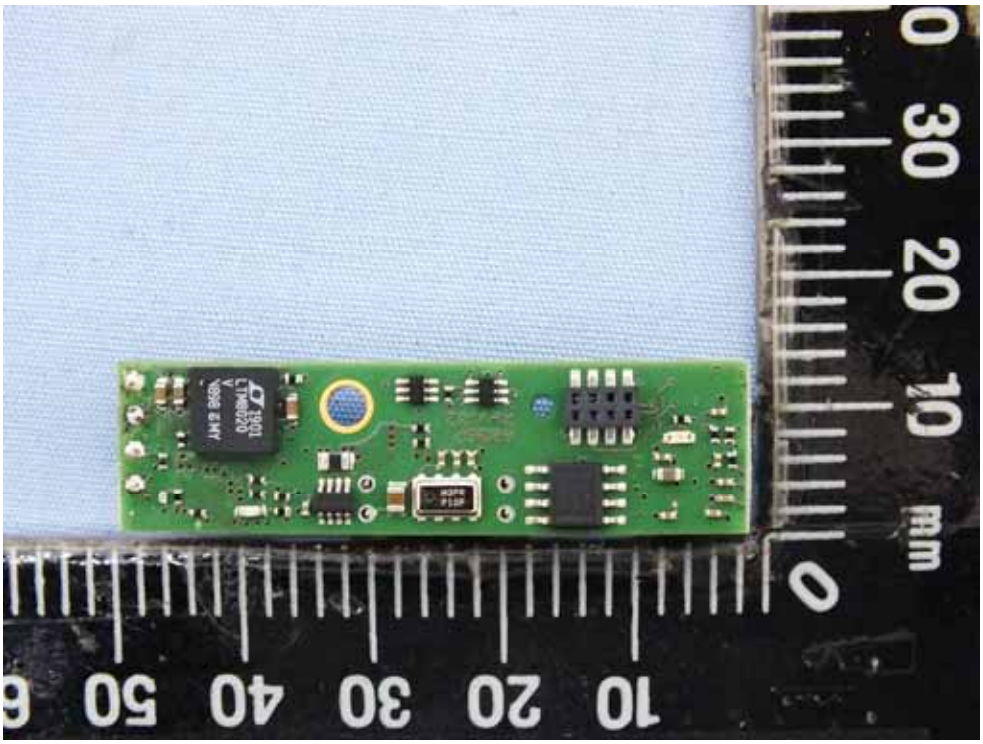


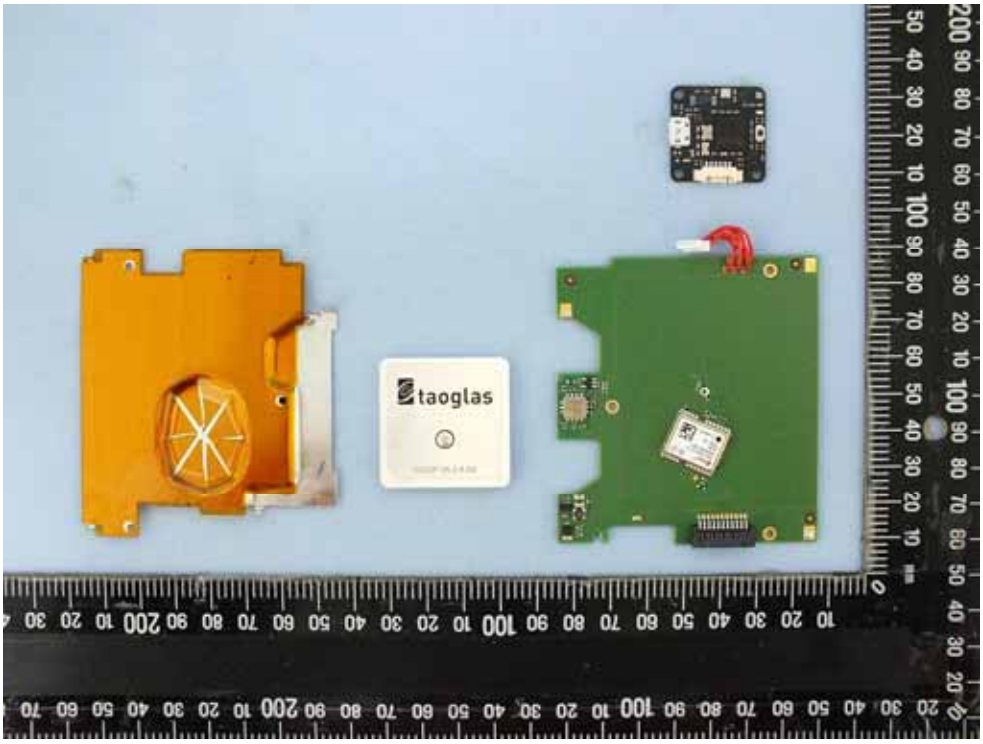
taoglas



taoglas
CGGP.35.3.A.02
40 30 20 10 mm
10 20 30 40 50 60

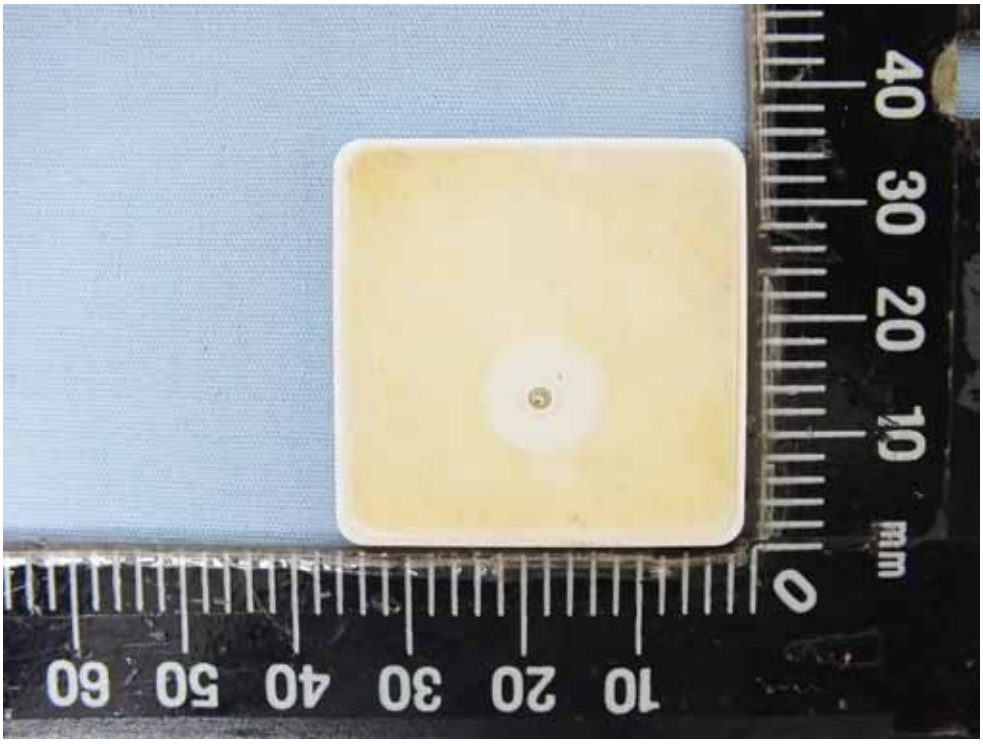

40 30 20 10 mm
10 20 30 40 50 60

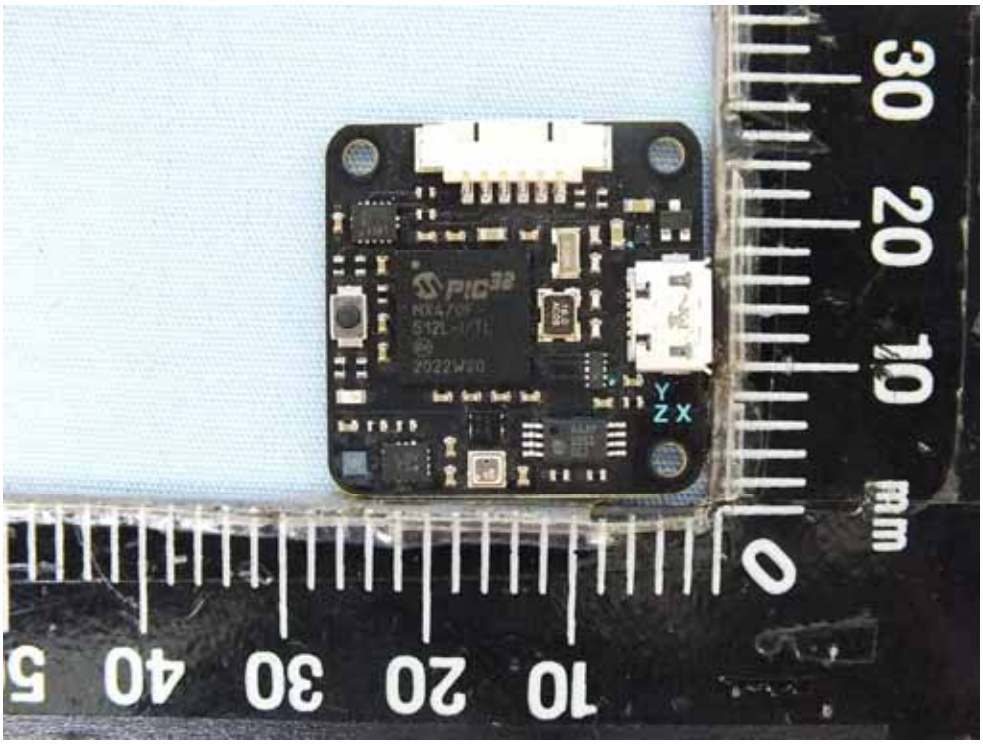

Y
Z X

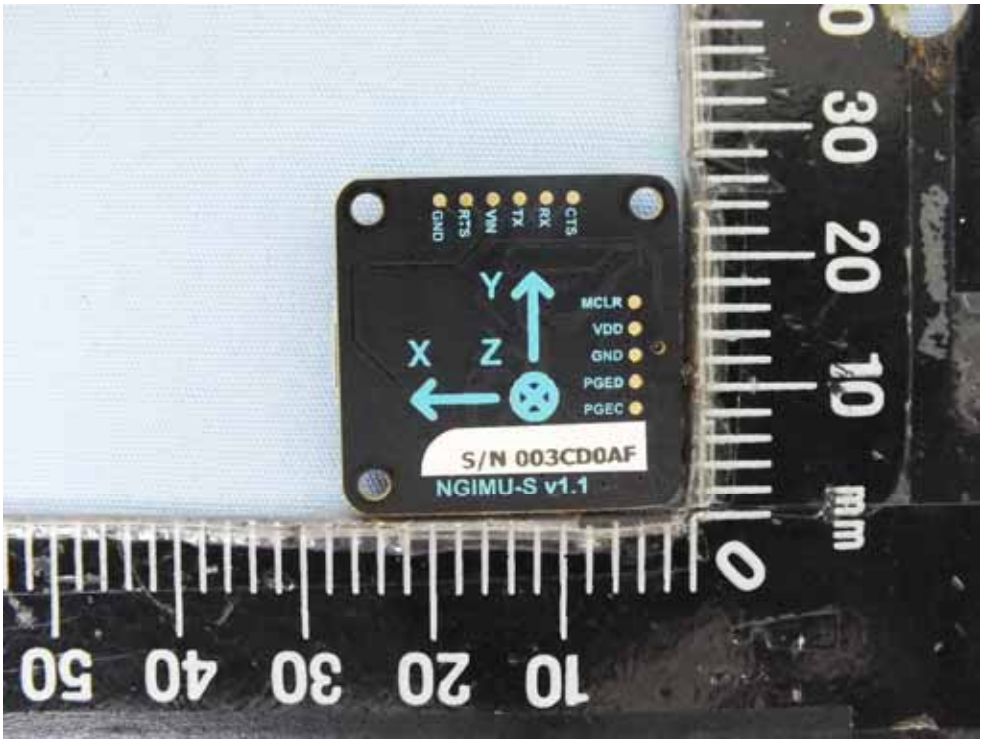

GND
RTS
VIN
TX
RX
CTS
Y
X
Z
MCLR
VDD
GND
PGED
PGEC
S/N 003CD0AF
NGIMU-S v1.1



blox
NEO-M8N-0-10
69205551227
2024
1600 33
© u-blox AG

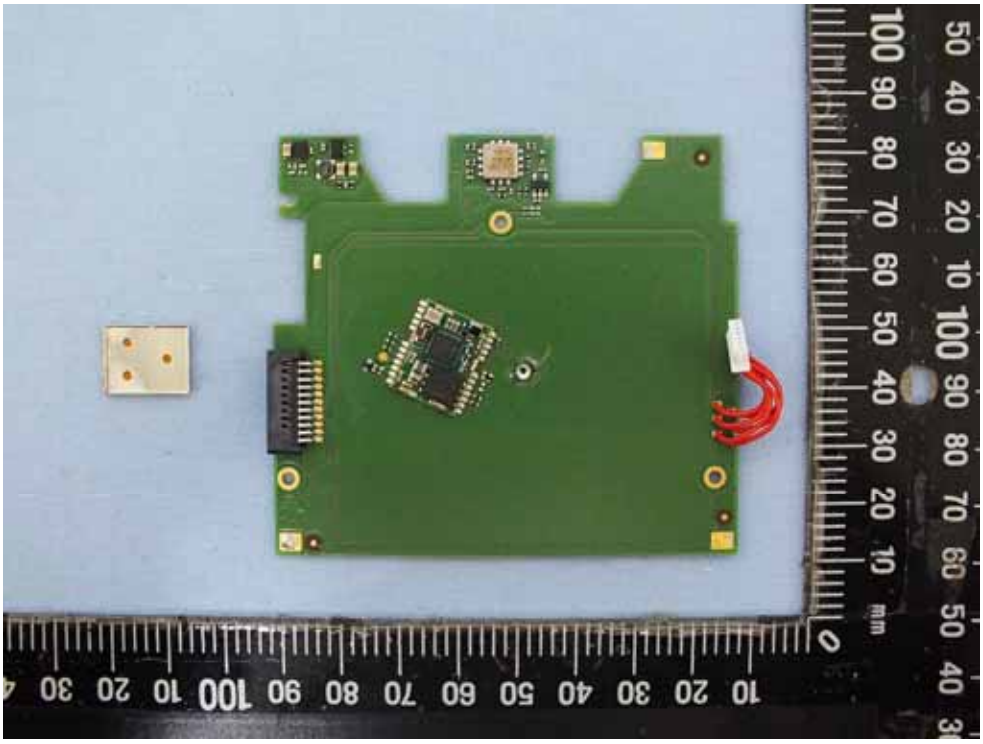


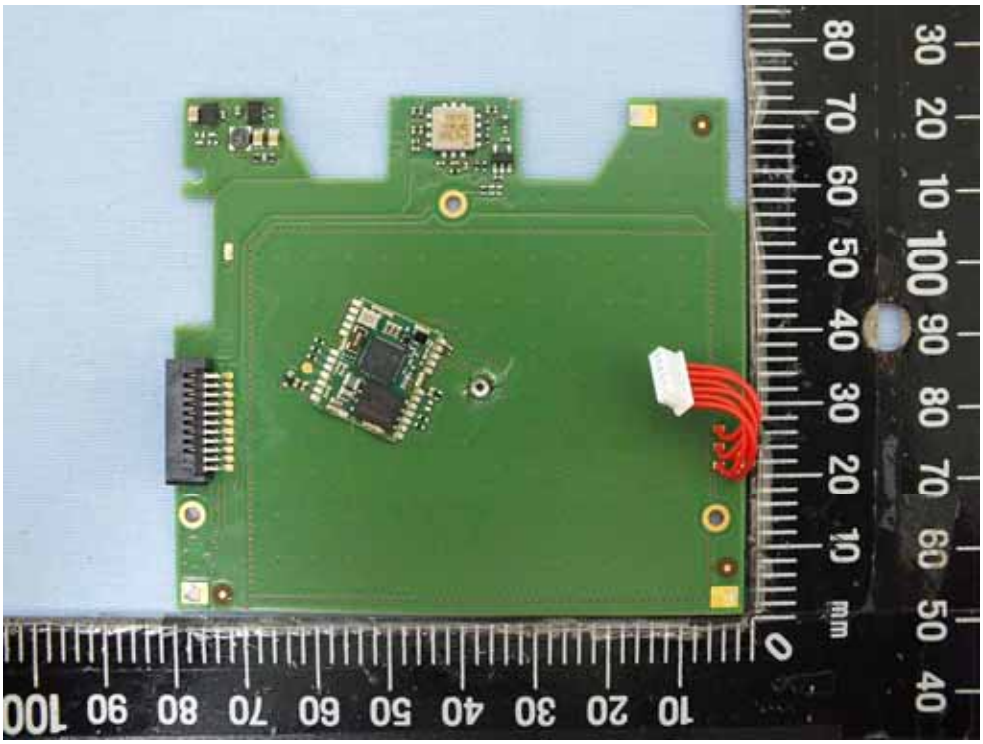


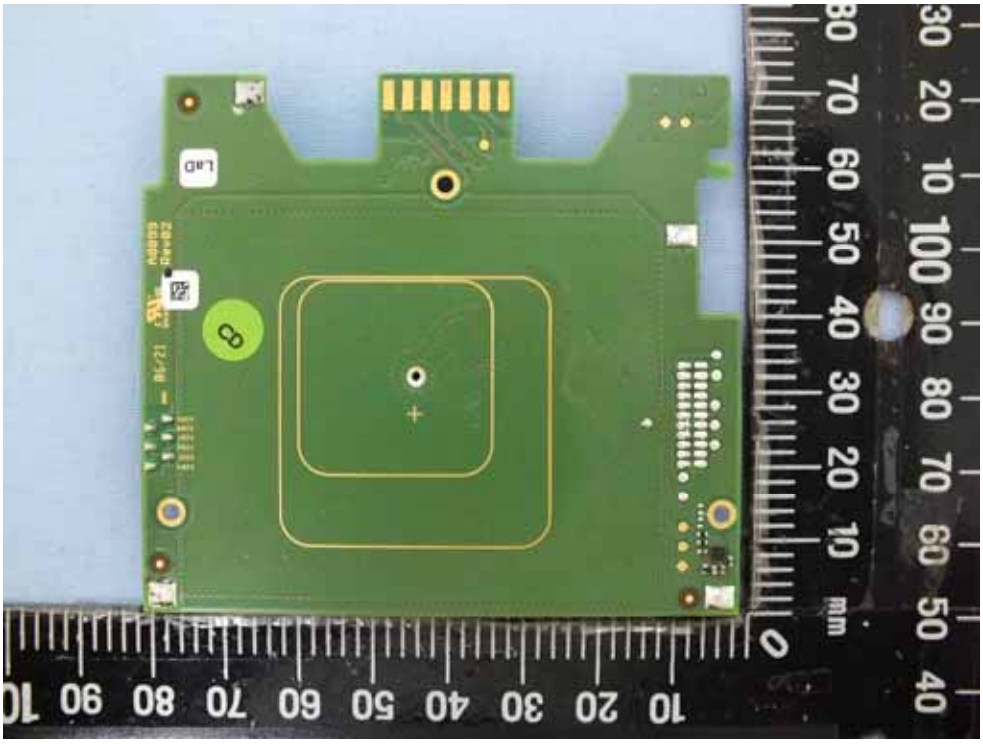


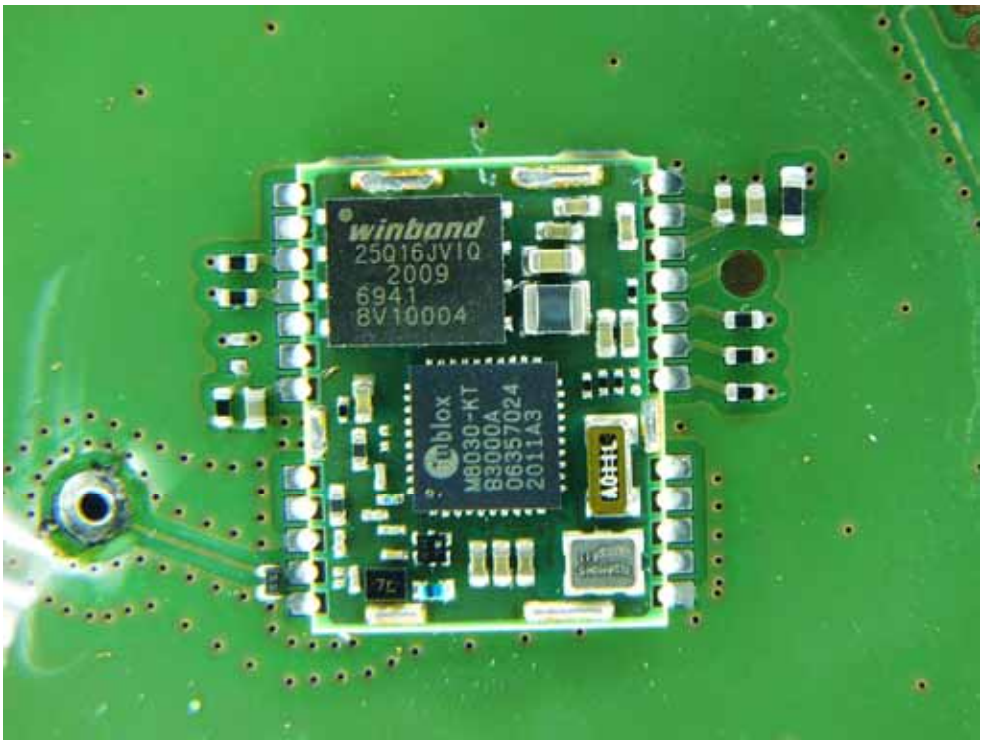
winbond
25Q16JVIQ
2009
6941
8V10004
u-blox
M8030-KT
B3000A
06357024
2011A3

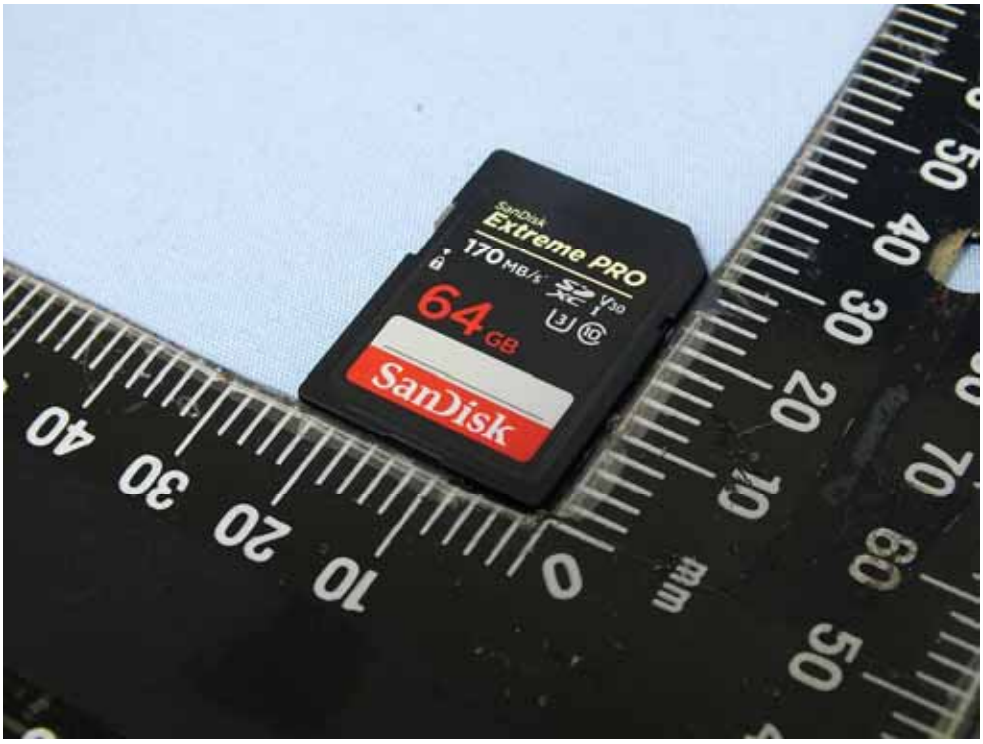

SanDisk
Extreme PRO
170MB/s
64GB
SanDisk

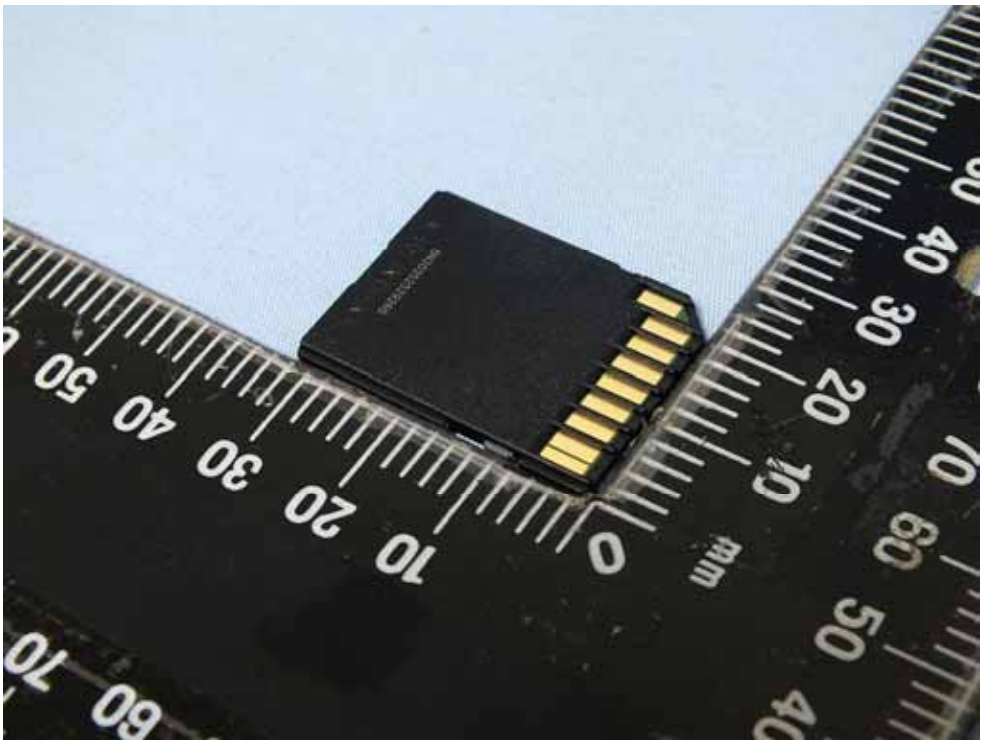


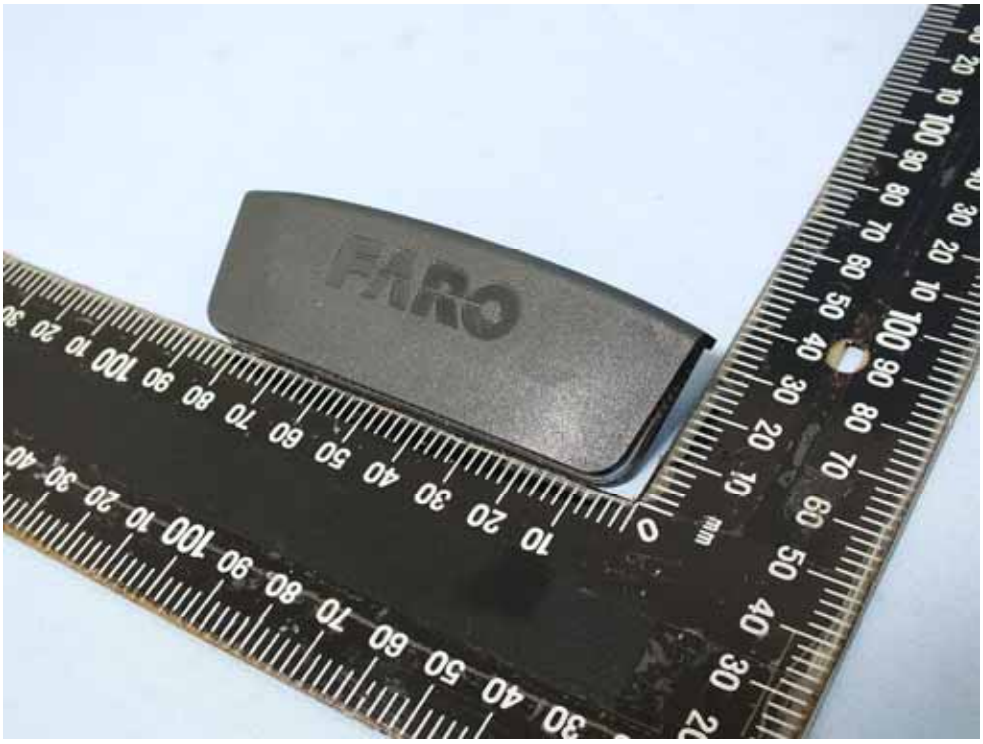
FARO

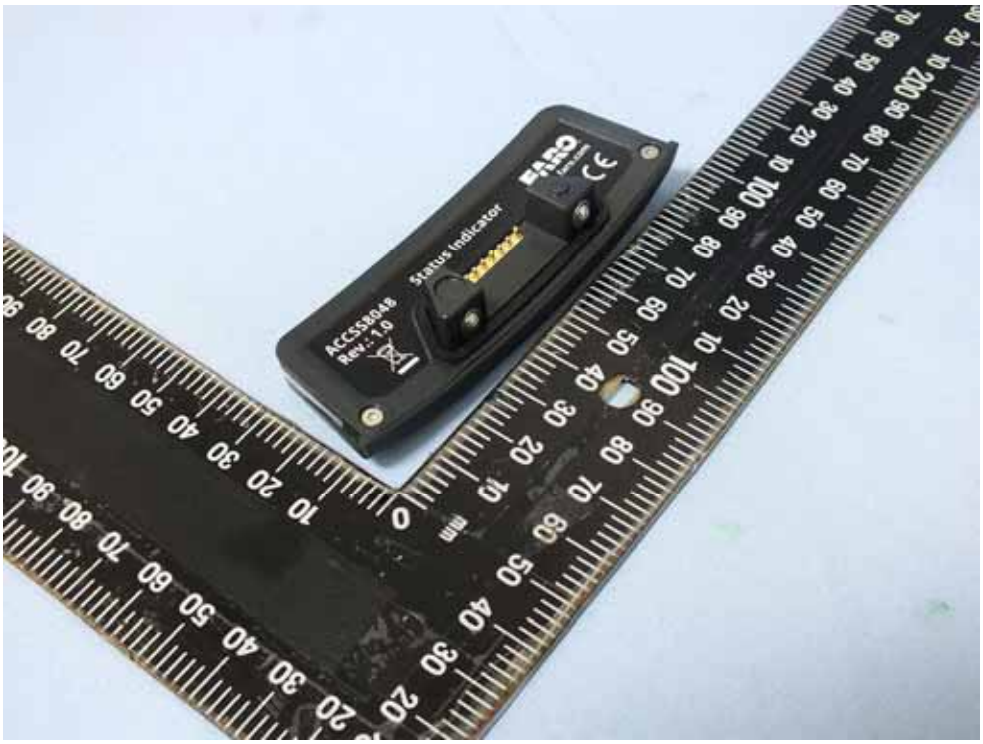

ACCSS8048
Rev.: 1.0
Status Indicator
FARO



ACCSS8048
Rev.: 1.0
Status Indicator
FARO
faro.com
CE

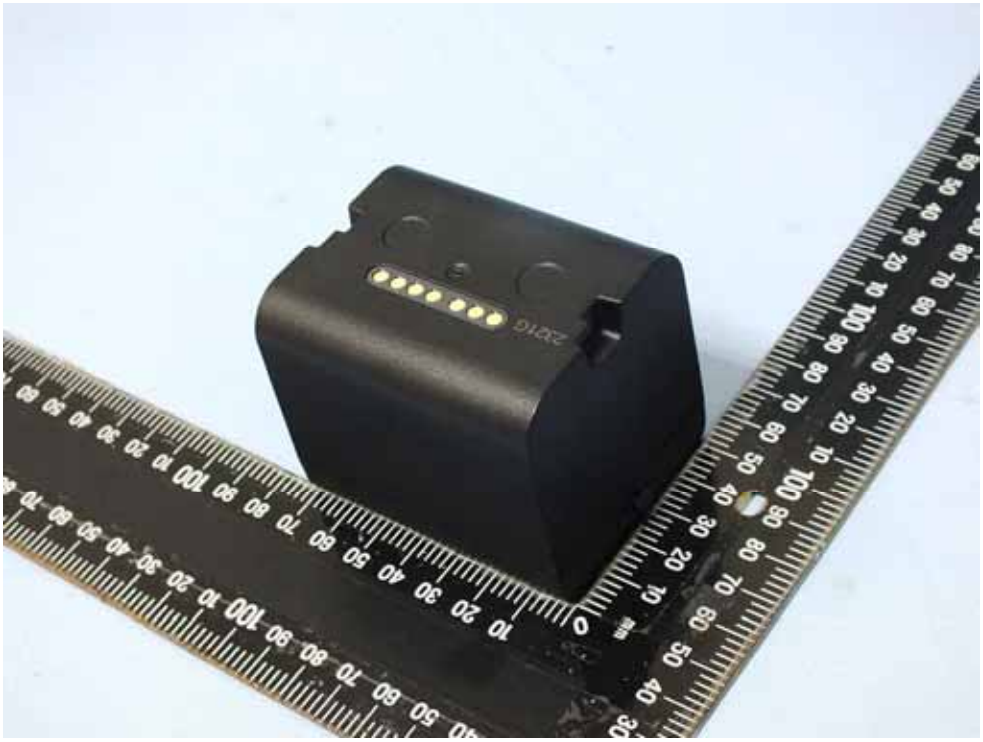

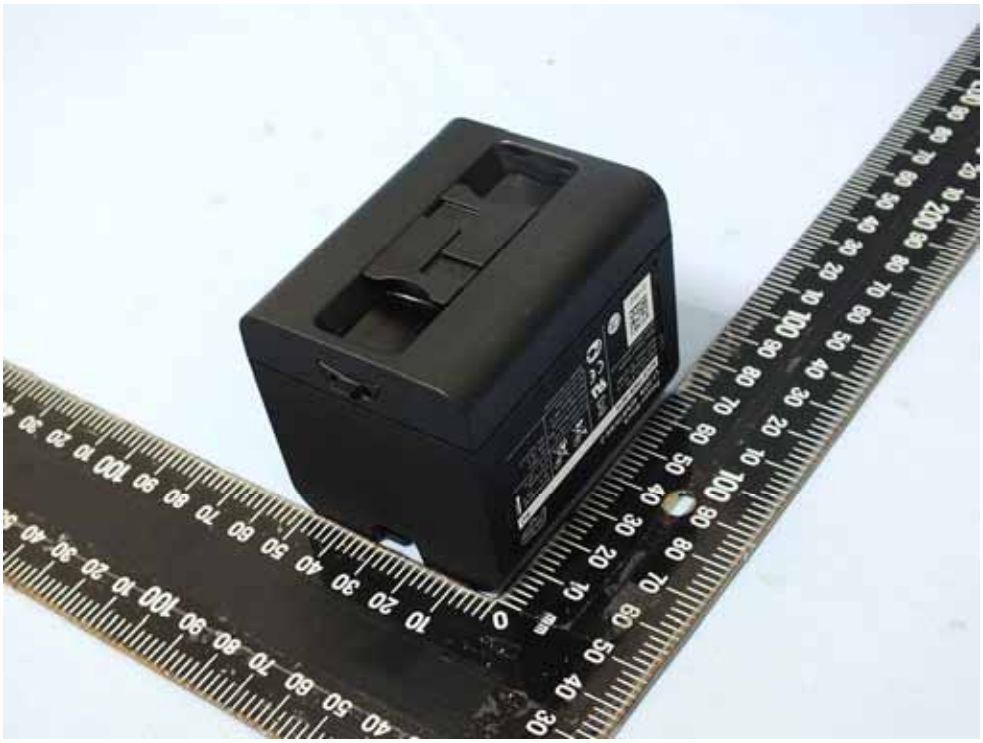


Power Block
Li-ION 4INR19/66-2
ACCS-PWR-0014
HC
Capacity: 6.8 Ah
Nom. Voltage: 14.4 V
Watt Hour: 97.92 Wh
Akku Power GmbH
www.akku-power.com
01562
Discharging:
-10°C – +55°C
Charging:
0°C – +45°C
Caution: risk of fire and burns. Do not open, crush, heat above 60°C or incinerate.
UL 2054
UN 38.3
IEC 62133-2
Made in Germany

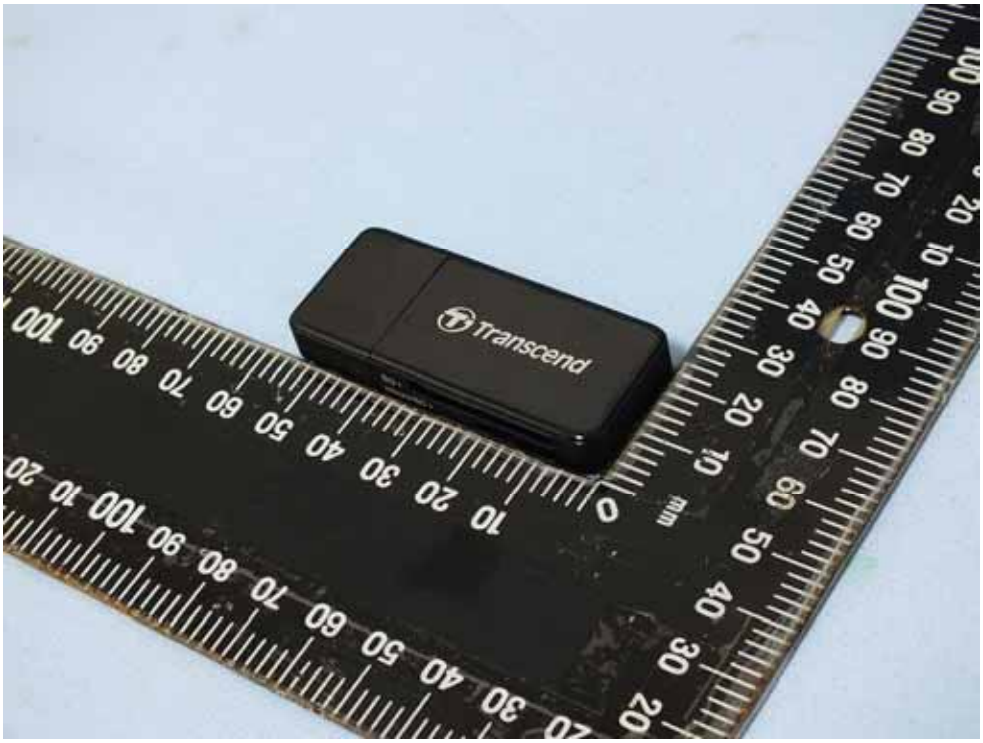
Transcend

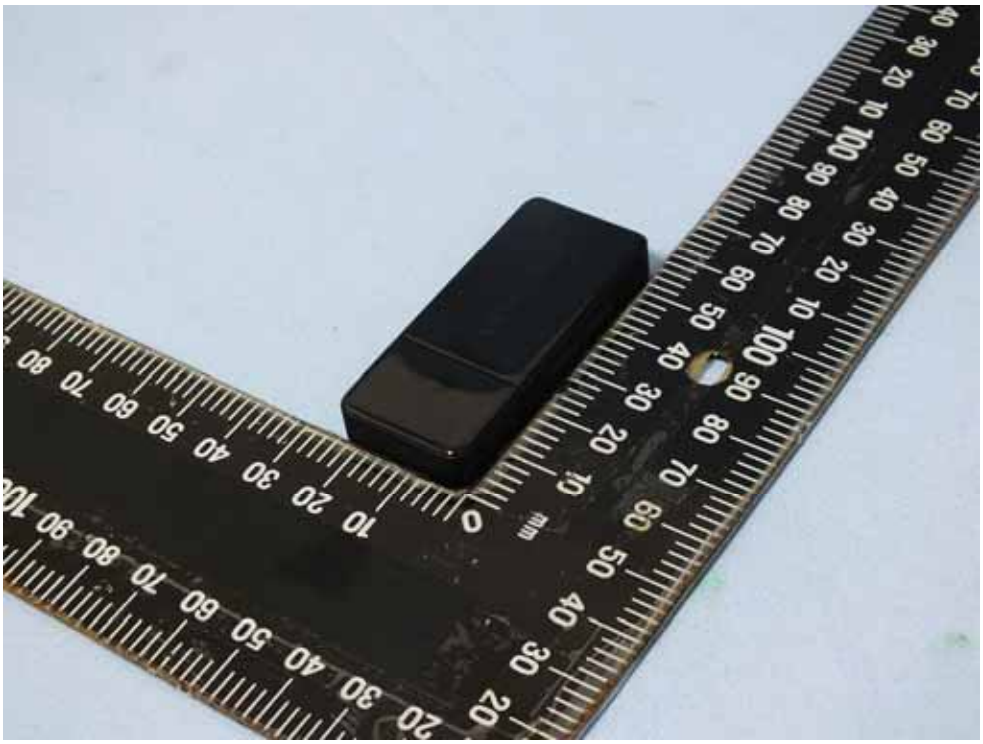


SD
microSD

