



RADIO TEST REPORT

Test Report No. : 13568152S-K-R1

Applicant : KONICA MINOLTA, INC.
Type of EUT : Wireless LAN SDIO module
Model Number of EUT : SX-SDMAN2
*: The EUT was installed in the typical host device for testing.
Test regulation : FCC Part 15 Subpart C: 2021
Test item : Antenna terminal conducted test
Test Result : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 13568152S-K. 13568152S-K is replaced with this report.

Date of test: July 6 to 8, 2016 and January 13, 2021
and February 18, 2022

Representative test engineer: 
Yosuke Murakami
Engineer

Approved by: 
Toyokazu Imamura
Leader



CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

REVISION HISTORY

Original Test Report No.: 13568152S-K

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13568152S-K	March 1, 2021	-	-
1	13568152S-K-R1	February 22, 2022	1	Addition Date of test: February 17, 2022
			6	Addition Receipt Date: February 8, 2022
			21,22	Correction of Average output power data: 11g: 2437 MHz 11n-20 (MIMO): 2437 MHz
			29	Addition of Test equipment. Used for February 17, 2022 tested.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	6
SECTION 4: Operation of EUT during testing.....	9
SECTION 5: Antenna Terminal Conducted Tests.....	12
APPENDIX 1: Test data	13
6 dB Bandwidth and 99 % Occupied Bandwidth.....	13
Maximum Peak Output Power	18
Average Output Power	20
Conducted Spurious Emission	23
Power Density	24
APPENDIX 2: Test instruments	29
APPENDIX 3: Photographs of test setup	30
Antenna Terminal Conducted Tests.....	30

SECTION 1: Customer information

Company Name : KONICA MINOLTA, INC.
Address : 1, Sakura-machi, Hino-shi, Tokyo, Japan 191-8511
Telephone Number : +81-42-589-8429
Facsimile Number : +81-42-589-8053
Contact Person : Yukihiro Niekawa

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT on the cover and other relevant pages
 - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
 - SECTION 1: Customer information
 - SECTION 2: Equipment under test (EUT) other than the Receipt Date
 - SECTION 4: Operation of EUT during testing
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type : Wireless LAN SDIO module
Model Number : SX-SDMAN2
Serial Number : Refer to SECTION 4.2
Rating : DC 3.3 V, DC 1.8 V
Receipt Date : June 17, 2016, September 29, 2020 and February 8, 2022
Country of Mass-production : Japan
Condition : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification : No Modification by the test lab.

2.2 Product Description

Model: SX-SDMAN2 (referred to as the EUT in this report) is a Wireless LAN SDIO module.

Clock frequency(ies) in the system : 26 MHz

Radio Specification

Type of radio	IEEE802.11b	IEEE802.11g	IEEE802.11a	IEEE802.11n (20 M band)	IEEE802.11n (40 M band)
Frequency of operation	2412 MHz-2462 MHz	2412 MHz-2462 MHz	5180 MHz-5240 MHz 5260 MHz-5320 MHz 5500 MHz-5700 MHz 5745 MHz-5825 MHz	2412 MHz-2462 MHz 5180 MHz-5240 MHz 5260 MHz-5320 MHz 5500 MHz-5700 MHz 5745 MHz-5825 MHz	5190 MHz-5230 MHz 5270 MHz-5310 MHz 5510 MHz-5670 MHz 5755 MHz-5795 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK)		
Channel spacing	5 MHz		20 MHz	2.4 GHz band: 5 MHz 5 GHz band: 20 MHz	40 MHz
Antenna type	[Main Antenna (chain 0) /Sub Antenna (chain 1)] PIFA (Planar Inverted F Antenna)				
Antenna Gain	Main Antenna (chain 0) -1.95 dBi (2.4 GHz Band), -0.98 dBi (5 GHz Band) Sub Antenna (chain 1) -2.21 dBi (2.4 GHz Band), -1.54 dBi (5 GHz Band)				
Antenna Connector type	[Main Antenna (chain 0) /Sub Antenna (chain 1)] Connector; PCB side: U.FL, Antenna side: soldered				

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on January 12, 2021 and effective February 11, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

* The revisions do not affect the test result conducted before its effective date.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
6 dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a)	See data.	Complied a)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d)		Complied b)	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ISED: RSS-247 5.2(b)		Complied c)	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10		Complied d)	Conducted (below 30 MHz) *1)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Radiated test result is not included in this test report.

- a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)
b) Refer to APPENDIX 1 (data of Maximum Peak Output Power)
c) Refer to APPENDIX 1 (data of Power Density)
d) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The RF Module has its own regulator.

The RF Module is constantly provided voltage through the regulator regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has a unique coupling/antenna connector. Therefore the equipment complies with the requirement.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Shonan EMC Lab.

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	1.4 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	1.6 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	0.89 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.2 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	0.91 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.2 dB
Spurious emission (Conducted) below 1GHz	0.87 dB
Spurious emission (Conducted) 1 GHz-3 GHz	0.96 dB
Spurious emission (Conducted) 3 GHz-18 GHz	3.0 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.6 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.2 dB
Bandwidth Measurement	0.012 %
Duty cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.95 deg.C.
Humidity_SCH-01	0.83 %
Temperature_SCH-02	2.0 deg.C.
Humidity_SCH-02	6.6 %
Voltage	0.86 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009.


Mode	Remarks*	Power Setting (dBm)
IEEE 802.11b (11b)	11 Mbps, PN9	14
IEEE 802.11g (11g)	36 Mbps, PN9	8, 15, 11
IEEE 802.11n SISO 20 MHz BW (11n-20)	MCS 4 (Long GI) PN9	6, 14, 7
IEEE 802.11n MIMO 20 MHz BW (11n-20)	MCS 12 (Long GI) PN9	6, 14, 7
*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)		
*Power of the EUT was set by the software as follows; - Software: Wireless authentication test tool Version 1.3.0.3 (Maximum Peak output power), Date: 2016.7.6, Version 1.3.0 (other than Maximum Peak output power), Date: 2017.4.18, (Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.		

*The details of Operating mode(s)

Test Item	Operating Mode	Tested Antenna	Tested frequency
Conducted Spurious Emission	11n-20 (MIMO) Tx	Sub	2437 MHz
6 dB Bandwidth	11b Tx	Sub	2412 MHz
Maximum Peak Output Power	11g Tx		2437 MHz
Power Density	11sn-20 (SISO) Tx		2462 MHz
99 % Occupied Bandwidth	11n-20 (MIMO) Tx	Main + Sub	2412 MHz 2437 MHz 2462 MHz

4.2 Configuration and peripherals

For Maximum Peak Output Power

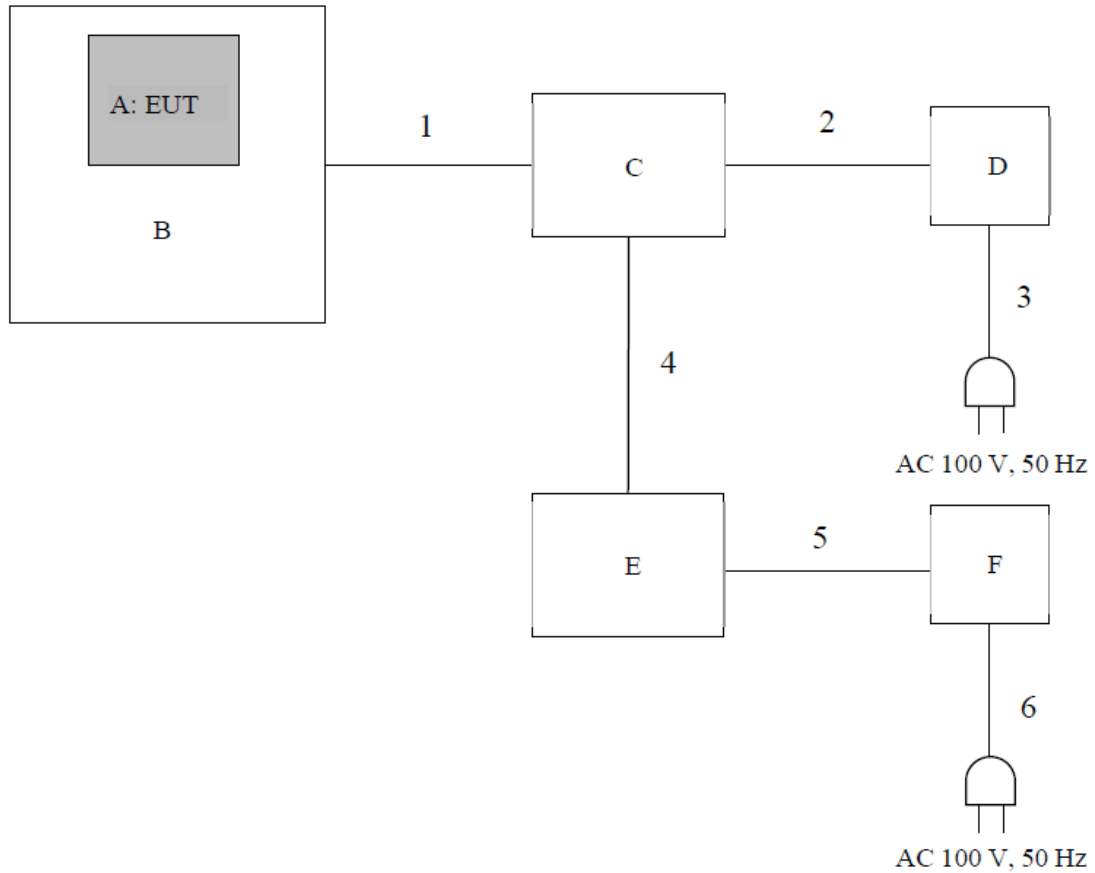

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless LAN SDIO module	SX-SDMAN2	A9YH-S002	KONICA MINOLTA Inc.	EUT
B	SKR 3000	P-75	A9YH-S002	KONICA MINOLTA Inc.	-
C	Battery Charging Unit	AeroDR	A7R9-00077	KONICA MINOLTA Inc.	-
D	AC Adapter	TR60M48	60480-0000099	ELECTRONICS CO., LTD.	-
E	Laptop Computer	dynabook Satellite B453 M	ZE127581H	TOSHIBA	-
F	AC Adapter	PA3917U-1ACA	G71C000DP410	TOSHIBA	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	IO Cable	10.0	Shielded	Shielded	-
2	DC Cable	1.5	Unshielded	Unshielded	-
3	AC Cable	3.0	Unshielded	Unshielded	-
4	LAN Cable	1.0	Unshielded	Unshielded	Cat.6
5	DC Cable	0.8	Unshielded	Unshielded	-
6	AC Cable	1.7	Unshielded	Unshielded	-

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

For Other Antenna Terminal Conducted tests

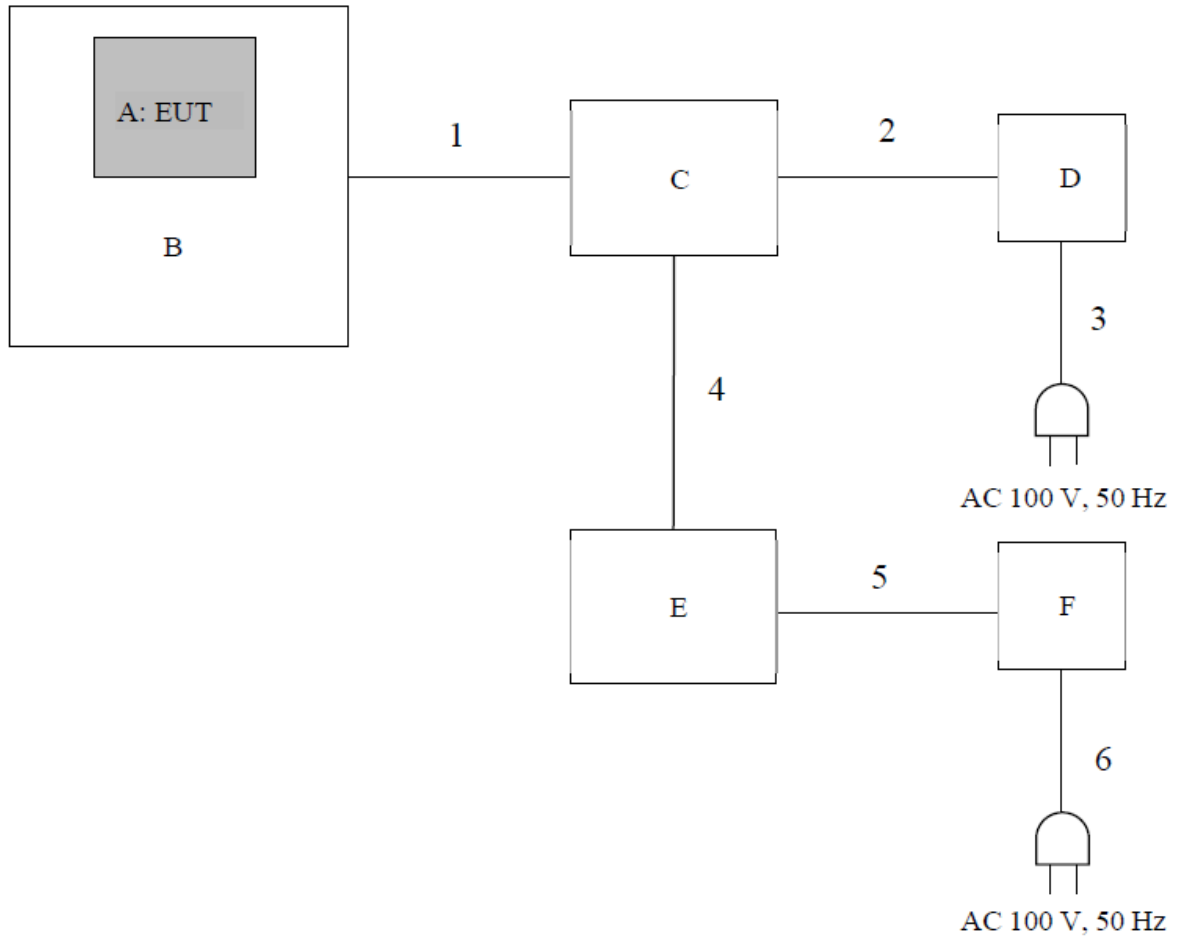

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless LAN SDIO module	SX-SDMAN2	A8CE-S002	KONICA MINOLTA Inc.	EUT
B	SKR 3000	P-61	A8CE-S002	KONICA MINOLTA Inc.	-
C	Battery Charging Unit	AeroDR	-	KONICA MINOLTA Inc.	-
D	AC Adapter	TR60M48	-	ELECTRONICS CO., LTD.	-
E	Laptop Computer	7666-77J	LV-B8PZ8 08/05	Lenovo	-
F	AC Adapter	92P1213	11S92P1213Z1ZD DZ92C2WU	Lenovo	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	IO Cable	10.0	Shielded	Shielded	-
2	DC Cable	1.5	Unshielded	Unshielded	-
3	AC Cable	3.0	Unshielded	Unshielded	-
4	LAN Cable	1.0	Unshielded	Unshielded	Cat.6
5	DC Cable	0.8	Unshielded	Unshielded	-
6	AC Cable	1.7	Unshielded	Unshielded	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6 dB Bandwidth	50 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Sample	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Peak Power Density	1.5 times the 6 dB Bandwidth	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data


6 dB Bandwidth and 99 % Occupied Bandwidth

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 8, 2016
Temperature / Humidity 25 deg. C / 56 % RH
Engineer Hiroyuki Morikawa
Mode Tx

Mode	Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
11b	2412	11949.0	6.955	> 0.5000
	2437	11840.0	7.436	> 0.5000
	2462	11865.8	7.456	> 0.5000
11g	2412	17256.3	16.494	> 0.5000
	2437	17436.6	16.479	> 0.5000
	2462	17319.4	16.480	> 0.5000
11n-20 (SISO)	2412	18263.4	17.661	> 0.5000
	2437	18440.5	17.715	> 0.5000
	2462	18369.1	17.686	> 0.5000
11n-20 (MIMO)	2412	18160.4	17.678	> 0.5000
	2437	18312.0	17.674	> 0.5000
	2462	18189.9	17.663	> 0.5000

* The test was carried out by worst antenna port.


99% Occupied Bandwidth

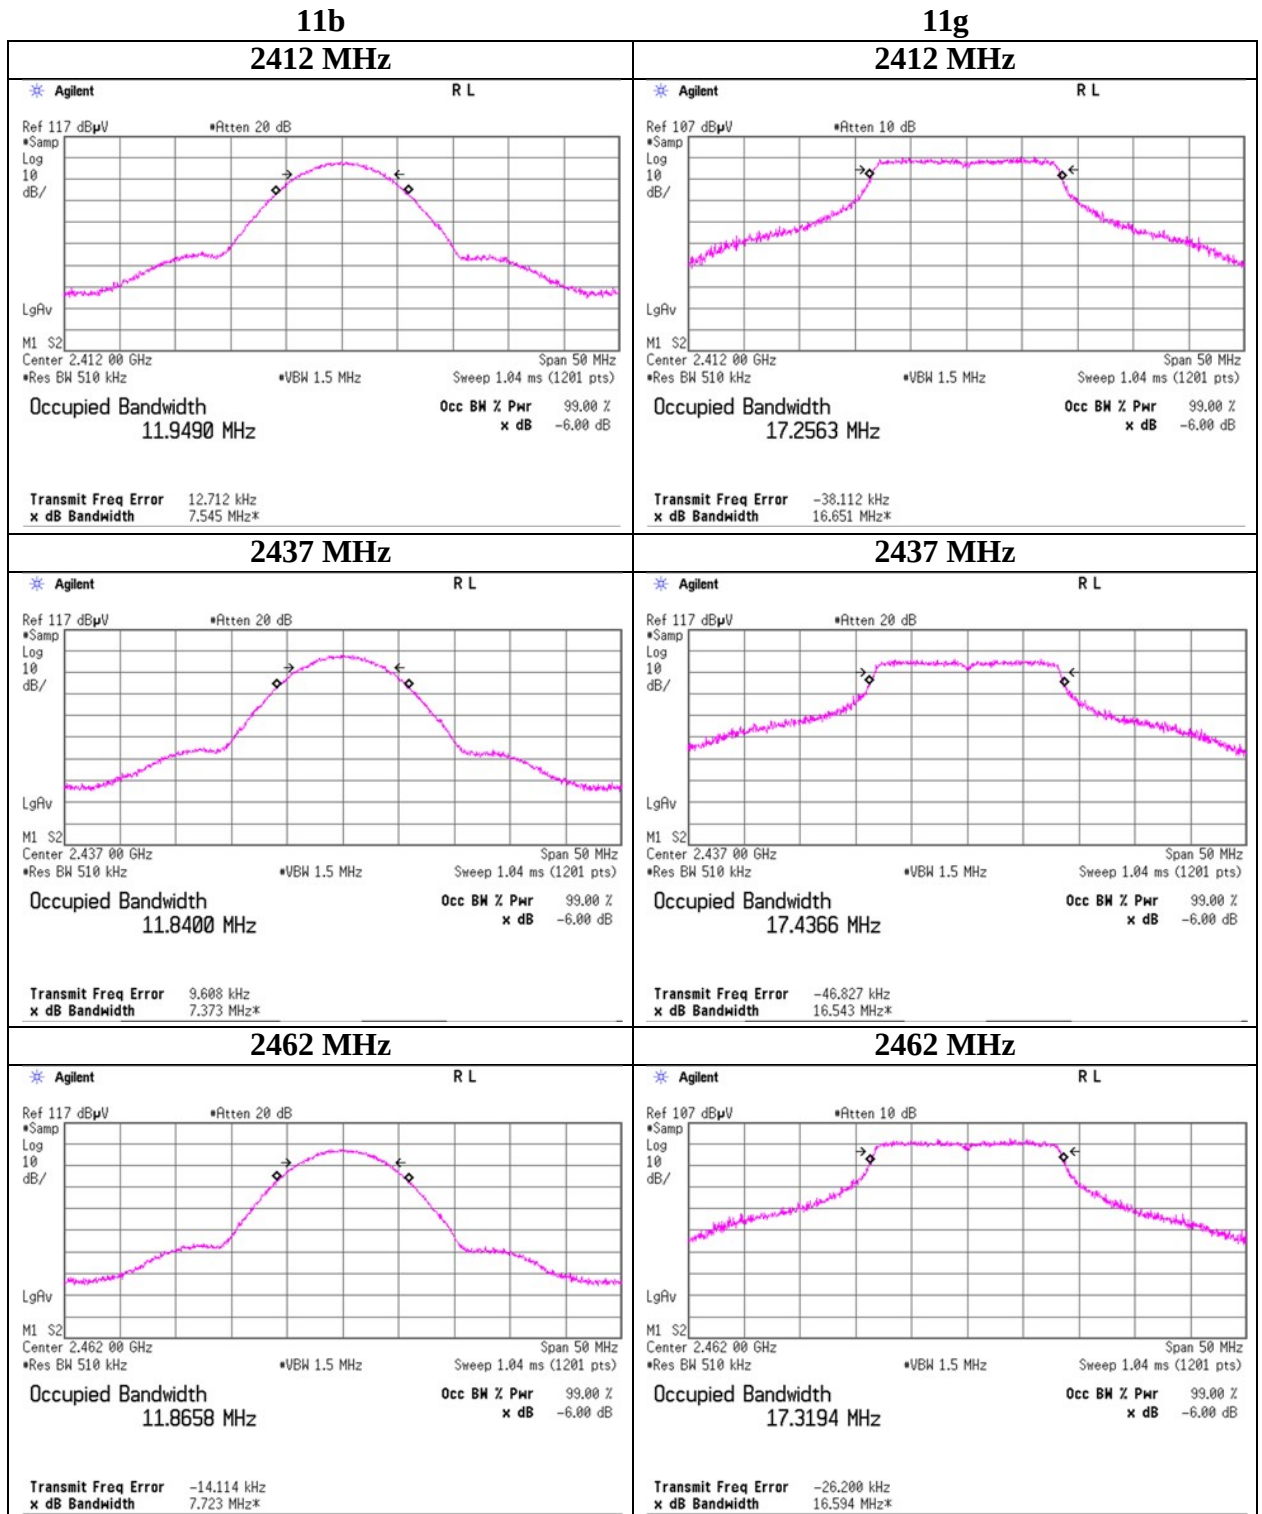

99% Occupied Bandwidth


11n-20 (SISO)

2412 MHz

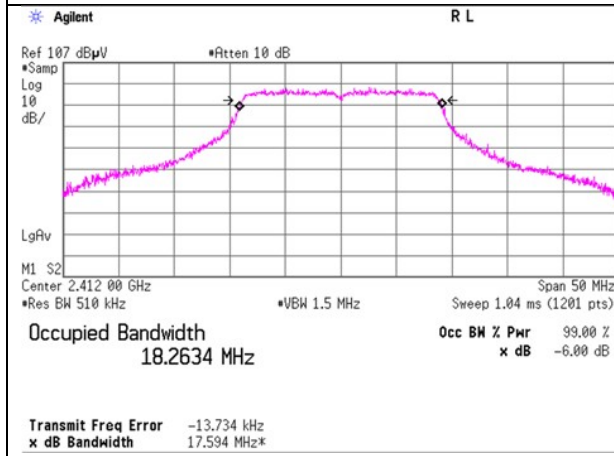


11n-20 (MIMO)


2412 MHz

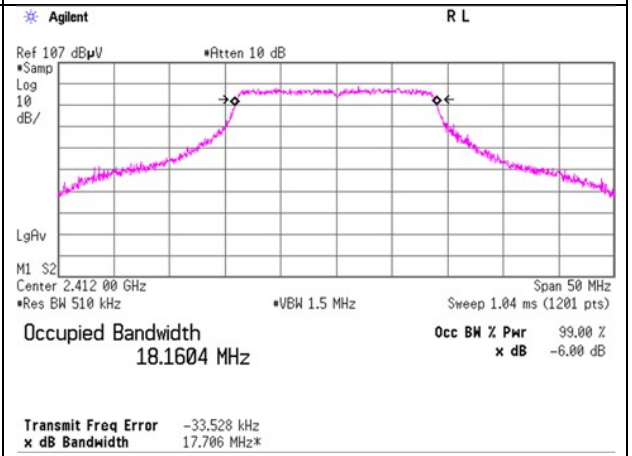


2437 MHz

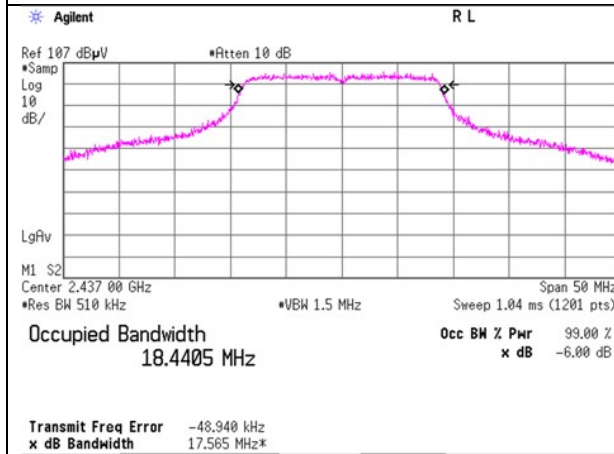


2437 MHz

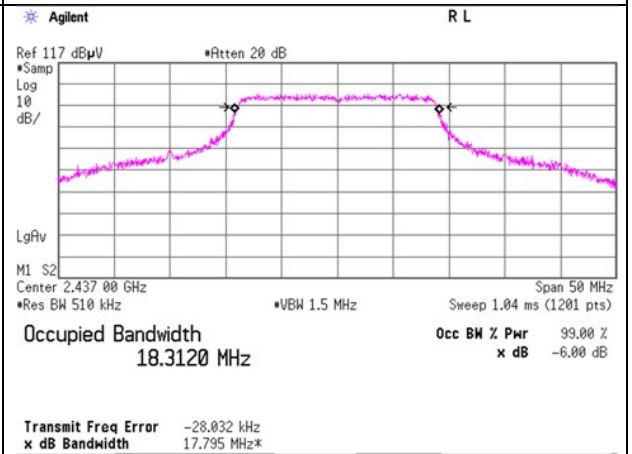


2462 MHz

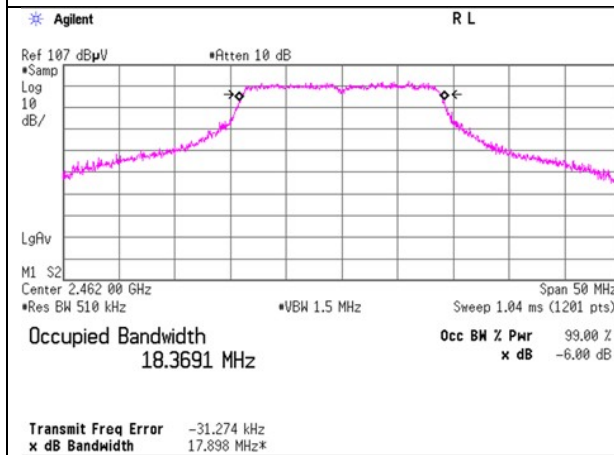

2462 MHz

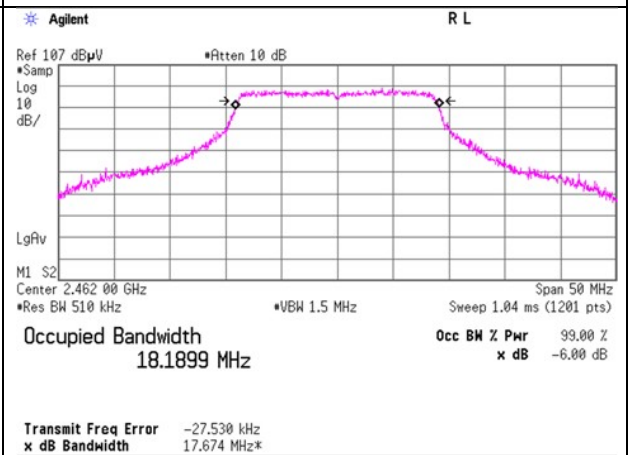


6dB Bandwidth

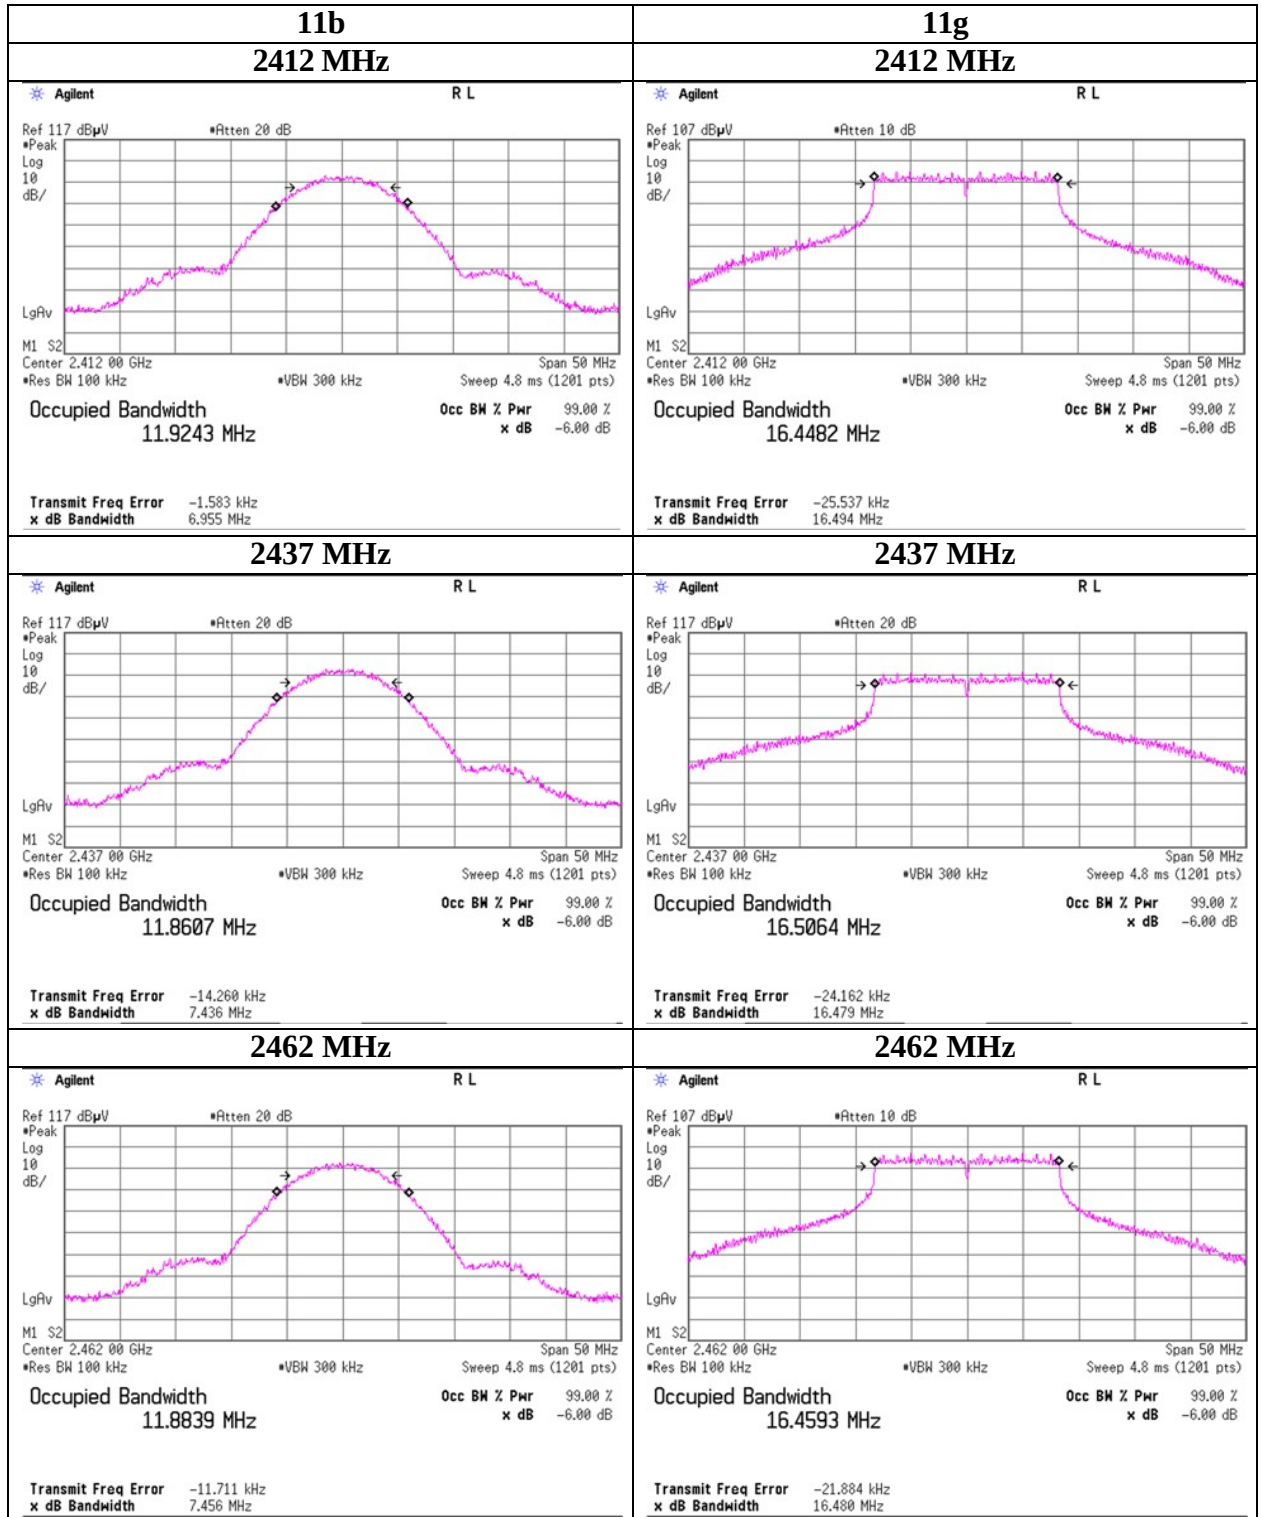

6dB Bandwidth


11n-20 (SISO)

2412 MHz

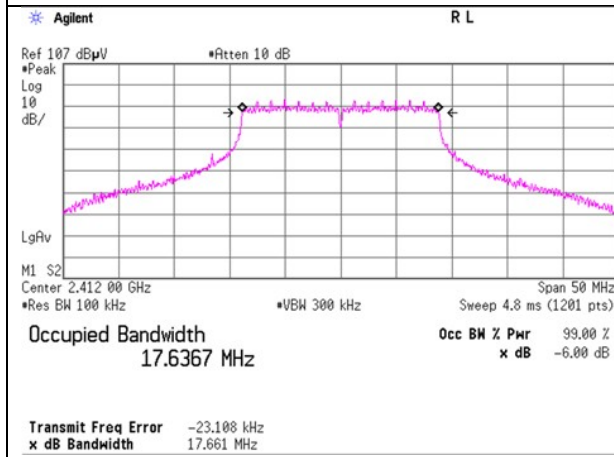


11n-20 (MIMO)


2412 MHz

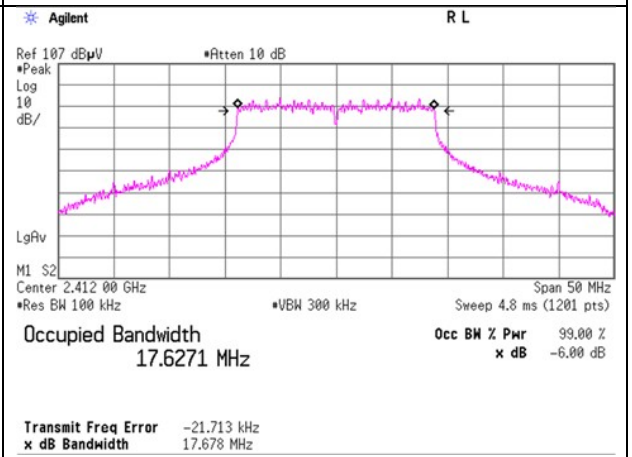


2437 MHz

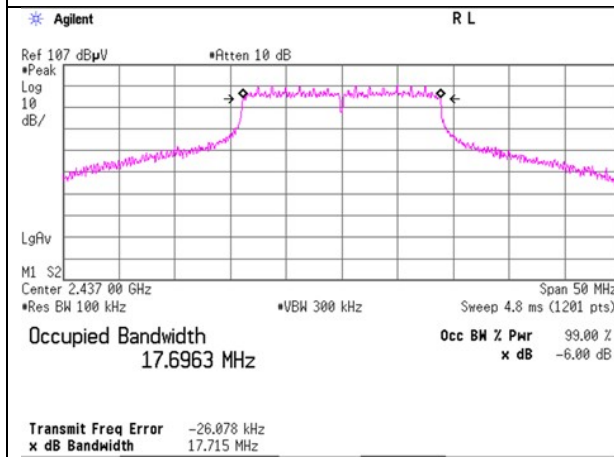


2437 MHz

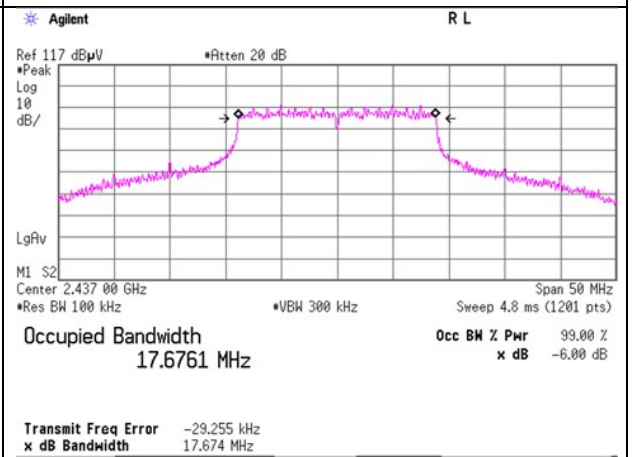

2462 MHz

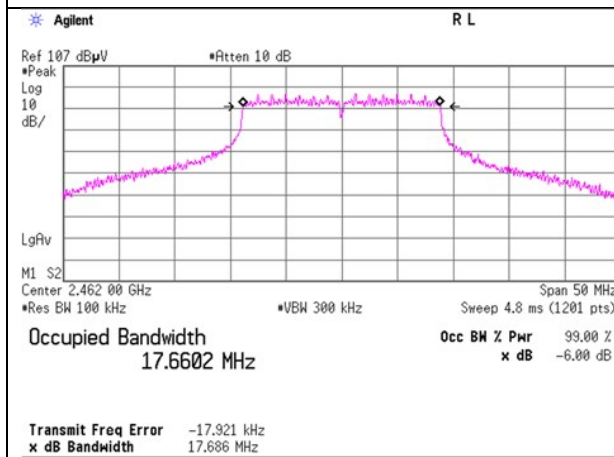

2462 MHz

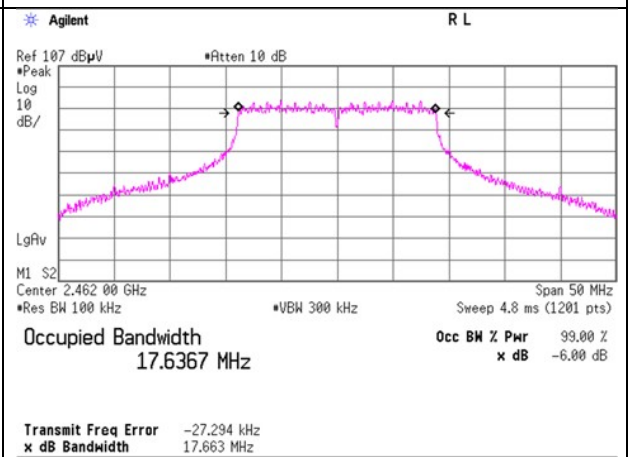

Maximum Peak Output Power

Test place : Shonan EMC Lab. No.5 Shielded Room
Date : January 13, 2021
Temperature / Humidity : 22 deg. C / 36 % RH
Engineer : Yosuke Murakami
Mode : Tx

11b

Sub Antenna				Conducted Power					e.i.r.p. for RSS-247					
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2412	5.73	2.21	9.88	17.82	60.53	30.00	1000	12.18	-2.21	15.61	36.39	36.02	4000	20.41
2437	5.68	2.21	9.88	17.77	59.84	30.00	1000	12.23	-2.21	15.56	35.97	36.02	4000	20.46
2462	5.19	2.21	9.88	17.28	53.46	30.00	1000	12.72	-2.21	15.07	32.14	36.02	4000	20.95

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

*The equipment and cables were not used for factor 0 dB of the data sheets.

11g

Sub Antenna				Conducted Power					e.i.r.p. for RSS-247					
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2412	6.88	2.21	9.88	18.97	78.89	30.00	1000	11.03	-2.21	16.76	47.42	36.02	4000	19.26
2437	10.36	2.21	9.88	22.45	175.79	30.00	1000	7.55	-2.21	20.24	105.68	36.02	4000	15.78
2462	8.76	2.21	9.88	20.85	121.62	30.00	1000	9.15	-2.21	18.64	73.11	36.02	4000	17.38

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

*The equipment and cables were not used for factor 0 dB of the data sheets.

11n-20 (SISO)

Sub Antenna				Conducted Power					e.i.r.p. for RSS-247					
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2412	5.38	2.21	9.88	17.47	55.85	30.00	1000	12.53	-2.21	15.26	33.57	36.02	4000	20.76
2437	10.11	2.21	9.88	22.20	165.96	30.00	1000	7.80	-2.21	19.99	99.77	36.02	4000	16.03
2462	5.56	2.21	9.88	17.65	58.21	30.00	1000	12.35	-2.21	15.44	34.99	36.02	4000	20.58

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

*The equipment and cables were not used for factor 0 dB of the data sheets.

Maximum Peak Output Power

Test place : Shonan EMC Lab. No.5 Shielded Room
Date : January 13, 2021
Temperature / Humidity : 22 deg. C / 36 % RH
Engineer : Yosuke Murakami
Mode : Tx 11n-20 MIMO

Main Antenna + Sub Antenna			Conducted Power					e.i.r.p.					
Freq. [MHz]	Main Antenna Result [mW]	Sub Antenna Result [mW]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
			[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2412	52.24	53.95	20.26	106.19	30.00	1000	9.74	-2.21	18.05	63.83	36.02	4000.00	17.97
2437	163.68	167.49	25.20	331.18	30.00	1000	4.80	-2.21	22.99	199.07	36.02	4000.00	13.03
2462	56.10	59.16	20.62	115.26	30.00	1000	9.38	-2.21	18.41	69.34	36.02	4000.00	17.61

Sample Calculation:

Result = Antenna 1 + Antenna 2

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Main Antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result	
				[dBm]	[mW]
2412	4.78	2.22	10.18	17.18	52.24
2437	9.73	2.23	10.18	22.14	163.68
2462	5.08	2.23	10.18	17.49	56.10

Sub Antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result	
				[dBm]	[mW]
2412	5.23	2.21	9.88	17.32	53.95
2437	10.15	2.21	9.88	22.24	167.49
2462	5.63	2.21	9.88	17.72	59.16

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Average Output Power (Reference data)

Test place Shonan EMC Lab. No.5 Shielded Room
Date January 13, 2021 February 17, 2022
Temperature / Humidity 22 deg. C / 36 % RH 23 deg. C / 34 % RH
Engineer Yosuke Murakami
Mode Tx

11b **11 Mbps** Sub Antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	2.57	2.21	9.88	14.66	29.24	0.16	14.82	30.34
2437	2.29	2.21	9.88	14.38	27.42	0.16	14.54	28.44
2462	1.99	2.21	9.88	14.08	25.59	0.16	14.24	26.55

11g **36 Mbps** Sub Antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-3.64	2.21	9.88	8.45	7.00	0.62	9.07	8.07
2437	1.89	2.66	9.82	14.37	27.35	0.62	14.99	31.55
2462	-1.55	2.21	9.88	10.54	11.32	0.62	11.16	13.06

11n-20(SISO) **MCS 4** Sub Antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-5.58	2.21	9.88	6.51	4.48	0.64	7.15	5.19
2437	1.64	2.21	9.88	13.73	23.60	0.64	14.37	27.35
2462	-5.35	2.21	9.88	6.74	4.72	0.64	7.38	5.47

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator
Loss Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.

Average Output Power (Reference data)

Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	January 13, 2021	February 17, 2022
Temperature / Humidity	22 deg. C / 36 % RH	23 deg. C / 34 % RH
Engineer	Yosuke Murakami	
Mode	Tx 11n-20 (MIMO)	

Main Antenna + Sub Antenna

Freq. [MHz]	Main Ant Result [mW]	Sub Ant Result [mW]	Result		Limit		Margin [dB]
			[dBm]	[mW]	[dBm]	[mW]	
2412.0	5.74	5.82	10.63	11.56	30.00	1000	19.37
2437.0	26.67	30.62	17.58	57.29	30.00	1000	12.42
2462.0	5.92	6.01	10.77	11.93	30.00	1000	19.23

Main Antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412.0	-5.89	2.22	10.18	6.51	4.48	1.08	7.59	5.74
2437.0	0.70	2.66	9.82	13.18	20.80	1.08	14.26	26.67
2462.0	-5.77	2.23	10.18	6.64	4.61	1.08	7.72	5.92

Sub Antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412.0	-5.52	2.21	9.88	6.57	4.54	1.08	7.65	5.82
2437.0	1.30	2.66	9.82	13.78	23.88	1.08	14.86	30.62
2462.0	-5.38	2.21	9.88	6.71	4.69	1.08	7.79	6.01


Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) +
Attenuator Loss Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.

Burst rate confirmation


Test place : Shonan EMC Lab. No.5 Shielded Room
Date : January 13, 2021
Temperature / Humidity : 22 deg. C / 36 % RH
Engineer : Yosuke Murakami
Mode : Tx

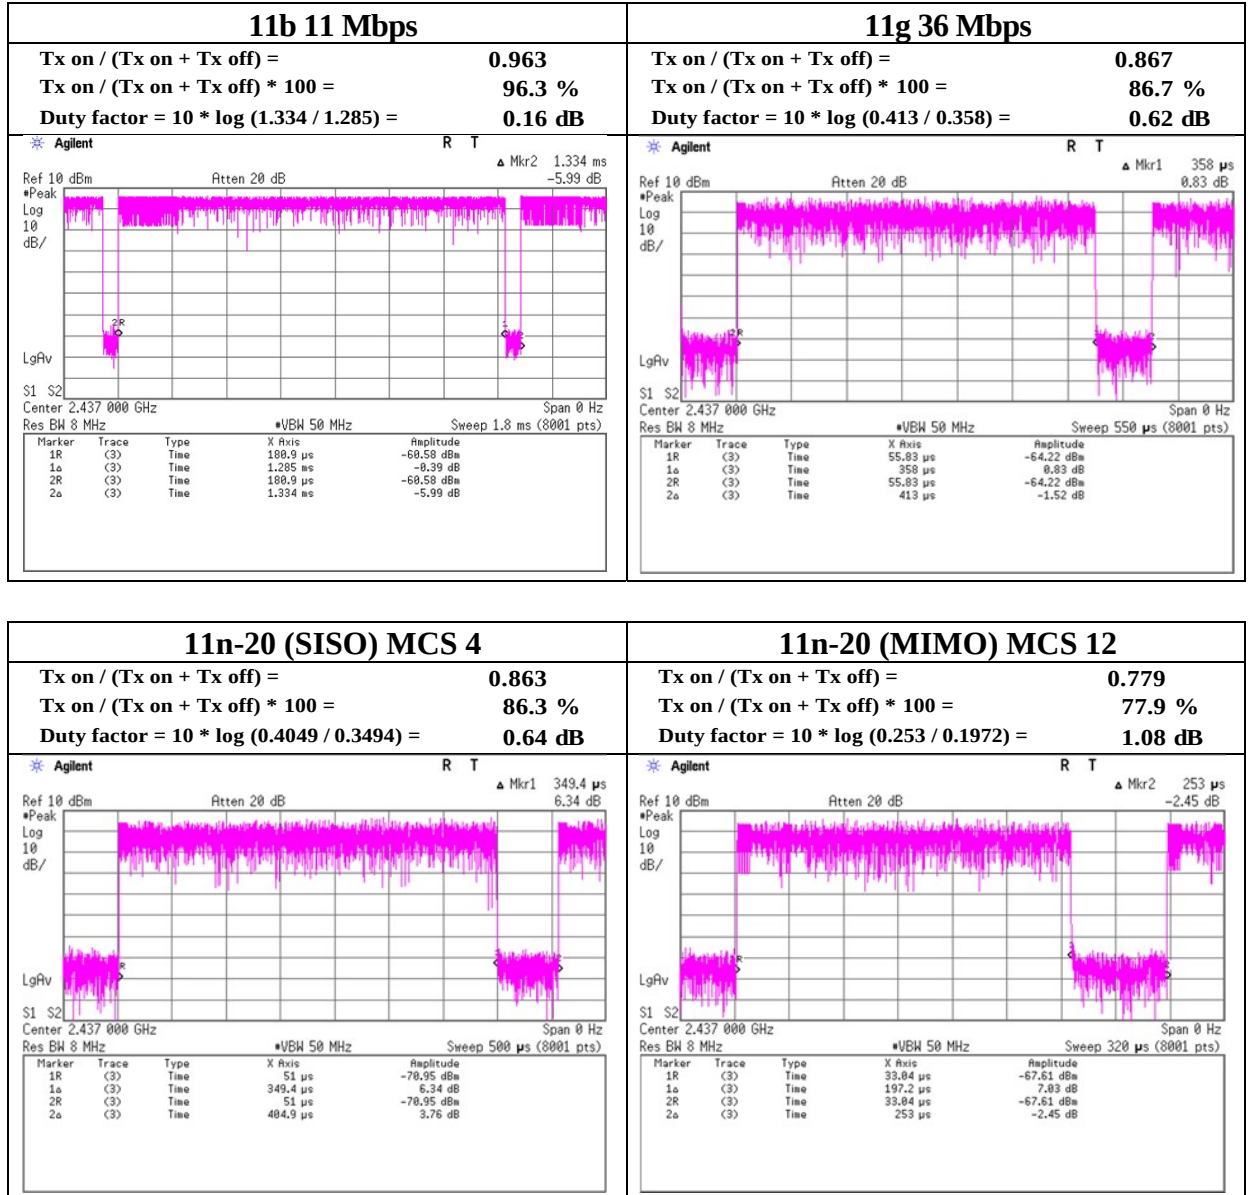

Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Conducted Spurious Emission

Test place : Shonan EMC Lab. No.5 Shielded Room
Date : July 8, 2016
Temperature / Humidity : 25 deg. C / 56 % RH
Engineer : Hiroyuki Morikawa
Mode : Tx 11n-20 (MIMO) 2437 MHz

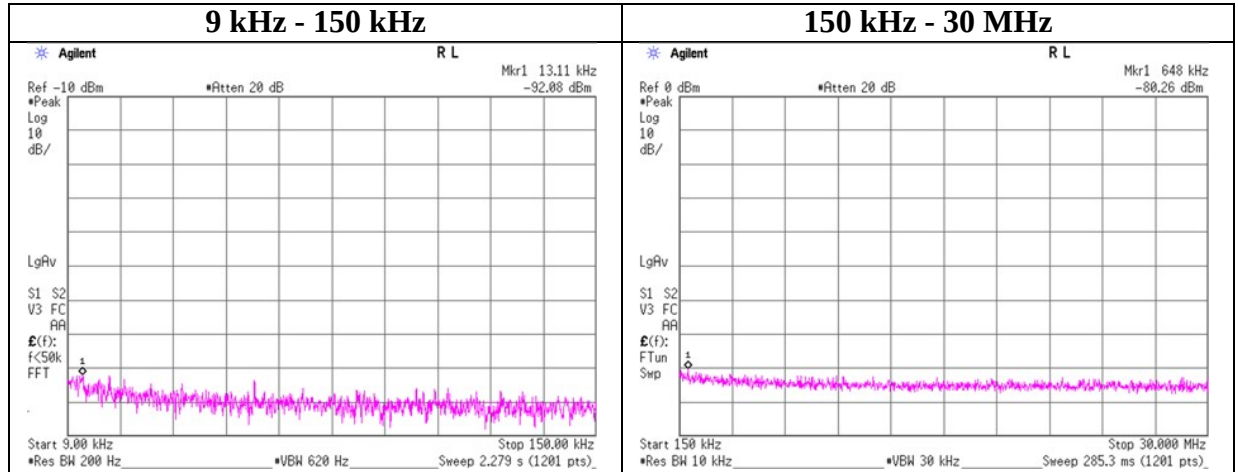

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
13.11	-92.1	0.01	9.8	2.0	2	-77.2	300	6.0	-16.0	45.2	61.2	-
648.00	-80.3	0.02	9.8	2.0	2	-65.4	30	6.0	15.9	31.3	15.4	-

$E = \text{EIRP} - 20 \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator Loss} + \text{Antenna Gain} + 10 * \log(N)$

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Power Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 8, 2016
Temperature / Humidity 25 deg. C / 56 % RH
Engineer Hiroyuki Morikawa
Mode Tx

11b Sub antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-21.35	3.42	9.92	-8.01	8.00	16.01
2437.00	-21.52	3.42	9.92	-8.18	8.00	16.18
2462.00	-21.85	3.43	9.92	-8.50	8.00	16.50

11g Sub antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-29.26	3.42	9.92	-15.92	8.00	23.92
2437.00	-23.12	3.42	9.92	-9.78	8.00	17.78
2462.00	-26.13	3.43	9.92	-12.78	8.00	20.78


11n-20 (SISO) Sub antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-32.12	3.42	9.92	-18.78	8.00	26.78
2437.00	-22.14	3.42	9.92	-8.80	8.00	16.80
2462.00	-26.97	3.43	9.92	-13.62	8.00	21.62

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

Power Density

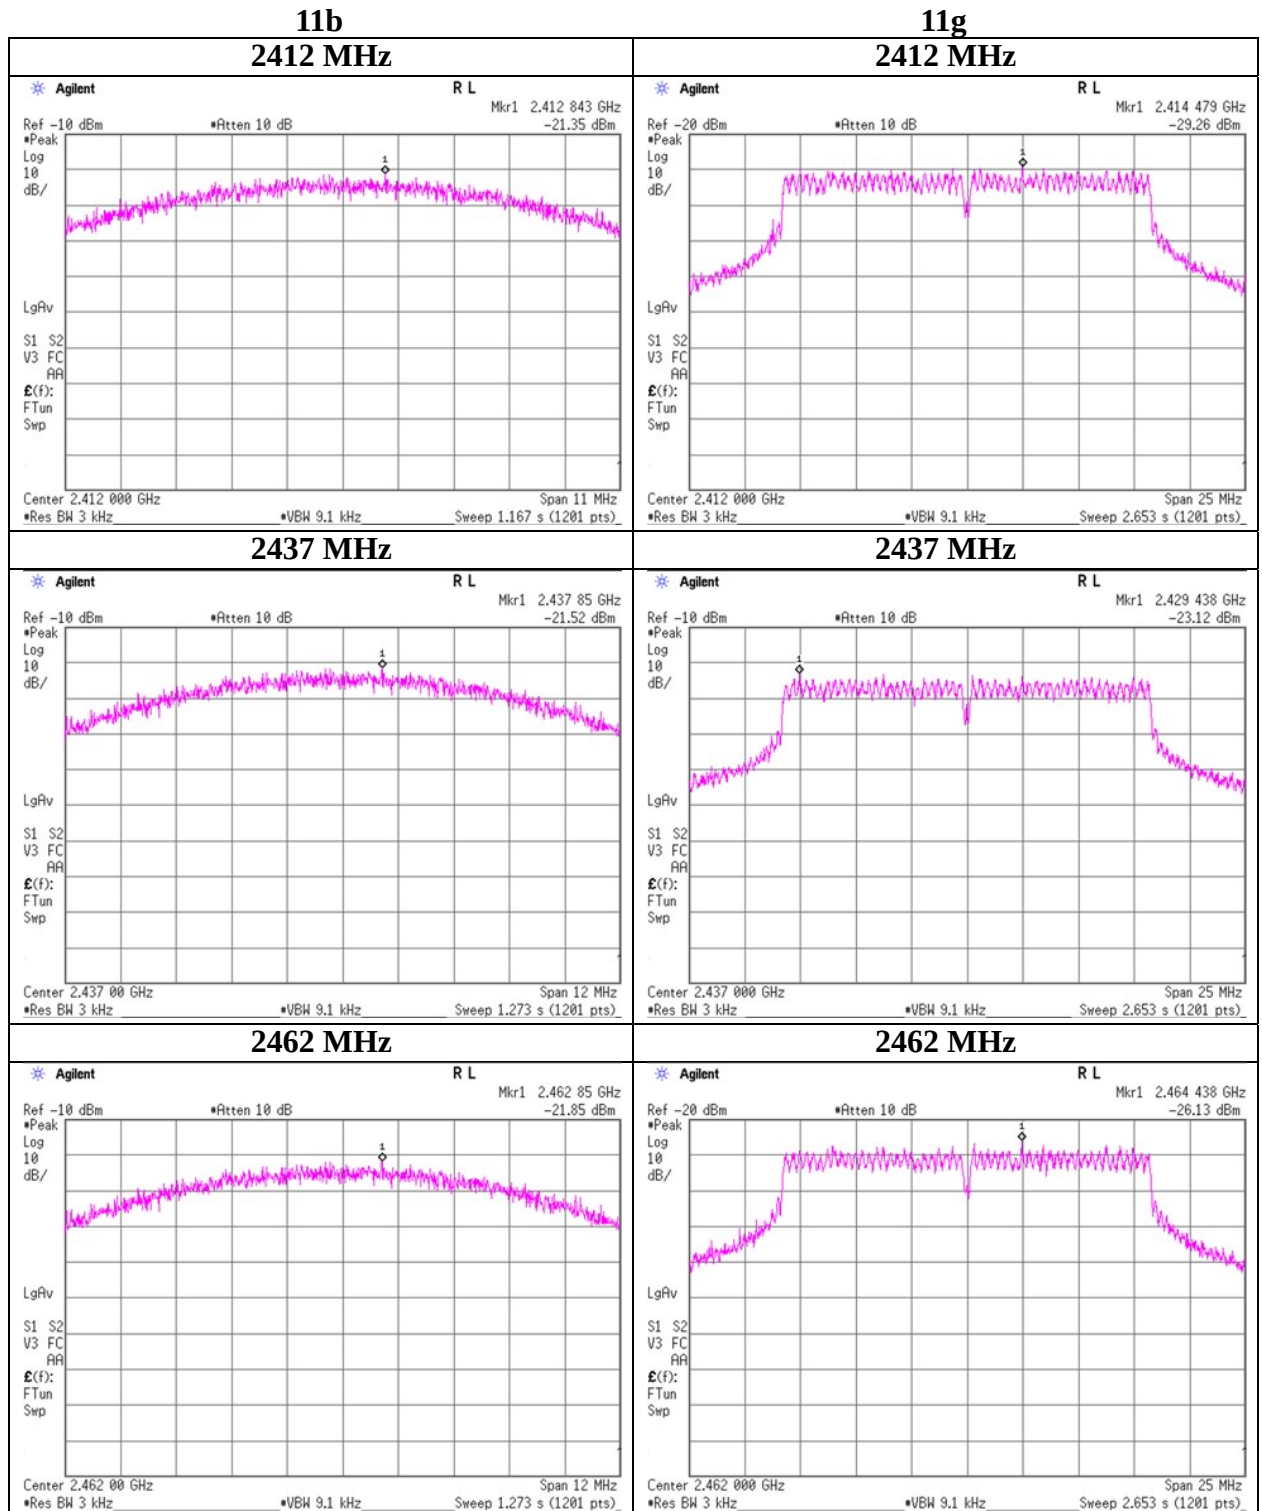

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

Power Density


11n-20 (SISO) 2412 MHz

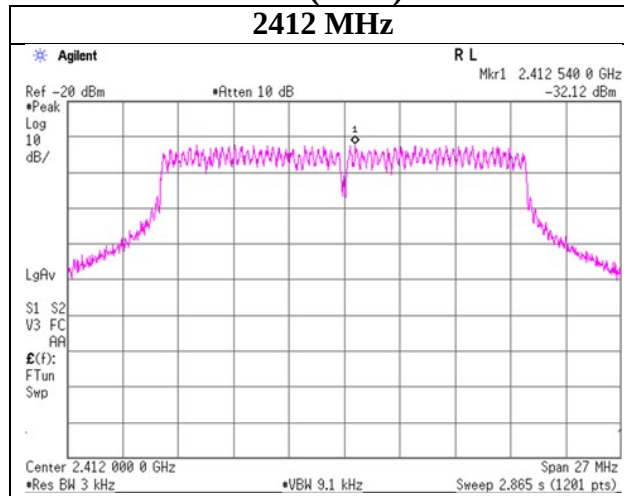

2437 MHz

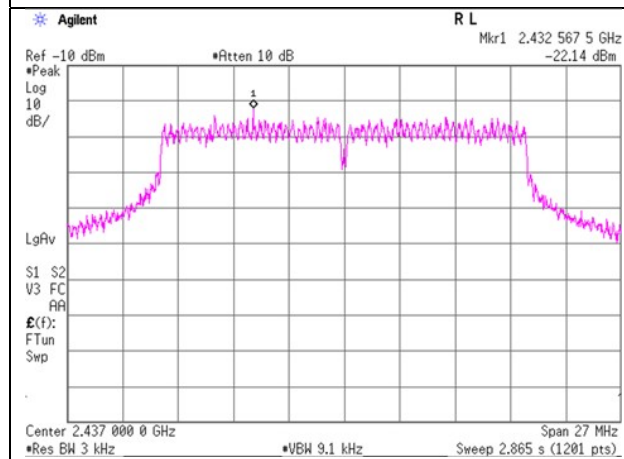

2462 MHz

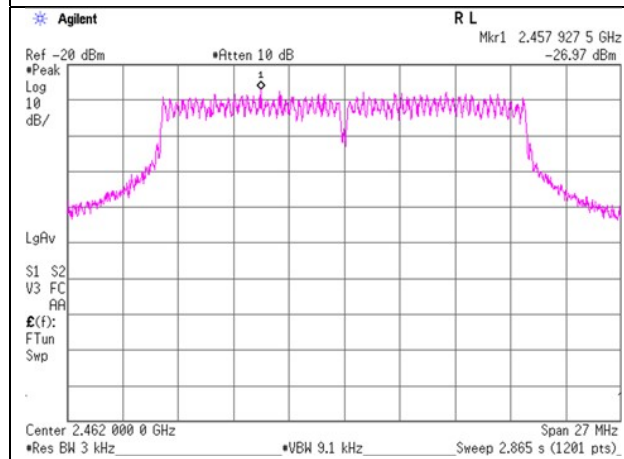

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Power Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 8, 2016
Temperature / Humidity 25 deg. C / 56 % RH
Engineer Hiroyuki Morikawa
Mode Tx

Main antenna + Sub antenna

Freq. [MHz]	Main Result [mW]	Sub Result [mW]	Result		Limit [dBm]	Margin [dB]
			[dBm]	[mW]		
2412.00	0.01	0.02	-15.08	0.03	8.00	23.08
2437.00	0.07	0.08	-8.36	0.15	8.00	16.36
2462.00	0.01	0.02	-14.45	0.04	8.00	22.45

Sample Calculation:

Result = Main antenna + Sub antenna

Main antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit [dBm]	Margin [dB]
				[dBm]	[mW]		
2412.00	-31.61	3.42	9.92	-18.27	0.01	8.00	26.27
2437.00	-25.08	3.42	9.92	-11.74	0.07	8.00	19.74
2462.00	-31.62	3.43	9.92	-18.27	0.01	8.00	26.27


Sub antenna

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit [dBm]	Margin [dB]
				[dBm]	[mW]		
2412.00	-31.25	3.42	9.92	-17.91	0.02	8.00	25.91
2437.00	-24.37	3.42	9.92	-11.03	0.08	8.00	19.03
2462.00	-30.13	3.43	9.92	-16.78	0.02	8.00	24.78

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Power Density

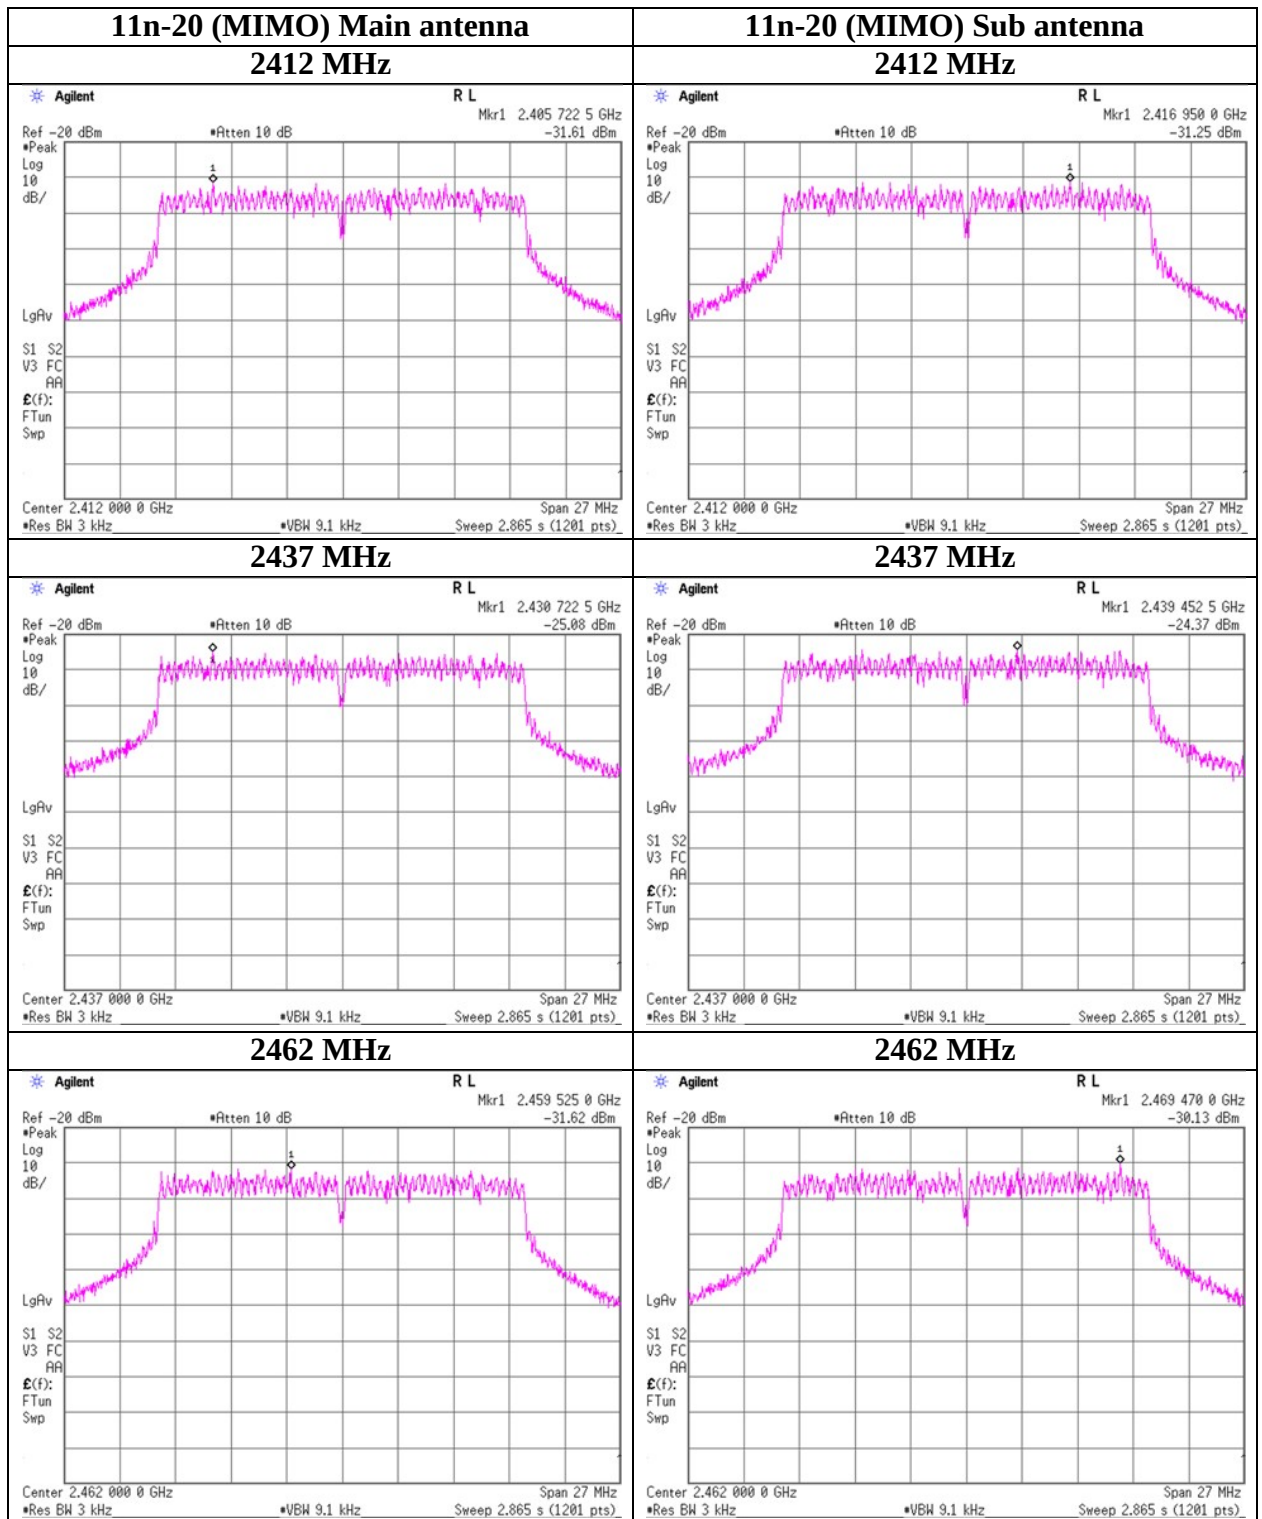

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

APPENDIX 2: Test instruments

Test equipment

For Maximum Peak Output Power measurement

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	KTS-07	145111	Digital Tester	SANWA	PC500	7019232	2021/09/14	12
AT	SAT10-15	160493	Attenuator	Weinschel Corp.	54A-10	83406	2020/12/21	12
AT	SAT10-16	160494	Attenuator	Weinschel Corp.	54A-10	83420	2020/12/21	12
AT	SCC-G11	145174	Coaxial Cable	Suhner	SUCOFLEX 102	31595/2	2020/03/02	12
AT	SCC-G60	196941	Coaxial Cable	HUBER+SUNER	SUCOFLEX 102	803093/2	2020/03/10	12
AT	SCC-G67	196949	Coaxial Cable	HUBER+SUNER	SUCOFLEX 102	803480/2	2020/03/10	12
AT	SOS-27	191845	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
AT	SPM-07	146247	Power Meter	Keysight Technologies Inc	8990B	MY5100272	2020/05/27	12
AT	SPSS-04	146310	Power sensor	Keysight Technologies Inc	N1923A	MY5326009	2020/05/27	12
AT	SPSS-05	146311	Power sensor	Keysight Technologies Inc	N1923A	MY5349008	2020/05/27	12
AT	SRENT-22	202830	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250036	2020/11/24	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/01/25	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/01/25	12
AT	SAT10-14	154591	Attenuator	Weinschel Corp.	54A-10	81595	2021/04/08	12
AT	SCC-G12	145040	Coaxial Cable	Suhner	SUCOFLEX 102	30790/2	2021/03/04	12

For Other Antenna Terminal Conducted tests

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	SSA-02	-	Spectrum Analyzer	Agilent	E4448A	MY48250106	2016/03/23	12
AT	SPM-07	-	Power Meter	Agilent	8990B	MY5100272	2016/04/04	12
AT	SPSS-04	-	Power sensor	Agilent	N1923A	MY5326009	2016/04/04	12
AT	SOS-09	-	Humidity Indicator	A&D	AD-5681	4061484	2015/12/07	12
AT	SCC-G13	-	Coaxial Cable	Suhner	SUCOFLEX 102	31599/2	2016/03/23	12
AT	SAT10-10	-	Attenuator	Weinschel Corp.	54A-10	37584	2016/04/18	12
AT	STM-G4	-	Terminator	Weinschel	M1459A	U6592	2015/07/14	12
AT	KSA-08	-	Spectrum Analyzer	Agilent	E4446A	MY46180525	2016/03/28	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: AT: Antenna Terminal Conducted test

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401