FCC TEST REPORT for Bluetooth Device
No. 151100653SHA-001

Applicant	:	Pass & Seymour, Inc., d/b/a Legrand 301 Fulling Mill Road, Suite G, Middletown, Pennsylvania 17057 USA
Manufacturer	:	Hangzhou Samko Electronics Co. Ltd. No.8,Jiaqi Road,Xianlin Street,Yuhang District, Hangzhou City, Zhejiang Province, 311122, China
Product Name	:	DIGITAL AUDIO BT RCVR V4.0 W/ A2DP
Type/Model	:	AU7100 (PMN:AU7100-WH, AU7100-LA, AU7100-NI)
TEST RESULT	**:**	**PASS**

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2014): Radio Frequency Devices

RSS-247 (Issue 1, 2015): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 4 (November 2014): General Requirements and Information for the Certification of Radiocommunication Equipment

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Date of issue: Dec 5, 2015

Prepared by: Reviewed by:

Wakeyou Wang (*Project Engineer*) Daniel Zhao (*Reviewer*)

FCC ID: YV8-AU7100
IC: 9922A-AU7100

Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building 86, No. 1198 Qinzhou Rd., North, Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing
Tel: +86 21 61278271
Fax: +86 21 54262353

TTRF15.247_V1 © 2015Intertek

Content

SUMMARY 1
DESCRIPTION OF TEST FACILITY 2
1. GENERAL INFORMATION 5
1.1 Applicant Information 5
1.2 Identification of the EUT 5
1.3 Technical specification 5
2. TEST SPECIFICATIONS 6
2.1 Test Standard 6
2.2 Mode of operation during the test / Test peripherals used 6
2.3 Test software list 8
2.4 Test peripherals list 8
2.5 Instrument list 9
2.6 Test Summary 10
3. 20 DB BANDWIDTH 11
3.1 Limit 11
3.2 Test Configuration 11
3.3 Test Procedure and test setup 11
3.4 Test Protocol 12
4. CARRIER FREQUENCY SEPARATION 18
4.1 Limit 18
4.2 Test Configuration 18
4.3 Test Procedure and test setup 18
4.4 Test Protocol 19
5. MAXIMUM PEAK OUTPUT POWER 25
5.1 Test limit 25
5.2 Test Configuration 25
5.3 Test procedure and test setup 25
5.4 Test protocol 26
6. RADIATED SPURIOUS EMISSIONS 27
6.1 Test limit 27
6.2 Test Configuration 27
6.3 Test procedure and test setup 28
6.4 Test protocol 29
7. BAND EDGE EMISSION 33
7.1 Limit 33
7.2 Test Configuration 33
7.3 Test procedure and test setup 33
7.4 Test protocol 34
8. POWER LINE CONDUCTED EMISSION 43
8.1 Limit 43
8.2 Test configuration 43
8.3 Test procedure and test set up 44
8.4 Test protocol 45
9. NUMBER OF HOPPING FREQUENCIES 46
9.1 Limit 46

TTRF15.247_V1 © 2015Intertek

9.2 Test Configuration 46
9.3 Test procedure and test setup 46
9.4 Test protocol 47
10. DWELL TIME 50
10.1 Limit 50
10.2 Test Configuration 50
10.3 Test procedure and test setup 50
10.4 Test protocol 51
11. OCCUPIED BANDWIDTH 54
11.1 Test limit 54
11.2 Test Configuration 54
11.3 Test procedure and test setup 54
11.4 Test protocol 55

TTRF15.247_V1 © 2015Intertek

1. General Information

1.1 Applicant Information

Applicant	:	Pass & Seymour, Inc., d/b/a Legrand 301 Fulling Mill Road, Suite G, Middletown, Pennsylvania 17057 USA
Name of contact	:	Fred Duffy
Tel	:	1-717 546 5413
Fax	:	1-859 817 7250
Email	:	fred.duffy@legrand.us
Manufacturer	:	Hangzhou Samko Electronics Co. Ltd. No.8,Jiaqi Road,Xianlin Street,Yuhang District, Hangzhou City, Zhejiang Province, 311122, China

1.2 Identification of the EUT

Product Name	:	DIGITAL AUDIO BT RCVR V4.0 W/ A2DP
Type/model	:	AU7100 (PMN:AU7100-WH, AU7100-LA, AU7100-NI)
FCC ID	:	YV8-AU7100
IC	:	9922A-AU7100

1.3 Technical specification

Operation Frequency Band	:	2402 - 2480 MHz
Type of Modulation	:	FHSS
EUT Modes of Modulation	:	GFSK, Pi/4 DQPSK, 8DQPSK
Channel Number	:	79 channels with spacing of 1MHz.
Description of EUT	:	There is one model only. The three PMN are electrically identical except for outside color.
Port identification	:	N/A
Antenna	:	PCB antenna, 0dBi
Rating	:	DC 5V

TTRF15.247_V1 © 2015Intertek

Declared Temperature	:	/
Category of EUT	:	Class B
EUT type	:	☒ Table top ☐ Floor standing
Sample received date	:	Nov 9, 2015
Sample Identification	:	/
Date of test	:	Nov 9, 2015 - Nov 20, 2015

2. TEST SPECIFICATIONS

2.1 Test Standard

47CFR Part 15 (2014)
RSS-247 (Issue 1, 2015)
RSS-Gen Issue 4 (November 2014)
ANSI C63.10 (2013)
DA 00-705 (March 30, 2000)

2.2 Mode of operation during the test / Test peripherals used

While testing transmitting mode of EUT, the internal modulation was applied.

Test software setting: Default power setting among the software *BlueTest3*

Test mode:
Mode 1: Hopping off, GFSK_DH5
Mode 2: Hopping off, Pi/4 DQPSK_DH5
Mode 3: Hopping off, 8DPSK_DH5
Mode 4: Hopping on, GFSK_DH5
Mode 5: Hopping on, Pi/4 DQPSK_DH5
Mode 6: Hopping on, 8DPSK_DH5

Test Channel:

Channel	Frequency (MHz)
L	2402
M	2441
H	2480

Frequency Hopping System Requirement

☒**Compliance for Section 15.247 (a)(1), (g), (h) requirement**
The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

☒ **Compliance for Section 15.247 (a)(1)**
According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a ninestage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.
• Number of shift register stages: 9
• Length of pseudo-random sequence: 2^9 -1 = 511 bits
• Longest sequence of zeros: 8 (non-inverted signal)

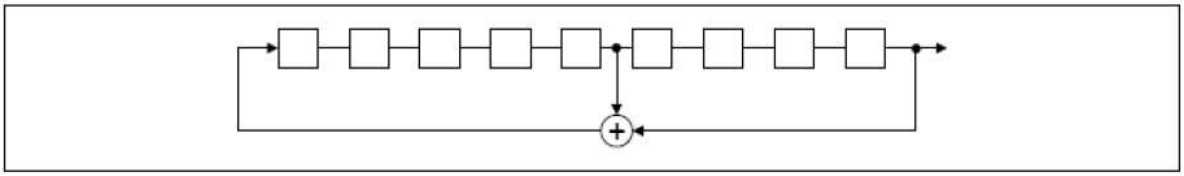

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

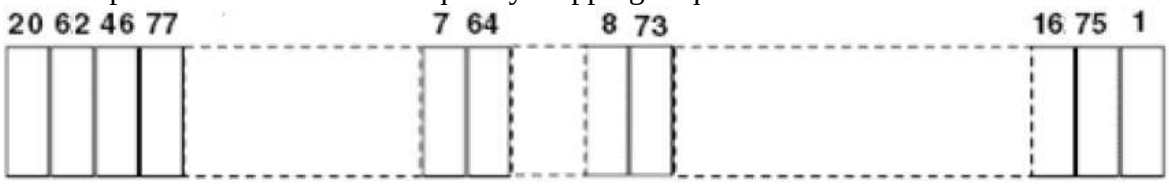

Each frequency used equally on the average by each transmitter.
According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

TTRF15.247_V1 © 2015Intertek

☒ **Compliance for section 15.247(g)**
According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

☒ **Compliance for section 15.247(h)**
According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.
According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP ProBook 6470b	NA
/	/	/	/

TTRF15.247_V1 © 2015Intertek

2.5 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2015-10-21	2016-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2015-10-20	2016-10-19
A.M.N.	ESH2-Z5	R&S	EC 3119	2015-1-9	2016-1-8
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2015-4-28	2016-4-27
Horn antenna	HF 906	R&S	EC 3049	2015-4-28	2016-4-27
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2015-4-12	2016-4-11
Semi-anechoic chamber	-	Albatross project	EC 3048	2015-5-12	2016-5-11
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2015-1-8	2016-1-7
Power sensor / Power meter	N1911A/N1921A	Agilent	EC4318	2015-04-12	2016-04-11
Loop Antenna	FMZB 1516	SCHWARZBECK	/	2014-11-29	2015-11-28
Temperature Camber	SETH-E	tayasaf	EC4315	2015-4-9	2016-4-8
Spectrum analyzer	E7402A	Agilent	EC2254	2015-08-16	2016-08-15

TTRF15.247_V1 © 2015Intertek

2.6 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-247 Issue 1 Annex 5.1	Tested
Carrier Frequency Separation	15.247(a)(1)	RSS-247 Issue 1 Annex 5.1	Pass
Output power	15.247(b)(1)	RSS-247 Issue 1 Annex 5.4	Pass
Radiated Spurious Emissions	15.205 & 15.209	RSS-Gen Issue 4 Clause 8.10	Pass
Band Edge Emission	15.247(d)	RSS-247 Issue 1 Annex 5.5	Pass
Power line conducted emission	15.207	RSS-Gen Issue 4 Clause 8.8	NA
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-247 Issue 1 Annex 5.1	Pass
Dwell time	15.247(a)(1)(iii)	RSS-247 Issue 1 Annex 5.1	Pass
Occupied bandwidth	-	RSS-Gen Issue 4 Clause 6.6	Tested

Note: “NA” means “not applied”.

TTRF15.247_V1 © 2015Intertek

3. 20 dB Bandwidth

Test result: Tested

3.1 Limit

☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Test Configuration

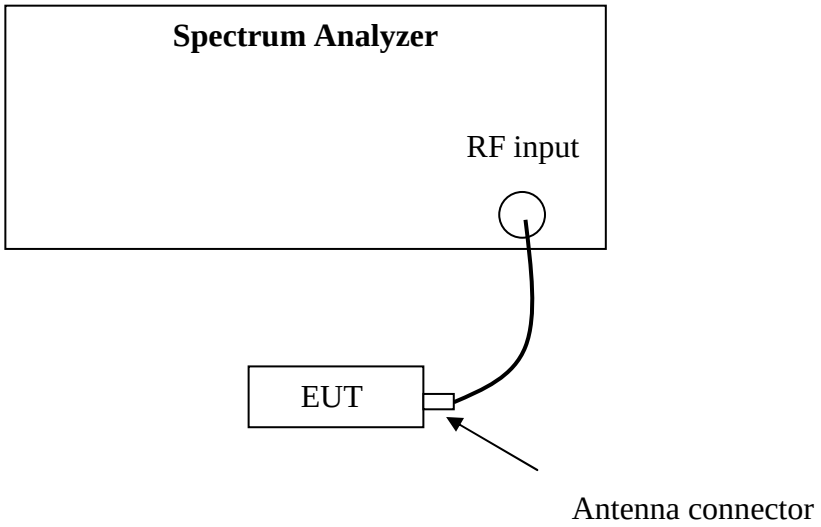

3.3 Test Procedure and test setup

The 20 bandwidth per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span = approximately 2 to 3 times the 20 dB bandwidth, RBW≥1% of the 20 dB bandwidth, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

TTRF15.247_V1 © 2015Intertek

3.4 Test Protocol

Temperature : 25°C
Relative Humidity : 55 %

Mode	CH	20dB Bandwidth (kHz)
1	L	833
	M	907
	H	897

Channel L

Channel M

Channel H

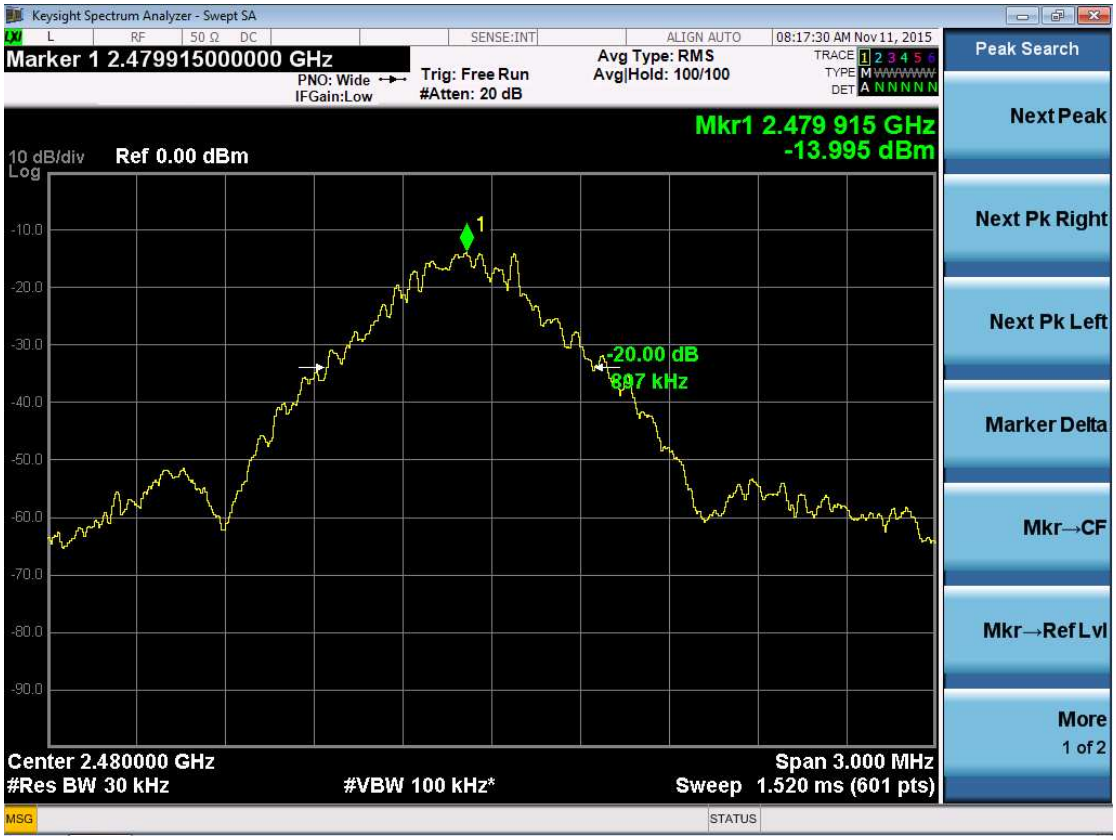

Mode	CH	20dB Bandwidth (kHz)
2	L	1293
	M	1352
	H	1353

Channel L

Channel M

Channel H

Mode	CH	20dB Bandwidth (kHz)
3	L	1287
	M	1269
	H	1332

Channel L

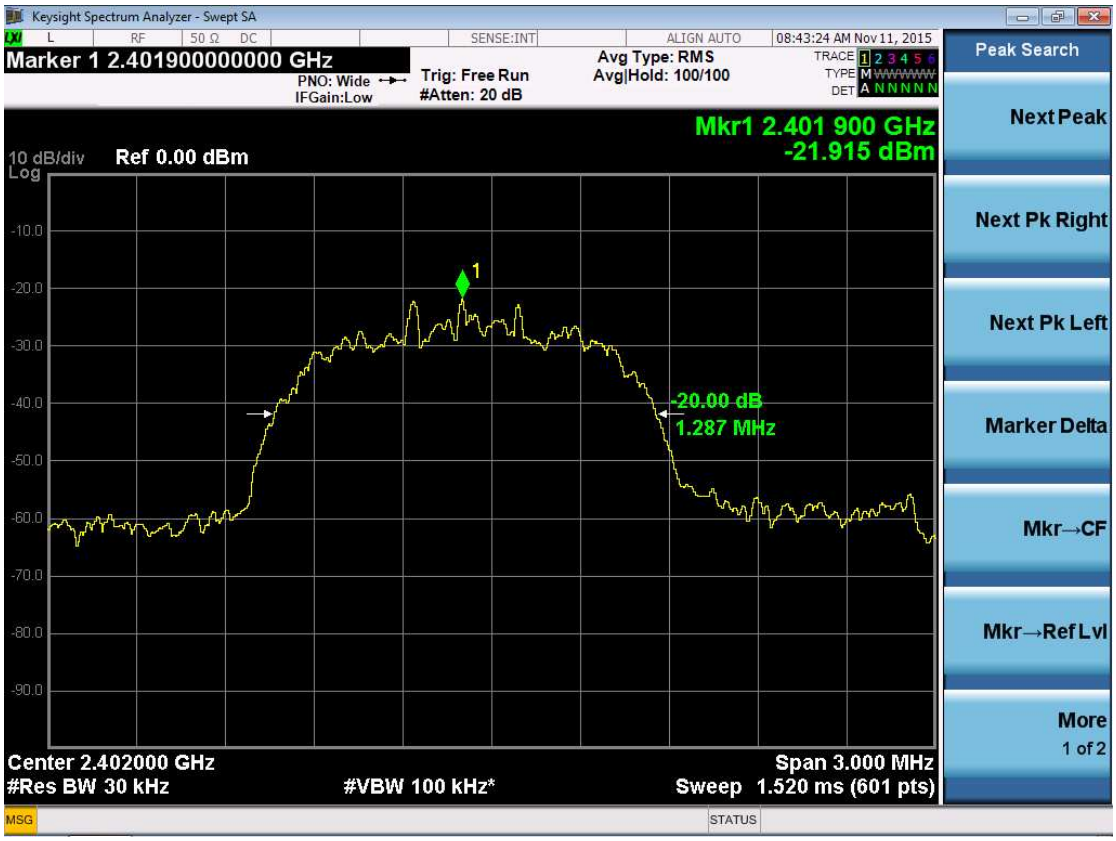

Channel M

Channel H

4. Carrier Frequency Separation

Test result: Pass

4.1 Limit

☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration

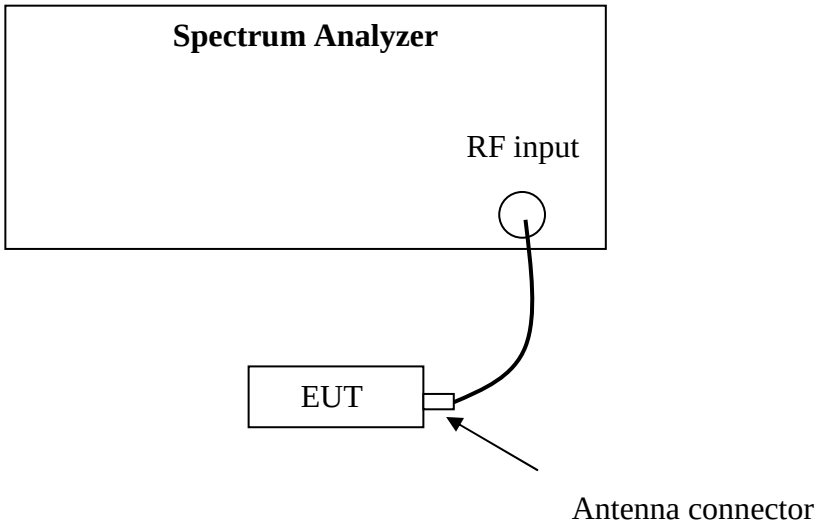

4.3 Test Procedure and test setup

The Carrier Frequency Separation per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels, RBW≥1% of the span, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

TTRF15.247_V1 © 2015Intertek

4.4 Test Protocol

Temperature : 25°C
Relative Humidity : 55 %

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
1	L	1070	≥ 2/3 of 20dB BW
	M	1005	≥ 2/3 of 20dB BW
	H	1000	≥ 2/3 of 20dB BW

Channel L

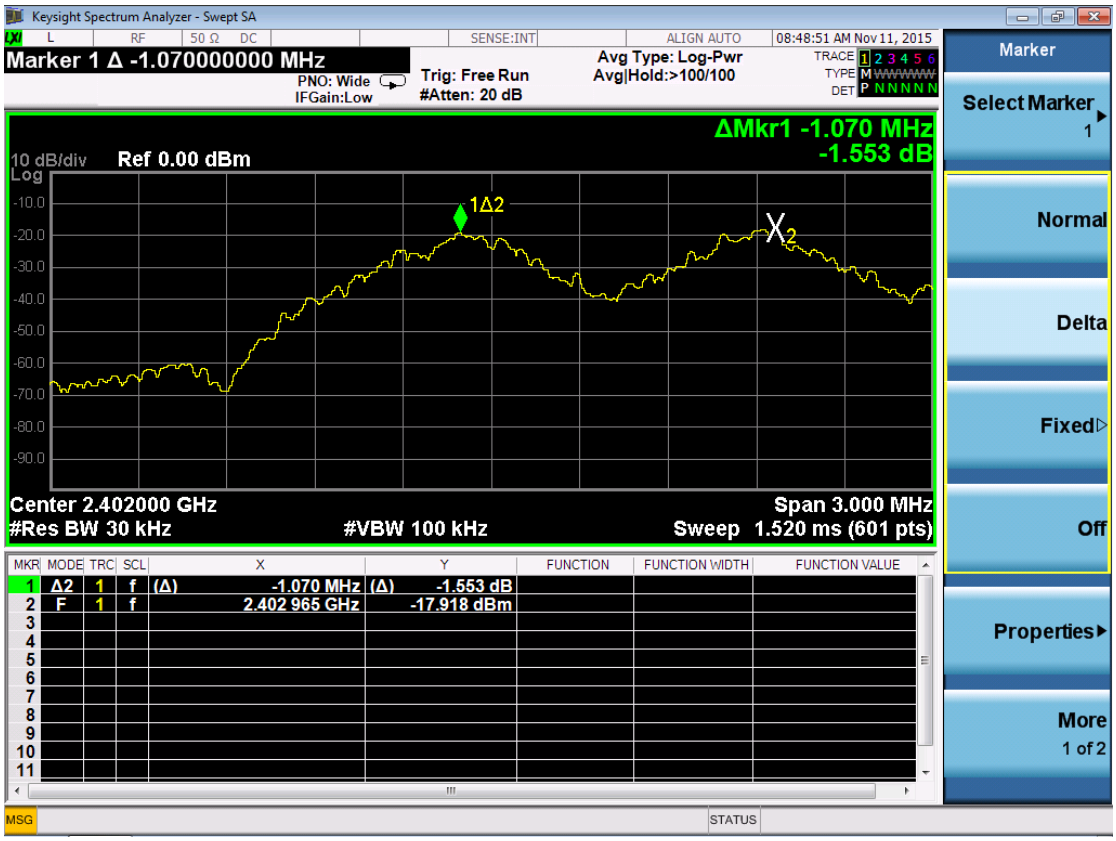

Channel M

Channel H

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
2	L	1100	≥ 2/3 of 20dB BW
	M	1065	≥ 2/3 of 20dB BW
	H	1020	≥ 2/3 of 20dB BW

Channel L

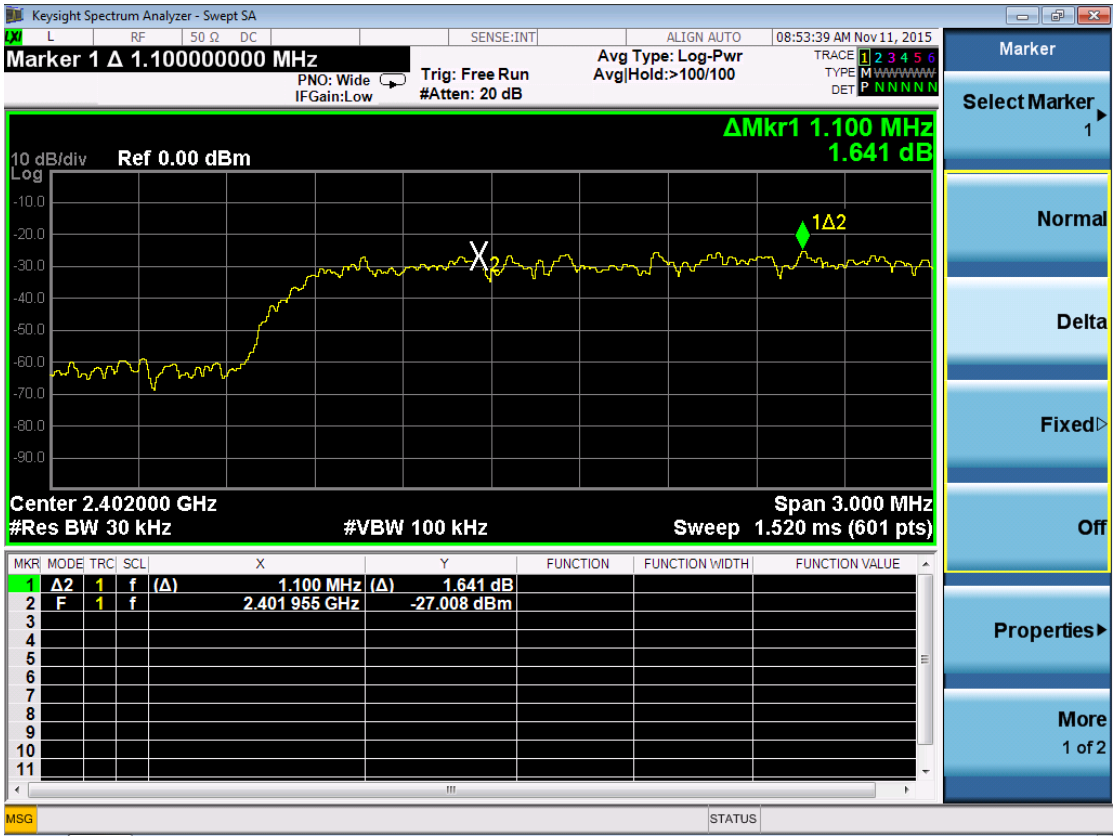

Channel M

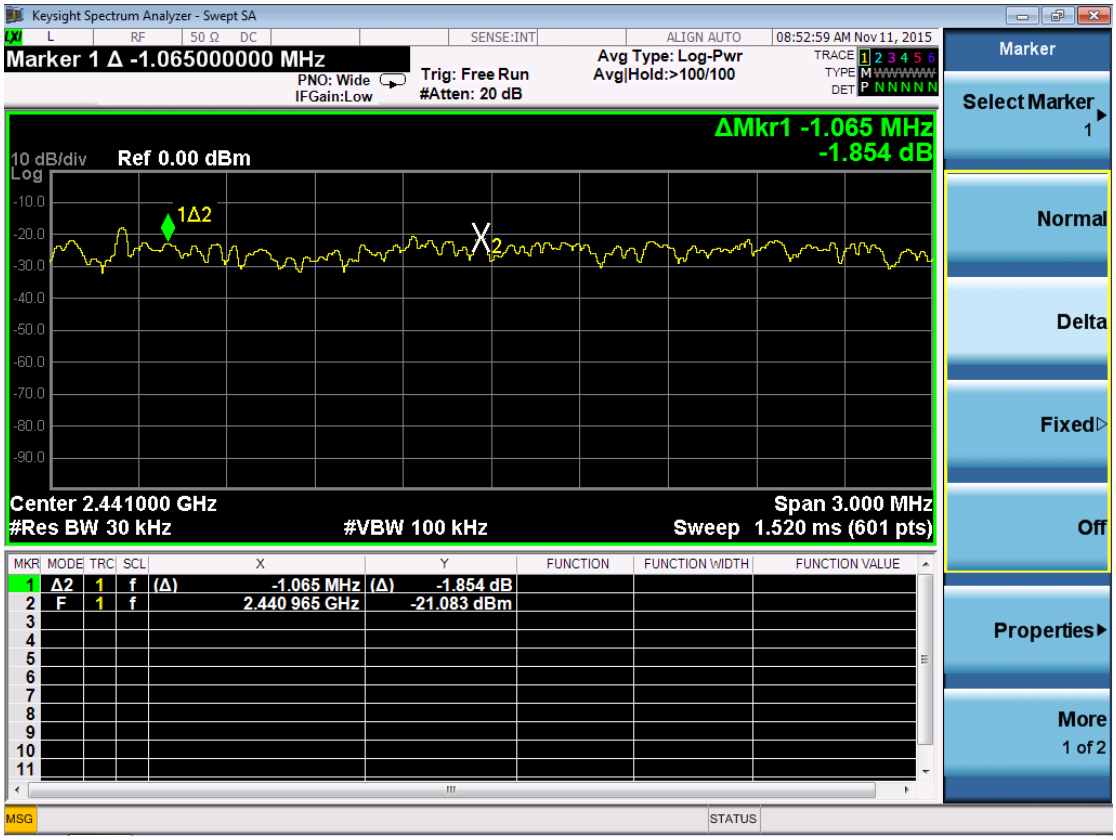

Channel H

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
3	L	1050	≥ 2/3 of 20dB BW
	M	1005	≥ 2/3 of 20dB BW
	H	1020	≥ 2/3 of 20dB BW

Channel L

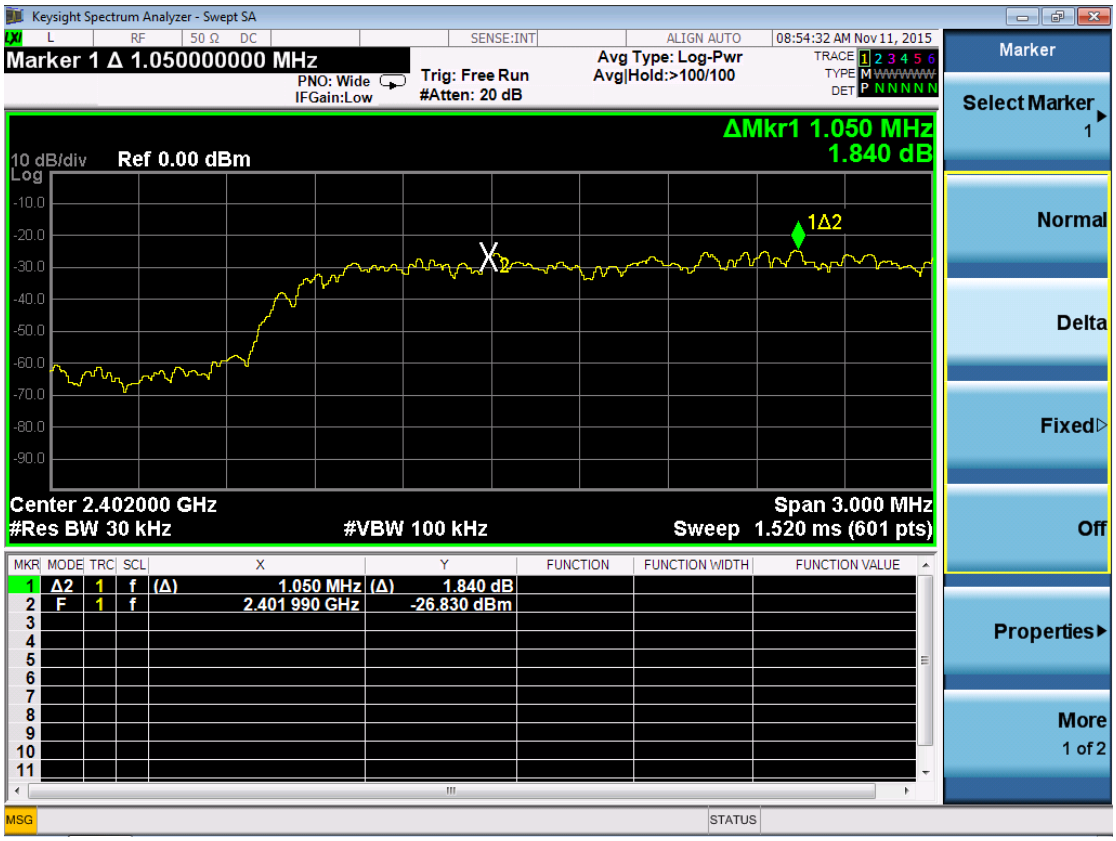

Channel M

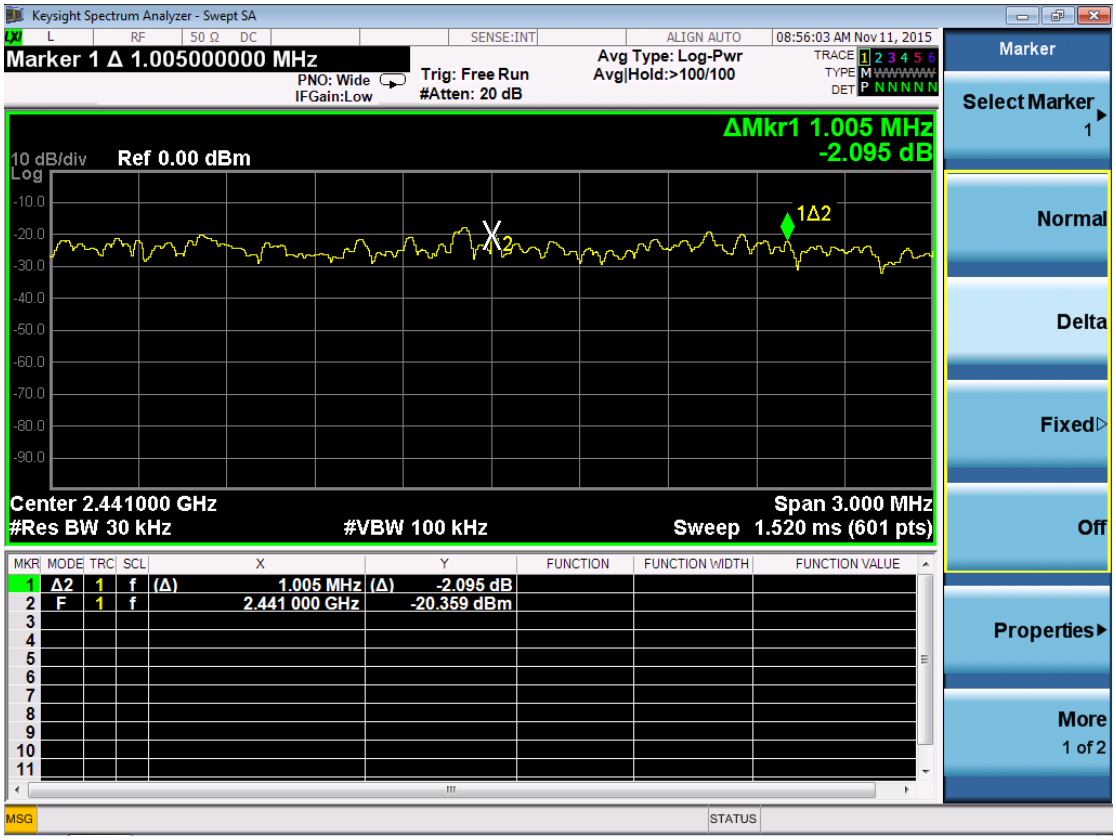

Channel H

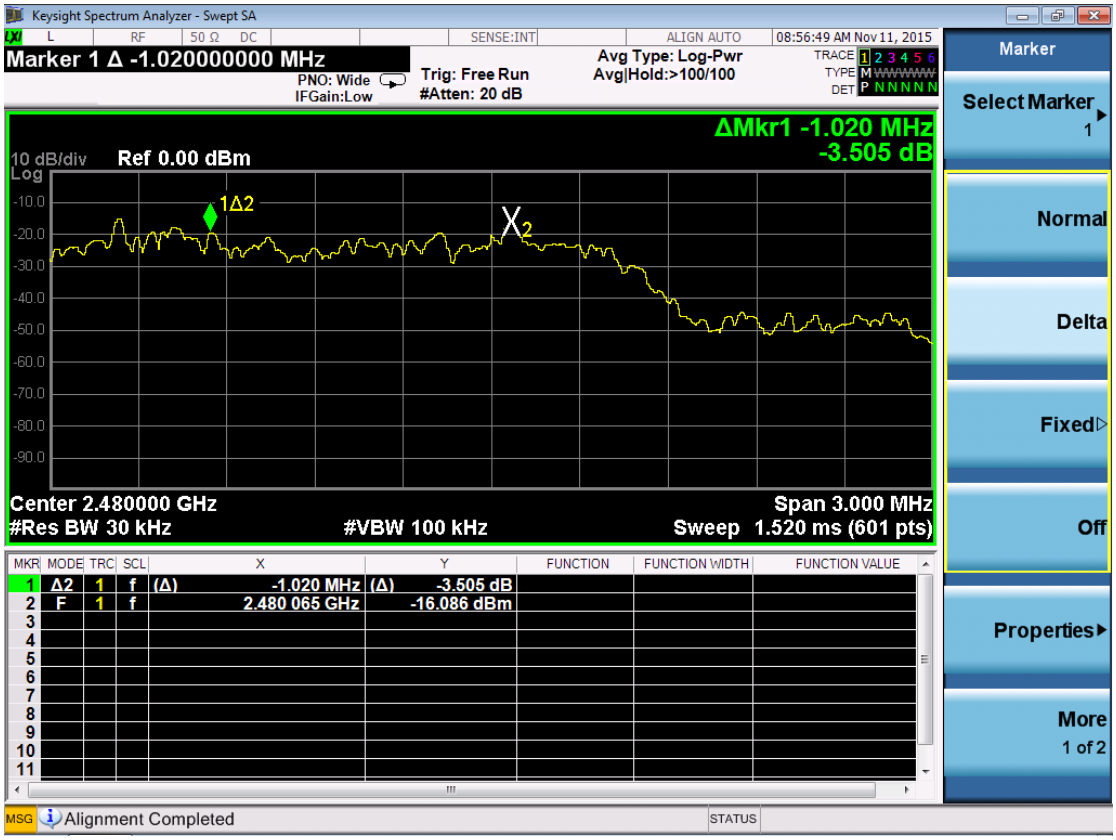

5. Maximum peak output power

Test result: Pass

5.1 Test limit

☐ For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt
☒ For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
☐ For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

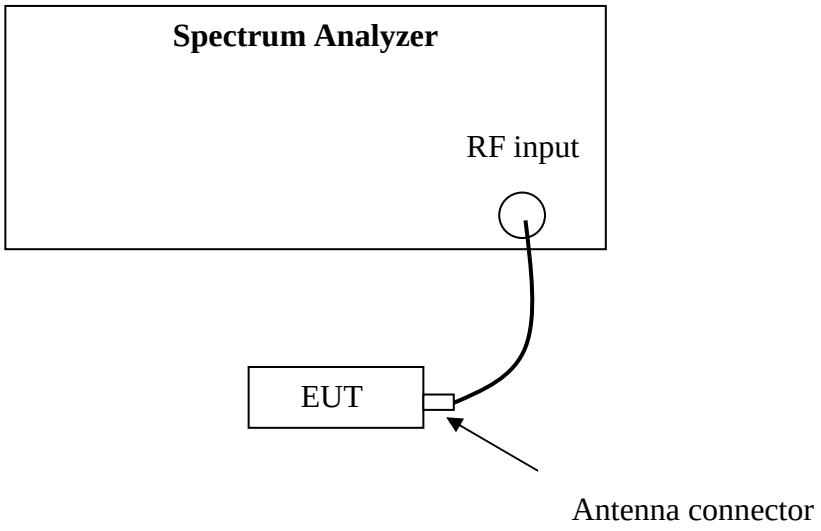

5.3 Test procedure and test setup

The power output per FCC § 15.247(b) is measured by setting the Spectrum Analyzer as RBW = 1MHz, VBW = 3MHz, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The test method is following DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

TTRF15.247_V1 © 2015Intertek

5.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

Mode	CH	Conducted Power (dBm)	Limit (dBm)
1	L	0.20	21
	M	0.90	21
	H	0.10	21

Mode	CH	Conducted Power (dBm)	Limit (dBm)
2	L	-0.20	21
	M	0.40	21
	H	-0.10	21

Mode	CH	Conducted Power (dBm)	Limit (dBm)
3	L	-0.40	21
	M	0.30	21
	H	-0.40	21

TTRF15.247_V1 © 2015Intertek

6. Radiated Spurious Emissions

Test result: PASS

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

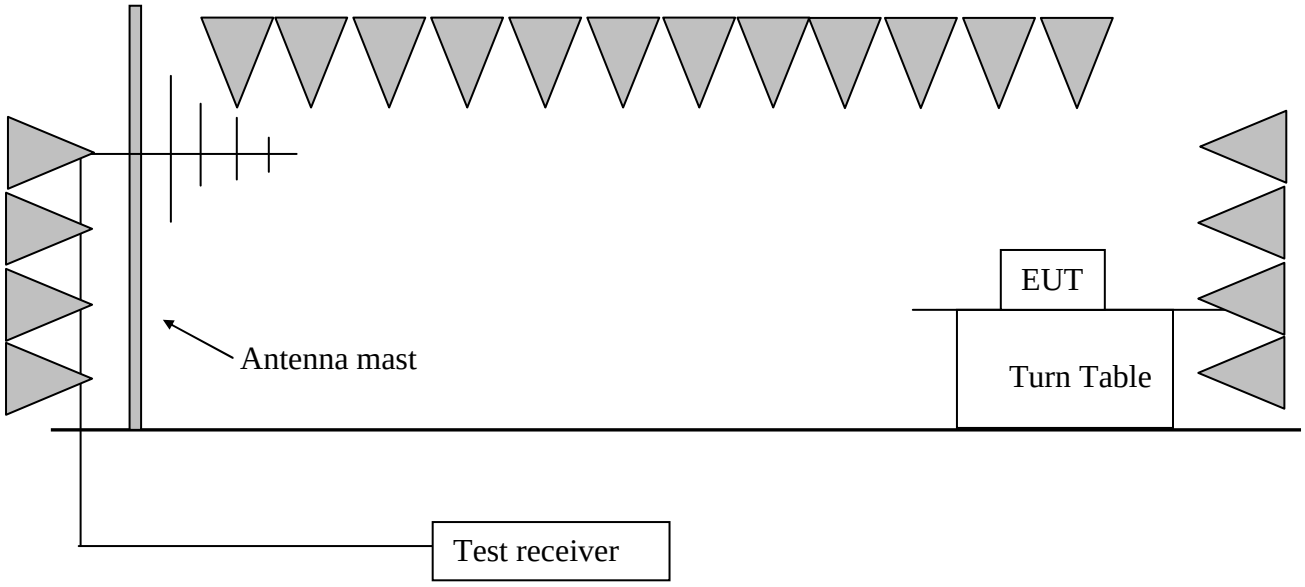

TTRF15.247_V1 © 2015Intertek

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna and the EUT was placed on a 1.5m height.
The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);
RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”.

TTRF15.247_V1 © 2015Intertek

6.4 Test protocol

Mode 1

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	34.30	90.30	/	/	PK
	V	61.10	7.80	38.60	40.00	1.40	PK
	V	86.37	10.10	33.50	40.00	6.50	PK
	V	267.15	15.90	32.70	46.00	13.30	PK
	H	387.67	18.90	37.00	46.00	9.00	PK
	V	2390.00	34.20	51.20	54.00	2.80	PK
	V	4795.59	-3.60	66.50	74.00	7.50	PK
	V	4795.59	-3.60	49.00	54.00	5.00	AV
	V	7208.42	2.00	54.30	74.00	19.70	PK
	V	7208.42	2.00	39.20	54.00	14.80	AV
	H	9621.24	4.90	51.40	54.00	2.60	PK
M	H	2441.05	34.40	91.20	/	/	PK
	V	61.10	7.80	38.60	40.00	1.40	PK
	V	86.37	10.10	33.50	40.00	6.50	PK
	V	267.15	15.90	32.70	46.00	13.30	PK
	H	387.67	18.90	37.00	46.00	9.00	PK
	V	4882.00	-3.40	66.90	74.00	7.10	PK
	V	4882.00	-3.40	48.70	54.00	5.30	AV
	V	7325.13	2.30	54.80	74.00	19.20	PK
	V	7325.13	2.30	40.00	54.00	14.00	AV
	H	9765.75	4.90	51.80	54.00	2.20	PK
H	H	2480.60	34.60	90.00	/	/	PK
	V	61.10	7.80	38.60	40.00	1.40	PK
	V	86.37	10.10	33.50	40.00	6.50	PK
	V	267.15	15.90	32.70	46.00	13.30	PK
	H	387.67	18.90	37.00	46.00	9.00	PK

TTRF15.247_V1 © 2015Intertek

	H	2483.50	34.60	52.60	54.00	1.40	PK
	V	4963.92	-3.20	66.20	74.00	7.80	PK
	V	4963.92	-3.20	48.70	54.00	5.30	AV
	V	7446.89	2.70	54.30	74.00	19.70	PK
	V	7446.89	2.70	39.00	54.00	15.00	AV
	H	9929.85	5.00	51.20	54.00	2.80	PK

Mode 2

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	34.30	90.00	/	/	PK
	V	61.10	7.80	38.50	40.00	1.50	PK
	V	86.37	10.10	33.60	40.00	6.40	PK
	V	267.15	15.90	32.70	46.00	13.30	PK
	H	387.67	18.90	37.20	46.00	8.80	PK
	V	2390.00	34.20	51.10	54.00	2.90	PK
	V	4795.59	-3.60	66.20	74.00	7.80	PK
	V	4795.59	-3.60	48.70	54.00	5.30	AV
	V	7208.42	2.00	54.50	74.00	19.50	PK
	V	7208.42	2.00	39.30	54.00	14.70	AV
	H	9621.24	4.90	51.60	54.00	2.40	PK
M	H	2441.05	34.40	90.90	/	/	PK
	V	61.10	7.80	38.50	40.00	1.50	PK
	V	86.37	10.10	33.60	40.00	6.40	PK
	V	267.15	15.90	32.80	46.00	13.20	PK
	H	387.67	18.90	37.10	46.00	8.90	PK
	V	4882.00	-3.40	66.70	74.00	7.30	PK
	V	4882.00	-3.40	48.50	54.00	5.50	AV
	V	7325.13	2.30	54.70	74.00	19.30	PK
	V	7325.13	2.30	39.10	54.00	14.10	AV

	H	9765.75	4.90	51.60	54.00	2.40	PK
H	H	2480.60	34.60	89.80	/	/	PK
	V	61.10	7.80	38.70	40.00	1.30	PK
	V	86.37	10.10	33.60	40.00	6.40	PK
	V	267.15	15.90	32.90	46.00	13.10	PK
	H	387.67	18.90	37.20	46.00	8.80	PK
	H	2483.50	34.60	52.50	54.00	1.50	PK
	V	4963.92	-3.20	66.00	74.00	8.00	PK
	V	4963.92	-3.20	48.60	54.00	5.40	AV
	V	7446.89	2.70	54.10	74.00	19.90	PK
	V	7446.89	2.70	38.90	54.00	15.10	AV
	H	9929.85	5.00	51.10	54.00	2.90	PK

Mode 3

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	34.30	90.10	/	/	PK
	V	61.10	7.80	38.50	40.00	1.50	PK
	V	86.37	10.10	33.60	40.00	6.40	PK
	V	267.15	15.90	32.70	46.00	13.30	PK
	H	387.67	18.90	37.20	46.00	8.80	PK
	V	2390.00	34.20	51.00	54.00	3.00	PK
	V	4795.59	-3.60	66.00	74.00	8.00	PK
	V	4795.59	-3.60	48.60	54.00	5.40	AV
	V	7208.42	2.00	54.60	74.00	19.40	PK
	V	7208.42	2.00	39.50	54.00	14.50	AV
	H	9621.24	4.90	51.40	54.00	2.60	PK
M	H	2441.05	34.40	91.00	/	/	PK
	V	61.10	7.80	38.50	40.00	1.50	PK
	V	86.37	10.10	33.60	40.00	6.40	PK

	V	267.15	15.90	32.80	46.00	13.20	PK
	H	387.67	18.90	37.10	46.00	8.90	PK
	V	4882.00	-3.40	66.50	74.00	7.50	PK
	V	4882.00	-3.40	48.40	54.00	5.60	AV
	V	7325.13	2.30	54.50	74.00	19.50	PK
	V	7325.13	2.30	39.00	54.00	14.00	AV
	H	9765.75	4.90	51.40	54.00	2.60	PK
H	H	2480.60	34.60	89.70	/	/	PK
	V	61.10	7.80	38.70	40.00	1.30	PK
	V	86.37	10.10	33.60	40.00	6.40	PK
	V	267.15	15.90	32.90	46.00	13.10	PK
	H	387.67	18.90	37.20	46.00	8.80	PK
	H	2483.50	34.60	52.60	54.00	1.40	PK
	V	4963.92	-3.20	65.90	74.00	8.10	PK
	V	4963.92	-3.20	48.40	54.00	5.60	AV
	V	7446.89	2.70	54.00	74.00	20.00	PK
	V	7446.89	2.70	38.70	54.00	15.30	AV
	H	9929.85	5.00	51.00	54.00	3.00	PK

Remark: 1. For fundamental emission, no amplifier is employed.
2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
3. Corrected Reading = Original Receiver Reading + Correct Factor
4. Margin = limit – Corrected Reading
5. If the PK reading is lower than AV limit, the AV test can be elided.
6. The emission was conducted from30MHz to 25GHz.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin = 54 -10.20 = 43.80dBuV/m

7. Band Edge Emission

Test result: **PASS**

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

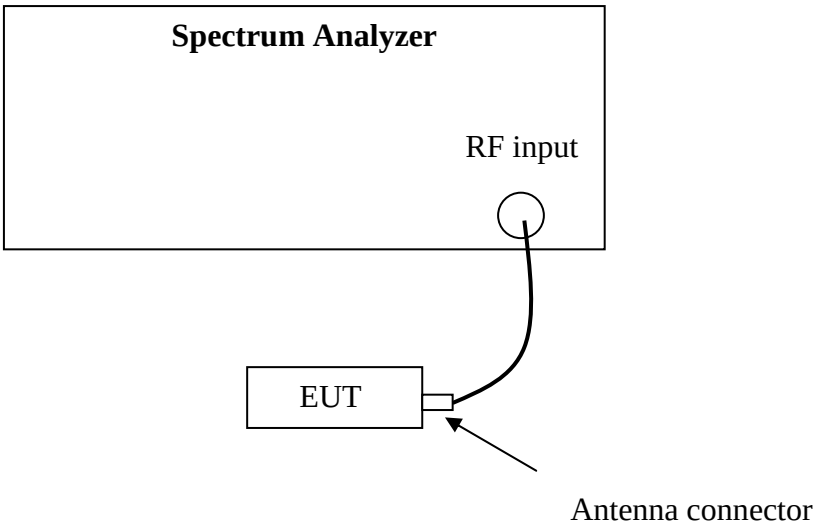

7.3 Test procedure and test setup

The Band Edge Emissions per FCC § 15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

TTRF15.247_V1 © 2015Intertek

7.4 Test protocol

Mode 1, Channel L

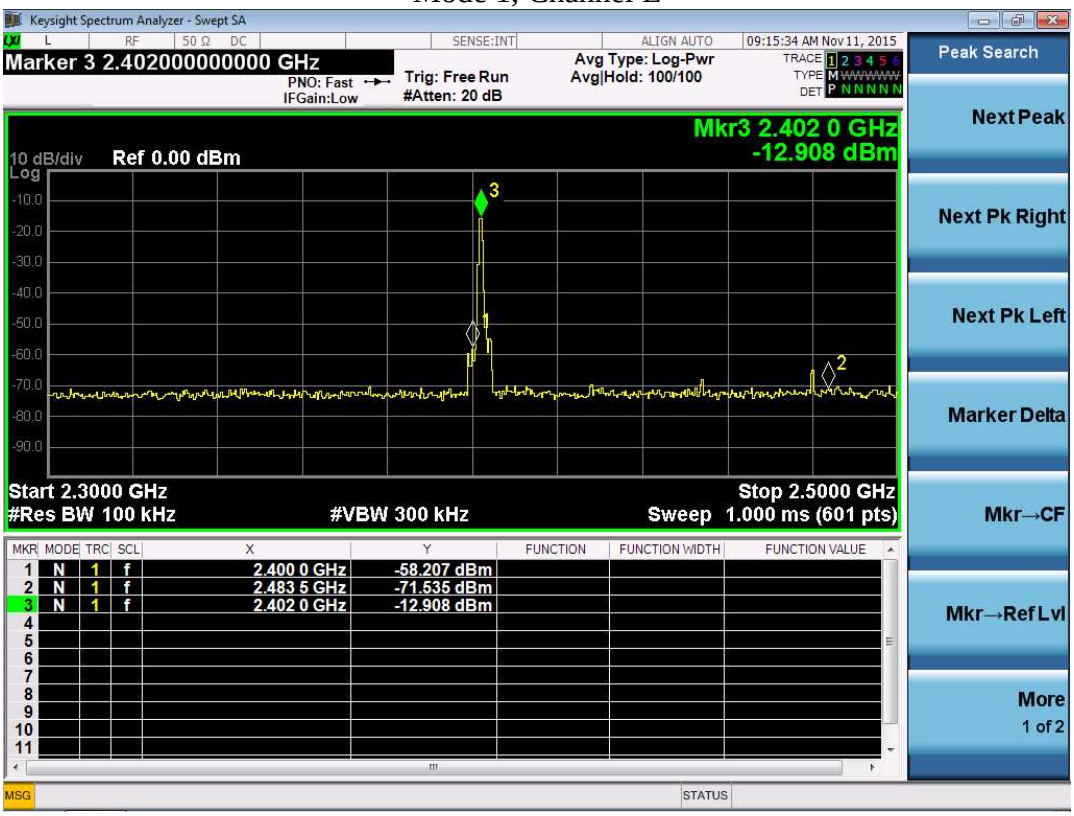

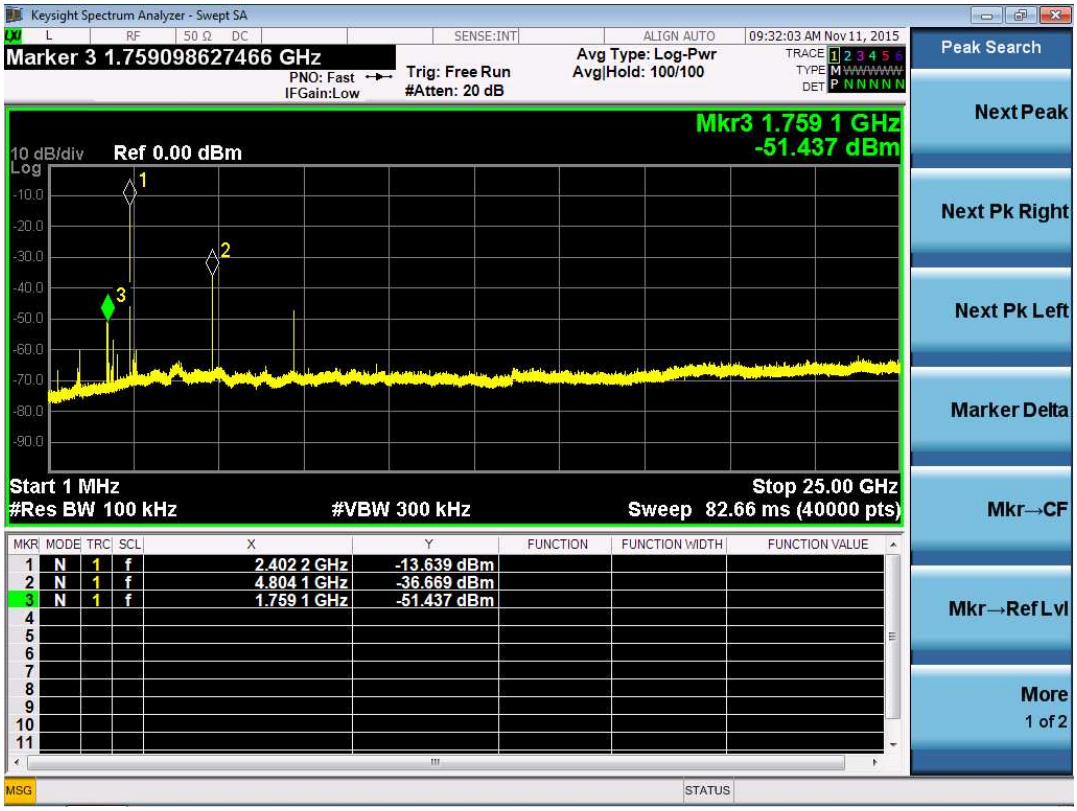

Mode 1, Channel M

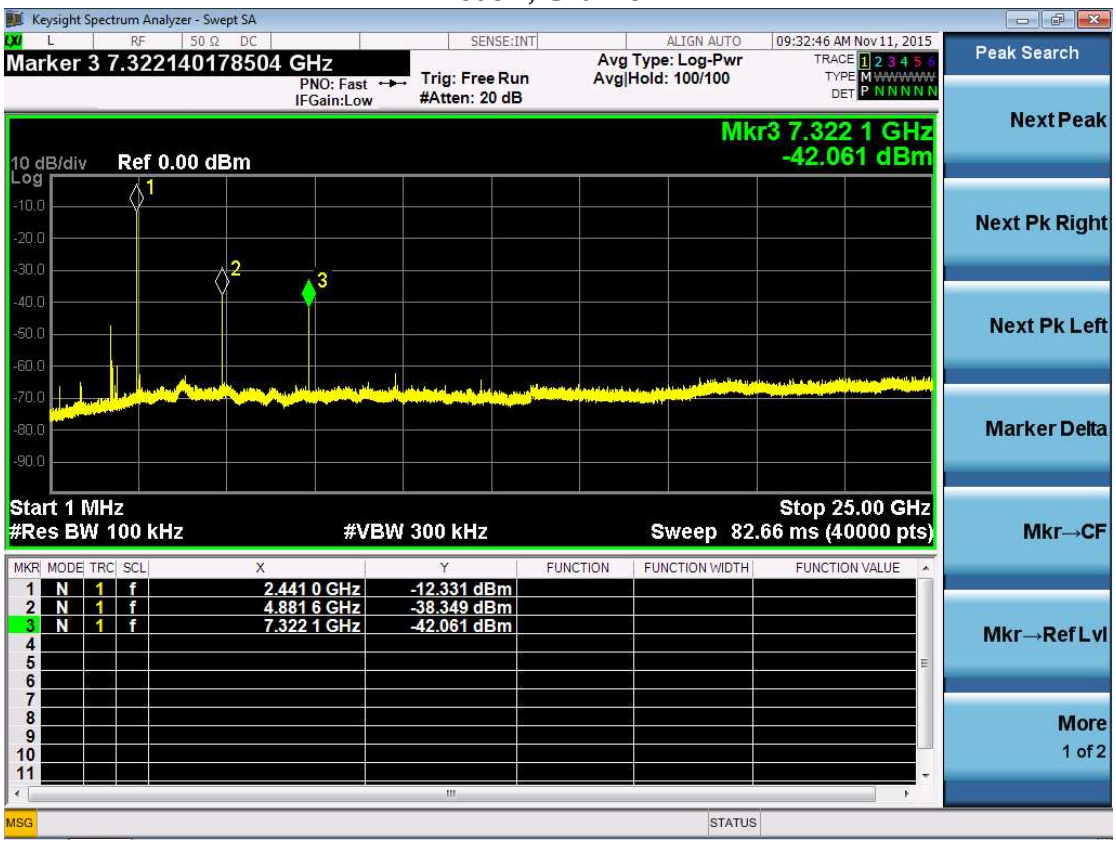

Mode 1, Channel H

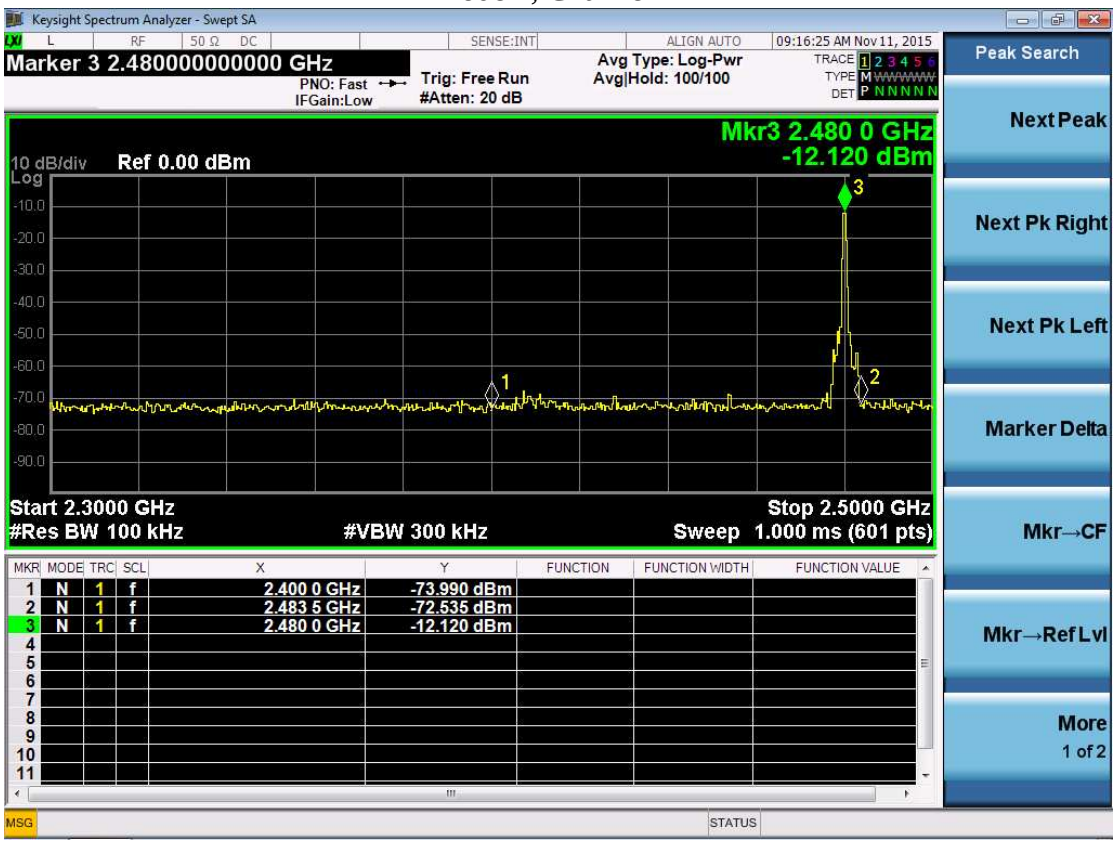

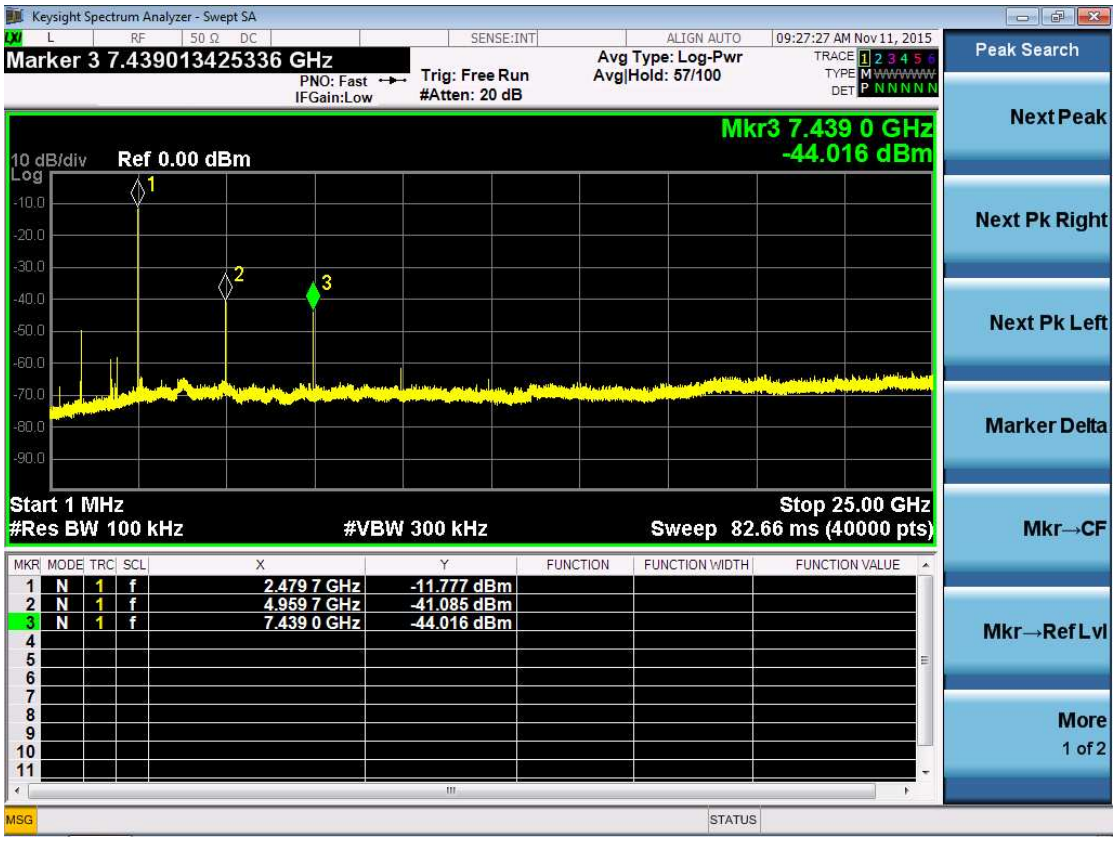

Mode 2, Channel L

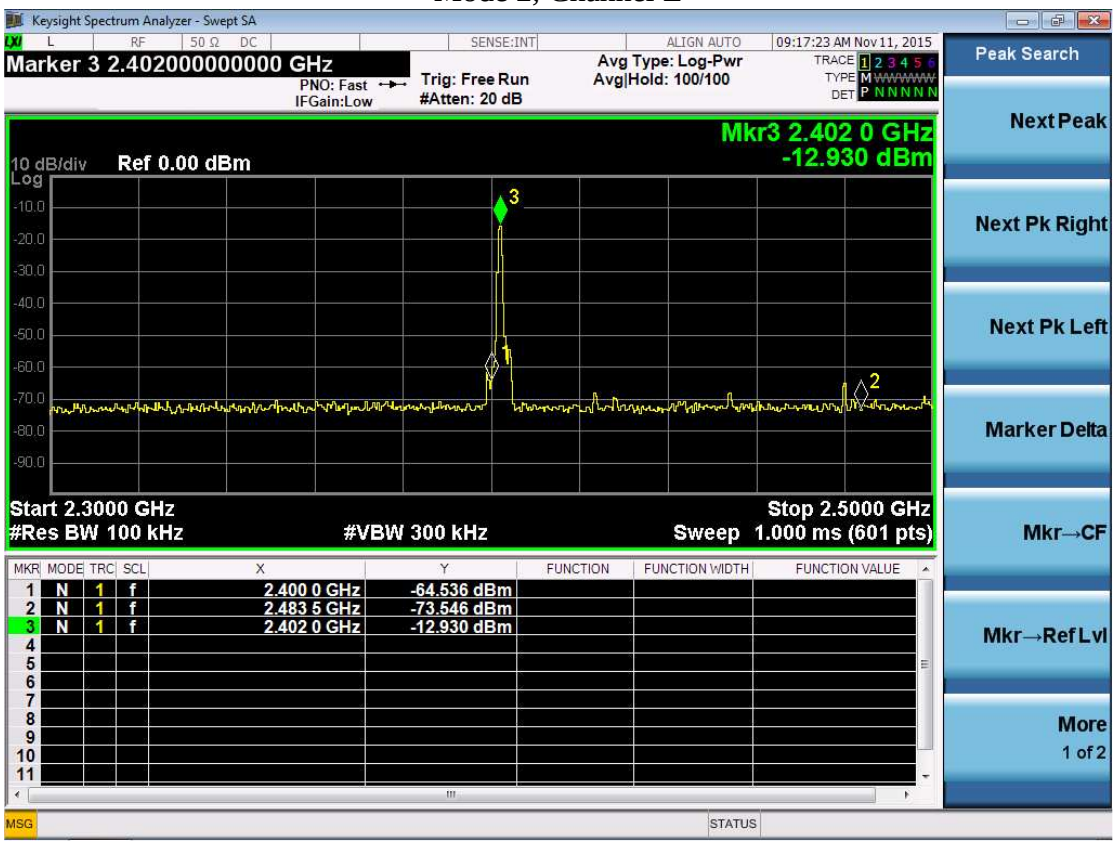

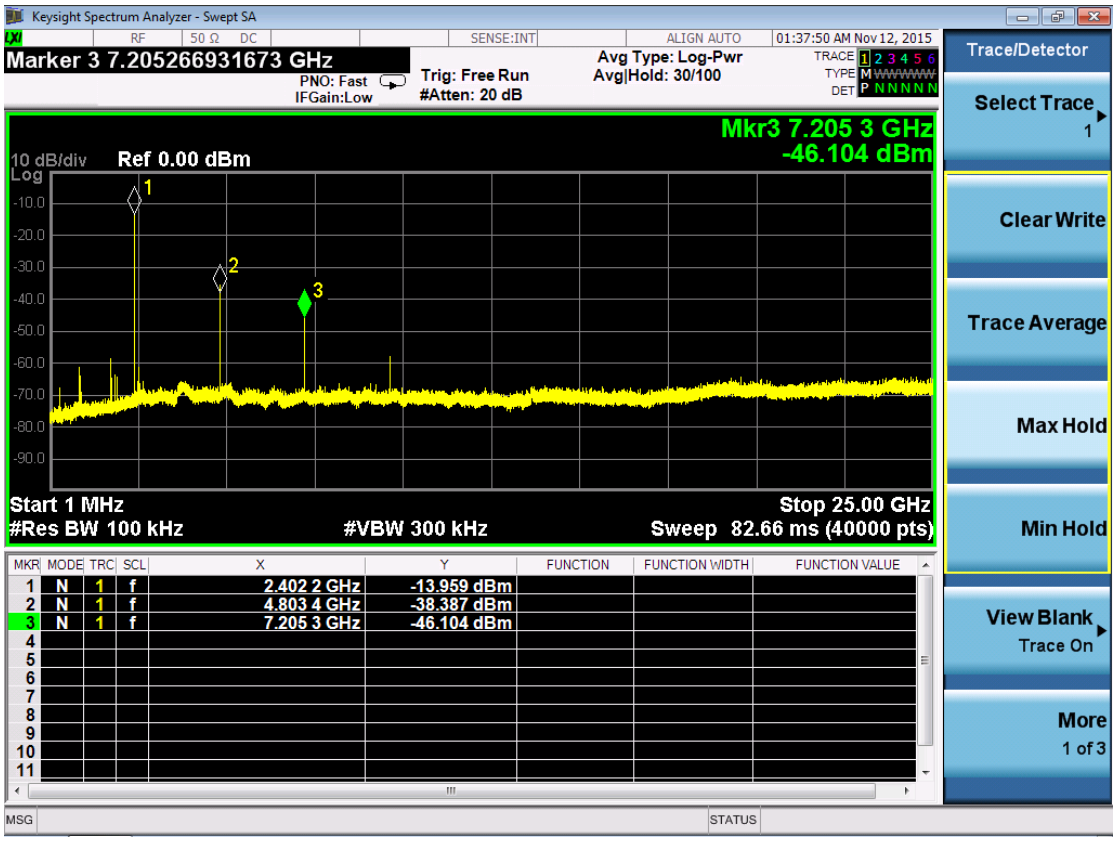

Mode 2, Channel M

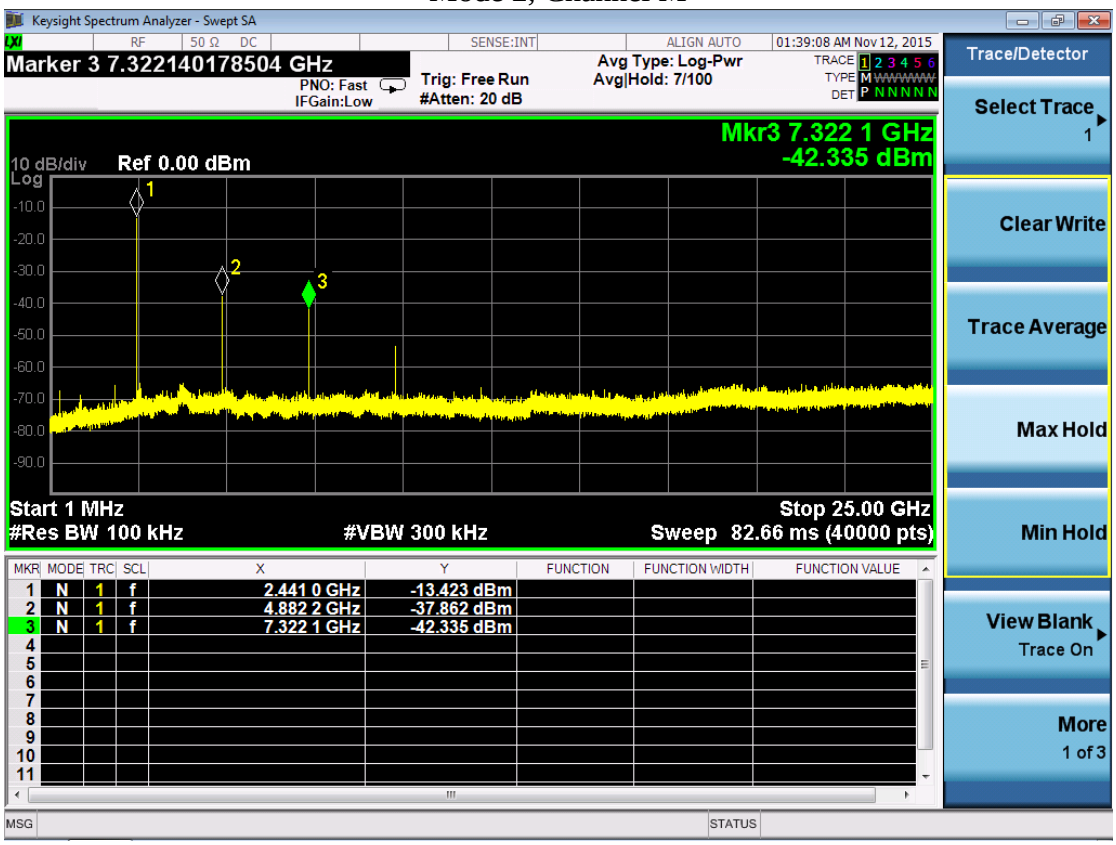

Mode 2, Channel H

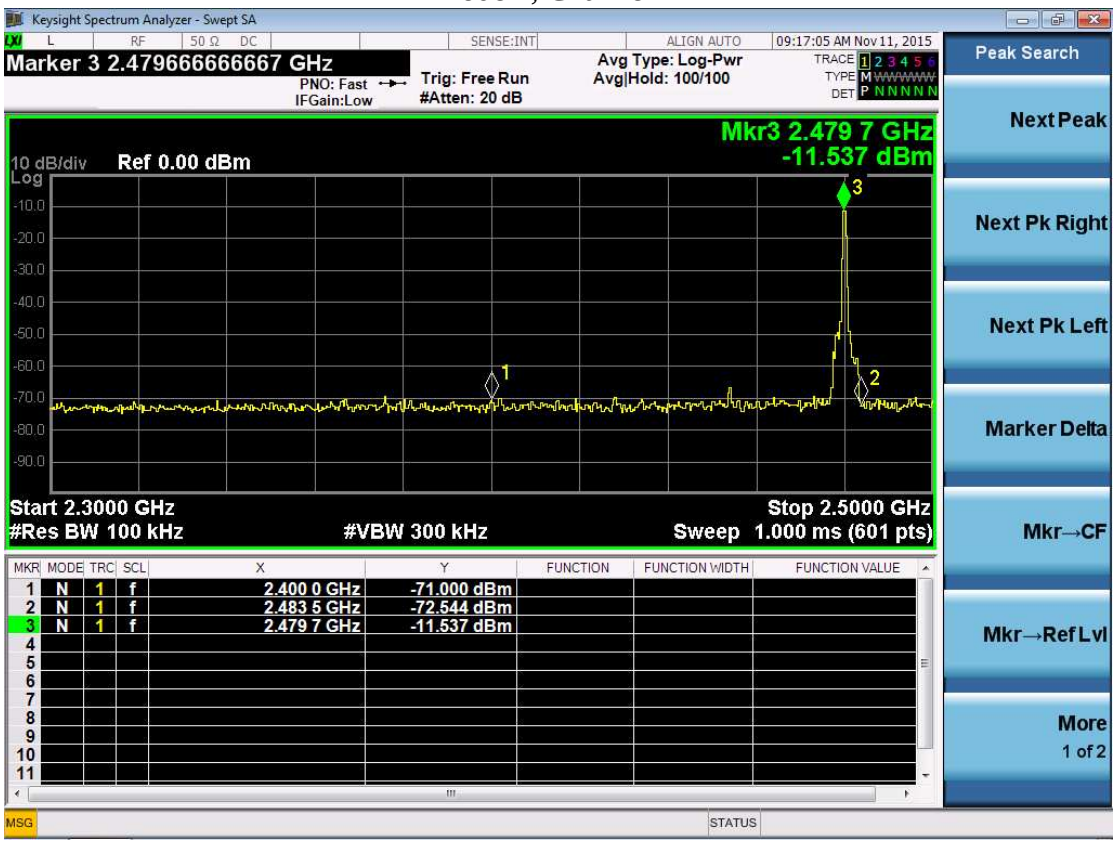

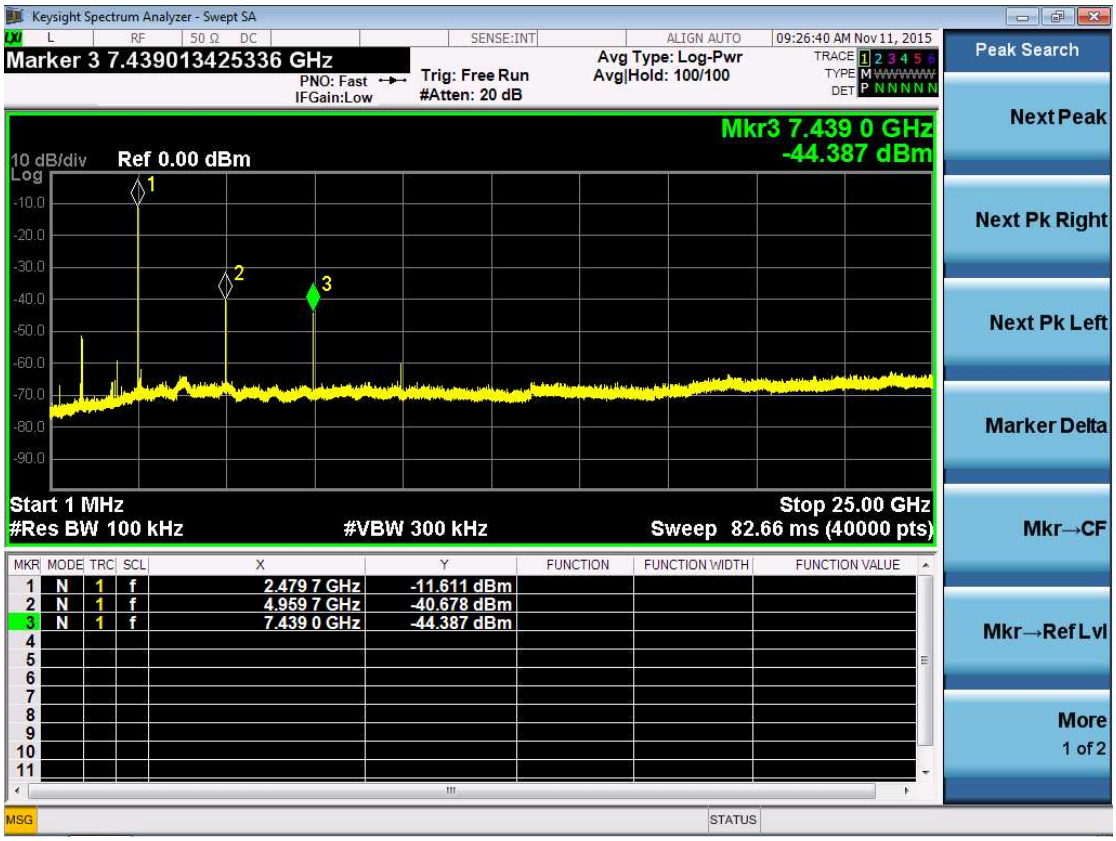

Mode 3, Channel L

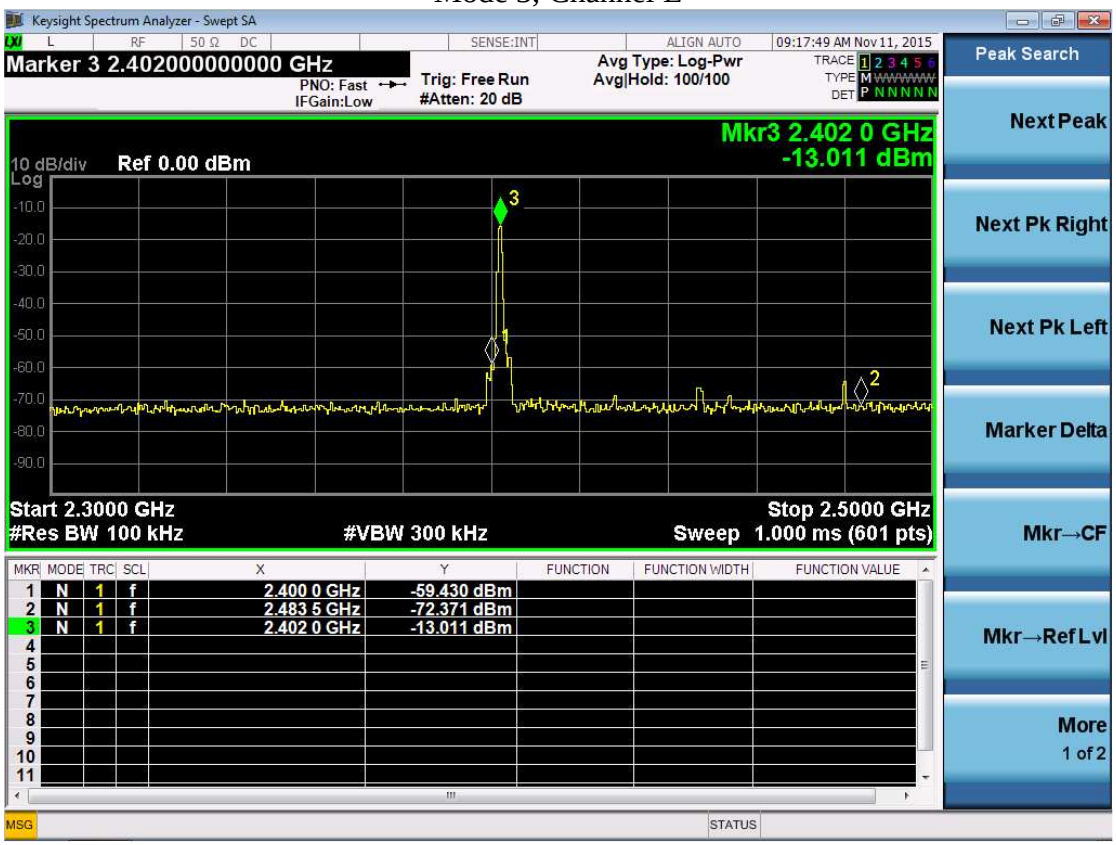

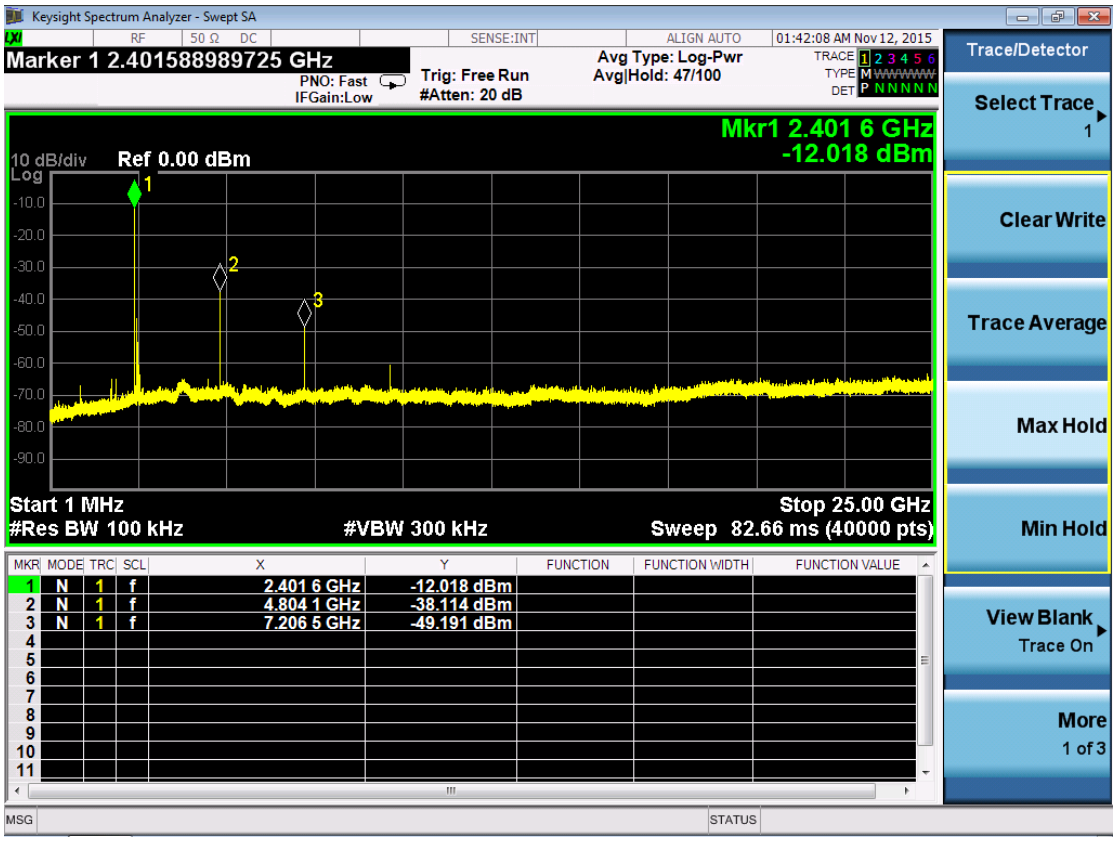

Mode 3, Channel M

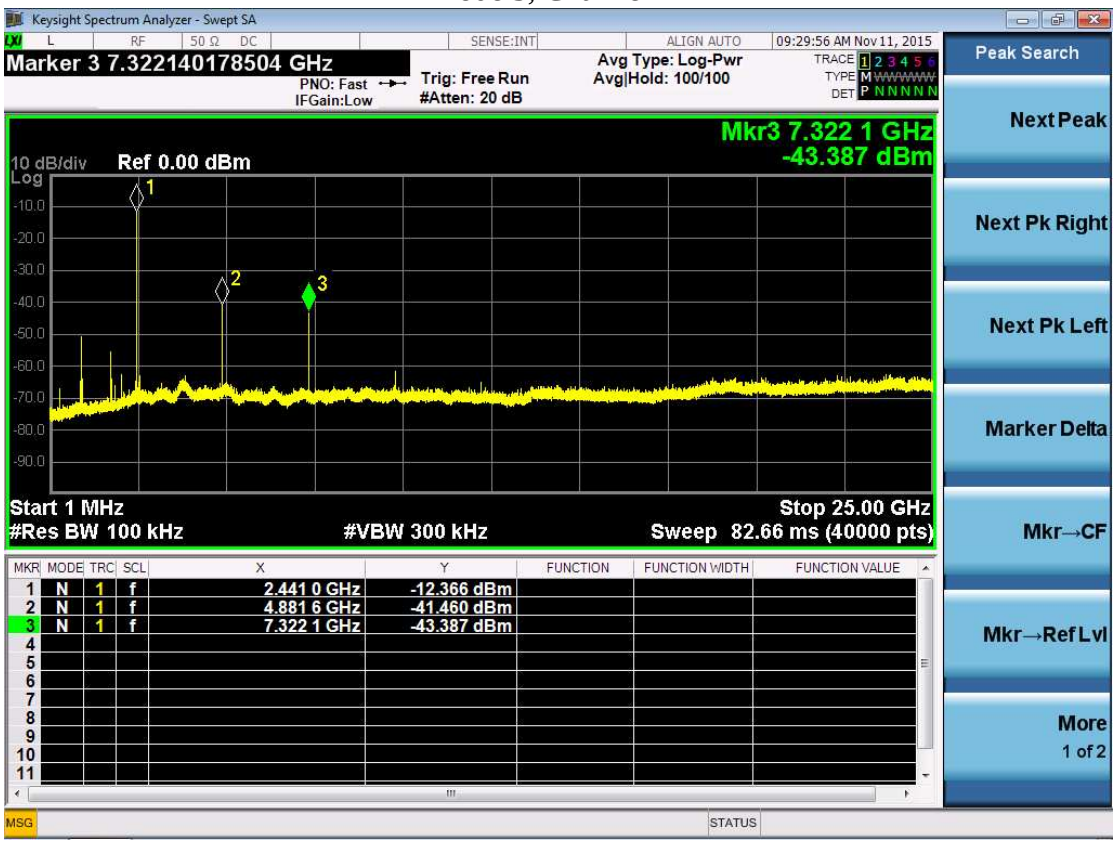

Mode 3, Channel H

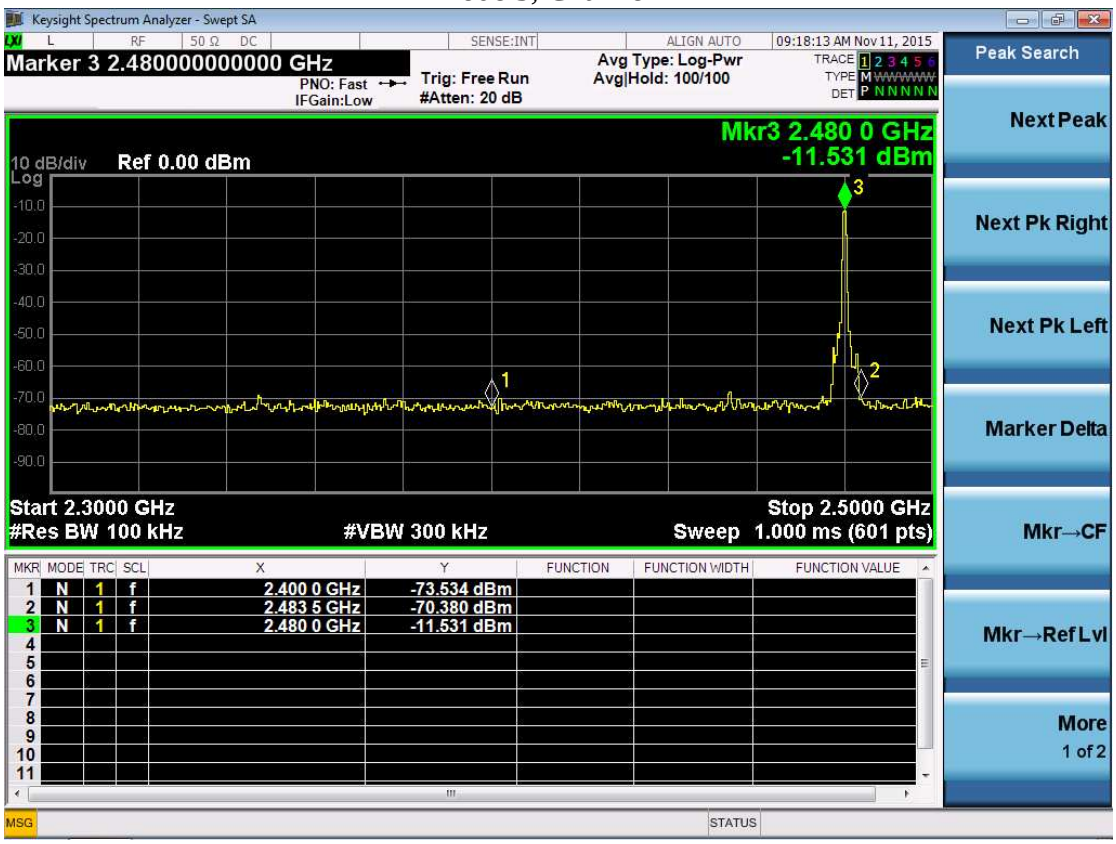

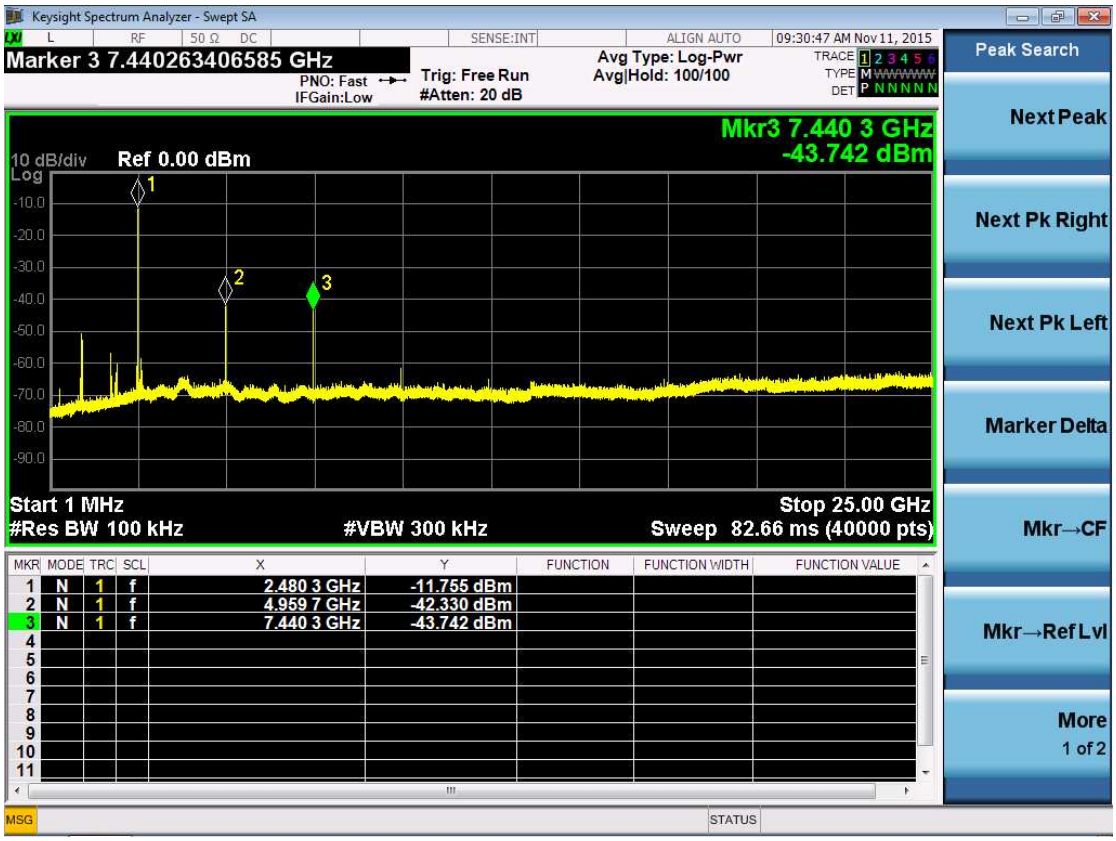
Keysight Spectrum Analyzer - Swept SA
Marker 3 7.440263406585 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold: 100/100
09:30:47 AM Nov 11, 2015
Mkr3 7.440 3 GHz
-43.742 dBm
10 dB/div
Ref 0.00 dBm
Start 1 MHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 25.00 GHz
Sweep 82.66 ms (40000 pts)
1 N 1 f 2.480 3 GHz -11.755 dBm
2 N 1 f 4.959 7 GHz -42.330 dBm
3 N 1 f 7.440 3 GHz -43.742 dBm
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

Mode 4

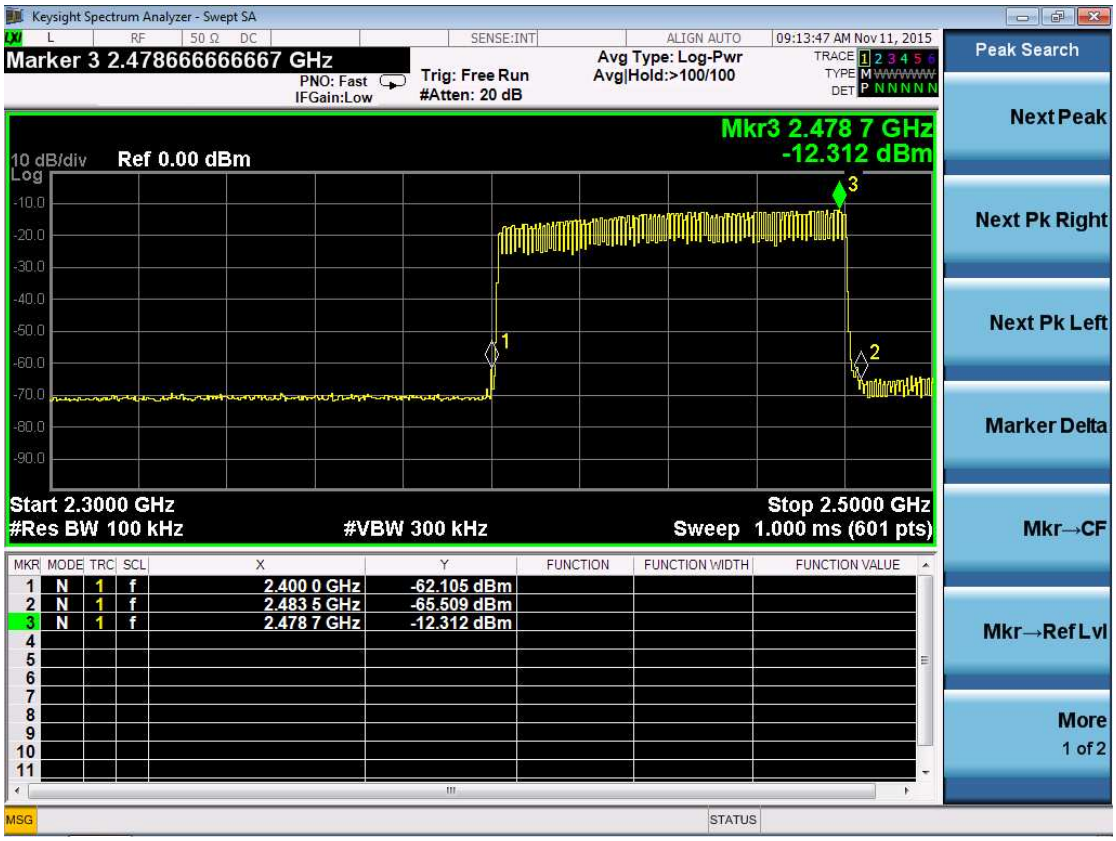
Keysight Spectrum Analyzer - Swept SA
Marker 3 2.478666666667 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
09:13:47 AM Nov 11, 2015
Mkr3 2.478 7 GHz
-12.312 dBm
10 dB/div
Ref 0.00 dBm
Start 2.3000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.5000 GHz
Sweep 1.000 ms (601 pts)
1 N 1 f 2.400 0 GHz -62.105 dBm
2 N 1 f 2.483 5 GHz -65.509 dBm
3 N 1 f 2.478 7 GHz -12.312 dBm
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

Mode 5

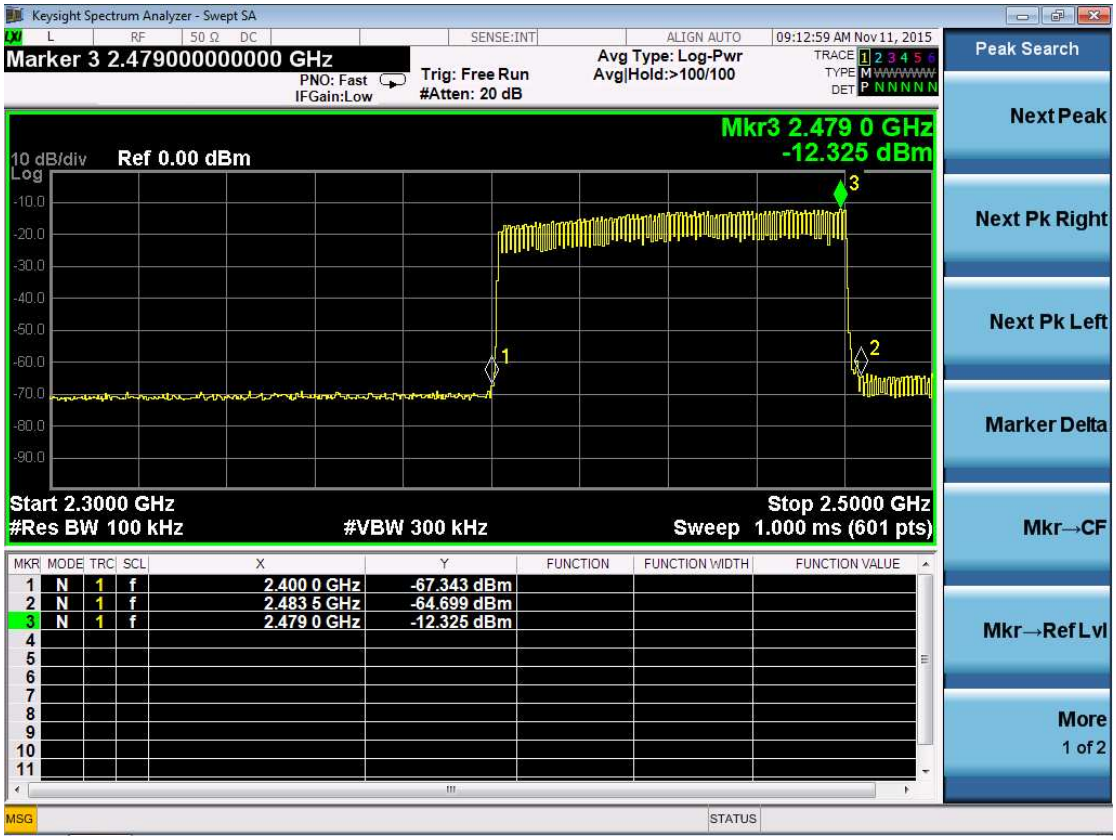
Keysight Spectrum Analyzer - Swept SA
Marker 3 2.479000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
09:12:59 AM Nov 11, 2015
Mkr3 2.479 0 GHz
-12.325 dBm
10 dB/div
Ref 0.00 dBm
Start 2.3000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.5000 GHz
Sweep 1.000 ms (601 pts)
1 N 1 f 2.400 0 GHz -67.343 dBm
2 N 1 f 2.483 5 GHz -64.699 dBm
3 N 1 f 2.479 0 GHz -12.325 dBm
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

Mode 6

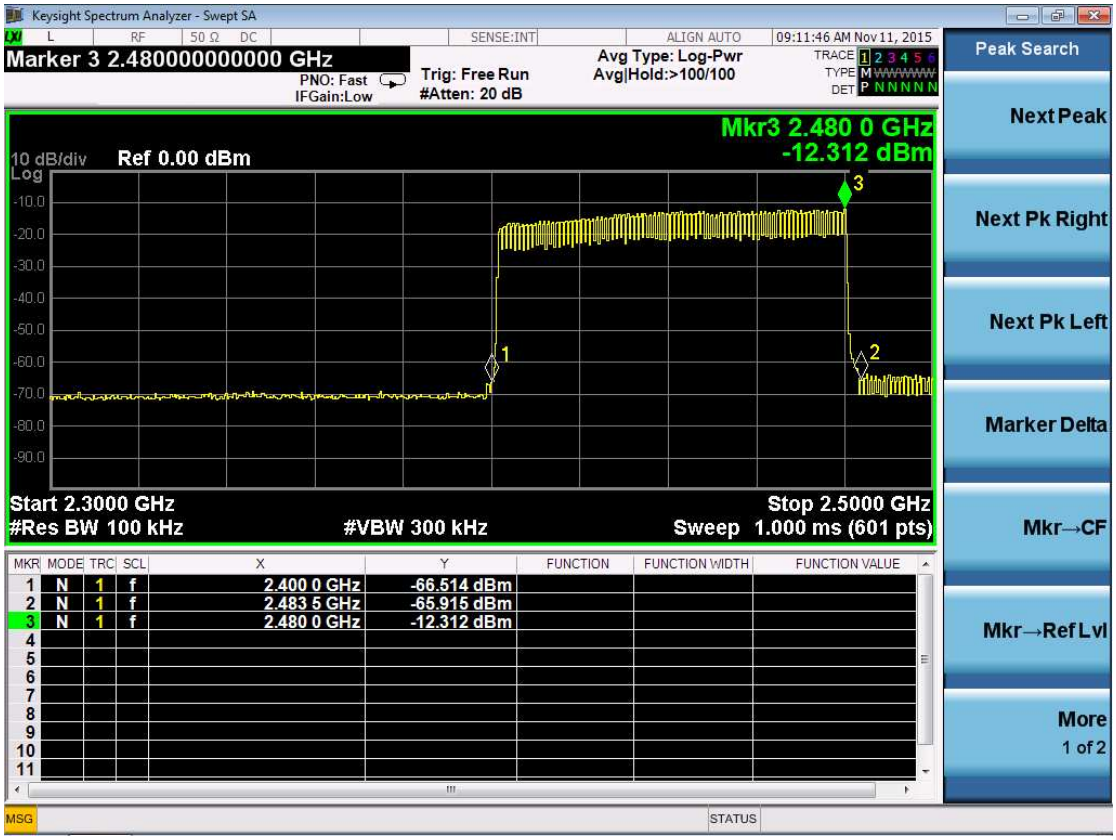
Keysight Spectrum Analyzer - Swept SA
Marker 3 2.480000000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
09:11:46 AM Nov 11, 2015
Mkr3 2.480 0 GHz
-12.312 dBm
10 dB/div
Ref 0.00 dBm
Start 2.3000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.5000 GHz
Sweep 1.000 ms (601 pts)
1 N 1 f 2.400 0 GHz -66.514 dBm
2 N 1 f 2.483 5 GHz -65.915 dBm
3 N 1 f 2.480 0 GHz -12.312 dBm
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

8. Power line conducted emission

Test result: **NA**

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

8.2 Test configuration

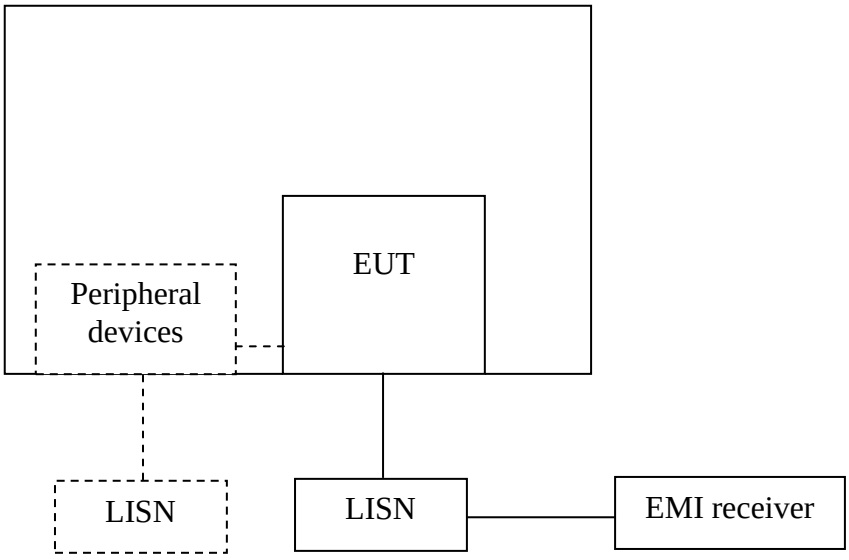

☐ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.

TTRF15.247_V1 © 2015Intertek

8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50Ω/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω/50uH coupling impedance with 50Ω termination.
Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
The bandwidth of the test receiver is set at 9 kHz.

TTRF15.247_V1 © 2015Intertek

8.4 Test protocol

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).
2. Margin (dB) = Limit - Corrected Reading.

TTRF15.247_V1 © 2015Intertek

9. Number of Hopping Frequencies

Test result: **Pass**

9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration

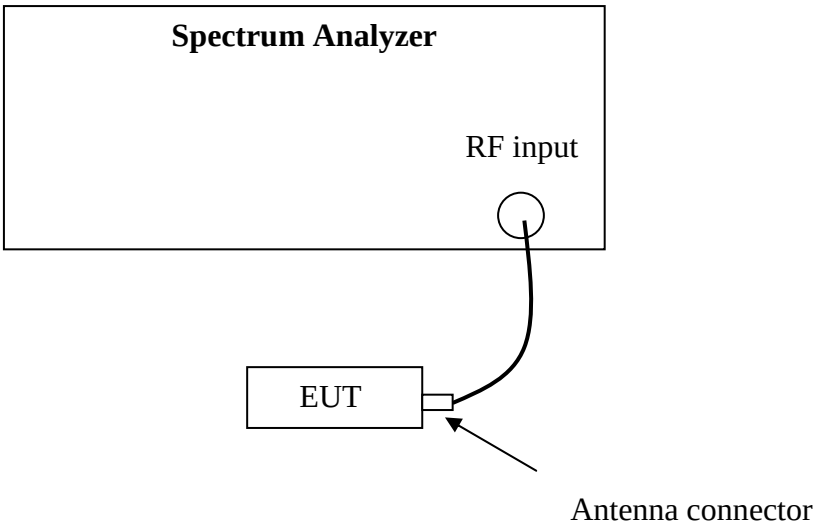

9.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=1MHz, VBW≥RBW, Sweep = auto, Detector = peak, Trace = max hold.
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

TTRF15.247_V1 © 2015Intertek

9.4 Test protocol

Mode	Channel Number	Limit
4	79	≥15

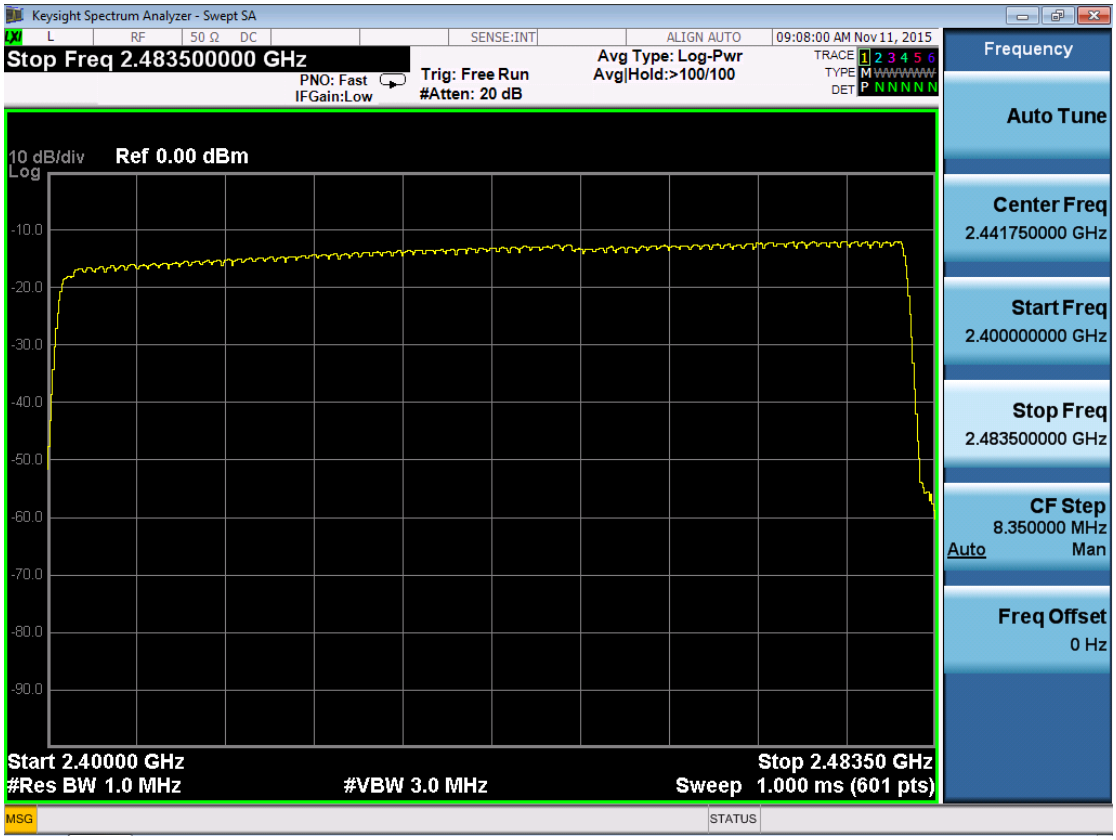

Mode	Channel Number	Limit
5	79	≥15

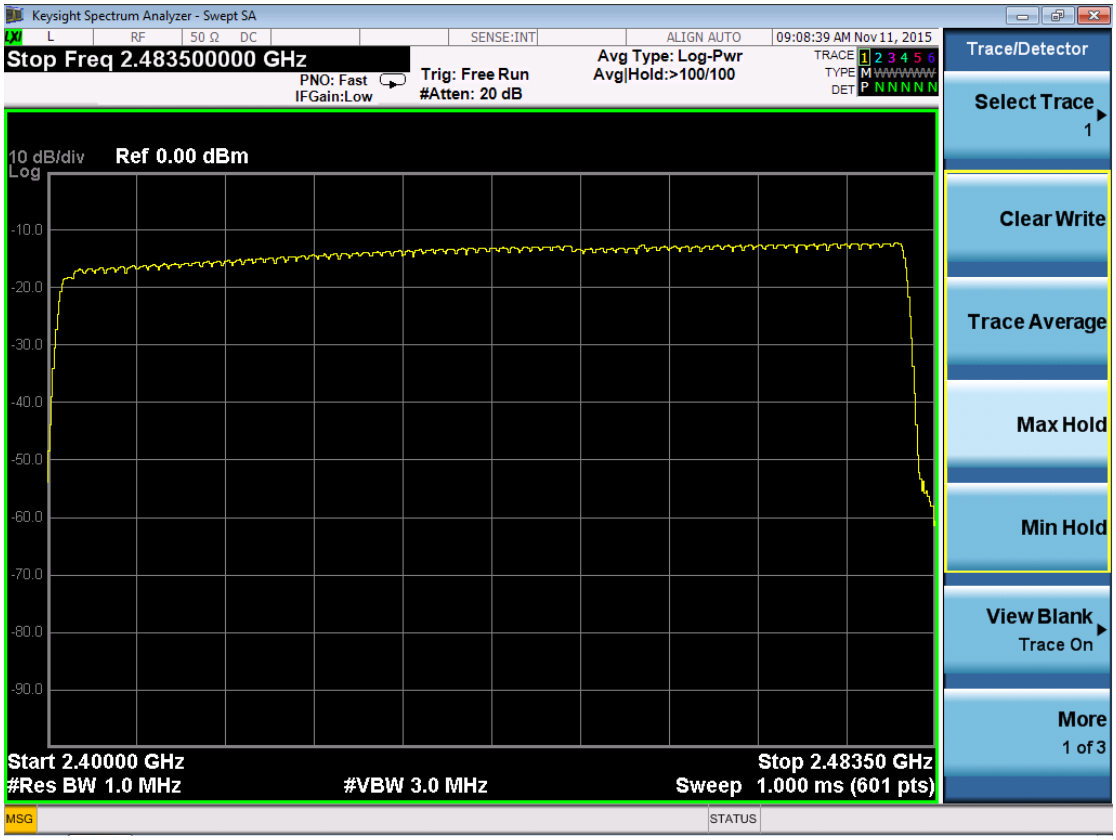

Mode	Channel Number	Limit
6	79	≥15

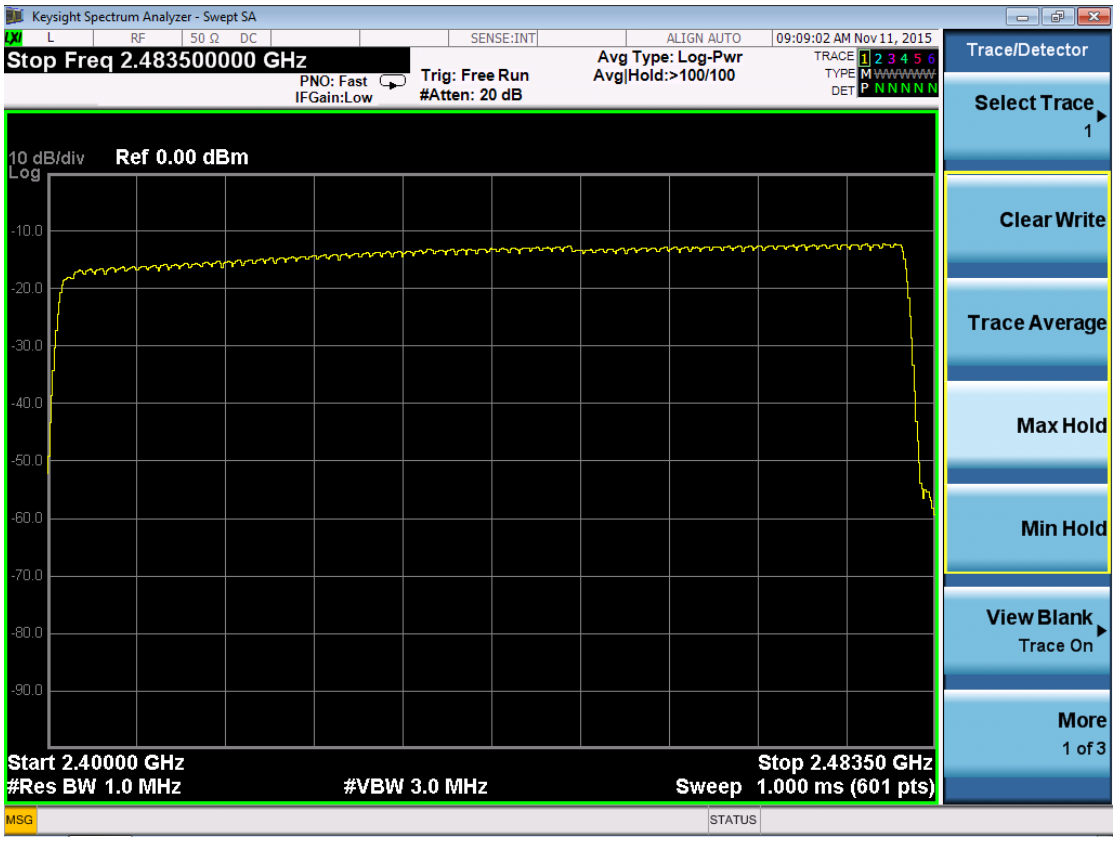

10. Dwell Time

Test result: **Pass**

10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

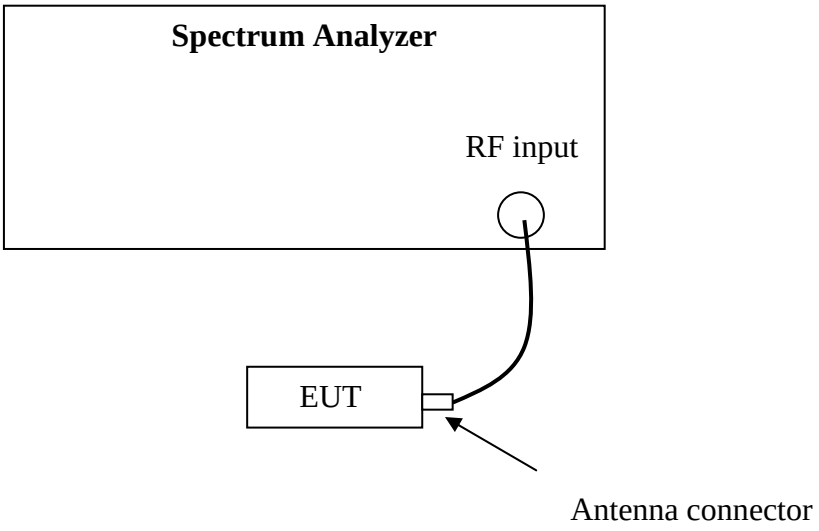

10.3 Test procedure and test setup

Dwell time per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW≥RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold.
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

TTRF15.247_V1 © 2015Intertek

10.4 Test protocol

Channel	Mode	Time of Occupancy (ms)	Limit (ms)
M	8DPSK_DH1	131.2	≤400

Dwell time for single hop: 0.41ms; Hopping numbers within 1sec: 32hops/3.16s;
Test Time Period: 0.4*79=31.6sec;
The Maximum Occupancy Time within 31.6s: 0.41* (32/3.16) * 31.6= 131.2ms

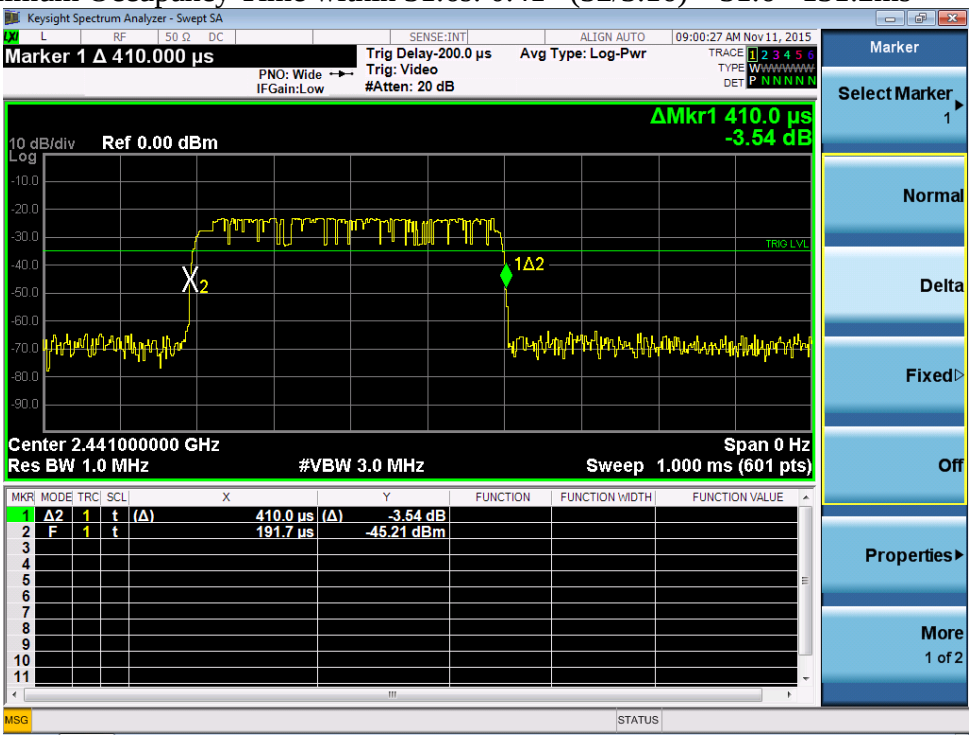

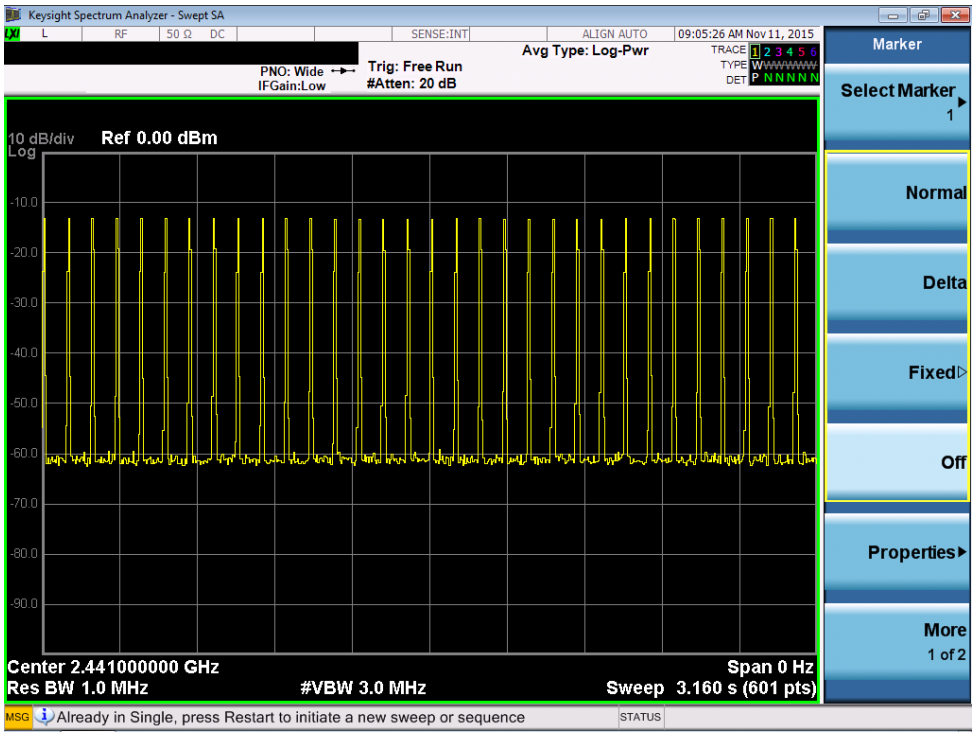

Channel	Mode	Time of Occupancy (ms)	Limit (ms)
M	8DPSK_DH3	267.2	≤400

Dwell time for single hop: 1.67ms; Hopping numbers within 1sec: 16hops/3.16s;
Test Time Period: 0.4*79=31.6sec;
The Maximum Occupancy Time within 31.6s: 1.67* (16/3.16) * 31.6= 267.2ms

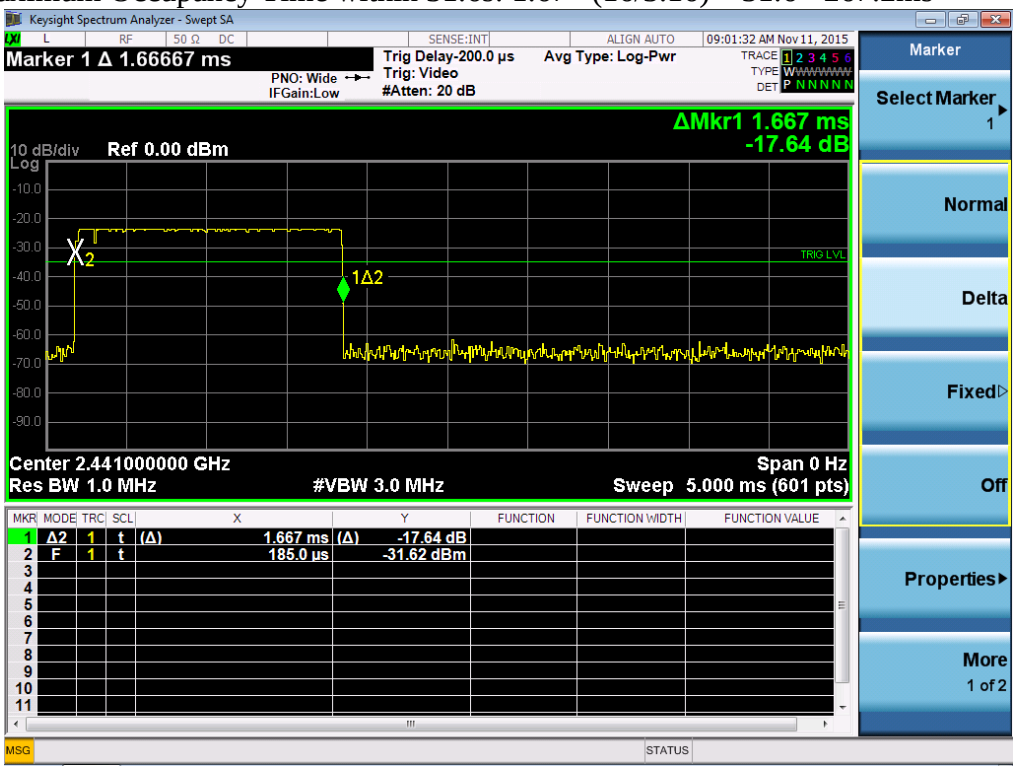

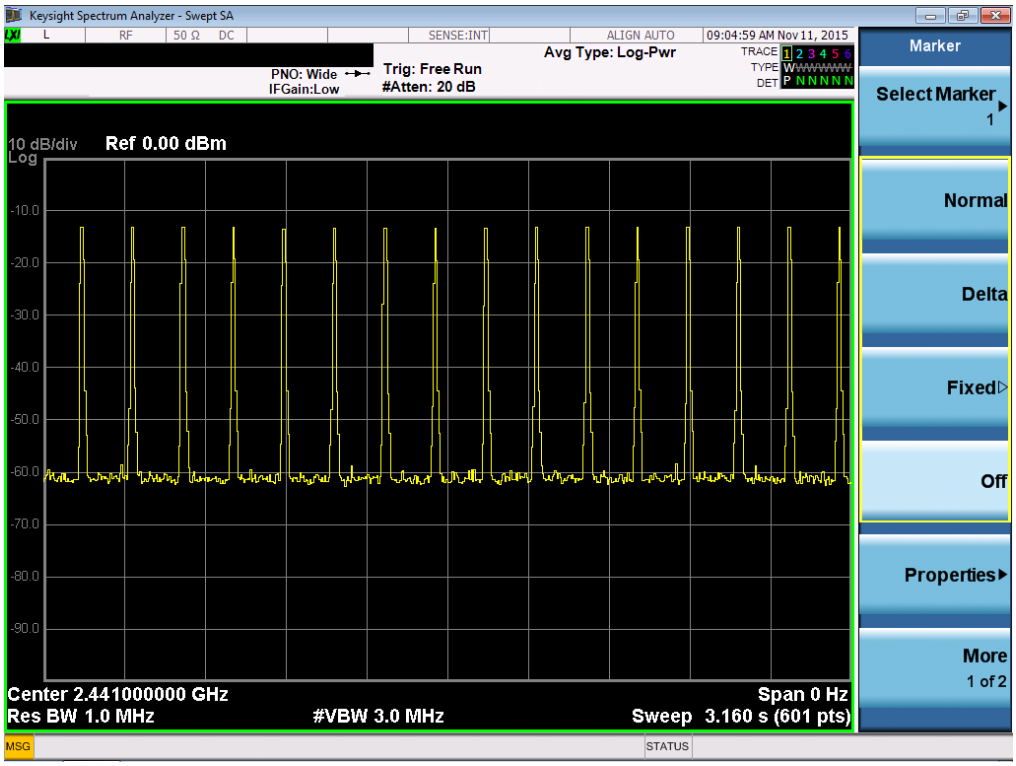

Channel	Mode	Time of Occupancy (ms)	Limit (ms)
M	8DPSK_DH5	321.2	≤400

Dwell time for single hop: 2.92ms; Hopping numbers within 1sec: 11hops/3.16s;
Test Time Period: 0.4*79=31.6sec;
The Maximum Occupancy Time within 31.6s: 2.92* (11/3.16) * 31.6= 321.2ms

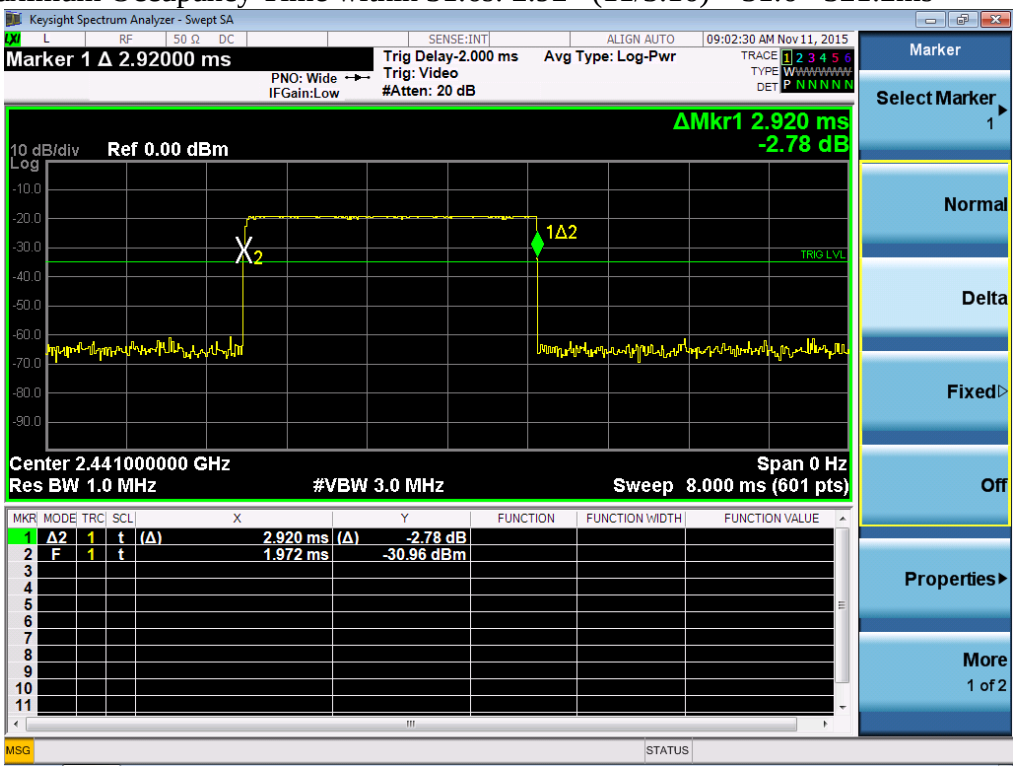

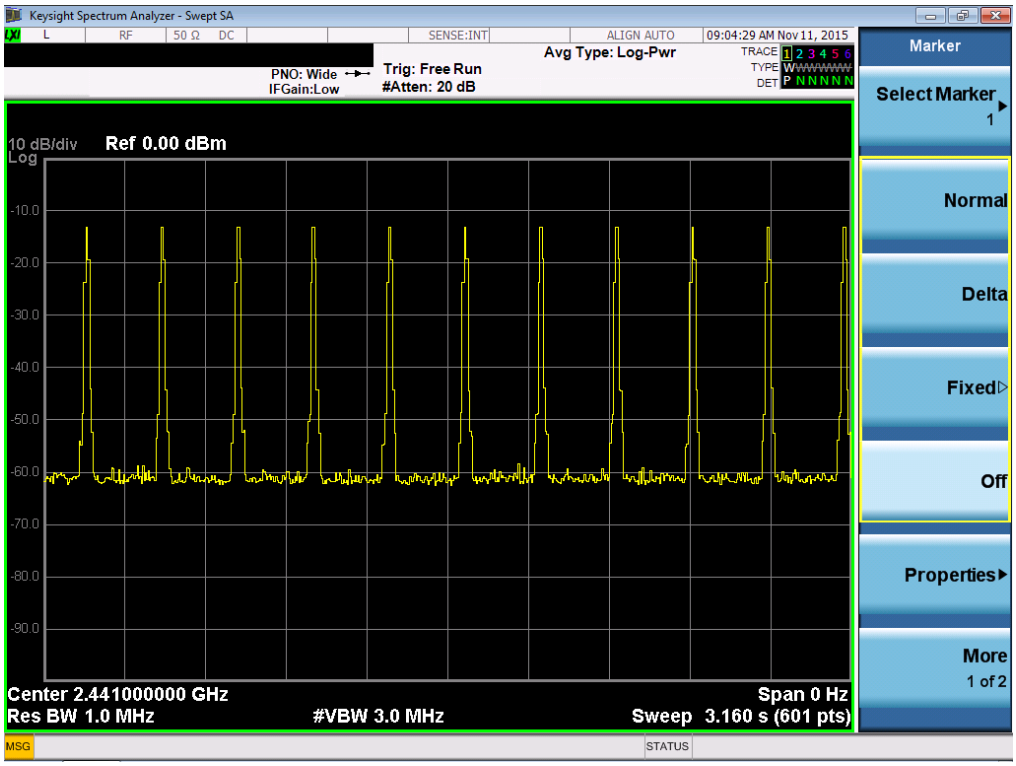

11. Occupied Bandwidth

Test Status: Pass

11.1 Test limit

None

11.2 Test Configuration

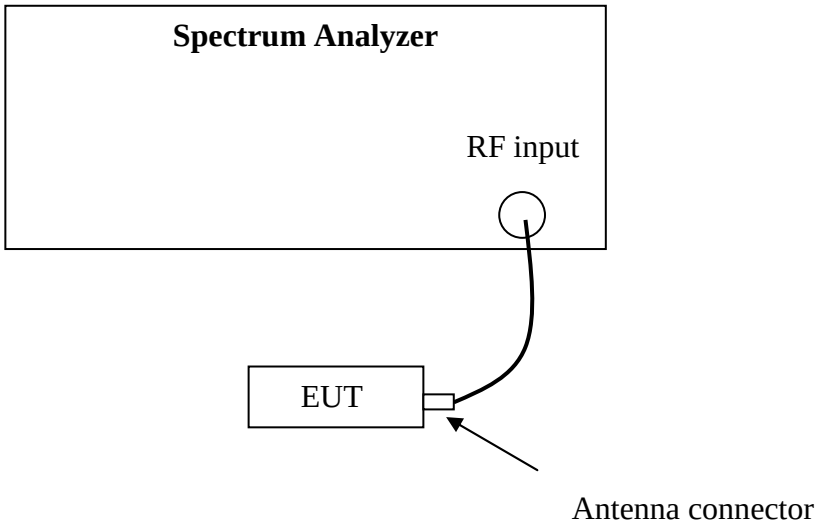

11.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer with the RBW close to 1% of the selected span, VBW = 3 * RBW
Detector = Sample, Sweep = Auto.

TTRF15.247_V1 © 2015Intertek

11.4 Test protocol

Temperature : 26 °C
Relative Humidity : 55 %

Mode	CH	Occupied Bandwidth (kHz)
1	L	876
	M	882
	H	876

Channel L

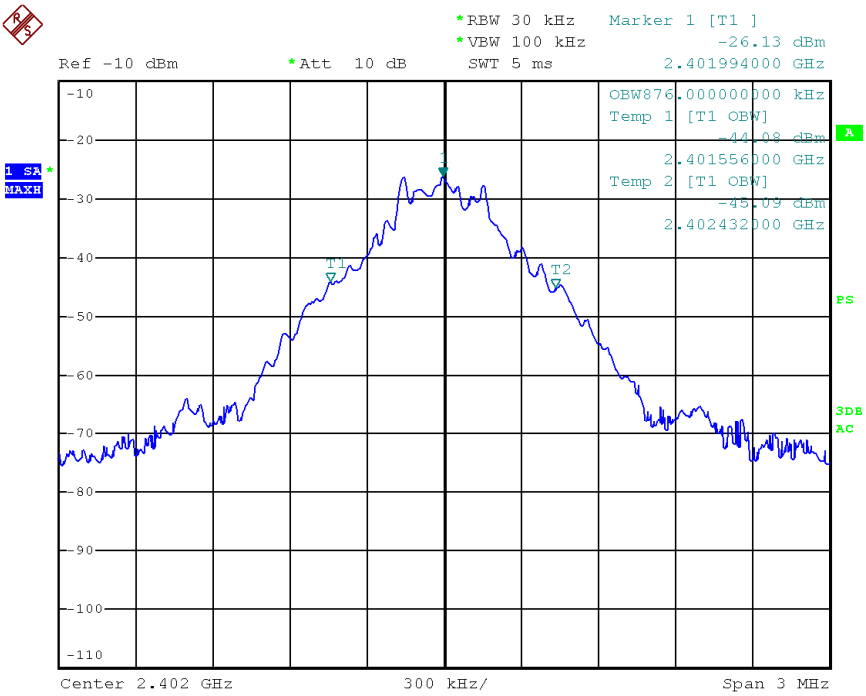

TTRF15.247_V1 © 2015Intertek

Channel M

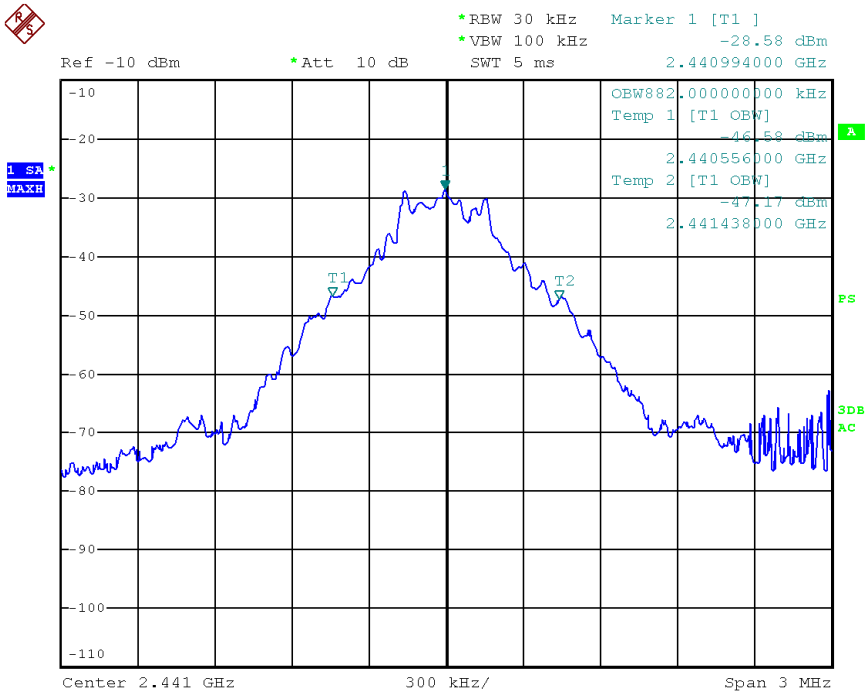

Channel H

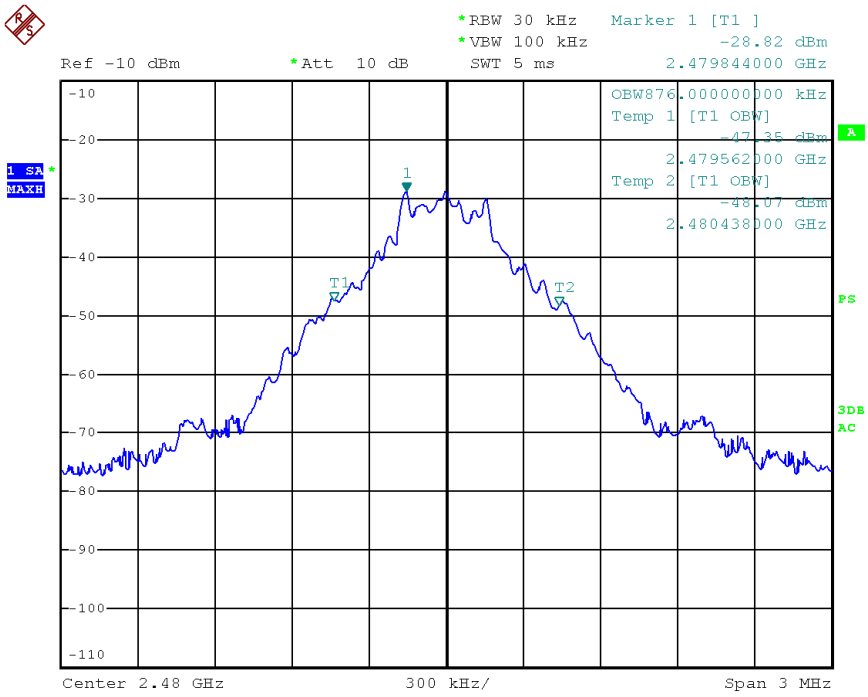

Mode	CH	Occupied Bandwidth (kHz)
2	L	1164
	M	1158
	H	1158

Channel L

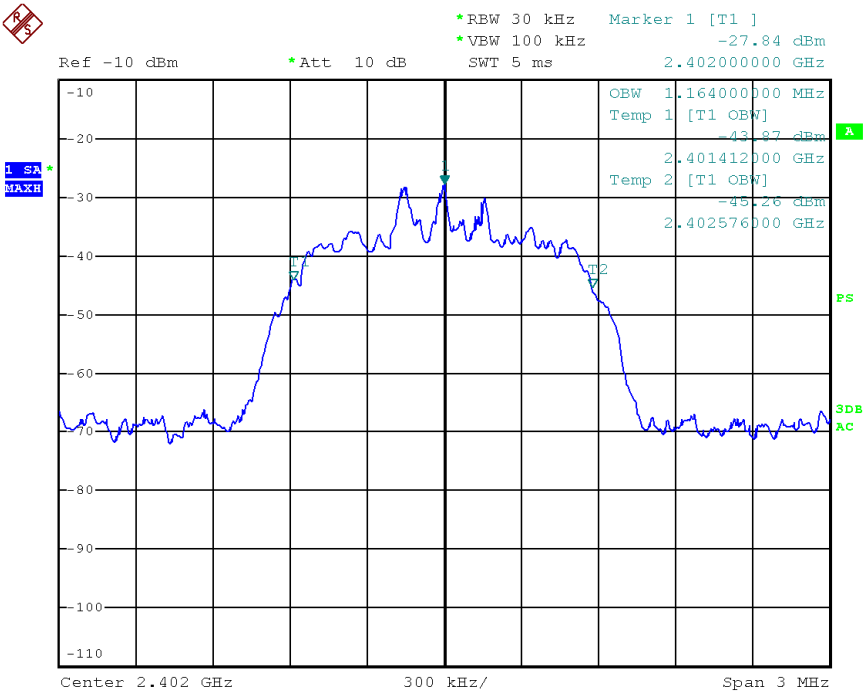

TTRF15.247_V1 © 2015Intertek

Channel M

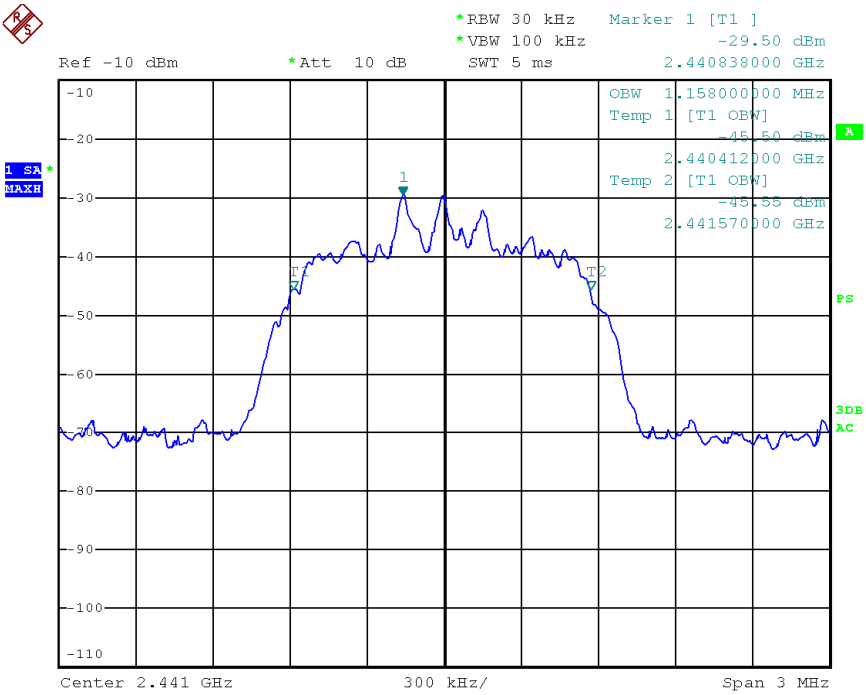

Channel H

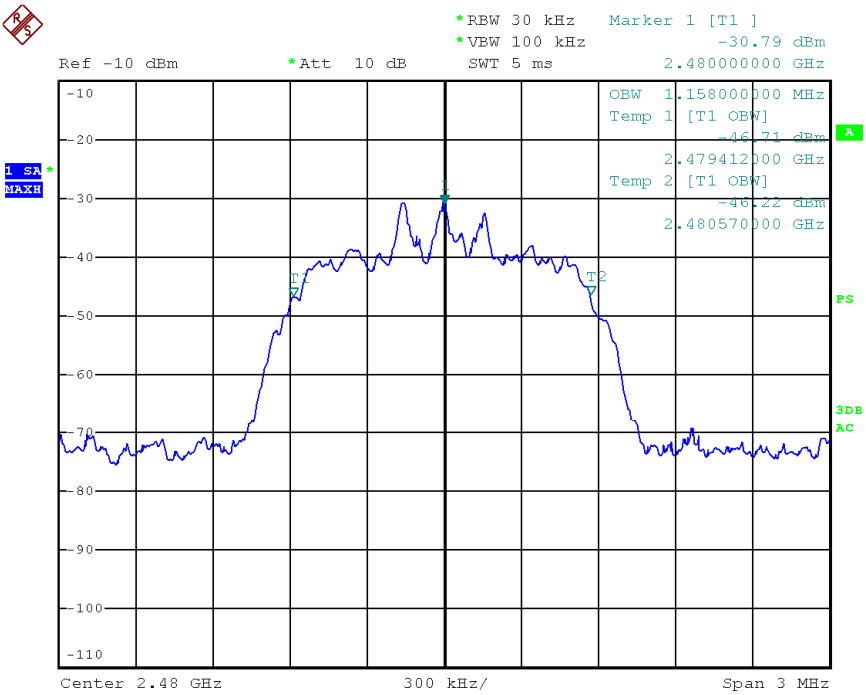

TTRF15.247_V1 © 2015Intertek

Mode	CH	Occupied Bandwidth (kHz)
3	L	1170
	M	1170
	H	1158

Channel L

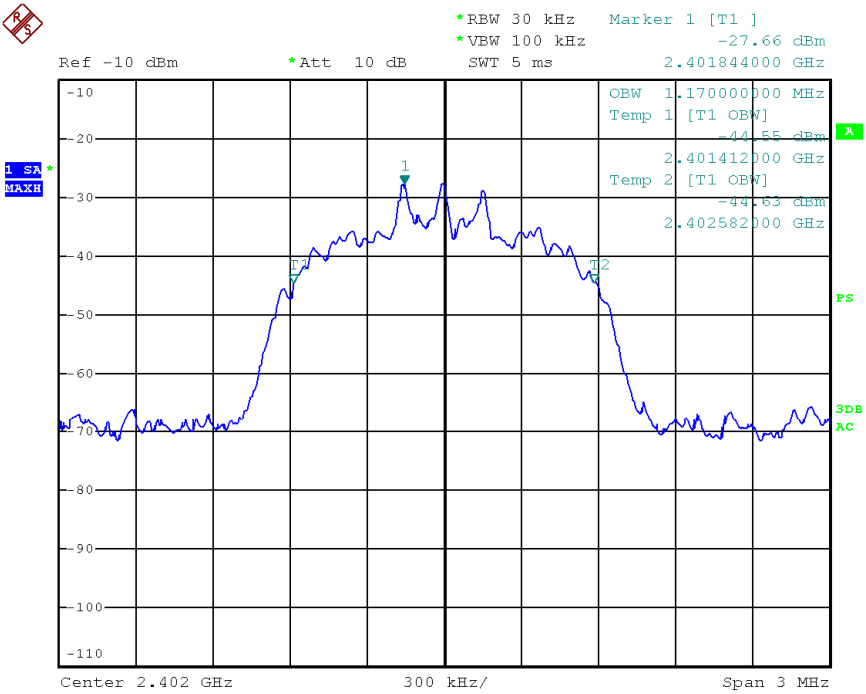

Channel M

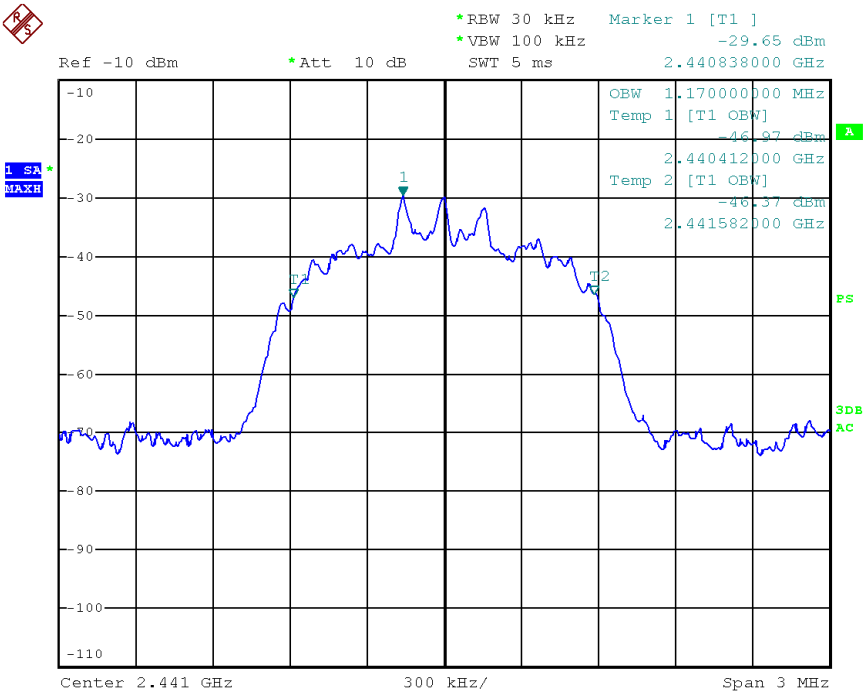
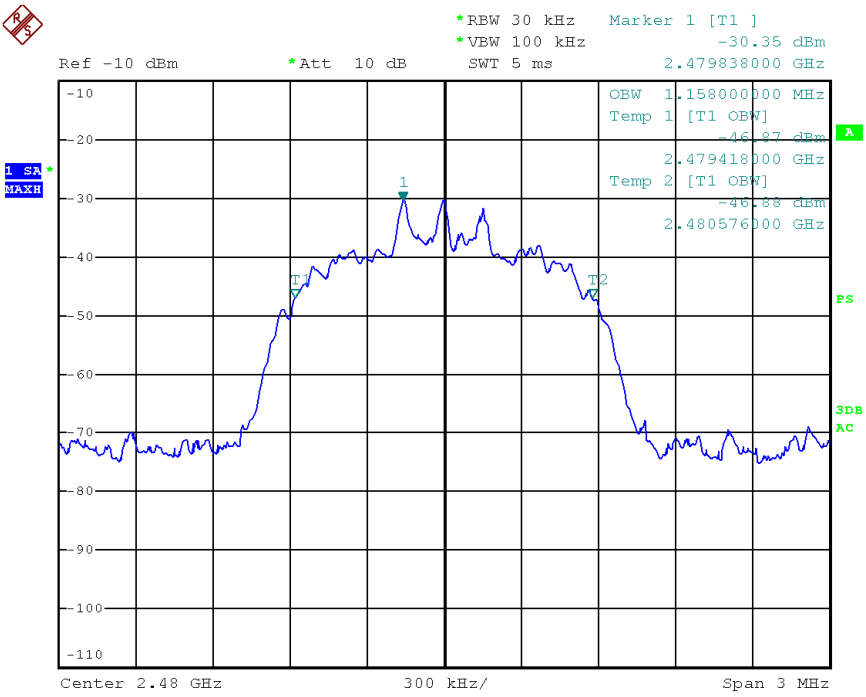
Channel H