



ARTWORK ONLY



SEE BARCODE DEFINITION

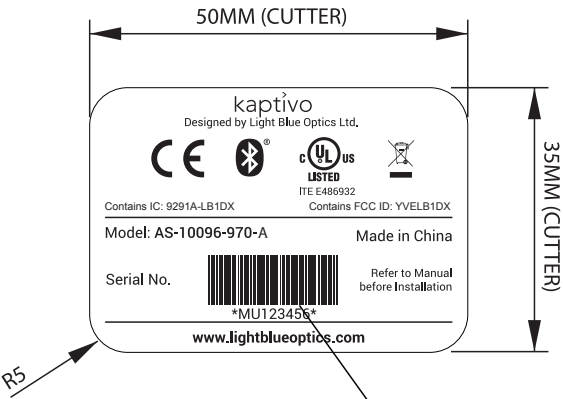

ASSEMBLY DETAIL
(SHOWN AT 1:2)

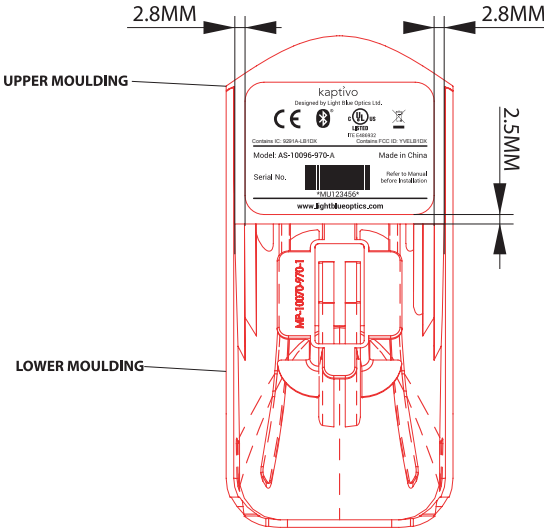

Barcode definition:
Barcode to be Code39 and be in the format MU123456 where MU denotes the Kaptivo Main Unit and 123456 is the sequential Serial Number starting from 000001 for the first order. Serial Numbers must NOT be duplicated.

Human readable version of Serial Number (excluding the Code39 start and finish asterisk (*) characters) to be printed centred under the barcode in <ROBOTO> <size=5.5pt>

NOTES:
Material: Avery (China) Fasson 72825T (50 micron)
Clear Coating: Fasson 25 micron clear: PET NTC/S333/BG50#WH
Adhesive: Suitable for adhesion to plastic, UL Approved
Liner: Backed with a suitable release liner.

Note: Label must be manufactured by a UL Approved Label Supplier and comply with all relevant UL Specifications and Requirements

GENERAL TOLERANCE	
DIM'N	TOL:
0 --> 6	0.08
7 --> 30	0.1
31 --> 120	0.2
121 --> 300	0.3
301 --> 600	0.4
601 --> 1200	0.5

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF ONENINEDESIGN ITS USE IS AUTHORISED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR ONENINEDESIGN OR RESPECTIVE CLIENTS, PLEASE CONTACT JENSON@ONENINEDESIGN.CO.UK

DRAWN IN 3RD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETRES SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH: ABOVE		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION 6	
						TITLE: ML-10054-970-6			
						DWG NO. MAIN UNIT REGULATORY LABEL			
						A4			
						SHEET 1 OF 1			

DRAWN	ST	SIGNATURE	DATE						
CHK'D	RB								
APPV'D									
MFG									
Q.A									
						MATERIAL: ABOVE			
						WEIGHT:			