



FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

ELECOM CO., LTD.

Wireless Receiver

Model No.: elecom10

FCC ID: YWO-ELECOM10

Prepared for : ELECOM CO., LTD.

1-1 fushimi machi, 4-chome chuoku, osaka, Japan
541-8765

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496


Report Number : ACS-F18042

Date of Test : Feb.02~11,2018

Date of Report : Mar.13,2018

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details	2-2
2.3. Channel list of EUT	2-2
2.4. Block Diagram of connection between EUT and simulators.....	2-2
2.5. Test Facility	2-3
2.6. Measurement Uncertainty (95% confidence levels, k=2)	2-3
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test	3-1
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup.....	4-2
4.3. Radiated Emission Limit Standard: FCC 15.209 and 15.249	4-3
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results	4-4
5. 20 DB BANDWIDTH TEST	5-1
5.1. Test Equipment	5-1
5.2. Limit.....	5-1
5.3. Test Results	5-1
6. BAND EDGE COMPLIANCE TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit.....	6-1
6.3. Test Produce	6-1
6.4. Test Results	6-1
7. ANTENNA REQUIREMENT	7-1
8. RADIO FRREQUENCY EXPOSURE COMPLIANCE.....	8-2
9. DEVIATION TO TEST SPECIFICATIONS.....	9-1
10. PHOTOGRAPH OF TEST	10-1
10.1. Photos of Power Line Conducted Emission Test.....	10-1
10.2. Photos of Radiated Emission Test.....	10-2
11. PHOTOGRAPH OF EUT	11-1



FCC ID: YWO-ELECOM10

TEST REPORT CERTIFICATION

Applicant : ELECOM CO., LTD.
Product : Wireless Receiver
FCC ID : YWO-ELECOM10
(A) Model No. : elecom10
(B) Serial No. : N/A
(C) Power Supply : DC 5V
(D) Test Voltage : DC 5V From Notebook Input AC 120V/60Hz

Tested for comply with:
FCC CFR 47 Part 15 Subpart C

Test procedure used:
ANSI C63.10:2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Feb.02~11,2018 Report of date: Mar.13,2018

Prepared by : Brave Zhang Reviewed by : Sunny Lu
Brave Zhang / Assistant Sunny Lu / Deputy Manager



Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15C: 15.207 ANSI C63.10-2013	PASS
Radiated Emission Test	FCC Part 15C: 15.209 FCC Part 15C: 15.249 ANSI C63.10-2013	PASS
Band Edge Compliance Test	FCC Part 15: 15.249 ANSI C63.10-2013	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10-2013	PASS
N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product	: Wireless Receiver
Model No.	: elecom10
FCC ID	: YWO-ELECOM10
Operation frequency	: 2404MHz-2477MHz
Antenna	: Internal Antenna, -2.268dBi
Modulation	: GFSK
Applicant	: ELECOM CO., LTD. 1-1 fushimi machi, 4-chome chuoku, osaka, Japan 541-8765
Manufacturer	: ELECOM CO., LTD. 1-1 fushimi machi, 4-chome chuoku, osaka, Japan 541-8765
Factory	: G.Tech Technology Ltd. No.8, Jinyuan 1st Road, High-tech Zone, Zhuhai City, Guangdong, China, 519085
USB Cable	: Shielded, Detachable, 1.5m
Date of Test	: Feb.02~11,2018
Date of Receipt	: Jan.30,2018
Sample Type	: Prototype production


2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	NVX7C
Power Adapter: Manufacturer: LITEON, Model: PA-1900-32 Input: 100-240V~, 1.5A, 50/60Hz Output: 19V----4.74A Power Cord: Unshielded, Detachable, 1.8m					

2.3. Channel list of EUT

Channel list	Frequency
1	2404MHz
2	2425MHz
3	2442MHz
4	2463MHz
5	2477MHz

2.4. Block Diagram of connection between EUT and simulators



(EUT: Wireless Receiver)

2.5. Test Facility

Site Description

Name of Firm

Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology
Park, Nanshan District, Shenzhen,
Guangdong, China

EMC Lab.

Certificated by Industry Canada
: Registration Number: IC 5183A-1
Valid Date: May.07,2020

Certificated by DAkkS, Germany
: Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021

Accredited by NVLAP, USA
: NVLAP Code: 200372-0
Valid Date: Mar.31, 2018

Certificated by FCC, USA
: Designation No: CN5022
Valid Date: Mar.31, 2018

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conducted emission test in No.2 Conduction	2.4dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	2.8dB(30~200MHz, Polarization: H)
	2.8dB(30~200MHz, Polarization: V)
	3.0dB(200M~1GHz, Polarization: H)
	3.0dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	5.8dB (1~6GHz, Distance: 3m)
	5.8dB (6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6 dB
Uncertainty for Conduction Spurious emission test	2.0 dB
Uncertainty for Output power test	0.8 dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	2# Shielding Room	AUDIX	N/A	N/A	Apr.17,17	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100843	Oct.14,17	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV4200	100041	Apr.22,17	1 Year
4.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	Apr.22,17	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.23,17	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.23,17	1 Year
7.	RF Cable	MIYAZAKI	3D-2W	No.1	Apr.22,17	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397224	Apr.22,17	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

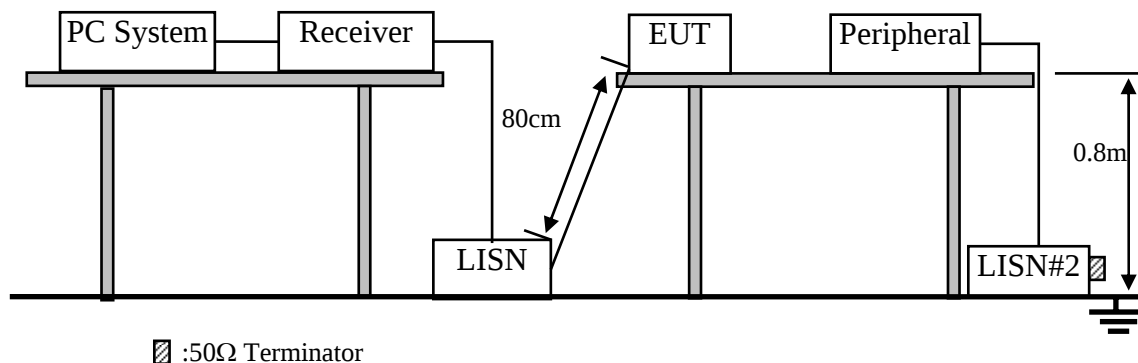

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Wireless Receiver (EUT)

Model Number : YWO-ELECOM10

Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

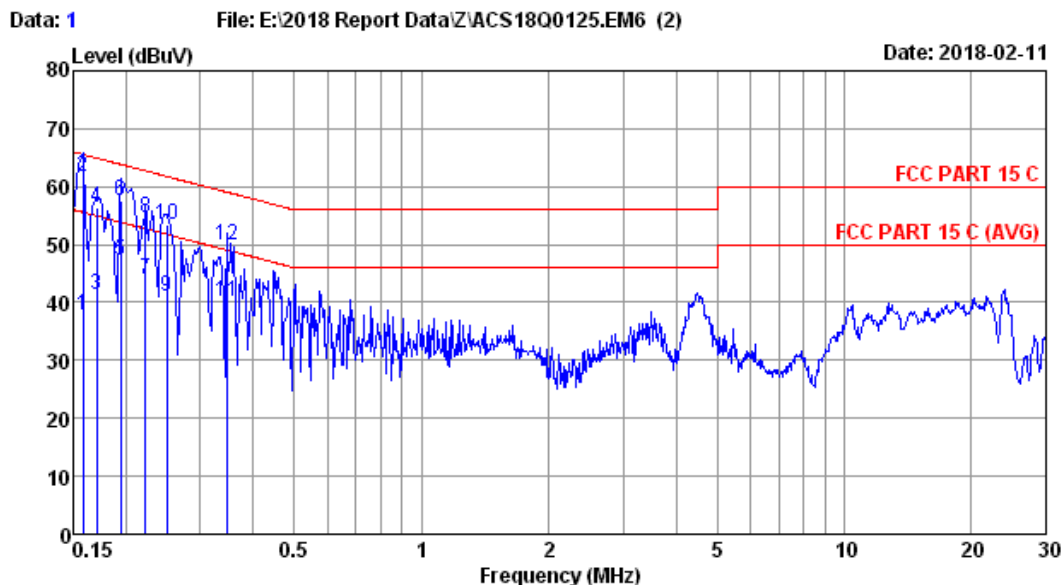

Site no :2# Conduction Data No :01
Dis./Lisn :17 ENV4200 L LISN phase:LINE
Limit :FCC PART 15 C
Env./Ins. :19.7°C/42% Engineer :kayle
EUT :Wireless Receiver M/N:elecom10
Power Rating :DC 5V From Notebook Input AC 120V/60Hz
Test Mode :TX Mode

No	Freq (MHz)	ISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.158	11.18	0.02	26.60	37.80	55.57	17.77	Average
2	0.158	11.18	0.02	50.60	61.80	65.57	3.77	QP
3	0.170	11.16	0.02	30.17	41.35	54.94	13.59	Average
4	0.170	11.16	0.02	45.13	56.31	64.94	8.63	QP
5	0.194	11.11	0.02	36.06	47.19	53.84	6.65	Average
6	0.194	11.11	0.02	46.39	57.52	63.84	6.32	QP
7	0.222	11.05	0.02	33.03	44.10	52.74	8.64	Average
8	0.222	11.05	0.02	43.63	54.70	62.74	8.04	QP
9	0.249	10.98	0.02	30.18	41.18	51.78	10.60	Average
10	0.249	10.98	0.02	42.30	53.30	61.78	8.48	QP
11	0.346	10.76	0.03	29.47	40.26	49.05	8.79	Average
12	0.346	10.76	0.03	39.03	49.82	59.05	9.23	QP

Remarks: 1.Emission Level=ISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

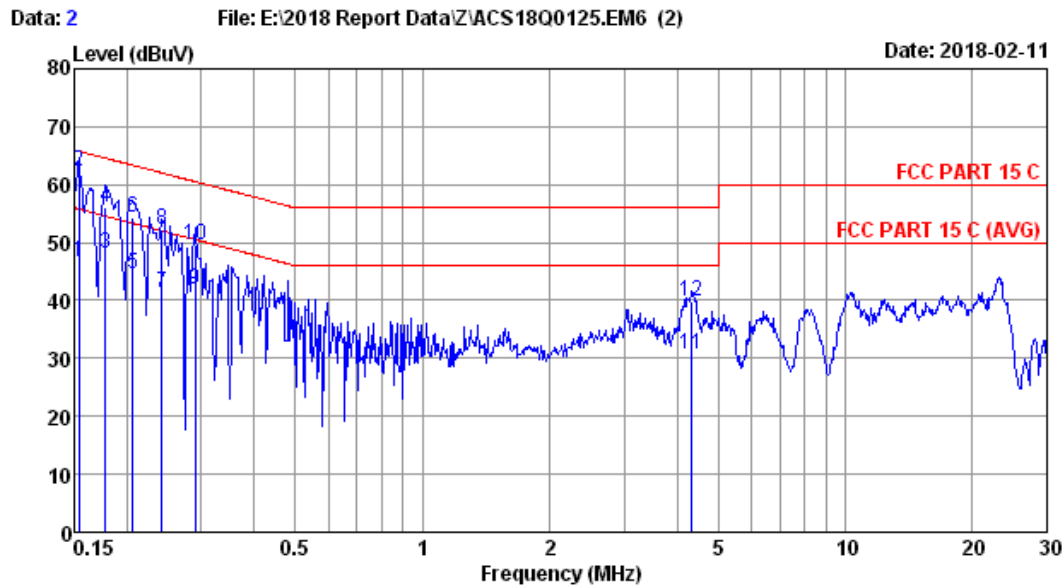

Site no :2# Conduction Data No :02
Dis./Lisn :17 ENV4200 N LISN phase:NEUTRAL
Limit :FCC PART 15 C
Env./Ins. :19.7°C/42% Engineer :kayle
EUT :Wireless Receiver M/N:elecom10
Power Rating :DC 5V From Notebook Input AC 120V/60Hz
Test Mode :TX Mode

No	Freq (MHz)	ISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	11.19	0.02	35.47	46.68	55.78	9.10	Average
2	0.154	11.19	0.02	51.07	62.28	65.78	3.50	QP
3	0.178	11.14	0.02	36.92	48.08	54.59	6.51	Average
4	0.178	11.14	0.02	44.80	55.96	64.59	8.63	QP
5	0.206	11.09	0.02	33.42	44.53	53.36	8.83	Average
6	0.206	11.09	0.02	43.25	54.36	63.36	9.00	QP
7	0.242	11.00	0.02	30.21	41.23	52.04	10.81	Average
8	0.242	11.00	0.02	41.09	52.11	62.04	9.93	QP
9	0.289	10.89	0.03	30.88	41.80	50.54	8.74	Average
10	0.289	10.89	0.03	38.57	49.49	60.54	11.05	QP
11	4.338	10.30	0.05	20.42	30.77	46.00	15.23	Average
12	4.338	10.30	0.05	29.40	39.75	56.00	16.25	QP

Remarks: 1.Emission Level=ISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,17	1 Year
2.	Spectrum Analyzer	Agilent	E7405A	MY45116588	Dec.19,17	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.22,17	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.22,17	1 Year
5.	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	493	Jun.27.17	1 Year
6.	Loop Antenna	Chase	HLA6120	1062	Oct.15,17	1 Year
7.	RF Cable	MIYAZAKI	CFD400NL-LW	No.3	Sep.02.17	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.22,17	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


Frequency range: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	May.17,17	1 Year
2.	Spectrum Analyzer	Agilent	E7405A	MY45116588	Dec.19,17	1 Year
3.	Horn Antenna	ETS	3115	9510-4580	Dec.01,17	1 Year
4.	Horn Antenna	ETS	3116	00060089	Dec.01,17	1 Year
5.	Amplifier	Agilent	83017A	MY53270084	Dec.19,17	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX106	505239/6	Apr.22,17	1 Year
7.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

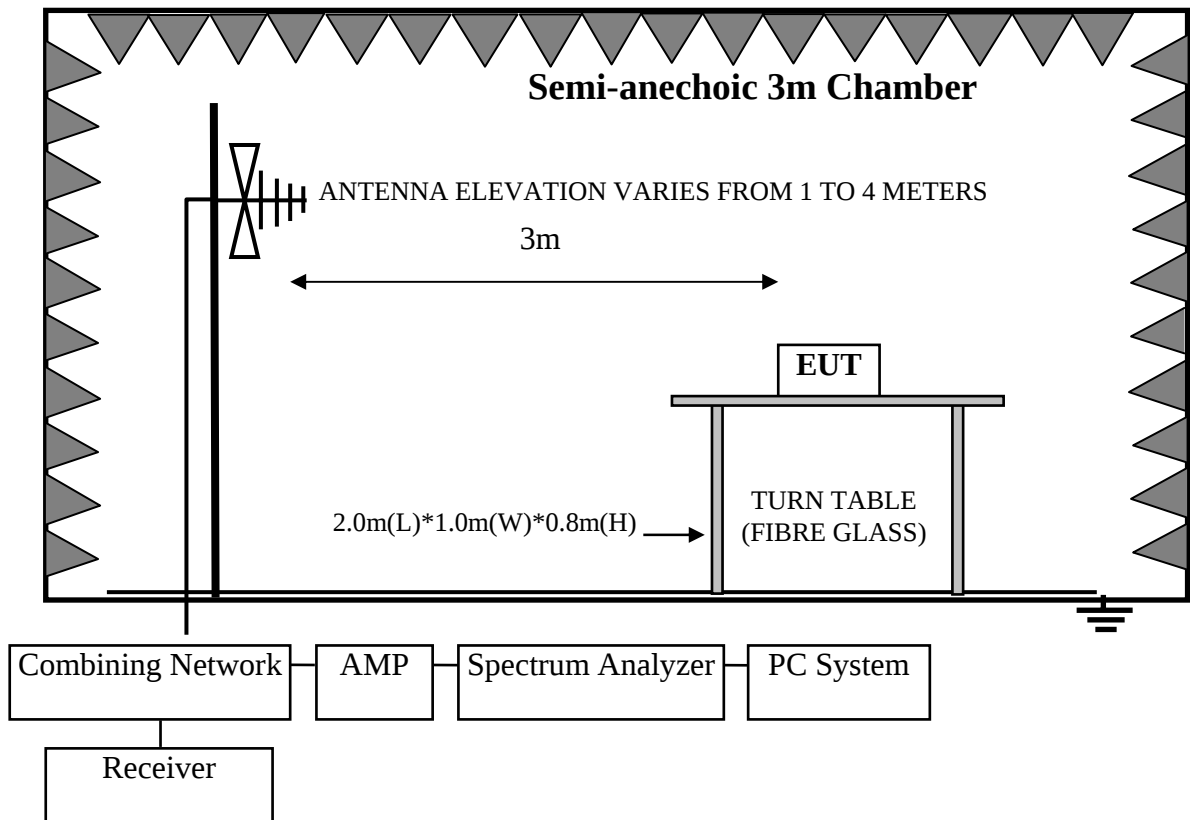

For frequency range above 1GHz

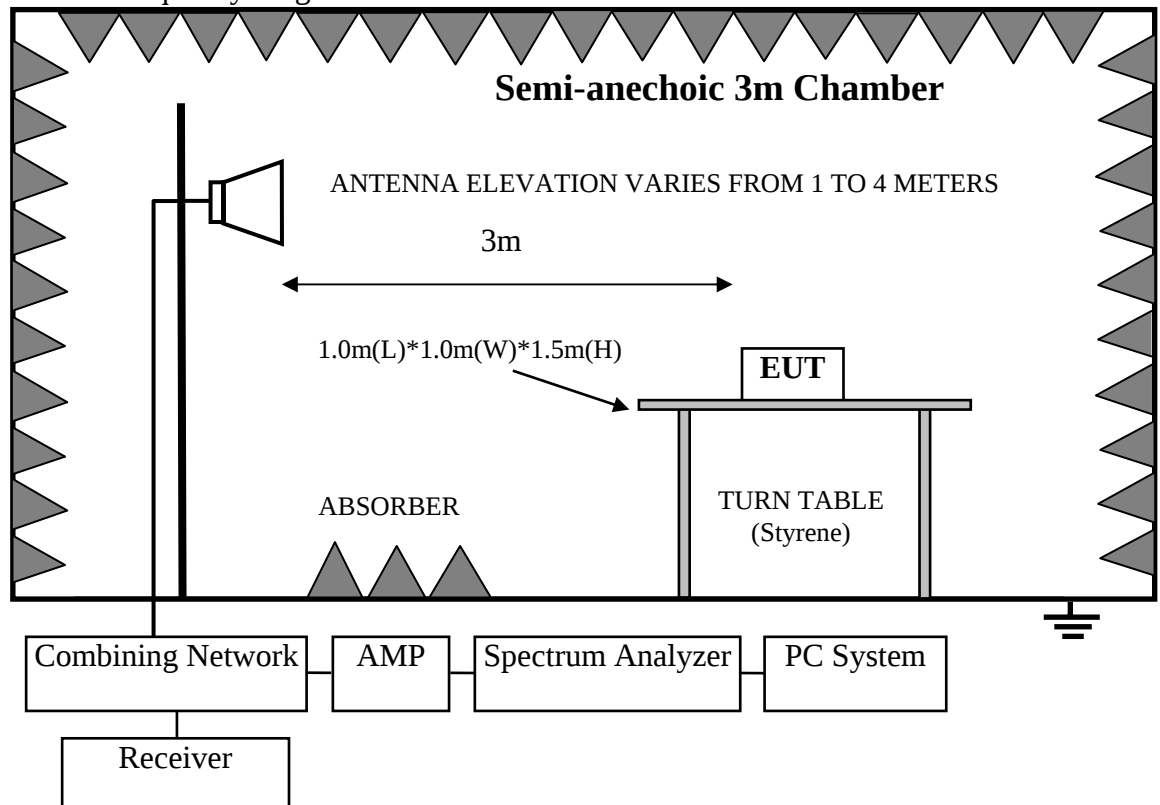

4.3. Radiated Emission Limit Standard: FCC 15.209 and 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Field Strength of fundamental emissions for 2.4GHz-2.4835GHz	3	114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.5.Operating Condition of EUT

- 4.5.1.Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2.Turn on the power of all equipments.
- 4.5.3.Let EUT work in Tx mode.

4.6.Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test setup photos.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) is checked. And no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results



PASS.


All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note 1: The duty cycle factor for calculate average level is -15.519dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle factor = $20\log(\text{duty cycle}) = -15.519\text{dB}$

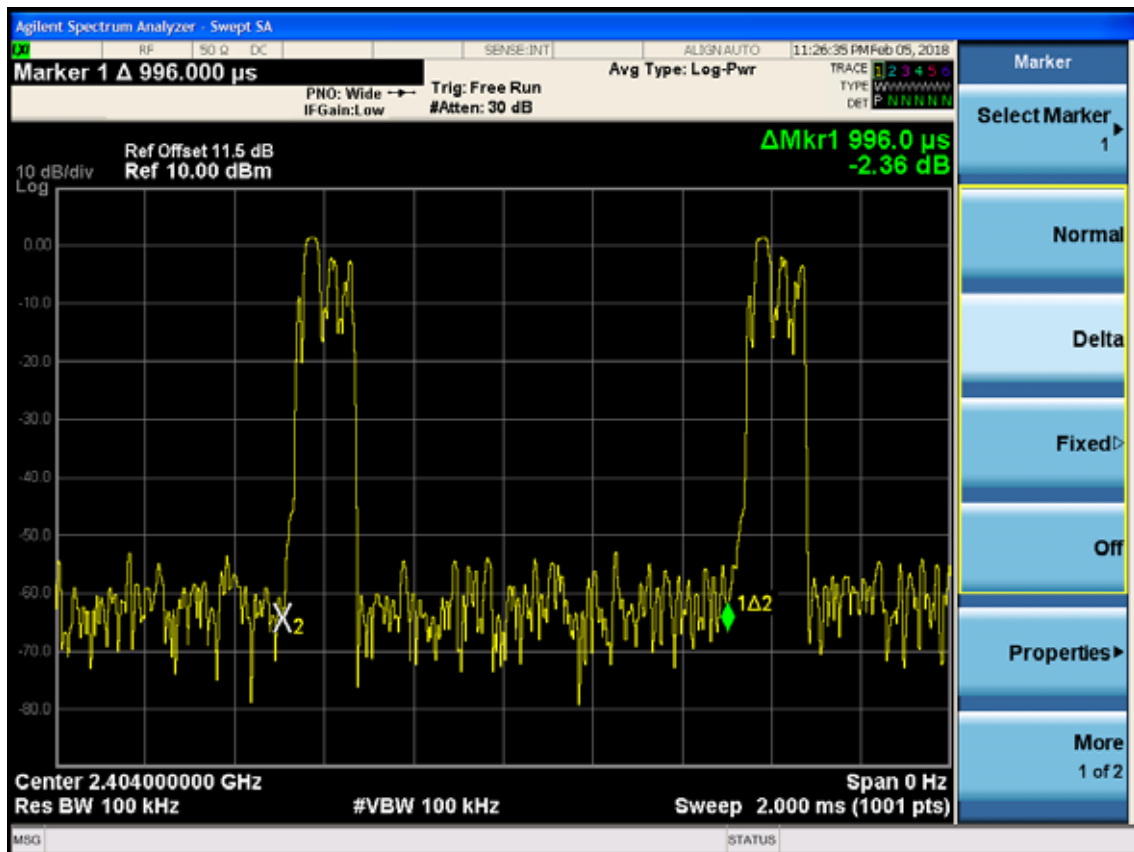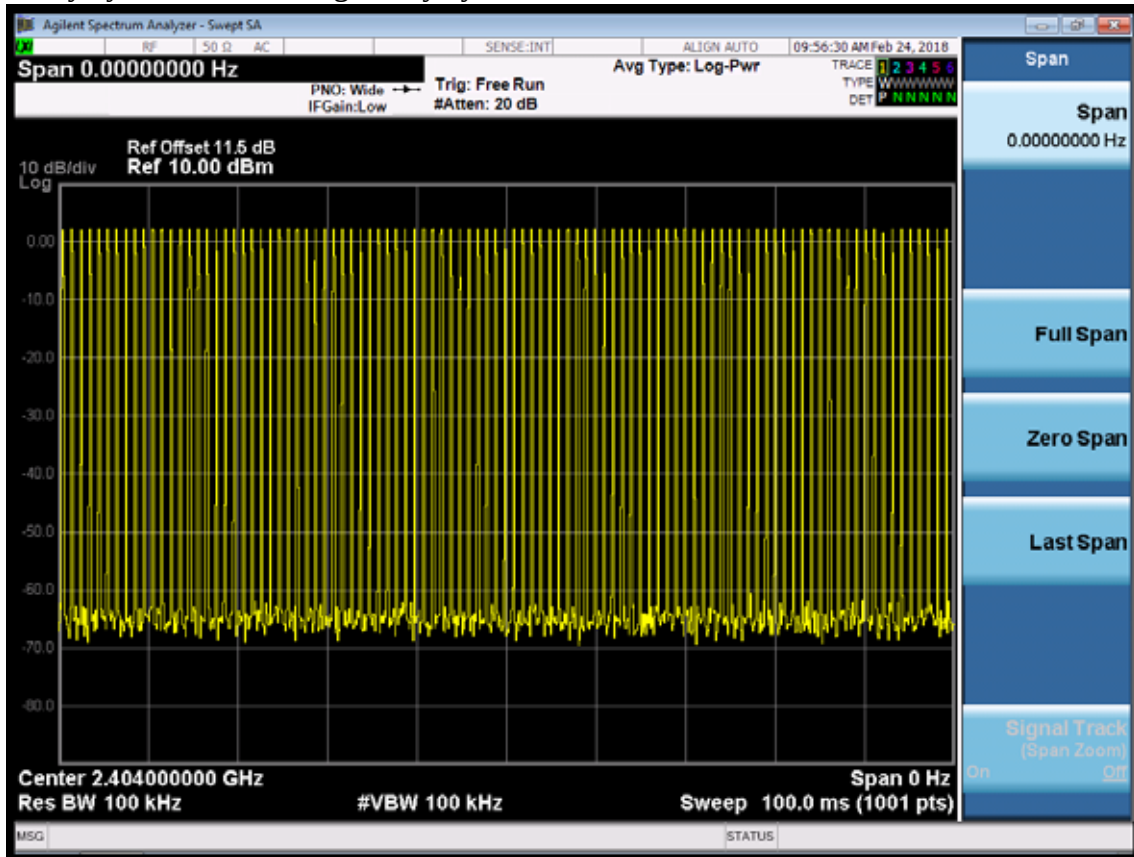

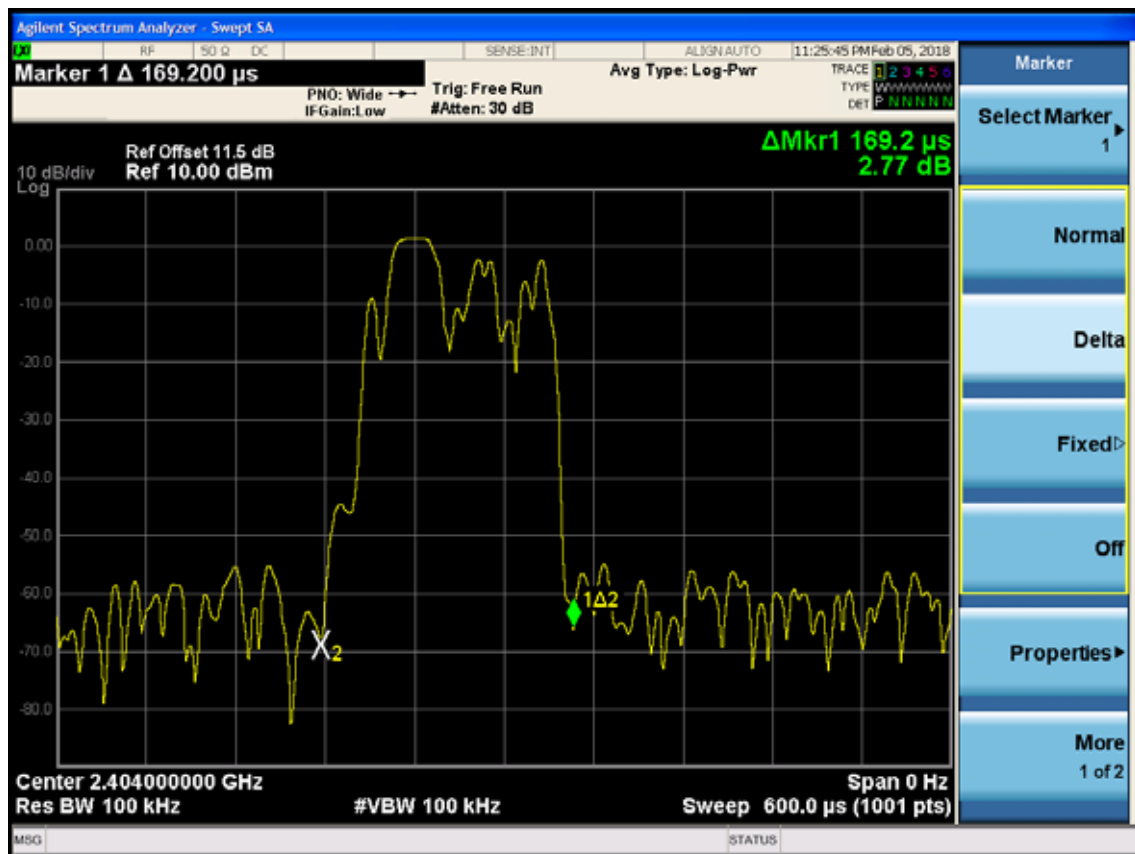


Frequency: 30MHz~1GHz

Data: 5

File: E:\2018 Test Data\Z\ZHDI\ACS18Q0124-RF-2.4G.EM6 (6)


Date: 2018-02-02

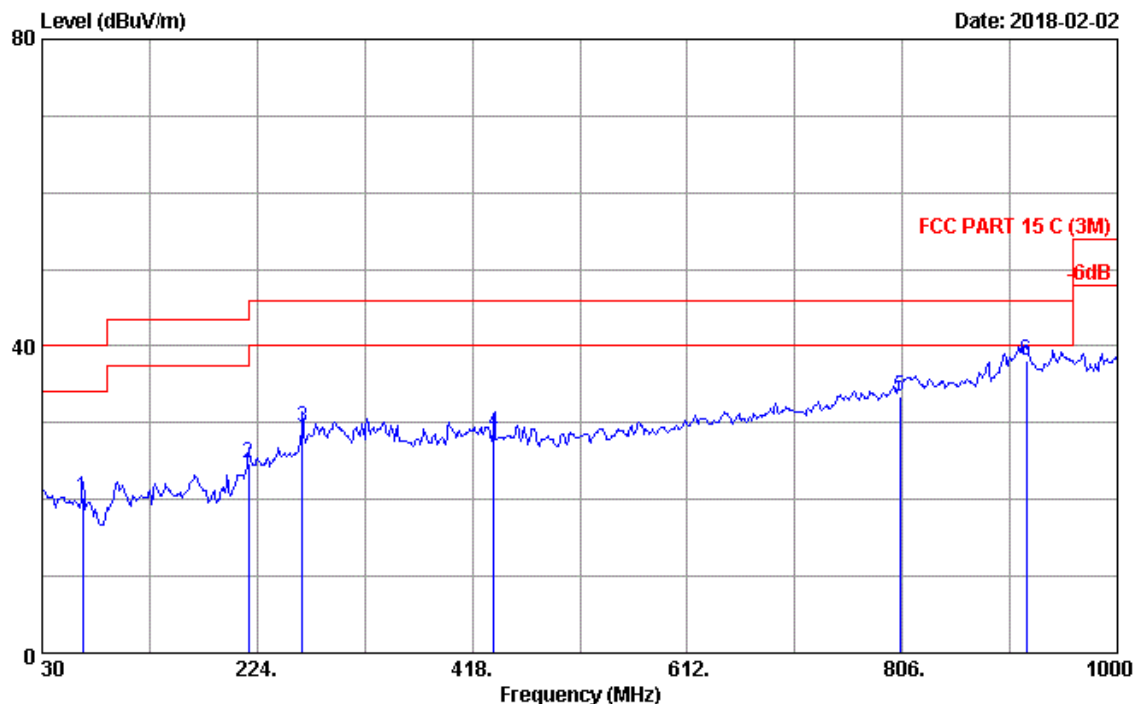

Site no. : 3m Chamber Data no. : 5
Dis. / Ant. : 3m 2017 9168-493 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 23.6°C/52% Engineer : Kayle
EUT : Wireless Receiver M/N:elecom10
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : 2.4g TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	66.860	18.17	0.90	1.24	20.31	40.00	19.69	QP
2	216.240	16.90	1.74	6.08	24.72	46.00	21.28	QP
3	264.740	18.81	2.03	8.65	29.49	46.00	16.51	QP
4	437.400	22.91	3.00	2.82	28.73	46.00	17.27	QP
5	804.060	28.44	4.53	0.50	33.47	46.00	12.53	QP
6	917.550	29.66	5.16	3.25	38.07	46.00	7.93	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

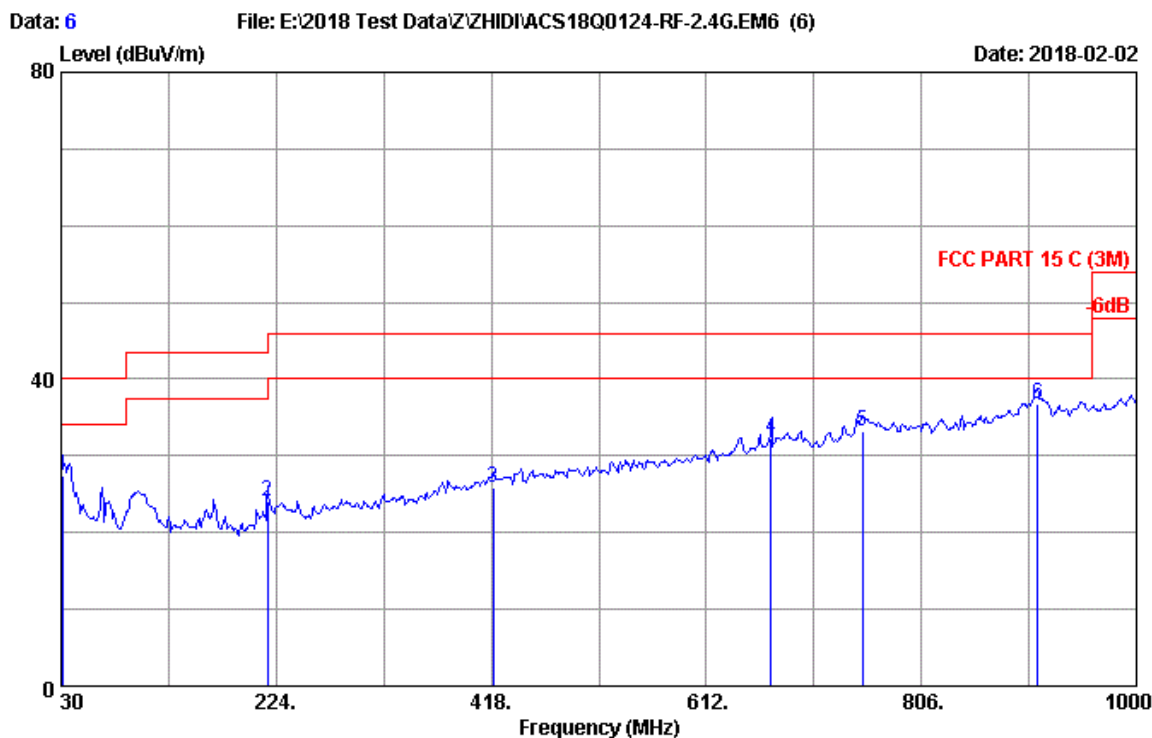

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 9168-493 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.6°C/52% Engineer : Kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2.4g TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	19.52	0.64	7.35	27.51	40.00	12.49	QP
2	216.240	16.90	1.74	5.38	24.02	46.00	21.98	QP
3	419.940	22.58	2.95	0.36	25.89	46.00	20.11	QP
4	670.200	26.81	4.00	1.57	32.38	46.00	13.62	QP
5	752.650	27.83	4.33	0.97	33.13	46.00	12.87	QP
6	910.760	29.60	5.14	1.95	36.69	46.00	9.31	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz


Data: 1

File: F:\2018 Report\Z\ZHIDI\ACS18Q0125-FCC-2.4G.EM6 (12)

Date: 2018-02-07

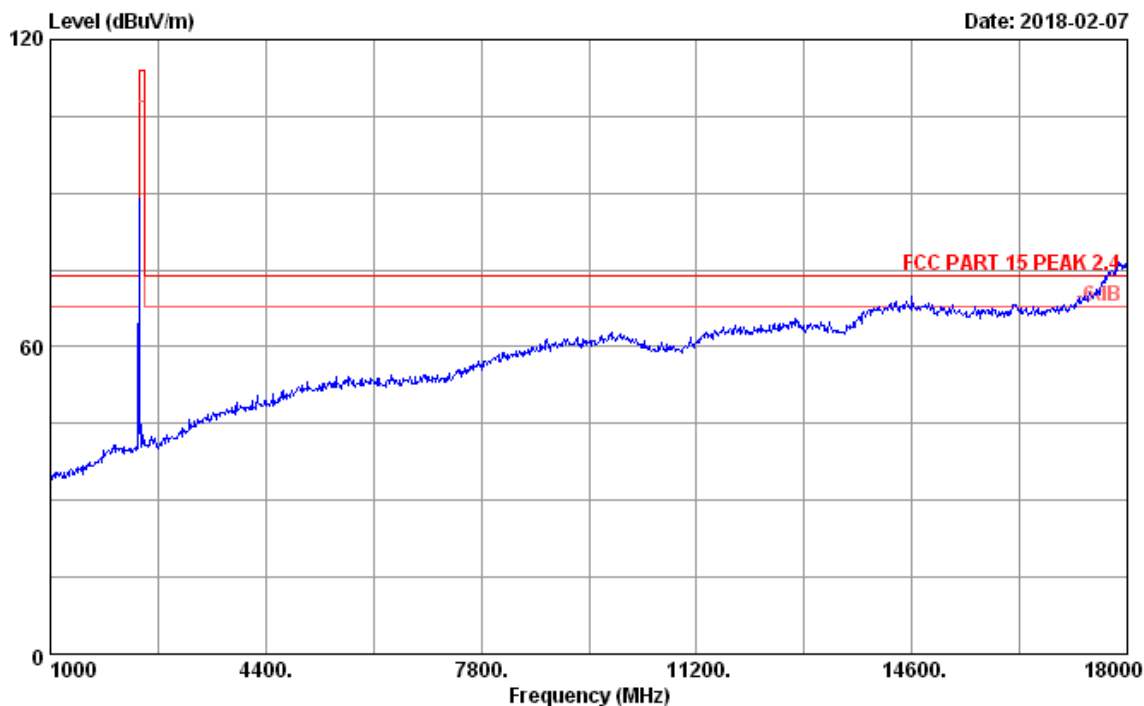

Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 22.6°C/57%	Engineer	: kayle
EUT	: Wireless Receiver M/N:elecom10		
Power rating	: DC 5V From Notebook Input AC 120V/60Hz		
Test Mode	: 2404MHz Tx Mode		

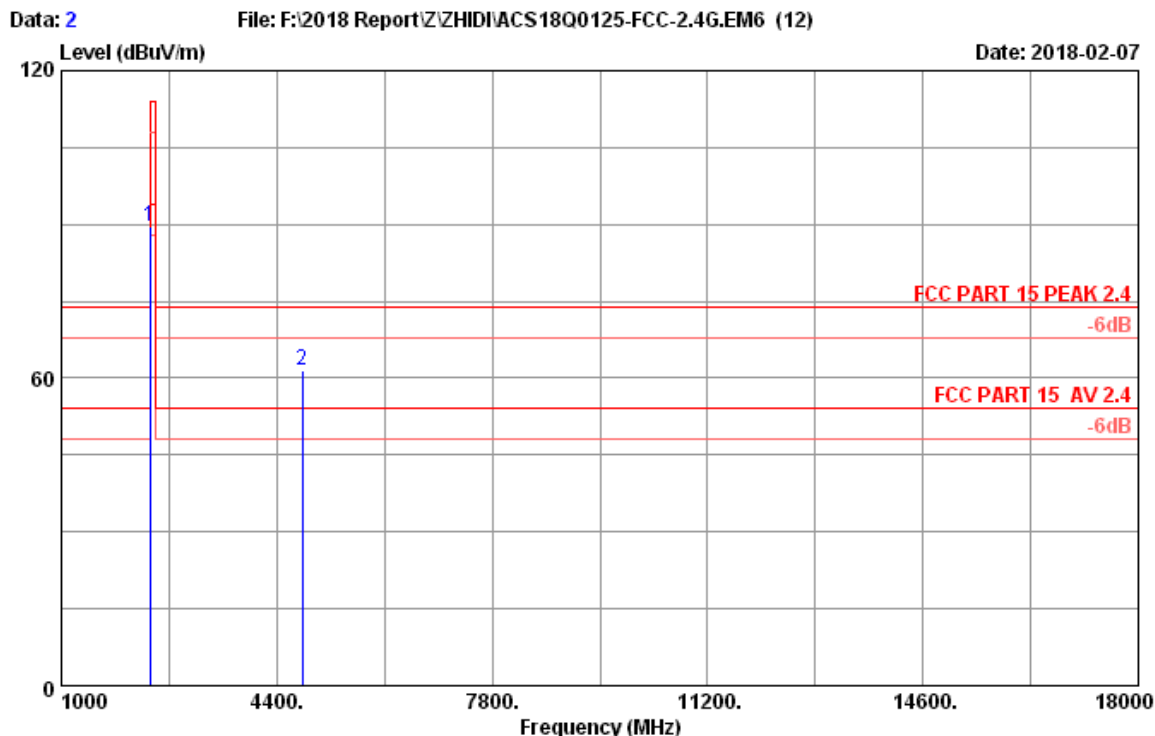


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2404MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2404.00	27.87	10.30	35.61	87.18	89.74	114.00	24.26	Peak
2	4808.00	32.62	14.52	33.82	48.15	61.47	74.00	12.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4808	61.47	-15.519	45.951	54	Pass

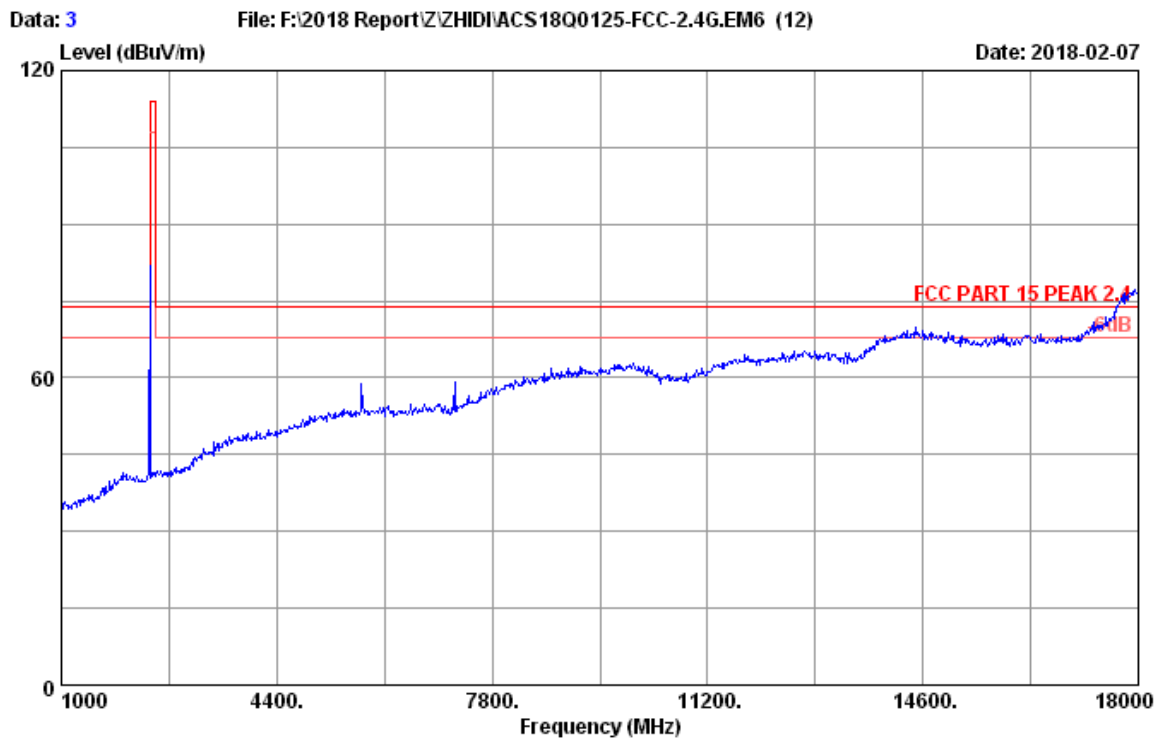

Site no. :	3m Chamber	Data no. :	3
Dis. / Ant. :	3m 2017 3115(4580)	Ant. pol. :	VERTICAL
Limit :	FCC PART 15 PEAK 2.4		
Env. / Ins. :	22.6°C/57%	Engineer :	kayle
EUT :	Wireless Receiver M/N:elecom10		
Power rating :	DC 5V From Notebook Input AC 120V/60Hz		
Test Mode :	2404MHz Tx Mode		

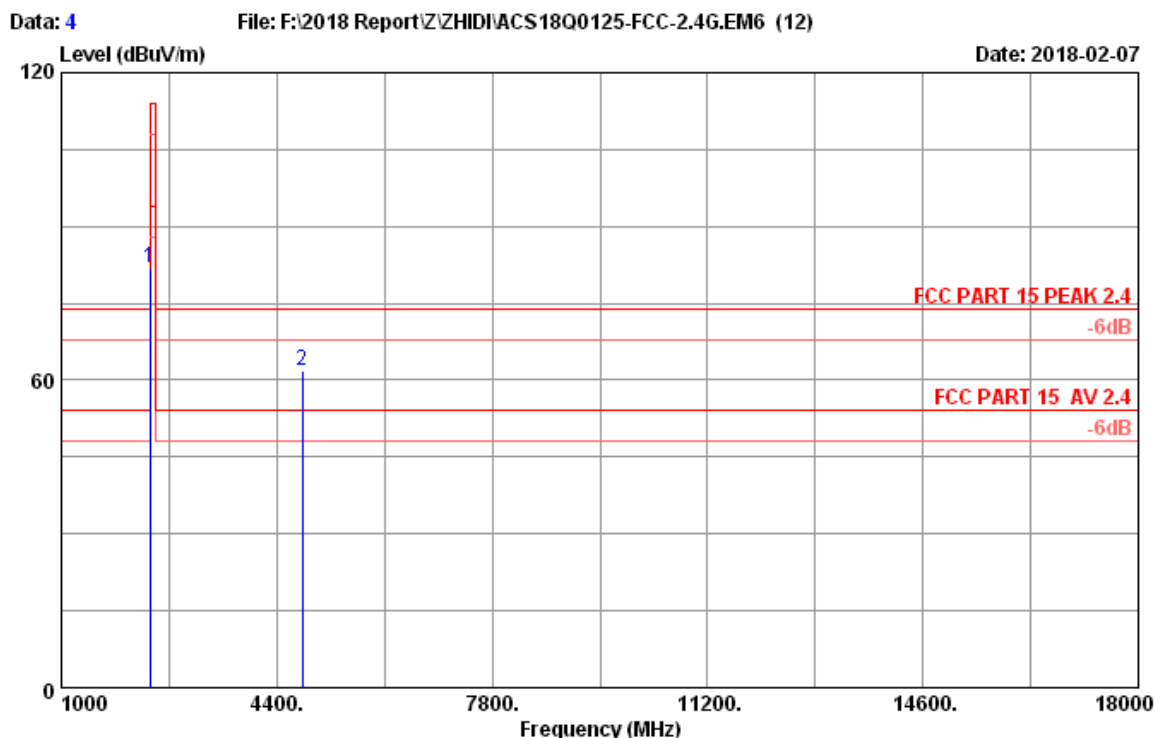


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2404MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2404.00	27.87	10.30	35.61	79.43	81.99	114.00	32.01	Peak
2	4808.00	32.62	14.52	33.82	48.56	61.88	74.00	12.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4808	61.88	-15.519	46.361	54	Pass

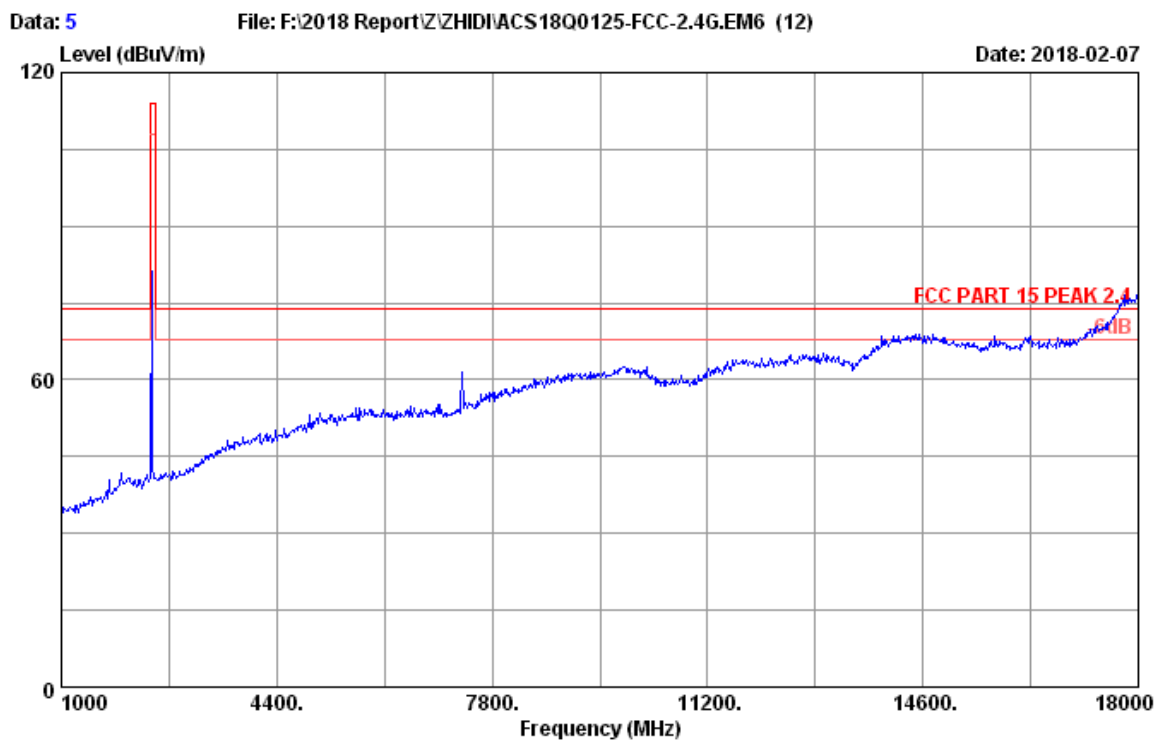

Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 22.6°C/57%	Engineer	: kayle
EUT	: Wireless Receiver M/N:elecom10		
Power rating	: DC 5V From Notebook Input AC 120V/60Hz		
Test Mode	: 2442MHz Tx Mode		

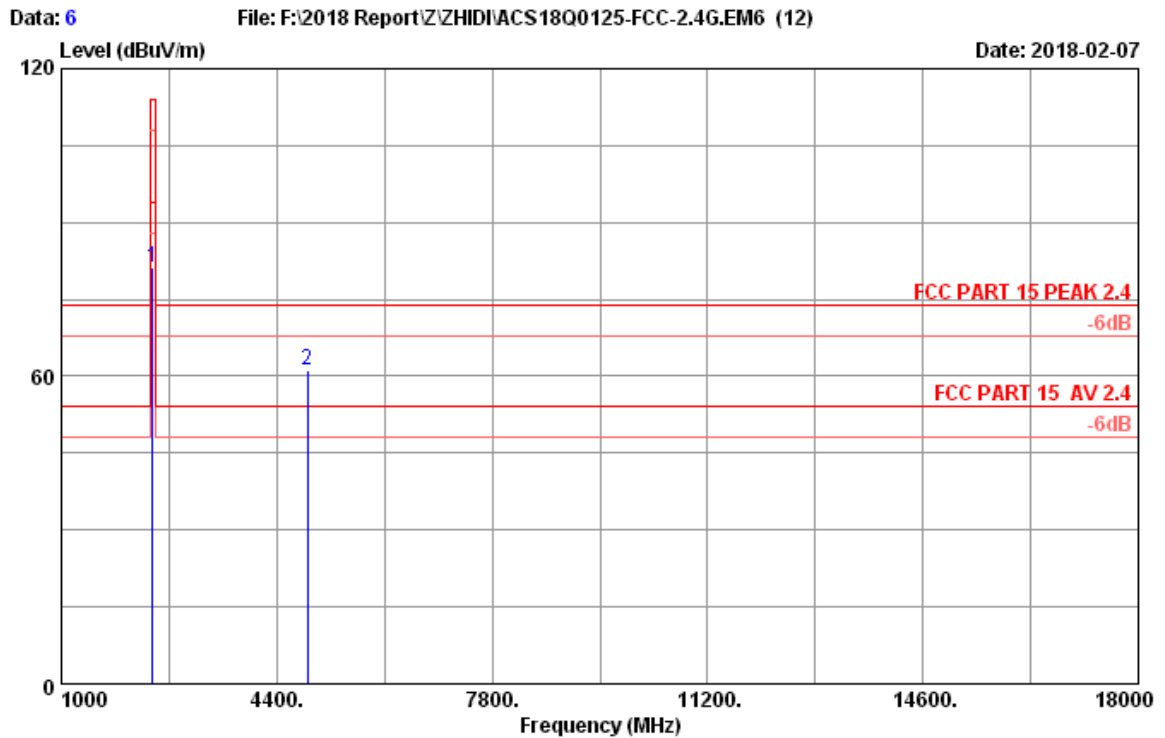


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2442MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	28.04	10.37	35.68	78.58	81.31	114.00	32.69	Peak
2	4884.00	32.76	14.62	33.75	47.63	61.26	74.00	12.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4884	61.26	-15.519	45.741	54	Pass

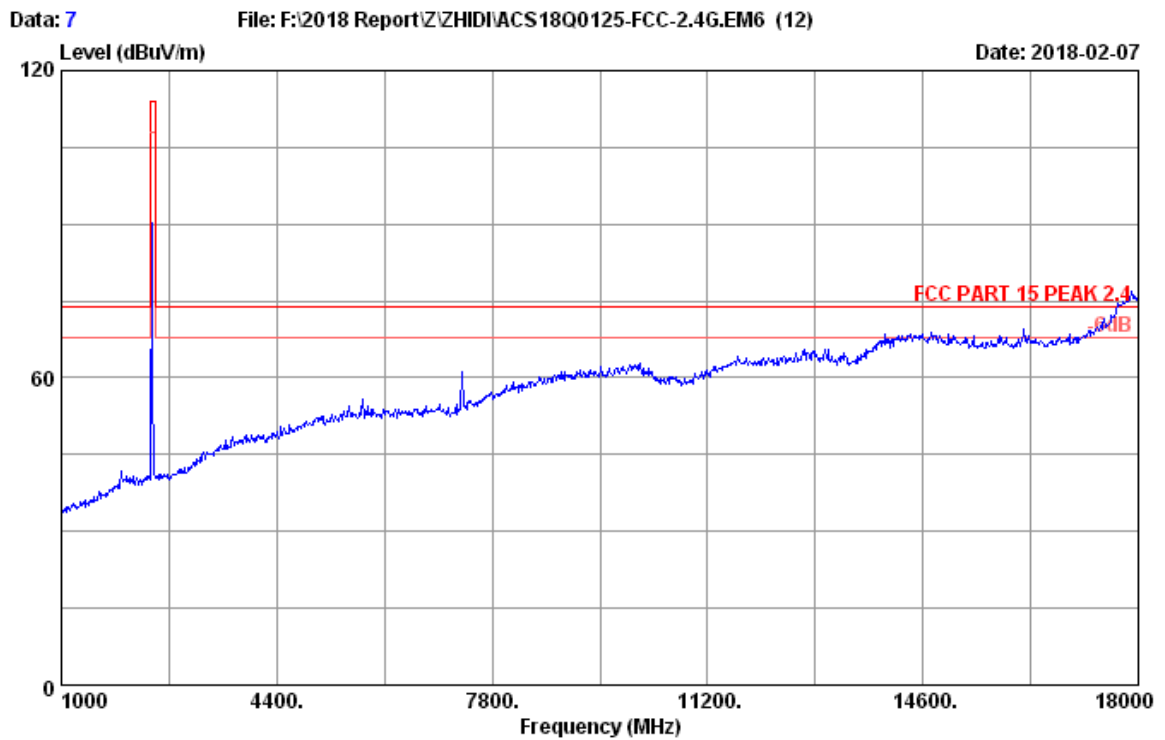

Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 22.6°C/57%	Engineer	: kayle
EUT	: Wireless Receiver M/N:elecom10		
Power rating	: DC 5V From Notebook Input AC 120V/60Hz		
Test Mode	: 2442MHz Tx Mode		

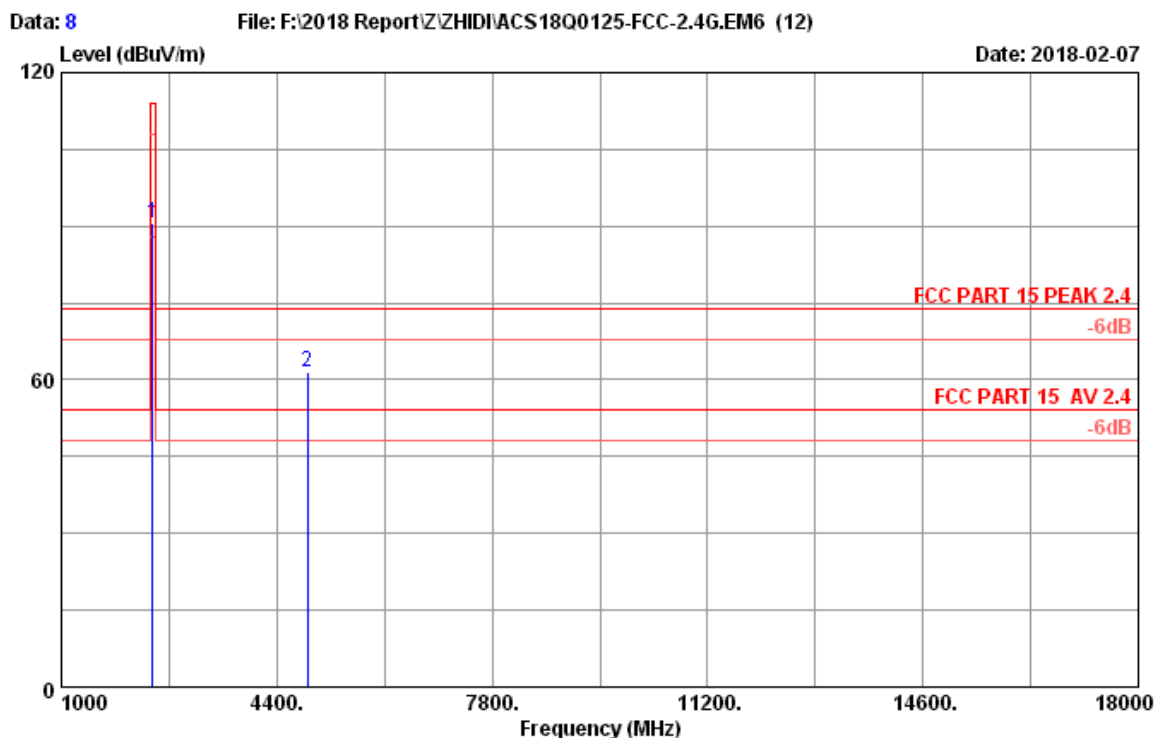


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2442MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	28.04	10.37	35.68	87.81	90.54	114.00	23.46	Peak
2	4884.00	32.76	14.62	33.75	47.86	61.49	74.00	12.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4884	61.49	-15.519	45.971	54	Pass

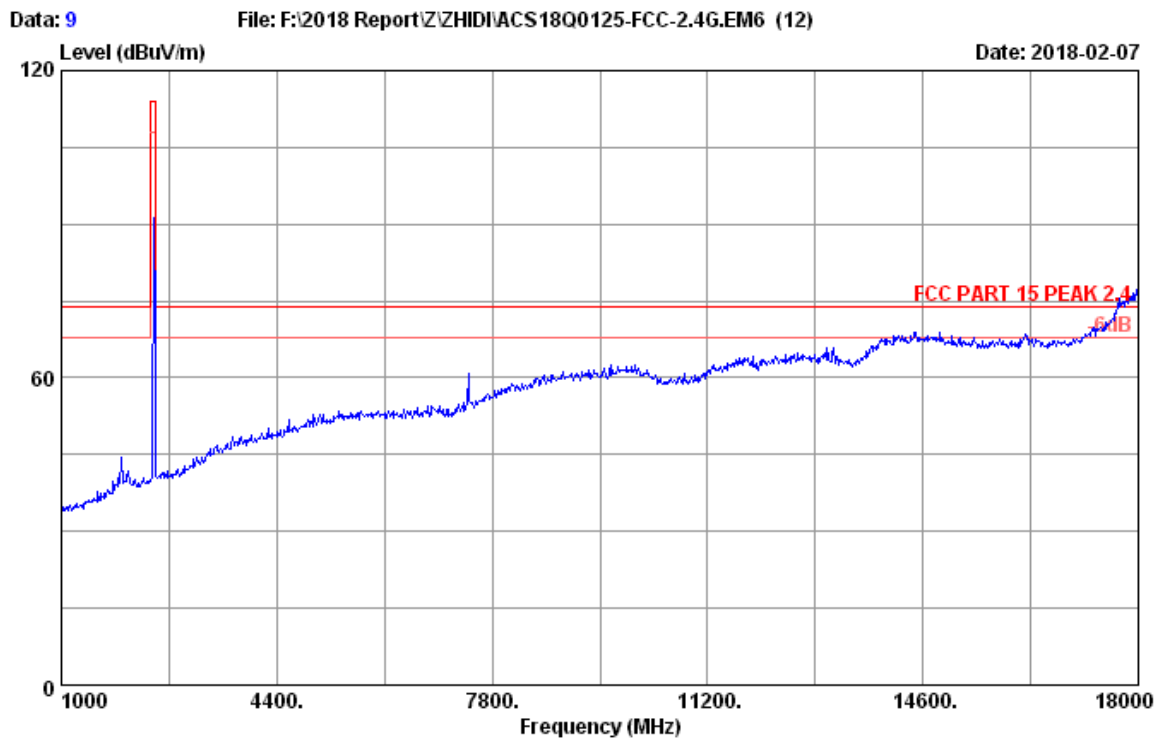

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 22.6°C/57%	Engineer	: kayle
EUT	: Wireless Receiver M/N:elecom10		
Power rating	: DC 5V From Notebook Input AC 120V/60Hz		
Test Mode	: 2477MHz Tx Mode		

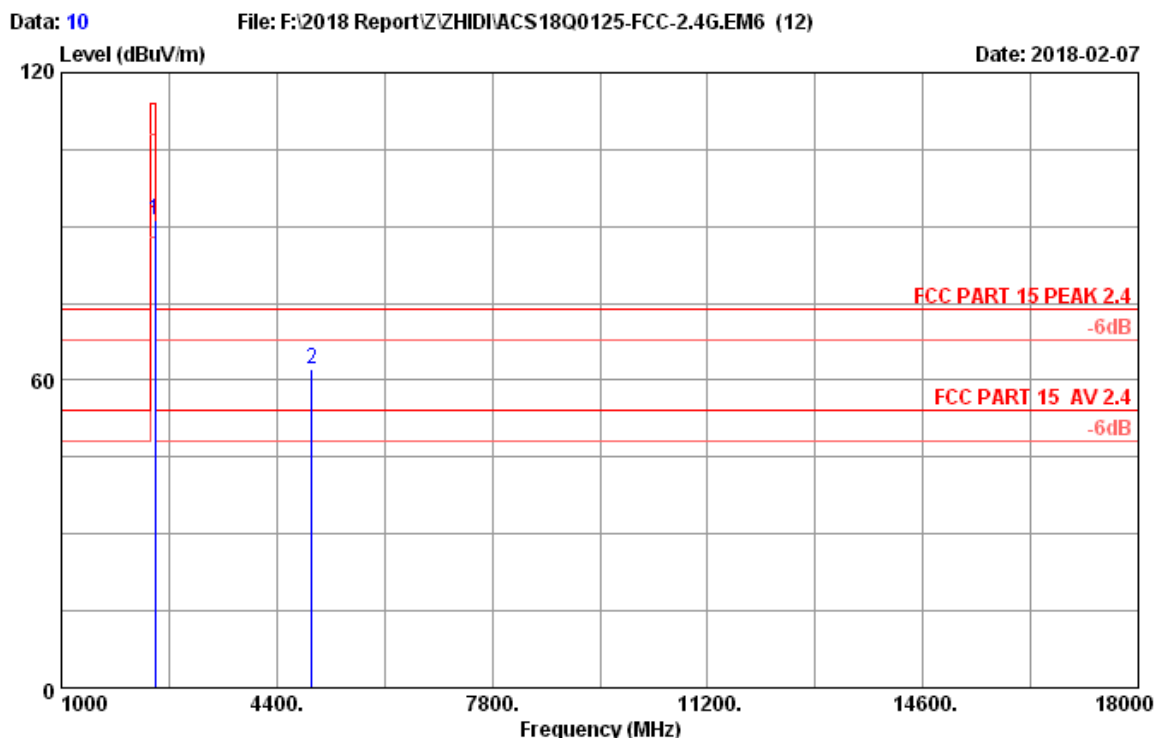


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2477MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.00	28.21	10.45	35.71	88.34	91.29	114.00	22.71	Peak
2	4954.00	32.93	14.73	33.69	48.29	62.26	74.00	11.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4954	62.26	-15.519	46.741	54	Pass

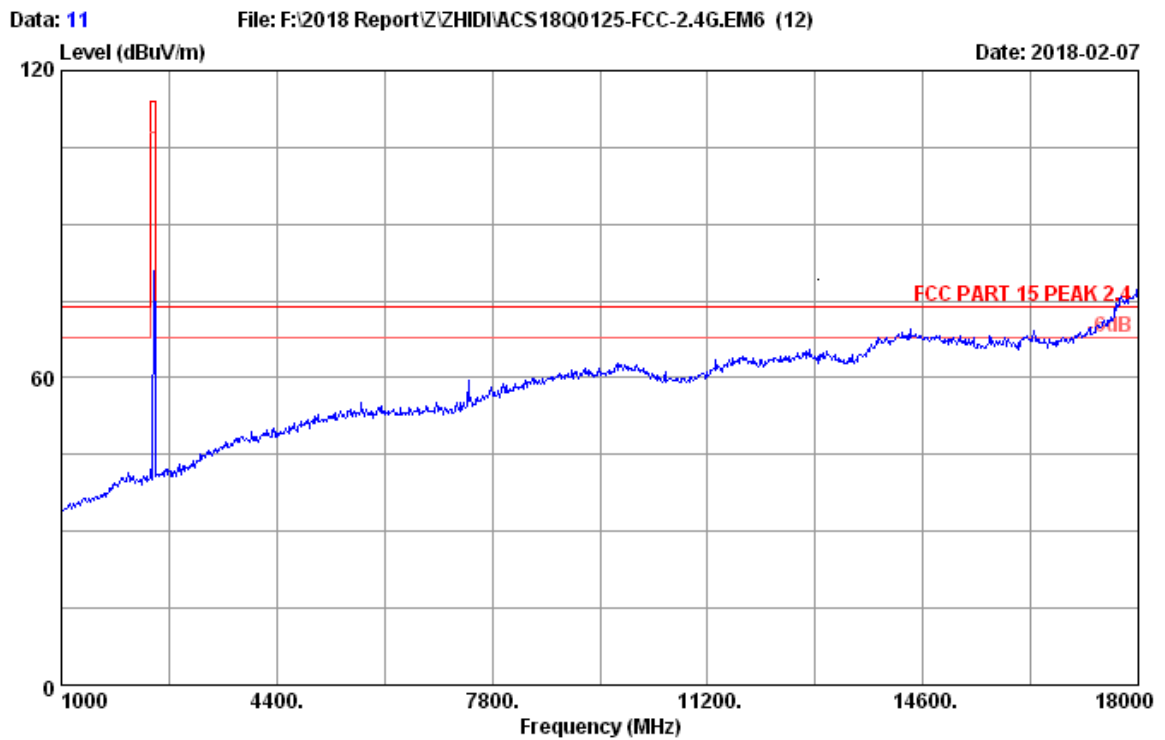

Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 22.6°C/57%	Engineer	: kayle
EUT	: Wireless Receiver M/N:elecom10		
Power rating	: DC 5V From Notebook Input AC 120V/60Hz		
Test Mode	: 2477MHz Tx Mode		

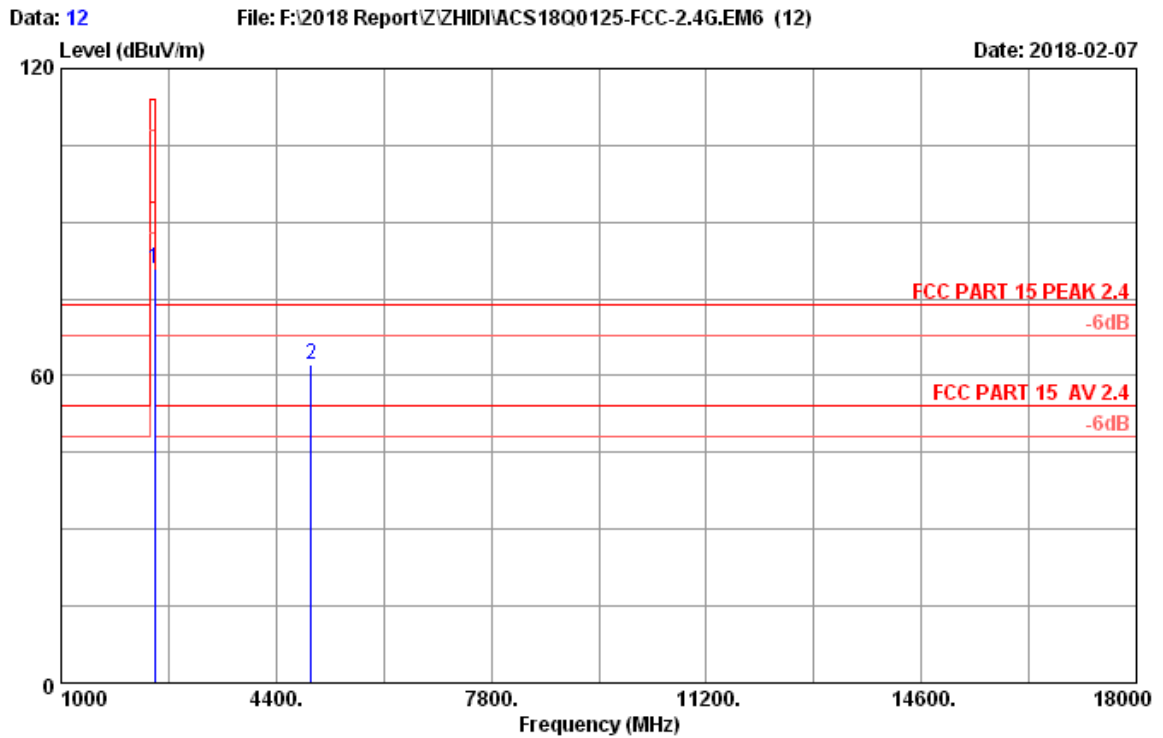

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.00	28.21	10.45	35.71	77.95	80.90	114.00	33.10	Peak
2	4954.00	32.93	14.73	33.69	48.34	62.31	74.00	11.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4954	62.31	-15.519	46.791	54	Pass

5. 20 DB BANDWIDTH TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.14,17	1Year
2.	Attenuator(20dB)	Agilent	8491B	MY39262165	Oct.14,17	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,17	1 Year

5.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test Results


EUT: Wireless Receiver		
M/N: elecom10		
Test date: 2018-02-05	Pressure: 103.2±1.0 kpa	Humidity: 53.1±3.0%
Tested by: Kayle	Test site: RF site	Temperature:23.6±0.6 °C

Voltage (V)	Frequency (MHz)	-20dB bandwidth (MHz)	Limit (KHz)
DC 5V	2404	1.722	N/A
	2442	1.420	N/A
	2477	1.102	N/A
Conclusion : PASS			


Test Frequency: 2404MHz



Test Frequency: 2442MHz

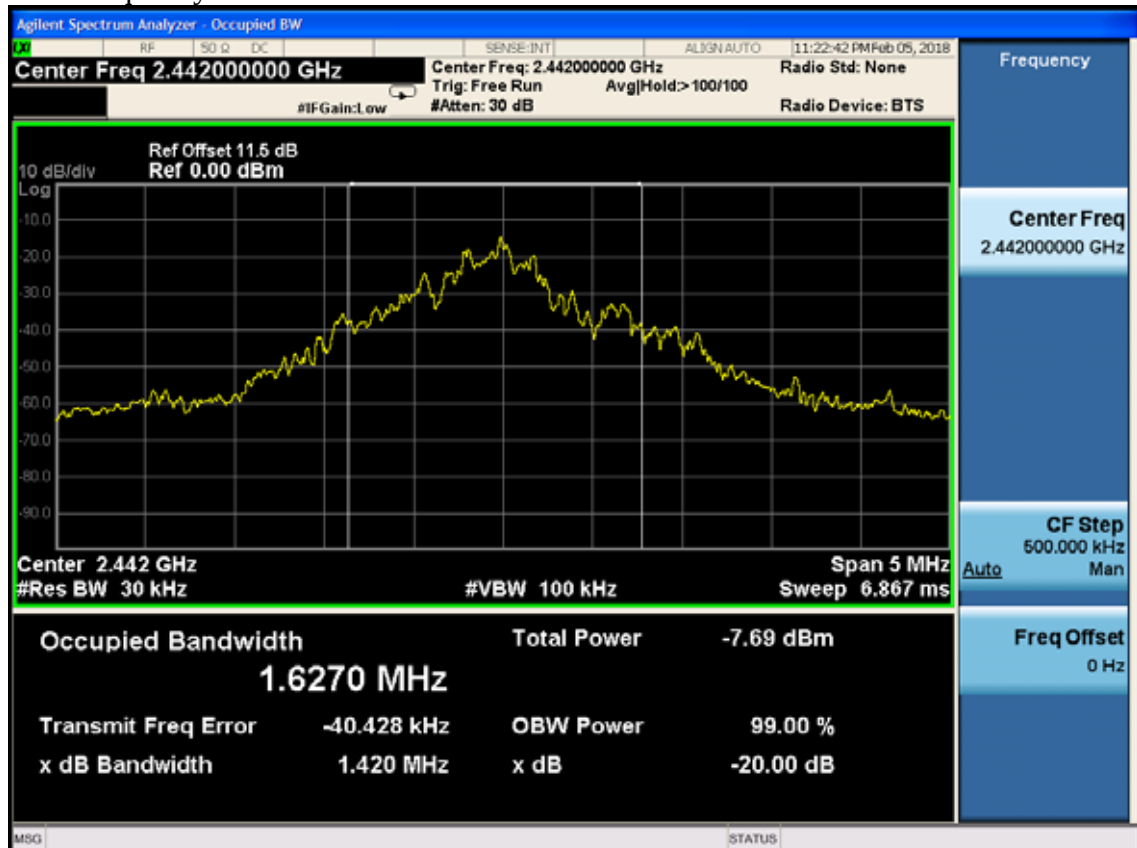

Test Frequency: 2477MHz

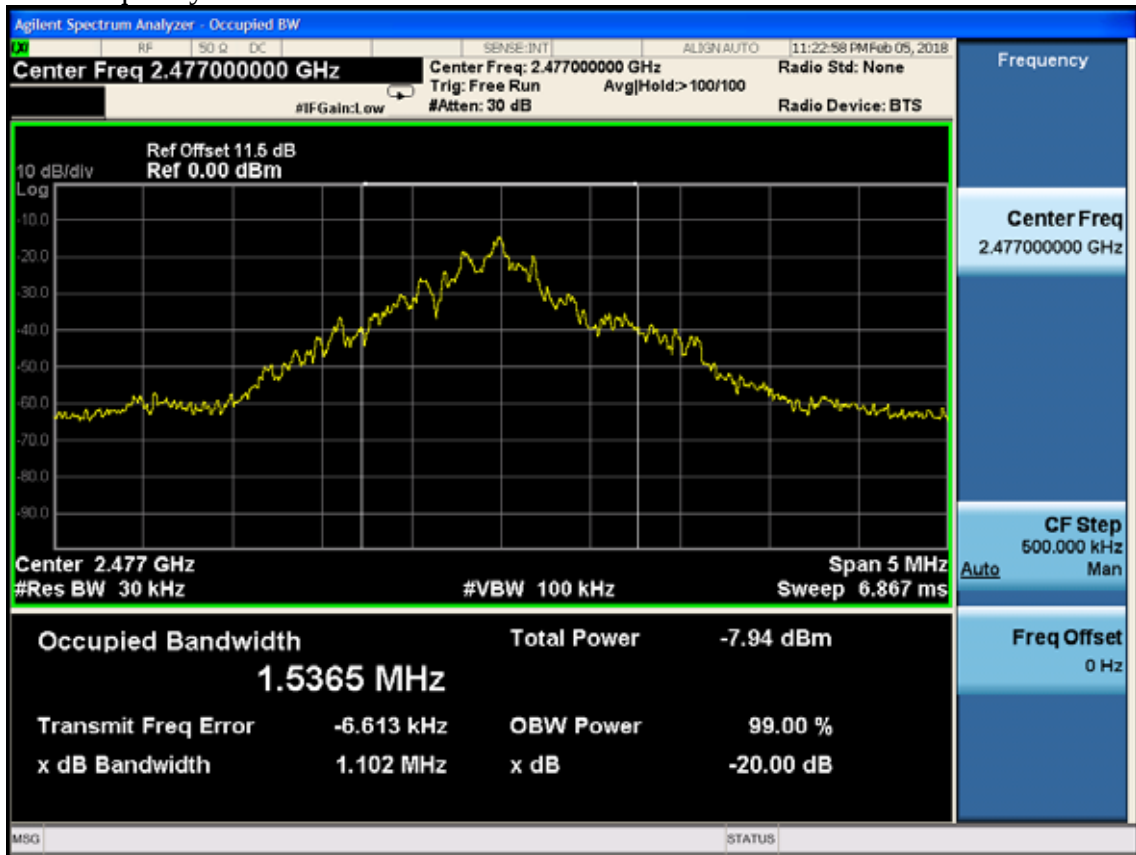

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Amp	HP	8449B	3008A02495	Apr.22.17	1 Year
2.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Mar.15,17	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX1 04	274094&4+28 610&2	Apr.22,17	1 Year

6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 50dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Produce


1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level

6.4. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Note: The duty cycle factor for calculate average level is -15.519dB, and average limit is 50dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

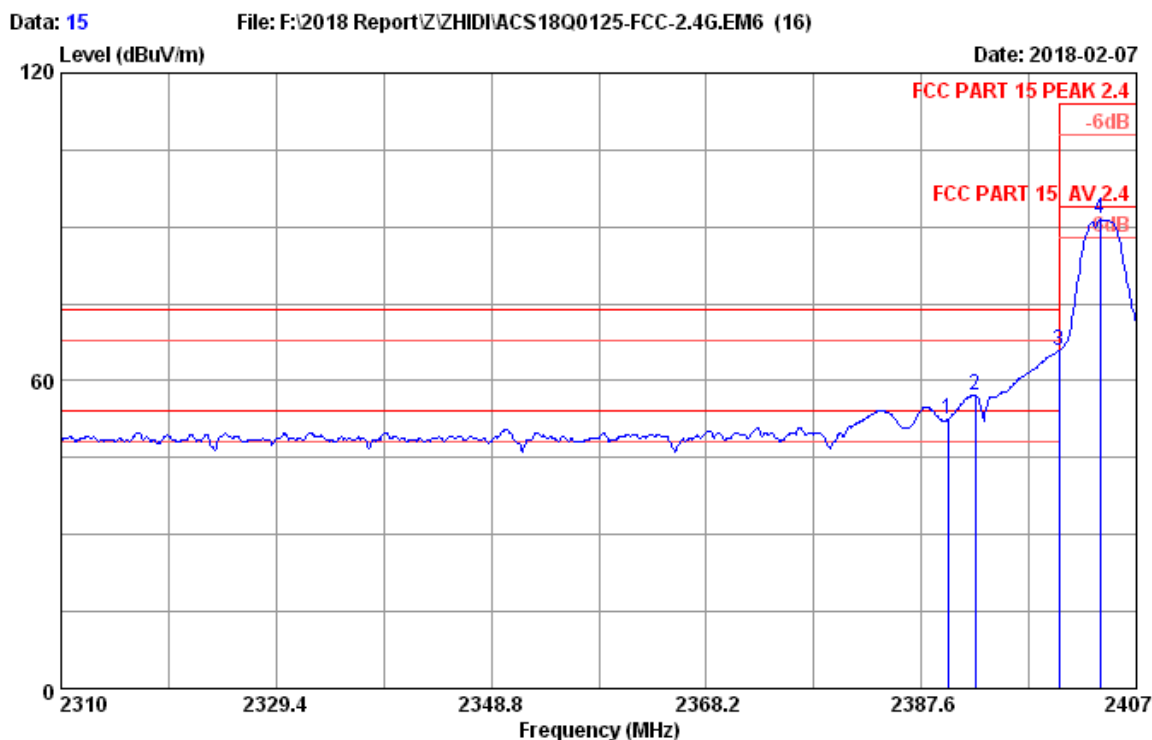


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2404MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.79	10.26	35.61	50.05	52.49	74.00	21.51	Peak
2	2392.45	27.79	10.26	35.61	54.77	57.21	74.00	16.79	Peak
3	2400.00	27.79	10.30	35.61	63.35	65.83	74.00	8.17	Peak
4	2403.70	27.87	10.30	35.61	88.86	91.42	114.00	22.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2392.45	57.21	-15.519	41.691	54	Pass
2400.00	65.83	-15.519	50.311	54	Pass

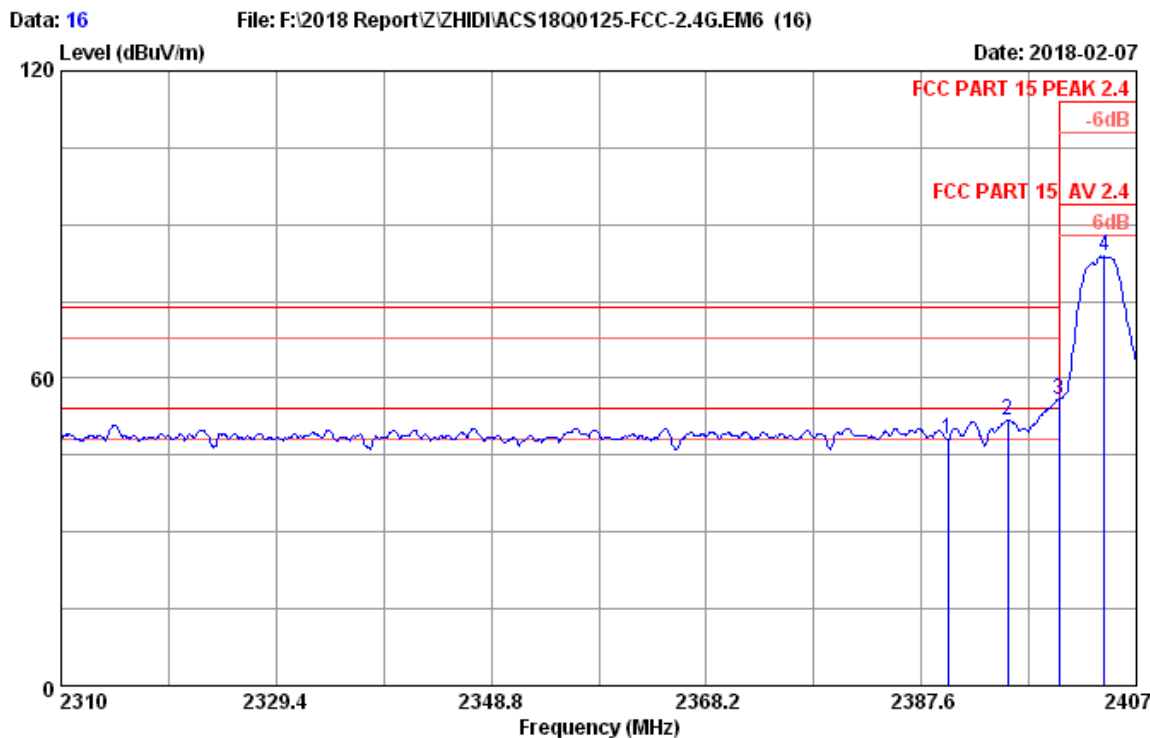


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2404MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.79	10.26	35.61	45.82	48.26	74.00	25.74	Peak
2	2395.36	27.79	10.30	35.61	49.27	51.75	74.00	22.25	Peak
3	2400.00	27.79	10.30	35.61	53.46	55.94	74.00	18.06	Peak
4	2404.09	27.87	10.30	35.61	81.22	83.78	114.00	30.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2400.00	55.94	-15.519	40.421	54	Pass

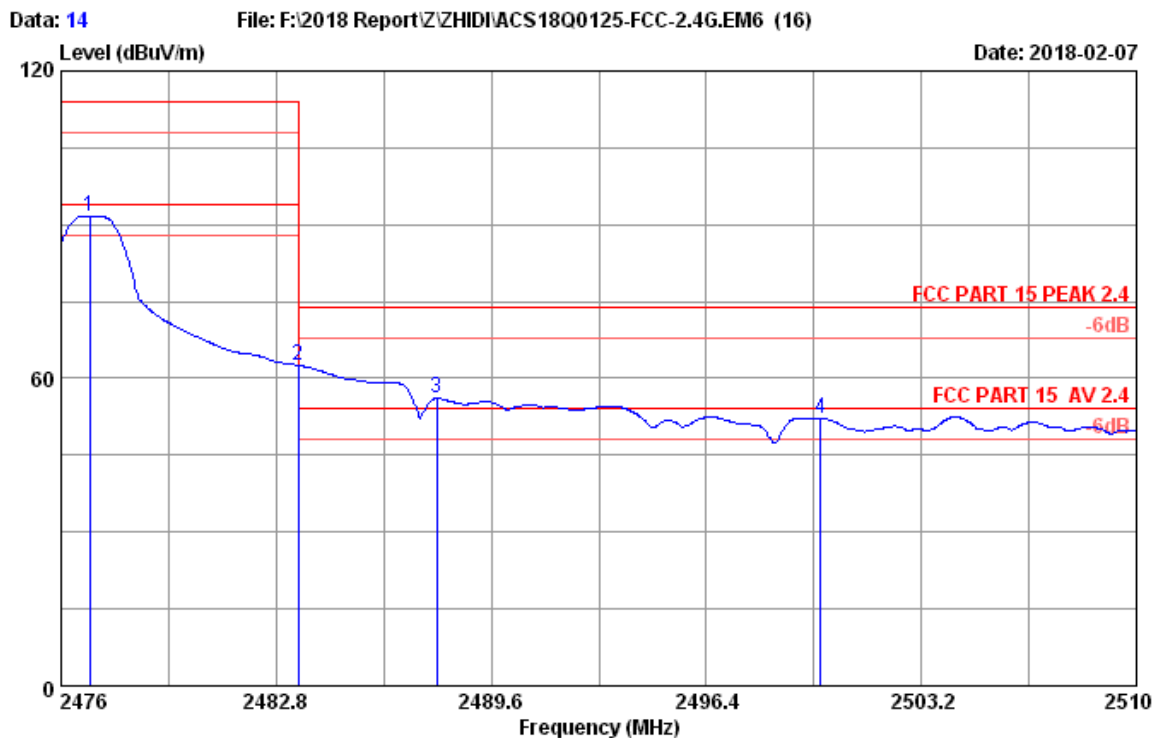


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2476.92	28.21	10.45	35.71	88.70	91.65	114.00	22.35	Peak
2	2483.50	28.21	10.48	35.71	59.56	62.54	74.00	11.46	Peak
3	2487.87	28.30	10.48	35.71	53.04	56.11	74.00	17.89	Peak
4	2500.00	28.30	10.48	35.74	49.21	52.25	74.00	21.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBUV/m)	Duty cycle factor (dB)	AV level (dBUV/m)	Limit(dBUV/m)	Conclusion
2483.50	62.54	-15.519	47.021	54	Pass
2487.87	56.11	-15.519	40.591	54	Pass

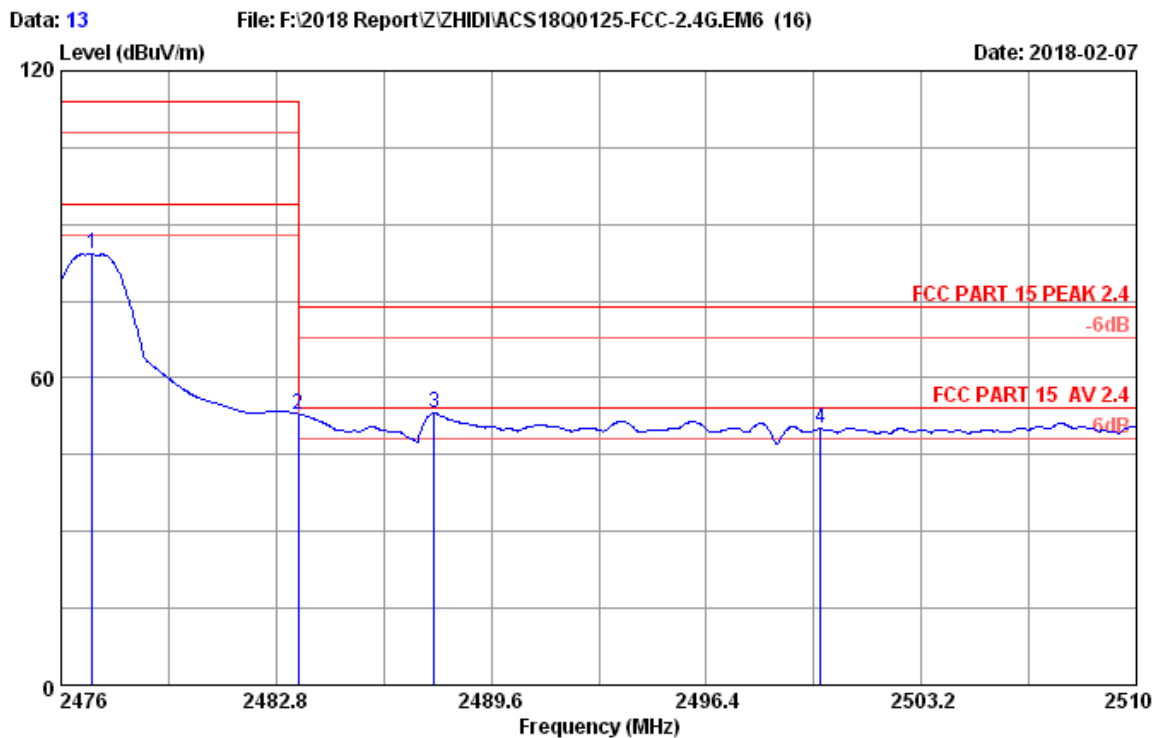

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 22.6°C/57% Engineer : kayle
 EUT : Wireless Receiver M/N:elecom10
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.99	28.21	10.45	35.71	81.21	84.16	114.00	29.84	Peak
2	2483.50	28.21	10.48	35.71	49.98	52.96	74.00	21.04	Peak
3	2487.80	28.30	10.48	35.71	49.99	53.06	74.00	20.94	Peak
4	2500.00	28.30	10.48	35.74	46.98	50.02	74.00	23.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

7. ANTENNA REQUIREMENT

RESULT : **PASS**

Test Date : Feb.02~11,2018

Test standard : FCC Part 15.203

Limit : An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

According to the manufacturer declared, the EUT has an Internal Antenna, the directional gain of antenna is -2.268dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply the provision.

8. RADIO FRREQUENCY EXPOSURE COMPLIANCE

RESULT : PASS

Test standard : FCC KDB Publication 447498 D01 V06

Since maximum peak output power of the transmitter is $<10\text{mW}$, i.e. $0.000002019\text{mW} < 10\text{mW}$, hence the EUT is excluded from SAR evaluation according to FCC KDB Publication 447498 D01: General RF Exposure Guidance V05.



9. DEVIATION TO TEST SPECIFICATIONS

[NONE]