

## **Certification Test Report**

**FCC ID: YWZ-S3I0004**  
**IC: 3356F-S3I0004**

**FCC Rule Part: 15.247**  
**IC Radio Standards Specification: RSS-210**

**ACS Report Number: 14-2070.W06.1A**

Applicant: Alpha - High Theft Solutions,  
A Division of Checkpoint Systems, Inc.  
Model(s): S3I-0004

Test Begin Date: **June 30, 2014**  
Test End Date: **July 10, 2014**

Report Issue Date: July 28, 2014



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ACLASS, ANSI, or any agency of the Federal Government.

**Project Manager:**

A handwritten signature in blue ink, appearing to read "Thierry Jean-Charles".

**Thierry Jean-Charles**  
**EMC Engineer**  
**Advanced Compliance Solutions, Inc.**

**Reviewed by:**

A handwritten signature in blue ink, appearing to read "Kirby Munroe".

**Kirby Munroe**  
**Director, Wireless Certifications**  
**Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 30 pages**

## **TABLE OF CONTENTS**

|          |                                                                                   |           |
|----------|-----------------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>GENERAL .....</b>                                                              | <b>3</b>  |
| 1.1      | Purpose .....                                                                     | 3         |
| 1.2      | Applicant Information .....                                                       | 3         |
| 1.3      | Product Description.....                                                          | 3         |
| 1.4      | Test Methodology and Considerations .....                                         | 3         |
| <b>2</b> | <b>TEST FACILITIES .....</b>                                                      | <b>4</b>  |
| 2.1      | Location.....                                                                     | 4         |
| 2.2      | Laboratory Accreditations/Recognitions/Certifications .....                       | 4         |
| 2.3      | Radiated & Conducted Emissions Test Site Description .....                        | 5         |
| <b>3</b> | <b>APPLICABLE STANDARD REFERENCES.....</b>                                        | <b>7</b>  |
| <b>4</b> | <b>LIST OF TEST EQUIPMENT.....</b>                                                | <b>8</b>  |
| <b>5</b> | <b>SUPPORT EQUIPMENT .....</b>                                                    | <b>9</b>  |
| <b>6</b> | <b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>                             | <b>9</b>  |
| <b>7</b> | <b>SUMMARY OF TESTS.....</b>                                                      | <b>10</b> |
| 7.1      | Antenna Requirement – FCC: Section 15.203 .....                                   | 10        |
| 7.2      | 6 dB Bandwidth - FCC: Section 15.247(a)(2) 99% Bandwidth IC: RSS-210 A8.2(a)..... | 10        |
| 7.3      | Peak Output Power - FCC Section 15.247(b)(3) IC: RSS-210 A8.4(4) .....            | 14        |
| 7.4      | Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-210 A8.5.....   | 16        |
| 7.5      | Power Spectral Density - FCC Section 15.247(e) IC: RSS-210 A8.2(b) .....          | 28        |
| <b>8</b> | <b>CONCLUSION.....</b>                                                            | <b>30</b> |

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

### 1.2 Applicant Information

Alpha - High Theft Solutions  
10715 Sikes Place, Ste 200  
Charlotte, NC 28277

### 1.3 Product Description

The model S3I-0004 is an IEEE 802.15.4 wireless transceiver which allows the monitoring of items for sale in a retail environment. The EUT is wrapped around the product to be monitored, securing each side of the package, with a buckle on one side and an alarm unit on the other side. Un-authorized removal causes an alarm to sound and the store network to be notified electronically.

#### Technical Details

|                     |                              |
|---------------------|------------------------------|
| Mode of Operation:  | IEEE 802.15.4                |
| Frequency Range:    | 2405 MHz - 2480 MHz          |
| Number of Channels: | 16                           |
| Channel Separation: | 5 MHz                        |
| Modulations:        | O-QPSK                       |
| Antenna Type/Gain:  | PCB Wiggle Antenna, 2.15 dBi |
| Input Power:        | 3 VDC CR2477 Lithium Battery |

Model Number: S3I-0004

Test Sample Serial Number(s): 15F0 (RF Conducted), DE00030A (Radiated)

Test Sample Condition: The EUT was in good condition with no observable physical damages.

### 1.4 Test Methodology and Considerations

The EUT was evaluated for radiated and RF conducted emissions while powered via battery.

The RF conducted measurements were performed on the PCB configured with an SMA connector for direct coupling with the measurement equipment.

For the radiated emissions evaluation, preliminary evaluations were performed for the EUT set in three orthogonal orientations with the fastening cables configured for worst case results. The highest emissions relative to the limits were observed for the EUT set lengthwise on the test table. The corresponding measurement results are documented in this document.

The EUT was also evaluated for unintentional emissions. The results are documented separately in a verification test report.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 475089  
Industry Canada Lab Code: 4175C

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ACLASS program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

## 2.3 Radiated & Conducted Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl floor.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flushed with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

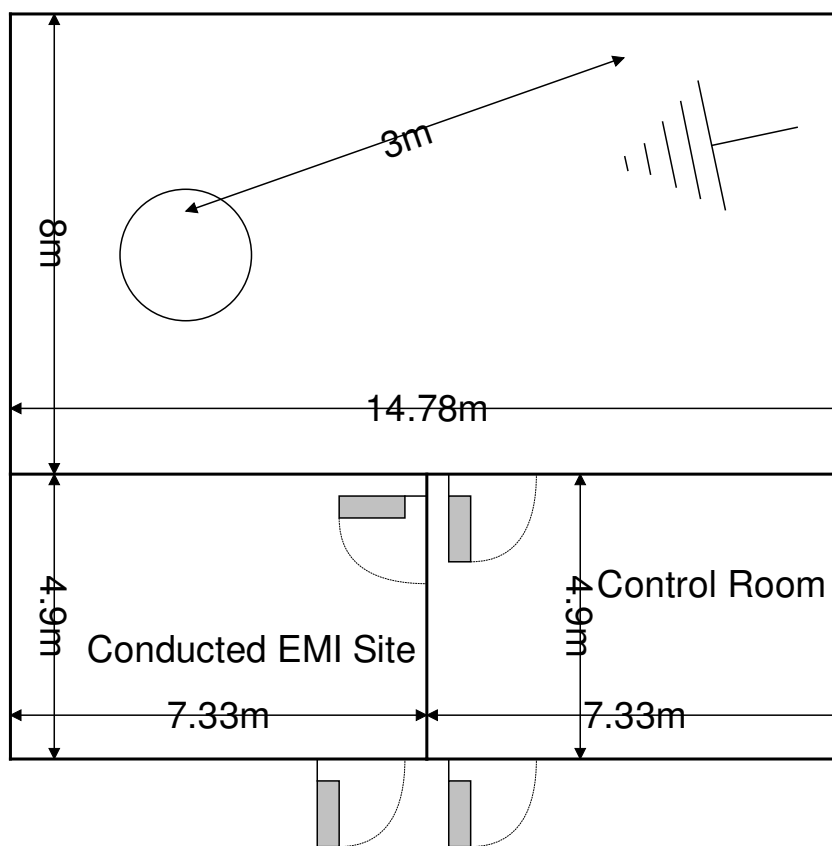


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are  $7.3 \times 4.9 \times 3 \text{ m}^3$ . As per ANSI C63.4 2003 requirements, the data were taken using two LISNs; a Solar Model 8028-50  $50 \Omega/50 \mu\text{H}$  and an EMCO Model 3825, which are installed as shown in Photograph 3. For 220 V, 50 Hz, a Polarad LISN (S/N 879341/048) is used in conjunction with a 1 kVA, 50 Hz/220 V EDGAR variable frequency generator, Model 1001B, to filter conducted noise from the generator.

A diagram of the room is shown below in figure 2.3.2-1:

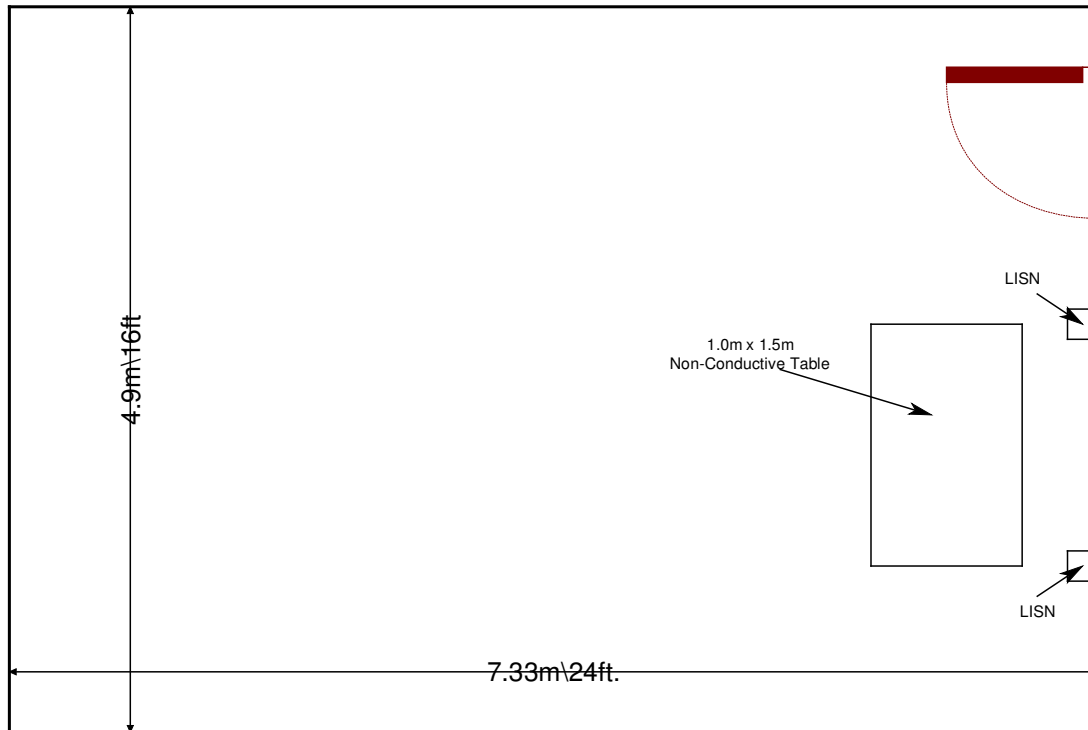


Figure 2.3.2-1: AC Mains Conducted EMI Site

### **3 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2014.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2014
- ❖ KDB Publication No. 558074 D01 DTS Meas Guidance v03r01 – Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247, June 5, 2014.
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8 December 2010.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, December 2010.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

| AssetID | Manufacturer               | Model #                | Equipment Type     | Serial #   | Last Calibration Date | Calibration Due Date |
|---------|----------------------------|------------------------|--------------------|------------|-----------------------|----------------------|
| 283     | Rohde & Schwarz            | FSP40                  | Spectrum Analyzers | 1000033    | 9/18/2013             | 9/18/2015            |
| 341     | Aeroflex/Weinschel         | 54A-20                 | Attenuators        | 4686       | 7/29/2013             | 7/29/2014            |
| 523     | Agilent                    | E7405                  | Spectrum Analyzers | MY45103293 | 1/8/2013              | 1/8/2015             |
| 2002    | EMCO                       | 3108                   | Antennas           | 2147       | 11/22/2013            | 11/22/2015           |
| 2004    | EMCO                       | 3146                   | Antennas           | 1385       | 11/22/2013            | 11/22/2015           |
| 2006    | EMCO                       | 3115                   | Antennas           | 2573       | 4/24/2013             | 4/24/2015            |
| 2008    | COM-Power                  | AH-826                 | Antennas           | 81009      | NCR                   | NCR                  |
| 2011    | Hewlett-Packard            | HP 8447D               | Amplifiers         | 2443A03952 | 12/31/2013            | 12/31/2014           |
| 2037    | ACS Boca                   | Chamber EMI Cable Set  | Cable Set          | 2037       | 2/27/2014             | 2/27/2015            |
| 2044    | QMI                        | N/A                    | Cables             | 2044       | 12/31/2013            | 12/31/2014           |
| 2070    | Mini Circuits              | VHF-8400+              | Filter             | 2070       | 1/1/2014              | 1/1/2015             |
| 2072    | Mini Circuits              | VHF-3100+              | Filter             | 30737      | 1/1/2014              | 1/1/2015             |
| 2076    | Hewlett Packard            | HP5061-5458            | Cables             | 2076       | 12/31/2013            | 12/31/2014           |
| 2086    | Merrimac                   | FAN-6-10K              | Attenuators        | 23148-83-1 | 12/31/2013            | 12/31/2014           |
| 2089    | Agilent Technologies, Inc. | 83017A                 | Amplifiers         | 3123A00214 | 12/16/2013            | 12/16/2014           |
| 2095    | ETS Lindgren               | TILE4! - Version 4.2.A | Software           | 85242      | NCR                   | NCR                  |

**NCR = No Calibration Required**

## 5 SUPPORT EQUIPMENT

**Table 5-1: EUT and Support Equipment**


| Item # | Type Device | Manufacturer                                                               | Model/Part # | Serial # |
|--------|-------------|----------------------------------------------------------------------------|--------------|----------|
| 1      | EUT         | Alpha - High Theft Solutions,<br>A Division of Checkpoint Systems,<br>Inc. | S3I-0004     | DE00030A |

Note: The EUT is standalone equipment with no provision for support equipment

**Table 5-2: Cable Description**

| Cable # | Cable Type      | Length | Shield | Termination |
|---------|-----------------|--------|--------|-------------|
| A       | Fastening Cable | 0.5 m  | No     | Looped Back |
| B       | Fastening Cable | 0.5 m  | No     | Looped Back |

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

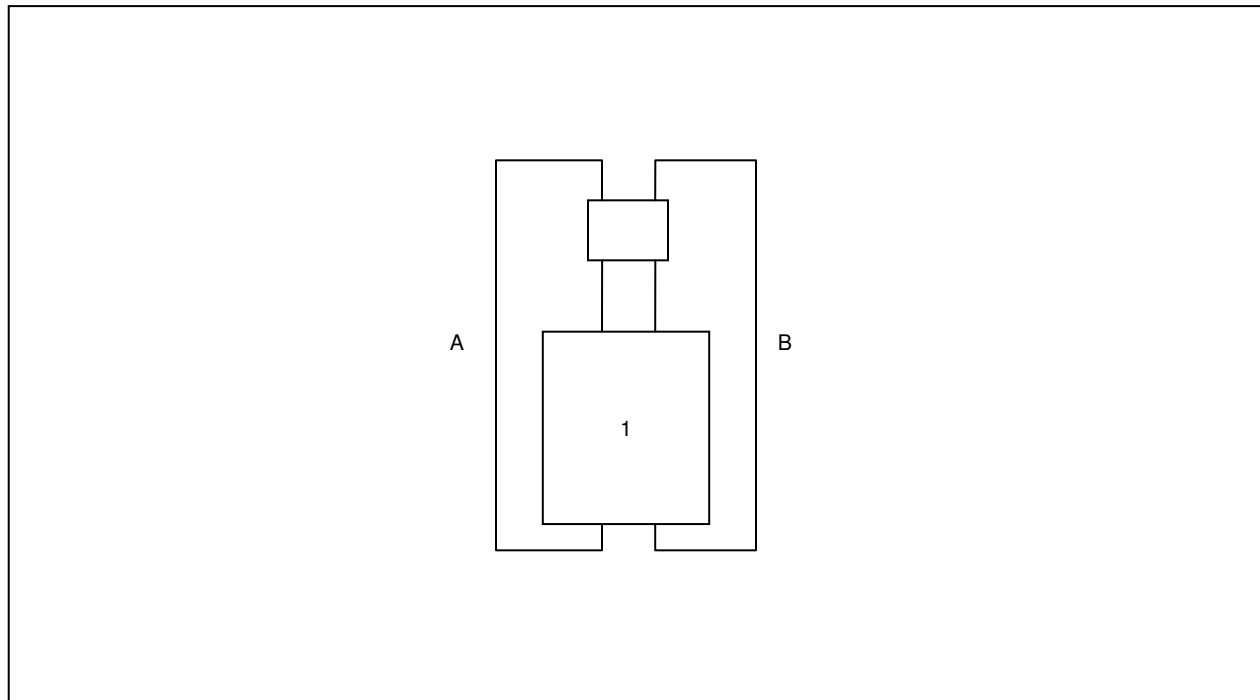

**Figure 6-1: Radiated Emission Setup**

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses an internal PCB wiggle antenna which is printed on the PCB. The antenna cannot be removed without damaging the product, thus meeting the requirements of FCC Section 15.203.

### 7.2 6 dB Bandwidth - FCC: Section 15.247(a)(2) 99% Bandwidth IC: RSS-210 A8.2(a)

#### 7.2.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB Publication No. 558074 “Guidance for Performing Compliance Measurements on Digital Transmission Systems (47 CFR 15.247)” DTS 6-dB Signal Bandwidth Option 1. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. Span was set large enough to capture the entire emissions and >> RBW.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was to 1% of the span. The occupied 99% bandwidth was measured using the occupied bandwidth function of the analyzer.

#### 7.2.2 Measurement Results

Results are shown below.

**Table 7.2.2-1: 6dB / 99% Bandwidth**

| Frequency<br>[MHz] | 6dB Bandwidth<br>[kHz] | 99% Bandwidth<br>(kHz) |
|--------------------|------------------------|------------------------|
| 2405               | 1542.5                 | 2347.5                 |
| 2440               | 1580.0                 | 2400.0                 |
| 2480               | 1602.5                 | 2460.0                 |

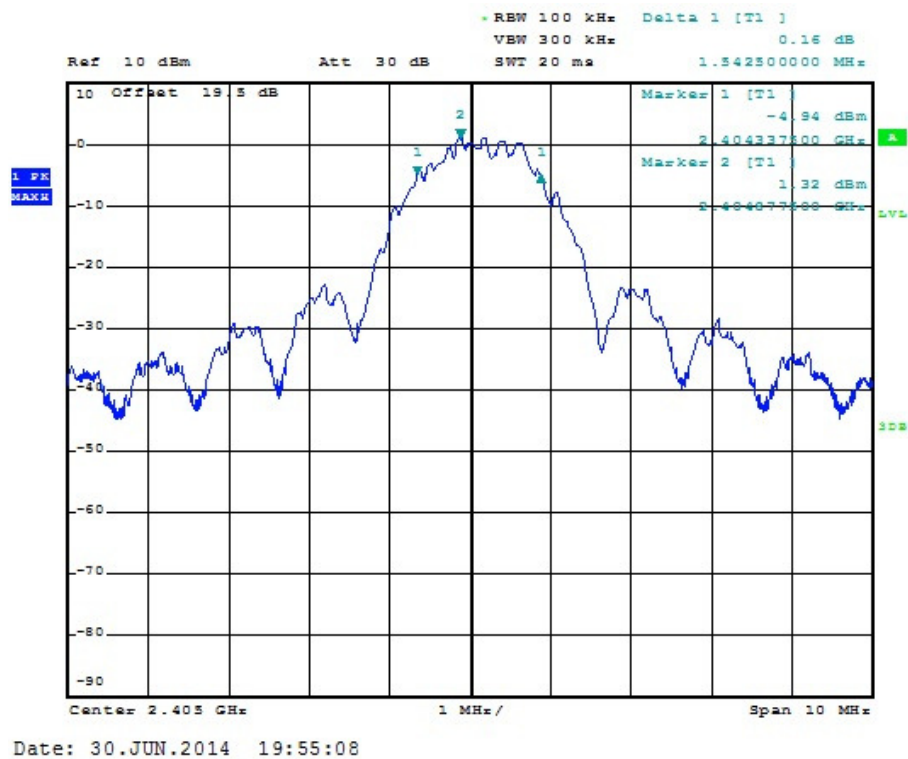


Figure 7.2.2-1: 6dB BW - Low Channel

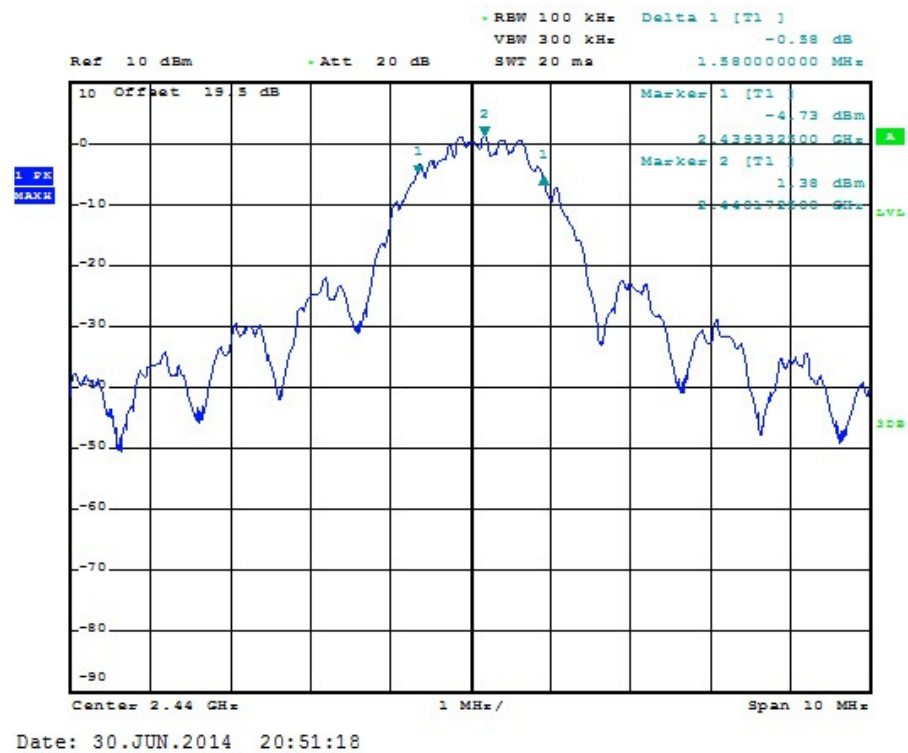


Figure 7.2.2-2: 6dB BW - Middle Channel

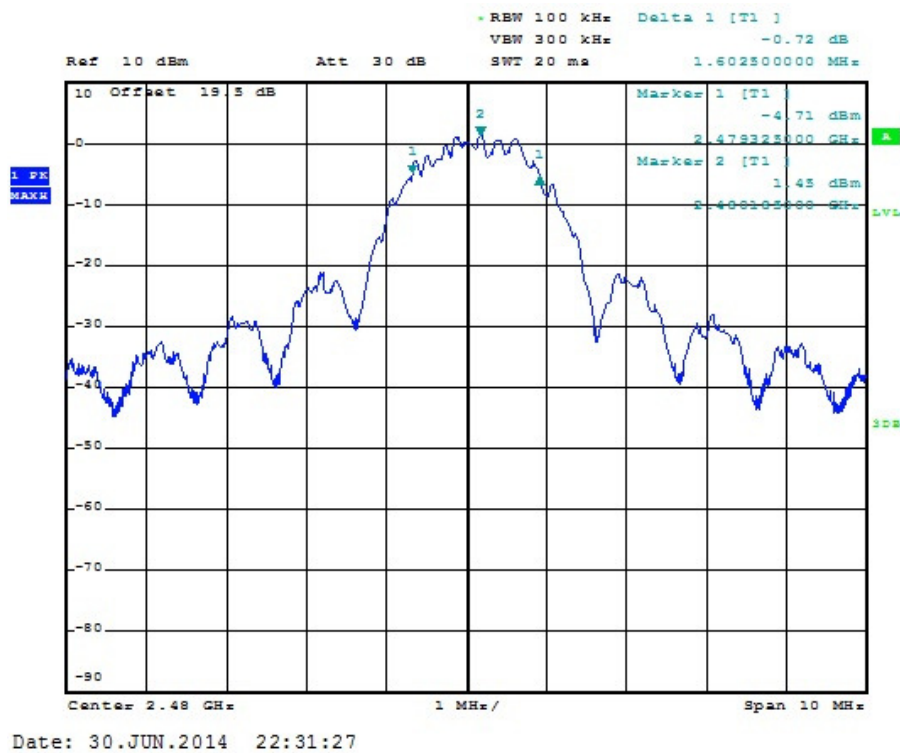


Figure 7.2.2-3: 6dB BW - High Channel

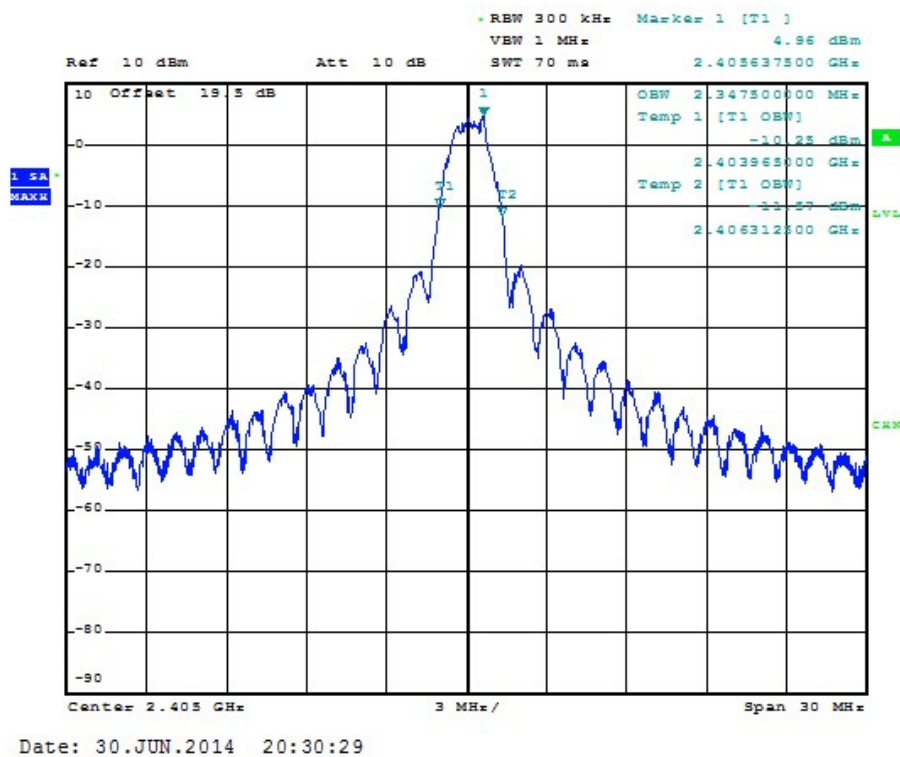


Figure 7.2.2-4: 99% OBW - Low Channel

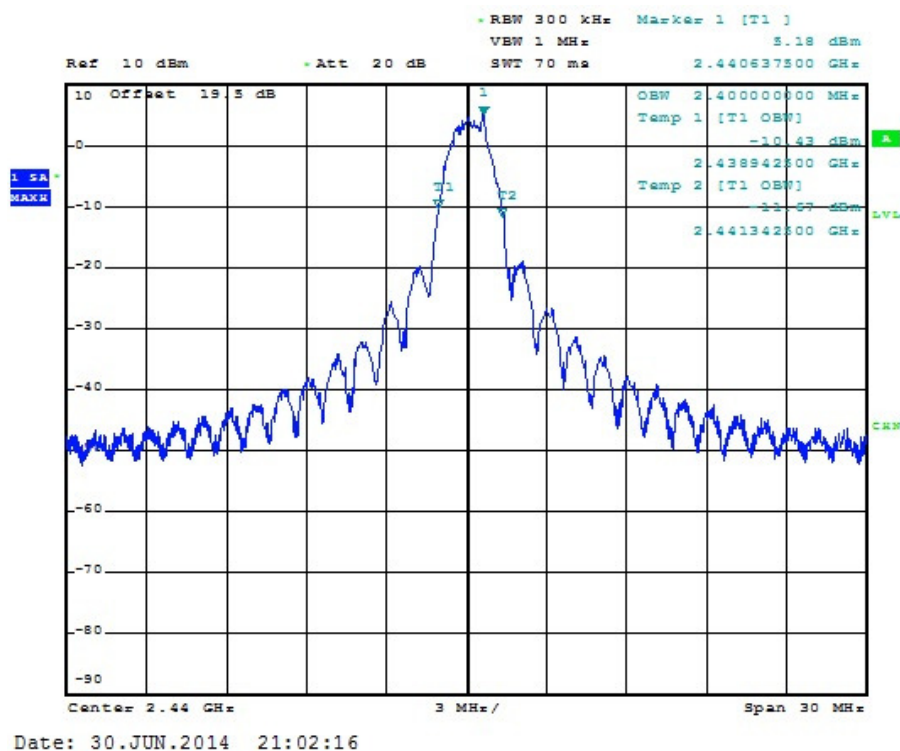


Figure 7.2.2-5: 99% OBW - Middle Channel

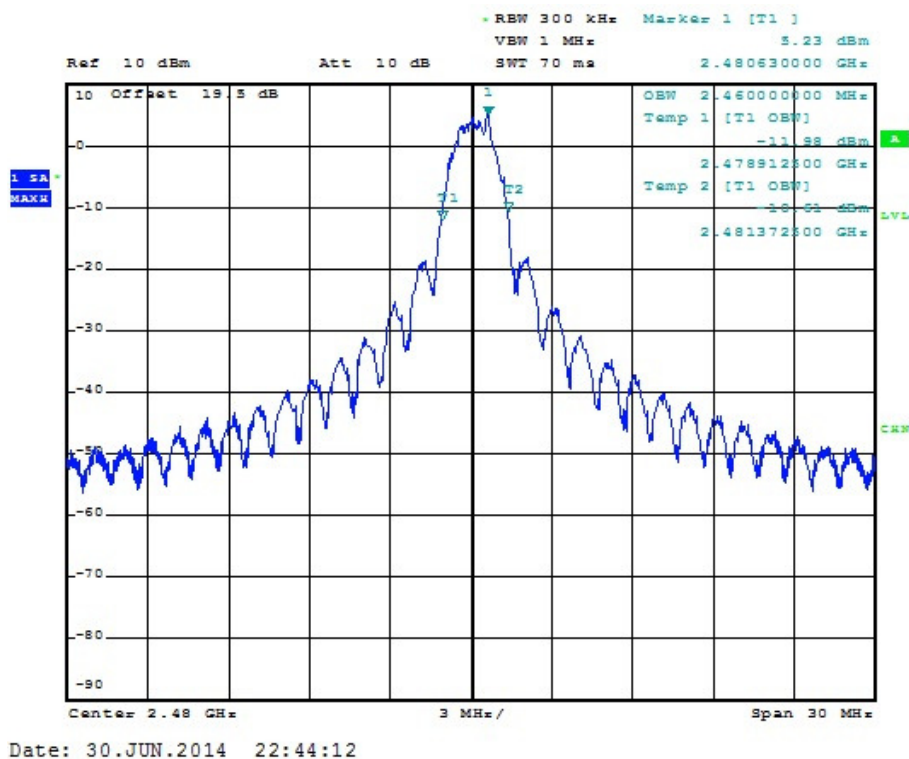


Figure 7.2.2-6: 99% OBW - High Channel



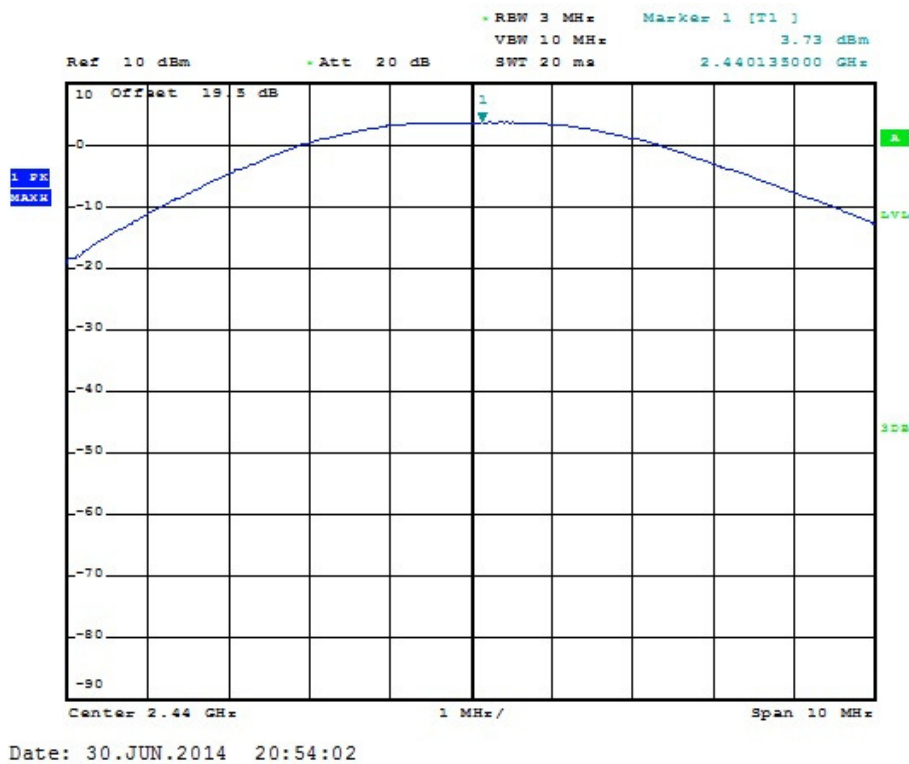


Figure 7.3.2-2: RF Output Power - Middle Channel

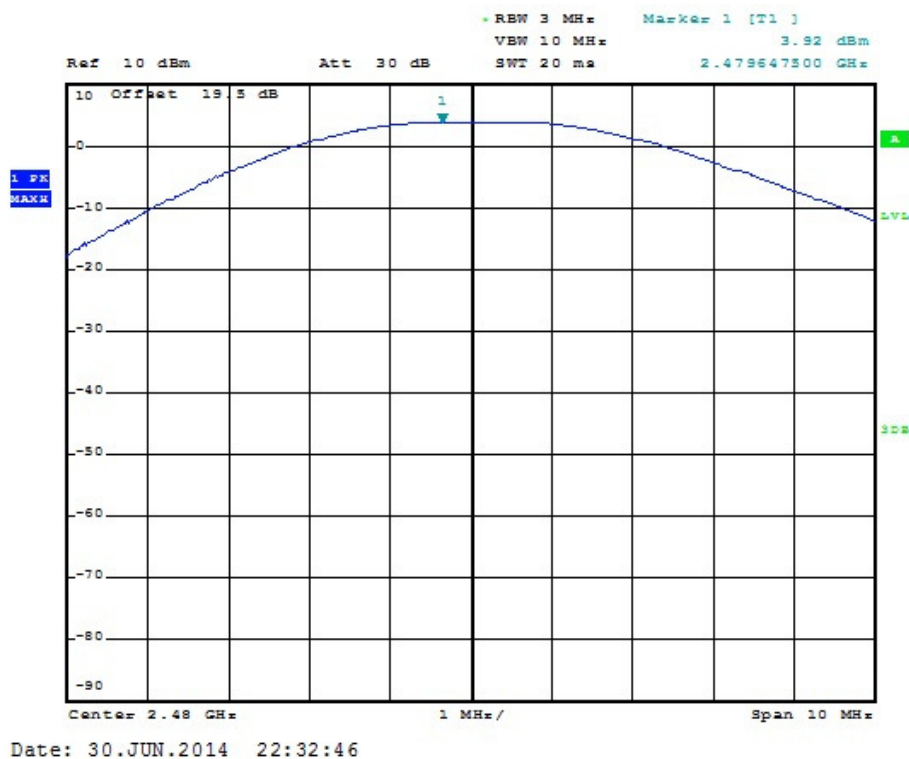


Figure 7.3.2-3: RF Output Power - High Channel

## 7.4 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-210 A8.5

### 7.4.1 Band-Edge Compliance of RF Conducted Emissions

#### 7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer via suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to 300 kHz.

#### 7.4.1.2 Measurement Results

Results are shown below.

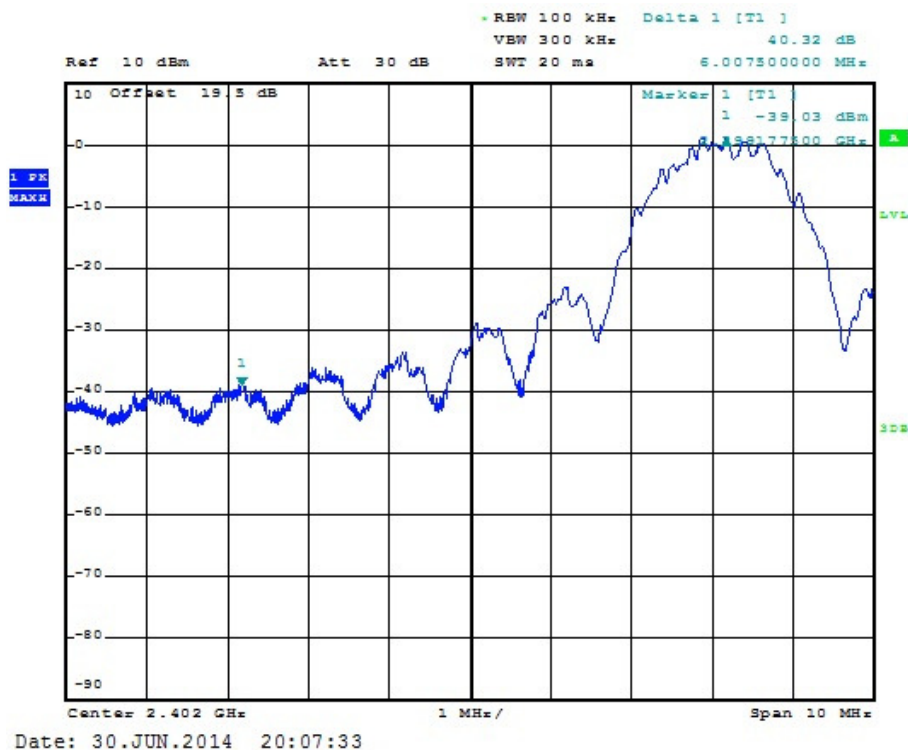


Figure 7.4.1.2-1: Lower Band-edge

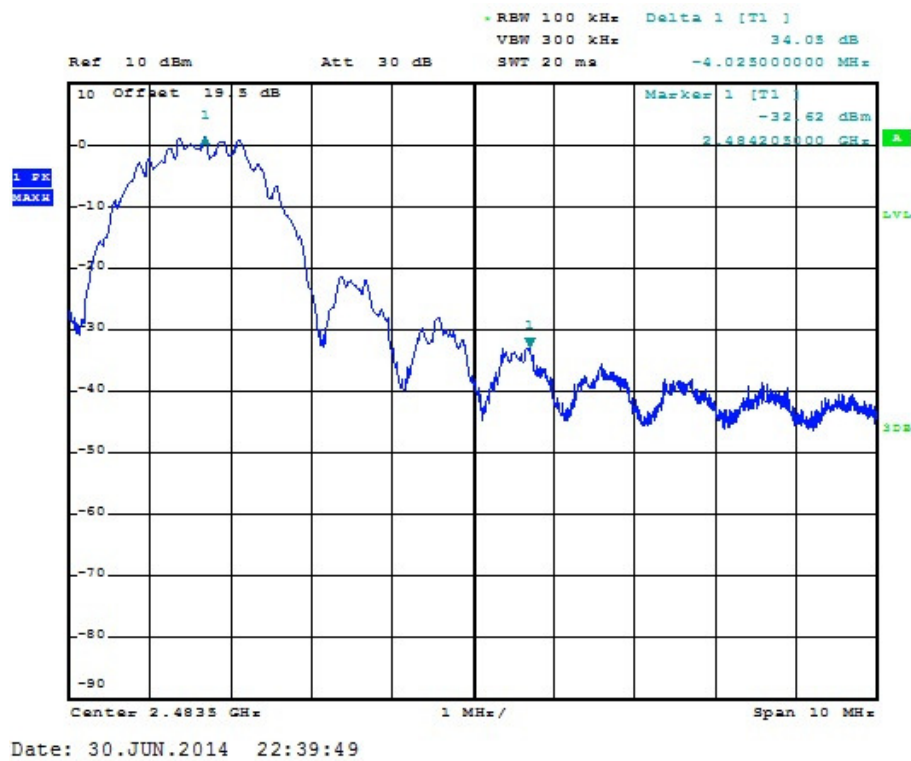


Figure 7.4.1.2-2: Upper Band-edge

## 7.4.2 RF Conducted Spurious Emissions

### 7.4.2.1 Measurement Procedure

The RF Conducted Spurious Emissions were measured in accordance with the FCC KDB Publication No. 558074 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (47 CFR 15.247)". The RF output port of the equipment under test was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30 MHz to 26 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak Max Hold function of the analyzer was utilized. The reference level for the limits was determined by measuring the Peak PSD level in any 100 kHz bandwidth within the DTS channel bandwidth.

### 7.4.2.2 Measurement Results

Results are shown below.

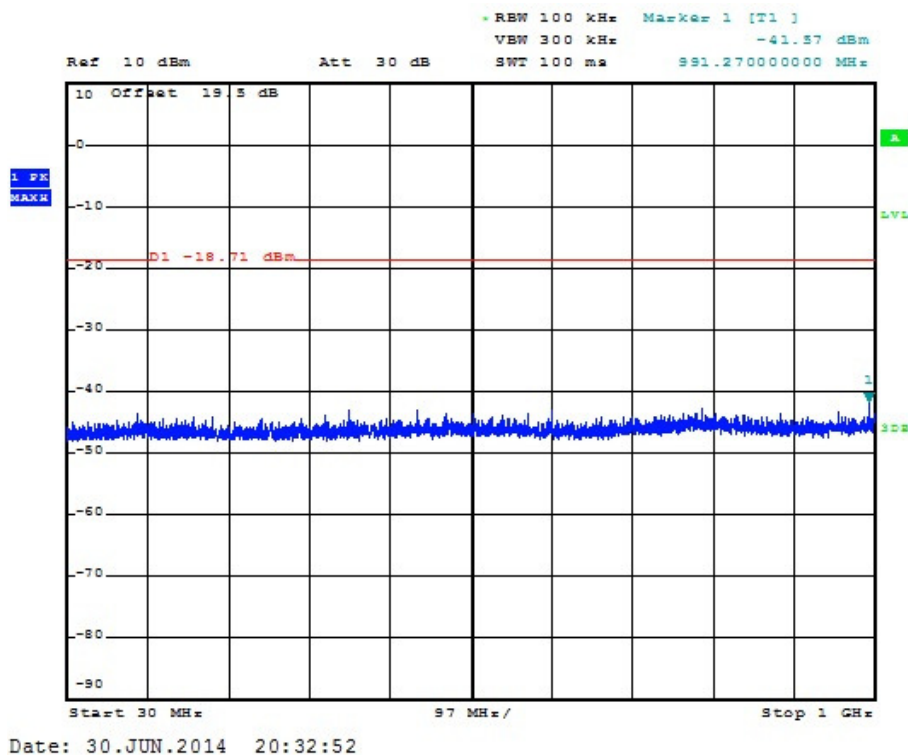


Figure 7.4.2.2-1: 30 MHz – 1 GHz – Low Channel

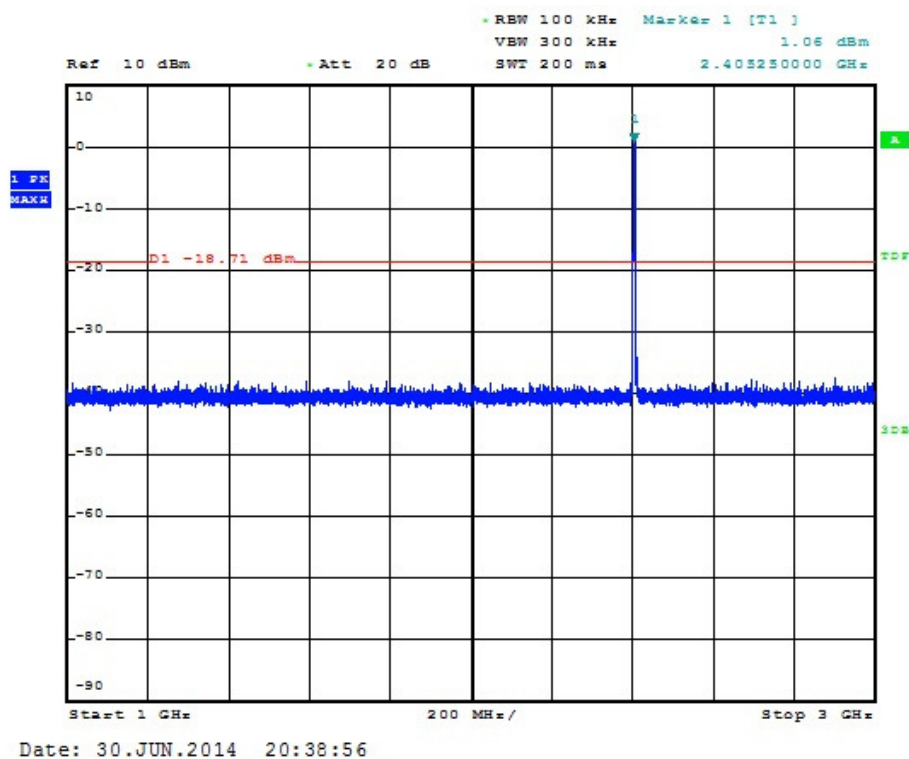


Figure 7.4.2.2-2: 1 GHz – 3 GHz – Low Channel



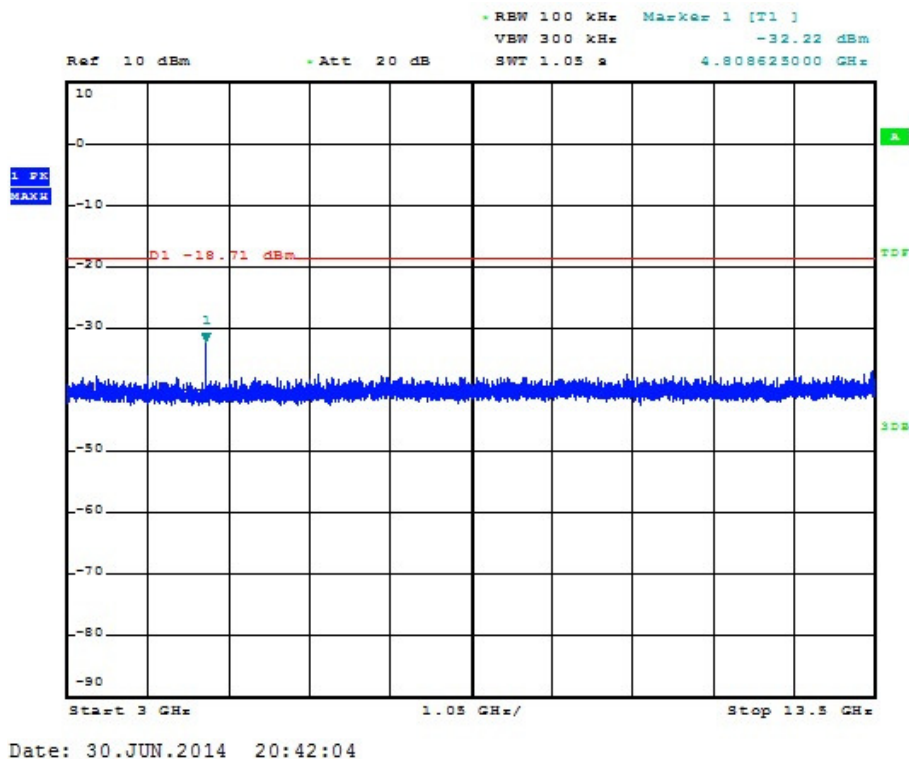


Figure 7.4.2.2-3: 3 GHz – 13.5 GHz – Low Channel

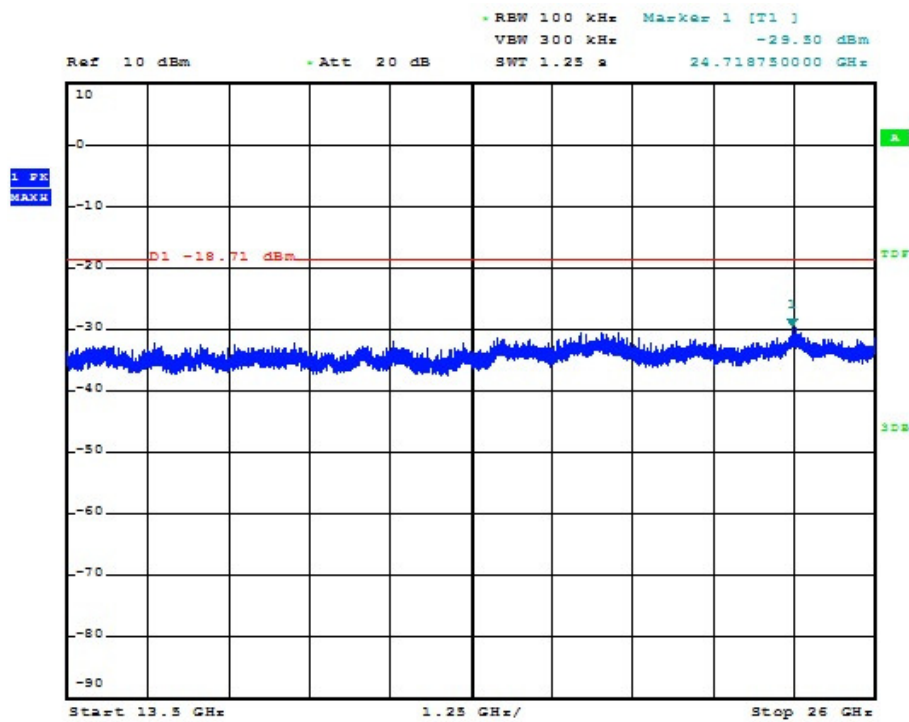

Date: 30.JUN.2014 20:43:47

Figure 7.4.2.2-4: 13.5 GHz – 26 GHz – Low Channel

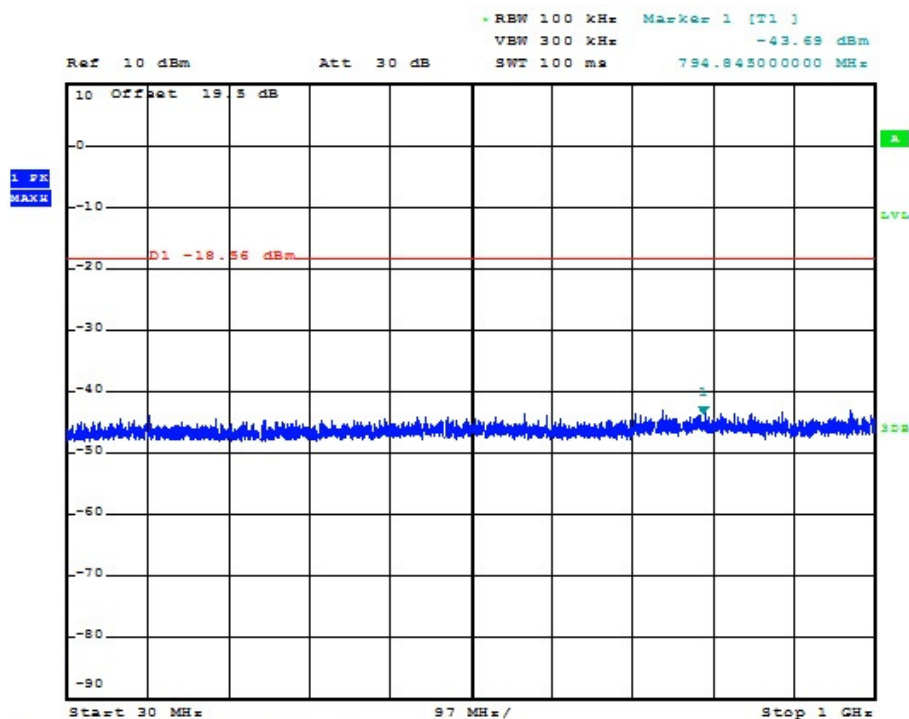

Date: 30.JUN.2014 21:06:32

Figure 7.4.2.2-5: 30 MHz – 1 GHz – Middle Channel

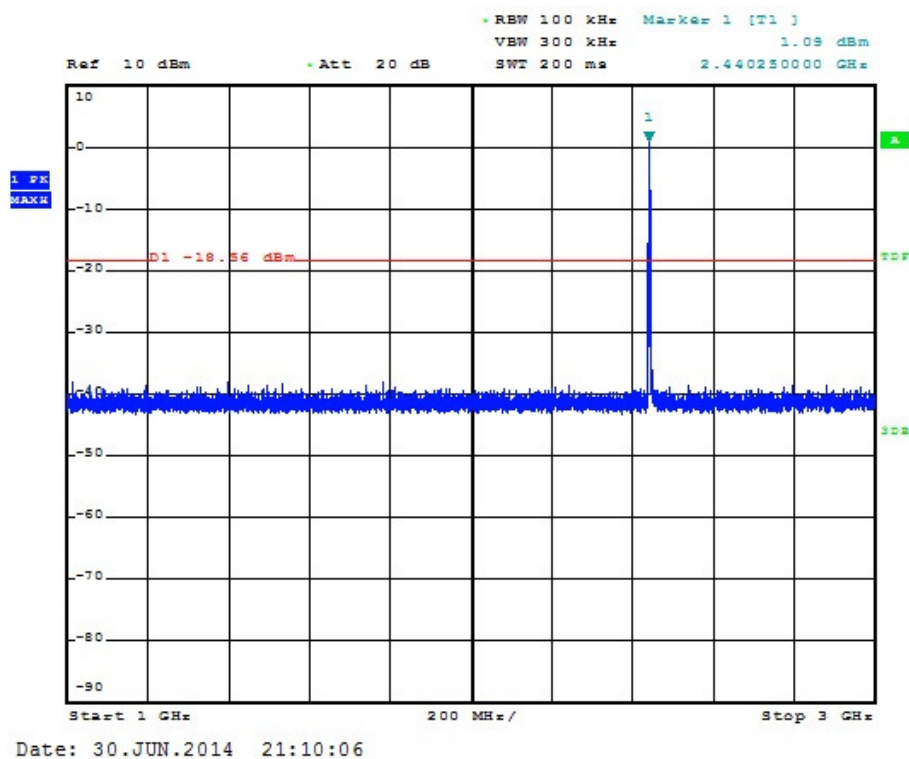


Figure 7.4.2.2-6: 1 GHz – 3 GHz – Middle Channel

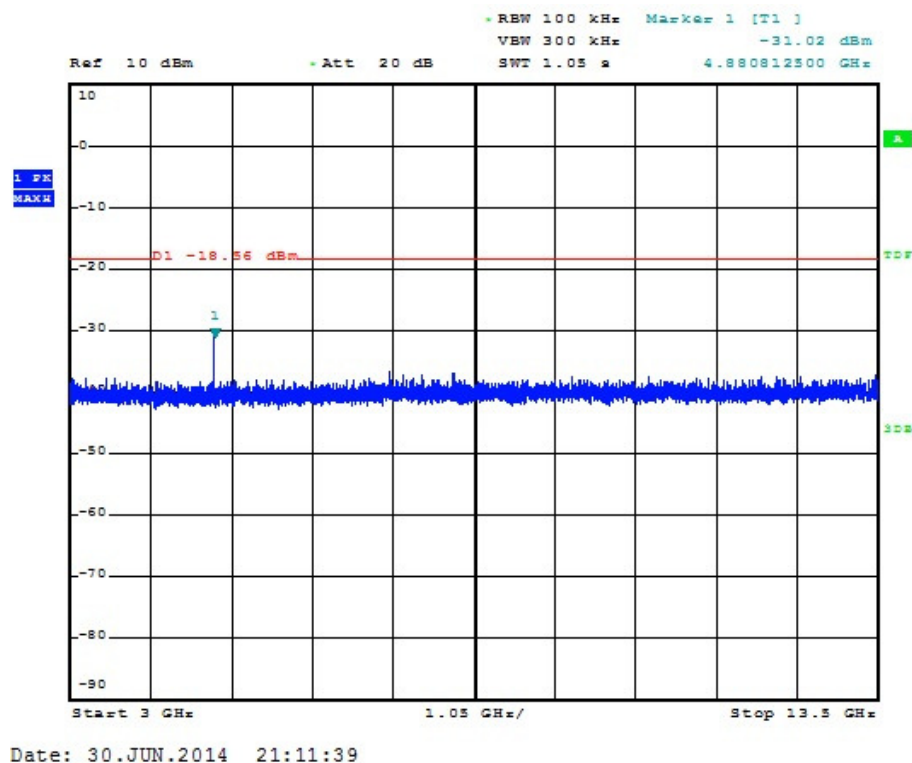


Figure 7.4.2.2-7: 3 GHz – 13.5 GHz – Middle Channel

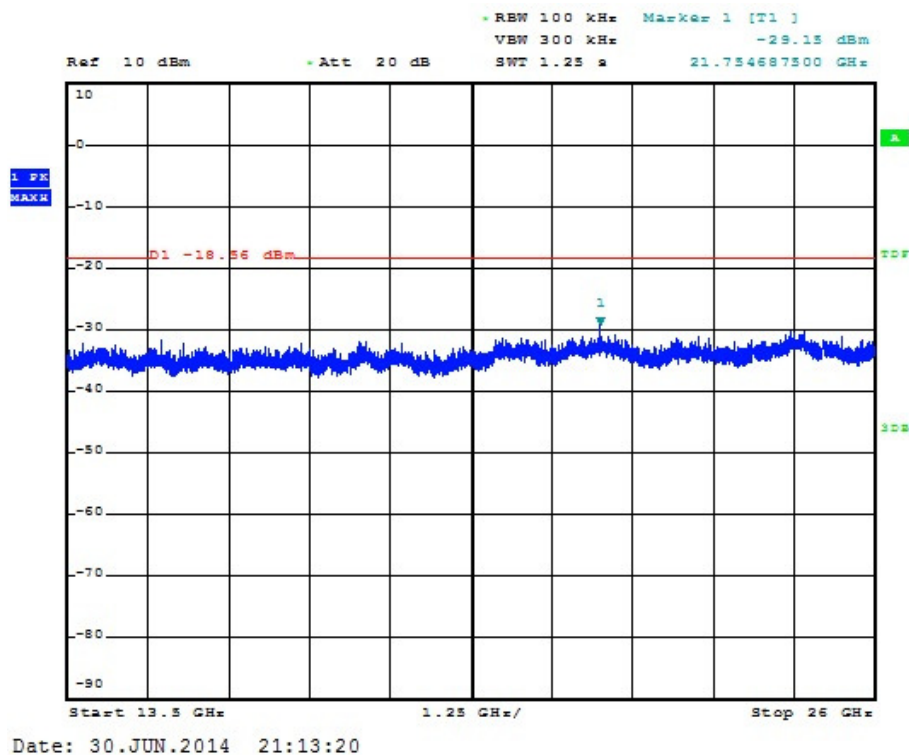


Figure 7.4.2.2-8: 13.5 GHz – 26 GHz – Middle Channel

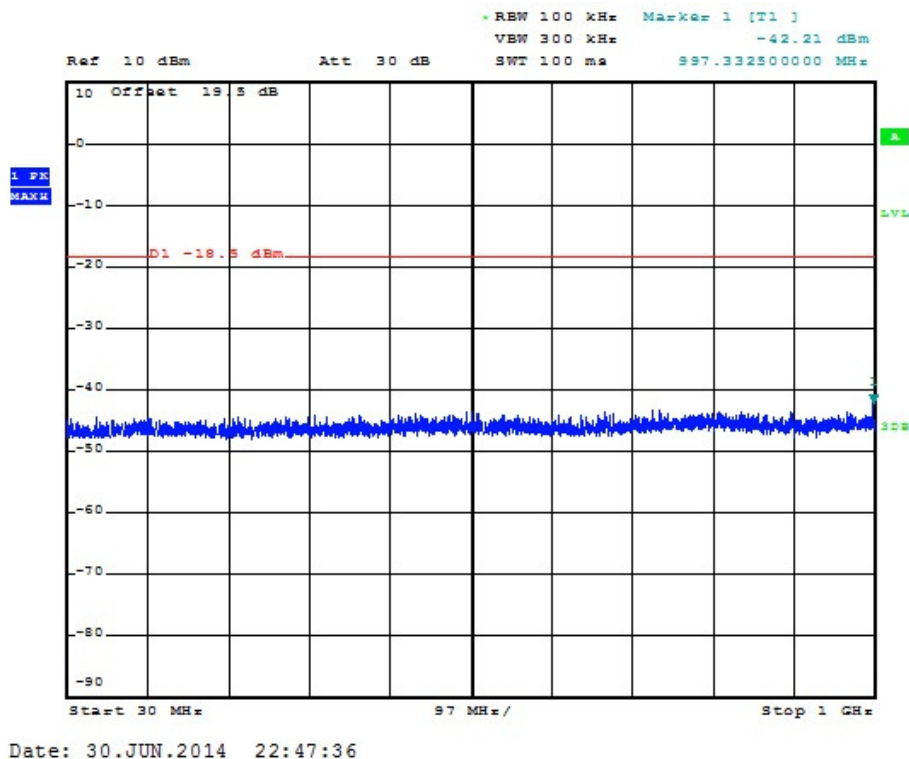


Figure 7.4.2.2-9: 30 MHz – 1 GHz – High Channel

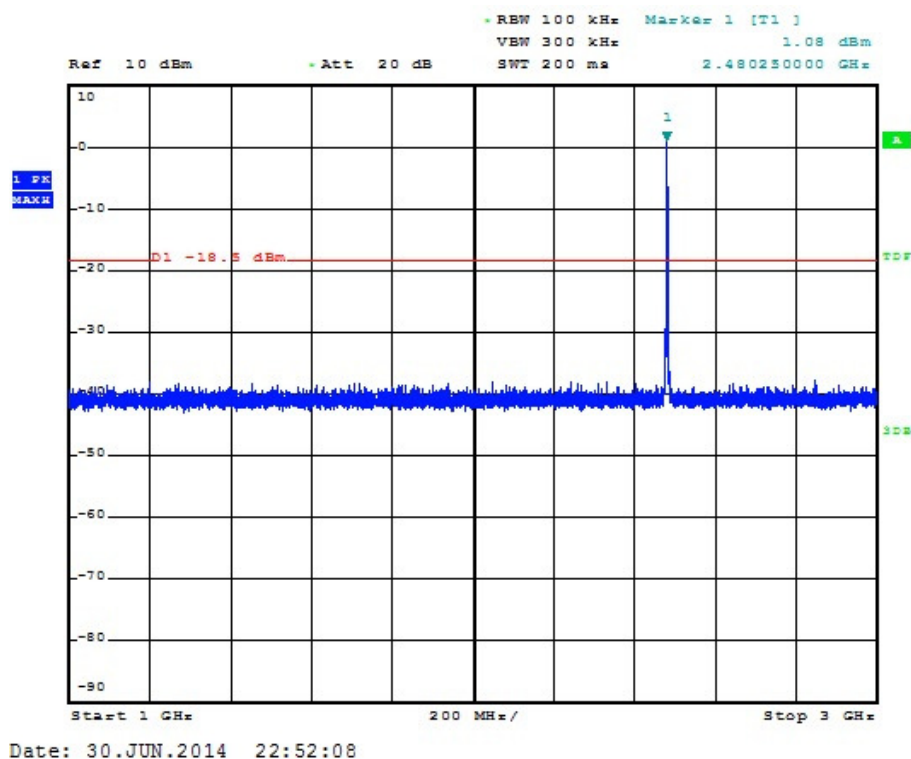


Figure 7.4.2.2-10: 1 GHz – 3 GHz –High Channel


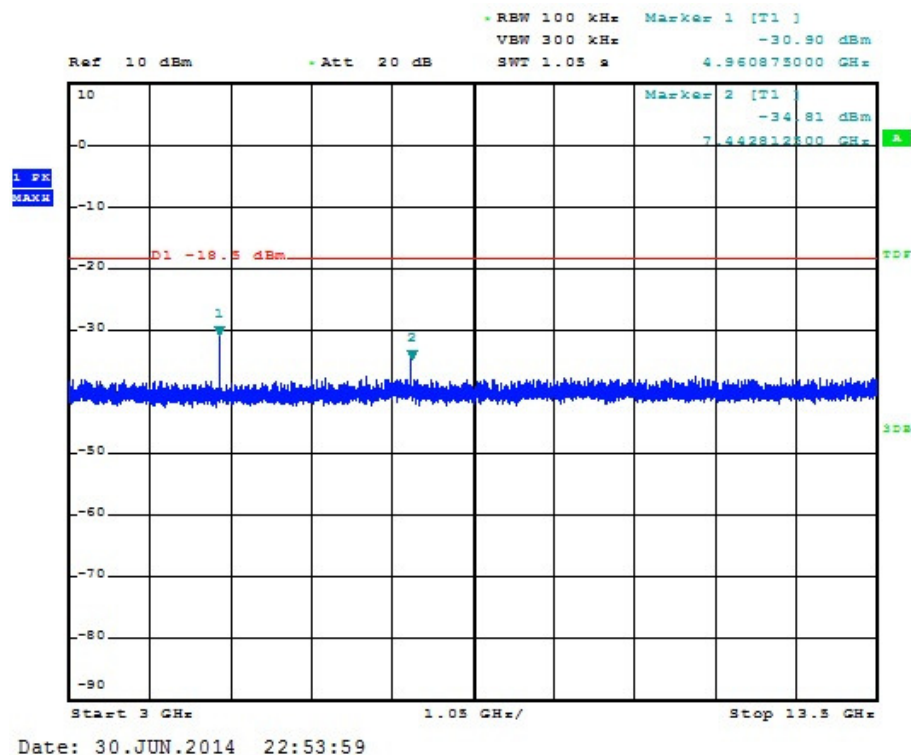


Figure 7.4.2.2-11: 3 GHz – 13.5 GHz –High Channel

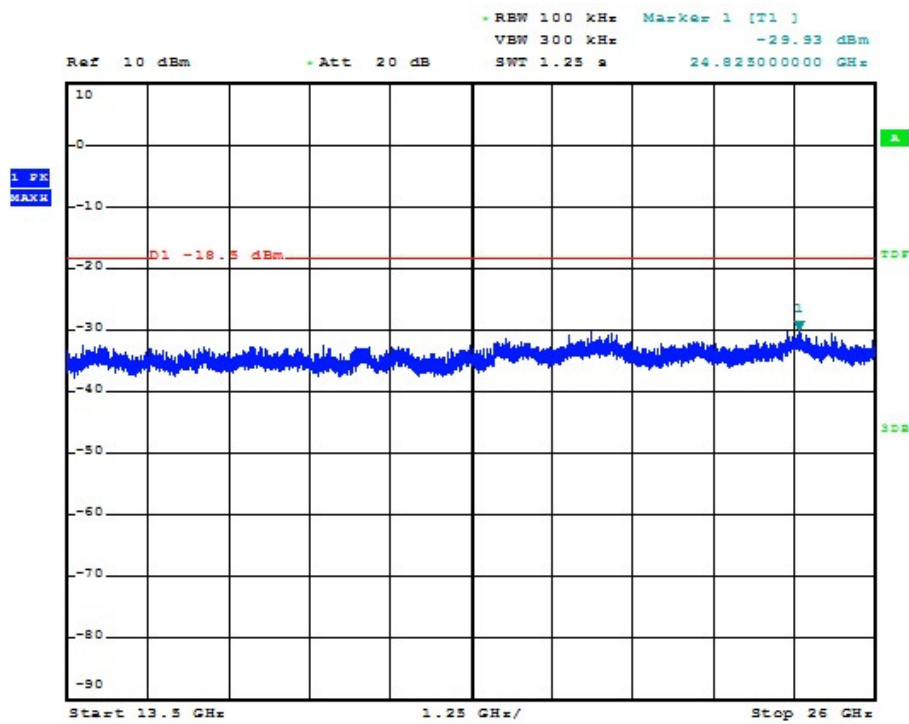

Date: 30.JUN.2014 22:55:38

Figure 7.4.2.2-12: 13.5 GHz – 26 GHz –High Channel

### **7.4.3 Radiated Spurious Emissions into Restricted Frequency Bands - FCC 15.205, 15.209; IC: RSS-210 2.2, RSS-Gen 7.2.2, 7.2.5**

#### **7.4.3.1 Measurement Procedure**

Radiated emissions tests were made over the frequency range of 30 MHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements are made with RBW of 1 MHz and VBW of 3 MHz. Average measurements are performed in the linear scale using VBW of 30 Hz over a 5 second sweep.

A duty cycle correction factor of 15.4% was used for the average measurements. The justification for the duty cycle is provided in the manufacturer's theory of operation document.

#### **7.4.3.2 Measurement Results**

Radiated band-edge and spurious emissions found in the restricted frequency bands of 30MHz to 26 GHz are reported in the tables below.

Table 7.4.3.2-1: Radiated Spurious Emissions Tabulated Data

| Frequency<br>(MHz)        | Level<br>(dBuV) |         | Antenna<br>Polarity<br>(H/V) | Correction<br>Factors<br>(dB) | Corrected Level<br>(dBuV/m) |         | Limit<br>(dBuV/m) |         | Margin<br>(dB) |         |
|---------------------------|-----------------|---------|------------------------------|-------------------------------|-----------------------------|---------|-------------------|---------|----------------|---------|
|                           | pk              | Qpk/Avg |                              |                               | pk                          | Qpk/Avg | pk                | Qpk/Avg | pk             | Qpk/Avg |
| Low Channel (2405 MHz)    |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2390                      | 58.73           | 48.15   | V                            | -8.00                         | 50.73                       | 23.90   | 74.0              | 54.0    | 23.3           | 30.1    |
| 4810                      | 62.41           | 56.39   | H                            | -0.26                         | 62.15                       | 39.88   | 74.0              | 54.0    | 11.8           | 14.1    |
| 4810                      | 60.75           | 54.44   | V                            | -0.26                         | 60.49                       | 37.93   | 74.0              | 54.0    | 13.5           | 16.1    |
| 12025                     | 44.88           | 32.25   | H                            | 12.74                         | 57.62                       | 28.74   | 83.5              | 63.5    | 25.9           | 34.8    |
| 12025                     | 44.47           | 32.32   | V                            | 12.74                         | 57.21                       | 28.81   | 83.5              | 63.5    | 26.3           | 34.7    |
| Middle Channel (2440 MHz) |                 |         |                              |                               |                             |         |                   |         |                |         |
| 4880                      | 63.04           | 56.86   | H                            | -0.04                         | 63.00                       | 40.57   | 74.0              | 54.0    | 11.0           | 13.4    |
| 4880                      | 61.57           | 55.50   | V                            | -0.04                         | 61.53                       | 39.21   | 74.0              | 54.0    | 12.5           | 14.8    |
| 7320                      | 49.13           | 39.06   | H                            | 5.58                          | 54.71                       | 28.39   | 74.0              | 54.0    | 19.3           | 25.6    |
| 7320                      | 48.89           | 37.90   | V                            | 5.58                          | 54.47                       | 27.23   | 74.0              | 54.0    | 19.5           | 26.8    |
| 12200                     | 45.97           | 34.00   | H                            | 12.99                         | 58.96                       | 30.74   | 83.5              | 63.5    | 24.5           | 32.8    |
| 12200                     | 45.56           | 33.57   | V                            | 12.99                         | 58.55                       | 30.31   | 83.5              | 63.5    | 24.9           | 33.2    |
| High Channel (2480 MHz)   |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2483.5                    | 65.91           | 57.04   | H                            | -7.61                         | 58.30                       | 33.18   | 74.0              | 54.0    | 15.7           | 20.8    |
| 2483.5                    | 76.48           | 68.53   | V                            | -7.61                         | 68.87                       | 44.67   | 74.0              | 54.0    | 5.1            | 9.3     |
| 4960                      | 62.84           | 56.74   | H                            | 0.20                          | 63.04                       | 40.69   | 74.0              | 54.0    | 11.0           | 13.3    |
| 4960                      | 62.67           | 56.59   | V                            | 0.20                          | 62.87                       | 40.54   | 74.0              | 54.0    | 11.1           | 13.5    |
| 7440                      | 49.14           | 38.34   | H                            | 6.00                          | 55.14                       | 28.09   | 74.0              | 54.0    | 18.9           | 25.9    |
| 7440                      | 50.42           | 39.81   | V                            | 6.00                          | 56.42                       | 29.56   | 74.0              | 54.0    | 17.6           | 24.4    |
| 12400                     | 44.69           | 33.45   | H                            | 13.28                         | 57.97                       | 30.48   | 83.5              | 63.5    | 25.5           | 33.0    |
| 12400                     | 45.37           | 33.32   | V                            | 13.28                         | 58.65                       | 30.35   | 83.5              | 63.5    | 24.9           | 33.2    |

## Notes:

- All the emissions above 12.4 GHz were attenuated below the limits and the noise floor of the measurement equipment.
- The average measurements were further corrected using a duty cycle correction factor of  $20 \cdot \log(15.4/100)$  dB.
- The emissions above 10 GHz were investigated at a test distance of 1m. The measurement results were corrected accordingly using a distance factor of  $20 \cdot \log(3/1)$  dB.

**7.4.3.3 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

|        |   |                                                                   |
|--------|---|-------------------------------------------------------------------|
| $CF_T$ | = | Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only) |
| $R_U$  | = | Uncorrected Reading                                               |
| $R_C$  | = | Corrected Level                                                   |
| AF     | = | Antenna Factor                                                    |
| CA     | = | Cable Attenuation                                                 |
| AG     | = | Amplifier Gain                                                    |
| DC     | = | Duty Cycle Correction Factor                                      |

$$\text{Duty Cycle Correction Factor} = 20 \cdot \log(15.4/100) \text{ dB} = -16.25 \text{ dB}$$

**Example Calculation: Peak**

$$\text{Corrected Level: } 58.73 + (-8.0) = 50.73 \text{ dB}\mu\text{V/m}$$

$$\text{Margin: } 74 \text{ dB}\mu\text{V/m} - 50.73 \text{ dB}\mu\text{V/m} = 23.3 \text{ dB}$$

**Example Calculation: Average**

$$\text{Corrected Level: } 48.15 + (-8.0) - 16.25 = 23.9 \text{ dB}\mu\text{V/m}$$

$$\text{Margin: } 54 \text{ dB}\mu\text{V/m} - 23.9 \text{ dB}\mu\text{V/m} = 30.1 \text{ dB}$$

## 7.5 Power Spectral Density - FCC Section 15.247(e) IC: RSS-210 A8.2(b)

### 7.5.1 PSD Measurement Procedure (Conducted Method)


The power spectral density was measured in accordance with the FCC KDB Publication No. 558074 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (47 CFR 15.247)" Section 10.2 Method PKPSD (peak PSD). The RF output port of the EUT was directly connected to the input of the spectrum analyzer. Offset values were input for cable and external attenuation. The spectrum analyzer RBW was set to 100 kHz and VBW 300 kHz. Span was adjusted to 1.5 times the 6 dB bandwidth and the sweep time was set to auto.

### 7.5.2 Measurement Results

Results are shown below.

**Table 7.5.2-1: Power Spectral Density**

| Frequency (MHz) | PSD (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-----------|-------------|-------------|
| 2405            | -13.92    | 8.0         | 21.92       |
| 2440            | -13.96    | 8.0         | 21.96       |
| 2480            | -14.01    | 8.0         | 22.01       |

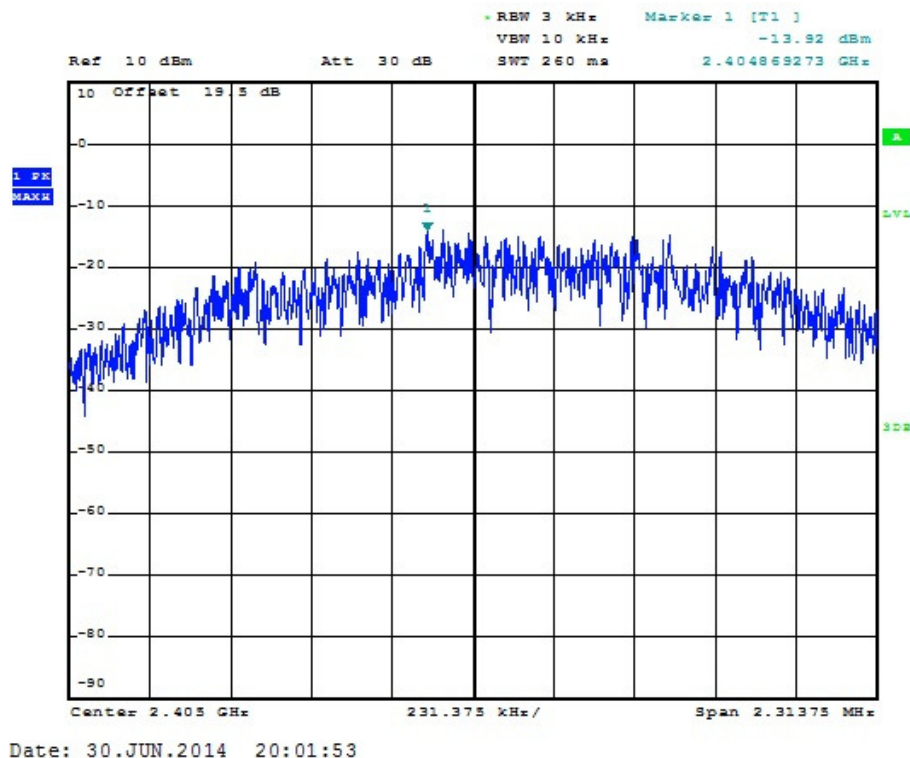

**Figure 7.5.2-1: Power Spectral Density - Low Channel**

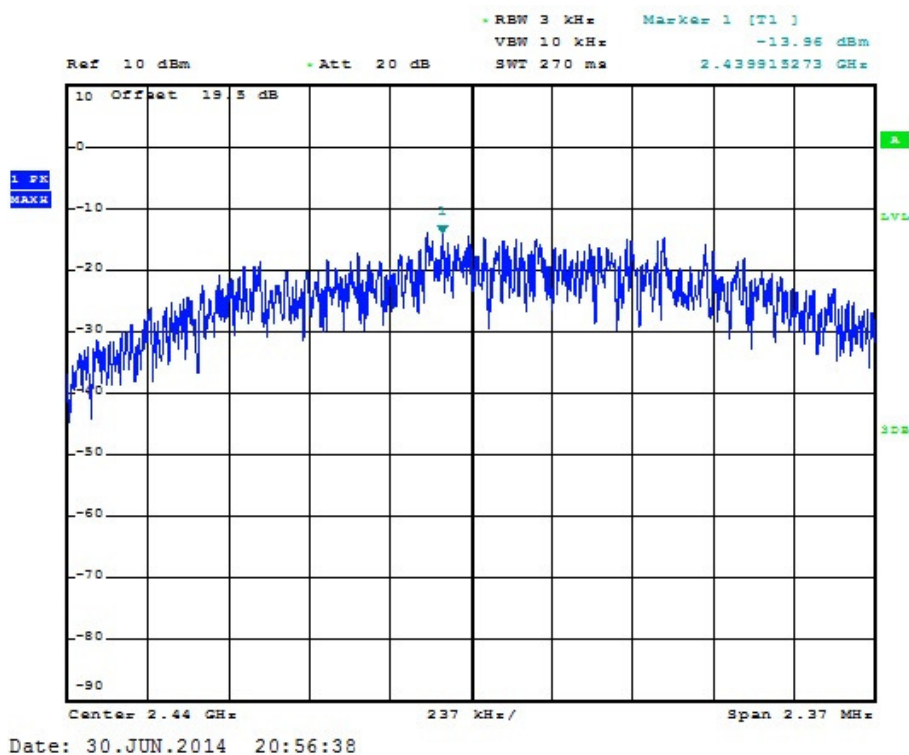


Figure 7.5.2-2: Power Spectral Density - Middle Channel

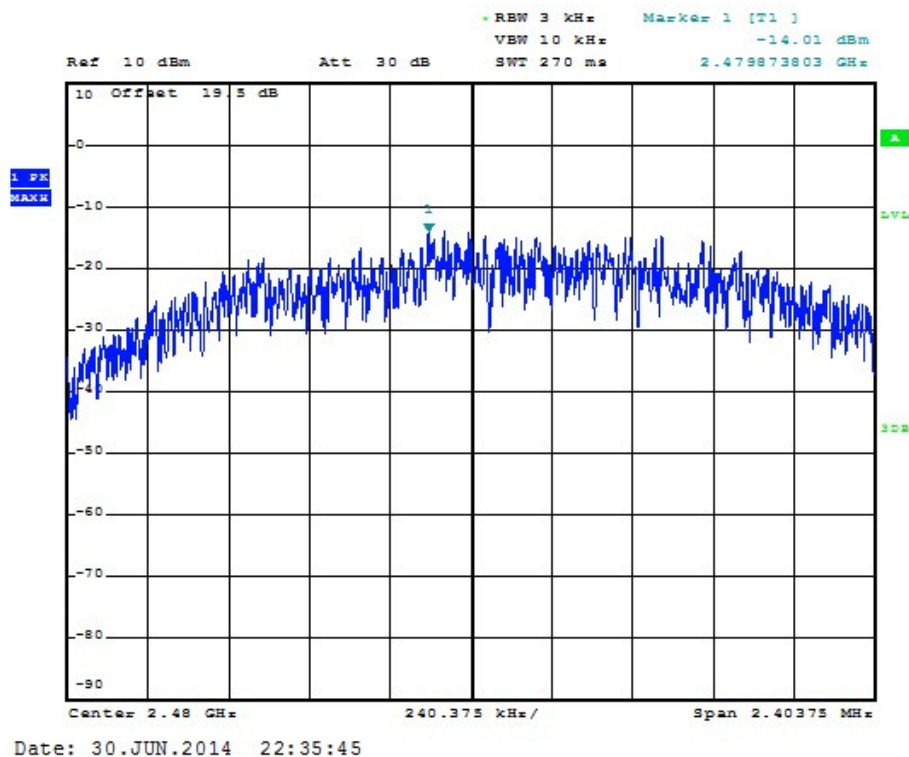


Figure 7.5.2-3: Power Spectral Density – High Channel

## **8 CONCLUSION**

In the opinion of ACS, Inc., the model S3I-0004 meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210 for the test procedures documented in the test report.

**END REPORT**