

## SAR TEST REPORT

For

Shenzhen Huaruian Technology Co.,Ltd

Mobile phone

Model No.: S400

Prepared for : Shenzhen Huaruian Technology Co.,Ltd  
Address : 4th Floor of Yuxing, Sanwei Science and Technology,  
Park, Hangcheng Road, Bao'an District, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an  
Avenue, Bao'an District, Shenzhen, Guangdong, China  
Tel : (86)755-82591330  
Fax : (86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : September 30, 2015  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : October 08, 2015 - October 13, 2015  
Date of Report : October 14, 2015

**SAR TEST REPORT****Report Reference No.....: LCS1510080075E**

Date Of Issue.....: October 14, 2015

**Testing Laboratory Name .....: Shenzhen LCS Compliance Testing Laboratory Ltd.**Address.....: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure .....: Full application of Harmonised standards ☒  
Partial application of Harmonised standards ☐  
Other standard testing method ☐**Applicant's Name.....: Shenzhen Huaruian Technology Co.,Ltd**Address.....: 4th Floor of Yuxing, Sanwei Science and Technology,  
Park, Hangcheng Road, Bao'an District, Shenzhen, China**Test Specification:**

SAR Max. Values is.....: 1.498 W/Kg (1g) for Head and 1.112 W/Kg (1g) for Body.

Standard .....: ANSI/IEEE C95.1:2005/ANSI/IEEE C95.3 :2002  
IEEE1528 :2013/47CFR §2.1093

Test Report Form No. ....: LCSEMC-1.0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF .....: Dated 2014-09

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description.....: Mobile phone**

Trade Mark.....: N/A


Model/Type Reference.....: S400

Ratings .....: DC 3.7V by li-ion battery(1500mAh)  
Adapter Parameters: Input: AC100-240V 50/60Hz 0.3A  
Output: DC 5V/ 1A**Result .....: Positive****Compiled by:**

Dick Su/ File administrators

**Supervised by:**

Glin Lu/ Technique principal

**Approved by:**

Gavin Liang/ Manager

**SAR -- TEST REPORT**

|                                                |                                          |
|------------------------------------------------|------------------------------------------|
| <b>Test Report No. :</b> <b>LCS1510080075E</b> | <u>October 14, 2015</u><br>Date of issue |
|------------------------------------------------|------------------------------------------|

|                          |                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------|
| Type / Model.....        | : S400                                                                                                          |
| EUT.....                 | : Mobile phone                                                                                                  |
| <b>Applicant.....</b>    | <b>: Shenzhen Huaruian Technology Co.,Ltd</b>                                                                   |
| Address.....             | : 4th Floor of Yuxing, Sanwei Science and Technology,<br>Park, Hangcheng Road, Bao'an District, Shenzhen, China |
| Telephone.....           | : /                                                                                                             |
| Fax.....                 | : /                                                                                                             |
| <b>Manufacturer.....</b> | <b>: Shenzhen Huaruian Technology Co.,Ltd</b>                                                                   |
| Address.....             | : 4th Floor of Yuxing, Sanwei Science and Technology,<br>Park, Hangcheng Road, Bao'an District, Shenzhen, China |
| Telephone.....           | : /                                                                                                             |
| Fax.....                 | : /                                                                                                             |
| <b>Factory.....</b>      | <b>: Shenzhen Huaruian Technology Co.,Ltd</b>                                                                   |
| Address.....             | : 4th Floor of Yuxing, Sanwei Science and Technology,<br>Park, Hangcheng Road, Bao'an District, Shenzhen, China |
| Telephone.....           | : /                                                                                                             |
| Fax.....                 | : /                                                                                                             |

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

|                                                                      |            |
|----------------------------------------------------------------------|------------|
| <b>1. TEST STANDARDS AND TEST DESCRIPTION.....</b>                   | <b>5</b>   |
| 1.1. TEST STANDARDS .....                                            | 5          |
| 1.2. TEST DESCRIPTION .....                                          | 5          |
| <b>2. SUMMARY .....</b>                                              | <b>6</b>   |
| 2.1. PRODUCT DESCRIPTION .....                                       | 6          |
| 2.2. SUMMARY SAR RESULTS .....                                       | 7          |
| 2.3. EUT OPERATION MODE.....                                         | 7          |
| 2.4. EUT CONFIGURATION.....                                          | 7          |
| <b>3. TEST ENVIRONMENT .....</b>                                     | <b>8</b>   |
| 3.1. TEST FACILITY .....                                             | 8          |
| 3.2. ENVIRONMENTAL CONDITIONS .....                                  | 8          |
| 3.3. SAR LIMITS .....                                                | 8          |
| 3.4. EQUIPMENTS USED DURING THE TEST .....                           | 9          |
| <b>4. SAR MEASUREMENTS SYSTEM CONFIGURATION .....</b>                | <b>10</b>  |
| 4.1. SARMEASUREMENT SET-UP.....                                      | 10         |
| 4.2. OPENSAR E-FIELD PROBE SYSTEM.....                               | 11         |
| 4.3. PHANTOMS.....                                                   | 12         |
| 4.4. DEVICE HOLDER .....                                             | 12         |
| 4.5. SCANNING PROCEDURE .....                                        | 13         |
| 4.6. DATA STORAGE AND EVALUATION.....                                | 13         |
| 4.7. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM..... | 14         |
| 4.8. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS .....   | 21         |
| 4.9. DIELECTRIC PERFORMANCE.....                                     | 22         |
| 4.10. BASIC SAR SYSTEM VALIDATION REQUIREMENTS .....                 | 23         |
| 4.11. SYSTEM SETUP .....                                             | 23         |
| 4.12. MEASUREMENT PROCEDURE.....                                     | 25         |
| <b>5. TEST CONDITIONS AND RESULTS.....</b>                           | <b>26</b>  |
| 5.1. TEST CONDITION:.....                                            | 26         |
| 5.2. TEST PROCEDURE: .....                                           | 26         |
| 5.3. CONDUCTED POWER MEASUREMENT .....                               | 26         |
| <b>6. SAR TEST RESULT .....</b>                                      | <b>32</b>  |
| 6.1. TEST CONDITION:.....                                            | 32         |
| 6.2. OPERATION MODE .....                                            | 32         |
| 6.3. SAR SUMMARY TEST RESULT .....                                   | 33         |
| 6.4. TEST REDUCTION PROCEDURE.....                                   | 38         |
| 6.5. MEASUREMENT UNCERTAINTY (700MHz-3GHz).....                      | 42         |
| 6.6. SYSTEM CHECK RESULTS .....                                      | 43         |
| 6.7. SAR TEST GRAPH RESULTS.....                                     | 49         |
| <b>7. CALIBRATION CERTIFICATES .....</b>                             | <b>64</b>  |
| 7.1. PROBE CALIBRATION CERITICATE .....                              | 65         |
| 7.2. SID835DIPOLE CALIBRATION CERITICATE.....                        | 83         |
| 7.3. SID1900 DIPOLE CALIBRATION CERITICATE.....                      | 94         |
| 7.4. SID2450 DIPOLE CALIBRATION CERITICATE.....                      | 105        |
| <b>8. SAR SYSTEM PHOTOGRAPHS .....</b>                               | <b>116</b> |
| <b>9. SETUP PHOTOGRAPHS.....</b>                                     | <b>117</b> |
| <b>10. EUT PHOTOGRAPHS.....</b>                                      | <b>123</b> |

# 1.TEST STANDARDS AND TEST DESCRIPTION

## 1.1. Test Standards

ANSI/IEEE C95.1: 2005:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,3 kHz to 300 GHz.

ANSI/IEEE C95.3: 2002:IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to Such Fields,100 kHz—300 GHz.

IEEE1528:2013:Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate.

KDB447498 D01v05r02:General RF Exposure Guidance.

KDB248227 D01 802.11Wifi SAR v02:SAR measure for 802.11 a/b/g.

KDB865664 D01v01r03:SAR measurement 100MHz to 6GHz.

KDB865664 D02v01r01:SAR Report.

KDB690783 D01v01r03:SAR listings on Grants.

KDB616217 D04v01r01: SAR for laptop and tablets v01r01

KDB648474 D04:SAR Handsets Multi Xmitter and Ant v01

KDB941225 D01v02:SAR Test for 3G devices.

KDB941225 D01v02r02:HSPA and 1xAdvanced.

KDB941225 D06:Hot Spot SAR v01

FCC Part 2:2012: frequency allocations and radio treaty matters; general rules and regulations

## 1.2. Test Description

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power .  
And Test device is identical prototype.

## 2. SUMMARY

### 2.1. Product Description

|                           |                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------|
| Product Name:             | Mobile phone                                                                                                  |
| Trade Mark:               | N/A                                                                                                           |
| Model/Type reference:     | S400                                                                                                          |
| Listed Model(s):          | S400                                                                                                          |
| Hardware Version          | PX6S45G REV1.4                                                                                                |
| Software Version:         | W83_MB_REV1.3                                                                                                 |
| Power supply:             | DC 3.7V by li-ion battery(1500mAh)<br>Adapter Parameters: Input: AC100-240V 50/60Hz 0.3A<br>Output: DC 5V/ 1A |
| <b>2G</b>                 |                                                                                                               |
| Operation Band:           | GSM850, PCS1900                                                                                               |
| Supported type:           | GSM/GPRS/EGPRS                                                                                                |
| Power Class:              | GSM850:Power Class 5<br>PCS1900:Power Class 0                                                                 |
| Modulation Type:          | GMSK for GSM/GPRS; 8PSK for EGPRS                                                                             |
| GSM Release Version       | R9                                                                                                            |
| GPRS Multislot Class      | 12                                                                                                            |
| EGPRS Multislot Class     | 12                                                                                                            |
| <b>WCDMA</b>              |                                                                                                               |
| Operation Band:           | FDD Band II , FDD Band V                                                                                      |
| Power Class:              | Power Class 3                                                                                                 |
| Modulation Type:          | QPSK for WCDMA/HSUPA/HSDPA                                                                                    |
| WCDMA Release Version:    | R7                                                                                                            |
| HSDPA Release Version:    | Release 8                                                                                                     |
| HSUPA Release Version:    | Release 6                                                                                                     |
| DC-HSUPA Release Version: | Not Supported                                                                                                 |
| <b>WIFI</b>               |                                                                                                               |
| Supported type:           | 802.11b/802.11g/802.11n(HT20)                                                                                 |
| Modulation:               | 802.11b: DSSS<br>802.11g/802.11n:OFDM                                                                         |
| Operation frequency:      | 2412MHz~2462MHz;                                                                                              |
| Channel number:           | 11                                                                                                            |
| Channel separation:       | 5MHz                                                                                                          |
| <b>Bluetooth</b>          |                                                                                                               |
| Version:                  | Supported BT4.0                                                                                               |
| Modulation:               | BLE, GFSK(1Mbps) , $\pi$ /4-DQPSK(2Mbps), 8DPSK(3Mbps)                                                        |
| Operation frequency:      | 2402MHz~2480MHz                                                                                               |
| Channel number:           | 40/79                                                                                                         |
| Channel separation:       | 2MHz/1MHz                                                                                                     |

## 2.2. Summary SAR Results

Table 1:Max. SAR Measured(1g)

| Exposure Configuration                | Technolohy Band | Highest Measured SAR<br>1g(W/Kg) |
|---------------------------------------|-----------------|----------------------------------|
| Head                                  | GSM850          | 0.992                            |
|                                       | PCS1900         | 0.848                            |
|                                       | WCDMA Band V    | 0.903                            |
|                                       | WCDMA Band II   | 0.522                            |
|                                       | WLAN2450        | 0.511                            |
| Body<br>(Separation Distance 15mm)    | GSM850          | 0.609                            |
|                                       | PCS1900         | 0.652                            |
|                                       | WCDMA Band V    | 0.913                            |
|                                       | WCDMA Band II   | 0.337                            |
|                                       | WLAN2450        | 0.273                            |
| Hotspot<br>(Separation Distance 10mm) | GSM850          | 0.673                            |
|                                       | PCS1900         | 0.720                            |
|                                       | WCDMA Band V    | 1.067                            |
|                                       | WCDMA Band II   | 0.557                            |
|                                       | WLAN2450        | 0.398                            |

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6W/Kg as averaged over any 1g tissue accordintg to the ANSI C95.1-1999.

For body worn operation,this devices has been tested and meets FCC RF exposure guidelines when used with any accessory that conrtains no metal and which provides a minimum separation distance of 15mm between this devices and the body of the user.User of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain iniform power output

## 2.3. EUT operation mode

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

|                       |             |                |   |
|-----------------------|-------------|----------------|---|
| <input type="radio"/> | Power Cable | Length (m) :   | / |
| <input type="radio"/> |             | Shield :       | / |
| <input type="radio"/> |             | Detachable :   | / |
| <input type="radio"/> | Multimeter  | Manufacturer : | / |
| <input type="radio"/> |             | Model No. :    | / |

### 3.TEST ENVIRONMENT

#### 3.1. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description

EMC Lab.

: CNAS Registration Number. is L4595.  
FCC Registration Number. is 899208.  
Industry Canada Registration Number. is 9642A-1.  
VCCI Registration Number. is C-4260 and R-3804.  
ESMD Registration Number. is ARCB0108.  
UL Registration Number. is 100571-492.  
TUV SUD Registration Number. is SCN1081.  
TUV RH Registration Number. is UA 50296516-001.

#### 3.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 18-25 ° C    |
|                       |              |
| Humidity:             | 40-65 %      |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

#### 3.3. SAR Limits

FCC Limit (1g Tissue)

| EXPOSURE LIMITS                                              | SAR (W/kg)                                                     |                                                        |
|--------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                              | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak(averaged over any 1 g of tissue)                | 1.6                                                            | 8.0                                                    |
| Spatial Peak(hands/wrists/<br>feet/anklesaveraged over 10 g) | 4.0                                                            | 20.0                                                   |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

### 3.4. Equipments Used during the Test

| Test Equipment                                   | Manufacturer             | Type/Model      | Serial Number          | Calibration      |                 |
|--------------------------------------------------|--------------------------|-----------------|------------------------|------------------|-----------------|
|                                                  |                          |                 |                        | Calibration Date | Calibration Due |
| PC                                               | Lenovo                   | G5005           | MY42081102             | N/A              | N/A             |
| Signal Generator                                 | Agilent                  | E4438C          | MY42081396             | 09/25/2015       | 09/24/2016      |
| Multimeter                                       | Keithley                 | Multimeter 2000 | 4059164                | 10/01/2015       | 09/30/2016      |
| S-parameter Network Analyzer                     | Agilent                  | 8753ES          | US38432944             | 09/25/2015       | 09/24/2016      |
| Wireless Communication Test Set                  | R & S                    | CMU200          | 105988                 | 09/25/2015       | 09/24/2016      |
| Power Meter                                      | Agilent                  | E4407B          | MY41440754             | 09/25/2015       | 09/24/2016      |
| E-Field PROBE                                    | SATIMO                   | SSE5            | SN 17/14 EP220         | 10/01/2015       | 09/30/2016      |
| DIPOLE 835                                       | SATIMO                   | SID 835         | SN 07/14 DIP 0G835-303 | 10/01/2015       | 09/30/2016      |
| DIPOLE 1900                                      | SATIMO                   | SID 1900        | SN 30/14 DIP 1G900-333 | 09/01/2015       | 08/31/2016      |
| DIPOLE 2450                                      | SATIMO                   | SID 2450        | SN 07/14 DIP 2G450-306 | 10/01/2015       | 09/30/2016      |
| COMOSAR OPEN Coaxial Probe                       | SATIMO                   | OCPG 68         | SN 40/14 OCPG68        | 10/01/2015       | 09/30/2016      |
| Communication Antenna                            | SATIMO                   | ANTA57          | SN 39/14 ANTA57        | 10/01/2015       | 09/30/2016      |
| Mobile Phone POSITIONING DEVICE                  | SATIMO                   | MSH98           | SN 40/14 MSH98         | N/A              | N/A             |
| DUMMY PROBE                                      | SATIMO                   | DP60            | SN 03/14 DP60          | N/A              | N/A             |
| SAM PHANTOM                                      | SATIMO                   | SAM117          | SN 40/14 SAM117        | N/A              | N/A             |
| Simulated Tissue 900 MHz Body and Head           | SATIMO                   | SAM-9-H         | SN 21/14 HLD438        | Each Time        | N/A             |
| Simulated Tissue 1900 MHz For Head               | SATIMO                   | SAM-18-H        | SN 21/14 HLF439        | Each Time        | N/A             |
| Simulated Tissue 2450 MHz Body and Head          | SATIMO                   | SAM-24-H        | SN 21/14 HLJ445        | Each Time        | N/A             |
| PHANTOM TABLE                                    | SATIMO                   | TABP98          | SN 40/14 TABP98        | N/A              | N/A             |
| 6 AXIS ROBOT                                     | KUKA                     | KR6-R900        | 501217                 | N/A              | N/A             |
| High Power Solid State Amplifier (80MHz~1000MHz) | Instruments for Industry | CMC150          | M631-0627              | 09/25/2015       | 09/24/2016      |
| Medium Power Solid State Amplifier (0.8~4.2GHz)  | Instruments for Industry | S41-25          | M629-0539              | 09/25/2015       | 09/24/2016      |
| Wave Tube Amplifier 48 GHz at 20Watt             | Hughes Aircraft Company  | 1277H02F000     | 102                    | 09/25/2015       | 09/24/2016      |

## 4.SAR MEASUREMENTS SYSTEM CONFIGURATION

### 4.1. SARMeasurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System(VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch,It sends an "Emergency signal" to the robot controller that to stop robot's moves

A computer operating Windows XP.

OPENSAR software


Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes .

System validation dipoles to validate the proper functioning of the system.

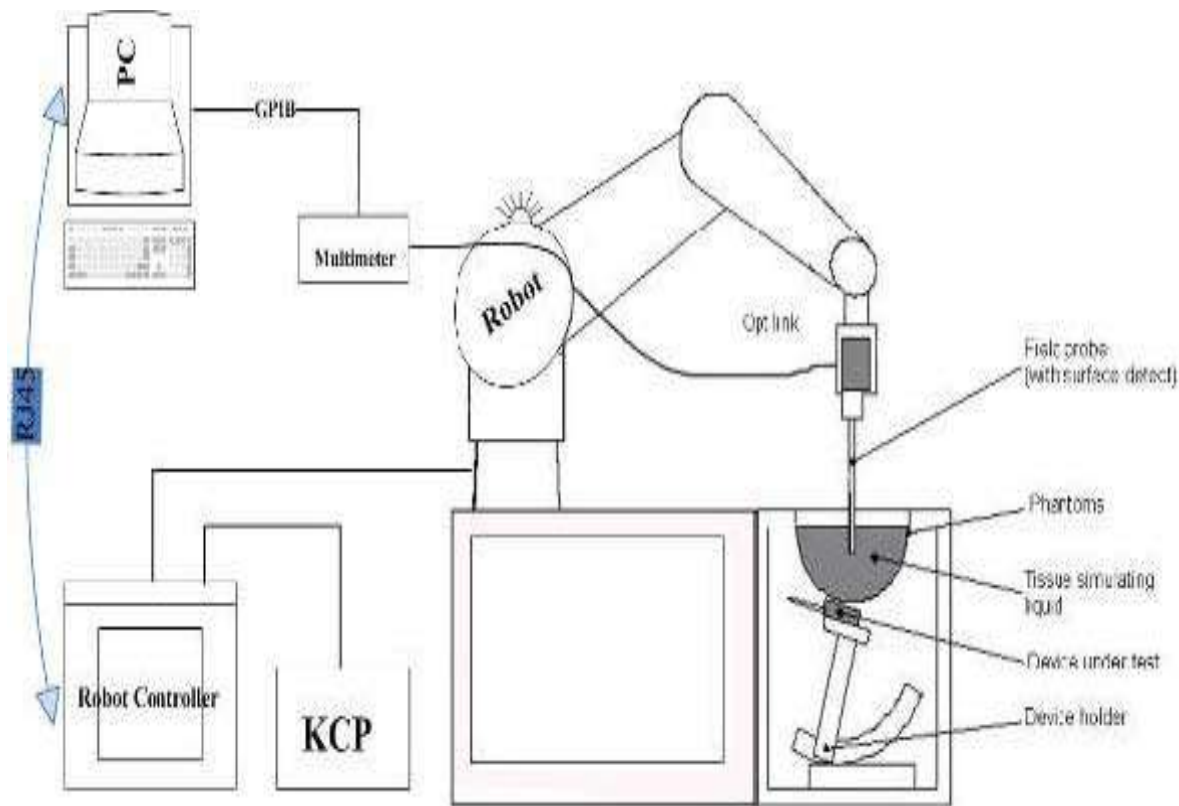

## 4.2. OPENSAR E-field Probe System

The SAR measurements were conducted with the dosimetric probe EP220 (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### Probe Specification

Construction Symmetrical design with triangular core

Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.


|               |                                                                                                                            |
|---------------|----------------------------------------------------------------------------------------------------------------------------|
| Frequency     | 700 MHz to 3 GHz;<br>Linearity: 0.25dB(700 MHz to 3GHz)                                                                    |
| Directivity   | 0.25 dB in HSL (rotation around probe axis)<br>0.5 dB in tissue material (rotation normal to probe axis)                   |
| Dynamic Range | 0.01W/kg to > 100 W/kg;<br>Linearity: 0.25 dB                                                                              |
| Dimensions    | Overall length: 330 mm (Tip: 16mm)<br>Tip diameter: 5 mm (Body: 8 mm)<br>Distance from probe tip to sensor centers: 2.5 mm |
| Application   | General dosimetry up to 3 GHz<br>Dosimetry in strong gradient fields<br>Compliance tests of Mobile Phones                  |



### Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

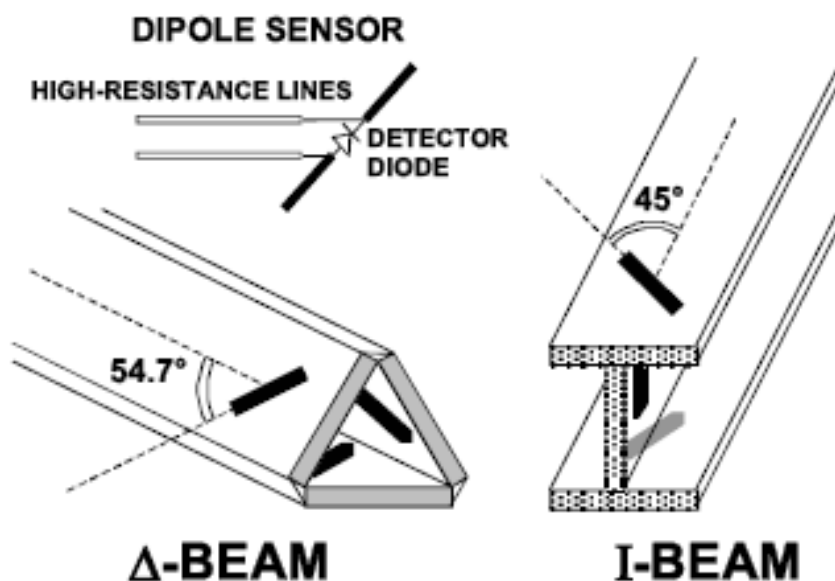

### 4.3. Phantoms

The SAM Phantom SAM117 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN62209-1, EN62209-2:2010. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

### 4.4. Device Holder

In combination with the Generic Twin Phantom SAM117, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device holder supplied by SATIMO

## 4.5. Scanning Procedure

**The procedure for assessing the peak spatial-average SAR value consists of the following steps**

### Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

### Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

### Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 4 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

### Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

## 4.6. Data Storage and Evaluation

### Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                           |                      |
|--------------------|---------------------------|----------------------|
| Probe parameters:  | - Sensitivity             | Normi, ai0, ai1, ai2 |
|                    | - Conversion factor       | ConvFi               |
|                    | - Diode compression point | Dcpi                 |
| Device parameters: | - Frequency               | f                    |
|                    | - Crest factor            | cf                   |
| Media parameters:  | - Conductivity            | $\sigma$             |
|                    | - Density                 | $\rho$               |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 $U_i$  = input signal of channel  $i$  ( $i = x, y, z$ )  
 $cf$  = crest factor of exciting field  
 $dcp_i$  = diode compression point

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H - field probes: } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 $\text{Norm}_i$  = sensor sensitivity of channel  $i$  ( $i = x, y, z$ )  
 [mV/(V/m)<sup>2</sup>] for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel  $i$  in V/m  
 $H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with  $SAR$  = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

#### 4.7. Position of the wireless device in relation to the phantom

##### General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.


The power flow density is calculated assuming the excitation field as a free space field

$$P_{(\text{pwe})} = \frac{E_{\text{tot}}^2}{3770} \text{ or } P_{(\text{pwe})} = H_{\text{tot}}^2 \cdot 37.7$$

Where  $P_{\text{pwe}}$  = Equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{\text{tot}}$  = total electric field strength in V/m

$H_{\text{tot}}$  = total magnetic field strength in A/m

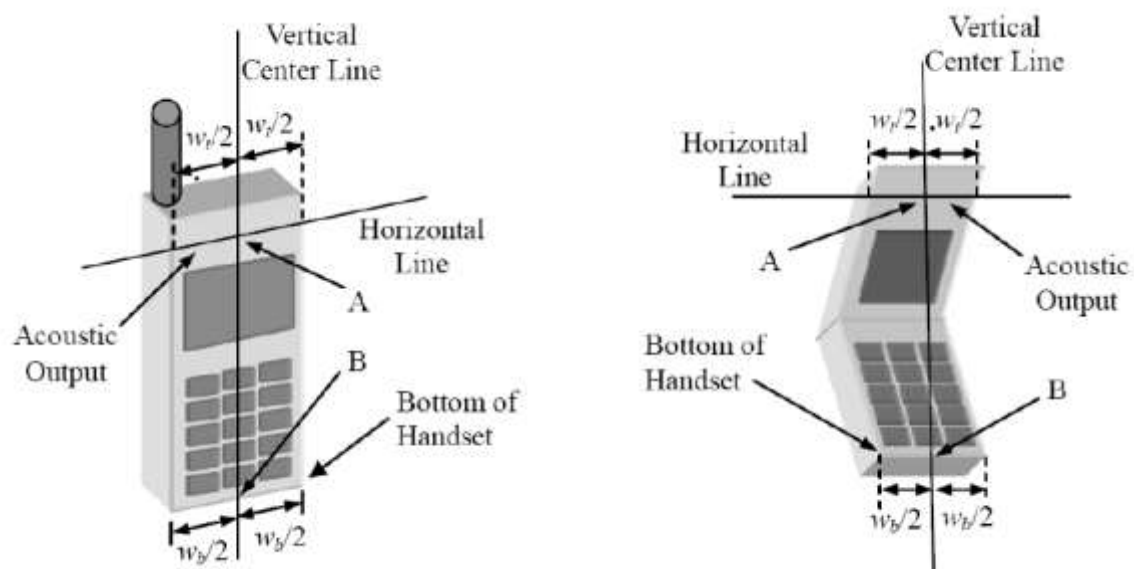


$w_t$  Width of the handset at the level of the acoustic

$w_b$  Width of the bottom of the handset


A Midpoint of the width  $w_t$  of the handset at the level of the acoustic output

B Midpoint of the width  $w_b$  of the bottom of the handset

Picture 1-a Typical "fixed" case handset    Picture 1-b Typical "clam-shell" case handset

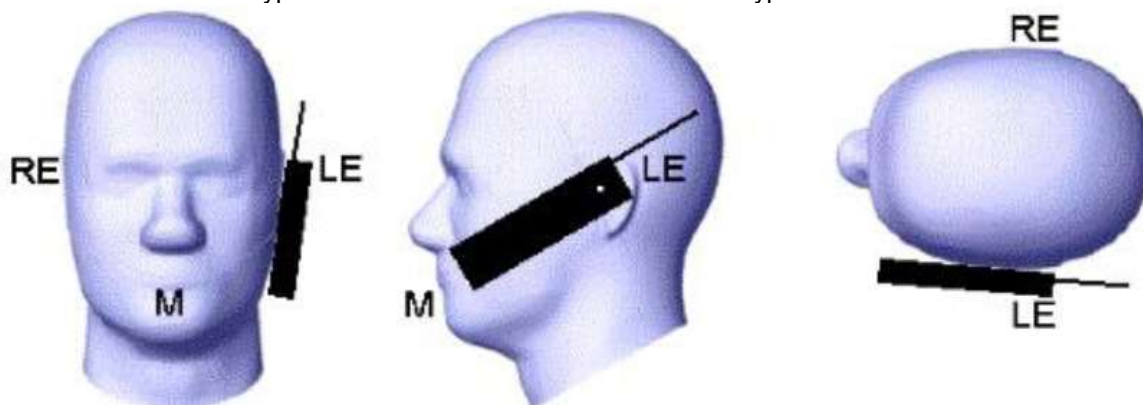


Picture 2 Cheek position of the wireless device on the left side of SAM

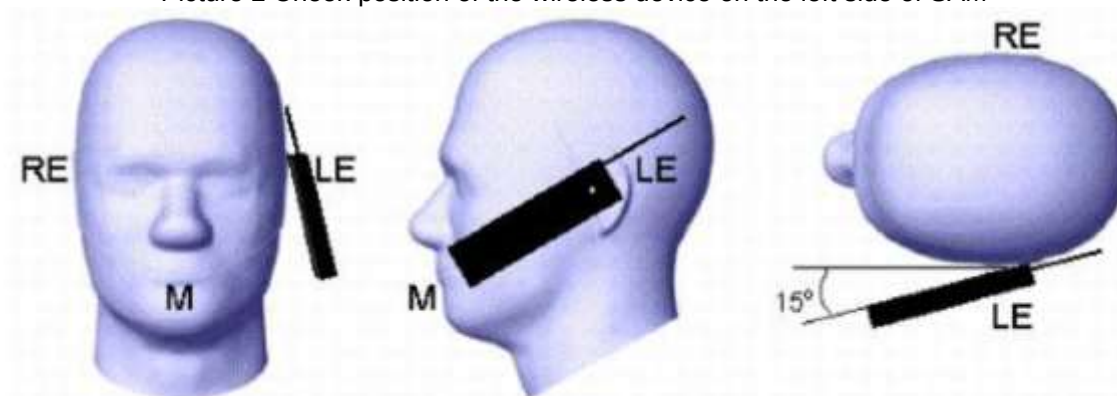

Picture 3 Tilt position of the wireless device on the left side of SAM

### Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

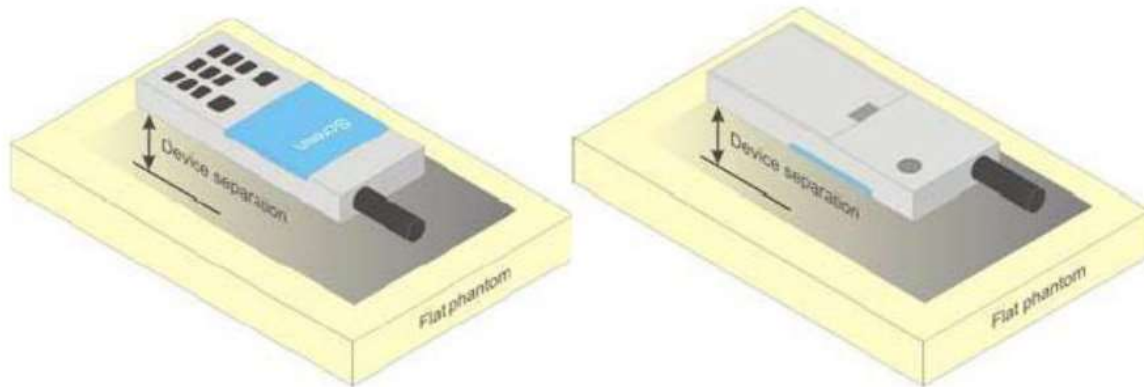

Picture 4 Test positions for body-worn devices

### Devices with hinged or swivel antenna(s)

For devices that employ one or more external antennas with variable positions (e.g. antenna extended, retracted, rotated), these shall be positioned in accordance with the user instructions provided by the manufacturer. For a device with only one antenna, if no intended antenna position is specified, tests shall be performed if applicable in both the horizontal and vertical positions relative to the phantom, and with the antenna oriented away from the body of the DUT (Figure 5) and/or with the antenna extended and retracted such as to obtain the highest exposure condition. For antennas that may be rotated through one or two planes, an evaluation should be made and documented in the measurement report to the highest exposure scenario and only that position(s) need(s) to be tested. For devices with multiple detachable antennas see provisions of 6.2.2.

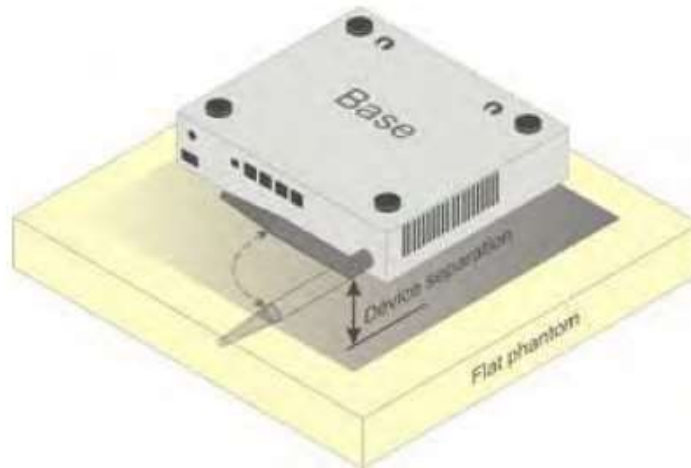


Figure 5— Device with swivel antenna (example of desktop device)

### Body-supported device

A typical example of a body supported device is a wireless enabled laptop device that among other orientations may be supported on the thighs of a sitting user. To represent this orientation, the device shall be positioned with its base against the flat phantom. Other orientations may be specified by the manufacturer in the user instructions. If the intended use is not specified, the device shall be tested directly against the flat phantom in all usable orientations.

The screen portion of the device shall be in an open position at a 90° angle as seen in Figure 6a (left side), or at an operating angle specified for intended use by the manufacturer in the operating instructions. Where a body supported device has an integral screen required for normal operation, then the screen-side will not need to be tested if the antenna(s) integrated in it ordinarily remain(s) 200 mm from the body. Where a screen mounted antenna is present, the measurement shall be performed with the screen against the flat phantom as shown in Figure 6a) (right side), if operating the screen against the body is consistent with the intended use.

Other devices that fall into this category include tablet type portable computers and credit card transaction authorisation terminals, point-of-sale and/or inventory terminals. Where these devices may be torso or limb-supported, the same principles for body-supported devices are applied.

The example in Figure 6b) shows a tablet form factor portable computer for which SAR should be separately assessed with


c). each surface and

d). the separation distances


positioned against the flat phantom that correspond to the intended use as specified by the manufacturer. If the intended use is not specified in the user instructions, the device shall be tested directly against the flat phantom in all usable orientations.

Some body-supported devices may allow testing with an external power supply (e.g. a.c. adapter) supplemental to the battery, but it shall be verified and documented in the measurement report that SAR is still conservative.


For devices that employ an external antenna with variable positions (e.g. swivel antenna), see 6.1.4.5 and Figure 5.

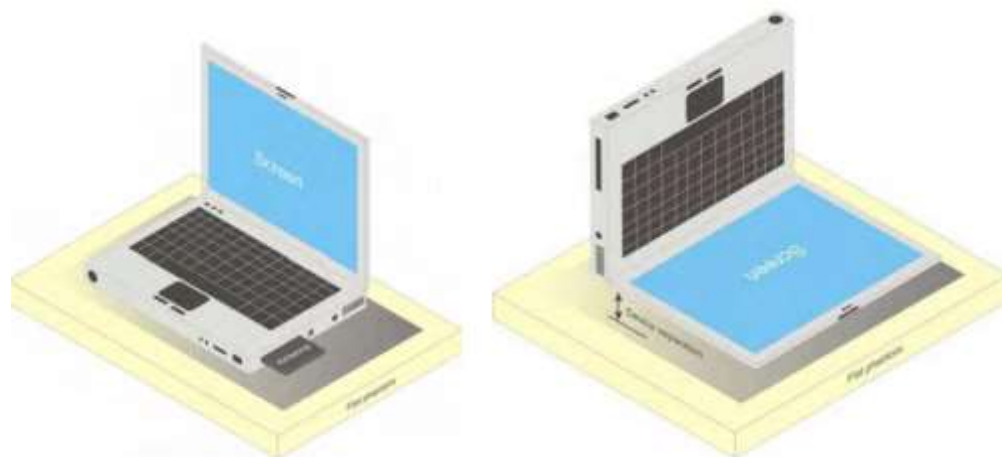

a) Portable computer with external antenna plug-in-radio-card (left side) or with internal antenna located in screen section (right side)

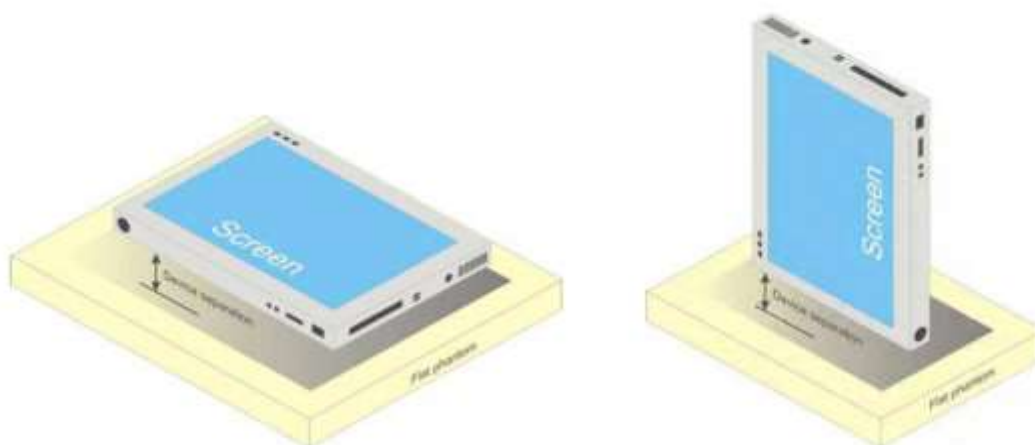

b) Tablet form factor portable computer

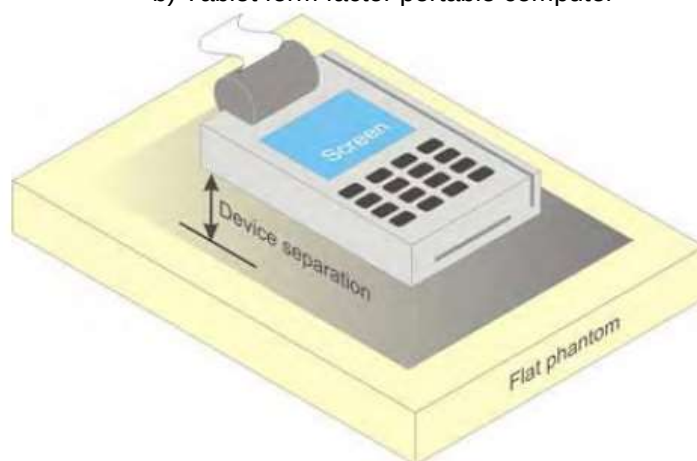


c) Wireless credit card transaction authorisation terminal

Figure 6 – Test positions for body supported devices

### Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.


The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 14 shows positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

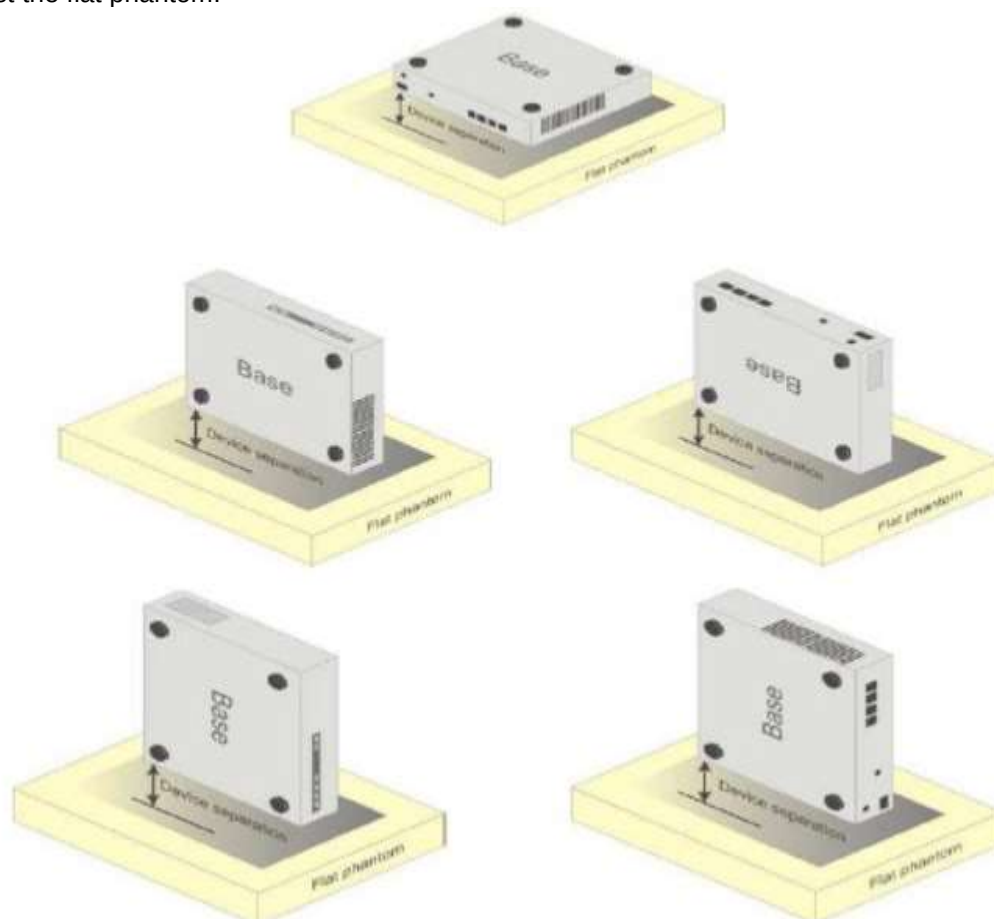


Picture 7 Test positions for desktop devices

### Front-of-face device

A typical example of a front-of-face device is a two-way radio that is held at a distance from the face of the user when transmitting. In these cases the device under test shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions (Figure 8a). If the intended use is not specified, a separation distance of 25 mm between the phantom surface and the device shall be used.

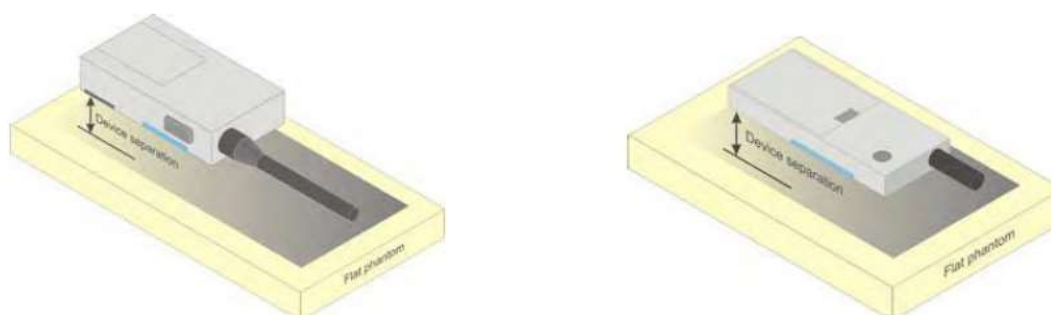

a) Two-way radios

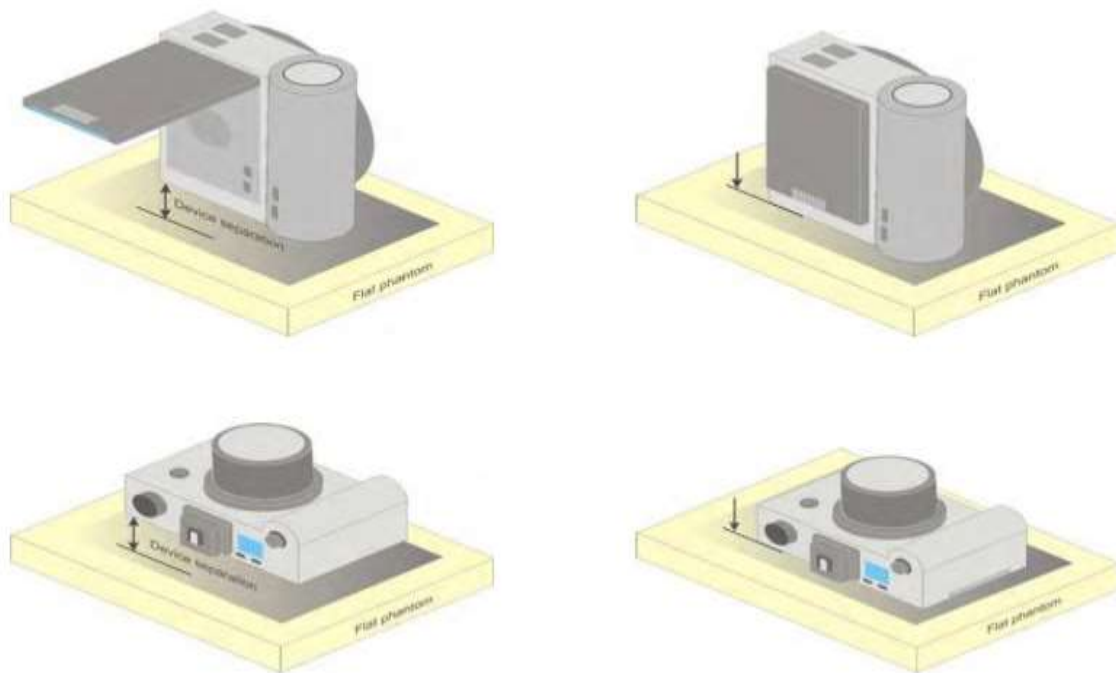

b) Still cameras and video cameras

Figure 8 – Test positions for front-of-face devices

Other devices that fall into this category include wireless-enabled still cameras and video cameras that can send data to a network or other device (Figure 8b). In the case of a device whose intended use requires a separation distance from the user (e.g., device with a viewing screen), this shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions (Figure 8b, left side). If the intended use is not specified, a separation distance of 25 mm between the phantom surface and the device shall be used.

For a device whose intended use requires the user's face to be in contact with the device (e.g., device with an optical viewfinder), this shall be placed directly against the phantom (Figure 8b, right side).

#### Hand-held usage of the device, not at the head or torso

Additional studies remain needed for devising a representative method for evaluating SAR in the hand of hand-held devices. Future versions of this standard are intended to contain a test method based on scientific data and rationale. Annex J presents the currently available test procedure.

#### Limb-worn device

A limb-worn device is a unit whose intended use includes being strapped to the arm or leg of the user while transmitting (except in idle mode). It is similar to a body-worn device. Therefore, the test positions of 6.1.4.4 also apply. The strap shall be opened so that it is divided into two parts as shown in Figure 9. The device shall be positioned directly against the phantom surface with the strap straightened as much as possible and the back of the device towards the phantom.

If the strap cannot normally be opened to allow placing in direct contact with the phantom surface, it may be necessary to break the strap of the device but ensuring to not damage the antenna.

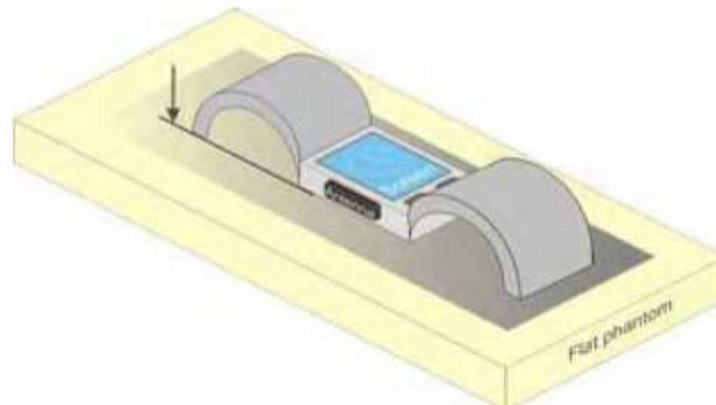


Figure 9 – Test position for limb-worn devices

**Clothing-integrated device**

A typical example of a clothing-integrated device is a wireless device (mobile phone) integrated into a jacket to provide voice communications through an embedded speaker and microphone. This category also includes headgear with integrated wireless devices.

All wireless or RF transmitting components shall be placed in the orientation and at the separation distance to the phantom surface that correspond to intended use of the device when it is integrated into the clothing (Figure 10).

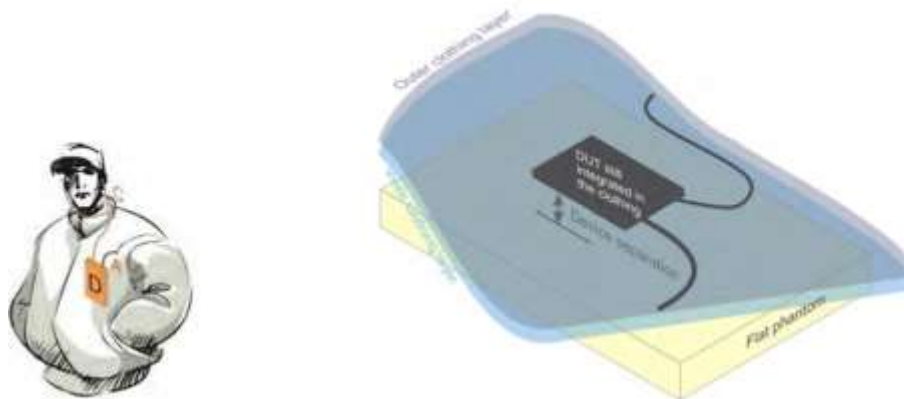


Figure 10– Test position for clothing-integrated wireless devices

#### 4.8. Tissue Dielectric Parameters for Head and Body Phantoms

The liquid used for the frequency range of 100MHz-6G consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The following Table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Table 2. Composition of the Head Tissue Equivalent Matter

| Ingredients<br>(% by weight)             | Frequency (MHz)                                     |                                                     |                                                      |                                                       |                                                       |
|------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|
|                                          | 835                                                 | 900                                                 | 1800                                                 | 2000                                                  | 2450                                                  |
| Water                                    | 41.45                                               | 40.92                                               | 16.33                                                | 54.89                                                 | 46.70                                                 |
| Sugar                                    | 56.0                                                | 56.5                                                | /                                                    | /                                                     | /                                                     |
| Salt                                     | 4.45                                                | 1.48                                                | 0.41                                                 | 0.18                                                  | /                                                     |
| Preventol                                | 0.19                                                | 0.1                                                 | /                                                    | /                                                     | /                                                     |
| Cellulose                                | 0.1                                                 | 0.4                                                 | /                                                    | /                                                     | /                                                     |
| Clycol Monobutyl                         | /                                                   | /                                                   | 65.3                                                 | 44.93                                                 | 53.3                                                  |
| Dielectric<br>Parameters Target<br>Value | f=835MHz<br>$\varepsilon = 41.5$<br>$\sigma = 0.90$ | f=900MHz<br>$\varepsilon = 41.5$<br>$\sigma = 0.97$ | f=1800MHz<br>$\varepsilon = 40.0$<br>$\sigma = 1.40$ | f=1950 MHz<br>$\varepsilon = 40.0$<br>$\sigma = 1.40$ | f=2450 MHz<br>$\varepsilon = 39.2$<br>$\sigma = 1.80$ |

Table 3. Composition of the Body Tissue Equivalent Matter

| Ingredients<br>(% by weight)             | Frequency (MHz)                                     |                                                       |                                                       |                                                       |                                                       |
|------------------------------------------|-----------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|
|                                          | 835                                                 | 1800                                                  | 1900                                                  | 2450                                                  | 2600                                                  |
| Water                                    | 52.4                                                | 69.91                                                 | 69.91                                                 | 73.2                                                  | 64.493                                                |
| Sugar                                    | 45.0                                                | 0.0                                                   | 0.0                                                   | 0.0                                                   | 0.0                                                   |
| Salt                                     | 1.4                                                 | 0.13                                                  | 0.13                                                  | 0.04                                                  | 0.024                                                 |
| HEC                                      | 1.0                                                 | 0.0                                                   | 0.0                                                   | 0.0                                                   | 0.0                                                   |
| Bactericide                              | 0.1                                                 | 0.0                                                   | 0.0                                                   | 0.0                                                   | 0.0                                                   |
| Triton X-100                             | 0.0                                                 | 0.0                                                   | 0.0                                                   | 0.0                                                   | 0.0                                                   |
| DGBE                                     | 0.0                                                 | 29.96                                                 | 29.96                                                 | 26.7                                                  | 32.252                                                |
| Dielectric<br>Parameters Target<br>Value | f=835MHz<br>$\varepsilon = 55.2$<br>$\sigma = 0.97$ | f=1800MHz<br>$\varepsilon = 53.30$<br>$\sigma = 1.52$ | f=1900MHz<br>$\varepsilon = 53.30$<br>$\sigma = 1.52$ | f=2450 MHz<br>$\varepsilon = 52.7$<br>$\sigma = 1.95$ | f=2450 MHz<br>$\varepsilon = 52.5$<br>$\sigma = 2.16$ |

Table 4. Targets for tissue simulating liquid

| Frequency (MHz) | Liquid Type | Liquid Type ( $\sigma$ ) | $\pm 5\%$ Range | Permittivity ( $\epsilon$ ) | $\pm 5\%$ Range |
|-----------------|-------------|--------------------------|-----------------|-----------------------------|-----------------|
| 150             | Head        | 0.76                     | 0.72~0.80       | 52.3                        | 49.69~54.92     |
| 300             | Head        | 0.87                     | 0.83~0.91       | 45.3                        | 43.04~47.57     |
| 450             | Head        | 0.87                     | 0.83~0.91       | 43.5                        | 41.33~45.68     |
| 835             | Head        | 0.90                     | 0.86~0.95       | 41.5                        | 39.43~43.58     |
| 900             | Head        | 0.97                     | 0.92~1.02       | 41.5                        | 39.43~43.58     |
| 915             | Head        | 0.98                     | 0.93~1.03       | 41.5                        | 39.43~43.58     |
| 1450            | Head        | 1.20                     | 1.14~1.26       | 40.5                        | 38.48~42.53     |
| 1610            | Head        | 1.29                     | 1.23~1.35       | 40.3                        | 38.29~42.32     |
| 1800-2000       | Head        | 1.40                     | 1.33~1.47       | 40.0                        | 38.00~42.00     |
| 2450            | Head        | 1.80                     | 1.71~1.89       | 39.2                        | 37.24~41.16     |
| 3000            | Head        | 2.40                     | 2.28~2.52       | 38.5                        | 36.58~40.43     |
| 5800            | Head        | 5.27                     | 5.01~5.53       | 35.3                        | 33.54~37.07     |
| 150             | Body        | 0.80                     | 0.76~0.84       | 61.9                        | 58.81~65.00     |
| 300             | Body        | 0.92                     | 0.87~0.97       | 58.2                        | 55.29~61.11     |
| 450             | Body        | 0.94                     | 0.89~0.99       | 56.7                        | 53.87~59.54     |
| 835             | Body        | 0.97                     | 0.92~1.02       | 55.2                        | 52.44~57.96     |
| 900             | Body        | 1.05                     | 1.00~1.10       | 55.0                        | 52.25~57.75     |
| 915             | Body        | 1.06                     | 1.01~1.11       | 55.0                        | 52.25~57.75     |
| 1450            | Body        | 1.30                     | 1.24~1.37       | 54.0                        | 51.30~56.70     |
| 1610            | Body        | 1.40                     | 1.33~1.47       | 53.8                        | 51.11~56.49     |
| 1800-2000       | Body        | 1.52                     | 1.44~1.60       | 53.3                        | 50.64~55.97     |
| 2450            | Body        | 1.95                     | 1.85~2.05       | 52.7                        | 50.07~55.34     |
| 3000            | Body        | 2.73                     | 2.59~2.87       | 52.0                        | 49.40~54.60     |
| 5800            | Body        | 6.00                     | 5.70~6.30       | 48.2                        | 45.79~50.61     |

#### 4.9. Dielectric Performance

##### Dielectric Performance of Head and Body Tissue Simulating Liquid

| Measurement is made at temperature 22.0℃ and relative humidity 52%.                             |             |              |             |              |
|-------------------------------------------------------------------------------------------------|-------------|--------------|-------------|--------------|
| Liquid temperature during the test: 22.0℃                                                       |             |              |             |              |
| Measurement Date: 835 MHz October 08, 2015;1900 MHz October 09, 2015;2450 MHz October 12, 2015. |             |              |             |              |
| Frequency (MHz)                                                                                 | Body Tissue |              | Head Tissue |              |
|                                                                                                 | $O'(S/m)$   | $\epsilon_r$ | $O'(S/m)$   | $\epsilon_r$ |
| 835                                                                                             | 0.98        | 55.19        | 0.92        | 41.26        |
| 1900                                                                                            | 1.53        | 53.28        | 1.43        | 40.15        |
| 2450                                                                                            | 1.96        | 52.75        | 1.85        | 39.23        |

#### 4.10. Basic SAR system validation requirements

The SAR system must be validated against its performance specifications before it is deployed. When SAR probe and system component or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such component. Reference dipoles are used with the required tissue-equivalent media for system validation.

The detailed system validation result are maintained by each test laboratory, which are normally not required for equipment approval. Only a tabulated summary of the system validation status, according to the validation date(s), measurement frequencies, SAR probe and tissue dielectric parameters is required in the SAR report.

LCS lab has performed the system validation at 10/28/2014, and all the measured results within  $\pm 10\%$  of the system calibrated SAR targets.

#### 4.11. System setup

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of component, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

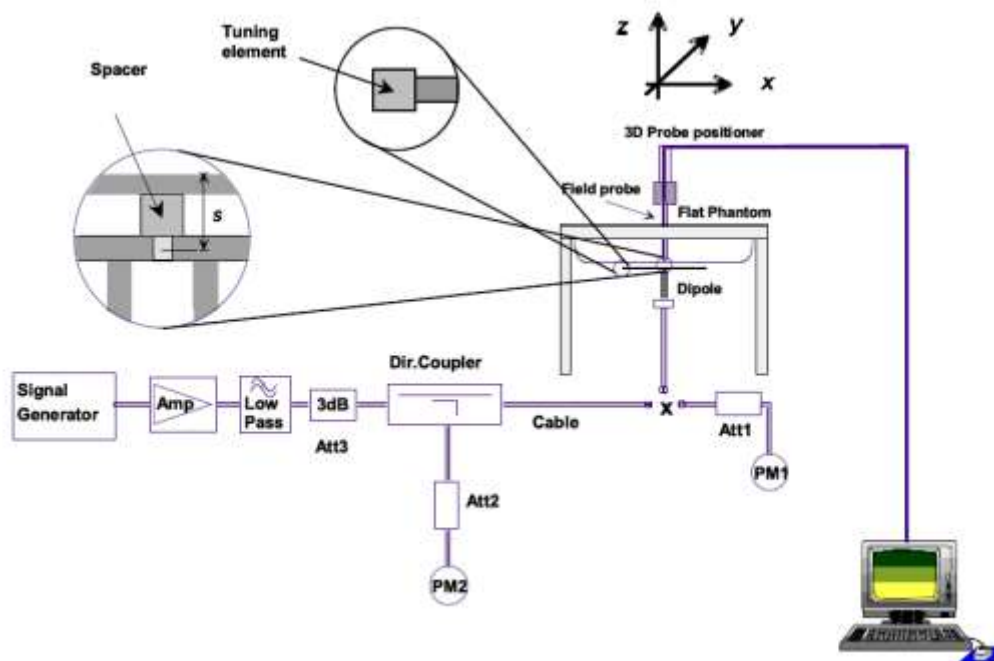




Photo of Dipole Setup

## System Validation of Head

| Measurement is made at temperature 22.0 °C and relative humidity 52%.                           |                 |                     |              |                      |              |             |              |
|-------------------------------------------------------------------------------------------------|-----------------|---------------------|--------------|----------------------|--------------|-------------|--------------|
| Measurement is made at temperature 22.0°C and relative humidity 54%.                            |                 |                     |              |                      |              |             |              |
| Measurement Date: 835 MHz October 08, 2015;1900 MHz October 09, 2015;2450 MHz October 12, 2015. |                 |                     |              |                      |              |             |              |
| Verification Results                                                                            | Frequency (MHz) | Target value (W/kg) |              | Measured value(W/kg) |              | Deviation   |              |
|                                                                                                 |                 | 1 g Average         | 10 g Average | 1 g Average          | 10 g Average | 1 g Average | 10 g Average |
| Body                                                                                            | 835             | 9.90                | 6.39         | 9.87                 | 6.43         | 0.303       | 0.625        |
|                                                                                                 | 1900            | 43.33               | 21.59        | 42.16                | 20.75        | 2.70        | 3.890        |
|                                                                                                 | 2450            | 54.65               | 24.58        | 54.54                | 24.93        | 0.202       | 1.420        |
| Head                                                                                            | 835             | 9.60                | 6.20         | 9.53                 | 6.26         | 0.737       | 0.968        |
|                                                                                                 | 1900            | 39.84               | 20.20        | 38.34                | 20.19        | 1.26        | 0.050        |
|                                                                                                 | 2450            | 53.89               | 24.15        | 52.36                | 24.34        | 2.840       | 0.786        |

#### 4.12. Measurement procedure

**The following procedure shall be performed for each of the test conditions**

- a) Measure the local SAR at a test point within 4 mm or less in the normal direction from the inner surface of the phantom.
- b) Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grid spacing of 20 mm for frequencies below 3 GHz and  $(60/f \text{ [GHz]})$  mm for frequencies of 3 GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. The maximum variation of the sensor-phantom surface shall be  $\pm 1$  mm for frequencies below 3 GHz and  $\pm 0.5$  mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than  $5^\circ$ . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional measurement distance to the phantom inner surface shorter than the probe diameter, additional
- c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated;
- d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step
- e) The horizontal grid step shall be  $(24 / f \text{ [GHz]})$  mm or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm by 22 mm and 22 mm. The grid step in the vertical direction shall be  $(8 - f \text{ [GHz]})$  mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be  $(12 / f \text{ [GHz]})$  mm or less but not more than 4 mm, and the spacing between further points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than  $5^\circ$ . If this cannot be achieved an additional uncertainty evaluation is needed.
- f) Use post processing (e.g. interpolation and extrapolation) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Test condition:

1. All test measurements carried out are traceable to national standard. The uncertainty of the measurement at a confidence level of approximately 95%(in the case where distributions are normal), with a coverage factor of 2, in the range of 30MHz-40GHz is  $\pm 1.5$ dB.
2. Environment conditions:
 

|                      |          |
|----------------------|----------|
| Temperature          | 23°C     |
| Relative Humidity    | 53%      |
| Atmospheric Pressure | 1019mbar |
3. Test Date: October 08, 2015 - October 13, 2015  
Tested By: Dick

### 5.2. Test Procedure:

#### EUT radio output power measurement

1. The transmitter output port was connected to base station emulator.
2. Establish communication link between emulator and EUT and Set EUT to operate at maximum output power all the time.
3. Select lowest, middle, and highest channels for each band and different possible test mode.
4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

### 5.3. Conducted Power Measurement

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU200) to ensure the maximum power transmission and proper modulation. Max Conducted power measurement results and power drift from the 2G report by Shenzhen LCS Compliance Testing Laboratory Ltd.

**Note:** CMU200 measures GSM peak and average output power for active timeslots. for SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

#### Source-based Time Averaged Burst Power calculation:

| Number of Time slot | 1       | 2       | 3       | 4       |
|---------------------|---------|---------|---------|---------|
| Duty cycle          | 1:8     | 1:4     | 1:2.66  | 1:2     |
| Duty cycle factor   | -9.03dB | -6.02dB | -4.26dB | -3.01dB |
| Crest factor        | 8       | 4       | 2.66    | 2       |

#### Remark: Time slot duty cycle factor = $10 \cdot \log(1/\text{Time slot Duty Cycle})$

Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9.03dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6.02dB

Source based time averaged power = Maximum burst averaged power (3 Uplink) - 4.26dB

Source based time averaged power = Maximum burst averaged power (4 Uplink) - 3.01dB

The signalling modes differ as follows:

| Mode | Code Scheme  | Modulation | Mode | Code Scheme  |
|------|--------------|------------|------|--------------|
| GPRS | CS1 to CS4   | GMSK       | GPRS | CS1 to CS4   |
| EDGE | MCS1 to MCS4 | GMSK       | EDGE | MCS1 to MCS4 |
| EDGE | MCS5 to MCS9 | 8PSK       | EDGE | MCS5 to MCS9 |

**Conducted power measurement results for GSM850/PCS1900**

| GSM850  | Conducted Power (dBm)      |                            |                            |
|---------|----------------------------|----------------------------|----------------------------|
|         | Channel 128<br>(824.2MHz)  | Channel 190<br>(836.6MHz)  | Channel 251<br>(848.8MHz)  |
|         | 33.32                      | 32.21                      | 32.18                      |
| PCS1900 | Conducted Power (dBm)      |                            |                            |
|         | Channel 512<br>(1850.2MHz) | Channel 661<br>(1880.0MHz) | Channel 810<br>(1909.8MHz) |
|         | 29.68                      | 29.58                      | 29.49                      |

**Conducted power measurements of GSM 850/ EDGE 850**

| GPRS     | Measured Power (dBm) |          |          | Calculation<br>(dB) | Averaged Power (dBm) |          |          |
|----------|----------------------|----------|----------|---------------------|----------------------|----------|----------|
|          | 824.2MHz             | 836.6MHz | 848.8MHz |                     | 824.2MHz             | 836.6MHz | 848.8MHz |
| 1 Txslot | 31.78                | 31.67    | 31.56    | -9.03               | 22.75                | 22.64    | 22.53    |
| 2 Txslot | 31.69                | 31.56    | 31.45    | -6.02               | 25.67                | 25.54    | 25.43    |
| 3 Txslot | 31.86                | 31.64    | 31.51    | -4.26               | 27.6                 | 27.38    | 27.25    |
| 4 Txslot | 31.55                | 31.49    | 31.65    | -3.01               | 28.54                | 28.48    | 28.64    |
| EDGE     | Measured Power (dBm) |          |          | Calculation<br>(dB) | Averaged Power (dBm) |          |          |
|          | 824.2MHz             | 836.6MHz | 848.8MHz |                     | 824.2MHz             | 836.6MHz | 848.8MHz |
| 1 Txslot | 30.45                | 30.42    | 30.47    | -9.03               | 21.42                | 21.39    | 21.44    |
| 2 Txslot | 30.43                | 30.30    | 30.28    | -6.02               | 24.41                | 24.28    | 24.26    |
| 3 Txslot | 30.50                | 30.41    | 30.44    | -4.26               | 26.24                | 26.15    | 26.18    |
| 4 Txslot | 30.48                | 30.38    | 30.36    | -3.01               | 27.47                | 27.37    | 27.35    |

**Note:**

1. The conducted power of GSM850 is measured with RMS detector.
2. Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
3. According the KDB941225 D03, the bolded GPRS 4TX mode was selected for SAR testing according to the highest frame-averaged output power table.

**Conducted power measurements of PCS 1900/ EDGE 1900**

| GPRS     | Measured Power (dBm) |           |           | Calculation<br>n<br>(dB) | Averaged Power (dBm) |           |           |
|----------|----------------------|-----------|-----------|--------------------------|----------------------|-----------|-----------|
|          | 1850.2MHz            | 1880.0MHz | 1909.8MHz |                          | 1850.2MHz            | 1880.0MHz | 1909.8MHz |
| 1 Txslot | 28.65                | 28.55     | 28.47     | -9.03                    | 19.62                | 21.46     | 19.44     |
| 2 Txslot | 28.54                | 28.48     | 28.39     | -6.02                    | 22.52                | 22.46     | 22.37     |
| 3 Txslot | 28.46                | 28.43     | 28.56     | -4.26                    | 24.20                | 24.17     | 24.30     |
| 4 Txslot | 28.44                | 28.36     | 28.51     | -3.01                    | 25.43                | 25.35     | 25.50     |
| EDGE     | Measured Power (dBm) |           |           | Calculation<br>n<br>(dB) | Averaged Power (dBm) |           |           |
|          | 1850.2MHz            | 1880.0MHz | 1909.8MHz |                          | 1850.2MHz            | 1880.0MHz | 1909.8MHz |
| 1 Txslot | 27.52                | 27.46     | 27.48     | -9.03                    | 18.49                | 21.46     | 18.45     |
| 2 Txslot | 27.39                | 27.33     | 27.30     | -6.02                    | 21.37                | 21.31     | 21.28     |
| 3 Txslot | 27.61                | 27.55     | 27.51     | -4.26                    | 23.35                | 23.29     | 23.25     |
| 4 Txslot | 27.53                | 27.35     | 27.43     | -3.01                    | 24.52                | 24.34     | 24.42     |

**Note:**

1. The conducted power of GSM1900 is measured with RMC detector.
2. Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
3. According the KDB941225 D03 ,the bolded GPRS 4TX mode was selected for SAR testing according to the highest frame-averaged output power table.

**Conducted power measurements of UMTS Band V**

| Item  | Band         | FDD Band V result (dBm) |        |        |
|-------|--------------|-------------------------|--------|--------|
|       |              | Test Channel            |        |        |
|       |              | 4132CH                  | 4182CH | 4233CH |
| WCDMA | 12.2kbps RMC | 22.62                   | 22.79  | 22.97  |
| HSDPA | Subtest 1    | 21.61                   | 21.82  | 21.96  |
|       | Subtest 2    | 21.73                   | 21.71  | 21.68  |
|       | Subtest 3    | 20.96                   | 20.52  | 20.36  |
|       | Subtest 4    | 20.78                   | 20.16  | 20.51  |
| HSUPA | Subtest 1    | 21.14                   | 21.68  | 21.32  |
|       | Subtest 2    | 19.61                   | 19.98  | 20.03  |
|       | Subtest 3    | 20.60                   | 20.78  | 20.91  |
|       | Subtest 4    | 20.95                   | 20.37  | 20.17  |
|       | Subtest 5    | 19.95                   | 20.22  | 20.44  |

**Note:**

1. The conducted power of UMTS Band V is measured with RMS detector.
2. According to KDB941225 D01v02, when maximum output of each RF channel with HSDPA active is  $\leq 1/4$  dB higher than without HSDPA using 12.2kbps RMC and maximum SAR for 12.2kbps RMC is  $\leq 75\%$  of SAR limit, SAR evaluation for HSDPA is not required.
3. According to KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPS active is  $\leq 1/4$  dB higher than without HSPA+/DC-HSDPS using 12.2kbps RMC or the maximum reported SAR for 12.2kbps RMC without HSPA+/DC-HSDPS is  $\leq 75\%$  of SAR limit, SAR evaluation for HSPA+/DC-HSDPS is not required.

**Conducted power measurements of UMTS Band II**

| Item  | Mode         | FDD Band II result (dBm) |        |        |
|-------|--------------|--------------------------|--------|--------|
|       |              | Test Channel             |        |        |
|       |              | 9262CH                   | 9400CH | 9538CH |
| WCDMA | 12.2kbps RMC | 23.10                    | 22.72  | 22.91  |
| HSDPA | Subtest 1    | 22.77                    | 21.48  | 21.97  |
|       | Subtest 2    | 21.67                    | 21.77  | 21.91  |
|       | Subtest 3    | 21.18                    | 20.75  | 21.54  |
|       | Subtest 4    | 21.20                    | 20.40  | 21.64  |
| HSUPA | Subtest 1    | 21.11                    | 21.35  | 21.23  |
|       | Subtest 2    | 19.83                    | 20.55  | 20.52  |
|       | Subtest 3    | 20.04                    | 20.56  | 19.98  |
|       | Subtest 4    | 20.11                    | 20.09  | 20.45  |
|       | Subtest 5    | 20.63                    | 20.33  | 20.13  |

**Note:**

1. The conducted power of UMTS Band II is measured with RMS detector.
2. According to KDB941225 D01v02, when maximum output of each RF channel with HSDPA active is  $\leq 1/4$  dB higher than without HSDPA using 12.2kbps RMC and maximum SAR for 12.2kbps RMC is  $\leq 75\%$  of SAR limit, SAR evaluation for HSDPA is not required.
3. According to KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPS active is  $\leq 1/4$  dB higher than without HSPA+/DC-HSDPS using 12.2kbps RMC or the maximum reported SAR for 12.2kbps RMC without HSPA+/DC-HSDPS is  $\leq 75\%$  of SAR limit, SAR evaluation for HSPA+/DC-HSDPS is not required.

**Conducted power measurements of Wifi 2.4GHz**

| Mode             | channel | Frequency (MHz) | Conducted output AVG power(dBm) | Test Rate Date |
|------------------|---------|-----------------|---------------------------------|----------------|
| 802.11b          | 1       | 2412            | 16.87                           | 1Mbps          |
|                  | 6       | 2437            | 16.95                           | 1Mbps          |
|                  | 11      | 2462            | 16.70                           | 1Mbps          |
| 802.11g          | 1       | 2412            | 15.29                           | 6Mbps          |
|                  | 6       | 2437            | 15.65                           | 6Mbps          |
|                  | 11      | 2462            | 15.47                           | 6Mbps          |
| 802.11n<br>20MHz | 1       | 2412            | 15.02                           | 6.5Mbps        |
|                  | 6       | 2.437           | 14.89                           | 6.5Mbps        |
|                  | 11      | 2462            | 15.13                           | 6.5Mbps        |

**Note:**

According to the KDB248227, for WiFi 2.4G, highest average RF output power channel for the lowest data rate of 802.11b mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations(including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode.

**Conducted power measurement of BluetoothV4.0**

| Mode           | channel | Frequency (MHz) | Conducted output power |
|----------------|---------|-----------------|------------------------|
|                |         |                 | (dBm)                  |
| BLE            | 0       | 2402            | -2.951                 |
|                | 20      | 2440            | -2.358                 |
|                | 39      | 2480            | -2.672                 |
| GFSK(1M)       | 0       | 2402            | 4.471                  |
|                | 39      | 2441            | 4.537                  |
|                | 78      | 2480            | 4.431                  |
| $\pi/4$ -DQPSK | 0       | 2402            | 4.452                  |
|                | 39      | 2441            | 4.366                  |
|                | 78      | 2480            | 4.508                  |
| 8DPSK          | 0       | 2402            | 3.191                  |
|                | 39      | 2441            | 3.297                  |
|                | 78      | 2480            | 3.153                  |

**Note:**

According to KDB447498 D01 General RF Exposure Guidance v05r01 standalone SAR test exclusion considerations, SAR test is not required in 100MHz to 6GHz at test separation distances  $\leq 50$ mm, if the output of EUT satisfy the following equation:

$$[(\text{max power of channel, including tune-up tolerance, mW}) / (\text{min test separation distance, mm})] \cdot [f_{(\text{GHz})}]^{1/2} \leq 3.0$$

For 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR.

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.5 and 7.5 are referred to as the numeric thresholds

## 6.SAR TEST RESULT

### 6.1. Test condition:

1. SAR Measuremnt

The distance between the EUT and the antenna of the emulator is more than 50cm and the out put power radiated from the emulator antenna is at least 30dB less than the output power of EUT.

2. Measurement Uncertainty: See page 36and37 for detail

3. Environmental Conditions

|                      |          |
|----------------------|----------|
| Temperature          | 23℃      |
| Relative Humidity    | 53%      |
| Atmospheric Pressure | 1019mbar |

4. Test Date: October 08, 2015 - October 13, 2015

Tested By: Dick

### 6.2. Operation Mode

- According to KDB 447498 D01 v05r02 ,for each exposure position, if the highest 1-g SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional.

- Per KDB 865664 D01 v01r03,for each frequency band, if the measured SAR is  $\geq 0.8$ W/Kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.

(1) When the original highest measured SAR is  $\geq 0.8$ W/Kg, repeat that measurement once.

(2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/Kg.

(3) Perform a third repeated measurement only if the original, first and second repeated measurement is  $\geq$

1.5 W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is  $\geq 1.20$ .

- Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.

(1) the procedures explained in footnote 11 of the standard may be applied to reduce SAR test requirements for GPRS modes when the source-based time-averaged output power for each data mode is lower than that in the normal GSM voice mode.

(2) when multiple slots can be used, the device should be tested to account for the maximum source-based time-averaged output power.

(3) when the 1-g SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional.

- Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:

Maximum Scaling SAR =tested SAR (Max.)  $\times$  [maximum turn-up power (mw)/ maximum measurement output power(mw) ]

### 6.3. SAR summary Test result

#### SAR Values for GSM850 Band -Head

| Frequency |         | Test Position | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|---------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |               |           |              |                 |                       |                     |                     |                |
| 836.6     | 190     | Left Cheek    | GSM       | 0.992        | 4.47            | 32.21                 | 34.00               | 1.498               | 1.60           |
| 836.6     | 190     | Left Tilt     | GSM       | 0.665        | -0.90           | 32.21                 | 34.00               | 1.004               | 1.60           |
| 836.6     | 190     | Right Cheek   | GSM       | 0.923        | -0.02           | 32.21                 | 34.00               | 1.394               | 1.60           |
| 836.6     | 190     | Right Tilt    | GSM       | 0.493        | 0.74            | 32.21                 | 34.00               | 0.744               | 1.60           |
| 824.2     | 128     | Left Cheek    | GSM       | 0.834        | 3.71            | 32.21                 | 34.00               | 1.259               | 1.60           |
| 848.8     | 251     | Left Cheek    | GSM       | 0.739        | 3.73            | 32.21                 | 34.00               | 1.116               | 1.60           |
| 824.2     | 128     | Right Cheek   | GSM       | 0.864        | -2.47           | 32.21                 | 34.00               | 1.305               | 1.60           |
| 848.8     | 251     | Right Cheek   | GSM       | 0.652        | 0.38            | 32.21                 | 34.00               | 0.985               | 1.60           |

#### SAR Values for GSM850 Band -Body

| Frequency |         | Test Position (15mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 836.6     | 190     | Front                | GPRS(4TX) | 0.499        | -3.58           | 31.92                 | 32.00               | 0.508               | 1.60           |
| 836.6     | 190     | Rear                 | GPRS(4TX) | 0.609        | -1.29           | 31.92                 | 32.00               | 0.620               | 1.60           |

#### Hotspot SAR test results of GSM850

| Frequency |         | Test Position (10mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 836.0     | 190     | Front                | GPRS(4TX) | 0.510        | 2.50            | 31.92                 | 32.00               | 0.519               | 1.60           |
| 836.0     | 190     | Rear                 | GPRS(4TX) | 0.673        | -0.44           | 31.92                 | 32.00               | 0.686               | 1.60           |
| 836.0     | 190     | Left                 | GPRS(4TX) | 0.235        | 2.61            | 31.92                 | 32.00               | 0.239               | 1.60           |
| 836.0     | 190     | Right                | GPRS(4TX) | 0.264        | 3.53            | 31.92                 | 32.00               | 0.269               | 1.60           |
| 836.0     | 190     | Top                  | GPRS(4TX) | 0.226        | 1.97            | 31.92                 | 32.00               | 0.230               | 1.60           |

#### Note:

- 1.SAR test was performed in the middle channel only the measured level was<50% of the SAR of limit, test in the low and high channel is optional.
- 2.The EUT is a Class B mobile phone which can be attached to both GPRS and GSM services, using one service at a time
- 3.The Multi-slot Classes of EUT is Class12 which has maximum 1 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worse case based on the output power measurements above.

**SAR Values for PCS1900 Band -Head**

| Frequency |         | Test Position | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|---------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |               |           |              |                 |                       |                     |                     |                |
| 1880.0    | 661     | Left Cheek    | GSM       | 0.832        | -1.49           | 32.56                 | 33.00               | 0.921               | 1.60           |
| 1880.0    | 661     | Left Tilt     | GSM       | 0.607        | 3.35            | 32.56                 | 33.00               | 0.672               | 1.60           |
| 1880.0    | 661     | Right Cheek   | GSM       | 0.848        | 0.08            | 32.56                 | 33.00               | 0.938               | 1.60           |
| 1880.0    | 661     | Right Tilt    | GSM       | 0.587        | 2.44            | 32.56                 | 33.00               | 0.650               | 1.60           |
| 1850.2    | 512     | Left Cheek    | GSM       | 0.626        | -2.44           | 32.56                 | 33.00               | 0.693               | 1.60           |
| 1909.8    | 810     | Left Cheek    | GSM       | 0.803        | 1.76            | 32.56                 | 33.00               | 0.889               | 1.60           |
| 1850.2    | 512     | Right Cheek   | GSM       | 0.628        | 2.07            | 32.56                 | 33.00               | 0.695               | 1.60           |
| 1909.8    | 810     | Right Cheek   | GSM       | 0.820        | -2.88           | 32.56                 | 33.00               | 0.907               | 1.60           |

**SAR Values for PCS1900 Band -Body**

| Frequency |         | Test Position (15mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 1880.0    | 661     | Front                | GPRS(4TX) | 0.502        | 5.23            | 31.53                 | 32.00               | 0.559               | 1.60           |
| 1880.0    | 661     | Rear                 | GPRS(4TX) | 0.652        | 0.63            | 31.53                 | 32.00               | 0.727               | 1.60           |

**Hotspot SAR test results of GSM 1900**

| Frequency |         | Test Position (10mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 1880.0    | 661     | Front                | GPRS(4TX) | 0.565        | 0.08            | 31.53                 | 32.00               | 0.630               | 1.60           |
| 1880.0    | 661     | Rear                 | GPRS(4TX) | 0.720        | -0.50           | 31.53                 | 32.00               | 0.802               | 1.60           |
| 1880.0    | 661     | Left                 | GPRS(4TX) | 0.232        | -0.84           | 31.53                 | 32.00               | 0.259               | 1.60           |
| 1880.0    | 661     | Right                | GPRS(4TX) | 0.234        | 3.61            | 31.53                 | 32.00               | 0.261               | 1.60           |
| 1880.0    | 661     | Top                  | GPRS(4TX) | 0.228        | 2.46            | 31.53                 | 32.00               | 0.254               | 1.60           |

**Note:**

- 1.SAR test was performed in the middle channel only the measured level was <50% of the SAR of limit, test in the low and high channel is optional.
- 2.The EUT is a Class B mobile phone which can be attached to both GPRS and GSM services, using one service at a time
- 3.The Multi-slot Classes of EUT is Class12 which has maximum 1 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worse case based on the output power measurements above.

**SAR Values for WCDMA Band V -Head**

| Frequency |         | Test Position | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|---------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |               |           |              |                 |                       |                     |                     |                |
| 835.0     | 4175    | Left Cheek    | RMC       | 0.903        | -1.43           | 22.79                 | 23.00               | 0.948               | 1.60           |
| 835.0     | 4175    | Left Tilt     | RMC       | 0.687        | -0.12           | 22.79                 | 23.00               | 0.721               | 1.60           |
| 835.0     | 4175    | Right Cheek   | RMC       | 0.790        | 1.15            | 22.79                 | 23.00               | 0.829               | 1.60           |
| 835.0     | 4175    | Right Tilt    | RMC       | 0.505        | 0.34            | 22.79                 | 23.00               | 0.530               | 1.60           |
| 826.4     | 4132    | Left Cheek    | RMC       | 0.803        | -0.92           | 22.79                 | 23.00               | 0.843               | 1.60           |
| 846.6     | 4233    | Left Cheek    | RMC       | 0.817        | 0.02            | 22.79                 | 23.00               | 0.857               | 1.60           |

**SAR Values for WCDMA Band V -Body**

| Frequency |         | Test Position (15mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 835.0     | 4175    | Front                | RMC       | 0.626        | -0.56           | 21.82                 | 22.00               | 0.652               | 1.60           |
| 835.0     | 4175    | Rear                 | RMC       | 0.913        | -1.06           | 21.82                 | 22.00               | 0.952               | 1.60           |
| 826.4     | 4132    | Rear                 | RMC       | 0.815        | -0.96           | 21.82                 | 22.00               | 0.849               | 1.60           |
| 846.6     | 4233    | Rear                 | RMC       | 0.811        | 0.37            | 21.82                 | 22.00               | 0.845               | 1.60           |

**Hotspot SAR test results of WCDMA Band V**

| Frequency |         | Test Position (10mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 835.0     | 4175    | Front                | RMC       | 0.618        | -0.35           | 21.82                 | 22.00               | 0.644               | 1.60           |
| 835.0     | 4175    | Rear                 | RMC       | 1.067        | 0.40            | 21.82                 | 22.00               | 1.112               | 1.60           |
| 835.0     | 4175    | Left                 | RMC       | 0.864        | 3.61            | 21.82                 | 22.00               | 0.901               | 1.60           |
| 835.0     | 4175    | Right                | RMC       | 0.976        | 2.64            | 21.82                 | 22.00               | 1.017               | 1.60           |
| 835.0     | 4175    | Top                  | RMC       | 0.853        | 1.69            | 21.82                 | 22.00               | 0.889               | 1.60           |

**Note:**

- 1.SAR test was performed in the middle channel only the measured level was <50% of the SAR of limit, test in the low and high channel is optional.
- 2.The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2kbps RMC(reference measurement channel) configuration in test loop mode

**SAR Values for WCDMA Band II -Head**

| Frequency |         | Test Position | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|---------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |               |           |              |                 |                       |                     |                     |                |
| 1880      | 9400    | Left Cheek    | RMC       | 0.413        | -1.56           | 22.72                 | 24.00               | 0.555               | 1.60           |
| 1880      | 9400    | Left Tilt     | RMC       | 0.319        | 1.05            | 22.72                 | 24.00               | 0.428               | 1.60           |
| 1880      | 9400    | Right Cheek   | RMC       | 0.522        | -2.87           | 22.72                 | 24.00               | 0.701               | 1.60           |
| 1880      | 9400    | Right Tilt    | RMC       | 0.378        | -3.21           | 22.72                 | 24.00               | 0.508               | 1.60           |

**SAR Values for WCDMA Band II -Body**

| Frequency |         | Test Position (15mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 1880      | 9400    | Front                | RMC       | 0.235        | -0.98           | 21.48                 | 23.00               | 0.333               | 1.60           |
| 1880      | 9400    | Rear                 | RMC       | 0.337        | 1.25            | 21.48                 | 23.00               | 0.478               | 1.60           |

**Hotspot SAR test results of WCDMA Band II**

| Frequency |         | Test Position (10mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 1880      | 9400    | Front                | RMC       | 0.459        | -1.58           | 21.48                 | 23.00               | 0.651               | 1.60           |
| 1880      | 9400    | Rear                 | RMC       | 0.557        | 0.91            | 21.48                 | 23.00               | 0.790               | 1.60           |
| 1880      | 9400    | Left                 | RMC       | 0.134        | 2.16            | 21.48                 | 23.00               | 0.190               | 1.60           |
| 1880      | 9400    | Right                | RMC       | 0.126        | 3.22            | 21.48                 | 23.00               | 0.179               | 1.60           |
| 1880      | 9400    | Top                  | RMC       | 0.128        | 2.67            | 21.48                 | 23.00               | 0.182               | 1.60           |

**Note:**

- 1.SAR test was performed in the middle channel only the measured level was <50% of the SAR of limit, test in the low and high channel is optional.
- 2.The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2kbps RMC(reference measurement channel) configuration in test loop mode

**SAR Values for WLAN2450 Band -Head**

| Frequency |         | Test Position | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|---------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |               |           |              |                 |                       |                     |                     |                |
| 2437      | 6       | Left Cheek    | 802.11b   | 0.511        | -4.56           | 16.95                 | 18.00               | 0.651               | 1.60           |
| 2437      | 6       | Left Tilt     | 802.11b   | 0.171        | -0.01           | 16.95                 | 18.00               | 0.218               | 1.60           |
| 2437      | 6       | Right Cheek   | 802.11b   | 0.265        | -2.14           | 16.95                 | 18.00               | 0.337               | 1.60           |
| 2437      | 6       | Right Tilt    | 802.11b   | 0.131        | -1.11           | 16.95                 | 18.00               | 0.167               | 1.60           |

**SAR Values for WLAN2450 Band -Body**

| Frequency |         | Test Position (15mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 2437      | 6       | Front                | 802.11b   | 0.042        | 0.41            | 16.95                 | 18.00               | 0.053               | 1.60           |
| 2437      | 6       | Rear                 | 802.11b   | 0.273        | -0.49           | 16.95                 | 18.00               | 0.348               | 1.60           |

**Hotspot SAR test results of WLAN 2450**

| Frequency |         | Test Position (10mm) | Test Mode | SAR 1g(W/kg) | Power Drift (%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1g(W/kg) | Limit 1g(W/kg) |
|-----------|---------|----------------------|-----------|--------------|-----------------|-----------------------|---------------------|---------------------|----------------|
| MHz       | Channel |                      |           |              |                 |                       |                     |                     |                |
| 2437      | 6       | Front                | 802.11b   | 0.126        | 1.94            | 16.95                 | 18.00               | 0.160               | 1.60           |
| 2437      | 6       | Rear                 | 802.11b   | 0.398        | -1.04           | 16.95                 | 18.00               | 0.507               | 1.60           |
| 2437      | 6       | Left                 | 802.11b   | 0.123        | 3.56            | 16.95                 | 18.00               | 0.157               | 1.60           |
| 2437      | 6       | Right                | 802.11b   | 0.124        | 1.78            | 16.95                 | 18.00               | 0.158               | 1.60           |
| 2437      | 6       | Top                  | 802.11b   | 0.116        | 2.16            | 16.95                 | 18.00               | 0.148               | 1.60           |

**Note:**

1. When the SAR measured for the middle channel is  $\leq 50\%$  of the limit, test in the low and high channel is optional.
2. The result was tested under the lowest data rate 1Mbps for 802.11b.

## 6.4. Test reduction procedure

### Simultaneous multi-band transmission

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB447498D01 General RF Exposure Guidance v05r02.

Figure 1: The diagonal dimension of the DUT



Figure1: The antenna position of the DUT

**Simultaneous Transmission SAR Analysis**

| No | Applicable Simultaneous Transmission Combination |
|----|--------------------------------------------------|
| 1. | GSM/WCDMA+BT                                     |
| 2. | GSM/WCDMA+WiFi                                   |

- Note:** 1) WLAN 2.4GHz and Bluetooth share the same antenna, and cannot transmit simultaneously.  
 2) The Reported SAR summation is calculated based on the same configuration and test position.  
 3) Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,  
 a) Scalar SAR summation  $< 1.6\text{W/kg}$ .  
 b)  $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2) \cdot 1.5 / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $\sqrt{[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]}$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan  
 c) If  $\text{SPLSR} \leq 0.04$ , simultaneously transmission SAR measurement is not necessary  
 d) Simultaneously transmission SAR measurement, and the reported multi-band SAR  $< 1.6\text{W/kg}$   
 4) For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.  
 a)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50\text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.  
 b) When the minimum separation distance is  $< 5\text{mm}$ , the distance is used 5mm to determine SAR test exclusion.  
 c)  $0.4\text{ W/kg}$  for 1-g SAR and  $1.0\text{ W/kg}$  for 10-g SAR, when the test separation distances is  $> 50\text{ mm}$ .  
 d) Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.  
 5) BT's maximum turn up procedure conducted power is  $4.537\text{ dBm}$  ( $2.84\text{mW}$ ) and the estimated SAR is listed below.

| Test position          | Head(0cm) | Body-worn(15cm) |
|------------------------|-----------|-----------------|
| BT Estimated SAR(W/kg) | 0.118     | 0.039           |

For Bluetooth the Estimated SAR for Head at 5mm for estimate and 15mm to Estimated Body SAR

$$\text{Estimated SAR}_{\text{Head}} = ((2.84\text{mW})/5\text{mm}) \cdot (1.5624/7.5) = 0.118\text{W/Kg}$$

$$\text{Estimated SAR}_{\text{Body}} = ((2.84\text{mW})/15\text{mm}) \cdot (1.5624/7.5) = 0.039\text{W/Kg}$$

**GSM & WLAN Mode**

| Test Position |                        | GSM850<br>Reported<br>SAR1g<br>(W/Kg) | GSM190<br>0<br>Reported<br>SAR1g<br>(W/Kg) | WLAN<br>Reporte<br>d<br>SAR1g<br>(W/Kg) | Summation<br>Reported<br>SAR(1g)<br>(W/kg) | SAR –to-peak-<br>location<br>Separation Ratio | Simultaneous<br>Measurement<br>Required? |
|---------------|------------------------|---------------------------------------|--------------------------------------------|-----------------------------------------|--------------------------------------------|-----------------------------------------------|------------------------------------------|
| Head          | Left<br>Head<br>Touch  | 0.992                                 | 0.832                                      | 0.511                                   | 1.503                                      | N/A                                           | No                                       |
|               | Left<br>Head<br>Title  | 0.665                                 | 0.607                                      | 0.171                                   | 0.836                                      | N/A                                           | No                                       |
|               | Right<br>Head<br>Touch | 0.923                                 | 0.848                                      | 0.265                                   | 1.188                                      | N/A                                           | No                                       |
|               | Right<br>Head<br>Title | 0.493                                 | 0.587                                      | 0.131                                   | 0.718                                      | N/A                                           | No                                       |
| Body          | Body-<br>Front<br>Side | 0.499                                 | 0.502                                      | 0.042                                   | 0.544                                      | N/A                                           | No                                       |
|               | Body-<br>Rear<br>Side  | 0.609                                 | 0.652                                      | 0.273                                   | 0.925                                      | N/A                                           | No                                       |
| Hotspot       | Front                  | 0.510                                 | 0.565                                      | 0.126                                   | 0.691                                      | N/A                                           | No                                       |
|               | Rear                   | 0.673                                 | 0.720                                      | 0.398                                   | 1.118                                      | N/A                                           | No                                       |
|               | Left                   | 0.235                                 | 0.232                                      | 0.123                                   | 0.358                                      | N/A                                           | No                                       |
|               | Right                  | 0.264                                 | 0.234                                      | 0.124                                   | 0.388                                      | N/A                                           | No                                       |
|               | Top                    | 0.226                                 | 0.228                                      | 0.116                                   | 0.344                                      | N/A                                           | No                                       |

**GSM & BT Mode**

| Test Position |                        | GSM850<br>Reported<br>SAR1g<br>(W/Kg) | GSM1900<br>Reported<br>SAR1g<br>(W/Kg) | Bluetooth<br>Estimate<br>d<br>SAR<br>(W/Kg) | Summation<br>Reported<br>SAR(1g)<br>(W/kg) | SAR –to-<br>peak-<br>location<br>Separation<br>Ratio | Simultaneous<br>Measurement<br>Required? |
|---------------|------------------------|---------------------------------------|----------------------------------------|---------------------------------------------|--------------------------------------------|------------------------------------------------------|------------------------------------------|
| Head          | Left Hand<br>Touch     | 0.992                                 | 0.832                                  | 0.118                                       | 1.110                                      | N/A                                                  | No                                       |
|               | Left Hand<br>Title     | 0.665                                 | 0.607                                  | 0.118                                       | 0.783                                      | N/A                                                  | No                                       |
|               | Right<br>Hand<br>Touch | 0.923                                 | 0.848                                  | 0.118                                       | 1.041                                      | N/A                                                  | No                                       |
|               | Right<br>Hand Title    | 0.493                                 | 0.587                                  | 0.118                                       | 0.705                                      | N/A                                                  | No                                       |
| Body          | BodyFront<br>Side      | 0.499                                 | 0.502                                  | 0.039                                       | 0.541                                      | N/A                                                  | No                                       |
|               | Body-Rear<br>Side      | 0.609                                 | 0.652                                  | 0.039                                       | 0.691                                      | N/A                                                  | No                                       |
| Hots<br>pot   | Front                  | 0.510                                 | 0.565                                  | 0.039                                       | 0.604                                      | N/A                                                  | No                                       |
|               | Rear                   | 0.673                                 | 0.720                                  | 0.039                                       | 0.759                                      | N/A                                                  | No                                       |
|               | Left                   | 0.235                                 | 0.232                                  | 0.039                                       | 0.274                                      | N/A                                                  | No                                       |
|               | Right                  | 0.264                                 | 0.234                                  | 0.039                                       | 0.303                                      | N/A                                                  | No                                       |
|               | Top                    | 0.226                                 | 0.228                                  | 0.039                                       | 0.267                                      | N/A                                                  | No                                       |

**WCDMA & WLAN Mode**

| Test Position |                        | WCDMA<br>850<br>Reported<br>SAR1g<br>(W/Kg) | WCDMA19<br>00<br>Reported<br>SAR1g<br>(W/Kg) | WLAN<br>Reported<br>SAR1g<br>(W/Kg) | Summation<br>Reported<br>SAR(1g)<br>(W/kg) | SAR –to-<br>peak-<br>location<br>Separation<br>Ratio | Simultaneous<br>Measurement<br>Required? |
|---------------|------------------------|---------------------------------------------|----------------------------------------------|-------------------------------------|--------------------------------------------|------------------------------------------------------|------------------------------------------|
| Head          | Left Hand<br>Touch     | 0.903                                       | 0.413                                        | 0.511                               | 1.414                                      | N/A                                                  | No                                       |
|               | Left Hand<br>Title     | 0.687                                       | 0.319                                        | 0.171                               | 0.858                                      | N/A                                                  | No                                       |
|               | Right<br>Hand<br>Touch | 0.790                                       | 0.522                                        | 0.265                               | 1.055                                      | N/A                                                  | No                                       |
|               | Right<br>Hand Title    | 0.505                                       | 0.378                                        | 0.131                               | 0.636                                      | N/A                                                  | No                                       |
| Body          | Body-<br>Front Side    | 0.626                                       | 0.235                                        | 0.042                               | 0.668                                      | N/A                                                  | No                                       |
|               | Body-Rear<br>Side      | 0.913                                       | 0.337                                        | 0.273                               | 1.186                                      | N/A                                                  | No                                       |
| Hots<br>pot   | Front                  | 0.618                                       | 0.459                                        | 0.126                               | 0.744                                      | N/A                                                  | No                                       |
|               | Rear                   | 1.067                                       | 0.557                                        | 0.398                               | 1.465                                      | N/A                                                  | No                                       |
|               | Left                   | 0.864                                       | 0.134                                        | 0.123                               | 0.987                                      | N/A                                                  | No                                       |
|               | Right                  | 0.976                                       | 0.126                                        | 0.124                               | 1.100                                      | N/A                                                  | No                                       |
|               | Top                    | 0.853                                       | 0.128                                        | 0.116                               | 0.969                                      | N/A                                                  | No                                       |

**WCDMA & BT Mode**

| Test Position |                        | WCDMA<br>850<br>Reported<br>SAR1g<br>(W/Kg) | WCDMA<br>1900<br>Reported<br>SAR1g<br>(W/Kg) | Bluetooth<br>Estimate<br>d<br>SAR<br>(W/Kg) | Summation<br>Reported<br>SAR(1g)<br>(W/kg) | SAR –to-<br>peak-<br>location<br>Separation<br>Ratio | Simultaneous<br>Measurement<br>Required? |
|---------------|------------------------|---------------------------------------------|----------------------------------------------|---------------------------------------------|--------------------------------------------|------------------------------------------------------|------------------------------------------|
| Head          | Left Hand<br>Touch     | 0.903                                       | 0.413                                        | 0.118                                       | 1.021                                      | N/A                                                  | No                                       |
|               | Left Hand<br>Title     | 0.687                                       | 0.319                                        | 0.118                                       | 0.805                                      | N/A                                                  | No                                       |
|               | Right<br>Hand<br>Touch | 0.790                                       | 0.522                                        | 0.118                                       | 1.312                                      | N/A                                                  | No                                       |
|               | Right<br>Hand Title    | 0.505                                       | 0.378                                        | 0.118                                       | 0.623                                      | N/A                                                  | No                                       |
| Body          | BodyFront<br>Side      | 0.626                                       | 0.235                                        | 0.039                                       | 0.665                                      | N/A                                                  | No                                       |
|               | Body-Rear<br>Side      | 0.913                                       | 0.337                                        | 0.039                                       | 0.952                                      | N/A                                                  | No                                       |
| Hots<br>pot   | Front                  | 0.618                                       | 0.459                                        | 0.039                                       | 0.657                                      | N/A                                                  | No                                       |
|               | Rear                   | 1.067                                       | 0.557                                        | 0.039                                       | 1.106                                      | N/A                                                  | No                                       |
|               | Left                   | 0.864                                       | 0.134                                        | 0.039                                       | 0.123                                      | N/A                                                  | No                                       |
|               | Right                  | 0.976                                       | 0.126                                        | 0.039                                       | 1.015                                      | N/A                                                  | No                                       |
|               | Top                    | 0.853                                       | 0.128                                        | 0.039                                       | 0.892                                      | N/A                                                  | No                                       |

**Note:** The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with volume scans is not required according to KDB447498 D01v05r02.

## 6.5. Measurement Uncertainty (700MHz-3GHz)

| Uncertainty Component                                                           | Sec.                   | Tol<br>(+ %) | Prob.<br>Dist. | Div. | Ci (1g)         | Ci<br>(10g)     | 1g Ui<br>(+-%) | 10g Ui<br>(+-%) | Vi |
|---------------------------------------------------------------------------------|------------------------|--------------|----------------|------|-----------------|-----------------|----------------|-----------------|----|
| <b>Measurement System</b>                                                       |                        |              |                |      |                 |                 |                |                 |    |
| Probe calibration                                                               | 7.2.1                  | 5.8          | N              |      | 1               | 1               | 5.80           | 5.80            | ∞  |
| Axial Isotropy                                                                  | 7.2.1.1                | 3.5          | R              | √3   | $(1-C_p)^{1/2}$ | $(1-C_p)^{1/2}$ | 1.43           | 1.43            | ∞  |
| Hemispherical Isotropy                                                          | 7.2.1.1                | 5.9          | R              | √3   | $(C_p)^{1/2}$   | $(C_p)^{1/2}$   | 2.41           | 2.41            | ∞  |
| Boundary effect                                                                 | 7.2.1.4                | 1.0          | R              | √3   | 1               | 1               | 0.58           | 0.58            | ∞  |
| Linearity                                                                       | 7.2.1.2                | 4.7          | R              | √3   | 1               | 1               | 2.71           | 2.71            | ∞  |
| System detection limits                                                         | 7.2.1.2                | 1.0          | R              | √3   | 1               | 1               | 0.58           | 0.58            | ∞  |
| Modulation response                                                             | 7.2.1.3                | 3.00         | N              |      | 1               | 1               | 3.00           | 3.00            | ∞  |
| Readout Electronics                                                             | 7.2.1.5                | 0.50         | N              |      | 1               | 1               | 0.50           | 0.50            | ∞  |
| Reponse Time                                                                    | 7.2.1.6                | 0.0          | R              | √3   | 1               | 1               | 0.00           | 0.00            | ∞  |
| Integration Time                                                                | 7.2.1.7                | 1.4          | R              | √3   | 1               | 1               | 0.81           | 0.81            | ∞  |
| RF ambient Conditions - Noise                                                   | 7.2.3.7                | 3.0          | R              | √3   | 1               | 1               | 1.73           | 1.73            | ∞  |
| RF ambient Conditions - Reflections                                             | 7.2.3.7                | 3.0          | R              | √3   | 1               | 1               | 1.73           | 1.73            | ∞  |
| Probe positioner Mechanical Tolerance                                           | 7.2.2.1                | 1.4          | R              | √3   | 1               | 1               | 0.81           | 0.81            | ∞  |
| Probe positioning with respect to Phantom Shell                                 | 7.2.2.3                | 1.40         | R              | √3   | 1               | 1               | 0.81           | 0.81            | ∞  |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | 7.2.4                  | 2.3          | R              | √3   | 1               | 1               | 1.33           | 1.33            | ∞  |
| <b>Test sample Related</b>                                                      |                        |              |                |      |                 |                 |                |                 |    |
| Test sample positioning                                                         | 7.2.2.4.4              | 2.60         | N              |      | 1               | 1               | 2.60           | 2.60            |    |
| Device Holder Uncertainty                                                       | 7.2.2.4.2<br>7.2.2.4.3 | 3.00         | N              |      | 1               | 1               | 3.00           | 3.00            |    |
| Output power Variation - SAR drift measurement                                  | 7.2.3.6                | 5.00         | R              | √3   | 1               | 1               | 2.89           | 2.89            | ∞  |
| SAR scaling                                                                     | 7.2.5                  | 2.00         | R              | √3   | 1               | 1               | 1.15           | 1.15            | ∞  |
| <b>Phantom and Tissue Parameters</b>                                            |                        |              |                |      |                 |                 |                |                 |    |
| Phantom Uncertainty (Shape and thickness tolerances)                            | 7.2.2.2                | 4.00         | R              | √3   | 1               | 1               | 2.31           | 2.31            | ∞  |
| Uncertainty in SAR correction for deviation (in permittivity and conductivity)  | 7.2.6                  | 2.00         | N              |      | 1               | 0.84            | 2.00           | 1.68            | ∞  |
| Liquid conductivity (temperature uncertainty)                                   | 7.2.3.5                | 2.50         | N              |      | 0.78            | 0.71            | 1.95           | 1.78            |    |
| Liquid conductivity - measurement uncertainty                                   | 7.2.3.3                | 4.00         | N              |      | 0.23            | 0.26            | 0.92           | 1.04            |    |
| Liquid permittivity (temperature uncertainty)                                   | 7.2.3.5                | 2.50         | N              |      | 0.78            | 0.71            | 1.95           | 1.78            | ∞  |
| Liquid permittivity - measurement uncertainty                                   | 7.2.3.4                | 5.00         | N              |      | 0.23            | 0.26            | 1.15           | 1.30            | ∞  |
| Combined Standard Uncertainty                                                   |                        |              | RSS            |      |                 |                 | 10.63          | 10.54           |    |
| Expanded Uncertainty (95% Confidence interval)                                  |                        |              | k              |      |                 |                 | 21.26          | 21.08           |    |

## 6.6. System Check Results

Test mode:835MHz(Head)

Product Description:Validation


Model:Dipole SID835

E-Field Probe:SSE5(SN17/14 EP220)



Test Date: October 08, 2015

|                                   |           |
|-----------------------------------|-----------|
| Medium(liquid type)               | HSL_900   |
| Frequency (MHz)                   | 835.0000  |
| Relative permittivity (real part) | 41.26     |
| Conductivity (S/m)                | 0.92      |
| Input power                       | 100mW     |
| Crest Factor                      | 1.0       |
| Conversion Factor                 | 4.86      |
| Variation (%)                     | -0.010000 |
| SAR 10g (W/Kg)                    | 0.626382  |
| SAR 1g (W/Kg)                     | 0.953343  |

### SURFACE SAR



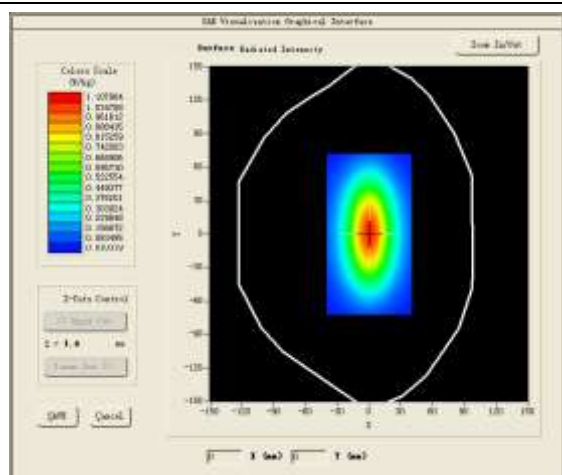


### VOLUME SAR

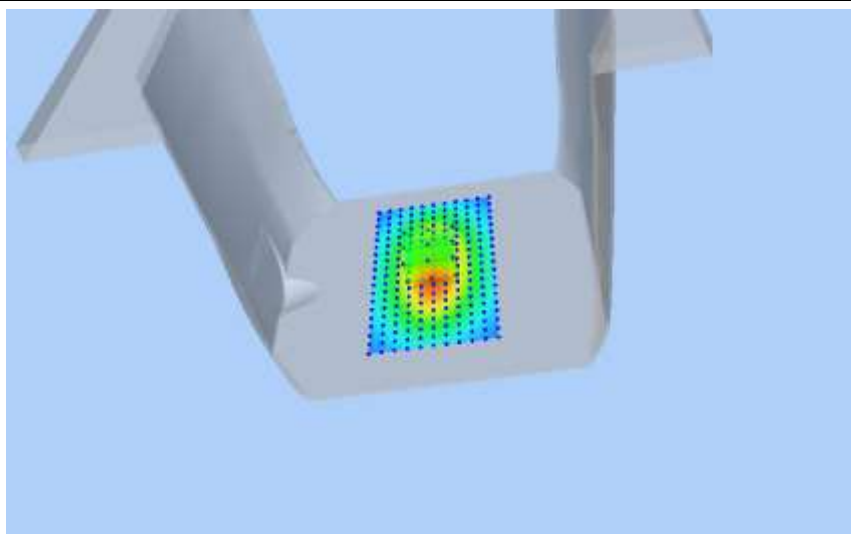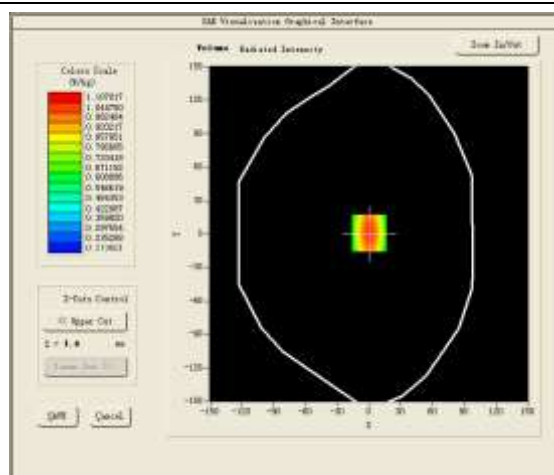




Test mode:835MHz(Body)  
 Product Description:Validation  
 Model:Dipole SID835  
 E-Field Probe:SSE5(SN17/14 EP220)  
 Test Date: October 08, 2015

|                                   |                   |
|-----------------------------------|-------------------|
| Medium(liquid type)               | MSL_900           |
| Frequency (MHz)                   | 835.0000          |
| Relative permittivity (real part) | 55.19             |
| Conductivity (S/m)                | 0.98              |
| Input power                       | 100mW             |
| Crest Factor                      | 1.0               |
| Conversion Factor                 | 5.04              |
| Variation (%)                     | -0.010000         |
| SAR 10g (W/Kg)                    | 0.643381          |
| SAR 1g (W/Kg)                     | 0.987156          |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b> |

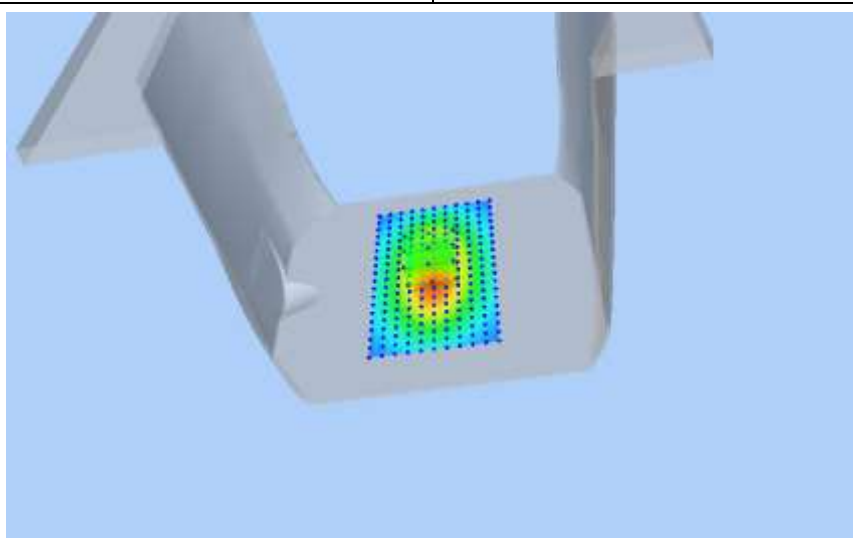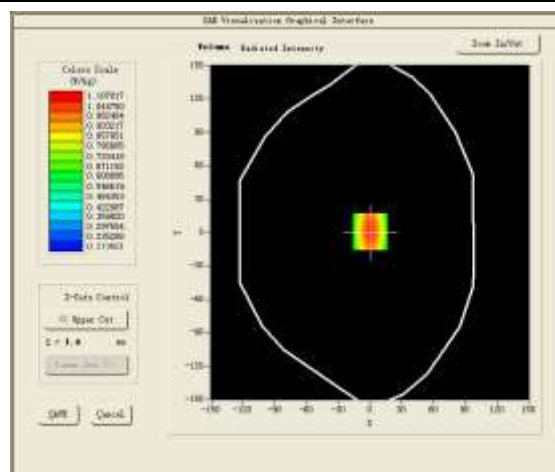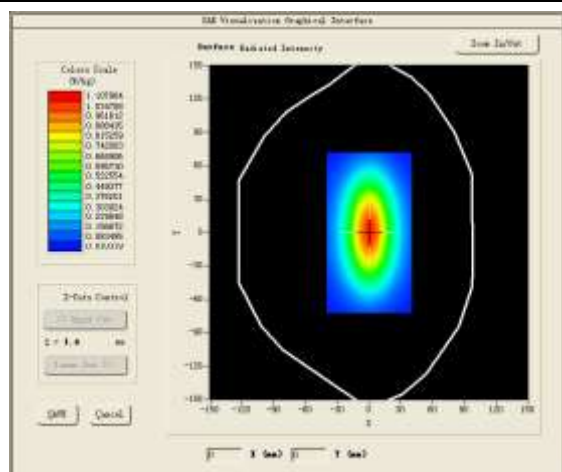




Test mode:1900MHz(Head)  
 Product Description:Validation  
 Model :Dipole SID1900  
 E-Field Probe:SSE5(SN17/14 EP220)  
 Test Date: October 09, 2015

|                                   |                   |
|-----------------------------------|-------------------|
| Medium(liquid type)               | HSL_1800          |
| Frequency (MHz)                   | 1900.0000         |
| Relative permittivity (real part) | 40.15             |
| Conductivity (S/m)                | 1.43              |
| Input power                       | 100mW             |
| Crest Factor                      | 1.0               |
| Conversion Factor                 | 4.71              |
| Variation (%)                     | -0.240000         |
| SAR 10g (W/Kg)                    | 2.192452          |
| SAR 1g (W/Kg)                     | 3.834373          |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b> |

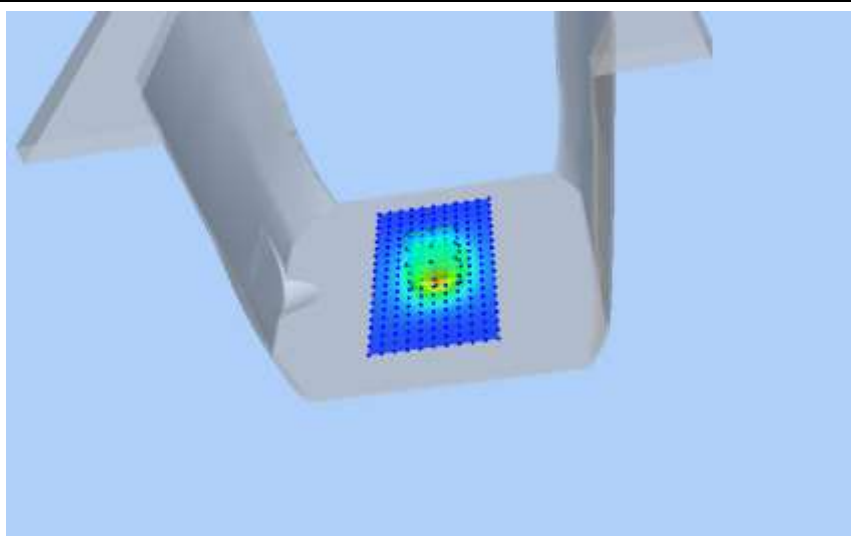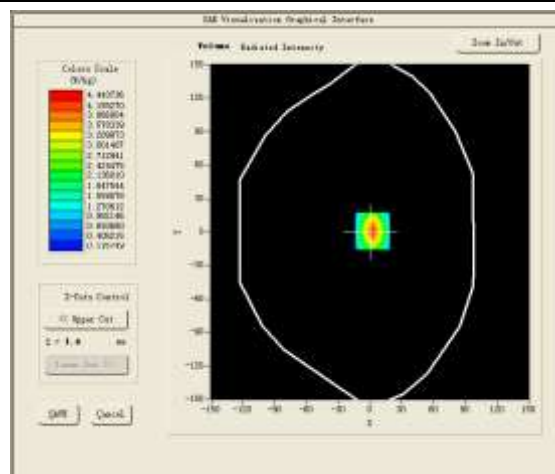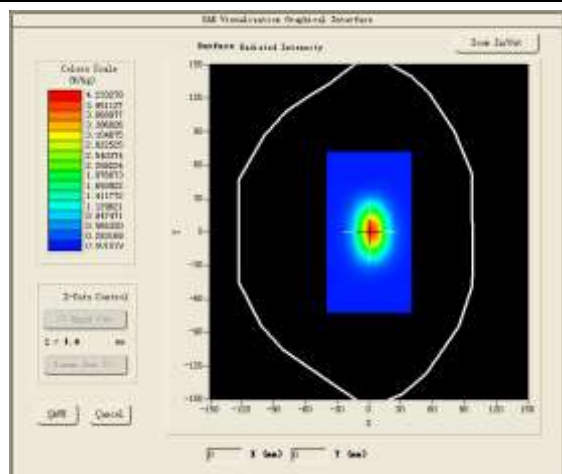




Test mode:1900MHz(Body)  
 Product Description:Validation  
 Model :Dipole SID1900  
 E-Field Probe:SSE5(SN17/14 EP220)  
 Test Date: October 09, 2015

|                                   |                   |
|-----------------------------------|-------------------|
| Medium(liquid type)               | MSL_1800          |
| Frequency (MHz)                   | 1900.0000         |
| Relative permittivity (real part) | 53.28             |
| Conductivity (S/m)                | 1.53              |
| Input power                       | 100mW             |
| Crest Factor                      | 1.0               |
| Conversion Factor                 | 4.85              |
| Variation (%)                     | -0.240000         |
| SAR 10g (W/Kg)                    | 2.075454          |
| SAR 1g (W/Kg)                     | 4.2164373         |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b> |

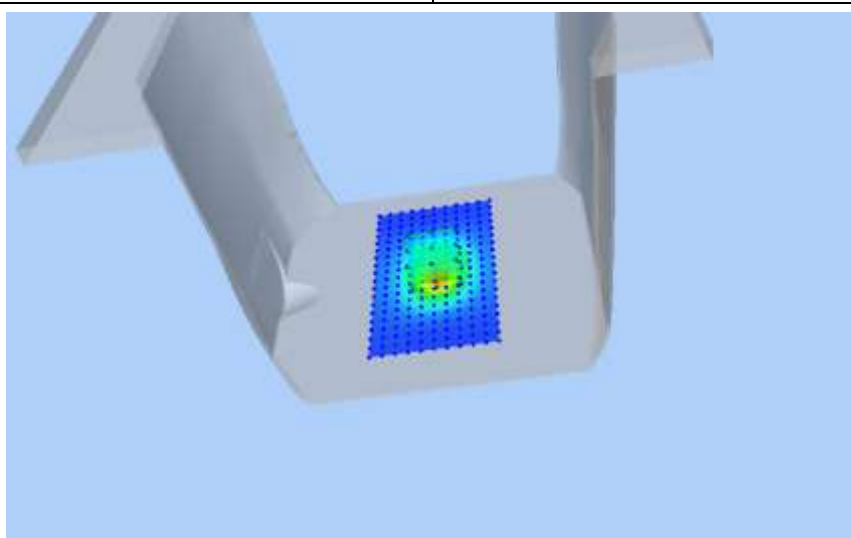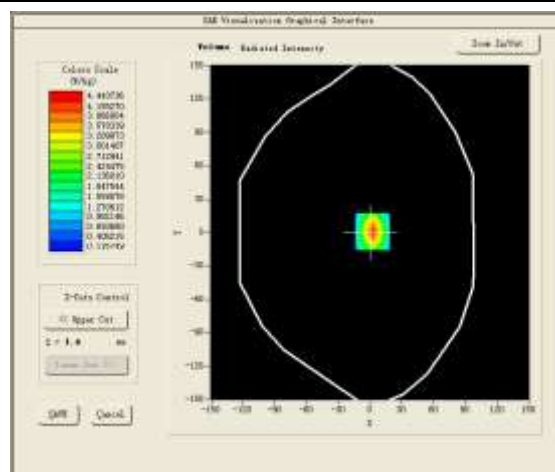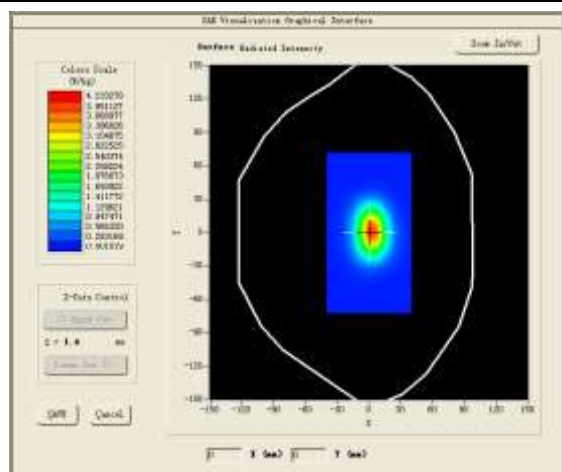




Test mode:2450MHz(Head)  
 Product Description:Validation  
 Model:Dipole SID2450  
 E-Field Probe:SSE5(SN17/14 EP220)  
 Test Date: October 12, 2015

|                                   |                   |
|-----------------------------------|-------------------|
| Medium(liquid type)               | HSL_2450          |
| Frequency (MHz)                   | 2450.0000         |
| Relative permittivity (real part) | 39.23             |
| Conductivity (S/m)                | 1.85              |
| Input power                       | 100mW             |
| Crest Factor                      | 1.0               |
| Conversion Factor                 | 3.94              |
| Variation (%)                     | -0.340000         |
| SAR 10g (W/Kg)                    | 2.434041          |
| SAR 1g (W/Kg)                     | 5.363435          |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b> |

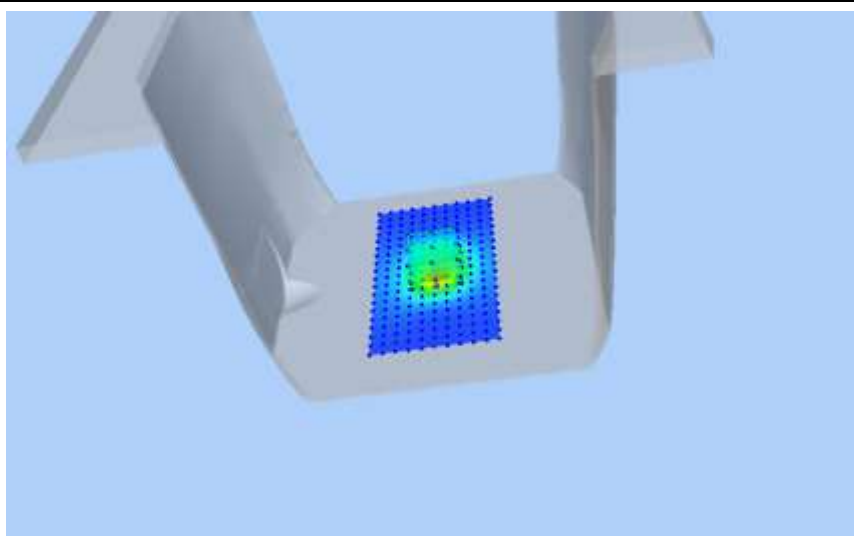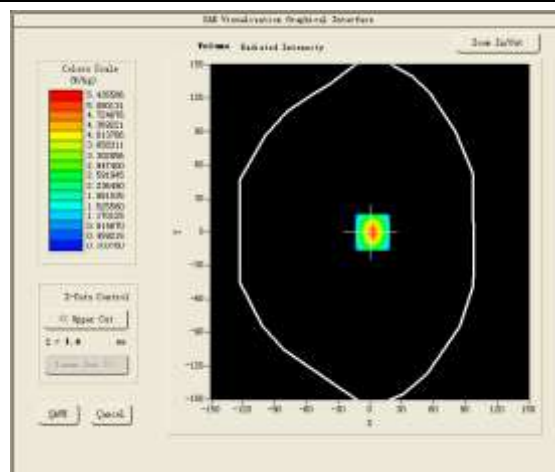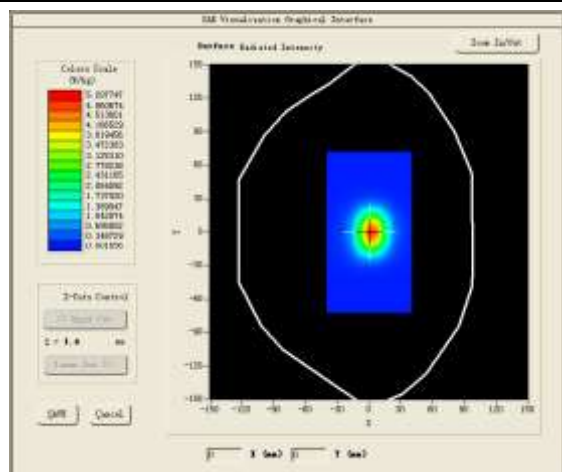

Test mode:2450MHz(Body)  
 Product Description:Validation  
 Model:Dipole SID2450  
 E-Field Probe:SSE5(SN17/14 EP220)  
 Test Date: October 12, 2015

|                                   |                   |
|-----------------------------------|-------------------|
| Medium(liquid type)               | MSL_2450          |
| Frequency (MHz)                   | 2450.0000         |
| Relative permittivity (real part) | 52.75             |
| Conductivity (S/m)                | 1.96              |
| Input power                       | 100mW             |
| Crest Factor                      | 1.0               |
| Conversion Factor                 | 4.05              |
| Variation (%)                     | -0.340000         |
| SAR 10g (W/Kg)                    | 2.493042          |
| SAR 1g (W/Kg)                     | 5.45436           |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b> |

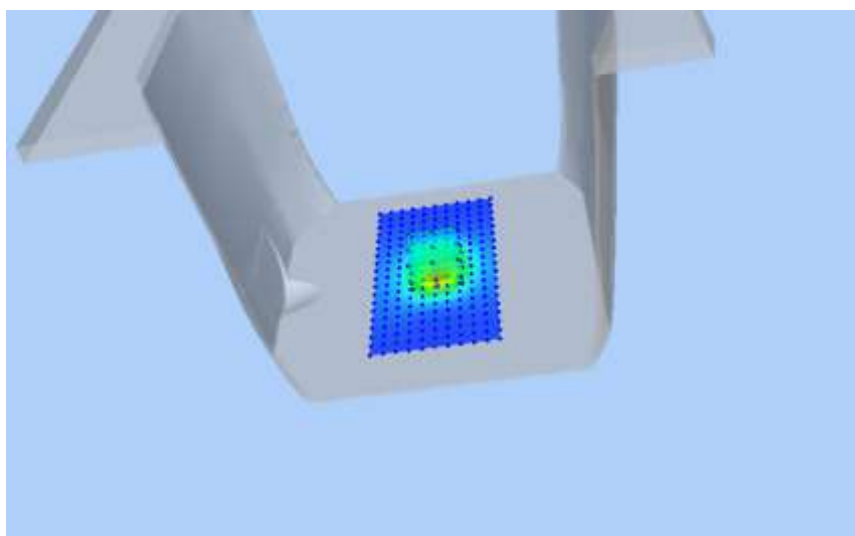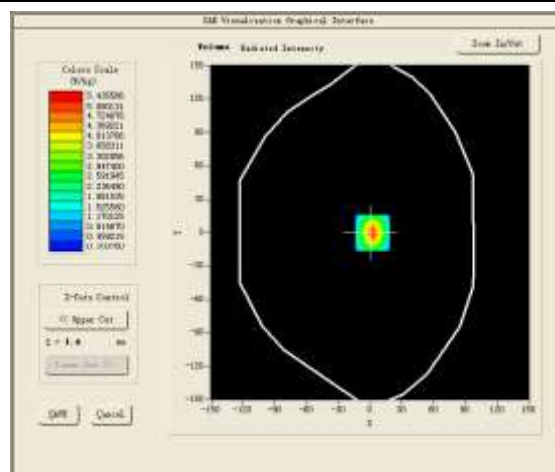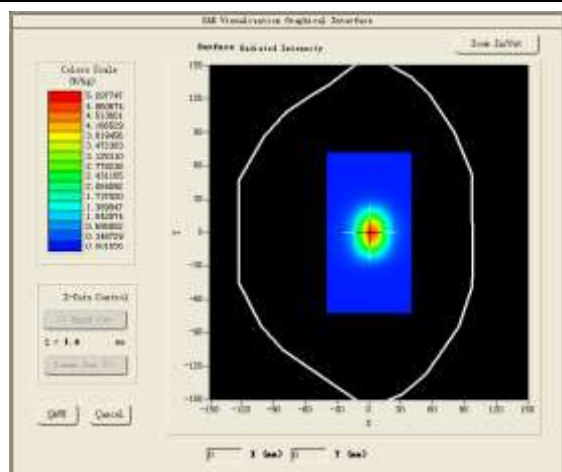

## 6.7. SAR Test Graph Results




Test Mode:GSM 850MHz,Mid channel(Head Left Cheek)

Product Description: Mobile phone

Model: S400

Test Date: October 08, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_900                    |
| Frequency (MHz)                   | 836.400000                 |
| Relative permittivity (real part) | 42.81                      |
| Conductivity (S/m)                | 0.89                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.86                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | 4.470000                   |
| SAR 10g (W/Kg)                    | 0.701448                   |
| SAR 1g (W/Kg)                     | 0.991860                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

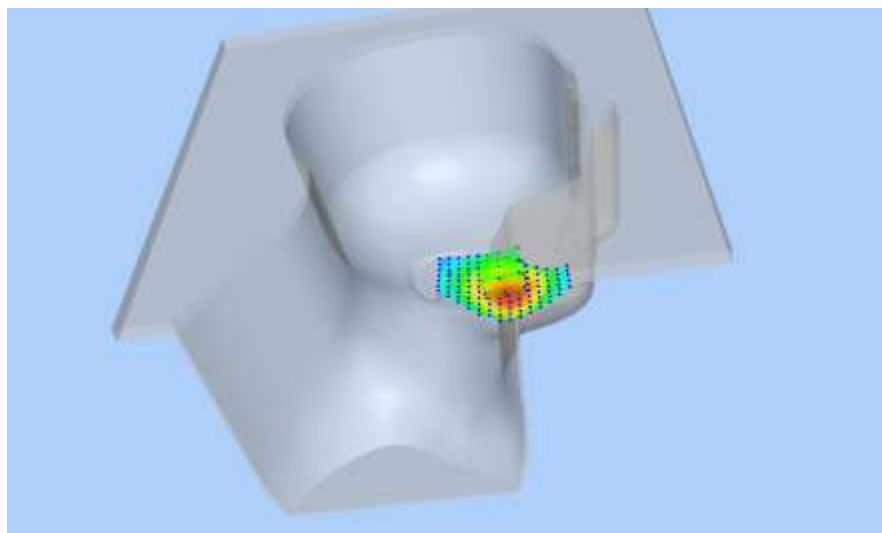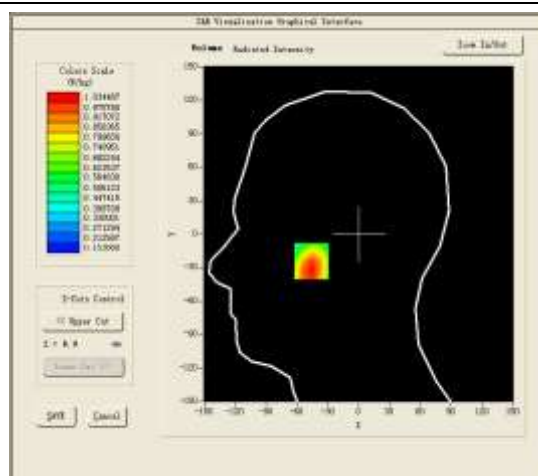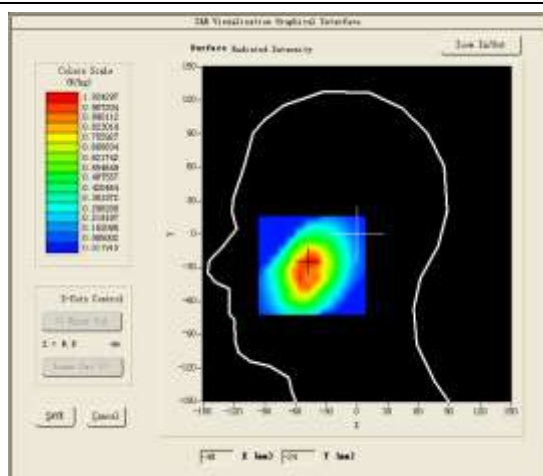




Test Mode:GPRS850MHz,Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 08, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_900                    |
| Frequency (MHz)                   | 836.400000                 |
| Relative permittivity (real part) | 53.46                      |
| Conductivity (S/m)                | 0.96                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 5.04                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -1.290000                  |
| SAR 10g (W/Kg)                    | 0.457197                   |
| SAR 1g (W/Kg)                     | 0.609266                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

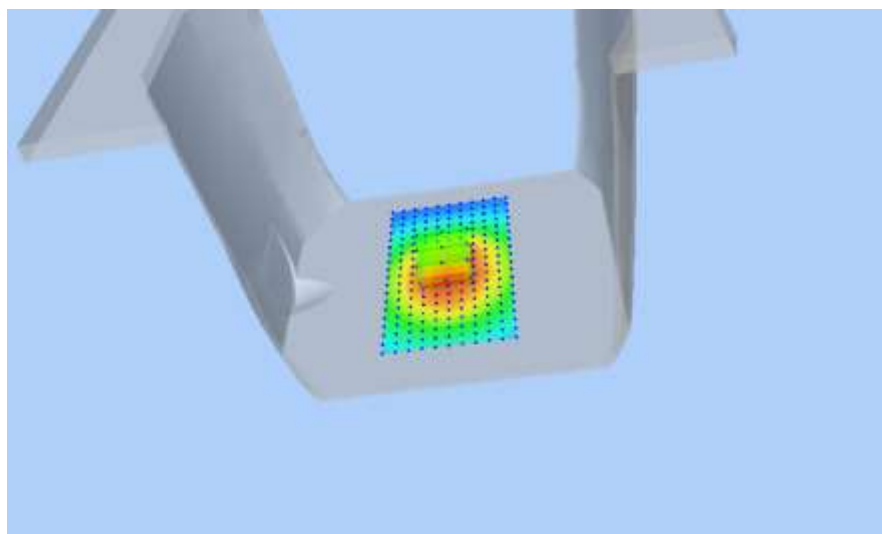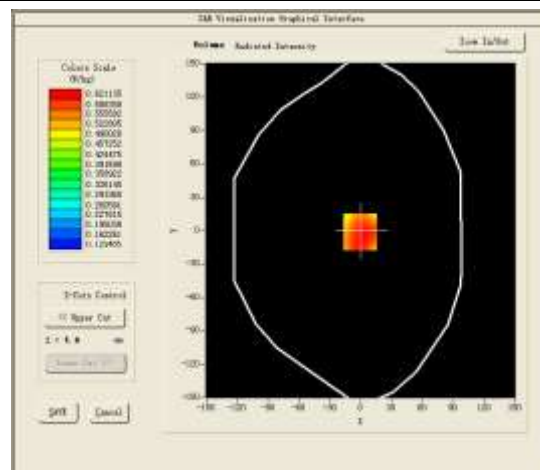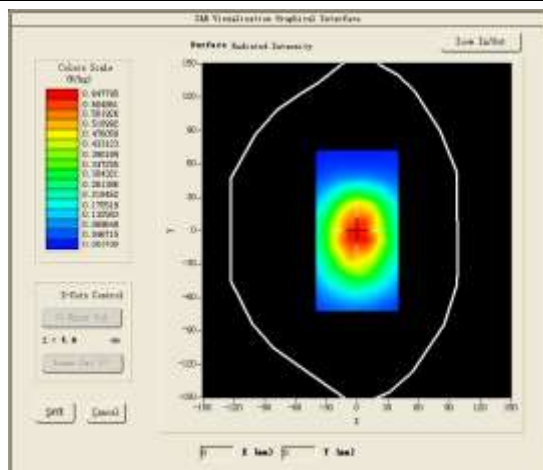




Test Mode: Hotspot GSM850MHz,Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 08, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_900                    |
| Frequency (MHz)                   | 836.400000                 |
| Relative permittivity (real part) | 53.46                      |
| Conductivity (S/m)                | 0.96                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 5.04                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -0.440000                  |
| SAR 10g (W/Kg)                    | 0.302589                   |
| SAR 1g (W/Kg)                     | 0.672597                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

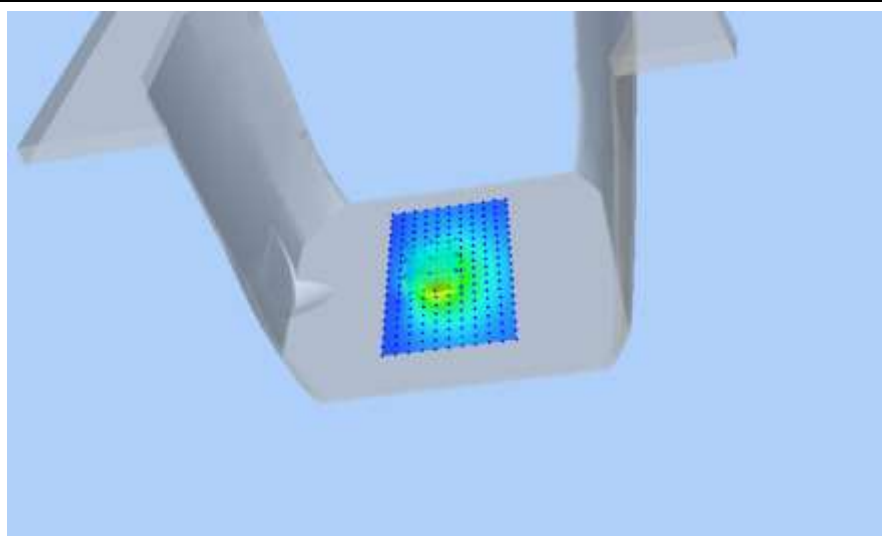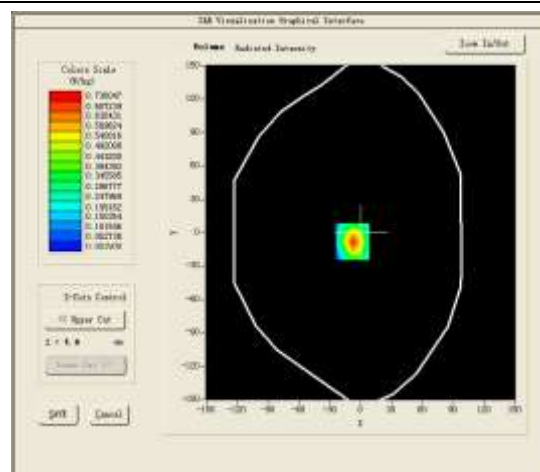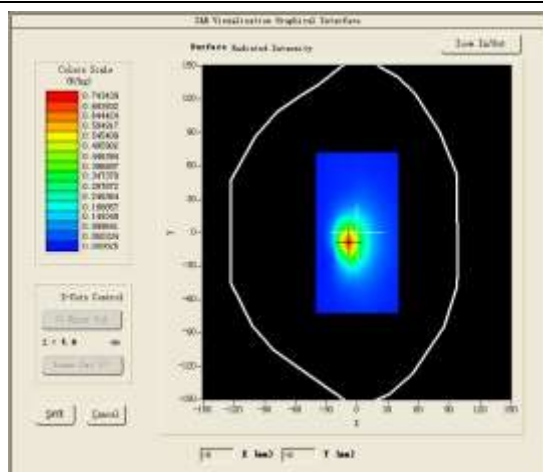




Test Mode:GSM 1900MHz,Mid channel(Head Right Cheek)

Product Description: Mobile phone

Model: S400

Test Date: October 09, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_1800                   |
| Frequency (MHz)                   | 1880.000000                |
| Relative permittivity (real part) | 41.31                      |
| Conductivity (S/m)                | 1.38                       |
| E-Field Probe                     | SN 17/14 EP221             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.16                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | 0.080000                   |
| SAR 10g (W/Kg)                    | 0.575397                   |
| SAR 1g (W/Kg)                     | 0.848373                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

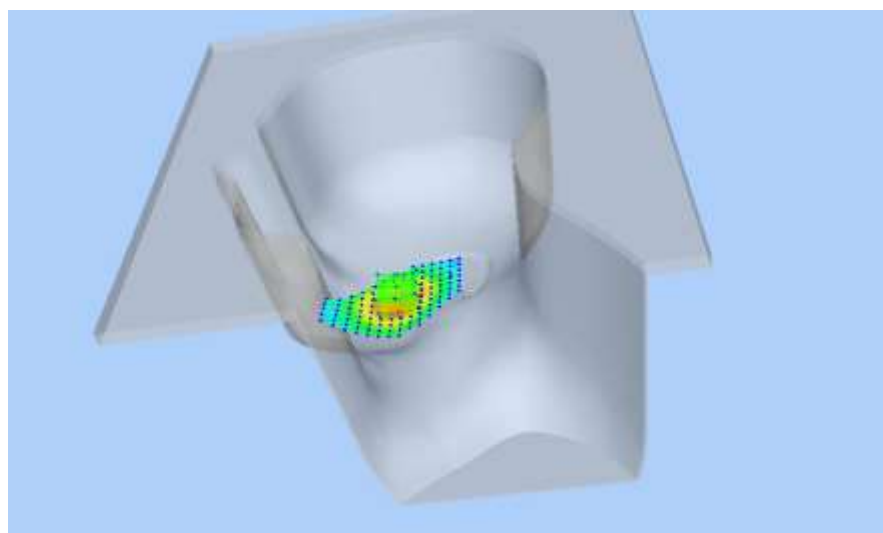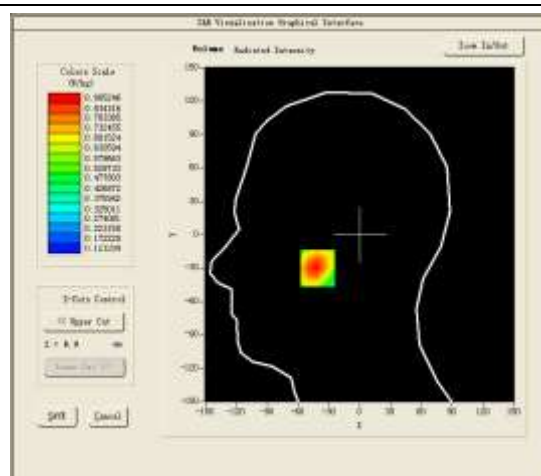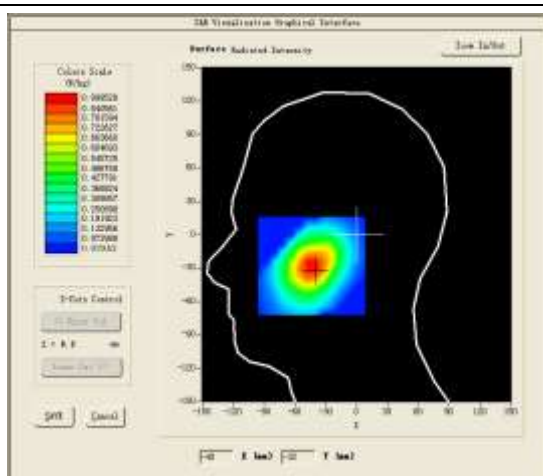




Test Mode:GPRS1900MHz,Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 09, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_1800                   |
| Frequency (MHz)                   | 1880.000000                |
| Relative permittivity (real part) | 53.27                      |
| Conductivity (S/m)                | 1.51                       |
| E-Field Probe                     | SN 17/14 EP221             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.29                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | 0.630000                   |
| SAR 10g (W/Kg)                    | 0.460194                   |
| SAR 1g (W/Kg)                     | 0.652500                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

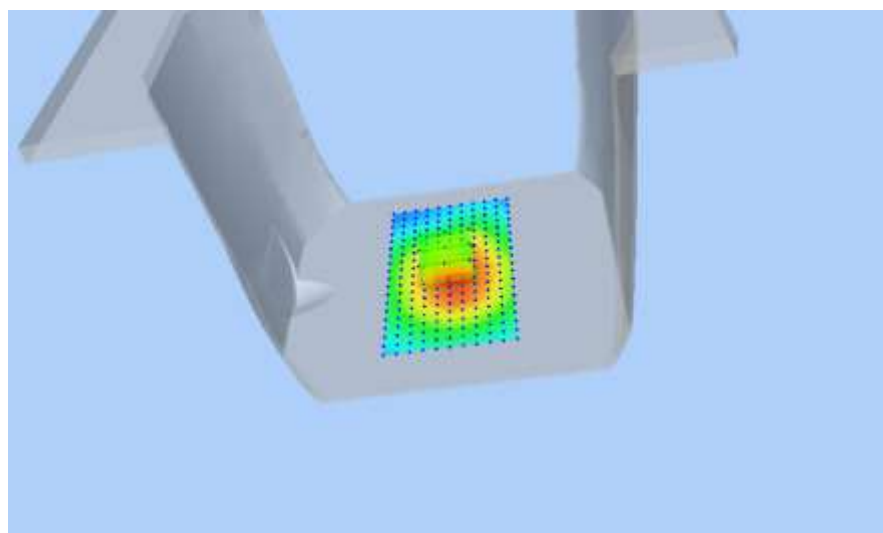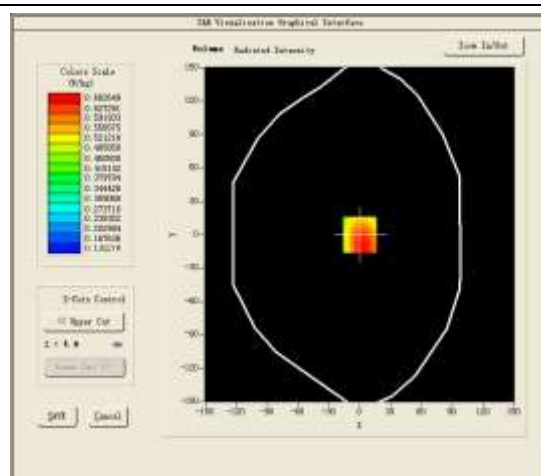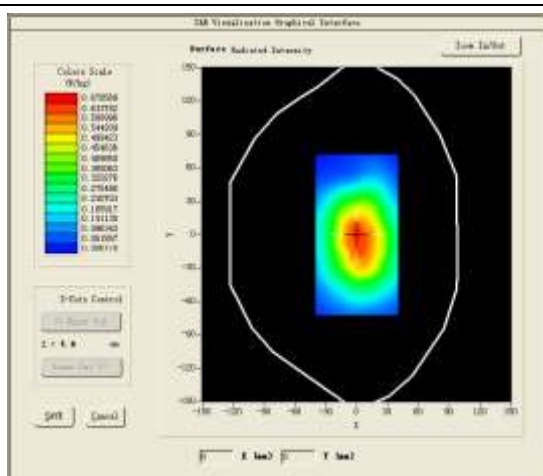




Test Mode: Hotspot GPRS1900MHz, Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 09, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_1800                   |
| Frequency (MHz)                   | 1880.000000                |
| Relative permittivity (real part) | 53.27                      |
| Conductivity (S/m)                | 1.51                       |
| E-Field Probe                     | SN 17/14 EP221             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.29                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -0.500000                  |
| SAR 10g (W/Kg)                    | 0.316414                   |
| SAR 1g (W/Kg)                     | 0.720442                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

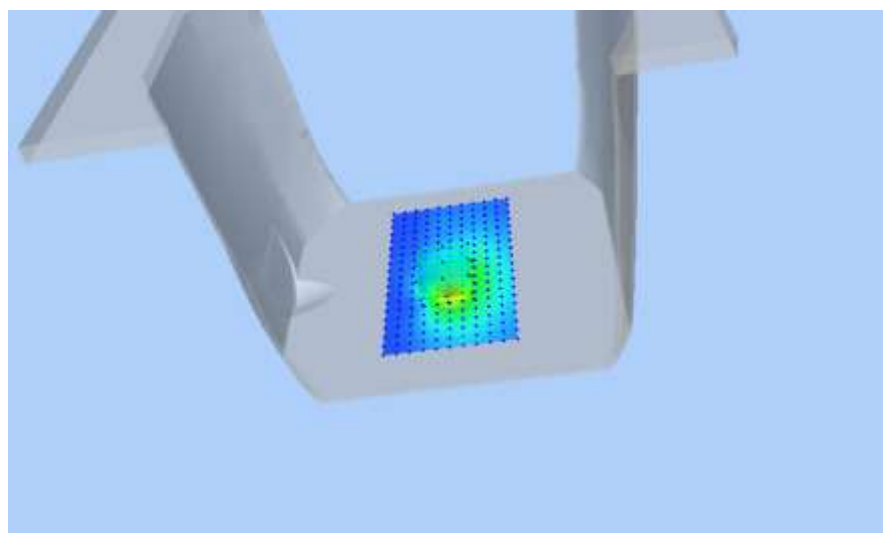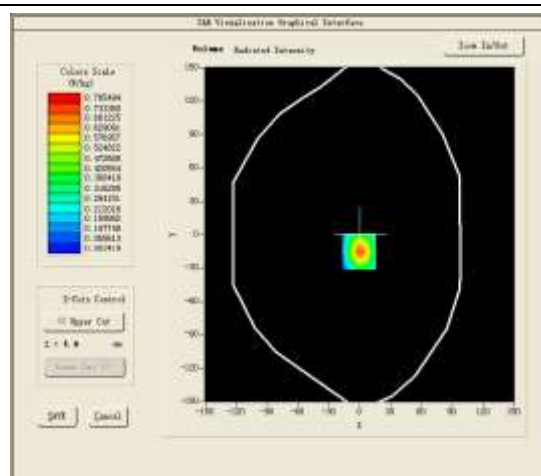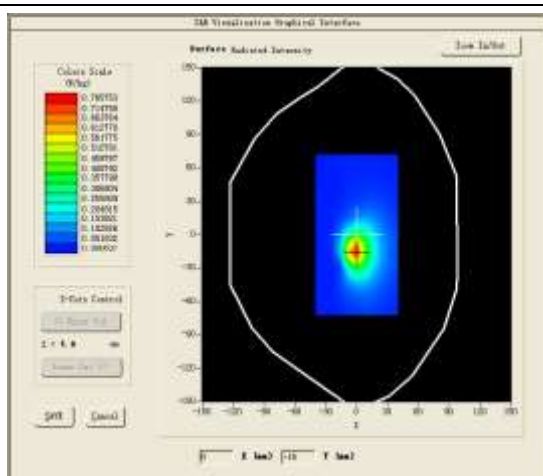




Test Mode:WCDMA 850MHz,Mid channel(Head Left Cheek)

Product Description: Mobile phone

Model: S400

Test Date: October 08, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_900                    |
| Frequency (MHz)                   | 836.400000                 |
| Relative permittivity (real part) | 42.81                      |
| Conductivity (S/m)                | 0.89                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.86                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -1.430000                  |
| SAR 10g (W/Kg)                    | 0.616310                   |
| SAR 1g (W/Kg)                     | 0.902868                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

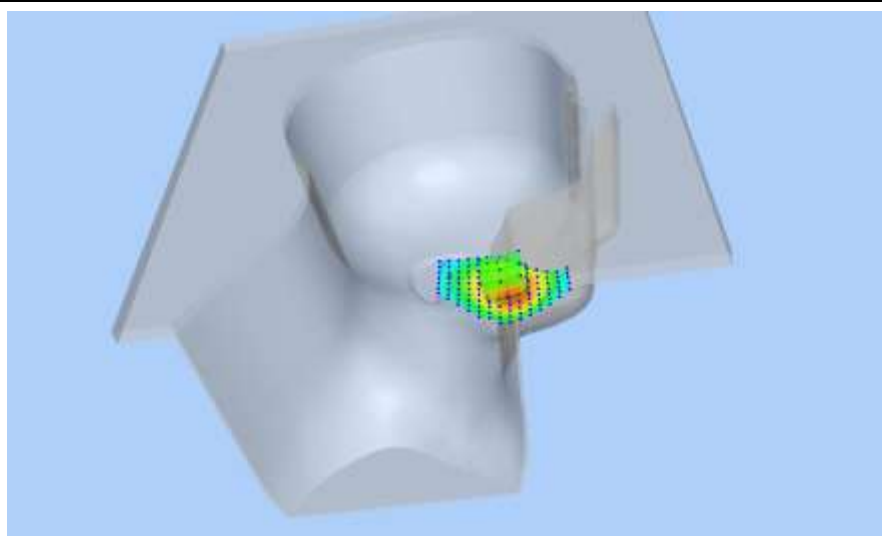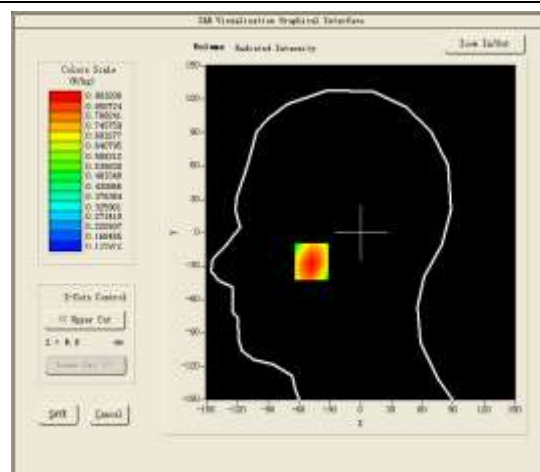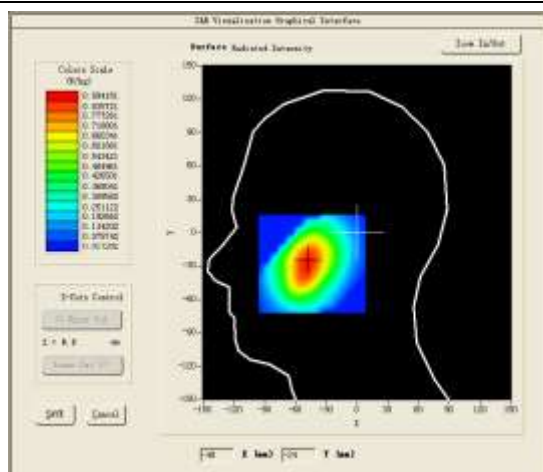




Test Mode:WCDMA850MHz,Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 08, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_900                    |
| Frequency (MHz)                   | 836.400000                 |
| Relative permittivity (real part) | 53.46                      |
| Conductivity (S/m)                | 0.96                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 5.04                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -1.060000                  |
| SAR 10g (W/Kg)                    | 0.401598                   |
| SAR 1g (W/Kg)                     | 0.912596                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

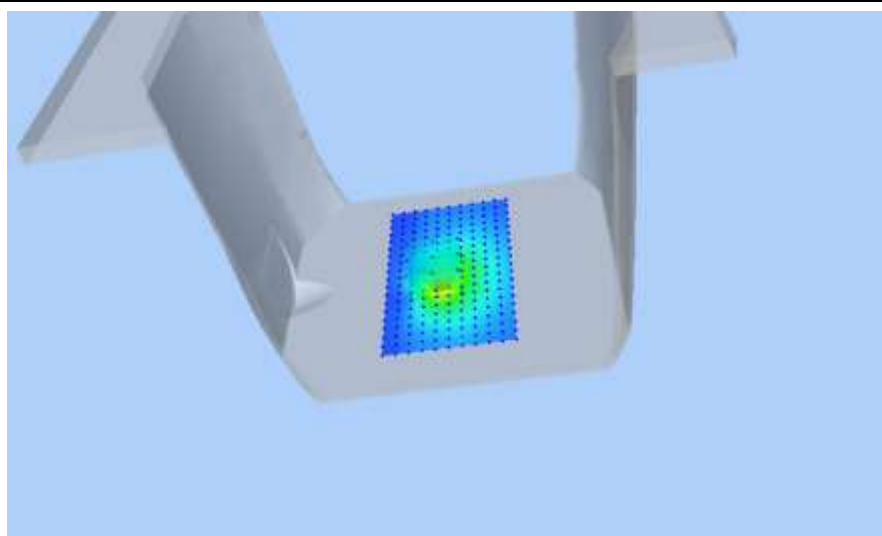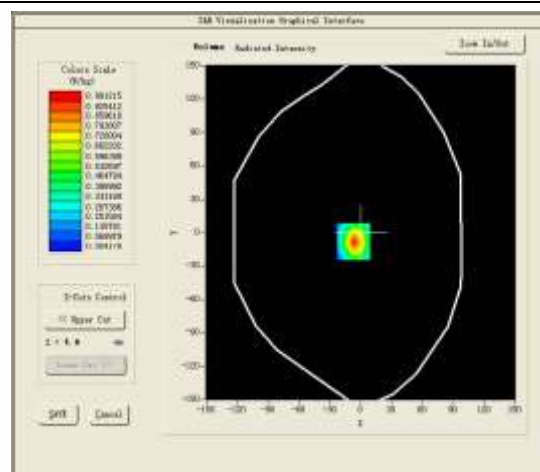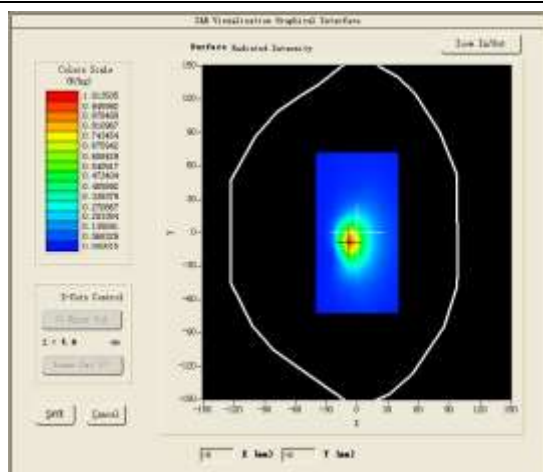




Test Mode: Hotspot WCDMA850MHz,Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 08, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_900                    |
| Frequency (MHz)                   | 836.400000                 |
| Relative permittivity (real part) | 53.46                      |
| Conductivity (S/m)                | 0.96                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 5.04                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | 0.400000                   |
| SAR 10g (W/Kg)                    | 0.730846                   |
| SAR 1g (W/Kg)                     | 1.067265                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

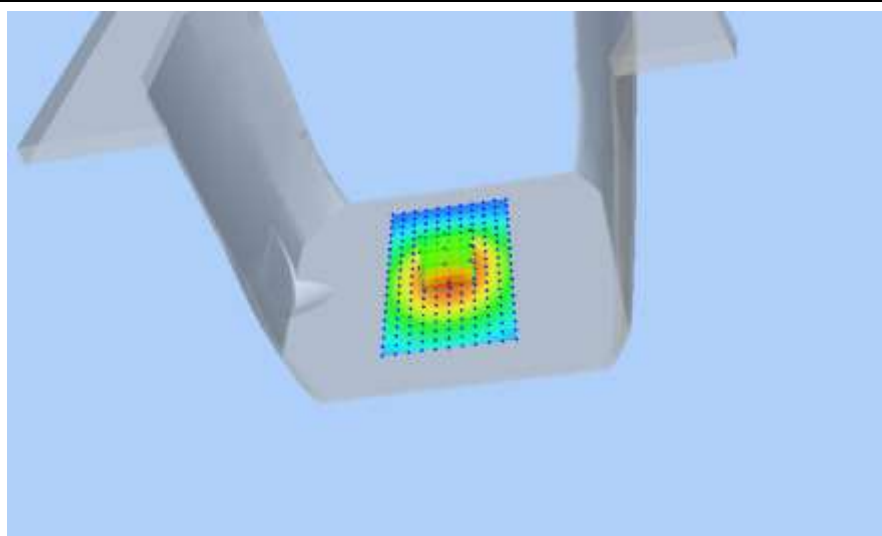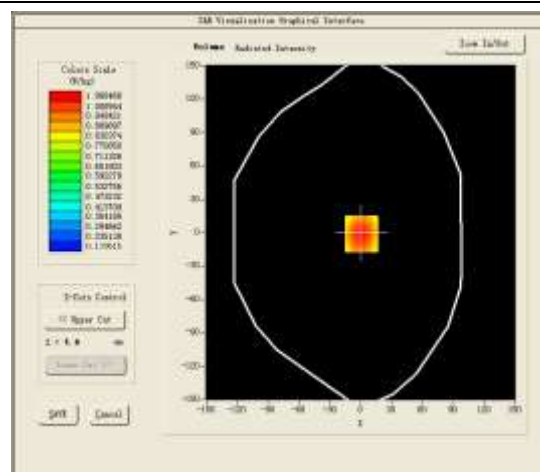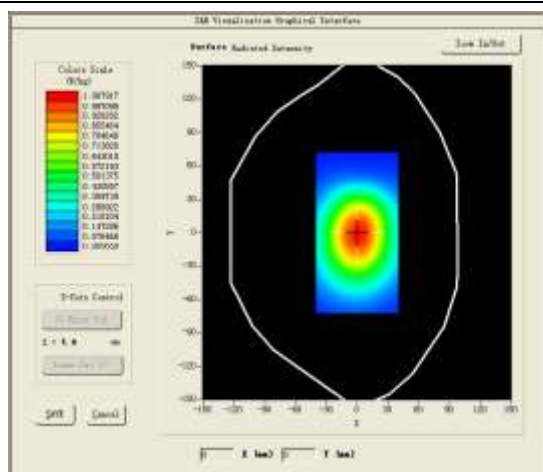




Test Mode:WCDMA1900MHz,Mid channel(Head Right Cheek)

Product Description: Mobile phone

Model: S400

Test Date: October 09, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_1800                   |
| Frequency (MHz)                   | 1880.000000                |
| Relative permittivity (real part) | 41.31                      |
| Conductivity (S/m)                | 1.38                       |
| E-Field Probe                     | SN 17/14 EP221             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.16                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -2.870000                  |
| SAR 10g (W/Kg)                    | 0.315274                   |
| SAR 1g (W/Kg)                     | 0.521612                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

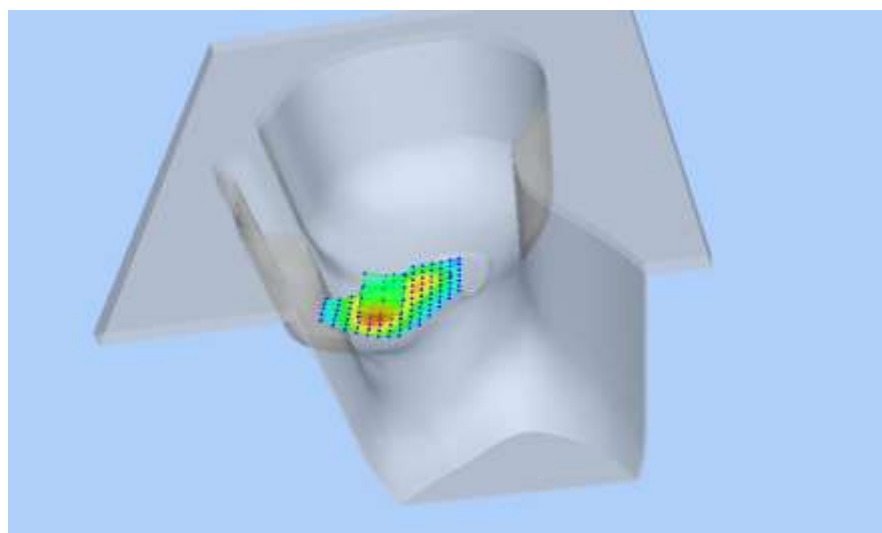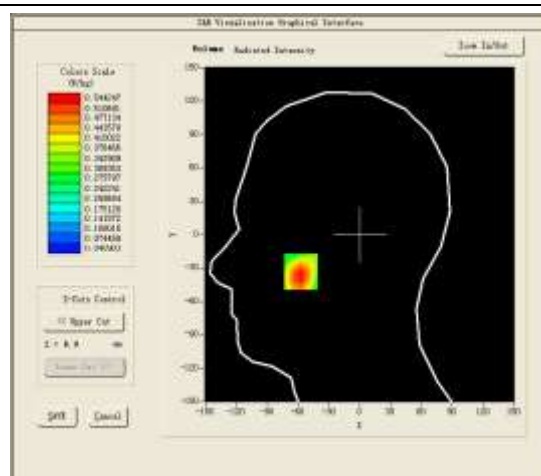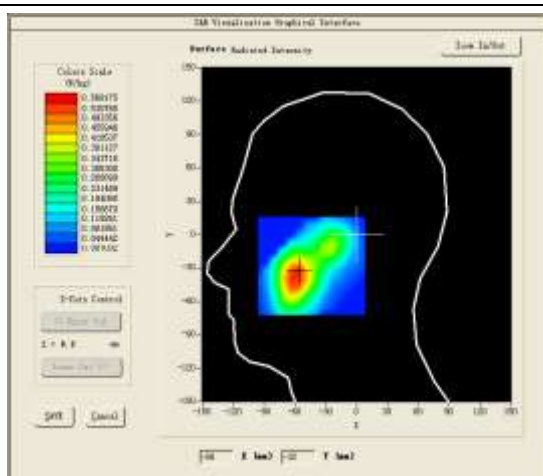




Test Mode:WCDMA1900MHz,Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 09, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_1800                   |
| Frequency (MHz)                   | 1880.000000                |
| Relative permittivity (real part) | 53.27                      |
| Conductivity (S/m)                | 1.51                       |
| E-Field Probe                     | SN 17/14 EP221             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.29                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | 1.250000                   |
| SAR 10g (W/Kg)                    | 0.209829                   |
| SAR 1g (W/Kg)                     | 0.337312                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

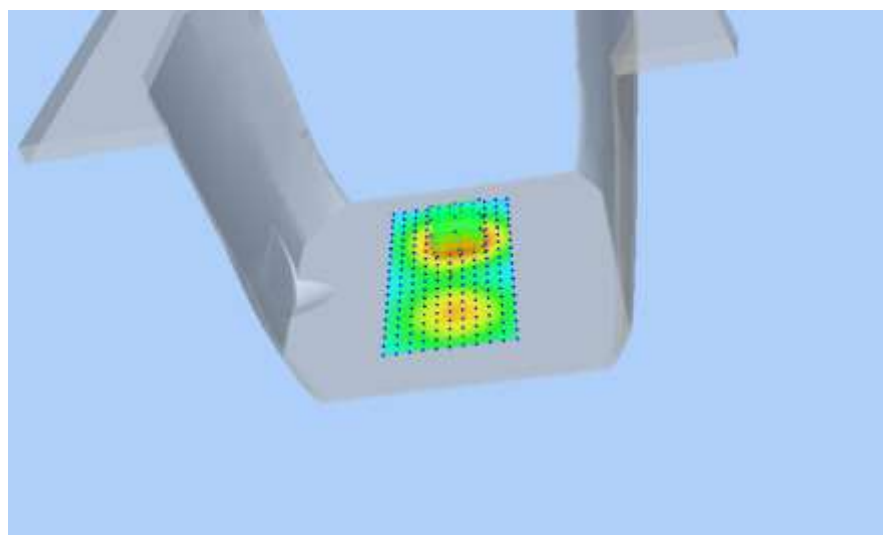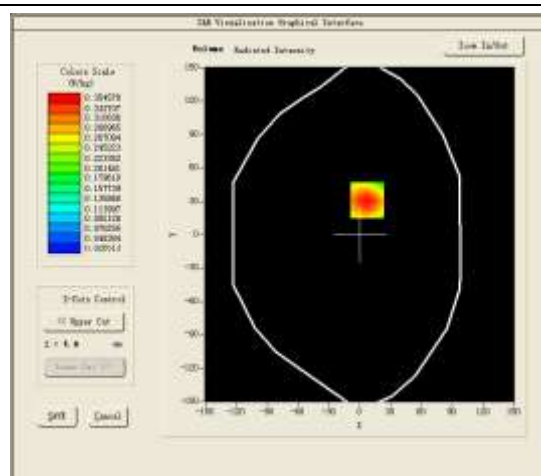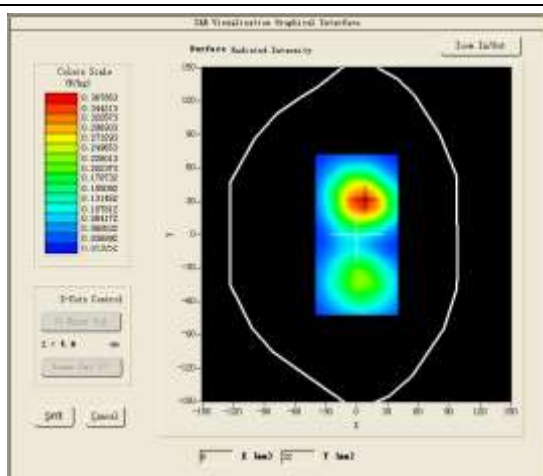




Test Mode: Hotspot WCDMA1900MHz, Mid channel(Body Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 09, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_1800                   |
| Frequency (MHz)                   | 1880.000000                |
| Relative permittivity (real part) | 53.27                      |
| Conductivity (S/m)                | 1.51                       |
| E-Field Probe                     | SN 17/14 EP221             |
| Crest Factor                      | 2.0                        |
| Conversion Factor                 | 4.29                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | 0.910000                   |
| SAR 10g (W/Kg)                    | 0.263265                   |
| SAR 1g (W/Kg)                     | 0.556631                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

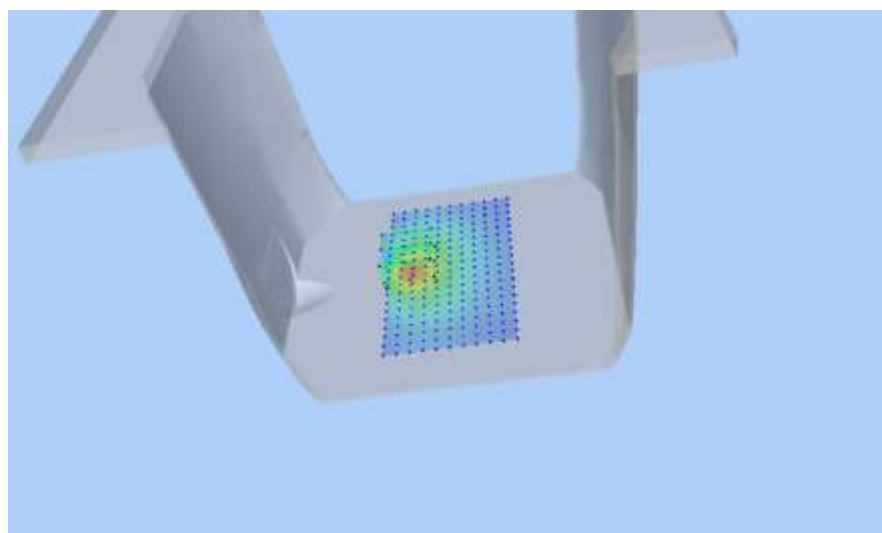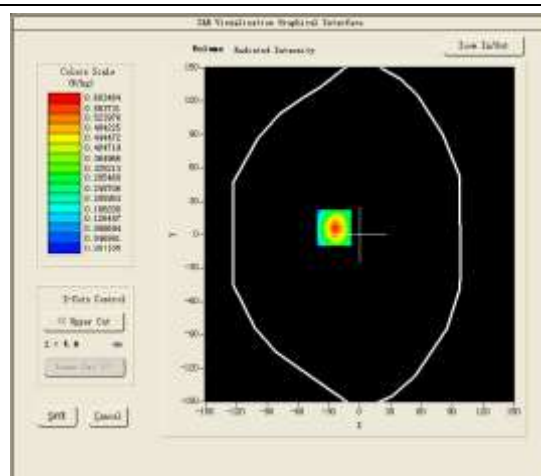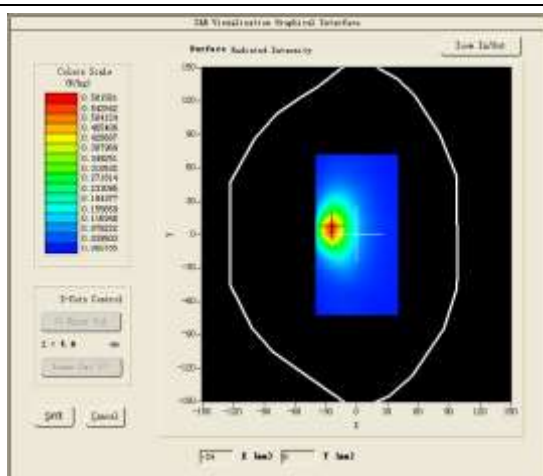




Test Mode:802.11b, Mid channel(Head Left Cheek)

Product Description: Mobile phone

Model: S400

Test Date: October 12, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_2450                   |
| Frequency (MHz)                   | 2437.000000                |
| Relative permittivity (real part) | 39.05                      |
| Conductivity (S/m)                | 1.77                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 1.0                        |
| Conversion Factor                 | 3.94                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -4.560000                  |
| SAR 10g (W/Kg)                    | 0.279321                   |
| SAR 1g (W/Kg)                     | 0.511030                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

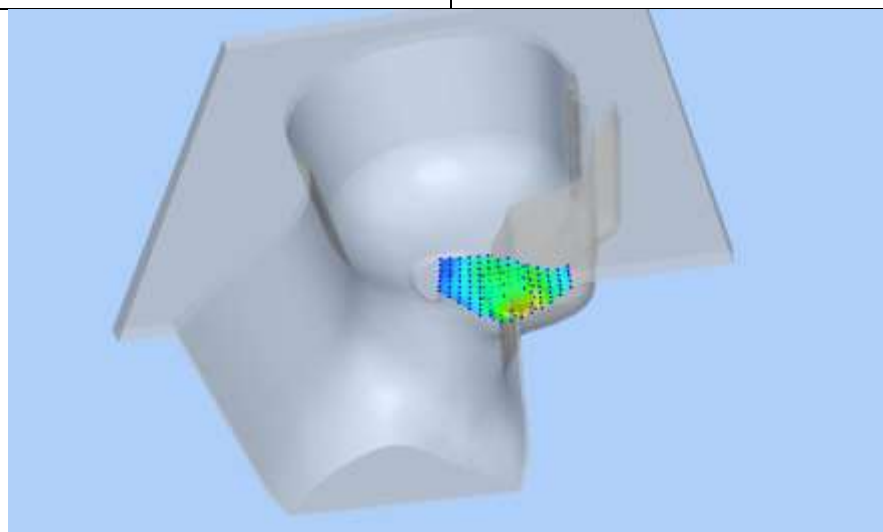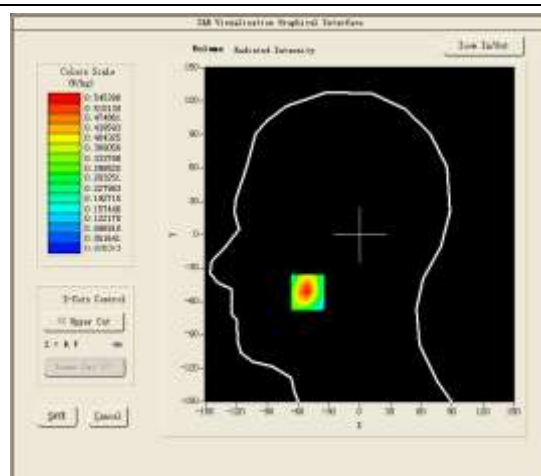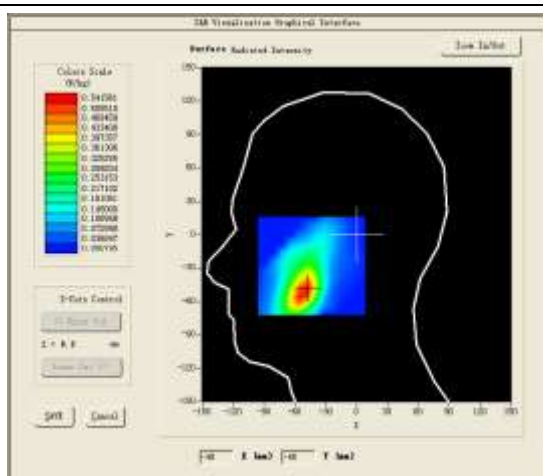




Test Mode:802.11b,Mid channel(Body SAR Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 12, 2015

|                                   |                            |
|-----------------------------------|----------------------------|
| Medium(liquid type)               | MSL_2450                   |
| Frequency (MHz)                   | 2437.000000                |
| Relative permittivity (real part) | 52.97                      |
| Conductivity (S/m)                | 1.93                       |
| E-Field Probe                     | SN 17/14 EP220             |
| Crest Factor                      | 1.0                        |
| Conversion Factor                 | 4.05                       |
| Sensor                            | 4mm                        |
| Area Scan                         | dx=8mm dy=8mm              |
| Zoom Scan                         | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -0.490000                  |
| SAR 10g (W/Kg)                    | 0.144960                   |
| SAR 1g (W/Kg)                     | 0.272998                   |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>          |

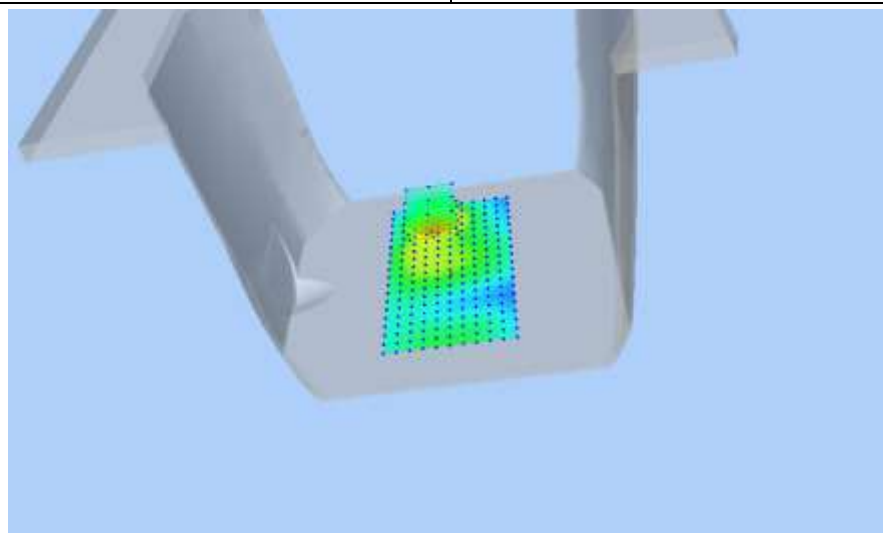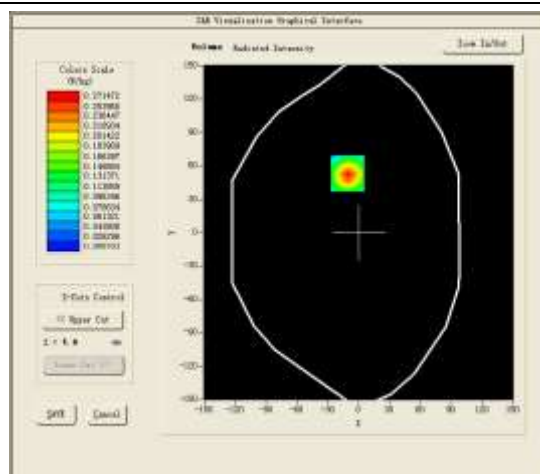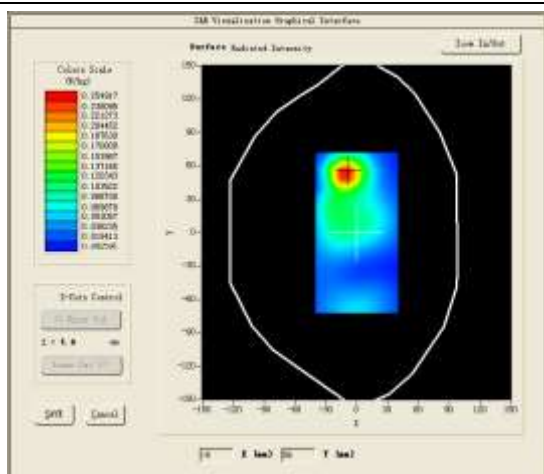




Test Mode: Hotspot 802.11b, Mid channel (Body SAR Back Side)

Product Description: Mobile phone

Model: S400

Test Date: October 12, 2015

|                                   |                             |
|-----------------------------------|-----------------------------|
| Medium(liquid type)               | MSL_2450                    |
| Frequency (MHz)                   | 2437.000000                 |
| Relative permittivity (real part) | 52.97                       |
| Conductivity (S/m)                | 1.93                        |
| E-Field Probe                     | SN 17/14 EP220              |
| Crest Factor                      | 1.0                         |
| Conversion Factor                 | 4.05                        |
| Sensor                            | 4mm                         |
| Area Scan                         | dx=8mm dy=8mm               |
| Zoom Scan                         | 5x5x7, dx=8mm dy=8mm dz=5mm |
| Variation (%)                     | -1.040000                   |
| SAR 10g (W/Kg)                    | 0.246295                    |
| SAR 1g (W/Kg)                     | 0.397821                    |
| <b>SURFACE SAR</b>                | <b>VOLUME SAR</b>           |

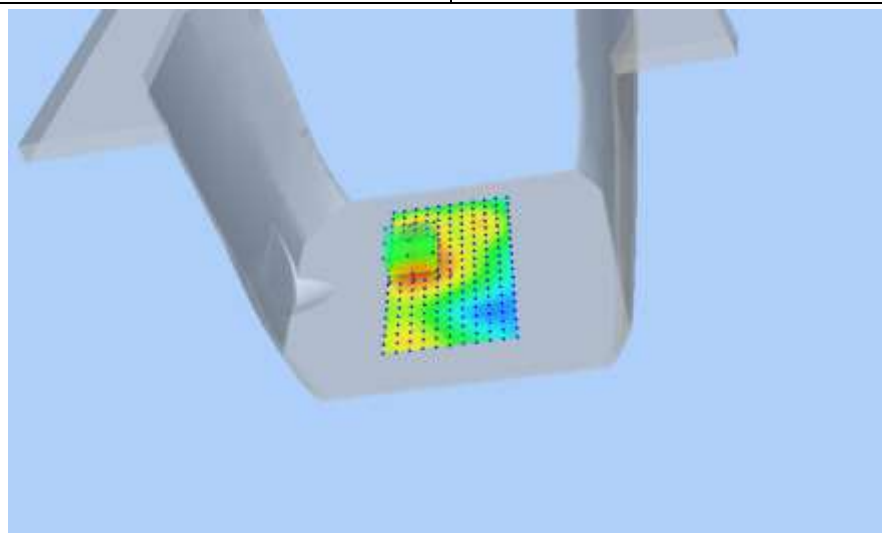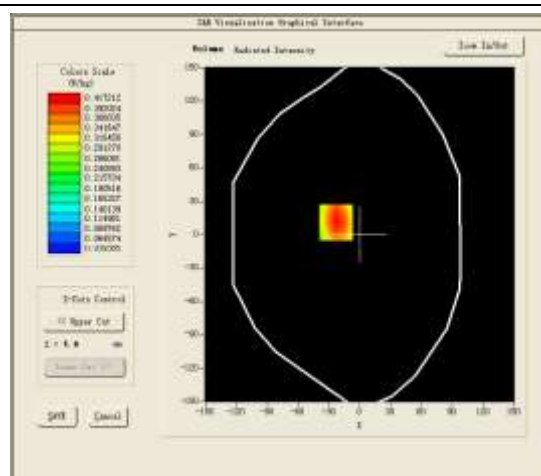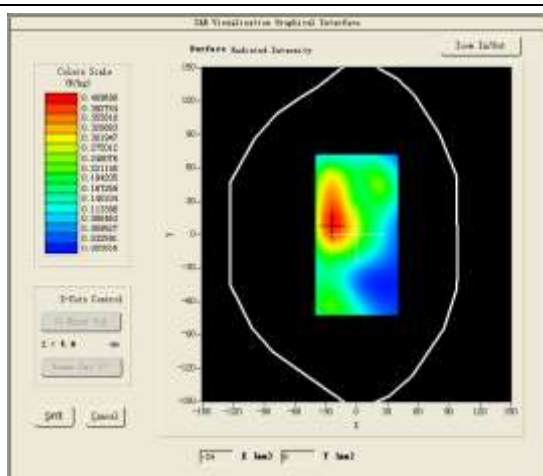

## 7.CALIBRATION CERTIFICATES

### SARTIMO Calibration Certificate-Extended Dipole Calibrations

According to KDB 450824 D02, Dipoles must be recalibrated at least once every three years; however, immediate re-calibration is required for following conditions. The test laboratory must ensure that the required supporting information and documentation have been included in the SAR report to qualify for extended 3-year calibration interval.

- 1) When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification
- 2) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5  $\Omega$  from the previous measurement

Summary Result:

| SID835   |                 |                 |                              |
|----------|-----------------|-----------------|------------------------------|
| Frquency | Return Loss(dB) | Requirement(dB) | Impedence                    |
| 835      | -24.46          | -20             | 55.4 $\Omega$ +2.4j $\Omega$ |

| SID1900  |                 |                 |                              |
|----------|-----------------|-----------------|------------------------------|
| Frquency | Return Loss(dB) | Requirement(dB) | Impedence                    |
| 1900     | -23.68          | -20             | 51.2 $\Omega$ +6.4j $\Omega$ |

| SID 2450 |                 |                 |                              |
|----------|-----------------|-----------------|------------------------------|
| Frquency | Return Loss(dB) | Requirement(dB) | Impedence                    |
| 2450     | -25.61          | -20             | 44.9 $\Omega$ -0.9j $\Omega$ |

## 7.1. Probe Calibration Certificate



### COMOSAR E-Field Probe Calibration Report

Ref : ACR.287.1.14.SATU.A

**SHENZHEN LCS COMPLIANCE TESTING  
LABORATORY LTD.**  
**1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,  
BAO'AN BLVD**  
**BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA**  
**SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE**  
**SERIAL NO.: SN 17/14 EP220**

**Calibrated at SATIMO US**  
**2105 Barrett Park Dr. - Kennesaw, GA 30144**



**10/01/2014**

#### *Summary:*

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>     |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 10/14/2014  | <i>JS</i>            |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 10/14/2014  | <i>JS</i>            |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 10/14/2014  | <i>Kim Rutkowski</i> |

|                       | <i>Customer Name</i>                                  |
|-----------------------|-------------------------------------------------------|
| <i>Distribution :</i> | Shenzhen LCS<br>Compliance Testing<br>Laboratory Ltd. |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 10/14/2014  | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

## TABLE OF CONTENTS

|     |                                       |   |
|-----|---------------------------------------|---|
| 1   | Device Under Test .....               | 4 |
| 2   | Product Description .....             | 4 |
| 2.1 | General Information .....             | 4 |
| 3   | Measurement Method .....              | 4 |
| 3.1 | Linearity .....                       | 4 |
| 3.2 | Sensitivity .....                     | 5 |
| 3.3 | Lower Detection Limit .....           | 5 |
| 3.4 | Isotropy .....                        | 5 |
| 3.5 | Boundary Effect .....                 | 5 |
| 4   | Measurement Uncertainty .....         | 5 |
| 5   | Calibration Measurement Results ..... | 6 |
| 5.1 | Sensitivity in air .....              | 6 |
| 5.2 | Linearity .....                       | 7 |
| 5.3 | Sensitivity in liquid .....           | 7 |
| 5.4 | Isotropy .....                        | 8 |
| 6   | List of Equipment .....               | 9 |

Page: 3/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.287.1.14.SATU.A

## 1 DEVICE UNDER TEST

| Device Under Test                        |                                                                         |
|------------------------------------------|-------------------------------------------------------------------------|
| Device Type                              | COMOSAR DOSIMETRIC E FIELD PROBE                                        |
| Manufacturer                             | Satimo                                                                  |
| Model                                    | SSE5                                                                    |
| Serial Number                            | SN 17/14 EP220                                                          |
| Product Condition (new / used)           | New                                                                     |
| Frequency Range of Probe                 | 0.7 GHz-3GHz                                                            |
| Resistance of Three Dipoles at Connector | Dipole 1: R1=0.179 MΩ<br>Dipole 2: R2=0.175 MΩ<br>Dipole 3: R3=0.180 MΩ |

A yearly calibration interval is recommended.

## 2 PRODUCT DESCRIPTION

### 2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – Satimo COMOSAR Dosimetric E field Dipole

|                                            |        |
|--------------------------------------------|--------|
| Probe Length                               | 330 mm |
| Length of Individual Dipoles               | 4.5 mm |
| Maximum external diameter                  | 8 mm   |
| Probe Tip External Diameter                | 5 mm   |
| Distance between dipoles / probe extremity | 2.7 mm |

## 3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

### 3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

### 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

### 3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

### 3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

### 3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

## 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

| Uncertainty analysis of the probe calibration in waveguide |                       |                          |            |    |                          |
|------------------------------------------------------------|-----------------------|--------------------------|------------|----|--------------------------|
| ERROR SOURCES                                              | Uncertainty value (%) | Probability Distribution | Divisor    | ci | Standard Uncertainty (%) |
| Incident or forward power                                  | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Reflected power                                            | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Liquid conductivity                                        | 5.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.887%                   |
| Liquid permittivity                                        | 4.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.309%                   |
| Field homogeneity                                          | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Field probe positioning                                    | 5.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.887%                   |
| Field probe linearity                                      | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |

Page: 5/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

|                                                     |  |  |  |  |        |
|-----------------------------------------------------|--|--|--|--|--------|
| Combined standard uncertainty                       |  |  |  |  | 5.831% |
| Expanded uncertainty<br>95 % confidence level k = 2 |  |  |  |  | 12.0%  |

## 5 CALIBRATION MEASUREMENT RESULTS

| Calibration Parameters |       |
|------------------------|-------|
| Liquid Temperature     | 21 °C |
| Lab Temperature        | 21 °C |
| Lab Humidity           | 45 %  |

### 5.1 SENSITIVITY IN AIR


| Normx dipole<br>1 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normy dipole<br>2 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normz dipole<br>3 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) |
|-----------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|
| 6.02                                                      | 5.52                                                      | 5.72                                                      |

| DCP dipole 1<br>(mV) | DCP dipole 2<br>(mV) | DCP dipole 3<br>(mV) |
|----------------------|----------------------|----------------------|
| 99                   | 98                   | 99                   |

Calibration curves  $e_i=f(V)$  ( $i=1,2,3$ ) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

Calibration curves

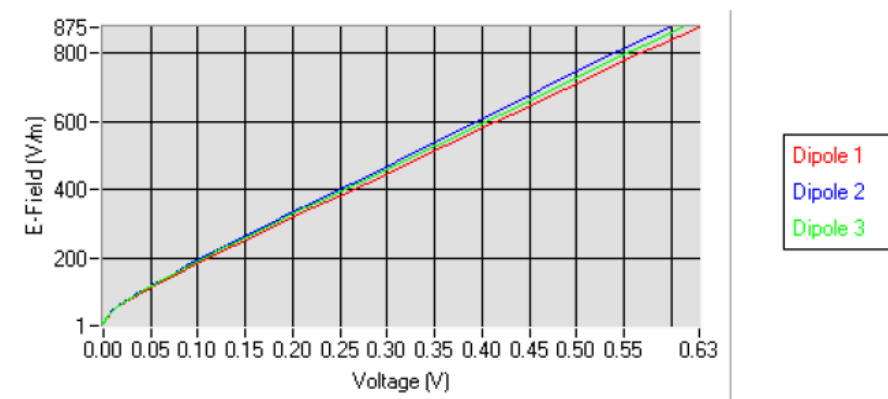

Page: 6/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A

5.2 LINEARITY

## Linearity

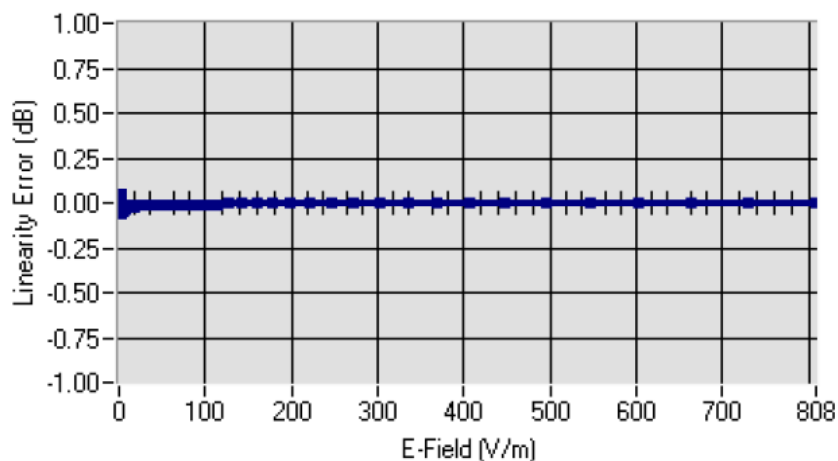Linearity:  $\pm 1.47\%$  ( $\pm 0.06\text{dB}$ )5.3 SENSITIVITY IN LIQUID

| Liquid | Frequency<br>(MHz $\pm$ 100MHz) | Permittivity | Epsilon (S/m) | ConvF |
|--------|---------------------------------|--------------|---------------|-------|
| HL750  | 750                             | 42.06        | 0.89          | 4.58  |
| BL750  | 750                             | 56.57        | 0.99          | 4.71  |
| HL850  | 835                             | 42.81        | 0.89          | 4.86  |
| BL850  | 835                             | 53.46        | 0.96          | 5.04  |
| HL900  | 900                             | 42.47        | 0.96          | 4.74  |
| BL900  | 900                             | 56.69        | 1.08          | 4.92  |
| HL1800 | 1800                            | 41.31        | 1.38          | 4.16  |
| BL1800 | 1800                            | 53.27        | 1.51          | 4.29  |
| HL2000 | 2000                            | 39.72        | 1.43          | 4.19  |
| BL2000 | 2000                            | 53.91        | 1.53          | 4.28  |
| HL2450 | 2450                            | 39.05        | 1.77          | 3.94  |
| BL2450 | 2450                            | 52.97        | 1.93          | 4.05  |

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.287.1.14.SATU.A


#### 5.4 ISOTROPY

**HL900 MHz**

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.07 dB

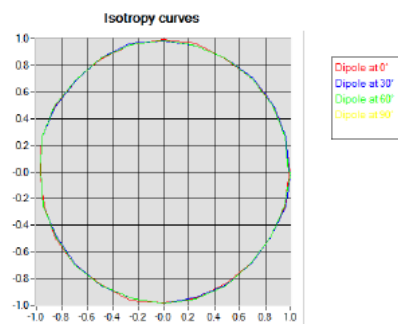**HL1800 MHz**

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB

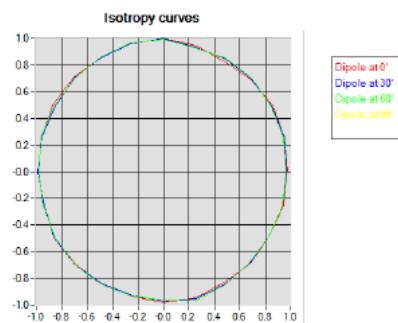

Page: 8/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.287.1.14.SATU.A

## 6 LIST OF EQUIPMENT

| Equipment Summary Sheet       |                      |                    |                                               |                                               |
|-------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description         | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| Flat Phantom                  | Satimo               | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench            | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer              | Rhode & Schwarz ZVA  | SN100132           | 02/2013                                       | 02/2016                                       |
| Reference Probe               | Satimo               | EP 94 SN 37/08     | 10/2013                                       | 10/2014                                       |
| Multimeter                    | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator              | Agilent E4438C       | MY49070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                     | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                   | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                  | HP ECP-E26A          | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler           | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Waveguide                     | Mega Industries      | 069Y7-158-13-712   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Transition          | Mega Industries      | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Termination         | Mega Industries      | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Temperature / Humidity Sensor | Control Company      | 11-661-9           | 8/2012                                        | 8/2015                                        |

Page: 9/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## COMOSAR E-Field Probe Calibration Report

Ref : ACR.262.1.14.SATU.A

**SHENZHEN LCS COMPLIANCE TESTING  
LABORATORY LTD.**  
**1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,  
BAO'AN BLVD**  
**BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA**  
**SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE**  
**SERIAL NO.: SN 17/14 EP221**

**Calibrated at SATIMO US**  
**2105 Barrett Park Dr. - Kennesaw, GA 30144**



**09/01/2014**

### *Summary:*

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>     |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 9/19/2014   | <i>JS</i>            |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 9/19/2014   | <i>JS</i>            |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 9/19/2014   | <i>Kim Rutkowski</i> |

|                       | <i>Customer Name</i>                                  |
|-----------------------|-------------------------------------------------------|
| <i>Distribution :</i> | Shenzhen LCS<br>Compliance Testing<br>Laboratory Ltd. |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 9/19/2014   | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A

## TABLE OF CONTENTS

|     |                                       |   |
|-----|---------------------------------------|---|
| 1   | Device Under Test .....               | 4 |
| 2   | Product Description .....             | 4 |
| 2.1 | General Information .....             | 4 |
| 3   | Measurement Method .....              | 4 |
| 3.1 | Linearity .....                       | 4 |
| 3.2 | Sensitivity .....                     | 5 |
| 3.3 | Lower Detection Limit .....           | 5 |
| 3.4 | Isotropy .....                        | 5 |
| 3.5 | Boundary Effect .....                 | 5 |
| 4   | Measurement Uncertainty .....         | 5 |
| 5   | Calibration Measurement Results ..... | 6 |
| 5.1 | Sensitivity in air .....              | 6 |
| 5.2 | Linearity .....                       | 7 |
| 5.3 | Sensitivity in liquid .....           | 7 |
| 5.4 | Isotropy .....                        | 8 |
| 6   | List of Equipment .....               | 9 |

Page: 3/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A

**1 DEVICE UNDER TEST**

| Device Under Test                        |                                                                         |
|------------------------------------------|-------------------------------------------------------------------------|
| Device Type                              | COMOSAR DOSIMETRIC E FIELD PROBE                                        |
| Manufacturer                             | Satimo                                                                  |
| Model                                    | SSE5                                                                    |
| Serial Number                            | SN 17/14 EP221                                                          |
| Product Condition (new / used)           | New                                                                     |
| Frequency Range of Probe                 | 0.4 GHz- 6 GHz                                                          |
| Resistance of Three Dipoles at Connector | Dipole 1: R1=0.179 MΩ<br>Dipole 2: R2=0.167 MΩ<br>Dipole 3: R3=0.178 MΩ |

A yearly calibration interval is recommended.

**2 PRODUCT DESCRIPTION****2.1 GENERAL INFORMATION**

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



**Figure 1** – Satimo COMOSAR Dosimetric E field Dipole

|                                            |        |
|--------------------------------------------|--------|
| Probe Length                               | 330 mm |
| Length of Individual Dipoles               | 4.5 mm |
| Maximum external diameter                  | 8 mm   |
| Probe Tip External Diameter                | 5 mm   |
| Distance between dipoles / probe extremity | 2.7 mm |

**3 MEASUREMENT METHOD**

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

**3.1 LINEARITY**

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A

### 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

### 3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

### 3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

### 3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

## 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

| Uncertainty analysis of the probe calibration in waveguide |                       |                          |            |    |                          |
|------------------------------------------------------------|-----------------------|--------------------------|------------|----|--------------------------|
| ERROR SOURCES                                              | Uncertainty value (%) | Probability Distribution | Divisor    | ci | Standard Uncertainty (%) |
| Incident or forward power                                  | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Reflected power                                            | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Liquid conductivity                                        | 5.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.887%                   |
| Liquid permittivity                                        | 4.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.309%                   |
| Field homogeneity                                          | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Field probe positioning                                    | 5.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.887%                   |
| Field probe linearity                                      | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |

Page: 5/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A

|                                                     |  |  |  |  |        |
|-----------------------------------------------------|--|--|--|--|--------|
| Combined standard uncertainty                       |  |  |  |  | 5.831% |
| Expanded uncertainty<br>95 % confidence level k = 2 |  |  |  |  | 12.0%  |

## 5 CALIBRATION MEASUREMENT RESULTS

| Calibration Parameters |       |
|------------------------|-------|
| Liquid Temperature     | 21 °C |
| Lab Temperature        | 21 °C |
| Lab Humidity           | 45 %  |

## 5.1 SENSITIVITY IN AIR


| Normx dipole<br>1 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normy dipole<br>2 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normz dipole<br>3 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) |
|-----------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|
| 4.81                                                      | 6.15                                                      | 6.02                                                      |

| DCP dipole 1<br>(mV) | DCP dipole 2<br>(mV) | DCP dipole 3<br>(mV) |
|----------------------|----------------------|----------------------|
| 95                   | 100                  | 90                   |

Calibration curves  $e_i=f(V)$  ( $i=1,2,3$ ) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

Calibration curves

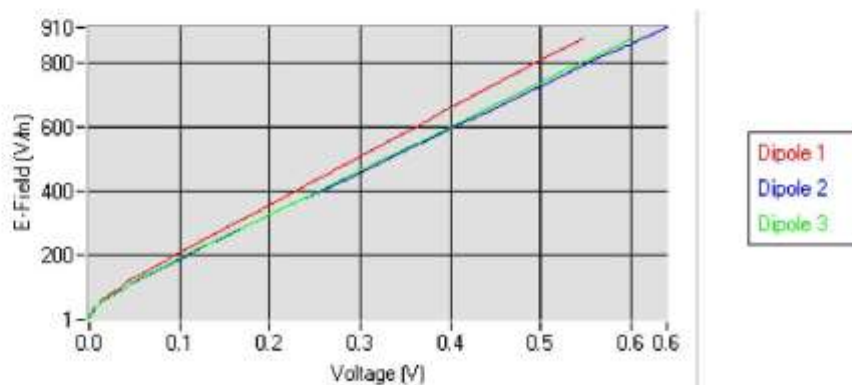


Page: 6/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A

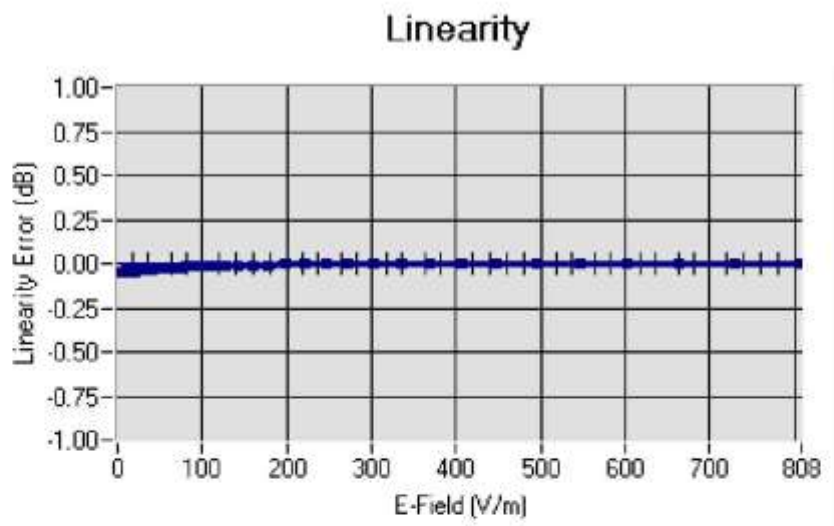5.2 LINEARITY

Linearity:  $\pm 1.16\%$  ( $\pm 0.05\text{dB}$ )

5.3 SENSITIVITY IN LIQUID

| Liquid | Frequency<br>(MHz $\pm$ 100MHz) | Permittivity | Epsilon (S/m) | ConvF |
|--------|---------------------------------|--------------|---------------|-------|
| HL450  | 450                             | 43.90        | 0.87          | 4.84  |
| BL450  | 450                             | 58.63        | 0.98          | 4.98  |
| HL750  | 750                             | 42.06        | 0.89          | 4.53  |
| BL750  | 750                             | 56.57        | 0.99          | 4.70  |
| HL850  | 835                             | 42.81        | 0.89          | 4.83  |
| BL850  | 835                             | 53.46        | 0.96          | 5.02  |
| HL900  | 900                             | 42.47        | 0.96          | 4.74  |
| BL900  | 900                             | 56.69        | 1.08          | 4.89  |
| HL1800 | 1800                            | 41.31        | 1.38          | 4.25  |
| BL1800 | 1800                            | 53.27        | 1.51          | 4.34  |
| HL1900 | 1900                            | 41.09        | 1.42          | 4.71  |
| BL1900 | 1900                            | 54.20        | 1.54          | 4.85  |
| HL2000 | 2000                            | 39.72        | 1.43          | 4.27  |
| BL2000 | 2000                            | 53.91        | 1.53          | 4.44  |
| HL2450 | 2450                            | 39.05        | 1.77          | 4.11  |
| BL2450 | 2450                            | 52.97        | 1.93          | 4.25  |
| HL2600 | 2600                            | 38.35        | 1.92          | 4.20  |
| BL2600 | 2600                            | 51.81        | 2.19          | 4.32  |

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A


## 5.4 ISOTROPY

**HL900 MHz**

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.07 dB

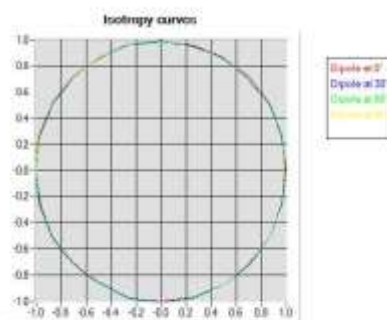**HL1800 MHz**

- Axial isotropy: 0.05 dB
- Hemispherical isotropy: 0.08 dB

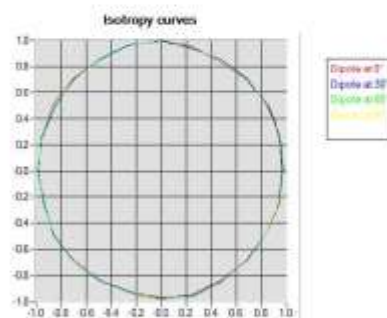

Page: 8/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.262.1.14.SATU.A

## 6 LIST OF EQUIPMENT

| Equipment Summary Sheet       |                      |                    |                                               |                                               |
|-------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description         | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| Flat Phantom                  | Satimo               | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench            | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer              | Rhode & Schwarz ZVA  | SN100132           | 02/2013                                       | 02/2016                                       |
| Reference Probe               | Satimo               | EP 94 SN 37/08     | 10/2013                                       | 10/2014                                       |
| Multimeter                    | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator              | Agilent E4438C       | MY49070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                     | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                   | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                  | HP ECP-E26A          | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler           | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Waveguide                     | Mega Industries      | 069Y7-158-13-712   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Transition          | Mega Industries      | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Termination         | Mega Industries      | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Temperature / Humidity Sensor | Control Company      | 11-661-9           | 8/2012                                        | 8/2015                                        |

Page: 9/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*

## 7.2. SID835Dipole Calibration Certificate



### SAR Reference Dipole Calibration Report

Ref : ACR.287.4.14.SATU.A

#### SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,  
BAO'AN BLVD

BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA

**SATIMO COMOSAR REFERENCE DIPOLE**

**FREQUENCY: 835 MHZ**

**SERIAL NO.: SN 07/14 DIP 0G835-303**

**Calibrated at SATIMO US**

**2105 Barrett Park Dr. - Kennesaw, GA 30144**



**10/01/2014**

#### *Summary:*

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.4.14.SATU.A

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>     |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 10/14/2014  | <i>JS</i>            |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 10/14/2014  | <i>JS</i>            |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 10/14/2014  | <i>Kim Rutkowski</i> |

|                       | <i>Customer Name</i>                                  |
|-----------------------|-------------------------------------------------------|
| <i>Distribution :</i> | Shenzhen LCS<br>Compliance Testing<br>Laboratory Ltd. |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 10/14/2014  | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.4.14.SATU.A

---

**TABLE OF CONTENTS**

|     |                                               |    |
|-----|-----------------------------------------------|----|
| 1   | Introduction.....                             | 4  |
| 2   | Device Under Test .....                       | 4  |
| 3   | Product Description .....                     | 4  |
| 3.1 | General Information .....                     | 4  |
| 4   | Measurement Method .....                      | 5  |
| 4.1 | Return Loss Requirements .....                | 5  |
| 4.2 | Mechanical Requirements .....                 | 5  |
| 5   | Measurement Uncertainty .....                 | 5  |
| 5.1 | Return Loss .....                             | 5  |
| 5.2 | Dimension Measurement .....                   | 5  |
| 5.3 | Validation Measurement .....                  | 5  |
| 6   | Calibration Measurement Results .....         | 6  |
| 6.1 | Return Loss and Impedance .....               | 6  |
| 6.2 | Mechanical Dimensions .....                   | 6  |
| 7   | Validation measurement .....                  | 7  |
| 7.1 | Head Liquid Measurement .....                 | 7  |
| 7.2 | SAR Measurement Result With Head Liquid ..... | 7  |
| 7.3 | Body Liquid Measurement .....                 | 9  |
| 7.4 | SAR Measurement Result With Body Liquid ..... | 9  |
| 8   | List of Equipment .....                       | 11 |

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.287.4.14.SATU.A

## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                  |
|--------------------------------|----------------------------------|
| Device Type                    | COMOSAR 835 MHz REFERENCE DIPOLE |
| Manufacturer                   | Satimo                           |
| Model                          | SID835                           |
| Serial Number                  | SN 07/14 DIP 0G835-303           |
| Product Condition (new / used) | New                              |

A yearly calibration interval is recommended.

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



**Figure 1** – Satimo COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.4.14.SATU.A

#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

##### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

##### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

##### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

| Frequency band | Expanded Uncertainty on Return Loss |
|----------------|-------------------------------------|
| 400-6000MHz    | 0.1 dB                              |

##### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

| Length (mm) | Expanded Uncertainty on Length |
|-------------|--------------------------------|
| 3 - 300     | 0.05 mm                        |

##### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

| Scan Volume | Expanded Uncertainty |
|-------------|----------------------|
| 1 g         | 20.3 %               |
| 10 g        | 20.1 %               |

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.287.4.14.SATU.A

## 6 CALIBRATION MEASUREMENT RESULTS

### 6.1 RETURN LOSS AND IMPEDANCE

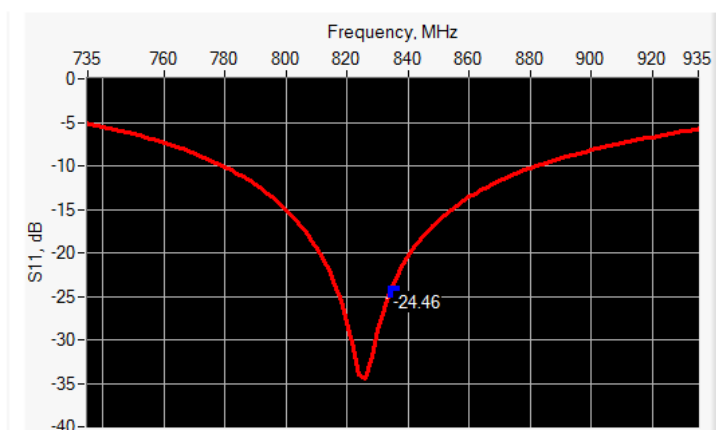

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                   |
|-----------------|------------------|------------------|-----------------------------|
| 835             | -24.46           | -20              | $55.4 \Omega + 2.4 j\Omega$ |

### 6.2 MECHANICAL DIMENSIONS

| Frequency MHz | L mm            |          | h mm            |          | d mm           |          |
|---------------|-----------------|----------|-----------------|----------|----------------|----------|
|               | required        | measured | required        | measured | required       | measured |
| 300           | 420.0 $\pm$ 1 % |          | 250.0 $\pm$ 1 % |          | 6.35 $\pm$ 1 % |          |
| 450           | 290.0 $\pm$ 1 % |          | 166.7 $\pm$ 1 % |          | 6.35 $\pm$ 1 % |          |
| 750           | 176.0 $\pm$ 1 % |          | 100.0 $\pm$ 1 % |          | 6.35 $\pm$ 1 % |          |
| 835           | 161.0 $\pm$ 1 % | PASS     | 89.8 $\pm$ 1 %  | PASS     | 3.6 $\pm$ 1 %  | PASS     |
| 900           | 149.0 $\pm$ 1 % |          | 83.3 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1450          | 89.1 $\pm$ 1 %  |          | 51.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1500          | 80.5 $\pm$ 1 %  |          | 50.0 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1640          | 79.0 $\pm$ 1 %  |          | 45.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1750          | 75.2 $\pm$ 1 %  |          | 42.9 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1800          | 72.0 $\pm$ 1 %  |          | 41.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1900          | 68.0 $\pm$ 1 %  |          | 39.5 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1950          | 66.3 $\pm$ 1 %  |          | 38.5 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2000          | 64.5 $\pm$ 1 %  |          | 37.5 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2100          | 61.0 $\pm$ 1 %  |          | 35.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2300          | 55.5 $\pm$ 1 %  |          | 32.6 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2450          | 51.5 $\pm$ 1 %  |          | 30.4 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2600          | 48.5 $\pm$ 1 %  |          | 28.8 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 3000          | 41.5 $\pm$ 1 %  |          | 25.0 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 3500          | 37.0 $\pm$ 1 %  |          | 26.4 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 3700          | 34.7 $\pm$ 1 %  |          | 26.4 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.4.14.SATU.A

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

### 7.1 HEAD LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r'$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|-----------------------------------------|----------|-------------------------------|----------|
|                  | required                                | measured | required                      | measured |
| 300              | 45.3 $\pm$ 5 %                          |          | 0.87 $\pm$ 5 %                |          |
| 450              | 43.5 $\pm$ 5 %                          |          | 0.87 $\pm$ 5 %                |          |
| 750              | 41.9 $\pm$ 5 %                          |          | 0.89 $\pm$ 5 %                |          |
| 835              | 41.5 $\pm$ 5 %                          | PASS     | 0.90 $\pm$ 5 %                | PASS     |
| 900              | 41.5 $\pm$ 5 %                          |          | 0.97 $\pm$ 5 %                |          |
| 1450             | 40.5 $\pm$ 5 %                          |          | 1.20 $\pm$ 5 %                |          |
| 1500             | 40.4 $\pm$ 5 %                          |          | 1.23 $\pm$ 5 %                |          |
| 1640             | 40.2 $\pm$ 5 %                          |          | 1.31 $\pm$ 5 %                |          |
| 1750             | 40.1 $\pm$ 5 %                          |          | 1.37 $\pm$ 5 %                |          |
| 1800             | 40.0 $\pm$ 5 %                          |          | 1.40 $\pm$ 5 %                |          |
| 1900             | 40.0 $\pm$ 5 %                          |          | 1.40 $\pm$ 5 %                |          |
| 1950             | 40.0 $\pm$ 5 %                          |          | 1.40 $\pm$ 5 %                |          |
| 2000             | 40.0 $\pm$ 5 %                          |          | 1.40 $\pm$ 5 %                |          |
| 2100             | 39.8 $\pm$ 5 %                          |          | 1.49 $\pm$ 5 %                |          |
| 2300             | 39.5 $\pm$ 5 %                          |          | 1.67 $\pm$ 5 %                |          |
| 2450             | 39.2 $\pm$ 5 %                          |          | 1.80 $\pm$ 5 %                |          |
| 2600             | 39.0 $\pm$ 5 %                          |          | 1.96 $\pm$ 5 %                |          |
| 3000             | 38.5 $\pm$ 5 %                          |          | 2.40 $\pm$ 5 %                |          |
| 3500             | 37.9 $\pm$ 5 %                          |          | 2.91 $\pm$ 5 %                |          |

### 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

|                                           |                                                       |
|-------------------------------------------|-------------------------------------------------------|
| Software                                  | OPENSAR V4                                            |
| Phantom                                   | SN 20/09 SAM71                                        |
| Probe                                     | SN 18/11 EPG122                                       |
| Liquid                                    | Head Liquid Values: $\epsilon_r'$ : 42.3 sigma : 0.92 |
| Distance between dipole center and liquid | 15.0 mm                                               |
| Area scan resolution                      | dx=8mm/dy=8mm                                         |

Page: 7/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.4.14.SATU.A

|                      |                     |
|----------------------|---------------------|
| Zoon Scan Resolution | dx=8mm/dy=8m/dz=5mm |
| Frequency            | 835 MHz             |
| Input power          | 20 dBm              |
| Liquid Temperature   | 21 °C               |
| Lab Temperature      | 21 °C               |
| Lab Humidity         | 45 %                |

| Frequency<br>MHz | 1 g SAR (W/kg/W) |             | 10 g SAR (W/kg/W) |             |
|------------------|------------------|-------------|-------------------|-------------|
|                  | required         | measured    | required          | measured    |
| 300              | 2.85             |             | 1.94              |             |
| 450              | 4.58             |             | 3.06              |             |
| 750              | 8.49             |             | 5.55              |             |
| 835              | 9.56             | 9.60 (0.96) | 6.22              | 6.20 (0.62) |
| 900              | 10.9             |             | 6.99              |             |
| 1450             | 29               |             | 16                |             |
| 1500             | 30.5             |             | 16.8              |             |
| 1640             | 34.2             |             | 18.4              |             |
| 1750             | 36.4             |             | 19.3              |             |
| 1800             | 38.4             |             | 20.1              |             |
| 1900             | 39.7             |             | 20.5              |             |
| 1950             | 40.5             |             | 20.9              |             |
| 2000             | 41.1             |             | 21.1              |             |
| 2100             | 43.6             |             | 21.9              |             |
| 2300             | 48.7             |             | 23.3              |             |
| 2450             | 52.4             |             | 24                |             |
| 2600             | 55.3             |             | 24.6              |             |
| 3000             | 63.8             |             | 25.7              |             |
| 3500             | 67.1             |             | 25                |             |

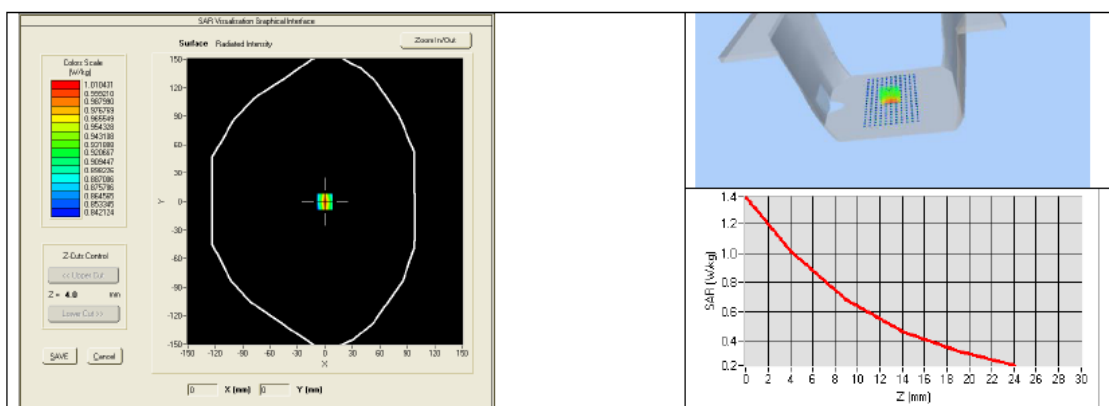

Page: 8/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.4.14.SATU.A

## 7.3 BODY LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r'$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|-----------------------------------------|----------|-------------------------------|----------|
|                  | required                                | measured | required                      | measured |
| 150              | 61.9 $\pm$ 5 %                          |          | 0.80 $\pm$ 5 %                |          |
| 300              | 58.2 $\pm$ 5 %                          |          | 0.92 $\pm$ 5 %                |          |
| 450              | 56.7 $\pm$ 5 %                          |          | 0.94 $\pm$ 5 %                |          |
| 750              | 55.5 $\pm$ 5 %                          |          | 0.96 $\pm$ 5 %                |          |
| 835              | 55.2 $\pm$ 5 %                          | PASS     | 0.97 $\pm$ 5 %                | PASS     |
| 900              | 55.0 $\pm$ 5 %                          |          | 1.05 $\pm$ 5 %                |          |
| 915              | 55.0 $\pm$ 5 %                          |          | 1.06 $\pm$ 5 %                |          |
| 1450             | 54.0 $\pm$ 5 %                          |          | 1.30 $\pm$ 5 %                |          |
| 1610             | 53.8 $\pm$ 5 %                          |          | 1.40 $\pm$ 5 %                |          |
| 1800             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 1900             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 2000             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 2100             | 53.2 $\pm$ 5 %                          |          | 1.62 $\pm$ 5 %                |          |
| 2450             | 52.7 $\pm$ 5 %                          |          | 1.95 $\pm$ 5 %                |          |
| 2600             | 52.5 $\pm$ 5 %                          |          | 2.16 $\pm$ 5 %                |          |
| 3000             | 52.0 $\pm$ 5 %                          |          | 2.73 $\pm$ 5 %                |          |
| 3500             | 51.3 $\pm$ 5 %                          |          | 3.31 $\pm$ 5 %                |          |
| 5200             | 49.0 $\pm$ 10 %                         |          | 5.30 $\pm$ 10 %               |          |
| 5300             | 48.9 $\pm$ 10 %                         |          | 5.42 $\pm$ 10 %               |          |
| 5400             | 48.7 $\pm$ 10 %                         |          | 5.53 $\pm$ 10 %               |          |
| 5500             | 48.6 $\pm$ 10 %                         |          | 5.65 $\pm$ 10 %               |          |
| 5600             | 48.5 $\pm$ 10 %                         |          | 5.77 $\pm$ 10 %               |          |
| 5800             | 48.2 $\pm$ 10 %                         |          | 6.00 $\pm$ 10 %               |          |

## 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

|                                           |                                                       |
|-------------------------------------------|-------------------------------------------------------|
| Software                                  | OPENSAR V4                                            |
| Phantom                                   | SN 20/09 SAM71                                        |
| Probe                                     | SN 18/11 EPG122                                       |
| Liquid                                    | Body Liquid Values: $\epsilon_r'$ : 54.1 sigma : 0.97 |
| Distance between dipole center and liquid | 15.0 mm                                               |
| Area scan resolution                      | dx=8mm/dy=8mm                                         |
| Zoon Scan Resolution                      | dx=8mm/dy=8m/dz=5mm                                   |
| Frequency                                 | 835 MHz                                               |
| Input power                               | 20 dBm                                                |
| Liquid Temperature                        | 21 °C                                                 |
| Lab Temperature                           | 21 °C                                                 |
| Lab Humidity                              | 45 %                                                  |

Page: 9/11


This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.287.4.14.SATU.A

| Frequency<br>MHz | 1 g SAR (W/kg/W) | 10 g SAR (W/kg/W) |
|------------------|------------------|-------------------|
|                  | measured         | measured          |
| 835              | 9.90 (0.99)      | 6.39 (0.64)       |

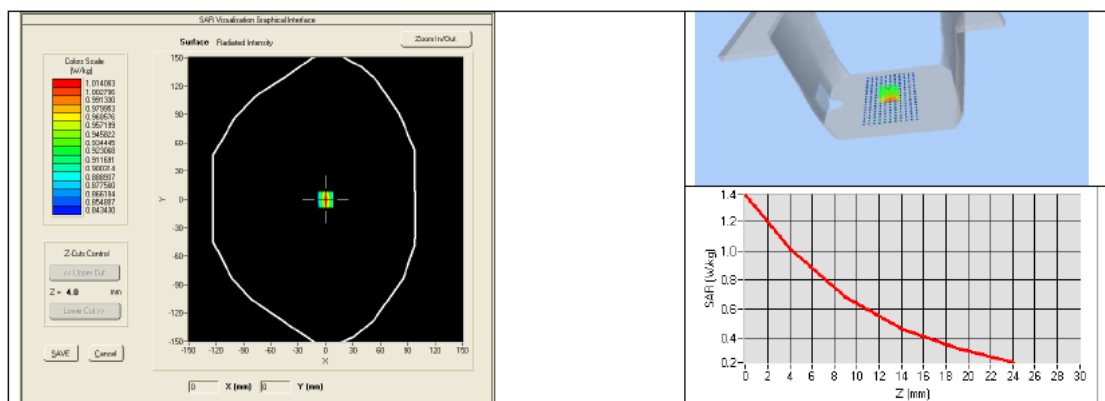

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.4.14.SATU.A

## 8 LIST OF EQUIPMENT

| Equipment Summary Sheet         |                      |                    |                                               |                                               |
|---------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description           | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| SAM Phantom                     | Satimo               | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench              | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                | Rhode & Schwarz ZVA  | SN100132           | 02/2013                                       | 02/2016                                       |
| Calipers                        | Carrera              | CALIPER-01         | 12/2013                                       | 12/2016                                       |
| Reference Probe                 | Satimo               | EPG122 SN 18/11    | 10/2013                                       | 10/2014                                       |
| Multimeter                      | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator                | Agilent E4438C       | MY49070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                       | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                     | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                    | HP ECP-E26A          | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler             | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature and Humidity Sensor | Control Company      | 11-661-9           | 8/2012                                        | 8/2015                                        |

Page: 11/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*

### 7.3. SID1900 Dipole Calibration Certificate



## SAR Reference Dipole Calibration Report

Ref : ACR.262.8.14.SATU.A

### SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,  
BAO'AN BLVD  
BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA  
**SATIMO COMOSAR REFERENCE DIPOLE**

**FREQUENCY: 1900 MHZ**

**SERIAL NO.: SN 30/14 DIP1G900-333**

**Calibrated at SATIMO US**

**2105 Barrett Park Dr. - Kennesaw, GA 30144**



**09/01/2014**

#### *Summary:*

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>     |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 9/19/2014   | <i>JS</i>            |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 9/19/2014   | <i>JS</i>            |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 9/19/2014   | <i>Kim Rutkowski</i> |

|                       | <i>Customer Name</i>                                  |
|-----------------------|-------------------------------------------------------|
| <i>Distribution :</i> | Shenzhen LCS<br>Compliance Testing<br>Laboratory Ltd. |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 9/19/2014   | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

## TABLE OF CONTENTS

|     |                                                |    |
|-----|------------------------------------------------|----|
| 1   | Introduction.....                              | 4  |
| 2   | Device Under Test .....                        | 4  |
| 3   | Product Description .....                      | 4  |
| 3.1 | General Information .....                      | 4  |
| 4   | Measurement Method .....                       | 5  |
| 4.1 | Return Loss Requirements .....                 | 5  |
| 4.2 | Mechanical Requirements .....                  | 5  |
| 5   | Measurement Uncertainty .....                  | 5  |
| 5.1 | Return Loss .....                              | 5  |
| 5.2 | Dimension Measurement .....                    | 5  |
| 5.3 | Validation Measurement .....                   | 5  |
| 6   | Calibration Measurement Results .....          | 6  |
| 6.1 | Return Loss and Impedance In Head Liquid ..... | 6  |
| 6.2 | Return Loss and Impedance In Body Liquid ..... | 6  |
| 6.3 | Mechanical Dimensions .....                    | 6  |
| 7   | Validation measurement .....                   | 7  |
| 7.1 | Head Liquid Measurement .....                  | 7  |
| 7.2 | SAR Measurement Result With Head Liquid .....  | 8  |
| 7.3 | Body Liquid Measurement .....                  | 9  |
| 7.4 | SAR Measurement Result With Body Liquid .....  | 10 |
| 8   | List of Equipment .....                        | 11 |

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                   |
|--------------------------------|-----------------------------------|
| Device Type                    | COMOSAR 1900 MHz REFERENCE DIPOLE |
| Manufacturer                   | Satimo                            |
| Model                          | SID1900                           |
| Serial Number                  | SN 30/14 DIP1G900-333             |
| Product Condition (new / used) | New                               |

A yearly calibration interval is recommended.

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



**Figure 1** – Satimo COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

##### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

##### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

##### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

| Frequency band | Expanded Uncertainty on Return Loss |
|----------------|-------------------------------------|
| 400-6000MHz    | 0.1 dB                              |

##### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

| Length (mm) | Expanded Uncertainty on Length |
|-------------|--------------------------------|
| 3 - 300     | 0.05 mm                        |

##### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

| Scan Volume | Expanded Uncertainty |
|-------------|----------------------|
| 1 g         | 20.3 %               |
| 10 g        | 20.1 %               |

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A


## 6 CALIBRATION MEASUREMENT RESULTS

### 6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

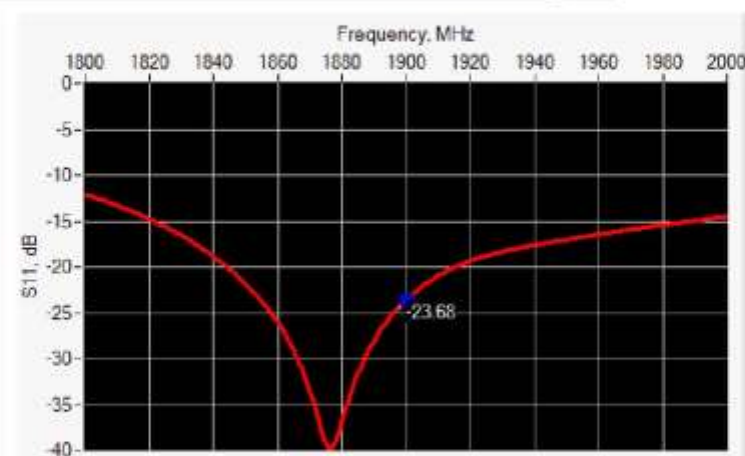

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                   |
|-----------------|------------------|------------------|-----------------------------|
| 1900            | -23.68           | -20              | $51.2 \Omega + 6.4 j\Omega$ |

### 6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

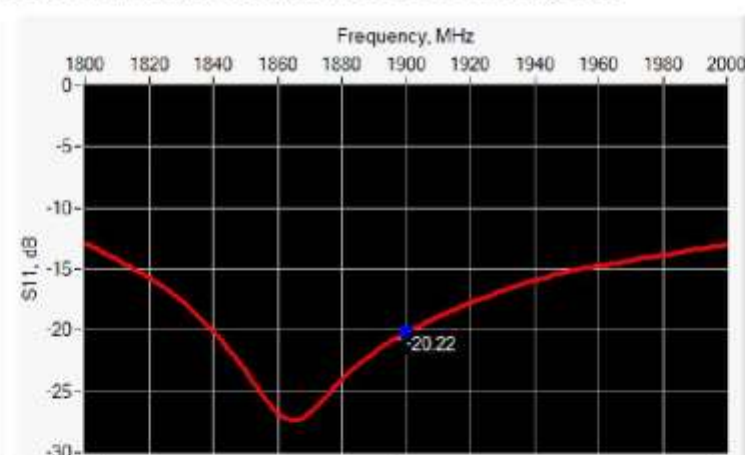

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                   |
|-----------------|------------------|------------------|-----------------------------|
| 1900            | -20.22           | -20              | $48.8 \Omega + 9.6 j\Omega$ |

### 6.3 MECHANICAL DIMENSIONS

| Frequency MHz | L mm             |          | h mm             |          | d mm            |          |
|---------------|------------------|----------|------------------|----------|-----------------|----------|
|               | required         | measured | required         | measured | required        | measured |
| 300           | $420.0 \pm 1 \%$ |          | $250.0 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 450           | $290.0 \pm 1 \%$ |          | $166.7 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 750           | $176.0 \pm 1 \%$ |          | $100.0 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 835           | $161.0 \pm 1 \%$ |          | $89.8 \pm 1 \%$  |          | $3.6 \pm 1 \%$  |          |

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

|      |            |      |           |      |          |      |
|------|------------|------|-----------|------|----------|------|
| 900  | 149.0 ±1 % |      | 83.3 ±1 % |      | 3.6 ±1 % |      |
| 1450 | 89.1 ±1 %  |      | 51.7 ±1 % |      | 3.6 ±1 % |      |
| 1500 | 80.5 ±1 %  |      | 50.0 ±1 % |      | 3.6 ±1 % |      |
| 1640 | 79.0 ±1 %  |      | 45.7 ±1 % |      | 3.6 ±1 % |      |
| 1750 | 75.2 ±1 %  |      | 42.9 ±1 % |      | 3.6 ±1 % |      |
| 1800 | 72.0 ±1 %  |      | 41.7 ±1 % |      | 3.6 ±1 % |      |
| 1900 | 68.0 ±1 %  | PASS | 39.5 ±1 % | PASS | 3.6 ±1 % | PASS |
| 1950 | 66.3 ±1 %  |      | 38.5 ±1 % |      | 3.6 ±1 % |      |
| 2000 | 64.5 ±1 %  |      | 37.5 ±1 % |      | 3.6 ±1 % |      |
| 2100 | 61.0 ±1 %  |      | 35.7 ±1 % |      | 3.6 ±1 % |      |
| 2300 | 55.5 ±1 %  |      | 32.6 ±1 % |      | 3.6 ±1 % |      |
| 2450 | 51.5 ±1 %  |      | 30.4 ±1 % |      | 3.6 ±1 % |      |
| 2600 | 48.5 ±1 %  |      | 28.8 ±1 % |      | 3.6 ±1 % |      |
| 3000 | 41.5 ±1 %  |      | 25.0 ±1 % |      | 3.6 ±1 % |      |
| 3500 | 37.0 ±1 %  |      | 26.4 ±1 % |      | 3.6 ±1 % |      |
| 3700 | 34.7 ±1 %  |      | 26.4 ±1 % |      | 3.6 ±1 % |      |

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

### 7.1 HEAD LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|----------------------------------------|----------|-------------------------------|----------|
|                  | required                               | measured | required                      | measured |
| 300              | 45.3 ±5 %                              |          | 0.87 ±5 %                     |          |
| 450              | 43.5 ±5 %                              |          | 0.87 ±5 %                     |          |
| 750              | 41.9 ±5 %                              |          | 0.89 ±5 %                     |          |
| 835              | 41.5 ±5 %                              |          | 0.90 ±5 %                     |          |
| 900              | 41.5 ±5 %                              |          | 0.97 ±5 %                     |          |
| 1450             | 40.5 ±5 %                              |          | 1.20 ±5 %                     |          |
| 1500             | 40.4 ±5 %                              |          | 1.23 ±5 %                     |          |
| 1640             | 40.2 ±5 %                              |          | 1.31 ±5 %                     |          |
| 1750             | 40.1 ±5 %                              |          | 1.37 ±5 %                     |          |
| 1800             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |
| 1900             | 40.0 ±5 %                              | PASS     | 1.40 ±5 %                     | PASS     |
| 1950             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |
| 2000             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |

Page: 7/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

|      |           |  |           |  |
|------|-----------|--|-----------|--|
| 2100 | 39.8 ±5 % |  | 1.49 ±5 % |  |
| 2300 | 39.5 ±5 % |  | 1.67 ±5 % |  |
| 2450 | 39.2 ±5 % |  | 1.80 ±5 % |  |
| 2600 | 39.0 ±5 % |  | 1.96 ±5 % |  |
| 3000 | 38.5 ±5 % |  | 2.40 ±5 % |  |
| 3500 | 37.9 ±5 % |  | 2.91 ±5 % |  |

## 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

|                                           |                                                         |
|-------------------------------------------|---------------------------------------------------------|
| Software                                  | OPENSAR V4                                              |
| Phantom                                   | SN 20/09 SAM71                                          |
| Probe                                     | SN 18/11 EPG122                                         |
| Liquid                                    | Head Liquid Values: $\epsilon_{ps}$ : 41.1 sigma : 1.42 |
| Distance between dipole center and liquid | 10.0 mm                                                 |
| Area scan resolution                      | dx=8mm/dy=8mm                                           |
| Zoon Scan Resolution                      | dx=8mm/dy=8m/dz=5mm                                     |
| Frequency                                 | 1900 MHz                                                |
| Input power                               | 20 dBm                                                  |
| Liquid Temperature                        | 21 °C                                                   |
| Lab Temperature                           | 21 °C                                                   |
| Lab Humidity                              | 45 %                                                    |

| Frequency<br>MHz | 1 g SAR (W/kg/W) |              | 10 g SAR (W/kg/W) |              |
|------------------|------------------|--------------|-------------------|--------------|
|                  | required         | measured     | required          | measured     |
| 300              | 2.85             |              | 1.94              |              |
| 450              | 4.58             |              | 3.06              |              |
| 750              | 8.49             |              | 5.55              |              |
| 835              | 9.56             |              | 6.22              |              |
| 900              | 10.9             |              | 6.99              |              |
| 1450             | 29               |              | 16                |              |
| 1500             | 30.5             |              | 16.8              |              |
| 1640             | 34.2             |              | 18.4              |              |
| 1750             | 36.4             |              | 19.3              |              |
| 1800             | 38.4             |              | 20.1              |              |
| 1900             | 39.7             | 39.84 (3.98) | 20.5              | 20.20 (2.02) |
| 1950             | 40.5             |              | 20.9              |              |
| 2000             | 41.1             |              | 21.1              |              |
| 2100             | 43.6             |              | 21.9              |              |
| 2300             | 48.7             |              | 23.3              |              |

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

|      |      |  |      |  |
|------|------|--|------|--|
| 2450 | 52.4 |  | 24   |  |
| 2600 | 55.3 |  | 24.6 |  |
| 3000 | 63.8 |  | 25.7 |  |
| 3500 | 67.1 |  | 25   |  |

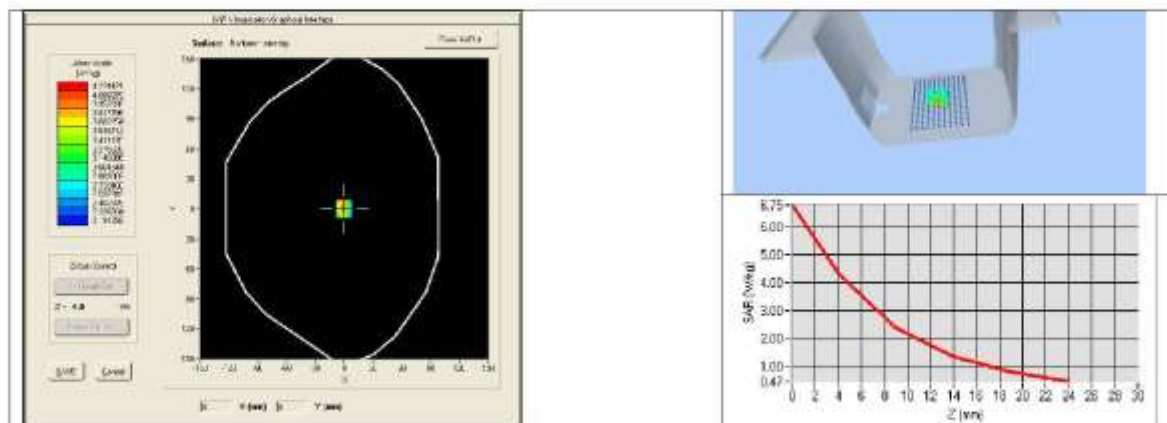

## 7.3 BODY LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|----------------------------------------|----------|-------------------------------|----------|
|                  | required                               | measured | required                      | measured |
| 150              | 61.9 $\pm$ 5 %                         |          | 0.80 $\pm$ 5 %                |          |
| 300              | 58.2 $\pm$ 5 %                         |          | 0.92 $\pm$ 5 %                |          |
| 450              | 56.7 $\pm$ 5 %                         |          | 0.94 $\pm$ 5 %                |          |
| 750              | 55.5 $\pm$ 5 %                         |          | 0.96 $\pm$ 5 %                |          |
| 835              | 55.2 $\pm$ 5 %                         |          | 0.97 $\pm$ 5 %                |          |
| 900              | 55.0 $\pm$ 5 %                         |          | 1.05 $\pm$ 5 %                |          |
| 915              | 55.0 $\pm$ 5 %                         |          | 1.06 $\pm$ 5 %                |          |
| 1450             | 54.0 $\pm$ 5 %                         |          | 1.30 $\pm$ 5 %                |          |
| 1610             | 53.8 $\pm$ 5 %                         |          | 1.40 $\pm$ 5 %                |          |
| 1800             | 53.3 $\pm$ 5 %                         |          | 1.52 $\pm$ 5 %                |          |
| 1900             | 53.3 $\pm$ 5 %                         | PASS     | 1.52 $\pm$ 5 %                | PASS     |
| 2000             | 53.3 $\pm$ 5 %                         |          | 1.52 $\pm$ 5 %                |          |
| 2100             | 53.2 $\pm$ 5 %                         |          | 1.62 $\pm$ 5 %                |          |
| 2450             | 52.7 $\pm$ 5 %                         |          | 1.95 $\pm$ 5 %                |          |
| 2600             | 52.5 $\pm$ 5 %                         |          | 2.16 $\pm$ 5 %                |          |
| 3000             | 52.0 $\pm$ 5 %                         |          | 2.73 $\pm$ 5 %                |          |
| 3500             | 51.3 $\pm$ 5 %                         |          | 3.31 $\pm$ 5 %                |          |
| 5200             | 49.0 $\pm$ 10 %                        |          | 5.30 $\pm$ 10 %               |          |
| 5300             | 48.9 $\pm$ 10 %                        |          | 5.42 $\pm$ 10 %               |          |
| 5400             | 48.7 $\pm$ 10 %                        |          | 5.53 $\pm$ 10 %               |          |

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.262.8.14.SATU.A

|      |            |  |            |  |
|------|------------|--|------------|--|
| 5500 | 48.6 ±10 % |  | 5.65 ±10 % |  |
| 5600 | 48.5 ±10 % |  | 5.77 ±10 % |  |
| 5800 | 48.2 ±10 % |  | 6.00 ±10 % |  |

## 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

|                                           |                                                           |
|-------------------------------------------|-----------------------------------------------------------|
| Software                                  | OPENSAR V4                                                |
| Phantom                                   | SN 20/09 SAM71                                            |
| Probe                                     | SN 18/11 EPG122                                           |
| Liquid                                    | Body Liquid Values: $\epsilon_{ps}^*$ : 54.2 sigma : 1.54 |
| Distance between dipole center and liquid | 10.0 mm                                                   |
| Area scan resolution                      | dx=8mm/dy=8mm                                             |
| Zoon Scan Resolution                      | dx=8mm/dy=8m/dz=5mm                                       |
| Frequency                                 | 1900 MHz                                                  |
| Input power                               | 20 dBm                                                    |
| Liquid Temperature                        | 21 °C                                                     |
| Lab Temperature                           | 21 °C                                                     |
| Lab Humidity                              | 45 %                                                      |

| Frequency<br>MHz | 1 g SAR (W/kg/W) | 10 g SAR (W/kg/W) |
|------------------|------------------|-------------------|
|                  | measured         | measured          |
| 1900             | 43.33 (4.33)     | 21.59 (2.16)      |

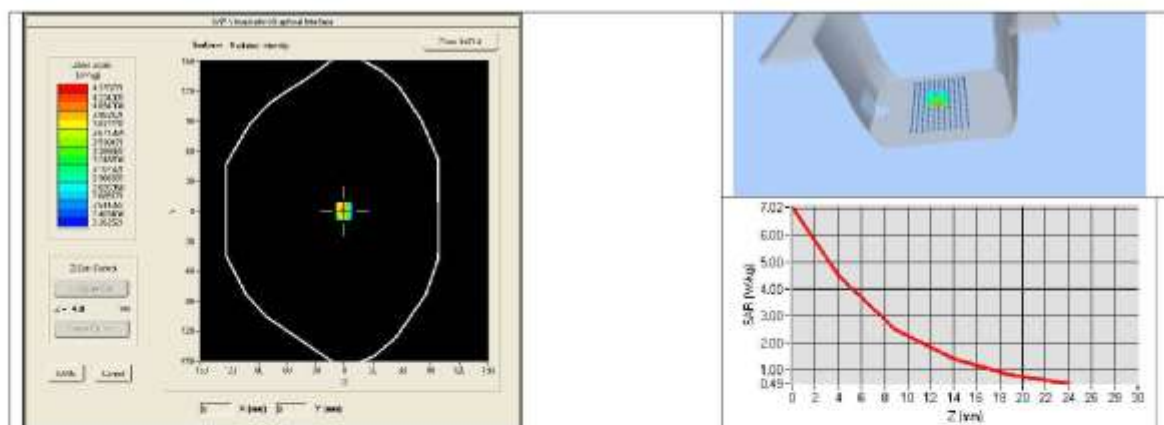



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.262.8.14.SATU.A

## 8 LIST OF EQUIPMENT

| Equipment Summary Sheet         |                      |                    |                                               |                                               |
|---------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description           | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| SAM Phantom                     | Satimo               | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench              | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                | Rhode & Schwarz ZVA  | SN100132           | 02/2013                                       | 02/2016                                       |
| Calipers                        | Carrera              | CALIPER-01         | 12/2013                                       | 12/2016                                       |
| Reference Probe                 | Satimo               | EPG122 SN 18/11    | 10/2013                                       | 10/2014                                       |
| Multimeter                      | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator                | Agilent E4438C       | MY49070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                       | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                     | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                    | HP ECP-E26A          | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler             | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature and Humidity Sensor | Control Company      | 11-661-9           | 8/2012                                        | 8/2015                                        |

Page: 11/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.

## 7.4 SID2450 Dipole Calibration Certificate



### SAR Reference Dipole Calibration Report

Ref : ACR.287.8.14.SATU.A

#### SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,  
BAO'AN BLVD

BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA

#### SATIMO COMOSAR REFERENCE DIPOLE

FREQUENCY: 2450 MHZ

SERIAL NO.: SN 07/14 DIP 2G450-306

Calibrated at SATIMO US

2105 Barrett Park Dr. - Kennesaw, GA 30144



10/01/2014

#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.S.14.SATU.A

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>     |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 10/14/2014  | <i>JS</i>            |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 10/14/2014  | <i>JS</i>            |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 10/14/2014  | <i>Kim Rutkowski</i> |

|                       | <i>Customer Name</i>                                  |
|-----------------------|-------------------------------------------------------|
| <i>Distribution :</i> | Shenzhen LCS<br>Compliance Testing<br>Laboratory Ltd. |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 10/14/2014  | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.8.14.SATU.A

## TABLE OF CONTENTS

|     |                                               |    |
|-----|-----------------------------------------------|----|
| 1   | Introduction.....                             | 4  |
| 2   | Device Under Test .....                       | 4  |
| 3   | Product Description .....                     | 4  |
| 3.1 | General Information .....                     | 4  |
| 4   | Measurement Method .....                      | 5  |
| 4.1 | Return Loss Requirements .....                | 5  |
| 4.2 | Mechanical Requirements .....                 | 5  |
| 5   | Measurement Uncertainty .....                 | 5  |
| 5.1 | Return Loss .....                             | 5  |
| 5.2 | Dimension Measurement .....                   | 5  |
| 5.3 | Validation Measurement .....                  | 5  |
| 6   | Calibration Measurement Results .....         | 6  |
| 6.1 | Return Loss and Impedance .....               | 6  |
| 6.2 | Mechanical Dimensions .....                   | 6  |
| 7   | Validation measurement .....                  | 7  |
| 7.1 | Head Liquid Measurement .....                 | 7  |
| 7.2 | SAR Measurement Result With Head Liquid ..... | 7  |
| 7.3 | Body Liquid Measurement .....                 | 9  |
| 7.4 | SAR Measurement Result With Body Liquid ..... | 9  |
| 8   | List of Equipment .....                       | 11 |

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.8.14.SATU.A

## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                   |
|--------------------------------|-----------------------------------|
| Device Type                    | COMOSAR 2450 MHz REFERENCE DIPOLE |
| Manufacturer                   | Satimo                            |
| Model                          | SID2450                           |
| Serial Number                  | SN 07/14 DIP 2G450-306            |
| Product Condition (new / used) | New                               |

A yearly calibration interval is recommended.

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



**Figure 1** – Satimo COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.8.14.SATU.A

#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

##### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

##### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ , traceable to the Internationally Accepted Guides to Measurement Uncertainty.

##### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

| Frequency band | Expanded Uncertainty on Return Loss |
|----------------|-------------------------------------|
| 400-6000MHz    | 0.1 dB                              |

##### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

| Length (mm) | Expanded Uncertainty on Length |
|-------------|--------------------------------|
| 3 - 300     | 0.05 mm                        |

##### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

| Scan Volume | Expanded Uncertainty |
|-------------|----------------------|
| 1 g         | 20.3 %               |
| 10 g        | 20.1 %               |

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.8.14.SATU.A

## 6 CALIBRATION MEASUREMENT RESULTS

### 6.1 RETURN LOSS AND IMPEDANCE

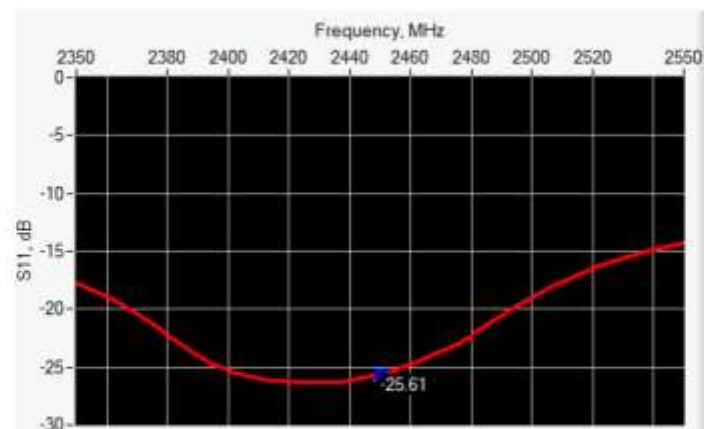

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                      |
|-----------------|------------------|------------------|--------------------------------|
| 2450            | -25.61           | -20              | 44.9 $\Omega$ - 0.9 j $\Omega$ |

### 6.2 MECHANICAL DIMENSIONS

| Frequency MHz | L mm            |          | h mm            |          | d mm           |          |
|---------------|-----------------|----------|-----------------|----------|----------------|----------|
|               | required        | measured | required        | measured | required       | measured |
| 300           | 420.0 $\pm$ 1 % |          | 250.0 $\pm$ 1 % |          | 6.35 $\pm$ 1 % |          |
| 450           | 290.0 $\pm$ 1 % |          | 166.7 $\pm$ 1 % |          | 6.35 $\pm$ 1 % |          |
| 750           | 176.0 $\pm$ 1 % |          | 100.0 $\pm$ 1 % |          | 6.35 $\pm$ 1 % |          |
| 835           | 161.0 $\pm$ 1 % |          | 89.8 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 900           | 149.0 $\pm$ 1 % |          | 83.3 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1450          | 89.1 $\pm$ 1 %  |          | 51.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1500          | 80.5 $\pm$ 1 %  |          | 50.0 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1640          | 79.0 $\pm$ 1 %  |          | 45.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1750          | 75.2 $\pm$ 1 %  |          | 42.9 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1800          | 72.0 $\pm$ 1 %  |          | 41.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1900          | 68.0 $\pm$ 1 %  |          | 39.5 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 1950          | 66.3 $\pm$ 1 %  |          | 38.5 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2000          | 64.5 $\pm$ 1 %  |          | 37.5 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2100          | 61.0 $\pm$ 1 %  |          | 35.7 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2300          | 55.5 $\pm$ 1 %  |          | 32.6 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 2450          | 51.5 $\pm$ 1 %  | PASS     | 30.4 $\pm$ 1 %  | PASS     | 3.6 $\pm$ 1 %  | PASS     |
| 2600          | 48.5 $\pm$ 1 %  |          | 28.8 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 3000          | 41.5 $\pm$ 1 %  |          | 25.0 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 3500          | 37.0 $\pm$ 1 %  |          | 26.4 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |
| 3700          | 34.7 $\pm$ 1 %  |          | 26.4 $\pm$ 1 %  |          | 3.6 $\pm$ 1 %  |          |

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.8.14.SATU.A

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

### 7.1 HEAD LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|----------------------------------------|----------|-------------------------------|----------|
|                  | required                               | measured | required                      | measured |
| 300              | 45.3 $\pm$ 5 %                         |          | 0.87 $\pm$ 5 %                |          |
| 450              | 43.5 $\pm$ 5 %                         |          | 0.87 $\pm$ 5 %                |          |
| 750              | 41.9 $\pm$ 5 %                         |          | 0.89 $\pm$ 5 %                |          |
| 835              | 41.5 $\pm$ 5 %                         |          | 0.90 $\pm$ 5 %                |          |
| 900              | 41.5 $\pm$ 5 %                         |          | 0.97 $\pm$ 5 %                |          |
| 1450             | 40.5 $\pm$ 5 %                         |          | 1.20 $\pm$ 5 %                |          |
| 1500             | 40.4 $\pm$ 5 %                         |          | 1.23 $\pm$ 5 %                |          |
| 1640             | 40.2 $\pm$ 5 %                         |          | 1.31 $\pm$ 5 %                |          |
| 1750             | 40.1 $\pm$ 5 %                         |          | 1.37 $\pm$ 5 %                |          |
| 1800             | 40.0 $\pm$ 5 %                         |          | 1.40 $\pm$ 5 %                |          |
| 1900             | 40.0 $\pm$ 5 %                         |          | 1.40 $\pm$ 5 %                |          |
| 1950             | 40.0 $\pm$ 5 %                         |          | 1.40 $\pm$ 5 %                |          |
| 2000             | 40.0 $\pm$ 5 %                         |          | 1.40 $\pm$ 5 %                |          |
| 2100             | 39.8 $\pm$ 5 %                         |          | 1.49 $\pm$ 5 %                |          |
| 2300             | 39.5 $\pm$ 5 %                         |          | 1.67 $\pm$ 5 %                |          |
| 2450             | 39.2 $\pm$ 5 %                         | PASS     | 1.80 $\pm$ 5 %                | PASS     |
| 2600             | 39.0 $\pm$ 5 %                         |          | 1.96 $\pm$ 5 %                |          |
| 3000             | 38.5 $\pm$ 5 %                         |          | 2.40 $\pm$ 5 %                |          |
| 3500             | 37.9 $\pm$ 5 %                         |          | 2.91 $\pm$ 5 %                |          |

### 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

|                                           |                                                      |
|-------------------------------------------|------------------------------------------------------|
| Software                                  | OPENSAR V4                                           |
| Phantom                                   | SN 20/09 SAM71                                       |
| Probe                                     | SN 18/11 EPG122                                      |
| Liquid                                    | Head Liquid Values: $\epsilon_r$ : 39.0 sigma : 1.77 |
| Distance between dipole center and liquid | 10.0 mm                                              |
| Area scan resolution                      | dx=8mm/dy=8mm                                        |

Page: 7/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR 287.8.14.SATU.A

|                      |                     |
|----------------------|---------------------|
| Zoon Scan Resolution | dx=8mm/dy=8m/dz=5mm |
| Frequency            | 2450 MHz            |
| Input power          | 20 dBm              |
| Liquid Temperature   | 21 °C               |
| Lab Temperature      | 21 °C               |
| Lab Humidity         | 45 %                |

| Frequency<br>MHz | 1 g SAR (W/kg/W) |              | 10 g SAR (W/kg/W) |              |
|------------------|------------------|--------------|-------------------|--------------|
|                  | required         | measured     | required          | measured     |
| 300              | 2.85             |              | 1.94              |              |
| 450              | 4.58             |              | 3.06              |              |
| 750              | 8.49             |              | 5.55              |              |
| 835              | 9.56             |              | 6.22              |              |
| 900              | 10.9             |              | 6.99              |              |
| 1450             | 29               |              | 16                |              |
| 1500             | 30.5             |              | 16.8              |              |
| 1640             | 34.2             |              | 18.4              |              |
| 1750             | 36.4             |              | 19.3              |              |
| 1800             | 38.4             |              | 20.1              |              |
| 1900             | 39.7             |              | 20.5              |              |
| 1950             | 40.5             |              | 20.9              |              |
| 2000             | 41.1             |              | 21.1              |              |
| 2100             | 43.6             |              | 21.9              |              |
| 2300             | 48.7             |              | 23.3              |              |
| 2450             | 52.4             | 53.89 (5.39) | 24                | 24.15 (2.42) |
| 2600             | 55.3             |              | 24.6              |              |
| 3000             | 63.8             |              | 25.7              |              |
| 3500             | 67.1             |              | 25                |              |

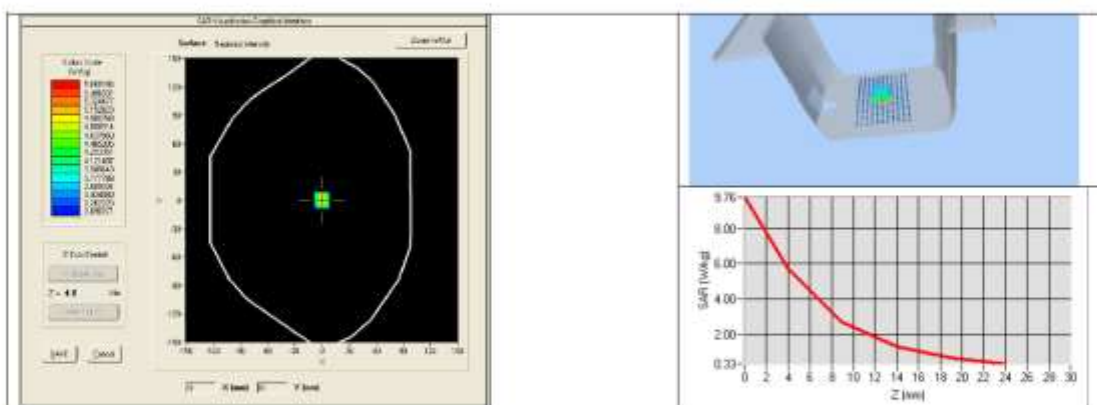

Page: 8/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR 287.8.14.SATU.A

## 7.3 BODY LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r'$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|-----------------------------------------|----------|-------------------------------|----------|
|                  | required                                | measured | required                      | measured |
| 150              | 61.9 $\pm$ 5 %                          |          | 0.80 $\pm$ 5 %                |          |
| 300              | 58.2 $\pm$ 5 %                          |          | 0.92 $\pm$ 5 %                |          |
| 450              | 56.7 $\pm$ 5 %                          |          | 0.94 $\pm$ 5 %                |          |
| 750              | 55.5 $\pm$ 5 %                          |          | 0.96 $\pm$ 5 %                |          |
| 835              | 55.2 $\pm$ 5 %                          |          | 0.97 $\pm$ 5 %                |          |
| 900              | 55.0 $\pm$ 5 %                          |          | 1.05 $\pm$ 5 %                |          |
| 915              | 55.0 $\pm$ 5 %                          |          | 1.06 $\pm$ 5 %                |          |
| 1450             | 54.0 $\pm$ 5 %                          |          | 1.30 $\pm$ 5 %                |          |
| 1610             | 53.8 $\pm$ 5 %                          |          | 1.40 $\pm$ 5 %                |          |
| 1800             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 1900             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 2000             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 2100             | 53.2 $\pm$ 5 %                          |          | 1.62 $\pm$ 5 %                |          |
| 2450             | 52.7 $\pm$ 5 %                          | PASS     | 1.95 $\pm$ 5 %                | PASS     |
| 2600             | 52.5 $\pm$ 5 %                          |          | 2.16 $\pm$ 5 %                |          |
| 3000             | 52.0 $\pm$ 5 %                          |          | 2.73 $\pm$ 5 %                |          |
| 3500             | 51.3 $\pm$ 5 %                          |          | 3.31 $\pm$ 5 %                |          |
| 5200             | 49.0 $\pm$ 10 %                         |          | 5.30 $\pm$ 10 %               |          |
| 5300             | 48.9 $\pm$ 10 %                         |          | 5.42 $\pm$ 10 %               |          |
| 5400             | 48.7 $\pm$ 10 %                         |          | 5.53 $\pm$ 10 %               |          |
| 5500             | 48.6 $\pm$ 10 %                         |          | 5.65 $\pm$ 10 %               |          |
| 5600             | 48.5 $\pm$ 10 %                         |          | 5.77 $\pm$ 10 %               |          |
| 5800             | 48.2 $\pm$ 10 %                         |          | 6.00 $\pm$ 10 %               |          |

## 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

|                                           |                                                       |
|-------------------------------------------|-------------------------------------------------------|
| Software                                  | OPENSAR V4                                            |
| Phantom                                   | SN 20/09 SAM71                                        |
| Probe                                     | SN 18/11 EPG122                                       |
| Liquid                                    | Body Liquid Values: $\epsilon_r'$ : 53.0 sigma : 1.93 |
| Distance between dipole center and liquid | 10.0 mm                                               |
| Area scan resolution                      | dx=8mm/dy=8mm                                         |
| Zoon Scan Resolution                      | dx=8mm/dy=8m/dz=5mm                                   |
| Frequency                                 | 2450 MHz                                              |
| Input power                               | 20 dBm                                                |
| Liquid Temperature                        | 21 °C                                                 |
| Lab Temperature                           | 21 °C                                                 |
| Lab Humidity                              | 45 %                                                  |

Page: 9/11


This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.8.14.SATU.A

| Frequency<br>MHz | 1 g SAR (W/kg/W) | 10 g SAR (W/kg/W) |
|------------------|------------------|-------------------|
|                  | measured         | measured          |
| 2450             | 54.65 (5.46)     | 24.58 (2.46)      |

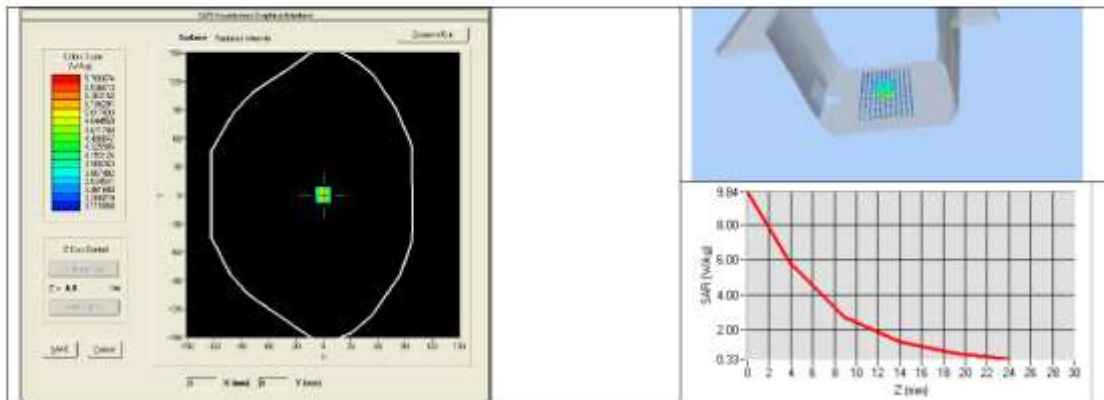

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.8.14.SATU.A

## 8 LIST OF EQUIPMENT

| Equipment Summary Sheet         |                      |                    |                                               |                                               |
|---------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description           | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| SAM Phantom                     | Satimo               | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench              | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                | Rhode & Schwarz ZVA  | SN100132           | 02/2013                                       | 02/2016                                       |
| Calipers                        | Carrera              | CALIPER-01         | 12/2013                                       | 12/2016                                       |
| Reference Probe                 | Satimo               | EPG122 SN 18/11    | 10/2013                                       | 10/2014                                       |
| Multimeter                      | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator                | Agilent E4438C       | MY49070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                       | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                     | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                    | HP ECP-E26A          | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler             | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature and Humidity Sensor | Control Company      | 11-661-9           | 8/2012                                        | 8/2015                                        |

Page: 11/11


*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*

## 8. SAR System PHOTOGRAPHS




### DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE1528-2013

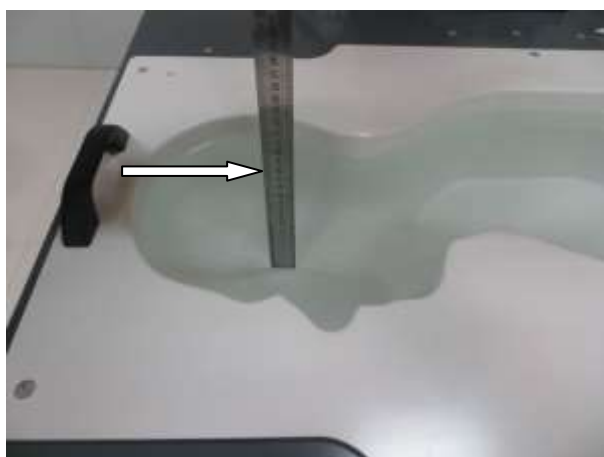


## 9. SETUP PHOTOGRAPHS


Head Setup Photo(Left cheek)

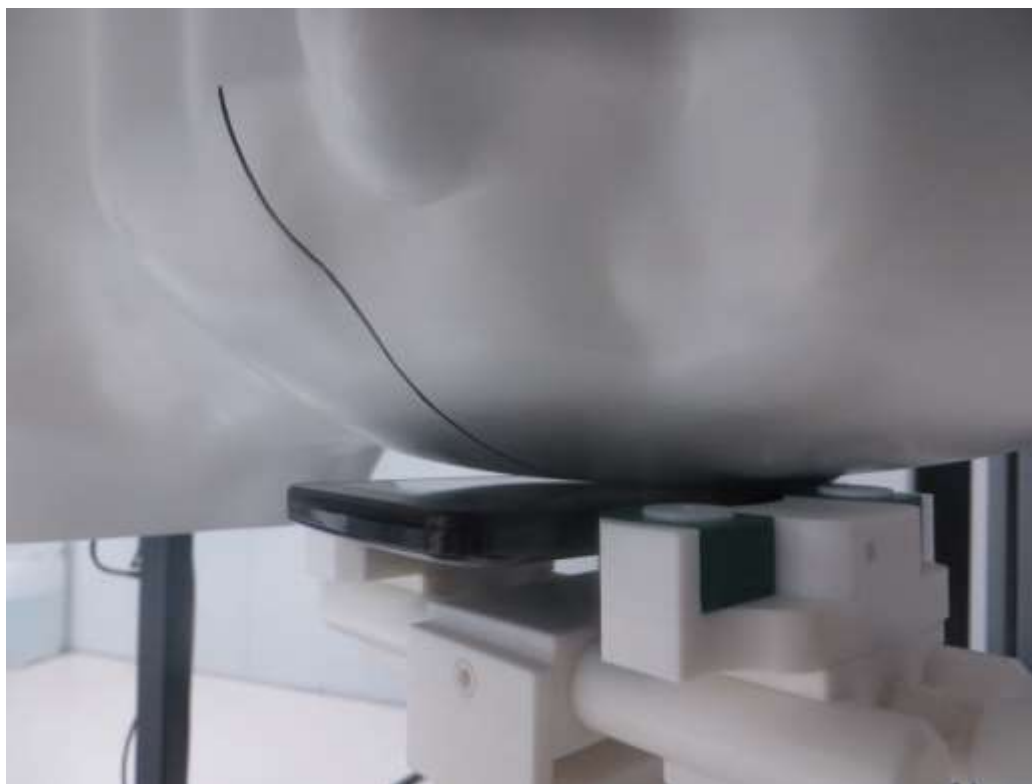


Head Setup Photo(Left Tilt )

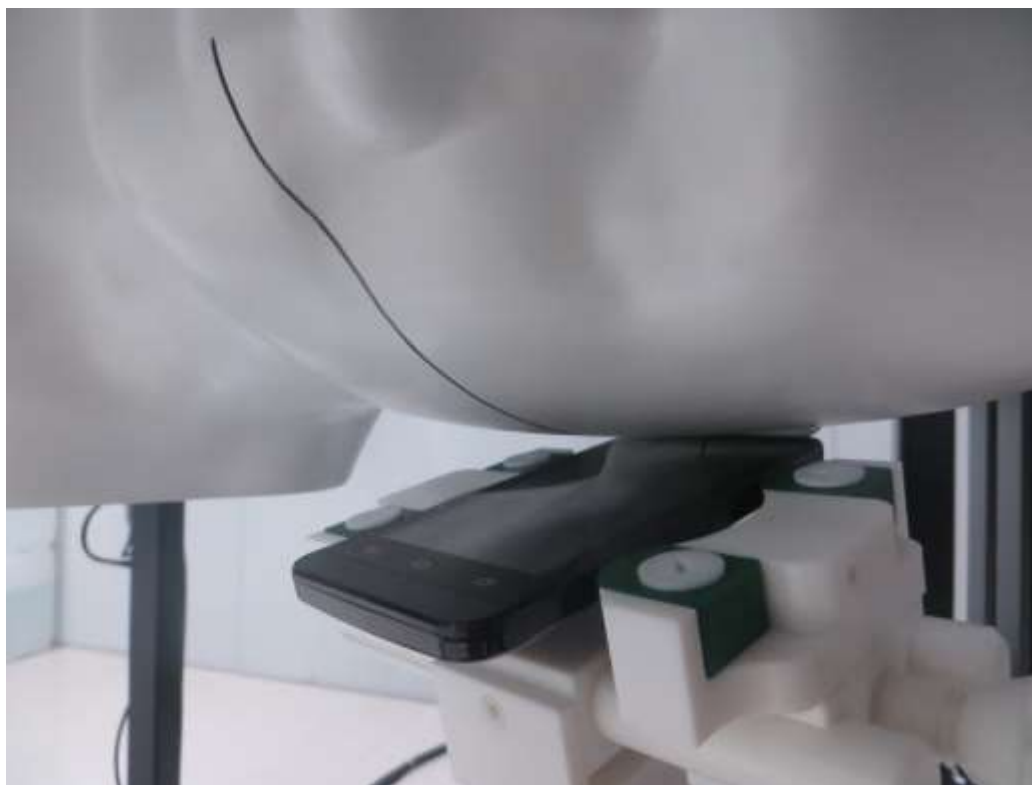

**Head Setup Photo(Right Cheek )**

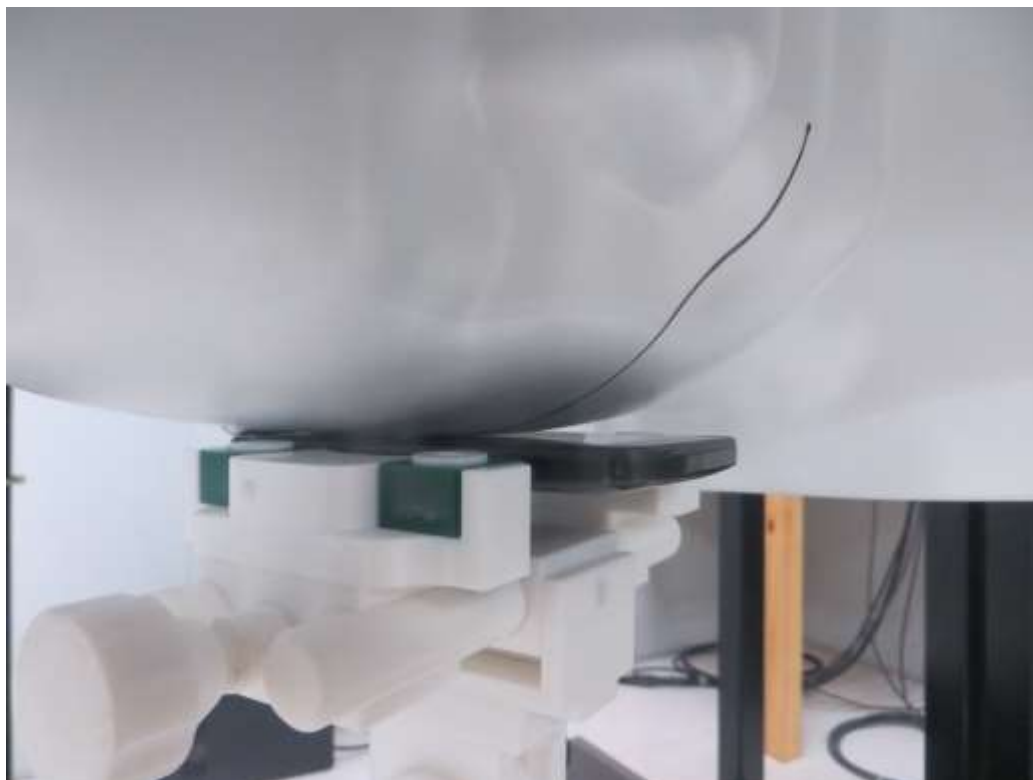

**Head Setup Photo(Right Tilt )**

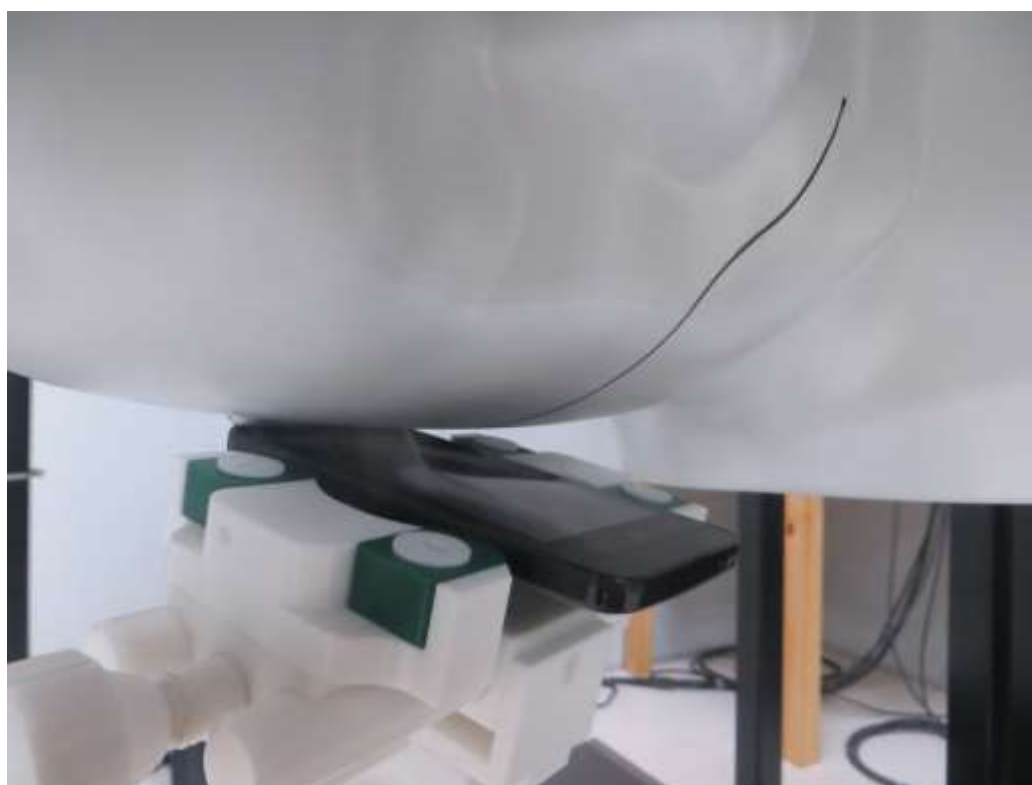

**15mm body-worn Front Side Setup Photo**



**15mm body-worn Back Side Setup Photo**




**10mm body-worn Back Side Setup Photo(hotspot)**



**10mm body-worn Front Side Setup Photo(hotspot)**



**10mm body-worn Right Side Setup Photo(hotspot)**

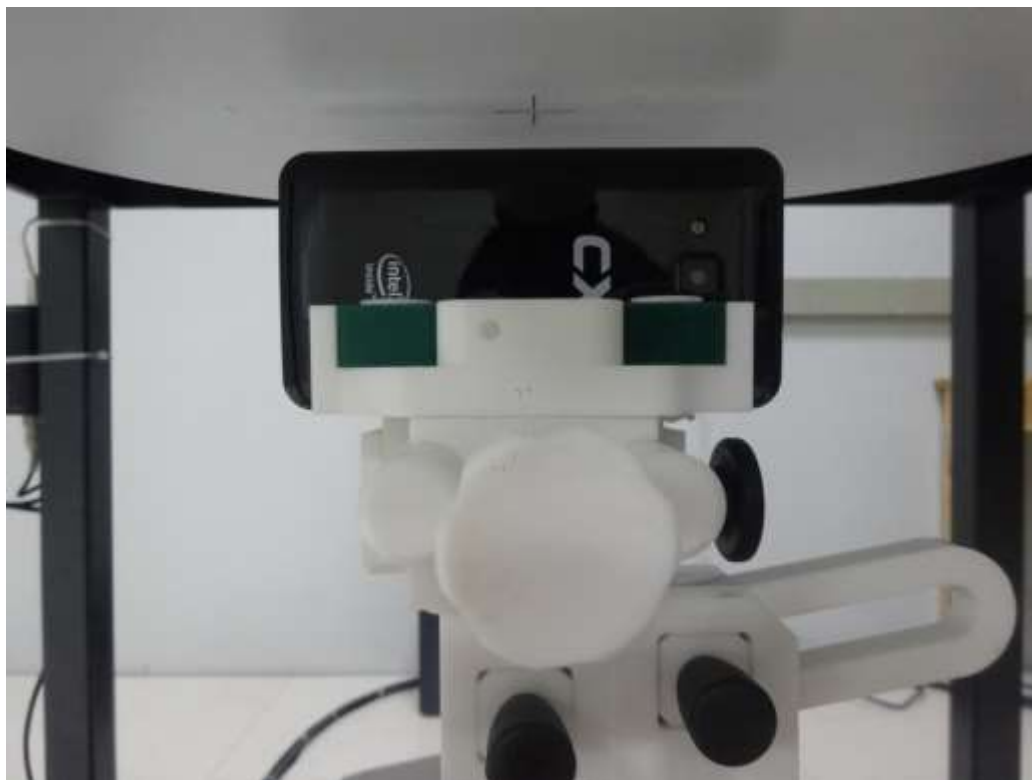

**10mm body-worn Left Side Setup Photo(hotspot)**



**10mm body-worn Top Side Setup Photo(hotspot)**



## 10.EUT PHOTOGRAPHS





.....The End of Test Report.....