



Product Service

**Choose certainty.
Add value.**

Report On

FCC and Industry Canada DFS Testing of the
Frontier Silicon Ltd Minuet/FS5332
In accordance with FCC 47 CFR Part 15E and
Industry Canada RSS-247

COMMERCIAL-IN-CONFIDENCE

FCC ID: YYX-FS5332
IC: 11458A-FS5332

Document 75934517 Report 06 Issue 1

August 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC and Industry Canada DFS Testing of the
Frontier Silicon Ltd Minuet/FS5332
In accordance with FCC 47 CFR Part 15E and
Industry Canada RSS-247

Document 75934517 Report 06 Issue 1

August 2016

PREPARED FOR

Frontier Silicon Ltd
137 Euston Road
London
NW1 2AA

PREPARED BY

Natalie Bennett
Senior Administrator, Project Support

APPROVED BY

Nic Forsyth
Authorised Signatory

DATED

03 August 2016

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E and Industry Canada RSS-247. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

M Russell





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Test Requirements 5
1.3	Brief Summary of Results 6
1.4	Application Form 7
1.5	Product Information 10
1.6	Test Conditions 10
1.7	Deviations from the Standard 10
1.8	Modification Record 10
1.9	DFS Test System 11
2	TEST DETAILS 13
2.1	Calibration of Test Setup 14
2.2	In-Service Monitoring 24
3	TEST EQUIPMENT USED 35
3.1	Test Equipment Used 36
3.2	Support Test Equipment 37
3.3	Measurement Uncertainty 38
4	PHOTOGRAPHS 39
4.1	Test Set-Up Photographs 40
4.2	DFS Test Equipment 40
5	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 41
5.1	Accreditation, Disclaimers and Copyright 42



Product Service

SECTION 1

REPORT SUMMARY

FCC and Industry Canada DFS Testing of the
Frontier Silicon Ltd Minuet/FS5332
In accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247



1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC and Industry Canada DFS Testing of the Frontier Silicon Ltd Minuet/FS5332 to the requirements of FCC 47 CFR Part 15E and Industry Canada RSS-247.

Objective	To perform FCC DFS Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Frontier Silicon Ltd
Model Number(s)	Minuet/FS5332
Serial Number(s)	RAD108618 (Module) & RAD108363 (Platform)
Hardware Version	Rev6
Software Version	NS1.0.13
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15E (2015) Industry Canada RSS-247 (Issue 1, 2015)
Incoming Release Date	Application Form 27 June 2016
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	FS160438 8 April 2016
Start of Test	9 June 2016
Finish of Test	9 June 2016
Name of Engineer(s)	M Russell
Related Document(s)	KDB 905462 D02 v01r01



1.2 TEST REQUIREMENTS

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidths modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		



1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247 is shown below.

Section	Specification Clause		Test Description	Result	Comments/Base Standard
	Part 15E	RSS-247			
802.11a					
2.1	NA	-	Calibration of Test Setup	Pass	
2.2	15.407 (h)(2)(iii)(iv)	6.3	In-Service Monitoring	Pass	
802.11n 40 MHz Bandwidth					
2.1	NA	-	Calibration of Test Setup	Pass	
2.2	15.407 (h)(2)(iii)(iv)	6.3	In-Service Monitoring	Pass	
802.11ac 80 MHz Bandwidth					
2.1	NA	-	Calibration of Test Setup	Pass	
2.2	15.407 (h)(2)(iii)(iv)	6.3	In-Service Monitoring	Pass	



Product Service

1.4 APPLICATION FORM

EQUIPMENT DESCRIPTION	
Model Name/Number	Minuet/FS5332
Part Number	HA-FS5332-xxxxxx (where xxxxxx denotes the customer variant eg HA-FS5332-000001)
Hardware Version	Rev6
Software Version	NS1.0.13
FCC ID	YYX-FS5332
Industry Canada ID	11458A-FS5332
Technical Description (Please provide a brief description of the intended use of the equipment)	Minuet is a module, which when installed in a consumer audio product enables high-quality audio streaming over Wi-Fi, Bluetooth and Ethernet.

TYPE OF EQUIPMENT
☐ Master
☐ Client with Radar Detection
☒ Client without Radar Detection
☐ Wi-Fi Direct Support

TRANSMITTER TECHNICAL CHARACTERISTICS	
FREQUENCY CHARACTERISTICS	
☒ 5.150 GHz to 5.250 GHz	
☒ 5.250 GHz to 5.350 GHz	
☒ 5.470 GHz to 5.725 GHz	
☒ 5.725 GHz to 5.825 GHz	
☐ Please confirm the EUT does not operate in the frequency band 5600 – 5650 MHz	
☐ Off Channel CAC Implemented	
Off Channel CAC within 5600 – 5650 MHz band	hours, (1 – 24)
Off Channel CAC outside 5600 – 5650 MHz band	minutes, (6 – 240)
Note: DFS is not required in the ranges 5.15 – 5.25 GHz and 5.725 – 5.825 GHz	



TRANSMITTER RF POWER CHARACTERISTICS	
Maximum rated transmitter output power as stated by manufacturer	
Conducted Power	13 dBm
Maximum Antenna Gain	4.6 dBi
EIRP	17.6 dBm
Minimum rated transmitter output power as stated by manufacturer (if applicable)	
Conducted Power	5 dBm
Maximum Antenna Gain	4.6 dBi
EIRP	9.6 dBm
Is TPC supported?	☒ Yes ☐ No
If Yes, provide a description of operation.	
Maximum EIRP = 17.6 dBm, Minimum EIRP = 9.6 dBm	

POWER SOURCE	
☐ AC mains supply	State voltage
AC supply frequency	(Hz) VAC
☒ DC supply	
Nominal voltage	5V

SYSTEM ARCHITECTURE			
☒	Frame Based		
☐	IP Based		
☐	Other	If other please state	
☒	802.11(a)	Receiver Bandwidth:	20 MHz
☒	802.11(n) – 20 MHz	Receiver Bandwidth:	20 MHz
☒	802.11(n) – 40 MHz	Receiver Bandwidth:	40 MHz
☒	802.11(ac) – 20 MHz	Receiver Bandwidth:	20 MHz
☒	802.11(ac) – 40 MHz	Receiver Bandwidth:	40 MHz
☒	802.11(ac) – 80 MHz	Receiver Bandwidth:	80 MHz

DECLARATION	
No parameter or information relating to the detected radar waveforms is available or accessible to the end user.	
☒ True	☐ False

MISCELLANEOUS (Master Device Only)
Power-on cycle time*
* Time from switching on the UUT to the point at which Channel Availability Check (CAC) commences

UNIFORM SPREADING (Master Device Only)
Describe how the meter provides, on aggregate, uniform channel loading of the spectrum across all channels.



ANTENNA OPTIONS	
Antenna 1	
Antenna Description:	PCB Antenna
Antenna Model:	SW700M (SW750M)
Antenna Maximum Gain:	2.39GHz-2.5GHz=2.3dBi (Max.) and 5.15GHz-5.85GHz=4.6dBi(Max.)
Antenna Frequency Range:	2.39GHz-2.5GHz and 5.15GHz-5.85GHz
Antenna 2	
Antenna Description:	PCB Antenna
Antenna Model:	RFPCA431223IMLB301
Antenna Maximum Gain:	2.39GHz-2.5GHz=1.9dBi (Max.) and 5.15GHz-5.85GHz=4.3dBi(Max.)
Antenna Frequency Range:	2.4GHz-2.5GHz and 5.15GHz-5.85GHz
Antenna 3	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	
Antenna 4	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	
Antenna 5	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	

I hereby declare that that the information supplied is correct and complete.

Name: Abdul Wahed Dewan Position held: RF Principal Engineer

Date: 27/06/2016



Product Service

1.5 PRODUCT INFORMATION

1.5.1 Technical Description

The Equipment Under Test (EUT) was a Frontier Silicon Ltd Minuet/FS5332. A full technical description can be found in the manufacturer's documentation.

The EUT is a Client without Radar Detection device.

The following is provided by the applicant as part of the FCC filing:

- A complete User's Manual and/or Professional Installers Manual.
- A Statement of Conformity for the Client in Non-Associated mode is required. The Form 731 application must include a Cover Letter Attachment stating that the client software and associated drivers will not initiate any transmission on DFS frequencies without initiation by a master. This includes restriction on transmissions for beacons and support for ad-hoc peer-to-peer modes.
- A channel/frequency plan for the device showing the channels that have active scanning or passive scanning. Active scanning is where the device can transmit a probe (beacon) and passive scanning is where the device can listen only without probes.
- Software security description.

1.6 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. See individual test clauses.

The EUT was powered from a 5.00 V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

Industry Canada Company Address Code
IC2932B-1 Octagon House, Fareham Test Laboratory

1.7 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.8 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



1.9 DFS TEST SYSTEM

The DFS system consists of hardware and software. The Hardware uses a PXI chassis with PXI instruments populating the chassis. The instruments used are a Vector Signal Generator, a Digitiser, Frequency References and a Dual Core PC. The measurement and analysis software runs on the PC and controls the instruments within the mainframe via commands on the PXI bus. Various markers are contained within the generated waveforms. The markers are used to trigger the measurement system at the appropriate points. An external trigger is also provided at the SMB output on the Vector Signal Generator which is employed where a Spectrum Analyser is used in place of the Aeroflex Digitiser. These are described within the test procedure for the applicable test.

The Aeroflex DFS software generates the pulses in accordance with KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r01.

Short Pulse Radar Test Waveform

The short pulse radar simulation is a conventional amplitude pulse with varying pulse widths, pulse rate intervals (PRI) and number of pulses. General characteristics for these types and number of repetitions required by the standard are as follows:

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \frac{\left(\frac{1}{360} \right)}{19 - 10^6} \right\}$	60%	30
		Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	-		
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30



Product Service

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μ sec)	PRI (μ sec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30



Product Service

SECTION 2

TEST DETAILS

FCC and Industry Canada DFS Testing of the
Frontier Silicon Ltd Minuet/FS5332
In accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247



Product Service

2.1 CALIBRATION OF TEST SETUP**2.1.1 Specification Reference**

FCC 47 CFR Part 15E
Industry Canada RSS-247

2.1.2 Equipment Under Test and Modification State

Minuet/FS5332 S/N: RAD108618 (Module) & RAD108363 (Platform) - Modification State 0

2.1.3 Date of Test

9 June 2016

2.1.4 Environmental Conditions

Ambient Temperature	21.7°C
Relative Humidity	32.7%



2.1.5 Test Results

802.11a


In this test equipment configuration, Radar signals are injected at the Master. The configuration ensures that the Radar pulses are received only by the Master device and not the Client. To calibrate the Radar pulses, the master was replaced by a Spectrum Analyser. The required Radar Waveform, (Type 0), was loaded into the Arbitrary Waveform Generator. The Spectrum Analyser was set to zero Span and the RBW and VBW set to 3MHz. The sweep time was set to display the entire burst and triggered on the Radar Burst. The output level of the Radar Signal Generator was adjusted to give the correct level as defined in the table below with the 1dB correction accounted for. Trace data showing the used Radar Pulses was recorded.

DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.	
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Test Equipment Setup

Setup for Client with injection at the Master

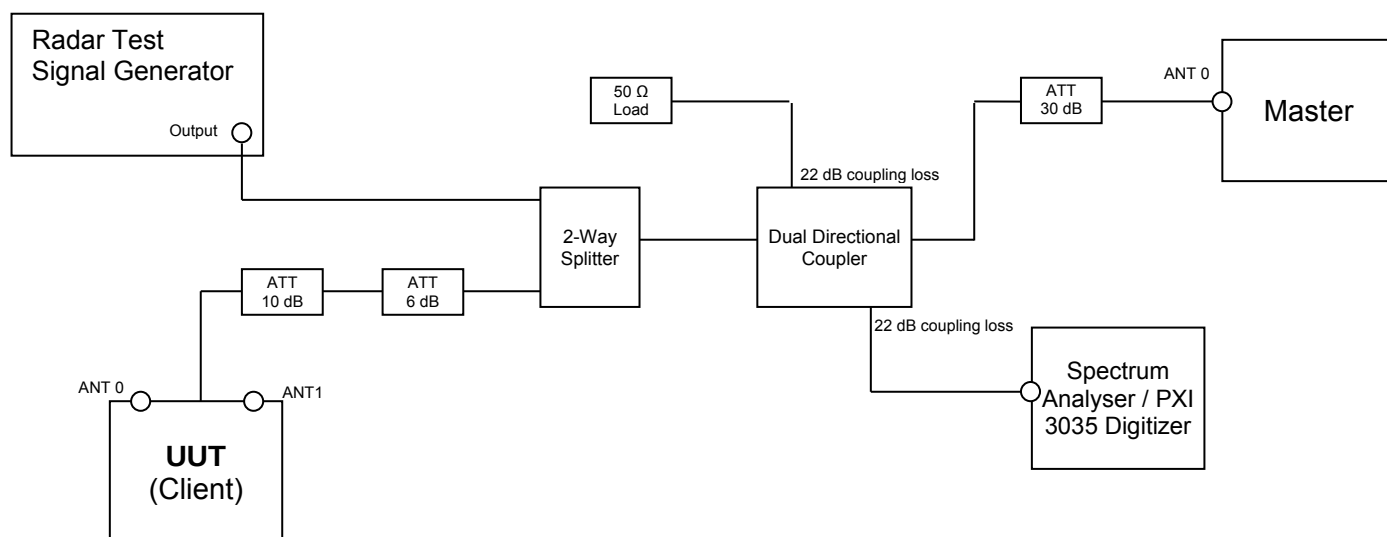



Product Service


Radar Pulse Type 0

Short Radar Pulse Characteristics

Radar Type	Pulse Width (μs)	PRI (μs)	Number of Pulses
0	1	1428	18

Client without Radar Detection


Radar Type 0 Plot

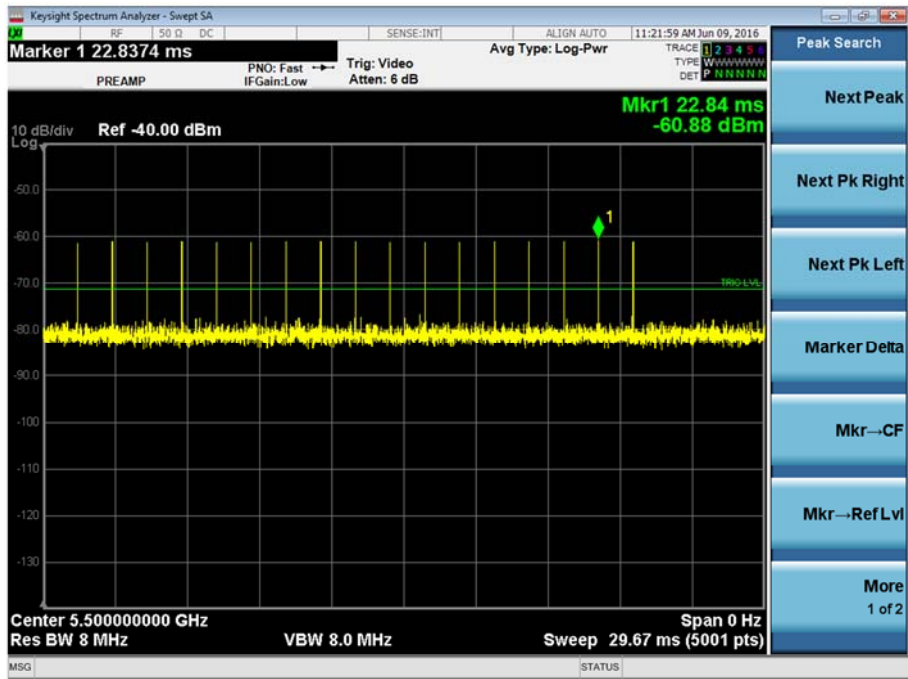



Product Service

Channel Loading Plot

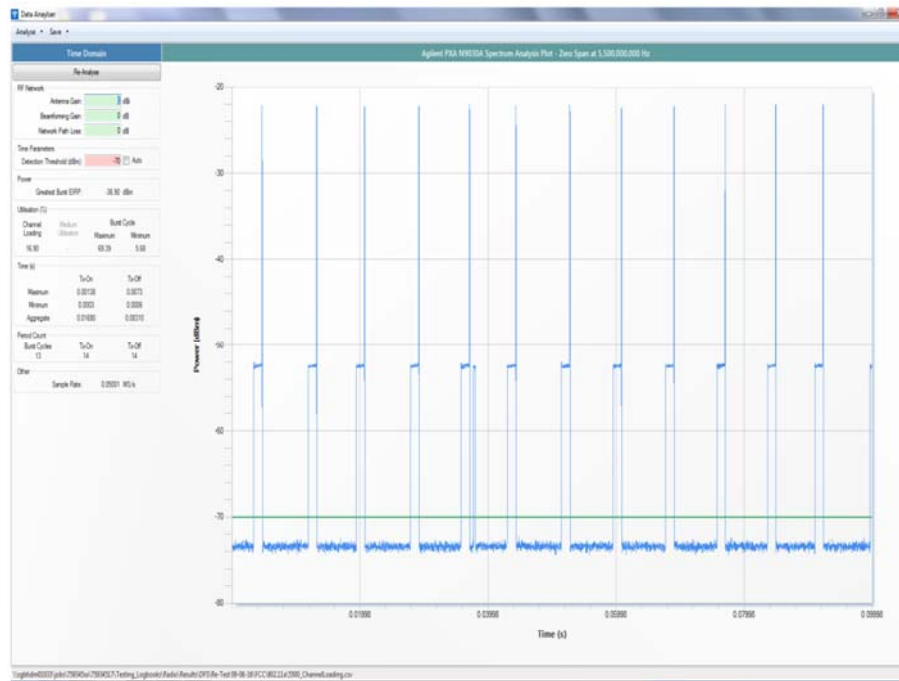

FCC KDB 905462 D02 New Rules v02 specifies that the system is to be loaded using means that is typical for the device. In this case this was audio streaming using the FCC designated test file 5_GHz_Audio_Test_file.WAV. However, due to the bandwidth available and the low demand of an audio stream, the channel loading of 17% could not be achieved. Lower data rates were used to increase the channel loading as much as possible.



802.11ac 80 MHz Bandwidth


In this test equipment configuration, Radar signals are injected at the Master. The configuration ensures that the Radar pulses are received only by the Master device and not the Client. To calibrate the Radar pulses, the master was replaced by a Spectrum Analyser. The required Radar Waveform, (Type 0), was loaded into the Arbitrary Waveform Generator. The Spectrum Analyser was set to zero Span and the RBW and VBW set to 3MHz. The sweep time was set to display the entire burst and triggered on the Radar Burst. The output level of the Radar Signal Generator was adjusted to give the correct level as defined in the table below with the 1dB correction accounted for. Trace data showing the used Radar Pulses was recorded.

DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.	
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Test Equipment Setup

Setup for Client with injection at the Master

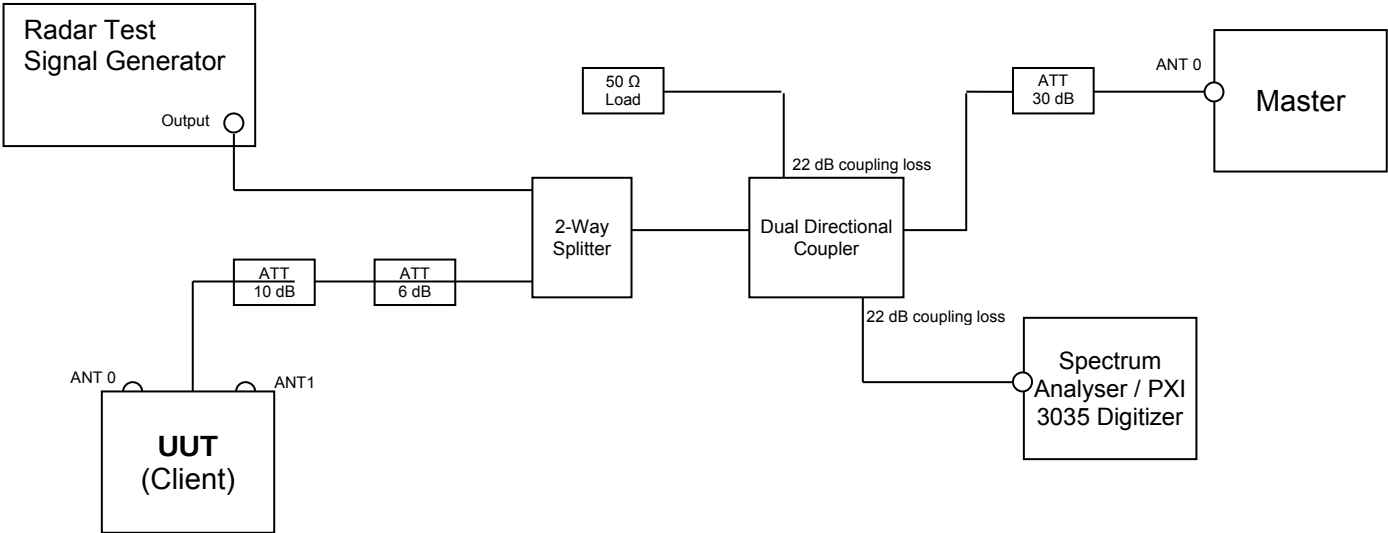



Product Service


Radar Pulse Type 0

Short Radar Pulse Characteristics

Radar Type	Pulse Width (µs)	PRI (µs)	Number of Pulses
0	1	1428	18

Client without Radar Detection


Radar Type 0 Plot

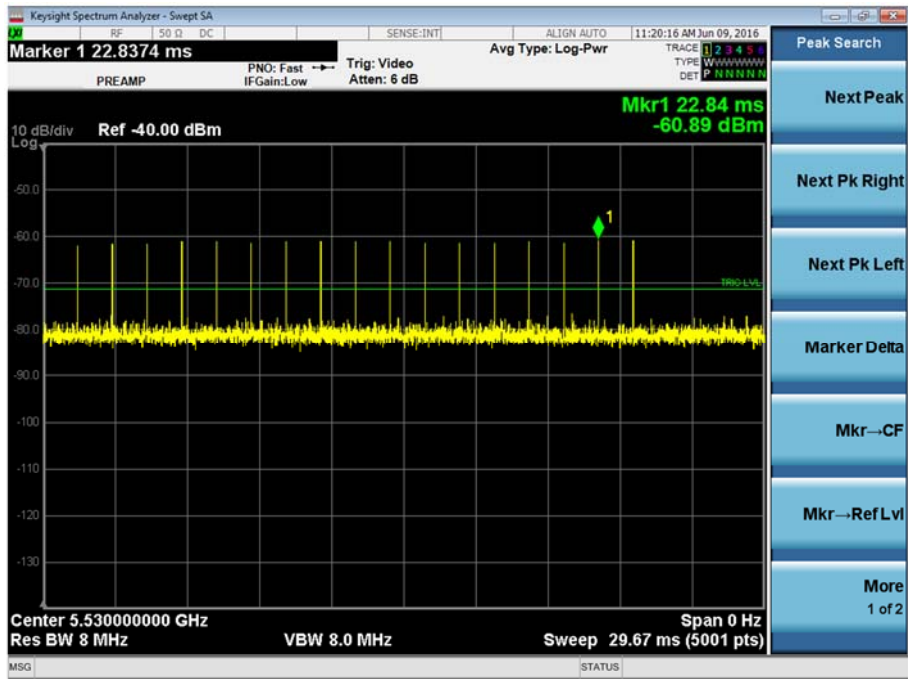



Product Service

Channel Loading Plot

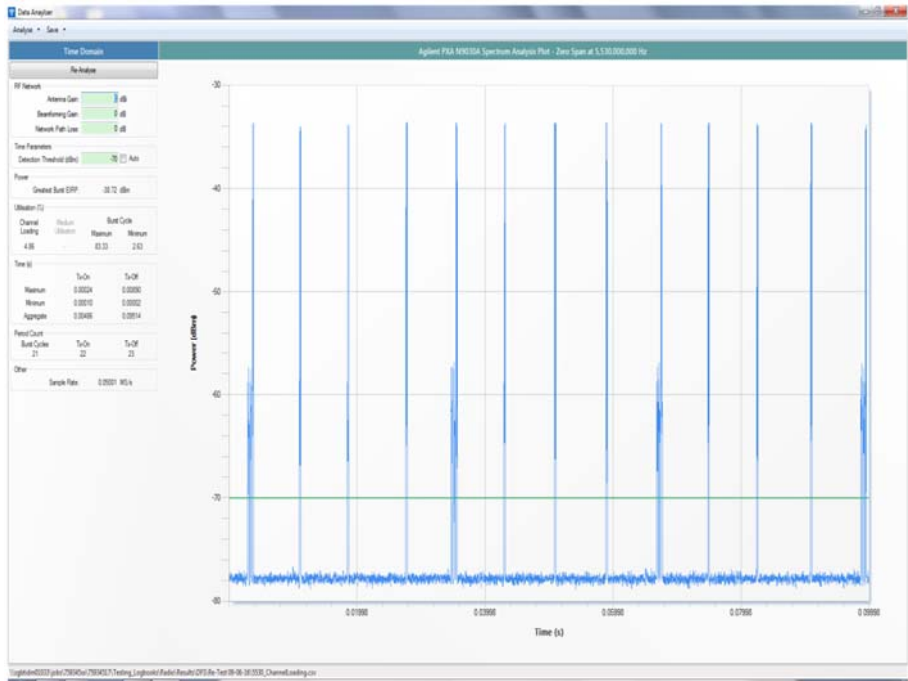

FCC KDB 905462 D02 New Rules v02 specifies that the system is to be loaded using means that is typical for the device. In this case this was audio streaming using the FCC designated test file 5_GHz_Audio_Test_file.WAV. However, due to the bandwidth available and the low demand of an audio stream, the channel loading of 17% percent could not be achieved. Lower data rates were used to increase the channel loading as much as possible.



802.11n 40 MHz Bandwidth


In this test equipment configuration, Radar signals are injected at the Master. The configuration ensures that the Radar pulses are received only by the Master device and not the Client. To calibrate the Radar pulses, the master was replaced by a Spectrum Analyser. The required Radar Waveform, (Type 0), was loaded into the Arbitrary Waveform Generator. The Spectrum Analyser was set to zero Span and the RBW and VBW set to 3MHz. The sweep time was set to display the entire burst and triggered on the Radar Burst. The output level of the Radar Signal Generator was adjusted to give the correct level as defined in the table below with the 1dB correction accounted for. Trace data showing the used Radar Pulses was recorded.

DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.	
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Test Equipment Setup

Setup for Client with injection at the Master

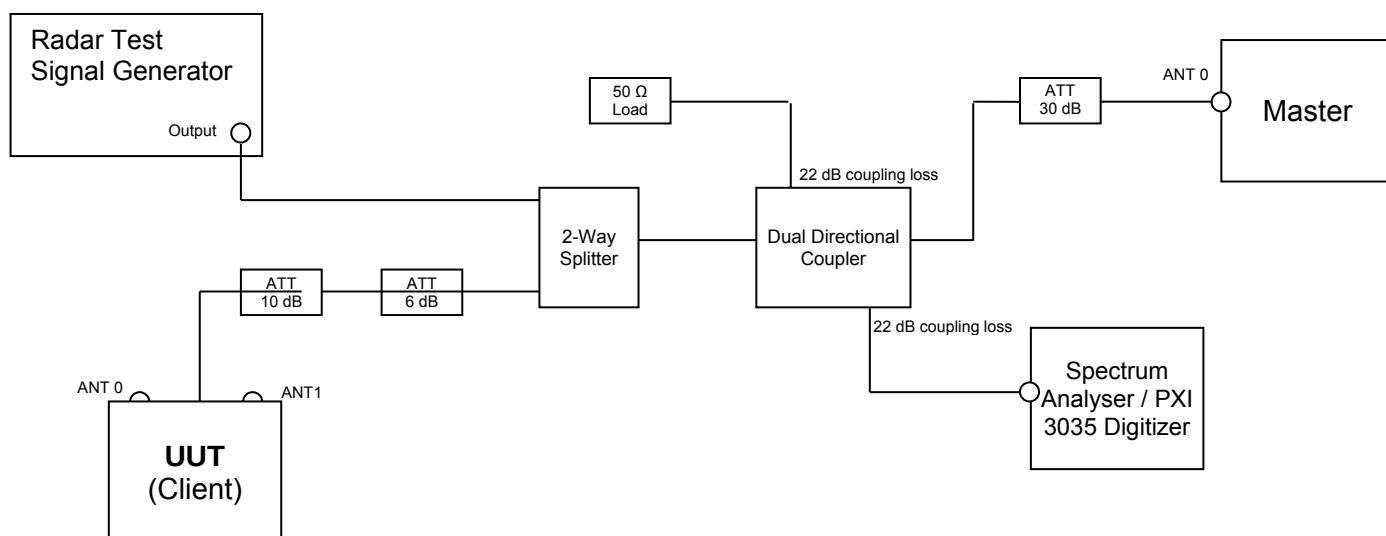



Product Service


Radar Pulse Type 0

Short Radar Pulse Characteristics

Radar Type	Pulse Width (μ s)	PRI (μ s)	Number of Pulses
0	1	1428	18

Client without Radar Detection


Radar Type 0 Plot

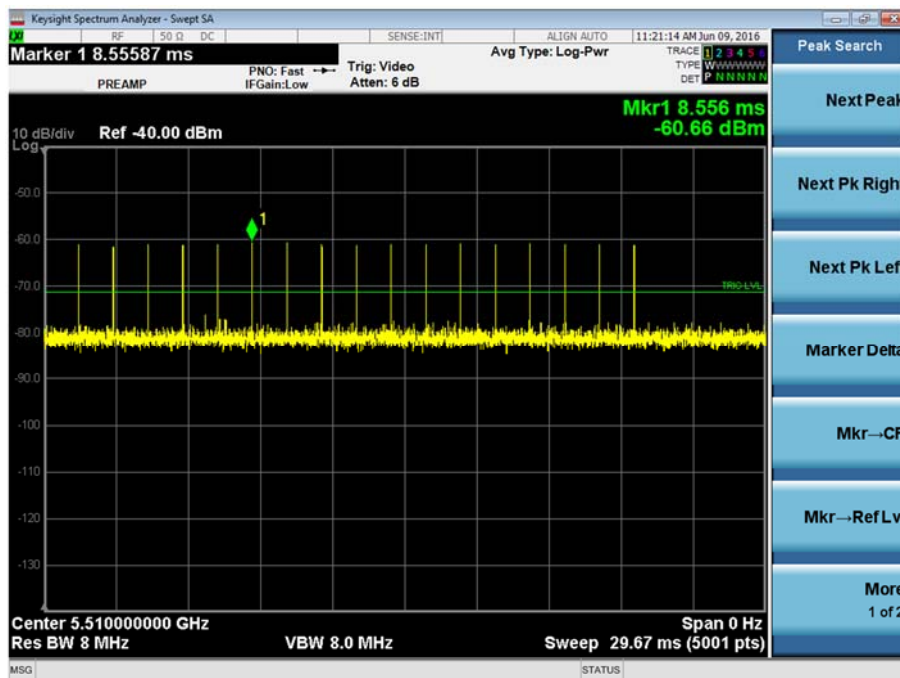



Product Service

Channel Loading Plot

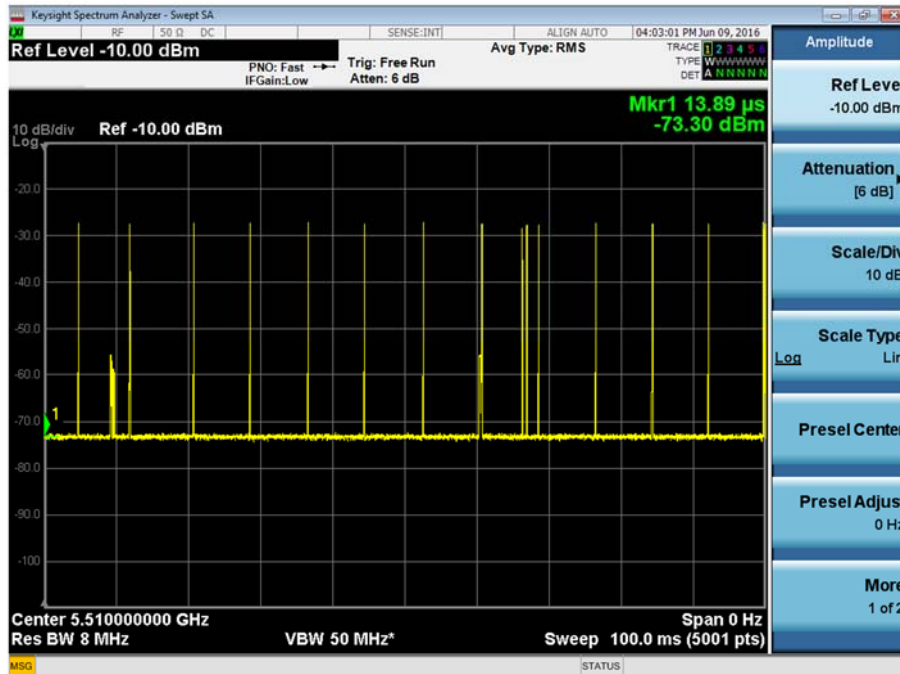

FCC KDB 905462 D02 New Rules v02 specifies that the system is to be loaded using means that is typical for the device. In this case this was audio streaming using the FCC designated test file 5_GHz_Audio_Test_file.WAV. However, due to the bandwidth available and the low demand of an audio stream, the channel loading of 17% could not be achieved. Lower data rates were used to increase the channel loading as much as possible.



Product Service

2.2 IN-SERVICE MONITORING

2.2.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (h)(2)(iii)(iv)
Industry Canada RSS-247, Clause 6.3

2.2.2 Equipment Under Test and Modification State

Minuet/FS5332 S/N: RAD108618 (Module) & RAD108363 (Platform) - Modification State 0

2.2.3 Date of Test

9 June 2016

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

The test was performed in accordance with KDB 905462 D02 New Rules v02, clause 7.8.3.

Client without Radar Detection

The EUT was associated with the FCC Approved Master device FCC ID: UZ7MB82 and FCC ID: Q9DAPIN0224225. A computer was connected via an Ethernet cable to the Master device and the FCC defined audio file was streamed to the Client device.

Radar Pulse Type 0 was then transmitted and the Spectrum monitored. The transmissions from the UUT were observed for a period of 12 seconds after the final injected Radar Pulse. The Channel Move Time and the Channel Closing Time were measured and recorded.

Initially, the UUT was removed from the test setup and replaced with a Spectrum Analyser. A Type 0 Radar burst was sent from the signal generator and its level adjusted until the required level of -62 dBm was achieved. The Spectrum Analyser was then replaced with the master device.

The UUT was configured to stream the FCC designated Audio file. Using the Aeroflex DFS Software, the Radar burst was injected to the Master. The test software triggered the capture mechanism of the PXI Digitiser and data was collected of the Radar burst, the Master and Client devices. The data was analysed with the Channel Move time being measured at the final point where transmissions ceased. It was checked that all transmissions stopped within the 10 second period defined from the point of the end of the final Radar pulse + 10 seconds. In addition, the aggregate on time during the first 200ms and the following 9.8 seconds of the Channel Move Time was computed by the Aeroflex DFS Software.

The markers on the trace data correspond to the following time periods:

Red	-	End Of Radar Burst, (T0)
Purple	-	End Of 200ms Period, (T0 + 200 ms)



Product Service

Orange - End Of Channel Move Time, (T0 + 10 seconds)

Additionally, the PXI digitiser was replaced with a Spectrum Analyser. The external trigger from the Aeroflex DFS test system was used to trigger a 30 minute sweep from the moment the radar burst sequence was injected. It was verified that no transmissions occurred on the test channel during this time period.

2.2.6 Environmental Conditions

Ambient Temperature	21.7°C
Relative Humidity	32.7%




Product Service

2.2.7 Test Results

802.11a, In-Service Monitoring Results

Channel Move Time	4.69 seconds
Channel Closing Time (Aggregate Time During 200ms)	0.23 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	0.96 ms
Channel Closing Time (Aggregate Time During 10s)	1.19 ms


Overall Power vs Time Display, showing channel closing and move time

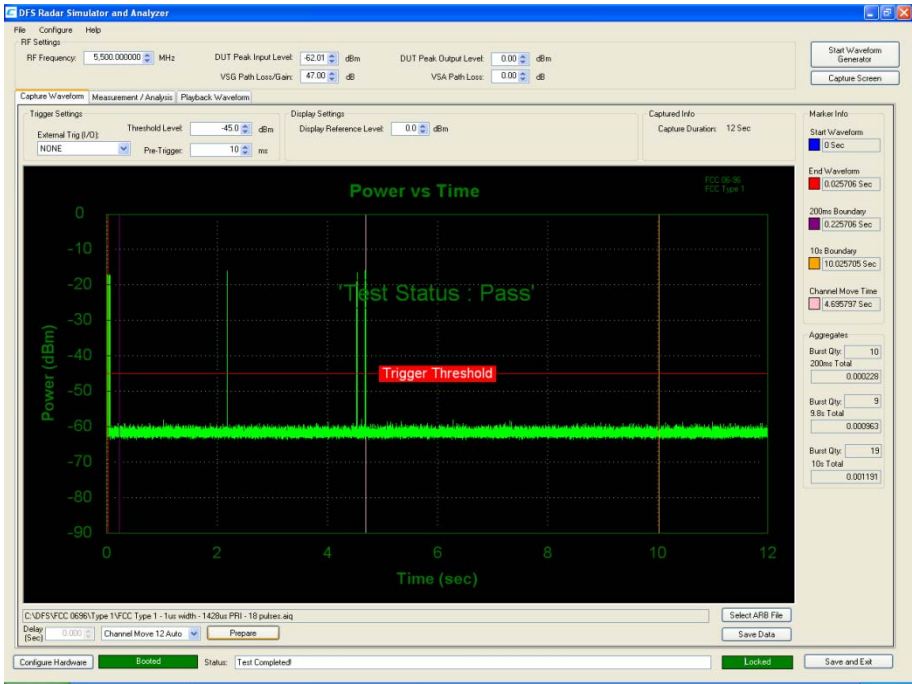




Product Service

Zoom of Radar Burst, Access Point and Client Signalling

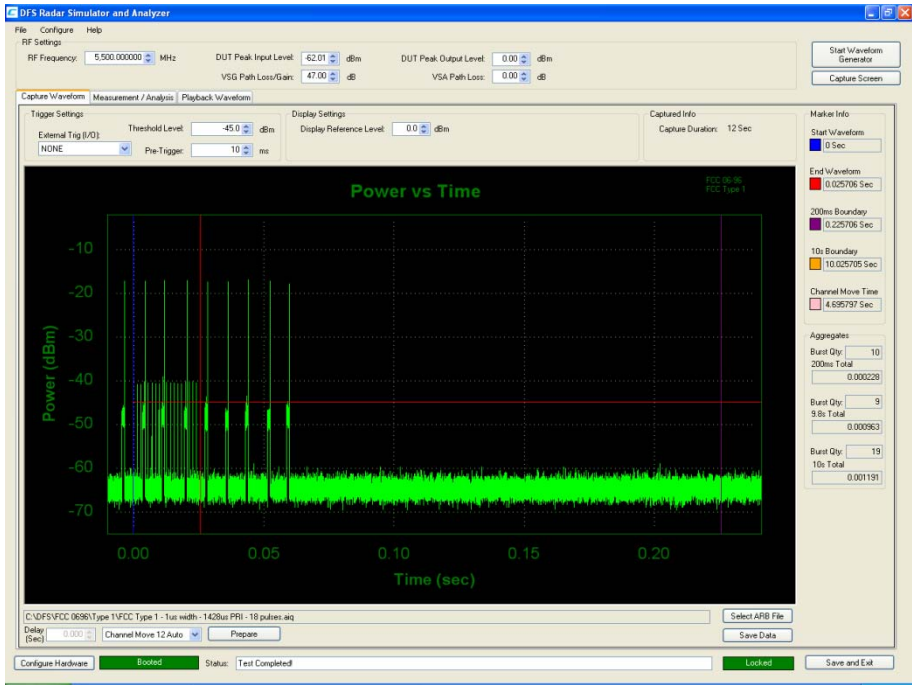

Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

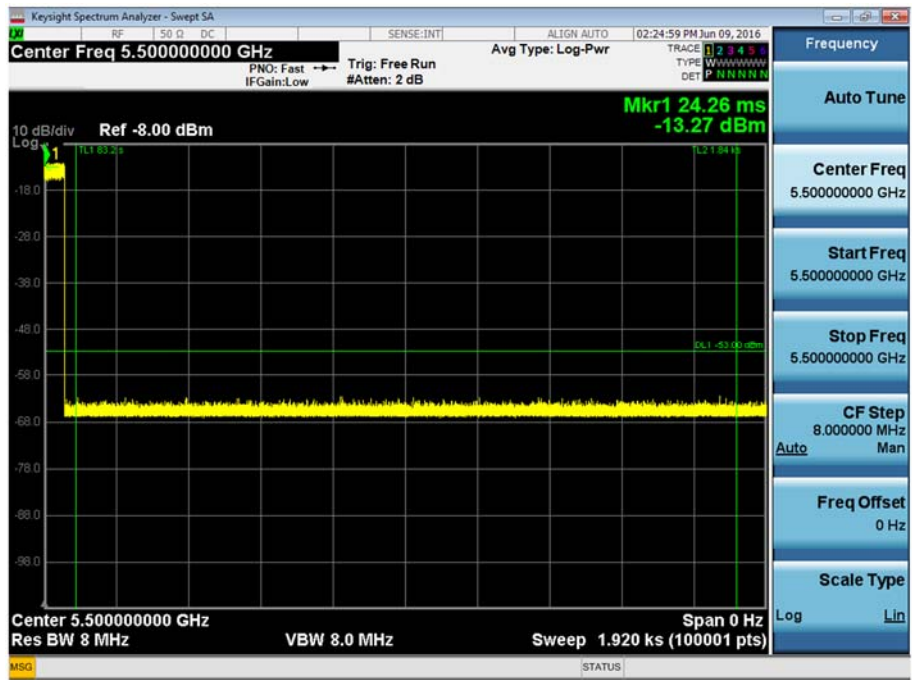

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Industry Canada RSS-247, Limit Clause 6.3 (2)(iii)(iv)(v)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms
Non-occupancy Period	> 30 minutes




Product Service

802.11ac 80 MHz Bandwidth, In-Service Monitoring Results

Channel Move Time	5.90 seconds
Channel Closing Time (Aggregate Time During 200ms)	0.84 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	12.22 ms
Channel Closing Time (Aggregate Time During 10s)	13.06 ms


Overall Power vs Time Display, showing channel closing and move time

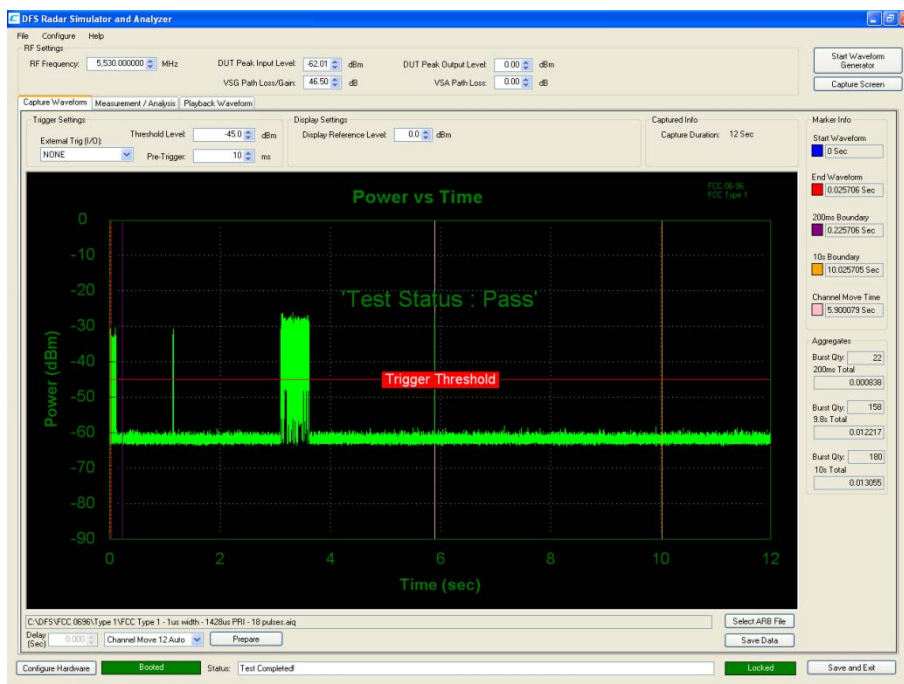




Product Service

Zoom of Radar Burst, Access Point and Client Signalling

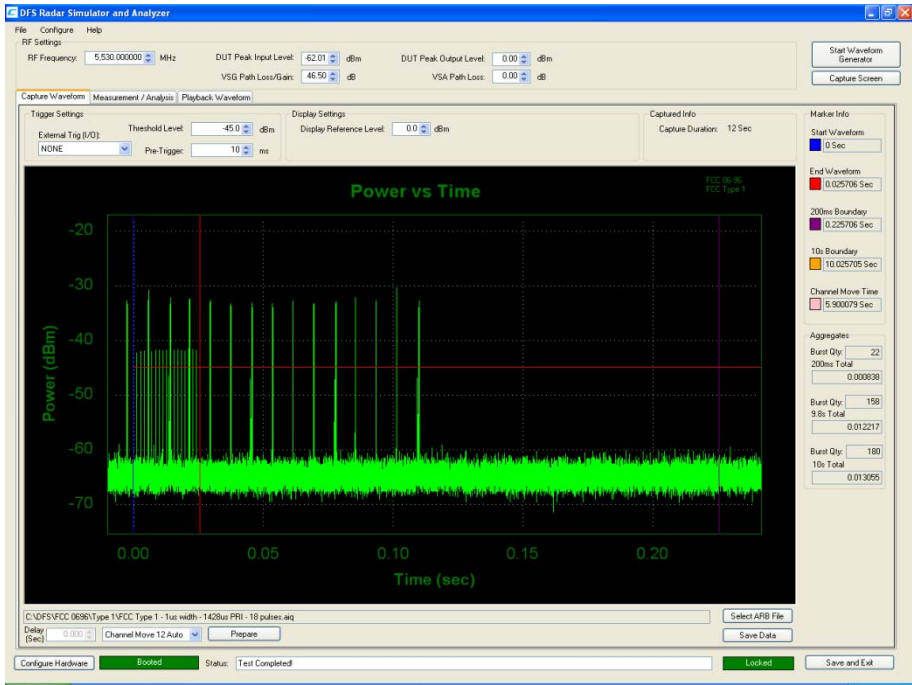

Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

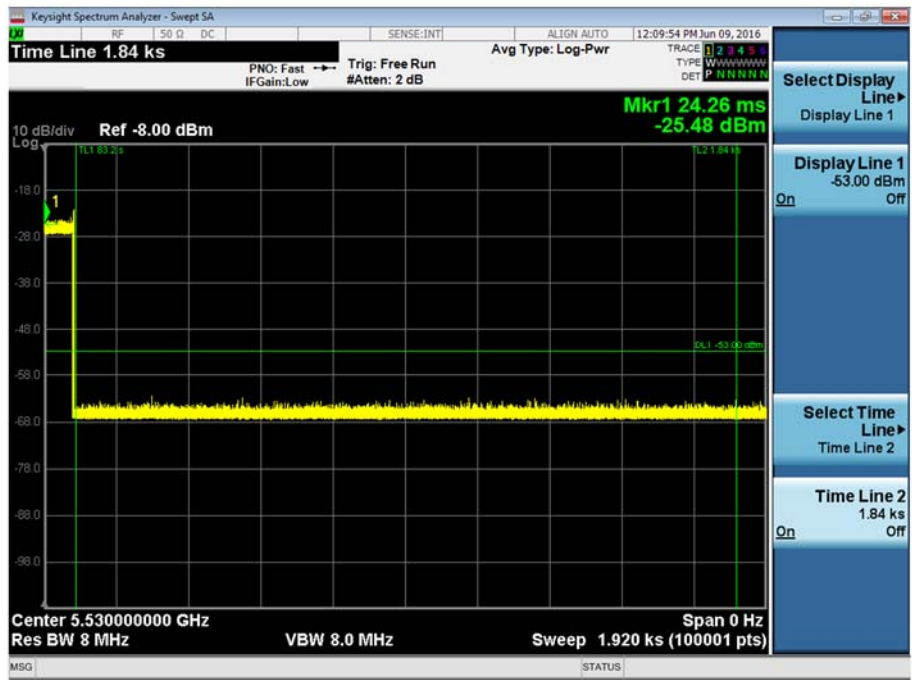

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Industry Canada RSS-247, Limit Clause 6.3 (2)(iii)(iv)(v)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms
Non-occupancy Period	> 30 minutes




Product Service

802.11n 40 MHz Bandwidth, In-Service Monitoring Results

Channel Move Time	0.026 seconds
Channel Closing Time (Aggregate Time During 200ms)	0 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	0 ms
Channel Closing Time (Aggregate Time During 10s)	0 ms


Overall Power vs Time Display, showing channel closing and move time

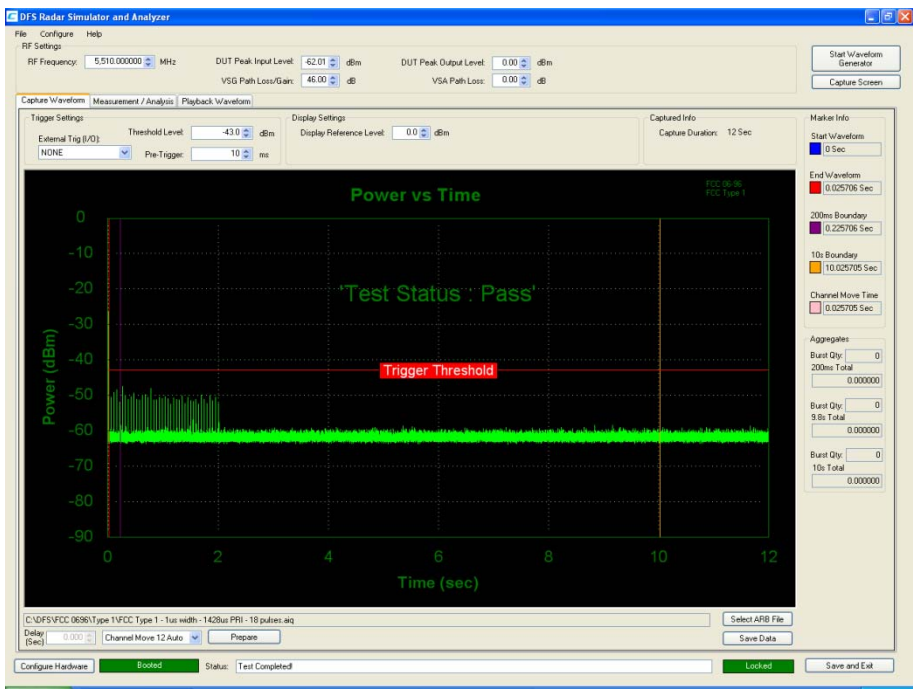




Product Service

Zoom of Radar Burst, Access Point and Client Signalling

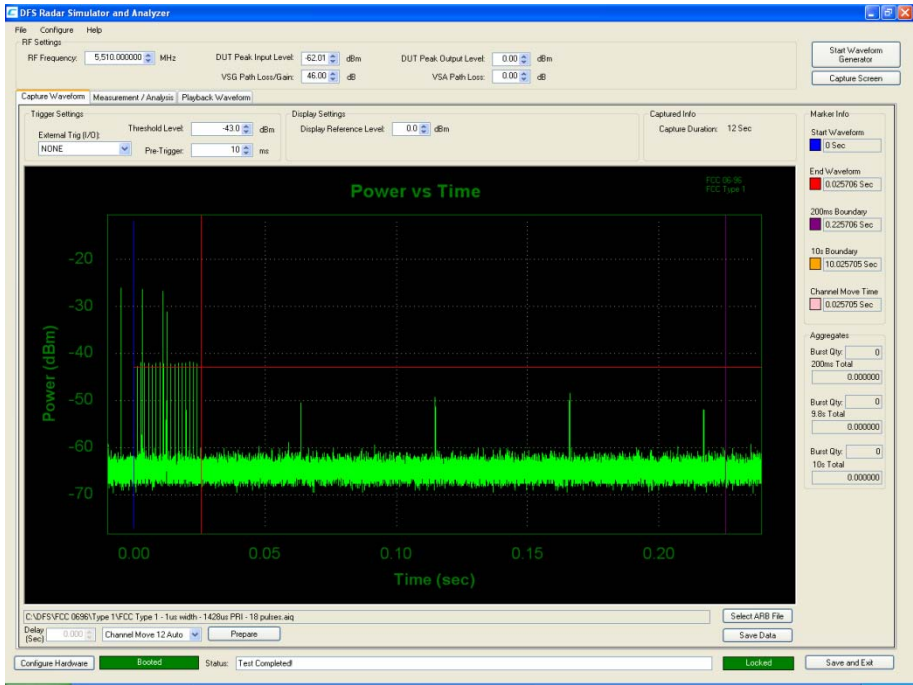

Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

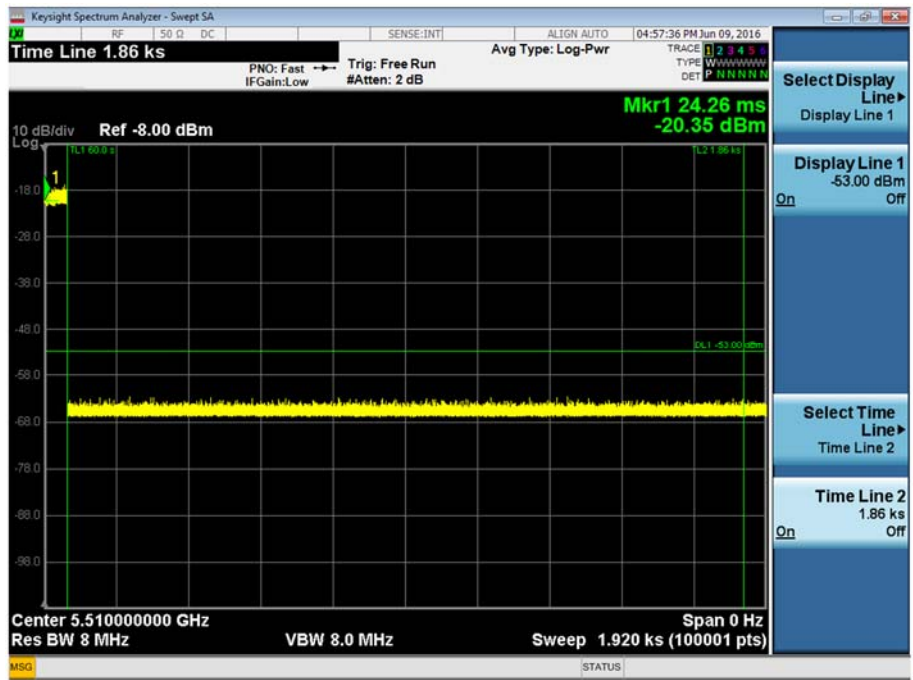

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Industry Canada RSS-247, Limit Clause 6.3 (2)(iii)(iv)(v)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms
Non-occupancy Period	> 30 minutes



Product Service

SECTION 3

TEST EQUIPMENT USED



Product Service

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 - In-Service Monitoring					
Directional Coupler	Hewlett Packard	11692D	451	12	13-Oct-2016
Hygrometer	Rotronic	I-1000	3220	12	19-Aug-2016
PXI RF Digitizer	Aeroflex	3035	4012	24	29-Jan-2018
PXI RF Synthesizer	Aeroflex	3010	4013	24	29-Jan-2018
PXI RF Synthesizer	Aeroflex	3011	4014	24	29-Jan-2018
PXI Digital RF Signal Generator	Aeroflex	3025	4015	24	29-Jan-2018
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
PXA Signal Analyser	Agilent Technologies	N9030A PXA	4409	12	8-Mar-2017
Access Point	NETGEAR	DGN1000	4452	-	TU
AccessPoint	ARUBA	APIN0224	4448	-	TU

O/P MON – Output Monitored with Calibrated Equipment



Product Service

3.2 SUPPORT TEST EQUIPMENT

Instrument	Manufacturer	Type No.	Serial Number
Computer	Dell Inc.	E6510	10388944297



Product Service

3.3 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
In-Service Monitoring	Time: $\pm 0.47 \%$ Power: $\pm 1.29 \text{ dB}$



Product Service

SECTION 4

PHOTOGRAPHS




Product Service

4.1 TEST SET-UP PHOTOGRAPHS

See test set-up photographs exhibit "75934517 FCC and IC Set Up Photos.pdf".

4.2 DFS TEST EQUIPMENT

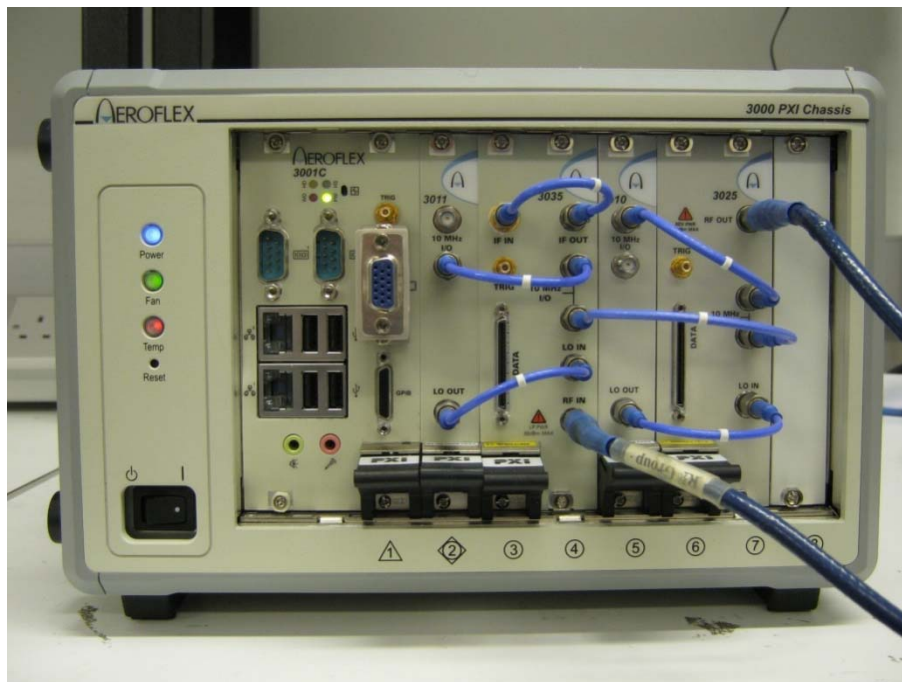

Test Set Up



Product Service

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service