



Product Service

---

**Choose certainty.  
Add value.**

# Report On

FCC and Industry Canada Testing of the  
Frontier Silicon Ltd Minuet/FS5332

In accordance with FCC 47 CFR Part 15, Industry Canada RSS-247  
and Industry Canada RSS-GEN

COMMERCIAL-IN-CONFIDENCE

FCC ID: YYX-FS5332

IC: 11458A-FS5332

Document 75934517 Report 09 Issue 3

July 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC and Industry Canada Testing of the  
Frontier Silicon Ltd Minuet/FS5332  
In accordance with FCC 47 CFR Part 15, Industry Canada RSS-247  
and Industry Canada RSS-GEN

Document 75934517 Report 09 Issue 3

July 2016

**PREPARED FOR**

Frontier Silicon Ltd  
137 Euston Road  
London  
NW1 2AA

**PREPARED BY**

**Natalie Bennett**  
Senior Administrator, Project Support

**APPROVED BY**

**Ryan Henley**  
Authorised Signatory

**DATED**

29 July 2016

**This report has been up-issued to Issue 3 to amend the FCC and IC ID's.**

---

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15, Industry Canada RSS-247 and Industry Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

G Lawler





Product Service

## CONTENTS

| Section  | Page No                                                  |
|----------|----------------------------------------------------------|
| <b>1</b> | <b>REPORT SUMMARY ..... 3</b>                            |
| 1.1      | Introduction ..... 4                                     |
| 1.2      | Brief Summary of Results ..... 5                         |
| 1.3      | Application Form ..... 6                                 |
| 1.4      | Product Information ..... 15                             |
| 1.5      | Test Conditions ..... 15                                 |
| 1.6      | Deviations from the Standard ..... 15                    |
| 1.7      | Modification Record ..... 15                             |
| <b>2</b> | <b>TEST DETAILS ..... 16</b>                             |
| 2.1      | AC Line Conducted Emissions ..... 17                     |
| 2.2      | Spurious Radiated Emissions ..... 21                     |
| <b>3</b> | <b>TEST EQUIPMENT USED ..... 27</b>                      |
| 3.1      | Test Equipment Used ..... 28                             |
| 3.2      | Measurement Uncertainty ..... 29                         |
| <b>4</b> | <b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 30</b> |
| 4.1      | Accreditation, Disclaimers and Copyright ..... 31        |



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC and Industry Canada Testing of the  
Frontier Silicon Ltd Minuet/FS5332  
In accordance with FCC 47 CFR Part 15, Industry Canada RSS-247  
and Industry Canada RSS-GEN



## 1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC and Industry Canada Testing of the Frontier Silicon Ltd Minuet/FS5332 to the requirements of FCC 47 CFR Part 15, Industry Canada RSS-247 and Industry Canada RSS-GEN.

|                                |                                                                                                                                                                         |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Objective                      | To perform FCC and Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out. |
| Manufacturer                   | Frontier Silicon Ltd                                                                                                                                                    |
| Model Number(s)                | Minuet/FS5332                                                                                                                                                           |
| Serial Number(s)               | RAD108621 (Module) & RAD108181 (Platform) - Radiated<br>RAD108624 (Module), RAD108703 (Platform) and<br>RAD108757 (Adaptor Board) - Radiated                            |
| Number of Samples Tested       | 2                                                                                                                                                                       |
| Test Specification/Issue/Date  | FCC 47 CFR Part 15 (2015)<br>Industry Canada RSS-247 (Issue 1, 2015)<br>Industry Canada RSS-GEN (Issue 4, 2014)                                                         |
| Incoming Release Date          | Application Form<br>27 June 2016 and 11 July 2016                                                                                                                       |
| Disposal Reference Number Date | Held Pending Disposal<br>Not Applicable<br>Not Applicable                                                                                                               |
| Order Number Date              | FS160438<br>08 April 2016                                                                                                                                               |
| Start of Test                  | 5 July 2016                                                                                                                                                             |
| Finish of Test                 | 10 July 2016                                                                                                                                                            |
| Name of Engineer(s)            | G Lawler                                                                                                                                                                |
| Related Document(s)            | KDB 789033 D02 General UNII Test Procedures New Rules v01<br>ETSI TR 100 028 (2001)<br>ANCI C63.10 (2013)                                                               |



Product Service

## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15, Industry Canada RSS-247 and Industry Canada RSS-GEN is shown below.

| Section                                      | Specification Clause                               |         |         | Test Description            | Result | Comments/Base Standard |
|----------------------------------------------|----------------------------------------------------|---------|---------|-----------------------------|--------|------------------------|
|                                              | Part 15                                            | RSS-247 | RSS-GEN |                             |        |                        |
| Bluetooth and RLAN Simultaneous Transmission |                                                    |         |         |                             |        |                        |
| 2.1                                          | 15.207                                             | -       | 8.8     | AC Line Conducted Emissions | Pass   |                        |
| 2.2                                          | 15.407 (b),<br>15.205,<br>15.209 and<br>15.247 (d) | 6.2     | -       | Spurious Radiated Emissions | Pass   |                        |



### 1.3 APPLICATION FORM

| EQUIPMENT DESCRIPTION                                                                           |                                                                                                                                               |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Model Name/Number                                                                               | Minuet/FS5332                                                                                                                                 |
| Part Number                                                                                     | HA-FS5332-xxxxxx (where xxxxxx denotes the customer variant eg HA-FS5332-000001)                                                              |
| Hardware Version                                                                                | Rev6                                                                                                                                          |
| Software Version                                                                                | NS1.0.13                                                                                                                                      |
| FCC ID (if applicable)                                                                          | YYX-FS5332                                                                                                                                    |
| Industry Canada ID (if applicable)                                                              | 11458A-FS5332                                                                                                                                 |
| Technical Description (Please provide a brief description of the intended use of the equipment) | Minuet is a module, which when installed in a consumer audio product enables high-quality audio streaming over Wi-Fi, Bluetooth and Ethernet. |

| Types of Modulations used by the Equipment                              |                                                                                   |                              |
|-------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------|
| <input checked="" type="checkbox"/>                                     | FHSS                                                                              |                              |
| <input checked="" type="checkbox"/>                                     | Other forms of modulation                                                         |                              |
| In case of FHSS Modulation                                              |                                                                                   |                              |
| In case of non-Adaptive Frequency Hopping equipment:                    |                                                                                   |                              |
| Number of Hopping Frequencies: N/A                                      |                                                                                   |                              |
| In case of Adaptive Frequency Hopping Equipment:                        |                                                                                   |                              |
| Maximum number of Hopping Frequencies: 79                               |                                                                                   |                              |
| Minimum number of Hopping Frequencies: 20                               |                                                                                   |                              |
| Dwell Time:                                                             |                                                                                   |                              |
| Packet Type                                                             | Dwell Time ms (Adaptive)                                                          | Dwell Time ms (Non-adaptive) |
| XDH1                                                                    | 1.25                                                                              |                              |
| XDH3                                                                    | 2.50                                                                              |                              |
| XDH5                                                                    | 3.75                                                                              |                              |
| Minimum Channel Occupation Time: Adaptive =1.25ms, Non-Adaptive = 0.625 |                                                                                   |                              |
| Adaptive / non-adaptive equipment:                                      |                                                                                   |                              |
| <input type="checkbox"/>                                                | non-adaptive Equipment                                                            |                              |
| <input checked="" type="checkbox"/>                                     | adaptive Equipment without the possibility to switch to a non-adaptive mode       |                              |
| <input type="checkbox"/>                                                | adaptive Equipment which can also operate in a non-adaptive mode                  |                              |
| In case of adaptive equipment:                                          |                                                                                   |                              |
| The Channel Occupancy Time implemented by the equipment: 12.5 ms        |                                                                                   |                              |
| <input checked="" type="checkbox"/>                                     | The equipment has implemented an LBT based DAA mechanism                          |                              |
| In case of equipment using modulation different from FHSS:              |                                                                                   |                              |
| <input checked="" type="checkbox"/>                                     | The equipment is Frame Based equipment                                            |                              |
| <input checked="" type="checkbox"/>                                     | The equipment is Load Based equipment                                             |                              |
| <input type="checkbox"/>                                                | The equipment can switch dynamically between Frame Based and Load Based equipment |                              |
| The CCA time implemented by the equipment: 20 µs                        |                                                                                   |                              |
| <input checked="" type="checkbox"/>                                     | The equipment has implemented an non-LBT based DAA mechanism                      |                              |
| <input type="checkbox"/>                                                | The equipment can operate in more than one adaptive mode                          |                              |



| In case of non-adaptive Equipment:                                                                                                                                 |                                                                                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The maximum RF Output Power (e.i.r.p.): N/A dBm                                                                                                                    |                                                                                                                                                                               |
| The maximum (corresponding) Duty Cycle: N/A %                                                                                                                      |                                                                                                                                                                               |
| Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared): |                                                                                                                                                                               |
|                                                                                                                                                                    |                                                                                                                                                                               |
| The worst case operational mode for each of the following tests:                                                                                                   |                                                                                                                                                                               |
| RF Output Power: BT:DH5, 802.11b:1Mbps, 802.11g:12Mbps, 802.11n(20MHz):MCS7, 802.11n(40MHz):MCS0                                                                   |                                                                                                                                                                               |
| Power Spectral Density: 802.11b:1Mbps, 802.11g:12Mbps, 802.11n(20MHz):MCS7, 802.11n(40MHz):MCS0                                                                    |                                                                                                                                                                               |
| Duty cycle, Tx-Sequence, Tx-gap: N/A                                                                                                                               |                                                                                                                                                                               |
| Accumulated Transmit Time, Frequency Occupation & Hopping Sequence (only for FHSS equipment): BT:DH5/DH3/DH1                                                       |                                                                                                                                                                               |
| Hopping Frequency Separation (only for FHSS equipment): BT:DH5/2DH5/3DH5                                                                                           |                                                                                                                                                                               |
| Medium Utilisation: N/A                                                                                                                                            |                                                                                                                                                                               |
| Adaptivity & Receiver Blocking: 802.11b:1Mbps, 802.11g:6Mbps, 802.11n::MCS0                                                                                        |                                                                                                                                                                               |
| Nominal Channel Bandwidth: BT:DH5/2DH5/3DH5, 802.11b:1Mbps, 802.11g:12Mbps, 802.11n(20MHz):MCS7, 802.11n(40MHz):MCS0                                               |                                                                                                                                                                               |
| Transmitter unwanted emissions in the OOB domain: BT:DH5, 802.11b:1Mbps, 802.11g:12Mbps, 802.11n(20MHz):MCS7, 802.11n(40MHz):MCS0                                  |                                                                                                                                                                               |
| Transmitter unwanted emissions in the spurious domain: BT:DH5, 802.11b:1Mbps, 802.11g:12Mbps, 802.11n(20MHz):MCS7, 802.11n(40MHz):MCS0                             |                                                                                                                                                                               |
| Receiver spurious emissions: BT:DH5, 802.11b:1Mbps, 802.11g:12Mbps, 802.11n(20MHz):MCS7, 802.11n(40MHz):MCS0                                                       |                                                                                                                                                                               |
| The different transmit operating modes (tick all that apply):                                                                                                      |                                                                                                                                                                               |
| <input checked="" type="checkbox"/>                                                                                                                                | Operating mode 1: Single Antenna Equipment                                                                                                                                    |
| <input type="checkbox"/>                                                                                                                                           | Equipment with only 1 antenna                                                                                                                                                 |
| <input checked="" type="checkbox"/>                                                                                                                                | Equipment with 2 diversity antennas but only 1 antenna active at any moment in time                                                                                           |
| <input type="checkbox"/>                                                                                                                                           | Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [2012] legacy mode in smart antenna systems) |
| <input type="checkbox"/>                                                                                                                                           | Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming                                                                                              |
| <input type="checkbox"/>                                                                                                                                           | Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [2012] legacy mode)                                                                                          |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 3                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 4                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 5                                                                                                        |
| NOTE: Add more lines if more channel bandwidths are supported.                                                                                                     |                                                                                                                                                                               |
| <input type="checkbox"/>                                                                                                                                           | Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming                                                                                                 |
| <input type="checkbox"/>                                                                                                                                           | Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [2012] legacy mode)                                                                                            |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 3                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 4                                                                                                        |
| <input type="checkbox"/>                                                                                                                                           | High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 5                                                                                                        |
| NOTE: Add more lines if more channel bandwidths are supported.                                                                                                     |                                                                                                                                                                               |



|                                                                                                    |                                                                                                          |     |
|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----|
| <b>In case of Smart Antenna Systems:</b>                                                           |                                                                                                          |     |
| The number of Receive chains:                                                                      |                                                                                                          |     |
| The number of Transmit chains:                                                                     |                                                                                                          |     |
| <input type="checkbox"/>                                                                           | symmetrical power distribution                                                                           |     |
| <input type="checkbox"/>                                                                           | asymmetrical power distribution                                                                          |     |
| In case of beam forming, the maximum (additional) beam forming gain:      dB                       |                                                                                                          |     |
| <i>NOTE: The additional beam forming gain does not include the basic gain of a single antenna.</i> |                                                                                                          |     |
| <b>Operating Frequency Range(s) of the equipment:</b>                                              |                                                                                                          |     |
| Operating Frequency Range 1: 2400 MHz to 2483.5 MHz                                                |                                                                                                          |     |
| Operating Frequency Range 2:                                                                       | MHz to                                                                                                   | MHz |
| Operating Frequency Range 3:                                                                       | MHz to                                                                                                   | MHz |
| <i>NOTE: Add more lines if more Frequency Ranges are supported.</i>                                |                                                                                                          |     |
| <b>Nominal Channel Bandwidth(s):</b>                                                               |                                                                                                          |     |
| Nominal Channel Bandwidth1: BT: 1 - 2 MHz                                                          |                                                                                                          |     |
| Nominal Channel Bandwidth2: 802.11b,g,n: 20 - 40 MHz                                               |                                                                                                          |     |
| Nominal Channel Bandwidth3:                                                                        | MHz                                                                                                      |     |
| Nominal Channel Bandwidth4:                                                                        | MHz                                                                                                      |     |
| Nominal Channel Bandwidth5:                                                                        | MHz                                                                                                      |     |
| <i>NOTE: Add more lines if more channel bandwidths are supported.</i>                              |                                                                                                          |     |
| <b>Type of Equipment (stand-alone, combined, plug-in radio device, etc.):</b>                      |                                                                                                          |     |
| <input type="checkbox"/>                                                                           | Stand-alone                                                                                              |     |
| <input type="checkbox"/>                                                                           | Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment) |     |
| <input checked="" type="checkbox"/>                                                                | Plug-in radio device (Equipment intended for a variety of host systems)                                  |     |
| <input type="checkbox"/>                                                                           | Other                                                                                                    |     |
| <b>The extreme operating conditions that apply to the equipment:</b>                               |                                                                                                          |     |
| Operating temperature range: 0 °C to +70 °C                                                        |                                                                                                          |     |
| Details provided are for the:                                                                      |                                                                                                          |     |
| <input type="checkbox"/>                                                                           | stand-alone equipment                                                                                    |     |
| <input checked="" type="checkbox"/>                                                                | combined (or host) equipment                                                                             |     |
| <input checked="" type="checkbox"/>                                                                | test jig                                                                                                 |     |



| The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:                                                           |            |                  |                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------|---------------------------------|
| Antenna Type:                                                                                                                                                                                          |            |                  |                                 |
| <input type="checkbox"/> Integral Antenna                                                                                                                                                              |            |                  |                                 |
| Antenna Gain:            dBi                                                                                                                                                                           |            |                  |                                 |
| If applicable, additional beamforming gain (excluding basic antenna gain):            dB                                                                                                               |            |                  |                                 |
| <input type="checkbox"/> Temporary RF connector provided                                                                                                                                               |            |                  |                                 |
| <input type="checkbox"/> No temporary RF connector provided                                                                                                                                            |            |                  |                                 |
| <input checked="" type="checkbox"/> Dedicated Antennas (equipment with antenna connector)                                                                                                              |            |                  |                                 |
| <input type="checkbox"/> Single power level with corresponding antenna(s)                                                                                                                              |            |                  |                                 |
| <input type="checkbox"/> Multiple power settings and corresponding antenna(s)                                                                                                                          |            |                  |                                 |
| Number of different Power Levels: 2                                                                                                                                                                    |            |                  |                                 |
| Power Level 1: As reported dBm                                                                                                                                                                         |            |                  |                                 |
| Power Level 2: As reported dBm                                                                                                                                                                         |            |                  |                                 |
| Power Level 3:            dBm                                                                                                                                                                          |            |                  |                                 |
| NOTE 1: Add more lines in case the equipment has more power levels.                                                                                                                                    |            |                  |                                 |
| NOTE 2: These power levels are conducted power levels (at antenna connector).                                                                                                                          |            |                  |                                 |
| For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable |            |                  |                                 |
| Power Level 1: As reported dBm                                                                                                                                                                         |            |                  |                                 |
| Number of antenna assemblies provided for this power level:                                                                                                                                            |            |                  |                                 |
| Assembly #                                                                                                                                                                                             | Gain (dBi) | e.i.r.p (dBm)    | Part number or model number     |
| 1                                                                                                                                                                                                      | 2.3        | WLAN:20 BT:9.9   | N12-2128-R0A<br>SW700M (SW750M) |
| 2                                                                                                                                                                                                      | 1.9        | WLAN:20 BT:9.9Bm | RFPCA431223IMLB301              |
| 3                                                                                                                                                                                                      |            |                  |                                 |
| 4                                                                                                                                                                                                      |            |                  |                                 |
| NOTE: Add more rows in case more antenna assemblies are supported for this power level.                                                                                                                |            |                  |                                 |
| Power Level 2:            dBm                                                                                                                                                                          |            |                  |                                 |
| Number of antenna assemblies provided for this power level:                                                                                                                                            |            |                  |                                 |
| Assembly #                                                                                                                                                                                             | Gain (dBi) | e.i.r.p (dBm)    | Part number or model number     |
| 1                                                                                                                                                                                                      |            |                  |                                 |
| 2                                                                                                                                                                                                      |            |                  |                                 |
| 3                                                                                                                                                                                                      |            |                  |                                 |
| 4                                                                                                                                                                                                      |            |                  |                                 |
| NOTE: Add more rows in case more antenna assemblies are supported for this power level.                                                                                                                |            |                  |                                 |
| Power Level 3:            dBm                                                                                                                                                                          |            |                  |                                 |
| Number of antenna assemblies provided for this power level:                                                                                                                                            |            |                  |                                 |
| Assembly #                                                                                                                                                                                             | Gain (dBi) | e.i.r.p (dBm)    | Part number or model number     |
| 1                                                                                                                                                                                                      |            |                  |                                 |
| 2                                                                                                                                                                                                      |            |                  |                                 |
| 3                                                                                                                                                                                                      |            |                  |                                 |
| 4                                                                                                                                                                                                      |            |                  |                                 |
| NOTE: Add more rows in case more antenna assemblies are supported for this power level.                                                                                                                |            |                  |                                 |



|                                                                                                                                                                                                                                                                                                                                                    |                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:</b>                                                                                                                                                                                    |                            |
| Details provided are for the: <input type="checkbox"/> stand-alone equipment                                                                                                                                                                                                                                                                       |                            |
| <input checked="" type="checkbox"/> combined (or host) equipment                                                                                                                                                                                                                                                                                   |                            |
| <input checked="" type="checkbox"/> test jig                                                                                                                                                                                                                                                                                                       |                            |
| Supply Voltage <input type="checkbox"/> AC mains                                                                                                                                                                                                                                                                                                   | State AC voltage V         |
| <input checked="" type="checkbox"/> DC                                                                                                                                                                                                                                                                                                             | State DC voltage 5 V       |
| In case of DC, indicate the type of power source                                                                                                                                                                                                                                                                                                   |                            |
| <input type="checkbox"/> Internal Power Supply                                                                                                                                                                                                                                                                                                     |                            |
| <input checked="" type="checkbox"/> External Power Supply or AC/DC adapter                                                                                                                                                                                                                                                                         |                            |
| <input type="checkbox"/> Battery                                                                                                                                                                                                                                                                                                                   |                            |
| <input type="checkbox"/> Other:                                                                                                                                                                                                                                                                                                                    |                            |
| <b>Describe the test modes available which can facilitate testing:</b>                                                                                                                                                                                                                                                                             |                            |
| Continuous transmit test modes for Bluetooth and WLAN testing                                                                                                                                                                                                                                                                                      |                            |
| <b>The equipment type (e.g. Bluetooth®, IEEE 802.11™ [2012] IEEE 802.15.4™ [2011], proprietary, etc.):</b>                                                                                                                                                                                                                                         |                            |
| Burst mode with >90% Duty Cycle                                                                                                                                                                                                                                                                                                                    |                            |
| <b>If applicable, the statistical analysis referred in clause 5.3.1 q)</b>                                                                                                                                                                                                                                                                         |                            |
| To be provided as separate attachment, please state document name:                                                                                                                                                                                                                                                                                 |                            |
| <b>If applicable, the statistical analysis referred in clause 5.3.1 r)</b>                                                                                                                                                                                                                                                                         |                            |
| To be provided as separate attachment, please state document name:                                                                                                                                                                                                                                                                                 |                            |
| <b>Geo-location capability supported by the equipment:</b>                                                                                                                                                                                                                                                                                         |                            |
| <input type="checkbox"/> Yes                                                                                                                                                                                                                                                                                                                       |                            |
| <input type="checkbox"/> The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.                                                                                                                                                                                 |                            |
| <input checked="" type="checkbox"/> No                                                                                                                                                                                                                                                                                                             |                            |
| <b>Combination for testing (see clause 5.1.3.3 of EN 300 328 V1.9.1)</b>                                                                                                                                                                                                                                                                           |                            |
| From all combinations of conducted power settings and intended antenna assembly(ies) specified in clause 3.1 m), specify the combination resulting in the highest e.i.r.p. for the radio equipment.                                                                                                                                                |                            |
| Unless otherwise specified in ETSI EN 300 328, this power setting is to be used for testing against the requirements of ETSI EN 300 328. In case there is more than one such conducted power setting resulting in the same (highest) e.i.r.p. level, the highest power setting is to be used for testing. See also ETS EN 300 328, clause 5.1.3.3. |                            |
| Highest overall e.i.r.p. value: dBm                                                                                                                                                                                                                                                                                                                |                            |
| Corresponding Antenna assembly gain: dBi                                                                                                                                                                                                                                                                                                           | Antenna Assembly #:        |
| Corresponding conducted power setting: dB<br>(also the power level to be used for testing)                                                                                                                                                                                                                                                         | Listed as Power Setting #: |
| <b>Additional information provided by the applicant</b>                                                                                                                                                                                                                                                                                            |                            |
| <b>Modulation</b>                                                                                                                                                                                                                                                                                                                                  |                            |
| ITU Class(es) of emission: F1B                                                                                                                                                                                                                                                                                                                     |                            |
| Can the transmitter operate unmodulated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No                                                                                                                                                                                                                                       |                            |
| <b>Duty Cycle</b>                                                                                                                                                                                                                                                                                                                                  |                            |
| The transmitter is intended for:                                                                                                                                                                                                                                                                                                                   |                            |
| <input type="checkbox"/> Continuous duty                                                                                                                                                                                                                                                                                                           |                            |
| <input checked="" type="checkbox"/> Intermittent duty                                                                                                                                                                                                                                                                                              |                            |
| <input type="checkbox"/> Continuous operation possible for testing purposes                                                                                                                                                                                                                                                                        |                            |



Product Service

| About the UUT                                         |                                                                                                                                       |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>                              | The equipment submitted are representative production models                                                                          |
| <input checked="" type="checkbox"/>                   | If not, the equipment submitted are pre-production models?                                                                            |
| <input checked="" type="checkbox"/>                   | If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested |
| <input type="checkbox"/>                              | If not, supply full details                                                                                                           |
| <input type="checkbox"/>                              | The equipment submitted is CE marked                                                                                                  |
| <input type="checkbox"/>                              | In addition to the CE mark, the Class-II identifier (Alert Sign) is affixed.                                                          |
| Additional items and/or supporting equipment provided |                                                                                                                                       |
| <input type="checkbox"/>                              | Spare batteries (e.g. for portable equipment)                                                                                         |
| <input type="checkbox"/>                              | Battery charging device                                                                                                               |
| <input checked="" type="checkbox"/>                   | External Power Supply or AC/DC adapter                                                                                                |
| <input checked="" type="checkbox"/>                   | Test Jig or interface box                                                                                                             |
| <input type="checkbox"/>                              | RF test fixture (for equipment with integrated antennas)                                                                              |
| <input type="checkbox"/>                              | Host System                                                                                                                           |
|                                                       | Manufacturer                                                                                                                          |
|                                                       | Model                                                                                                                                 |
|                                                       | Model Name                                                                                                                            |
| <input type="checkbox"/>                              | Combined equipment                                                                                                                    |
|                                                       | Manufacturer                                                                                                                          |
|                                                       | Model                                                                                                                                 |
|                                                       | Model Name                                                                                                                            |
| <input type="checkbox"/>                              | User Manual                                                                                                                           |
| <input type="checkbox"/>                              | Technical documentation (Handbook and circuit diagrams)                                                                               |

I hereby declare that that the information supplied is correct and complete.

Name: Abdul Wahed Dewan    Position held:    Principal RF Engineer

Date: 27/06/2016



Product Service

| EQUIPMENT DESCRIPTION                                                                           |                                                                                                                                               |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Model Name/Number                                                                               | Minuet/FS5332                                                                                                                                 |
| Part Number                                                                                     | HA-FS5332-xxxxxx (where xxxxxx denotes the customer variant eg HA-FS5332-000001)                                                              |
| Hardware Version                                                                                | Rev6                                                                                                                                          |
| Software Version                                                                                | NS1.0.13                                                                                                                                      |
| FCC ID (if applicable)                                                                          | YYX-FS5332                                                                                                                                    |
| Industry Canada ID (if applicable)                                                              | 11458A-FS5332                                                                                                                                 |
| Technical Description (Please provide a brief description of the intended use of the equipment) | Minuet is a module, which when installed in a consumer audio product enables high-quality audio streaming over Wi-Fi, Bluetooth and Ethernet. |

| INFORMATION REQUIRED                                                                                                                                                                                                                                             |                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Modes:                                                                                                                                                                                                                                                           |                                                |
| <input checked="" type="checkbox"/> 802.11(a)                                                                                                                                                                                                                    | <input checked="" type="checkbox"/> 802.11(ac) |
| <input checked="" type="checkbox"/> 802.11(n)                                                                                                                                                                                                                    |                                                |
| a) The occupied channel bandwidth(s):<br><input checked="" type="checkbox"/> Channel Bandwidth 1: 20MHz <input checked="" type="checkbox"/> Channel Bandwidth 2:40MHz<br><input checked="" type="checkbox"/> Channel Bandwidth 3: 80MHz                          |                                                |
| NOTE: Add more lines if the equipment has more channel Bandwidths.                                                                                                                                                                                               |                                                |
| b) The DFS related operating mode(s) of the equipment:<br><input type="checkbox"/> Master<br><input type="checkbox"/> Slave with radar detection<br><input checked="" type="checkbox"/> Slave without radar detection                                            |                                                |
| NOTE: If the equipment has more than 1 operating mode, tick all that apply.                                                                                                                                                                                      |                                                |
| c) The equipment can operate in ad-hoc mode:<br><input checked="" type="checkbox"/> no ad-hoc operation<br><input type="checkbox"/> ad-hoc operation in the frequency range 5150MHz to 5250MHz without DFS<br><input type="checkbox"/> ad-hoc operation with DFS |                                                |
| NOTE: If more than 1 is applicable, tick all that apply                                                                                                                                                                                                          |                                                |
| d) Operating Frequency Range(s):                                                                                                                                                                                                                                 |                                                |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                              | Range 1: 5150MHz to 5250MHz                    |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                              | Range 2: 5250MHz to 5350MHz                    |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                              | Range 3: 5470MHz to 5725MHz                    |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                              | Range 4: 5725MHz to 5825MHz                    |
| NOTE: If the equipment has more than 1 Operating Frequency Range, tick all that apply.                                                                                                                                                                           |                                                |
| e) TPC feature available: <span style="float: right;"><input checked="" type="checkbox"/> Yes   <input type="checkbox"/> No</span>                                                                                                                               |                                                |



| INFORMATION REQUIRED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 |                                                  |                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--------------------------------------------------|--------------------------------------------------|
| f) If the equipment has a TPC range, the lowest and highest power level (or lowest and highest EIRP level in case of integrated antenna equipment), intended antenna assemblies and corresponding operating frequency range for the TPC range (or for each of the TPC ranges if more than one is implemented).                                                                                                                                                                                                                                                        |                                                                                 |                                                  |                                                  |
| TPC range:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                 |                                                  |                                                  |
| Applicable Frequency Range:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                 |                                                  |                                                  |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 5250MHz to 5350MHz                                                              |                                                  |                                                  |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 5470 MHz to 5725 MHz                                                            |                                                  |                                                  |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | A TPC mechanism is not required for systems with an e.i.r.p of less than 500 mW |                                                  |                                                  |
| DFS Threshold level:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | N/A as EUT is slave without radar detection. dBm |                                                  |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | at the antenna connector                                                        |                                                  | <input type="checkbox"/> in front of the antenna |
| <p>NOTE: For equipment with a maximum EIRP below 200 mW, the DFS threshold level shall be -62 dBm or less, for equipment with an EIRP of 200 mW or above, the DFS threshold level shall be -64 dBm or less.</p> <p>These levels assume a 0 dBi antenna gain. To define the applicable threshold level at the (temporary) antenna connector, the gain of the antenna (in dBi) shall be added to the threshold level. If more than one antenna is intended for this TPC range or power setting, the antenna gain of the antenna with the lowest gain shall be used.</p> |                                                                                 |                                                  |                                                  |
| Power Setting 1:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                 |                                                  |                                                  |
| Applicable Frequency Range: 5150 MHz to 5250 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                 |                                                  |                                                  |
| Conducted Average Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 13 dBm                                                                          | Average EIRP                                     | 17.6 dBm                                         |
| Power Setting 2:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                 |                                                  |                                                  |
| Applicable Frequency Range: 5250 MHz to 5350 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                 |                                                  |                                                  |
| Conducted Average Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 13 dBm                                                                          | Average EIRP                                     | 17.6 dBm                                         |
| Power Setting 3:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                 |                                                  |                                                  |
| Applicable Frequency Range: 5470 MHz to 5725MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                 |                                                  |                                                  |
| Conducted Average Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 13 dBm                                                                          | Average EIRP                                     | 17.6 dBm                                         |
| Power Setting 4:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                 |                                                  |                                                  |
| Applicable Frequency Range: 5725 MHz to 5825MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                 |                                                  |                                                  |
| Conducted Average Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 13 dBm                                                                          | Average EIRP                                     | 17.6 dBm                                         |
| Table 3: Intended Antenna Assemblies                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 |                                                  |                                                  |
| Antenna Assembly name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                 | Antenna Gain (dBi)                               |                                                  |
| SW700M (SW750M)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                 | 4.6                                              |                                                  |
| RFPCA431223IMLB301                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                 | 4.3                                              |                                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                 |                                                  |                                                  |



Product Service

| INFORMATION REQUIRED                                                                        |                                        |
|---------------------------------------------------------------------------------------------|----------------------------------------|
| h) The extreme operating temperature range that apply to the equipment:                     |                                        |
| Please state conditions of normal operation as specified in the users manual: 0 °C to 70 °C |                                        |
| <u>Supply Voltage:</u>                                                                      |                                        |
| <input type="checkbox"/>                                                                    | AC mains. State AC voltage             |
| <input checked="" type="checkbox"/>                                                         | DC. State DC voltage                   |
| <input type="checkbox"/>                                                                    | State DC current                       |
| In case of DC, indicate the type of power source:                                           |                                        |
| <input type="checkbox"/>                                                                    | Internal Power Supply                  |
| <input checked="" type="checkbox"/>                                                         | External Power Supply or AC/DC adapter |
| <input type="checkbox"/>                                                                    | Battery Nickel Cadmium                 |
| <input type="checkbox"/>                                                                    | Alkaline                               |
| <input type="checkbox"/>                                                                    | Nickel-Metal Hydride                   |
| <input type="checkbox"/>                                                                    | Lithium-Ion                            |
| <input type="checkbox"/>                                                                    | Lead acid (Vehicle regulated)          |
| <input type="checkbox"/>                                                                    | Other (please specify):                |

| ADDITIONAL INFORMATION PROVIDED BY THE SUBMITTER                            |                                         |                                        |         |
|-----------------------------------------------------------------------------|-----------------------------------------|----------------------------------------|---------|
| a) Modulation:                                                              |                                         |                                        |         |
| Continuous duty                                                             | <input type="checkbox"/> Yes            | <input checked="" type="checkbox"/> No |         |
| Can the transmitter operate un-modulated?                                   | <input type="checkbox"/> Yes            | <input checked="" type="checkbox"/> No |         |
| b) Duty Cycle                                                               |                                         |                                        |         |
| Is transmitter intended for :                                               |                                         |                                        |         |
| Continuous duty                                                             | <input type="checkbox"/> Yes            | <input checked="" type="checkbox"/> No |         |
| Intermittent duty only                                                      | <input checked="" type="checkbox"/> Yes | <input type="checkbox"/> No            |         |
| If intermittent duty state DUTY CYCLE                                       |                                         |                                        |         |
| Transmitter ON                                                              | Seconds                                 | Transmitter OFF                        | Seconds |
| <input type="checkbox"/> Continuous operation possible for testing purposes |                                         |                                        |         |
| Details:                                                                    |                                         |                                        |         |

I hereby declare that that the information supplied is correct and complete.

Name: Abdul Wahed Dewan Position held: RF Principal Engineer

Date: 11/07/2016



Product Service

## **1.4 PRODUCT INFORMATION**

### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Frontier Silicon Ltd Minuet/FS5332. A full technical description can be found in the manufacturer's documentation.

## **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 5.00 V DC supply.

FCC Measurement Facility Registration Number  
90987 Octagon House, Fareham Test Laboratory

Industry Canada Company Address Code  
IC2932B-1 Octagon House, Fareham Test Laboratory

## **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard were made during testing.

## **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC and Industry Canada Testing of the  
Frontier Silicon Ltd Minuet/FS5332  
In accordance with FCC 47 CFR Part 15, Industry Canada RSS-247  
and Industry Canada RSS-GEN



Product Service

## **2.1 AC LINE CONDUCTED EMISSIONS**

### **2.1.1 Specification Reference**

FCC 47 CFR Part 15, Clause 15.207  
Industry Canada RSS-GEN, Clause 8.8

### **2.1.2 Equipment Under Test and Modification State**

Minuet/FS5332 S/N: RAD108621 (Module) & RAD108181 (Platform) - Modification State 0

### **2.1.3 Date of Test**

5 July 2016

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Test Procedure**

The test was performed in accordance with ANSI C63.10, Clause 6.2 and RSS-GEN Clause 8.8.

#### Remarks

A mains supply cable of 1 m length was used to supply mains power to the EUT from the LISN.

The test was performed with Bluetooth and 5 GHz transmitters operating at the same time. Bluetooth channel 2441 MHz using packet type DH5 and 5 GHz WLAN channel 5500 MHz using data rate 6 Mbps were used to do this.

All final measurements were assessed against the limits in FCC 47 CFR Part 15, Clause 15.207 and RSS-GEN, Clause 8.8.

### **2.1.6 Environmental Conditions**

|                     |        |
|---------------------|--------|
| Ambient Temperature | 22.1°C |
| Relative Humidity   | 45.0%  |




## 2.1.7 Test Results

### Bluetooth and RLAN Simultaneous Transmission, Live Line, AC Line Conducted Emissions Result

| Frequency (MHz) | QP Level (dBuV) | QP Limit (dBuV) | QP Margin (dBuV) | AV Level (dBuV) | AV Limit (dBuV) | AV Margin (dBuV) |
|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|
| 0.150           | 40.1            | 66.0            | -25.9            | 24.9            | 56.0            | -31.1            |
| 0.166           | 39.5            | 65.2            | -25.7            | 25.7            | 55.2            | -29.4            |
| 0.200           | 34.1            | 63.6            | -29.5            | 20.4            | 53.6            | -33.2            |
| 0.252           | 29.1            | 61.7            | -32.6            | 16.6            | 51.7            | -35.1            |
| 0.545           | 35.3            | 56.0            | -20.7            | 30.4            | 46.0            | -15.6            |
| 6.550           | 25.1            | 60.0            | -34.9            | 16.4            | 50.0            | -33.6            |

### Bluetooth and RLAN Simultaneous Transmission, Live Line, AC Line Conducted Emissions Plot

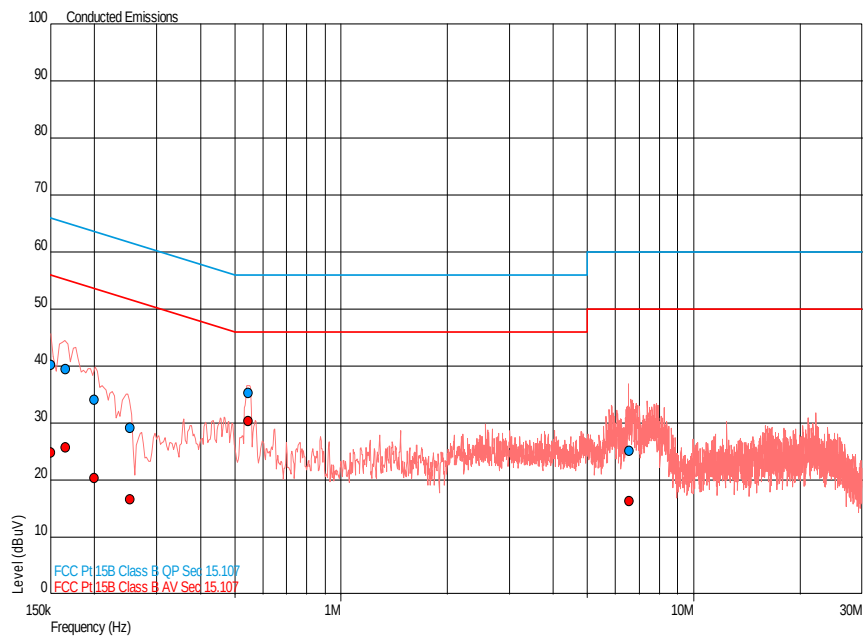




Product Service

### Bluetooth and RLAN Simultaneous Transmission, Neutral Line, AC Line Conducted Emissions Result

| Frequency (MHz) | QP Level (dBuV) | QP Limit (dBuV) | QP Margin (dBuV) | AV Level (dBuV) | AV Limit (dBuV) | AV Margin (dBuV) |
|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|
| 0.151           | 38.2            | 65.9            | -27.8            | 23.9            | 55.9            | -32.1            |
| 0.169           | 38.7            | 65.0            | -26.3            | 25.5            | 55.0            | -29.6            |
| 0.216           | 31.2            | 63.0            | -31.8            | 18.6            | 53.0            | -34.4            |
| 0.542           | 33.2            | 56.0            | -22.8            | 31.4            | 46.0            | -14.6            |
| 0.759           | 23.3            | 56.0            | -32.7            | 16.1            | 46.0            | -29.9            |
| 6.890           | 25.8            | 60.0            | -34.2            | 17.5            | 50.0            | -32.5            |

### Bluetooth and RLAN Simultaneous Transmission, Neutral Line, AC Line Conducted Emissions Plot

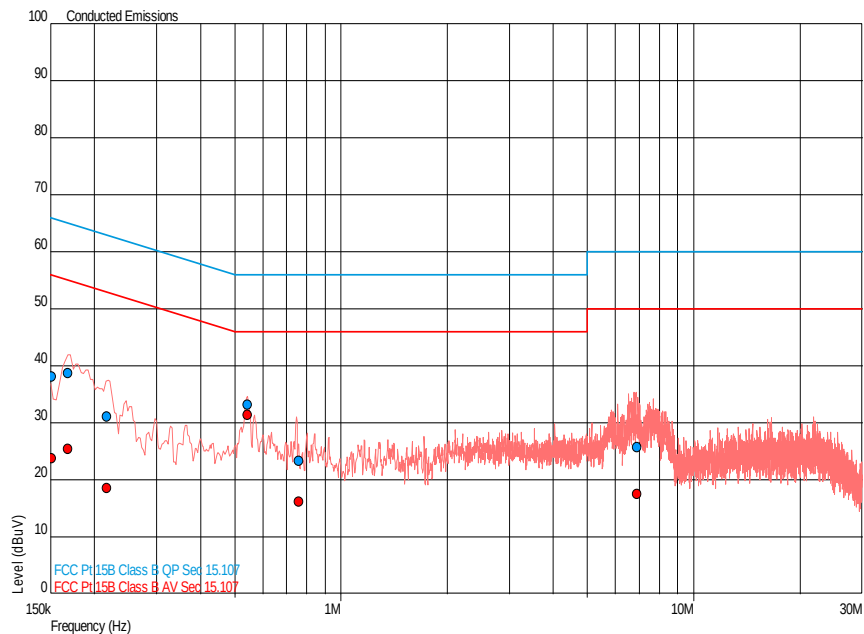



Product Service

FCC 47 CFR Part 15, Limit Clause 15.207

| Frequency of Emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-Peak             | Average   |
| 0.15 to 0.5                 | 66 to 56*              | 56 to 46* |
| 0.5 to 5                    | 56                     | 46        |
| 5 to 30                     | 60                     | 50        |

\*Decreases with the logarithm of the frequency.

Industry Canada RSS-GEN, Limit Clause 8.8

| Frequency of Emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-Peak             | Average   |
| 0.15 to 0.5                 | 66 to 56*              | 56 to 46* |
| 0.5 to 5                    | 56                     | 46        |
| 5 to 30                     | 60                     | 50        |

\*Decreases with the logarithm of the frequency.



Product Service

## **2.2 SPURIOUS RADIATED EMISSIONS**

### **2.2.1 Specification Reference**

FCC 47 CFR Part 15, Clause 15.407 (b), 15.205, 15.209 and 15.247 (d)  
Industry Canada RSS-247, Clause 6.2

### **2.2.2 Equipment Under Test and Modification State**

Minuet/FS5332 S/N: RAD108624 (Module), RAD108703 (Platform) and RAD108757 (Adaptor Board) - Modification State 0

### **2.2.3 Date of Test**

10 July 2016

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Test Procedure**

This test was performed in accordance with KDB 789033 D02 v01, Section II clause G1, G.2, G.3, G.4, G.5, G.6d Method VB and Industry Canada RSS-GEN, clause 6.13, 8.9 and 8.10.

#### Remarks

The test was performed with Bluetooth and 5 GHz transmitters operating at the same time. Bluetooth channel 2441 MHz using packet type DH5 and 5 GHz WLAN channel 5500 MHz using data rate 6 Mbps were used to do this.

### **2.2.6 Environmental Conditions**

|                     |        |
|---------------------|--------|
| Ambient Temperature | 20.8°C |
| Relative Humidity   | 65.0%  |




## 2.2.7 Test Results

5.00 V DC Supply

### Bluetooth and RLAN Simultaneous Transmission, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

| Frequency (MHz) | QP Level (dB $\mu$ V/m) | QP Margin (dB $\mu$ V/m) | QP Level ( $\mu$ V/m) | QP Margin ( $\mu$ V/m) | Angle (°) | Height (m) | Polarisation |
|-----------------|-------------------------|--------------------------|-----------------------|------------------------|-----------|------------|--------------|
| 30.165          | 30.1                    | -9.9                     | 32.0                  | -68.0                  | 360       | 1.00       | Horizontal   |
| 32.416          | 29.3                    | -10.7                    | 29.2                  | -70.8                  | 335       | 3.62       | Horizontal   |
| 120.000         | 28.4                    | -15.1                    | 26.3                  | -123.7                 | 264       | 1.00       | Vertical     |
| 319.474         | 34.8                    | -11.2                    | 55.0                  | -145.0                 | 214       | 1.00       | Horizontal   |
| 368.649         | 35.6                    | -10.4                    | 60.3                  | -139.7                 | 65        | 1.00       | Horizontal   |
| 393.217         | 35.9                    | -10.1                    | 62.4                  | -137.6                 | 70        | 2.24       | Horizontal   |
| 960.000         | 41.2                    | -4.8                     | 114.8                 | -85.2                  | 31        | 1.00       | Horizontal   |

### Bluetooth and RLAN Simultaneous Transmission, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

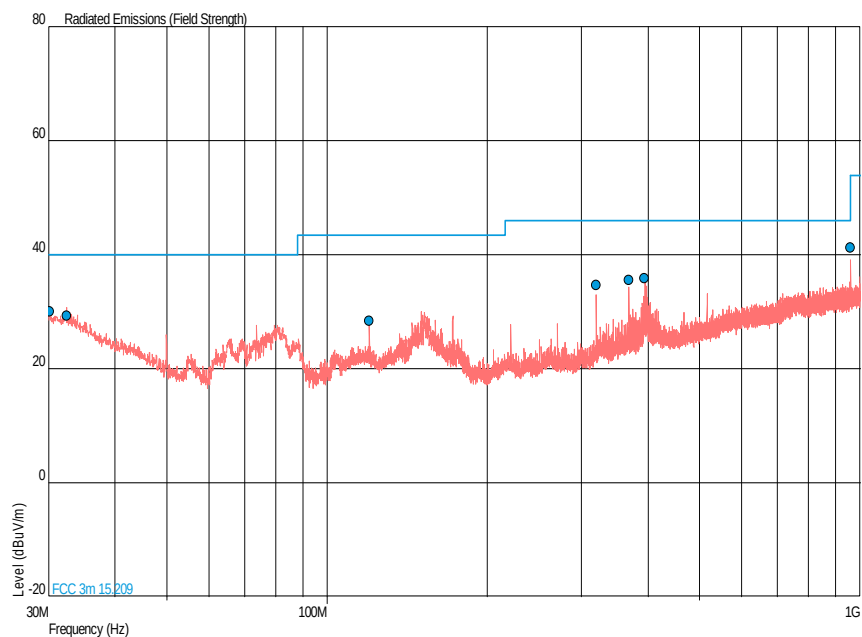




Product Service

Bluetooth and RLAN Simultaneous Transmission, 1 GHz to 40 GHz, Spurious Radiated Emissions Results

| Frequency (MHz) | Final Peak (dBµV/m) | Final Average (dBµV/m) | Final Peak (µV/m) | Final Average (µV/m) | Angle (°) | Height (m) | Polarisation |
|-----------------|---------------------|------------------------|-------------------|----------------------|-----------|------------|--------------|
| *               |                     |                        |                   |                      |           |            |              |

\*No emissions were detected within 10 dB of the limit.

Bluetooth and RLAN Simultaneous Transmission, 1 GHz to 7 GHz, Spurious Radiated Emissions Plot

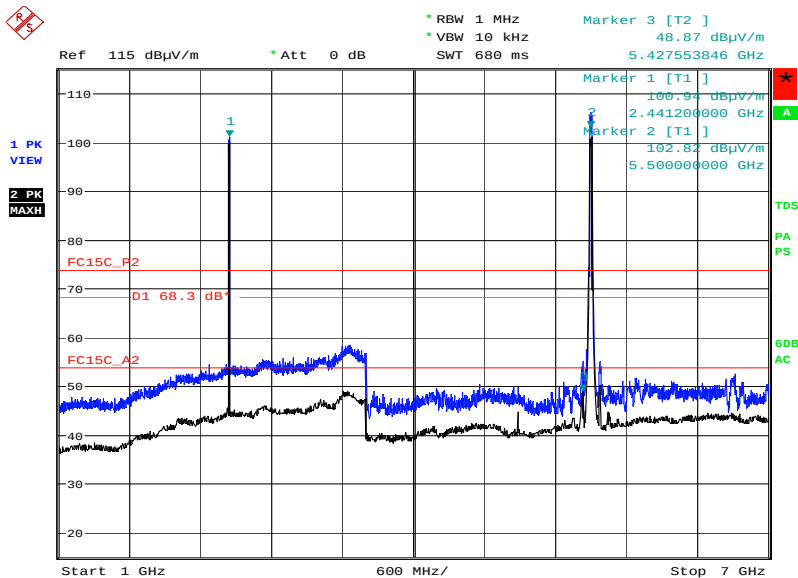


Date: 10.JUL.2016 19:59:04




Product Service

Bluetooth and RLAN Simultaneous Transmission, 7 GHz to 8 GHz, Spurious Radiated Emissions Plot

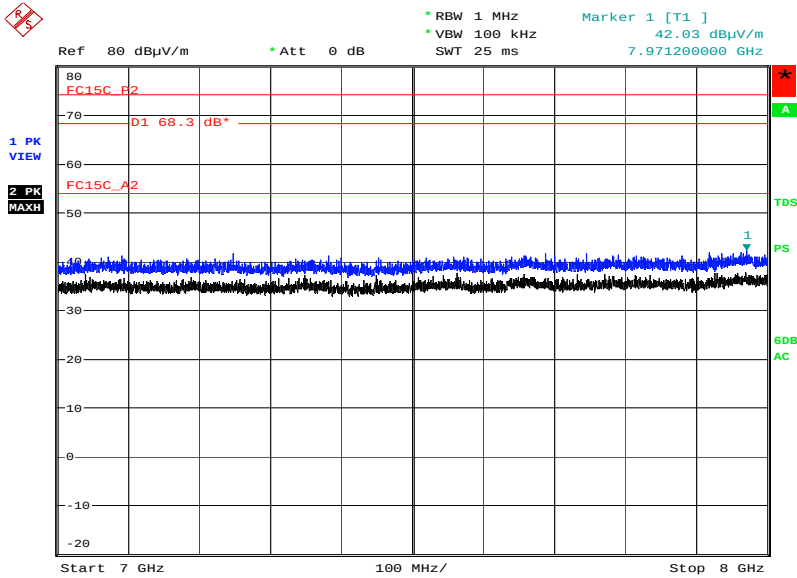

Date: 10.JUL.2016 20:38:26

Bluetooth and RLAN Simultaneous Transmission, 8 GHz to 18 GHz, Spurious Radiated Emissions Plot

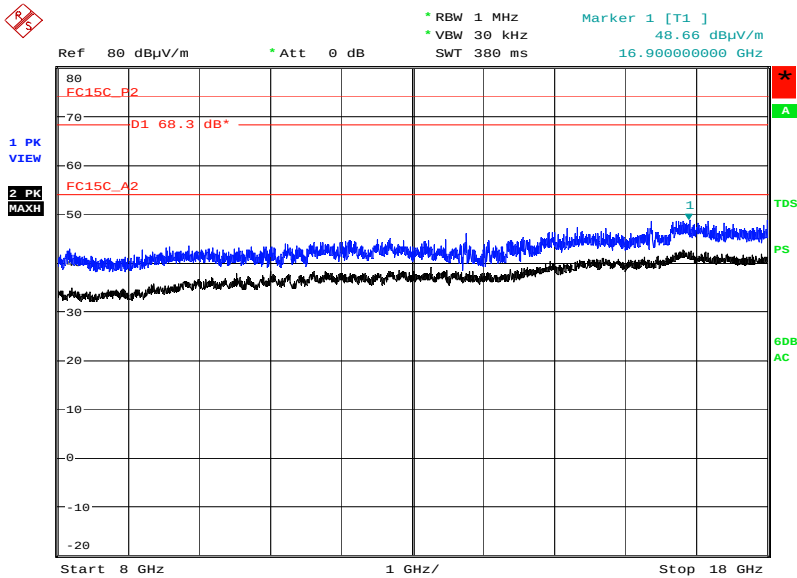


Date: 10.JUL.2016 20:54:26



Product Service

Bluetooth and RLAN Simultaneous Transmission, 18 GHz to 40 GHz, Spurious Radiated Emissions Plot

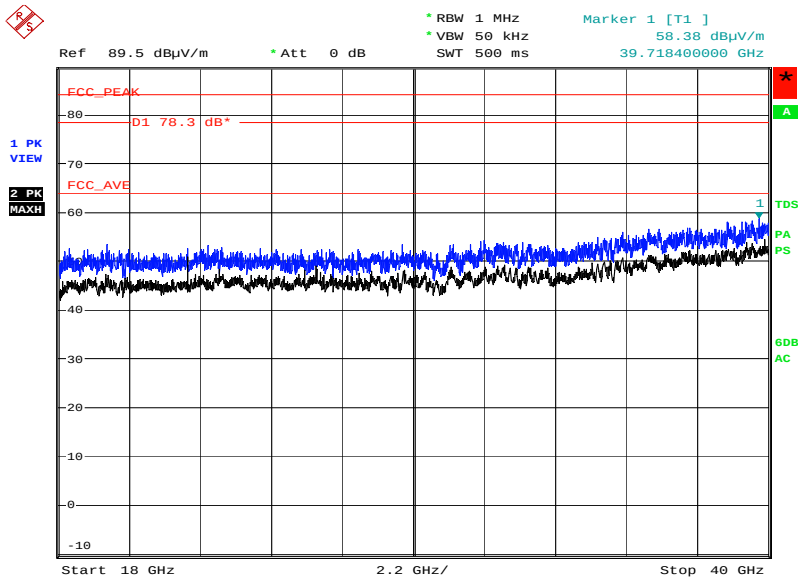

Date: 10.JUL.2016 21:42:15

FCC 47 CFR Part 15, Limit Clause 15.407 (b)(1)(2)(3)(4)(6)(7)

|                                                           |             |
|-----------------------------------------------------------|-------------|
| Outside the 5.15 GHz to 5.35 GHz band                     | -27 dBm/MHz |
| Outside the 5.25 GHz to 5.35 GHz band                     | -27 dBm/MHz |
| Outside the 5.47 GHz to 5.725 GHz band                    | -27 dBm/MHz |
| 5.715 GHz to 5.725 GHz and<br>5.850 GHz to 5.860 GHz band | -17 dBm/MHz |
| Outside the 5.715 GHz to 5.860 GHz band                   | -27 dBm/MHz |

FCC 47 CFR Part 15, Limit Clause 15.205

|                               |               |                  |
|-------------------------------|---------------|------------------|
|                               | Peak (dBμV/m) | Average (dBμV/m) |
| Restricted Bands of Operation | 74            | 54               |

FCC 47 CFR Part 15, Limit Clause 15.209

| Frequency (MHz) | Field Strength |                  |               | Measurement Distance (m) |
|-----------------|----------------|------------------|---------------|--------------------------|
|                 | (μV/m)         | Average (dBμV/m) | Peak (dBμV/m) |                          |
| 30-88           | 100            | 40.0             | 60.0          | 3                        |
| 88-216          | 150            | 43.5             | 63.5          | 3                        |
| 216-960         | 200            | 46.0             | 66.0          | 3                        |
| Above 960       | 500            | 54.0             | 74.0          | 3                        |

Industry Canada RSS-247, Limit Clause 6.2

|                                                           |             |
|-----------------------------------------------------------|-------------|
| Outside the 5.15 GHz to 5.35 GHz band                     | -27 dBm/MHz |
| Outside the 5.25 GHz to 5.35 GHz band                     | -27 dBm/MHz |
| Outside the 5.47 GHz to 5.725 GHz band                    | -27 dBm/MHz |
| 5.715 GHz to 5.725 GHz and<br>5.850 GHz to 5.860 GHz band | -17 dBm/MHz |
| Outside the 5.715 GHz to 5.860 GHz band                   | -27 dBm/MHz |

Industry Canada RSS-GEN, Limit Clause 8.9

| Frequency (MHz) | Field Strength |                  |               | Measurement Distance (m) |
|-----------------|----------------|------------------|---------------|--------------------------|
|                 | (μV/m)         | Average (dBμV/m) | Peak (dBμV/m) |                          |
| 30-88           | 100            | 40.0             | 60.0          | 3                        |
| 88-216          | 150            | 43.5             | 63.5          | 3                        |
| 216-960         | 200            | 46.0             | 66.0          | 3                        |
| Above 960       | 500            | 54.0             | 74.0          | 3                        |

Industry Canada RSS-GEN, Limit Clause 8.10

|                               |               |                  |
|-------------------------------|---------------|------------------|
|                               | Peak (dBμV/m) | Average (dBμV/m) |
| Restricted Bands of Operation | 74            | 54               |



Product Service

## **SECTION 3**

### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| Instrument                                       | Manufacturer             | Type No.               | TE No. | Calibration Period (months) | Calibration Due |
|--------------------------------------------------|--------------------------|------------------------|--------|-----------------------------|-----------------|
| <b>Section 2.1 – AC Line Conducted Emissions</b> |                          |                        |        |                             |                 |
| LISN                                             | Rohde & Schwarz          | ESH2-Z5                | 17     | 12                          | 11-Feb-2017     |
| Multimeter                                       | Iso-tech                 | IDM-101                | 466    | 12                          | 11-Sep-2016     |
| Hygrometer                                       | Rotronic                 | A1                     | 1388   | 12                          | 13-Apr-2017     |
| Screened Room (5)                                | Rainford                 | Rainford               | 1545   | 36                          | 20-Dec-2017     |
| Transient Limiter                                | Hewlett Packard          | 11947A                 | 2377   | 12                          | 16-Feb-2017     |
| EMI Test Receiver                                | Rohde & Schwarz          | ESU40                  | 3506   | 12                          | 2-Nov-2016      |
| 7m Armoured RF Cable                             | SSI Cable Corp.          | 1501-13-13-7m WA(-)    | 3600   | -                           | TU              |
| <b>Section 2.2 - Spurious Radiated Emissions</b> |                          |                        |        |                             |                 |
| Antenna 18-40GHz (Double Ridge Guide)            | Link Microtek Ltd        | AM180HA-K-TU2          | 230    | 24                          | 12-Feb-2018     |
| Antenna (Double Ridge Guide, 1GHz-18GHz)         | EMCO                     | 3115                   | 234    | 12                          | 29-Apr-2017     |
| Multimeter                                       | Iso-tech                 | IDM-101                | 466    | 12                          | 11-Sep-2016     |
| Hygrometer                                       | Rotronic                 | A1                     | 1388   | 12                          | 13-Apr-2017     |
| Antenna 18-40GHz (Double Ridge Guide)            | Q-Par Angus Ltd          | QSH 180K               | 1511   | 24                          | 27-Nov-2016     |
| Pre-Amplifier                                    | Phase One                | PS04-0086              | 1533   | 12                          | 30-Jul-2016     |
| 18GHz - 40GHz Pre-Amplifier                      | Phase One                | PSO4-0087              | 1534   | 12                          | 23-Dec-2016     |
| Screened Room (5)                                | Rainford                 | Rainford               | 1545   | 36                          | 20-Dec-2017     |
| Turntable Controller                             | Inn-Co GmbH              | CO 1000                | 1606   | -                           | TU              |
| Hygrometer                                       | Rotronic                 | A1                     | 2138   | 12                          | 9-Dec-2016      |
| Cable (2m)                                       | Rosenberger              | FA147A2020002020       | 2195   | 12                          | 19-Aug-2016     |
| Multimeter                                       | Iso-tech                 | IDM101                 | 2417   | 12                          | 29-Sep-2016     |
| Filter (Hi Pass)                                 | Lorch                    | 9HP7-7000-SR           | 2833   | 12                          | 5-Feb-2017      |
| Antenna (Bilog)                                  | Chase                    | CBL6143                | 2904   | 24                          | 11-Jun-2017     |
| Compliance 5 Emissions                           | Schaffner                | C5e Software V.5.00.00 | 3275   | -                           | N/A - Software  |
| EMI Test Receiver                                | Rohde & Schwarz          | ESU40                  | 3506   | 12                          | 2-Nov-2016      |
| 9m RF Cable (N Type)                             | Rhophase                 | NPS-2303-9000-NPS      | 3791   | -                           | TU              |
| Tilt Antenna Mast                                | mature GmbH              | TAM 4.0-P              | 3916   | -                           | TU              |
| Mast Controller                                  | mature GmbH              | NCD                    | 3917   | -                           | TU              |
| Cable 1503 2M 2.92(P)m 2.92(P)m                  | Rhophase                 | KPS-1503A-2000-KPS     | 4293   | 12                          | O/P MON         |
| 1GHz to 8GHz Low Noise Amplifier                 | Wright Technologies      | APS04-0085             | 4365   | 12                          | 6-Oct-2016      |
| Suspended Substrate Highpass Filter              | Advance Power Components | 11SH10-3000/X18000-O/O | 4411   | 12                          | 23-Mar-2017     |
| Cable (Yellow, Rx, Km-Km 2m)                     | Scott Cables             | KPS-1501-2000-KPS      | 4527   | -                           | TU              |
| Double Ridged Waveguide Horn Antenna             | ETS-Lindgren             | 3117                   | 4722   | 12                          | 29-Dec-2016     |

TU – Traceability Unscheduled

O/P MON – Output Monitored



Product Service

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

| Test Discipline             | MU                                                             |
|-----------------------------|----------------------------------------------------------------|
| AC Line Conducted Emissions | $\pm 3.2$ dB                                                   |
| Spurious Radiated Emissions | 30 MHz to 1 GHz: $\pm 5.1$ dB<br>1 GHz to 40 GHz: $\pm 6.3$ dB |



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service