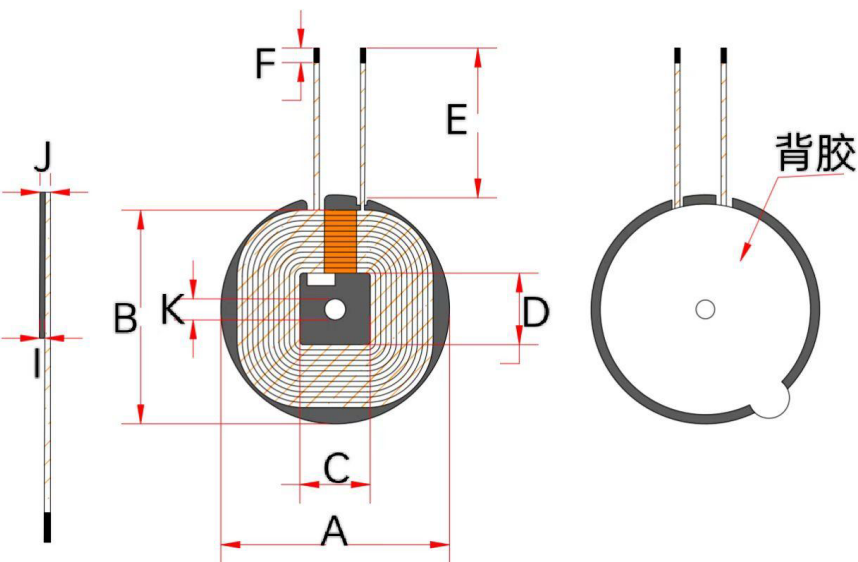
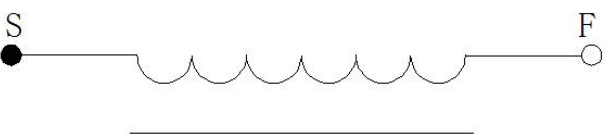


SPECIFICATION

產品型號: DESC	G50*0.8-18.6*18.6-0.08*105P-12TS-10UH-L40MM+BJ	版本 Rev: A.0	客戶 CUST:	
			客户料号 CUST P/N:	

一、尺寸 DIMENSION:(mm) 		A	50±0.5
		B	45±0.5
		C	18.6±0.5
		D	18.6±0.5
		E	40±0.5
		F	3±2
		K	5.3±0.5
		J	2.5±0.1
		I	0.8±0.05
二、原理图 SCHEMATIC DIAGRAM: 		注: 1. 线圈贴 50 双槽磁片, 磁片尺寸 50±0.5mm,厚度为 0.8±0.05mm. 2.磁片背面贴背胶	

三、绕线参数 Winding Specification:				
序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.08*105P	12Ts

四、电气特性 ELECTRICAL CHARACTERISTICS: 温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	5.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	10uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤60m Ω		LCZ METER 502B
拟制/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE		