


LABEL LOCATION

Brand name : Edge-coreE

Model name : ECWO7220-L

Edge-coreE NETWORKS	cUL US LISTED I.T.E. E141136	 RoHS
Model Name : ECWO7220-L Input Voltage Range : 48V  0.64A FCC ID : YZKECWO7220L FCC CLASS B	CE  FC 	
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.		
Made in XXXXX	24600000XXXXA R01	

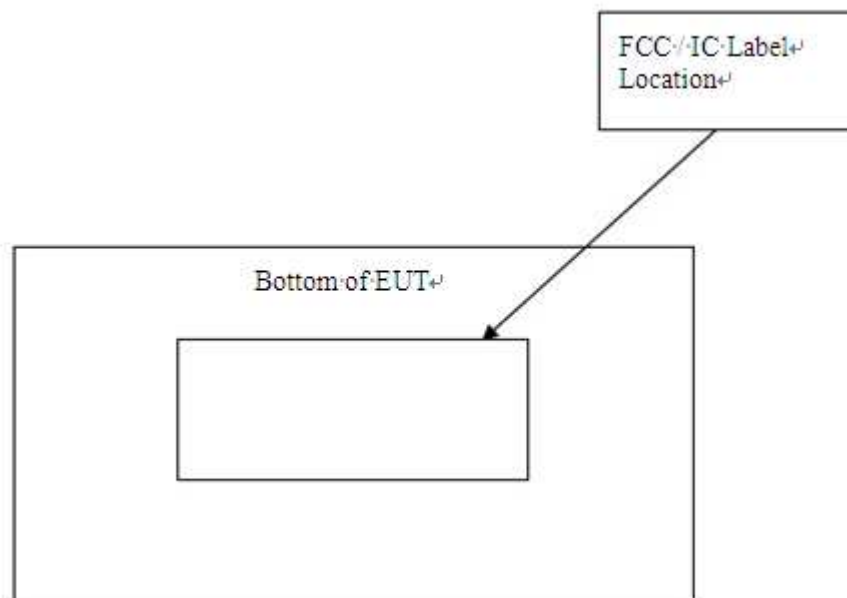


① 印刷顏色:黑色

Decided by import & export country
For example:

- 印刷廠商代號 (Vender ID) : (CSA 要求標示)

Decided by Vender

A diagram showing a rectangular area defined by a horizontal line and a vertical line intersecting at a point. The horizontal line extends to the left and right of the intersection, and the vertical line extends above and below it. A dimension line with arrows at both ends is positioned above the horizontal line, spanning from the vertical line to the left edge of the frame, with the value "60.0" written above it. Another dimension line with arrows at both ends is positioned to the left of the vertical line, spanning from the horizontal line to the bottom edge of the frame, with the value "30.0" written to its left.

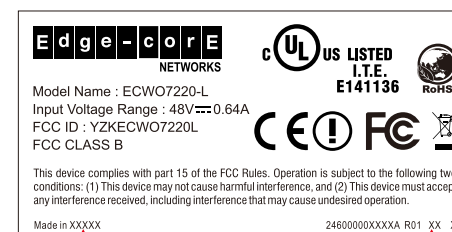

MFG Factory
(Arial Narrow, Point 4)

MFG Country
(Arial Narrow, Point 4)

Vender ID
(Arial Narrow, Point 4)

Modification		Card Paper / Top lineboard				Corrugate list				Cardboard Die Cut Legend				Unspecialized Die Cut Tolerance = +/- 0.3 mm					PE Bag (A Degree)		Clear		Pink		Label list		(Total Thickness = mm±10%)		Comply with RoHS			Accton TECHNOLOGY CORP.							
1	2	Paper GSM	CCNB	SBS	Double SBS	Flute (A Degree)	Single wall	Double wall	GSM (mm/line)	Bursting Strength	End Crush	(C1) Cutting Line	(C1) Crease Line	(PBL) Partial Blunt Line	(SO) Slit-score Line	(SL) Slit Line	Flute Direction	Weight/g-s	Thickness/mm	Draft Angle	Hydrous %	Recycle Kraft 80% + Newspaper 20%	PE Foam Density (kg / m³)	White	Pink	Other	Material	& Thickness	Adhesive (Except all leds in FP label)	Others			Part No.	REV. 01					
3	250					A/C	Taiwan	230 X 180 X 230		16	33.6									3°	7-14%						Art paper	0.025mm / 25# / 1mil	Acrylic	T=0.022mm	Material Spec:			UL LABEL OAP1122B-0614-EC					
4	280					B	China	250 X 150 X 250		14	26.2																✓ Metalized	✓ 0.050mm / 50# / 2mil	✓ Acrylic Ul approved	T=0.022mm	IQC Inspect Color			Description:					
5	300					E	Taiwan	230 X 100 X 230		14	22.5																White Polyester	0.076mm / 75# / 3mil	"R" Adhesive	T=0.022mm	Please refer to			UNIT			SCALE 1 / 1	SIZE A3	
6	310					AB	Taiwan	230X100X100X100X230		18	37.1																(PP)Pepa paper	0.178mm / 7mil	Water Adhesive	T=0.022mm	Approve			Melody	MAR21'16	Sheet 1 of 1			
7	340					BC	China	250X100X100X150X250		18	37.1																PC 8B35	0.254mm / 10mil	3M 467	T=0.05mm / 2mil	Check			MM (IN)			Outside View		
	350					A/C	Taiwan	220 X 100 X 200		14	28.5																Other	0.500mm / 20mil	3M 7945	T=0.127mm / 5mil	Design			Carry	MAR21'16				
This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.		Coated	UV	T ₁ 0.15	Air Constant Vaneless	White	E	Taiwan	220 X 100 X 200		12	18.6																PP Film	✓ LF (T = 0.045mm)	DF (T = 0.035mm)									
		PP Film	LF	DF			AB	Taiwan	230X100X100X100X230		18	37.1																											