

FCC

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**DECT Cordless VoIP Phone**

ISSUED TO  
Grandstream Networks, Inc.

126 Brookline Ave, 3rd Floor Boston, MA 02215, USA



Tested by: Hu Chao  
Hu Chao  
(Engineer)  
Date: Feb. 09, 2018

Approved by: Wei Yanquan  
Wei Yanquan  
(Chief Engineer)  
Date: Feb. 09, 2018

Report No.: BL-SZ17C0361-601  
EUT Name: DECT Cordless VoIP Phone  
Model Name: DP720 (Handset Unit)  
Brand Name: Grandstream  
Test Standard: FCC Part 15, subpart D  
FCC ID: YZZ-DP720

Test conclusion: Pass  
Test Date: Dec. 27, 2017 ~ Feb. 09, 2018  
Date of Issue: Feb. 09, 2018

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*

### Revision History

| Version        | Issue Date           | Revisions Content                                                                            |
|----------------|----------------------|----------------------------------------------------------------------------------------------|
| <u>Rev. 01</u> | <u>Jan. 31, 2018</u> | <u>Initial Issue</u>                                                                         |
| <u>Rev. 02</u> | <u>Feb. 09, 2018</u> | <u>Revise the channel 0 frequency on page 9, update the test data of in-band on page 50.</u> |

## TABLE OF CONTENTS

|       |                                                          |    |
|-------|----------------------------------------------------------|----|
| 1     | ADMINISTRATIVE DATA (GENERAL INFORMATION) .....          | 7  |
| 1.1   | Identification of the Testing Laboratory .....           | 7  |
| 1.2   | Identification of the Responsible Testing Location ..... | 7  |
| 1.3   | Laboratory Condition .....                               | 7  |
| 1.4   | Announce .....                                           | 7  |
| 2     | PRODUCT INFORMATION .....                                | 8  |
| 2.1   | Applicant Information .....                              | 8  |
| 2.2   | Manufacturer Information .....                           | 8  |
| 2.3   | Factory Information .....                                | 8  |
| 2.4   | Ancillary Equipment .....                                | 8  |
| 2.5   | Technical Information .....                              | 9  |
| 2.6   | General Description for Equipment under Test (EUT) ..... | 9  |
| 3     | SUMMARY OF TEST RESULTS .....                            | 10 |
| 3.1   | Test Standards .....                                     | 10 |
| 3.2   | Verdict .....                                            | 11 |
| 4     | GENERAL TEST CONFIGURATIONS .....                        | 12 |
| 4.1   | Test Environments .....                                  | 12 |
| 4.2   | Test Equipment List .....                                | 12 |
| 4.3   | Measurement Uncertainty .....                            | 13 |
| 4.4   | Description of Test Setup .....                          | 13 |
| 4.4.1 | For Antenna Port Test .....                              | 13 |
| 4.4.2 | For AC Power Supply Port Test .....                      | 14 |
| 4.4.3 | For Radiated Test (Below 30 MHz) .....                   | 14 |
| 4.4.4 | For Radiated Test (30 MHz-1 GHz) .....                   | 15 |

|       |                                              |    |
|-------|----------------------------------------------|----|
| 4.4.5 | For Radiated Test (Above 1 GHz).....         | 15 |
| 4.5   | Measurement Results Explanation Example..... | 16 |
| 4.5.1 | For conducted test items: .....              | 16 |
| 5     | TEST ITEMS.....                              | 17 |
| 5.1   | Antenna Requirements.....                    | 17 |
| 5.1.1 | Relevant Standards .....                     | 17 |
| 5.1.2 | Antenna Anti-Replacement Construction .....  | 17 |
| 5.1.3 | Antenna Gain .....                           | 17 |
| 5.2   | Conducted Emission .....                     | 18 |
| 5.2.1 | Limit.....                                   | 18 |
| 5.2.2 | Test Setup .....                             | 18 |
| 5.2.3 | Test Procedure .....                         | 18 |
| 5.2.4 | Test Result .....                            | 18 |
| 5.3   | Peak transmit power.....                     | 19 |
| 5.3.1 | Test Limit.....                              | 19 |
| 5.3.2 | Test Setup .....                             | 19 |
| 5.3.3 | Test Procedure .....                         | 19 |
| 5.3.4 | Test Result .....                            | 19 |
| 5.4   | Power Spectral density (PSD).....            | 20 |
| 5.4.1 | Limit.....                                   | 20 |
| 5.4.2 | Test Setup .....                             | 20 |
| 5.4.3 | Test Procedure .....                         | 20 |
| 5.4.4 | Test Result .....                            | 20 |
| 5.5   | Emission Bandwidth .....                     | 21 |
| 5.5.1 | Limit.....                                   | 21 |
| 5.5.2 | Test Setup .....                             | 21 |
| 5.5.3 | Test Procedure .....                         | 21 |
| 5.5.4 | Test Result .....                            | 21 |
| 5.6   | Emission Inside and Out the sub-band .....   | 22 |
| 5.6.1 | Limit.....                                   | 22 |
| 5.6.2 | Test Setup .....                             | 22 |
| 5.6.3 | Test Procedure .....                         | 22 |

|        |                                                     |    |
|--------|-----------------------------------------------------|----|
| 5.6.4  | Test Result .....                                   | 22 |
| 5.7    | Carrier Frequency Stability .....                   | 23 |
| 5.7.1  | Limit .....                                         | 23 |
| 5.7.2  | Test Setup .....                                    | 23 |
| 5.7.3  | Test Procedure .....                                | 23 |
| 5.7.4  | Test Result .....                                   | 23 |
| 5.8    | Frame repetition Stability, period and jitter ..... | 24 |
| 5.8.1  | Requirements .....                                  | 24 |
| 5.8.2  | Test Setup .....                                    | 24 |
| 5.8.3  | Test Procedure .....                                | 24 |
| 5.8.4  | Test Result .....                                   | 24 |
| 5.9    | Monitoring the time .....                           | 25 |
| 5.9.1  | Limit .....                                         | 25 |
| 5.9.2  | Test Setup .....                                    | 25 |
| 5.9.3  | Test Procedure .....                                | 25 |
| 5.9.4  | Test Result .....                                   | 25 |
| 5.10   | Monitoring threshold .....                          | 26 |
| 5.10.1 | Limit .....                                         | 26 |
| 5.10.2 | Test Setup .....                                    | 26 |
| 5.10.3 | Test Procedure .....                                | 26 |
| 5.10.4 | Test Result .....                                   | 26 |
| 5.11   | Maximum transmit period .....                       | 27 |
| 5.11.1 | Limit .....                                         | 27 |
| 5.11.2 | Test Setup .....                                    | 27 |
| 5.11.3 | Test Procedure .....                                | 27 |
| 5.11.4 | Test Result .....                                   | 27 |
| 5.12   | Acknowledgment system .....                         | 28 |
| 5.12.1 | Limit .....                                         | 28 |
| 5.12.2 | Test Setup .....                                    | 28 |
| 5.12.3 | Test Procedure .....                                | 28 |
| 5.12.4 | Test Result .....                                   | 28 |
| 5.13   | Least Interfered Channel, LIC .....                 | 29 |

|        |                                              |    |
|--------|----------------------------------------------|----|
| 5.13.1 | Limit .....                                  | 29 |
| 5.13.2 | Test Setup .....                             | 29 |
| 5.13.3 | Test Procedure .....                         | 29 |
| 5.13.4 | Test Result .....                            | 29 |
| 5.14   | Random waiting .....                         | 30 |
| 5.14.1 | Limit .....                                  | 30 |
| 5.14.2 | Test Setup .....                             | 30 |
| 5.14.3 | Test Procedure .....                         | 30 |
| 5.14.4 | Test Result .....                            | 30 |
| 5.15   | Monitoring bandwidth and reaction time ..... | 31 |
| 5.15.1 | Limit .....                                  | 31 |
| 5.15.2 | Test Setup .....                             | 31 |
| 5.15.3 | Test Procedure .....                         | 31 |
| 5.15.4 | Test Result .....                            | 31 |
| 5.16   | Monitoring antenna .....                     | 32 |
| 5.16.1 | Limit .....                                  | 32 |
| 5.16.2 | Test Setup .....                             | 32 |
| 5.16.3 | Test Procedure .....                         | 32 |
| 5.16.4 | Test Result .....                            | 32 |
| 5.17   | Duplex system LBT .....                      | 33 |
| 5.17.1 | Limit .....                                  | 33 |
| 5.17.2 | Test Setup .....                             | 33 |
| 5.17.3 | Test Procedure .....                         | 33 |
| 5.17.4 | Test Result .....                            | 33 |
| 5.18   | Co-located device LBT .....                  | 34 |
| 5.18.1 | Limit .....                                  | 34 |
| 5.18.2 | Test Setup .....                             | 34 |
| 5.18.3 | Test Procedure .....                         | 34 |
| 5.18.4 | Test Result .....                            | 34 |
| 5.19   | Fair access .....                            | 35 |
| 5.19.1 | Limit .....                                  | 35 |
| 5.19.2 | Test Setup .....                             | 35 |

|         |                                                     |    |
|---------|-----------------------------------------------------|----|
| 5.19.3  | Test Result .....                                   | 35 |
| 5.20    | Radiated Emission .....                             | 36 |
| 5.20.1  | Limit.....                                          | 36 |
| 5.20.2  | Test Setup .....                                    | 36 |
| 5.20.3  | Test Procedure .....                                | 36 |
| 5.20.4  | Test Result .....                                   | 38 |
| ANNEX A | TEST RESULT .....                                   | 39 |
| A.1     | Conducted Emissions.....                            | 39 |
| A.2     | Peak transmit power.....                            | 45 |
| A.3     | Power Spectral Density (PSD) .....                  | 46 |
| A.4     | Emission bandwidth .....                            | 48 |
| A.5     | Emission Inside and Out the sub-band .....          | 50 |
| A.6     | Carrier Frequency Stability.....                    | 54 |
| A.7     | Frame repetition Stability, period and jitter ..... | 55 |
| A.8     | Monitoring the time.....                            | 55 |
| A.9     | Monitoring threshold.....                           | 56 |
| A.10    | Maximum transmit period .....                       | 56 |
| A.11    | Acknowledgment system.....                          | 56 |
| A.12    | Least Interfered Channel, LIC .....                 | 57 |
| A.13    | Random waiting.....                                 | 57 |
| A.14    | Monitoring bandwidth and reaction time.....         | 58 |
| A.15    | Monitoring antenna.....                             | 58 |
| A.16    | Duplex system LBT .....                             | 59 |
| A.17    | Co-located device LBT .....                         | 59 |
| A.18    | Fair access .....                                   | 59 |
| A.19    | Radiated Emission .....                             | 59 |
| ANNEX B | TEST SETUP PHOTOS .....                             | 62 |
| ANNEX C | EUT EXTERNAL PHOTOS .....                           | 62 |

## 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

### 1.1 Identification of the Testing Laboratory

|              |                                                                                                                                 |
|--------------|---------------------------------------------------------------------------------------------------------------------------------|
| Company Name | Shenzhen BALUN Technology Co., Ltd.                                                                                             |
| Address      | Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China |
| Phone Number | +86 755 6685 0100                                                                                                               |

### 1.2 Identification of the Responsible Testing Location

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Location             | Shenzhen BALUN Technology Co., Ltd.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Address                   | Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Accreditation Certificate | <p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p> |
| Description               | All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055                                                                                                                                                                                                                                                                                                                                           |

### 1.3 Laboratory Condition

|                           |                   |
|---------------------------|-------------------|
| Ambient Temperature       | 20 to 25°C        |
| Ambient Relative Humidity | 45% - 55%         |
| Ambient Pressure          | 100 kPa - 102 kPa |

### 1.4 Announce

- (1) The test report reference to the report template version v1.0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

|           |                                                    |
|-----------|----------------------------------------------------|
| Applicant | Grandstream Networks, Inc.                         |
| Address   | 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA |

### 2.2 Manufacturer Information

|              |                                                    |
|--------------|----------------------------------------------------|
| Manufacturer | Grandstream Networks, Inc.                         |
| Address      | 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA |

### 2.3 Factory Information

|         |     |
|---------|-----|
| Factory | N/A |
| Address | N/A |

### 2.4 Ancillary Equipment

|                       |              |                             |
|-----------------------|--------------|-----------------------------|
| Ancillary Equipment 1 | Adapter 1    |                             |
|                       | Brand Name   | N/A                         |
|                       | Model Name   | F05L5-050100SPAU L.P.S      |
|                       | Rated Input  | 100-240 V~, 0.2 A, 50/60 Hz |
|                       | Rated Output | 5 V= 1 A                    |
| Ancillary Equipment 2 | Adapter 2    |                             |
|                       | Brand Name   | N/A                         |
|                       | Model Name   | F06US0500100A               |
|                       | Rated Input  | 100-240 V~, 0.2 A, 50/60 Hz |
|                       | Rated Output | 5 V= 1 A                    |
| Ancillary Equipment 3 | Adapter 3    |                             |
|                       | Brand Name   | N/A                         |
|                       | Model Name   | NBS05B050100VU              |
|                       | Rated Input  | 100-240 V~, 0.2 A, 50/60 Hz |
|                       | Rated Output | 5 V= 1 A                    |

## 2.5 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

|                    |                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------|
| Frequency Range    | 1920 – 1930 MHz                                                                                                          |
| Number of Channels | 5 Channels, 5x12 = 60 TDMA Duplex Channels                                                                               |
| Modulation Type    | GFSK                                                                                                                     |
| Number of Antennas | 1                                                                                                                        |
| Product Type       | <input checked="" type="checkbox"/> Mobile<br><input type="checkbox"/> Portable<br><input type="checkbox"/> Fix Location |
| Antenna Type       | Dipole                                                                                                                   |
| Antenna Gain       | 1.5dBi                                                                                                                   |
| About the Product  | This DECT product is a DECT Cordless VoIP Phone.                                                                         |

All channel list

| Channel number | Channel Frequency | Channel number | Channel Frequency |
|----------------|-------------------|----------------|-------------------|
| 0              | <b>1928.488</b>   | 3              | 1923.264          |
| 1              | 1926.720          | 4              | <b>1921.536</b>   |
| 2              | <b>1924.992</b>   | --             | --                |

## 2.6 General Description for Equipment under Test (EUT)

|                                           |                          |
|-------------------------------------------|--------------------------|
| EUT Type                                  | DECT Cordless VoIP Phone |
| Model Name Under Test                     | DP720 (Handset Unit)     |
| Series Model Name                         | N/A                      |
| Description of Model name differentiation | N/A                      |
| Hardware Version                          | V2.0                     |
| Software Version                          | 1.0.3.31                 |
| Dimensions (Approx.)                      | N/A                      |
| Weight (Approx.)                          | N/A                      |
| Network and Wireless connectivity         | N/A                      |

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

| No. | Identity                                       | Document Title                                                                                                                                                        |
|-----|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 47 CFR Part 15, Subpart D<br>(10-1-16 Edition) | Miscellaneous Wireless Communications Services                                                                                                                        |
| 2   | ANSI C63.4-2014                                | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz   |
| 3   | ANSI C63.17-2013                               | American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices. |

### 3.2 Verdict

| No.                                   | Description                                   | FCC PART No.              | ISED Part No.      | Test Result | Verdict                |
|---------------------------------------|-----------------------------------------------|---------------------------|--------------------|-------------|------------------------|
| General Technical Requirements        |                                               |                           |                    |             |                        |
| 1                                     | Antenna Requirement                           | 15.203; 15.317            | RSS-GEN 8.3        | N/A         | Pass <sup>Note 1</sup> |
| 2                                     | Labeling Requirement                          | 15.19(a)(3)               | RSP-100 3.1        | N/A         | Pass <sup>Note 2</sup> |
| 3                                     | Digital Modulation Techniques                 | 15.319 (b)                | 5.1                | N/A         | Pass <sup>Note 3</sup> |
| 4                                     | Conducted emission                            | 15.107(a);<br>15.207(a)   | 5.4<br>RSS-GEN 8.8 | ANNEX A.1   | Pass                   |
| 5                                     | Peak transmit power                           | 15.319(c)(e),<br>15.31(e) | 5.6<br>RSS-GEN 8.3 | ANNEX A.2   | Pass                   |
| 6                                     | Power spectral density                        | 15.319 (d)                | 5.7                | ANNEX A.3   | Pass                   |
| 7                                     | Emission bandwidth                            | 15.323 (a)                | 5.5<br>RSS-GEN 6.6 | ANNEX A.4   | Pass                   |
| 8                                     | Emission Inside and Out the sub-band          | 15.323 (d)                | 5.8.1; 5.8.2       | ANNEX A.5   | Pass                   |
| 9                                     | Carrier Frequency Stability                   | 15.323(f)                 | 5.3                | ANNEX A.6   | Pass                   |
| Specific Requirements for UPCS Device |                                               |                           |                    |             |                        |
| 10                                    | Frame repetition Stability, period and jitter | 15.323(e)                 | 5.2(1)(13)         | ANNEX A.7   | Pass                   |
| 11                                    | Monitoring the time                           | 15.323 (c)(1)             | 5.2(1)             | ANNEX A.8   | Pass                   |
| 12                                    | Monitoring threshold                          | 15.323 (c)(2)<br>(9)      | 5.2(2) (9)         | ANNEX A.9   | Pass                   |
| 13                                    | Maximum transmit period                       | 15.323 (c)(3)             | 5.2(3)             | ANNEX A.10  | Pass                   |
| 14                                    | Acknowledgment system                         | 15.323 (c)(4)             | 5.2(4)             | ANNEX A.11  | Pass                   |
| 15                                    | Least Interfered Channel, LIC                 | 15.323 (c)(5)             | 5.2(5)             | ANNEX A.12  | Pass                   |
| 16                                    | Random waiting                                | 15.323 (c)(6)             | 5.2(6)             | ANNEX A.13  | Pass                   |
| 17                                    | Monitoring bandwidth and reaction time        | 15.323 (c)(7)             | 5.2(7)             | ANNEX A.14  | Pass                   |
| 18                                    | Monitoring antenna                            | 15.323 (c)(8)             | 5.2(8)             | ANNEX A.15  | Pass                   |
| 19                                    | Duplex system LBT                             | 15.323 (c)(10)            | 5.2(10)            | ANNEX A.16  | Pass                   |
| 20                                    | Co-located device LBT                         | 15.323 (c)(11)            | 5.2(11)            | ANNEX A.17  | Pass                   |
| 21                                    | Fair access                                   | 15.323 (c)(12)            | 5.2(12)            | ANNEX A.18  | Pass                   |
| 22                                    | Radiated Emission                             | 15.319 (g)                | 5.2(13)            | ANNEX A.19  | Pass                   |

Note 1: Please refer to section 5.1.

Note 2: Customer declaration .See separate documents showing the label design and the placement of the label on the EUT.

Note 3: The requirement is all transmissions must use only digital modulation techniques. They are made in accordance with ANSI C63.17 sub-clause 6.1.4. Please refer to the technical description or relevant DECT standards for more details.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

|                            |                         |                |
|----------------------------|-------------------------|----------------|
| Relative Humidity          | 45% - 55%               |                |
| Atmospheric Pressure       | 100 kPa - 102 kPa       |                |
| Temperature                | NT (Normal Temperature) | +22°C to +25°C |
| Working Voltage of the EUT | NV (Normal Voltage)     | 3.7 V          |

### 4.2 Test Equipment List

| Description                           | Manufacturer               | Model                 | Serial No. | Cal. Date  | Cal. Due   |
|---------------------------------------|----------------------------|-----------------------|------------|------------|------------|
| Spectrum Analyzer                     | ROHDE&SCHWARZ              | FSV-30                | 103118     | 2017.06.22 | 2018.06.21 |
| Switch Unit with OSP-B157             | ROHDE&SCHWARZ              | OSP120                | 101270     | 2017.06.22 | 2018.06.21 |
| EMI Receiver                          | KEYSIGHT                   | N9038A                | MY53220118 | 2017.09.07 | 2018.09.06 |
| EMI Receiver                          | ROHDE&SCHWARZ              | ESRP                  | 101036     | 2017.06.22 | 2018.06.21 |
| LISN                                  | SCHWARZBECK                | NSLK 8127             | 8127-687   | 2017.06.22 | 2018.06.21 |
| Bluetooth Tester                      | ROHDE&SCHWARZ              | CBT                   | 101005     | 2017.06.22 | 2018.06.21 |
| Power Splitter                        | KMW                        | DCPD-LDC              | 1305003215 | --         | --         |
| Power Sensor                          | ROHDE&SCHWARZ              | NRP-Z21               | 103971     | 2017.06.22 | 2018.06.21 |
| Attenuator (20 dB)                    | KMW                        | ZA-S1-201             | 110617091  | --         | --         |
| DC Power Supply                       | ROHDE&SCHWARZ              | HMP2020               | 018141664  | 2017.06.22 | 2018.06.21 |
| Temperature Chamber                   | ANGELANTIONI<br>SCIENCE    | NTH64-40A             | 1310       | 2017.06.22 | 2018.06.21 |
| Test Antenna-<br>Loop(9 kHz-30 MHz)   | SCHWARZBECK                | FMZB 1519             | 1519-037   | 2017.06.22 | 2018.06.21 |
| Test Antenna-<br>Bi-Log(30 MHz-3 GHz) | SCHWARZBECK                | VULB 9163             | 9163-624   | 2017.06.22 | 2018.06.21 |
| Test Antenna-<br>Horn(1-18 GHz)       | SCHWARZBECK                | BBHA<br>9120D         | 9120D-1148 | 2017.06.22 | 2018.06.21 |
| Test Antenna-<br>Horn(15-26.5 GHz)    | SCHWARZBECK                | BBHA 9170             | 9170-305   | 2017.06.22 | 2018.06.21 |
| Anechoic Chamber                      | RAINFORD                   | 9m*6m*6m              | N/A        | 2017.02.24 | 2019.02.23 |
| Anechoic Chamber                      | EMC Electronic Co.,<br>Ltd | 20.10*11.60<br>*7.35m | N/A        | 2016.08.09 | 2018.08.08 |
| Shielded Enclosure                    | ChangNing                  | CN-130701             | 130703     | --         | --         |
| Signal Generator                      | ROHDE&SCHWARZ              | SMB100A               | 177746     | 2017.06.22 | 2018.06.21 |
| Power Amplifier                       | OPHIR RF                   | 5225F                 | 1037       | 2017.02.17 | 2018.02.16 |
| Power Amplifier                       | OPHIR RF                   | 5273F                 | 1016       | 2017.02.17 | 2018.02.16 |
| Directional Coupler                   | Werlantone                 | C5982-10              | 109275     | N/A        | N/A        |
| Directional Coupler                   | Werlantone                 | CHP-273E              | S00801z-01 | N/A        | N/A        |

### 4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| Measurement                       | Value                   |
|-----------------------------------|-------------------------|
| Occupied Channel Bandwidth        | $\pm 4\%$               |
| RF output power, conducted        | $\pm 1.4$ dB            |
| Power Spectral Density, conducted | $\pm 2.5$ dB            |
| Unwanted Emissions, conducted     | $\pm 2.8$ dB            |
| All emissions, radiated           | $\pm 5.4$ dB            |
| Temperature                       | $\pm 1^{\circ}\text{C}$ |
| Humidity                          | $\pm 4\%$               |


### 4.4 Description of Test Setup

#### 4.4.1 For Antenna Port Test

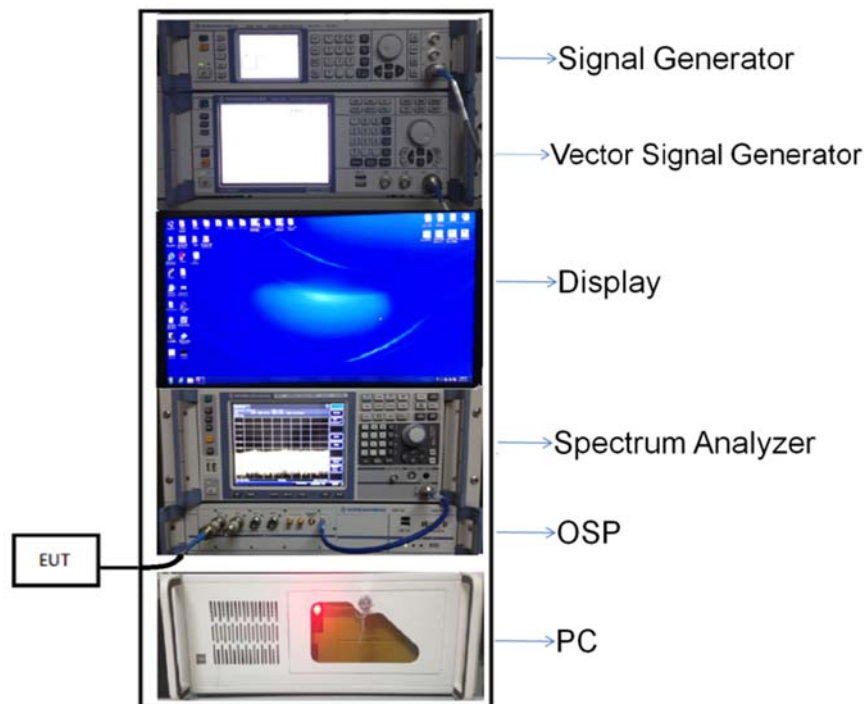


(Diagram 1)

#### 4.4.2 For AC Power Supply Port Test

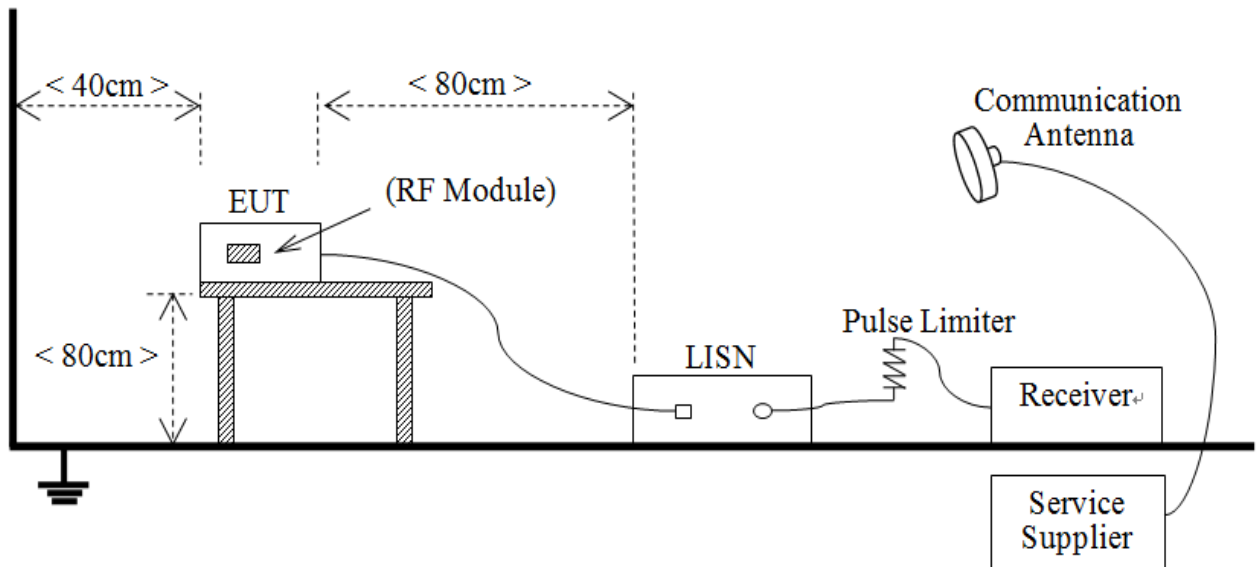


(Diagram 2)

#### 4.4.3 For Radiated Test (Below 30 MHz)

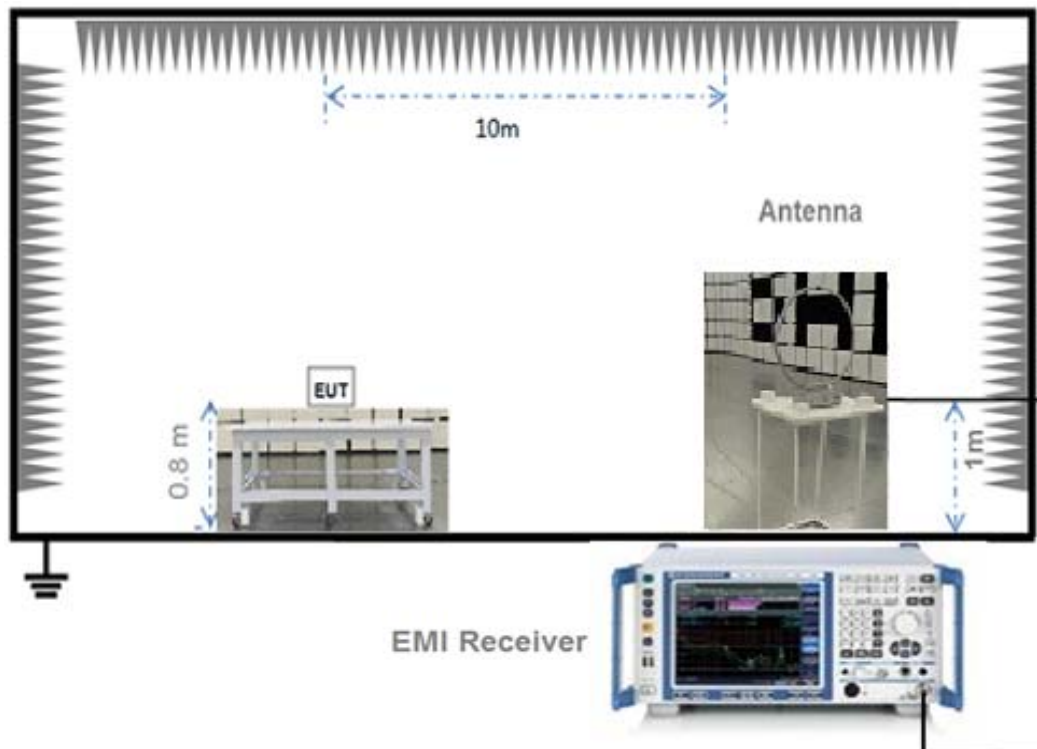


(Diagram 3)

#### 4.4.4 For Radiated Test (30 MHz-1 GHz)

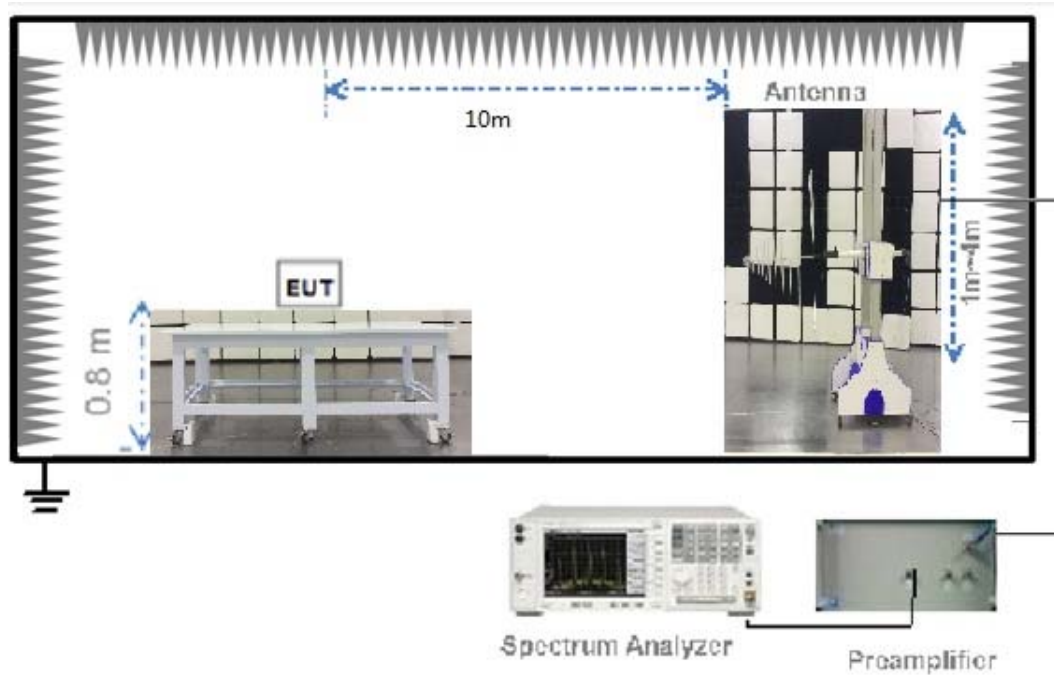

(Diagram 4)

#### 4.4.5 For Radiated Test (Above 1 GHz)

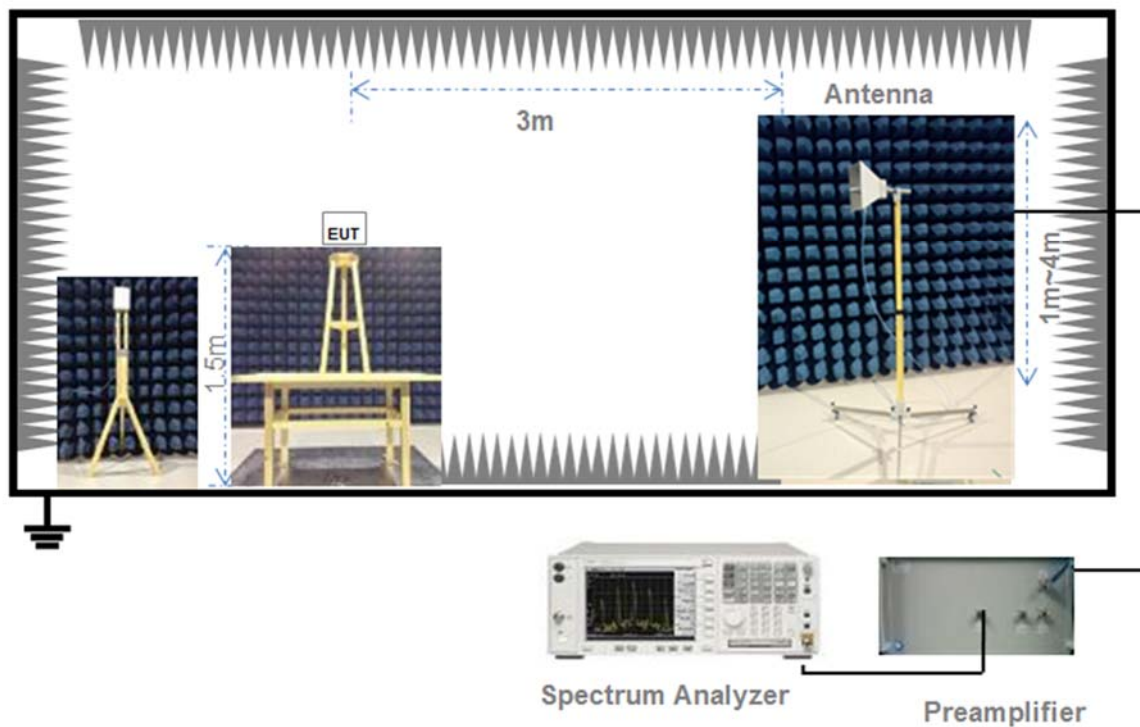

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.317

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

| Protected Method                                                                              | Description                                              |
|-----------------------------------------------------------------------------------------------|----------------------------------------------------------|
| Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited. | The antenna is the unique connector with a wire antenna. |

| Reference Documents | Item |
|---------------------|------|
| Photo               |      |

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Conducted Emission

### 5.2.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

| Frequency range<br>(MHz) | Conducted Limit (dB $\mu$ V) |          |
|--------------------------|------------------------------|----------|
|                          | Quai-peak                    | Average  |
| 0.15 - 0.50              | 66 to 56                     | 56 to 46 |
| 0.50 - 5                 | 56                           | 46       |
| 0.50 - 30                | 60                           | 50       |

### 5.2.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 Peak transmit power

### 5.3.1 Test Limit

FCC § 15.319(c)(e); RSS-213, 5.6

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3dBi.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.2.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Power Spectral density (PSD)

### 5.4.1 Limit

FCC §15.319(d); RSS-213, 5.7

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.5.

### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Emission Bandwidth

### 5.5.1 Limit

FCC §15.323 (a); RSS-213, 5.5 RSS-GEN, 6.6

The 26 dB and 99% Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.3.

### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Emission Inside and Out the sub-band

### 5.6.1 Limit

FCC §15.323 (d); RSS-213, 5.8

#### In-Band Emissions:

$B < f \leq 2B$ : at least 30 dB below max. permitted peak power

$2B < f \leq 3B$ : at least 50 dB below max. permitted peak power

$3B < f \leq$  UPCS Band Edge: at least 60 dB below max. permitted peak power

#### Out-of-Band Emissions:

$f \leq 1.25\text{MHz}$  outside UPCS band:  $\leq -9.5\text{dBm}$

$1.25\text{MHz} \leq f \leq 2.5\text{MHz}$  outside UPCS band:  $\leq -29.5\text{ dBm}$

$f \geq 2.5\text{MHz}$  outside UPCS band:  $\leq -39.5\text{ dBm}$

### 5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

Reference to ANSI C63.17, Clause 6.1.6.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Carrier Frequency Stability

### 5.7.1 Limit

FCC §15.323 (f); RSS-213, 5.3

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of  $-20^{\circ}$  to  $+ 50^{\circ}$  °C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of  $20^{\circ}$  °C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further. Requirement to vary supply voltage.

### 5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Reference to ANSI C63.17, Clause 6.2.1.

### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Frame repetition Stability, period and jitter

### 5.8.1 Requirements

FCC §15.323 (e); RSS-213, 5.2(1) (13)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this band shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

### 5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

Reference to ANSI C63.17, Clause 6.2.2&6.2.3.

### 5.8.4 Test Result

Please refer to ANNEX A.7.

## 5.9 Monitoring the time

### 5.9.1 Limit

FCC §15.323 (c) (1); RSS-213, 5.2(1)

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.

### 5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Reference to ANSI C63.17, Clause 7.3.3.

### 5.9.4 Test Result

Please refer to ANNEX A.8.

## 5.10 Monitoring threshold

### 5.10.1 Limit

FCC §15.323 (c) (2); RSS-213, 5.2(2)

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

FCC §15.323 (c) (9); RSS-213, 5.2(9)

Devices that have a power output lower than the maximum permitted under this subpart may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

### 5.10.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.10.3 Test Procedure

Reference to ANSI C63.17, Clause 7.3.1.

### 5.10.4 Test Result

Please refer to ANNEX A.9.

## **5.11 Maximum transmit period**

### **5.11.1 Limit**

FCC §15.323 (c) (3); RSS-213, 5.2(3)

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

### **5.11.2 Test Setup**

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### **5.11.3 Test Procedure**

Reference to ANSI C63.17, Clause 8.2.2.

### **5.11.4 Test Result**

Please refer to ANNEX A.10.

## **5.12 Acknowledgment system**

### **5.12.1 Limit**

FCC §15.323 (c) (4); RSS-213, 5.2(4)

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

### **5.12.2 Test Setup**

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### **5.12.3 Test Procedure**

Reference to ANSI C63.17, Clause 8.2.

### **5.12.4 Test Result**

Please refer to ANNEX A.11.

## 5.13 Least Interfered Channel, LIC

### 5.13.1 Limit

FCC §15.323 (c) (5); RSS-213, 5.2(5)

If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed. A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 milliseconds frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value. The power measurement resolution for this comparison must be accurate to within 6 dB. No device or group of cooperating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

### 5.13.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.13.3 Test Procedure

Reference to ANSI C63.17, Clause 7.3.2 and 7.3.3.

### 5.13.4 Test Result

Please refer to ANNEX A.12.

## **5.14 Random waiting**

### **5.14.1 Limit**

FCC §15.323 (c) (6); RSS-213, 5.2(6)

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

### **5.14.2 Test Setup**

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### **5.14.3 Test Procedure**

Reference to ANSI C63.17, Clause 8.1.3

### **5.14.4 Test Result**

Please refer to ANNEX A.13.

## 5.15 Monitoring bandwidth and reaction time

### 5.15.1 Limit

FCC §15.323 (c) (7); RSS-213, 5.2(7)

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than  $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be  $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds but shall not be required to be less than 35 microseconds.

### 5.15.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.15.3 Test Procedure

Reference to ANSI C63.17, Clause 7.4 and 7.5.

### 5.15.4 Test Result

Please refer to ANNEX A.14.

## **5.16 Monitoring antenna**

### **5.16.1 Limit**

FCC §15.323 (c) (8); RSS-213, 5.2(8)

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

### **5.16.2 Test Setup**

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### **5.16.3 Test Procedure**

Reference to ANSI C63.17, Clause 4.

### **5.16.4 Test Result**

Please refer to ANNEX A.15.

## **5.17 Duplex system LBT**

### **5.17.1 Limit**

FCC §15.323 (c) (10); RSS-213, 5.2(10)

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

### **5.17.2 Test Setup**

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### **5.17.3 Test Procedure**

Reference to ANSI C63.17, Clause 8.3.

### **5.17.4 Test Result**

Please refer to ANNEX A.16.

## **5.18 Co-located device LBT**

### **5.18.1 Limit**

FCC §15.323 (c) (11); RSS-213, 5.2(11)

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a collocated (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or collocated cooperating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

### **5.18.2 Test Setup**

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### **5.18.3 Test Procedure**

Reference to ANSI C63.17, Clause 8.4.

### **5.18.4 Test Result**

Please refer to ANNEX A.17.

## **5.19 Fair access**

### **5.19.1 Limit**

FCC §15.323 (c) (12); RSS-213, 5.2(12)

The provisions of (c)(10) or (c)(11) of this section shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

### **5.19.2 Test Setup**

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### **5.19.3 Test Result**

Please refer to ANNEX A.18.

## 5.20 Radiated Emission

### 5.20.1 Limit

FCC §15.209&15.319(g);

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V}/\text{m}$ ) | Measurement Distance (m) |
|-----------------|-------------------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                               | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)                              | 30                       |
| 1.705 - 30.0    | 30                                        | 30                       |
| 30 - 88         | 100                                       | 3                        |
| 88 - 216        | 150                                       | 3                        |
| 216 - 960       | 200                                       | 3                        |
| Above 960       | 500                                       | 3                        |

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

### 5.20.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.20.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

#### General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

#### Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

| Frequency   | RBW         |
|-------------|-------------|
| 9-150 kHz   | 200-300 Hz  |
| 0.15-30 MHz | 9-10 kHz    |
| 30-1000 MHz | 100-120 kHz |

|            |       |
|------------|-------|
| > 1000 MHz | 1 MHz |
|------------|-------|

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle  $\geq 98$  percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

#### 5.20.4 Test Result

Please refer to ANNEX A.19.

## ANNEX A TEST RESULT


### A.1 Conducted Emissions

Note: The EUT is working in the Normal link mode.

#### Test Data and Plots


##### Adapter 1

#### PHASE L

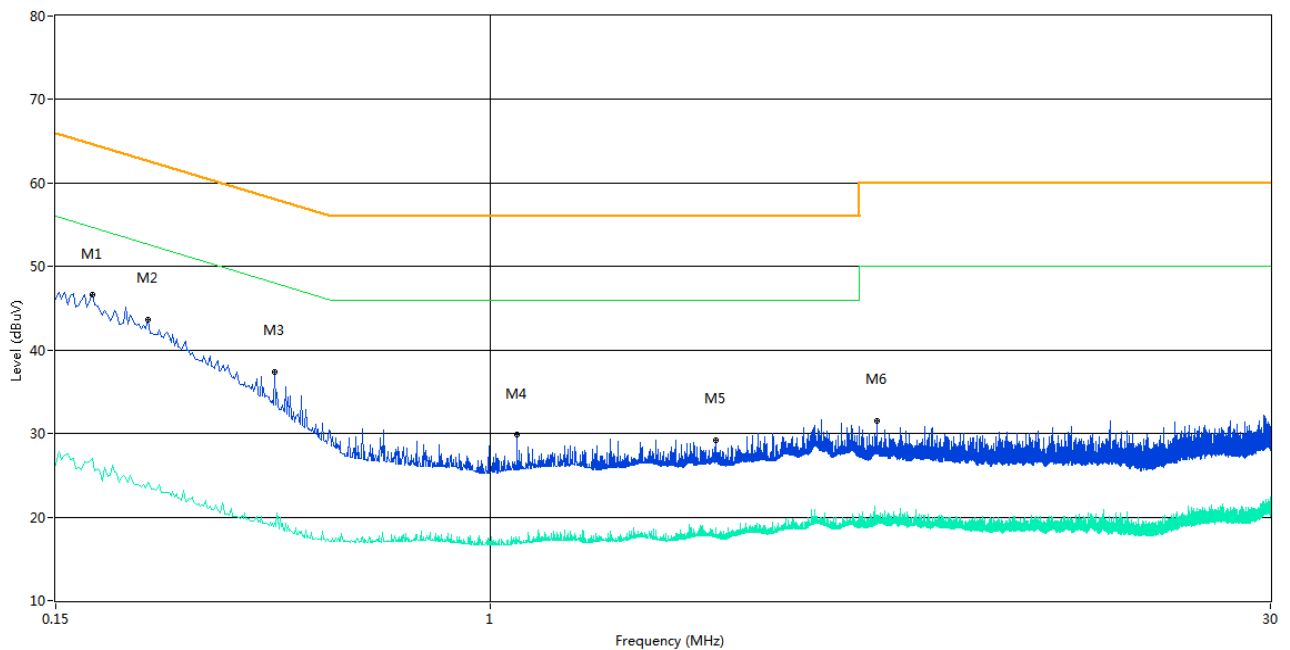

| No. | Frequency (MHz) | Results (dBuV) | Factor (dB) | Limit (dBuV) | Margin (dB) | Detector | Line   | Verdict |
|-----|-----------------|----------------|-------------|--------------|-------------|----------|--------|---------|
| 1   | 0.176           | 46.6           | 10.04       | 64.7         | 18.10       | Peak     | L Line | Pass    |
| 1** | 0.176           | 27.1           | 10.04       | 54.7         | 27.60       | AV       | L Line | Pass    |
| 2   | 0.224           | 43.7           | 10.04       | 62.7         | 19.00       | Peak     | L Line | Pass    |
| 2** | 0.224           | 24.1           | 10.04       | 52.7         | 28.60       | AV       | L Line | Pass    |
| 3   | 0.390           | 37.3           | 10.04       | 58.1         | 20.80       | Peak     | L Line | Pass    |
| 3** | 0.390           | 19.2           | 10.04       | 48.1         | 28.90       | AV       | L Line | Pass    |
| 4   | 1.122           | 29.8           | 10.06       | 56.0         | 26.20       | Peak     | L Line | Pass    |
| 4** | 1.122           | 17.3           | 10.06       | 46.0         | 28.70       | AV       | L Line | Pass    |
| 5   | 2.666           | 29.2           | 10.11       | 56.0         | 26.80       | Peak     | L Line | Pass    |
| 5** | 2.666           | 18.0           | 10.11       | 46.0         | 28.00       | AV       | L Line | Pass    |
| 6   | 5.392           | 31.6           | 10.18       | 60.0         | 28.40       | Peak     | L Line | Pass    |
| 6** | 5.392           | 19.8           | 10.18       | 50.0         | 30.20       | AV       | L Line | Pass    |


# PHASE N

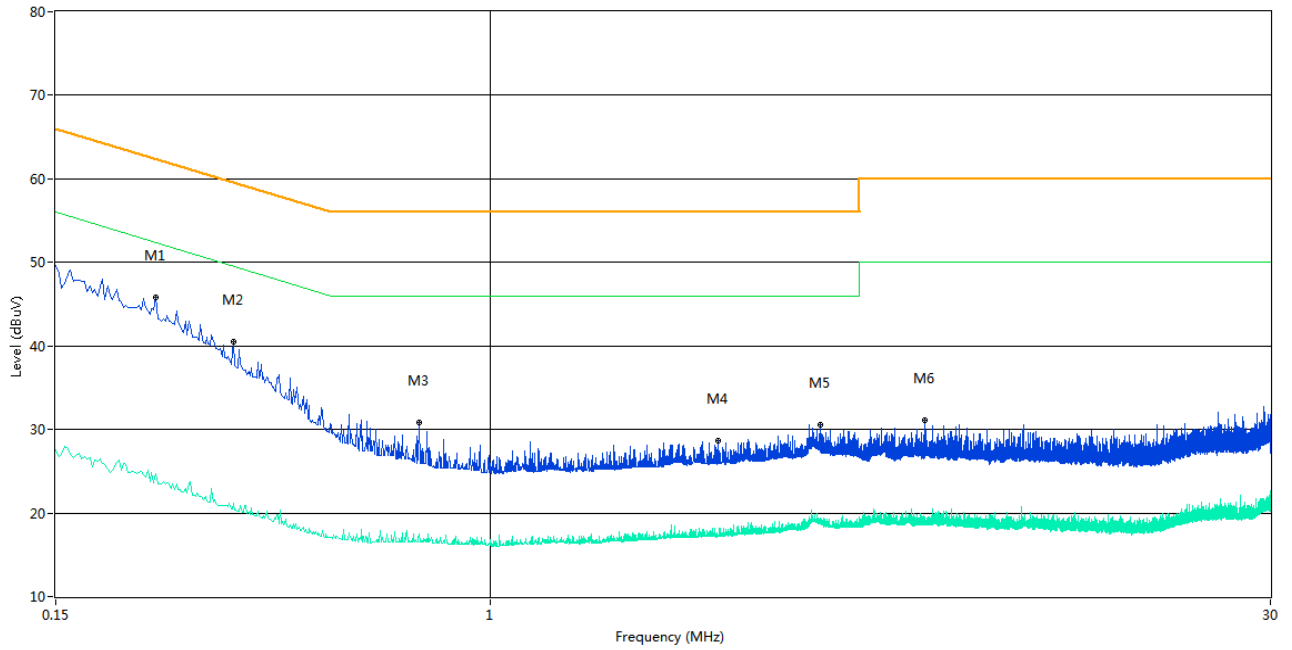

| No. | Frequency (MHz) | Results (dBuV) | Factor (dB) | Limit (dBuV) | Margin (dB) | Detector | Line   | Verdict |
|-----|-----------------|----------------|-------------|--------------|-------------|----------|--------|---------|
| 1   | 0.232           | 45.9           | 10.04       | 62.4         | 16.50       | Peak     | N Line | Pass    |
| 1** | 0.232           | 24.6           | 10.04       | 52.4         | 27.80       | AV       | N Line | Pass    |
| 2   | 0.326           | 40.5           | 10.04       | 59.6         | 19.10       | Peak     | N Line | Pass    |
| 2** | 0.326           | 21.2           | 10.04       | 49.6         | 28.40       | AV       | N Line | Pass    |
| 3   | 0.732           | 30.8           | 10.05       | 56.0         | 25.20       | Peak     | N Line | Pass    |
| 3** | 0.732           | 17.5           | 10.05       | 46.0         | 28.50       | AV       | N Line | Pass    |
| 4   | 2.692           | 28.7           | 10.11       | 56.0         | 27.30       | Peak     | N Line | Pass    |
| 4** | 2.692           | 17.3           | 10.11       | 46.0         | 28.70       | AV       | N Line | Pass    |
| 5   | 4.212           | 30.6           | 10.15       | 56.0         | 25.40       | Peak     | N Line | Pass    |
| 5** | 4.212           | 18.9           | 10.15       | 46.0         | 27.10       | AV       | N Line | Pass    |
| 6   | 6.652           | 31.2           | 10.22       | 60.0         | 28.80       | Peak     | N Line | Pass    |
| 6** | 6.652           | 18.9           | 10.22       | 50.0         | 31.10       | AV       | N Line | Pass    |


## Adapter 2

### PHASE L

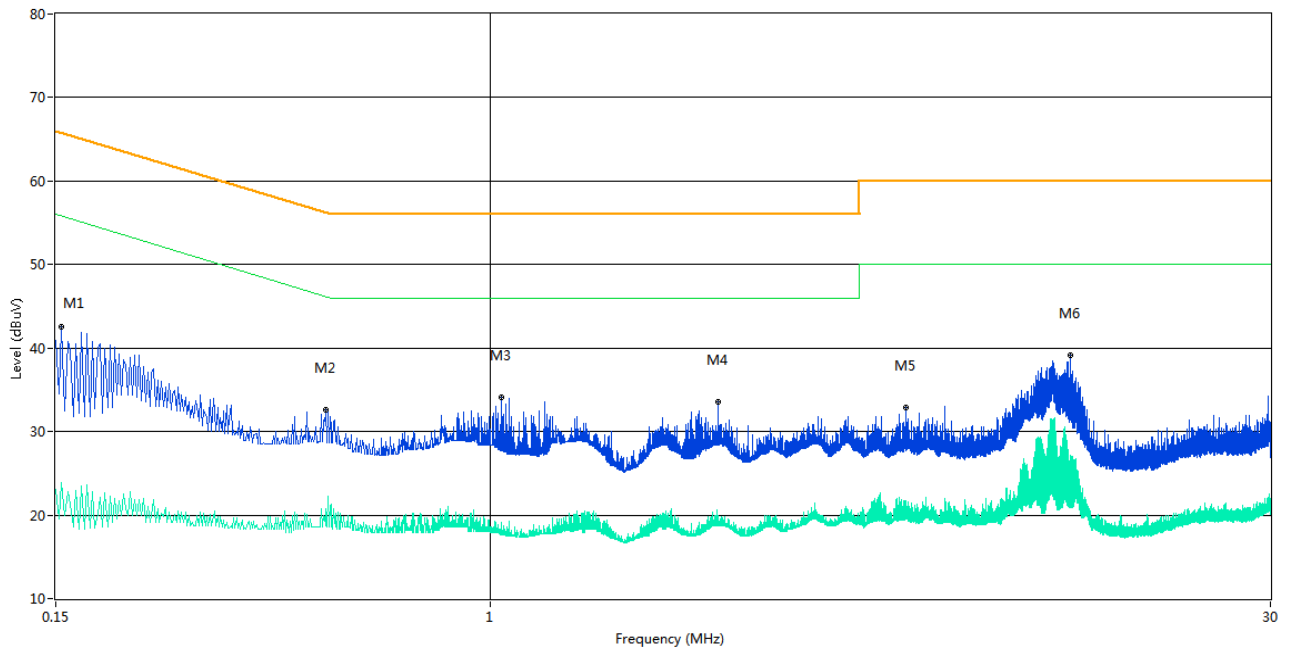

| No. | Frequency (MHz) | Results (dBuV) | Factor (dB) | Limit (dBuV) | Margin (dB) | Detector | Line   | Verdict |
|-----|-----------------|----------------|-------------|--------------|-------------|----------|--------|---------|
| 1   | 0.154           | 42.5           | 10.04       | 65.8         | 23.30       | Peak     | L Line | Pass    |
| 1** | 0.154           | 23.9           | 10.04       | 55.8         | 31.90       | AV       | L Line | Pass    |
| 2   | 0.488           | 32.6           | 10.05       | 56.2         | 23.60       | Peak     | L Line | Pass    |
| 2** | 0.488           | 20.7           | 10.05       | 46.2         | 25.50       | AV       | L Line | Pass    |
| 3   | 1.046           | 34.1           | 10.06       | 56.0         | 21.90       | Peak     | L Line | Pass    |
| 3** | 1.046           | 19.1           | 10.06       | 46.0         | 26.90       | AV       | L Line | Pass    |
| 4   | 2.698           | 33.6           | 10.11       | 56.0         | 22.40       | Peak     | L Line | Pass    |
| 4** | 2.698           | 20.0           | 10.11       | 46.0         | 26.00       | AV       | L Line | Pass    |
| 5   | 6.124           | 32.9           | 10.20       | 60.0         | 27.10       | Peak     | L Line | Pass    |
| 5** | 6.124           | 21.5           | 10.20       | 50.0         | 28.50       | AV       | L Line | Pass    |
| 6   | 12.550          | 39.1           | 10.38       | 60.0         | 20.90       | Peak     | L Line | Pass    |
| 6** | 12.550          | 21.8           | 10.38       | 50.0         | 28.20       | AV       | L Line | Pass    |


# PHASE N

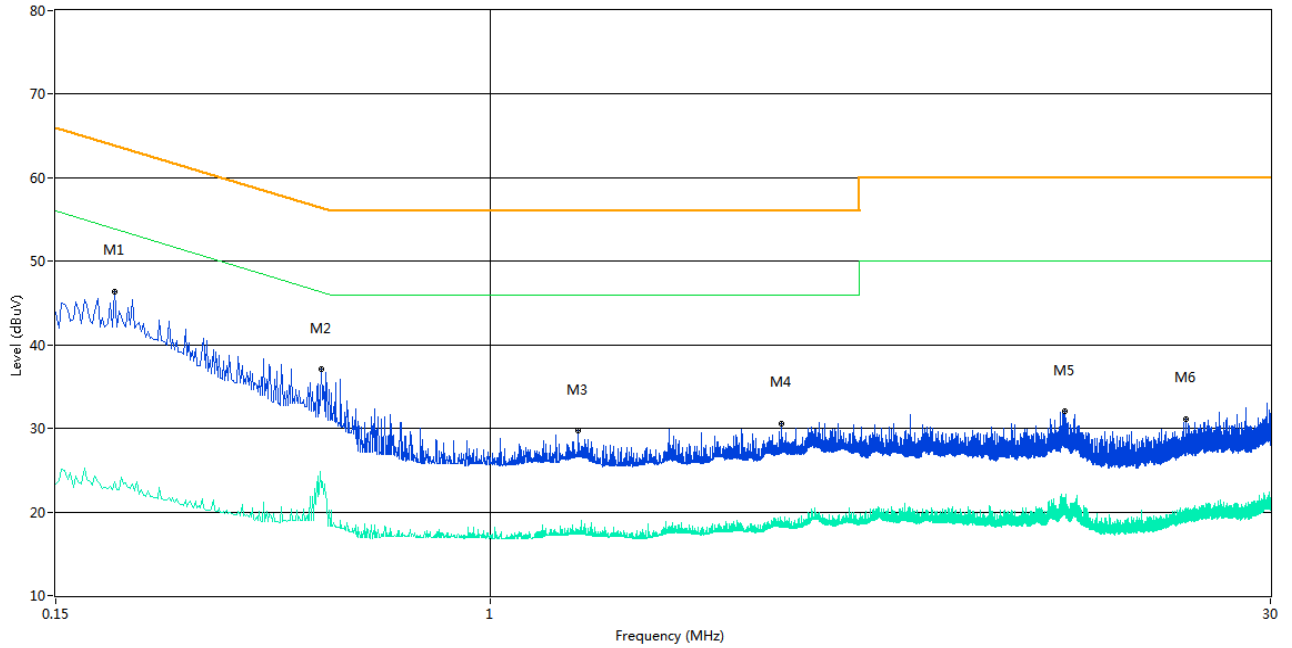

| No. | Frequency (MHz) | Results (dBuV) | Factor (dB) | Limit (dBuV) | Margin (dB) | Detector | Line   | Verdict |
|-----|-----------------|----------------|-------------|--------------|-------------|----------|--------|---------|
| 1   | 0.194           | 46.3           | 10.04       | 63.9         | 17.60       | Peak     | N Line | Pass    |
| 1** | 0.194           | 23.6           | 10.04       | 53.9         | 30.30       | AV       | N Line | Pass    |
| 2   | 0.478           | 37.0           | 10.05       | 56.4         | 19.40       | Peak     | N Line | Pass    |
| 2** | 0.478           | 22.9           | 10.05       | 46.4         | 23.50       | AV       | N Line | Pass    |
| 3   | 1.464           | 29.7           | 10.07       | 56.0         | 26.30       | Peak     | N Line | Pass    |
| 3** | 1.464           | 17.5           | 10.07       | 46.0         | 28.50       | AV       | N Line | Pass    |
| 4   | 3.552           | 30.5           | 10.13       | 56.0         | 25.50       | Peak     | N Line | Pass    |
| 4** | 3.552           | 18.5           | 10.13       | 46.0         | 27.50       | AV       | N Line | Pass    |
| 5   | 12.238          | 32.1           | 10.37       | 60.0         | 27.90       | Peak     | N Line | Pass    |
| 5** | 12.238          | 21.7           | 10.37       | 50.0         | 28.30       | AV       | N Line | Pass    |
| 6   | 20.764          | 31.2           | 10.61       | 60.0         | 28.80       | Peak     | N Line | Pass    |
| 6** | 20.764          | 19.3           | 10.61       | 50.0         | 30.70       | AV       | N Line | Pass    |


### Adapter 3

#### PHASE L

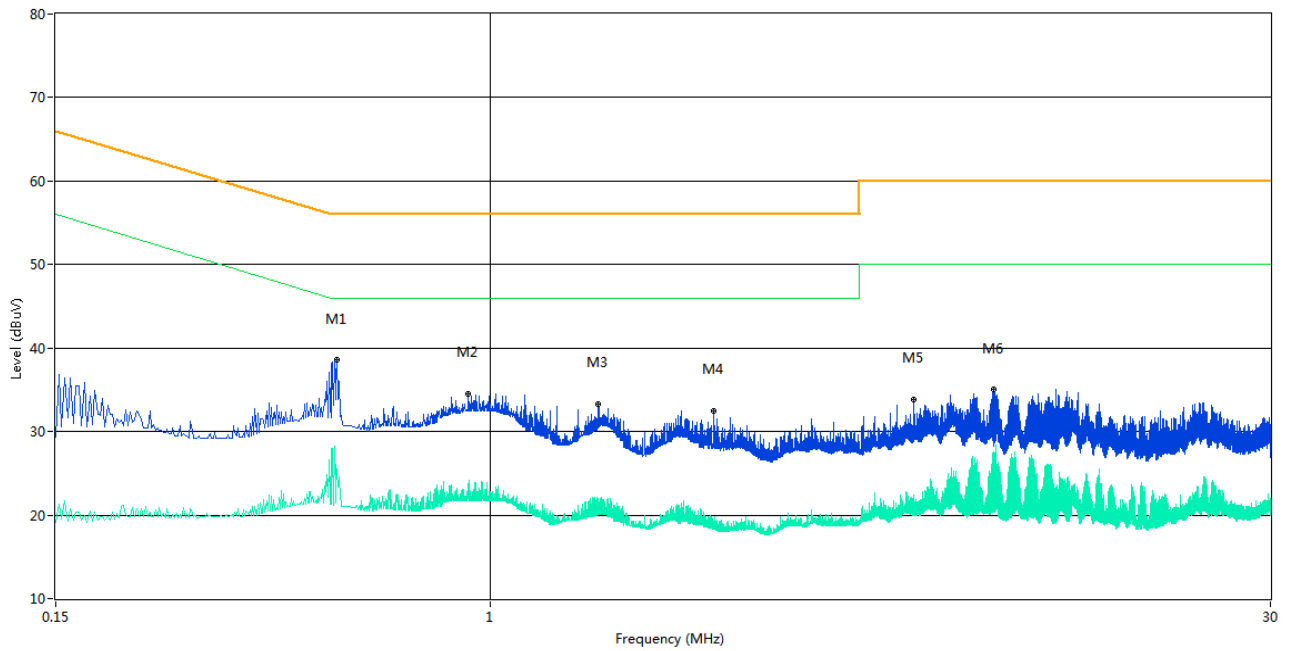

| No. | Frequency (MHz) | Results (dBuV) | Factor (dB) | Limit (dBuV) | Margin (dB) | Detector | Line   | Verdict |
|-----|-----------------|----------------|-------------|--------------|-------------|----------|--------|---------|
| 1   | 0.512           | 38.5           | 10.05       | 56.0         | 17.50       | Peak     | L Line | Pass    |
| 1** | 0.512           | 25.1           | 10.05       | 46.0         | 20.90       | AV       | L Line | Pass    |
| 2   | 0.908           | 34.5           | 10.06       | 56.0         | 21.50       | Peak     | L Line | Pass    |
| 2** | 0.908           | 23.8           | 10.06       | 46.0         | 22.20       | AV       | L Line | Pass    |
| 3   | 1.600           | 33.3           | 10.08       | 56.0         | 22.70       | Peak     | L Line | Pass    |
| 3** | 1.600           | 21.3           | 10.08       | 46.0         | 24.70       | AV       | L Line | Pass    |
| 4   | 2.648           | 32.5           | 10.11       | 56.0         | 23.50       | Peak     | L Line | Pass    |
| 4** | 2.648           | 19.2           | 10.11       | 46.0         | 26.80       | AV       | L Line | Pass    |
| 5   | 6.342           | 33.8           | 10.21       | 60.0         | 26.20       | Peak     | L Line | Pass    |
| 5** | 6.342           | 20.6           | 10.21       | 50.0         | 29.40       | AV       | L Line | Pass    |
| 6   | 8.970           | 35.1           | 10.28       | 60.0         | 24.90       | Peak     | L Line | Pass    |
| 6** | 8.970           | 27.3           | 10.28       | 50.0         | 22.70       | AV       | L Line | Pass    |

# PHASE N

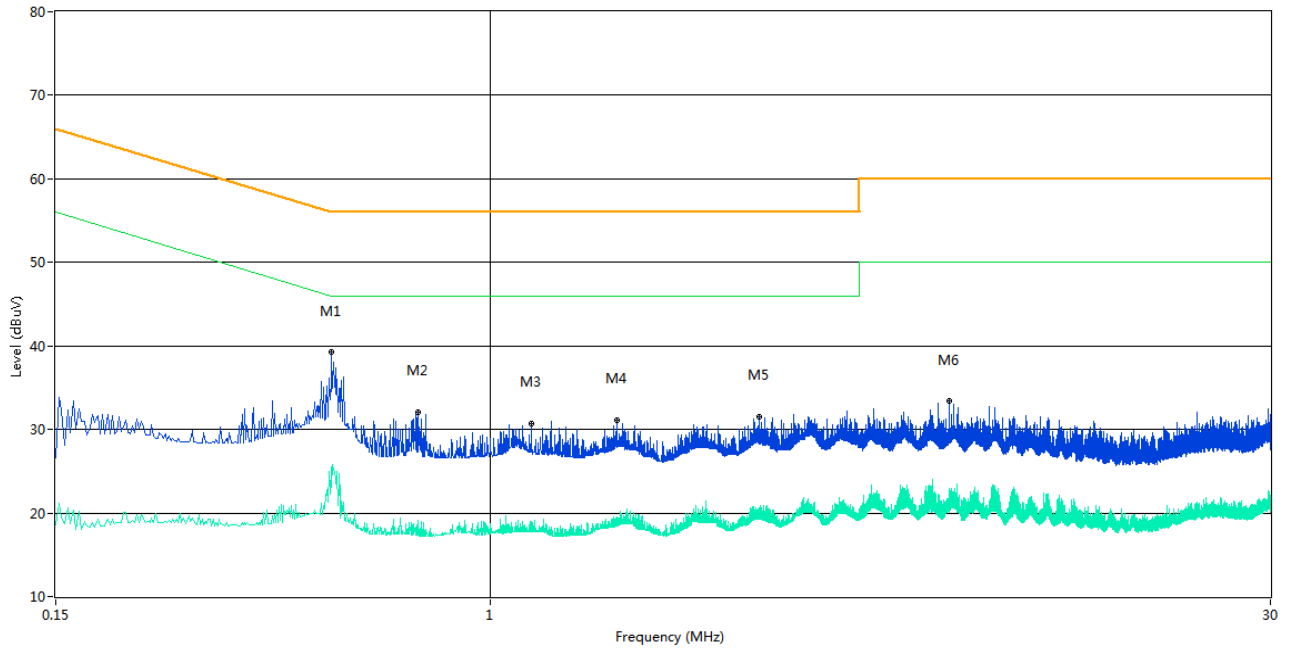


| No. | Frequency (MHz) | Results (dBuV) | Factor (dB) | Limit (dBuV) | Margin (dB) | Detector | Line   | Verdict |
|-----|-----------------|----------------|-------------|--------------|-------------|----------|--------|---------|
| 1   | 0.500           | 39.2           | 10.05       | 56.0         | 16.80       | Peak     | N Line | Pass    |
| 1** | 0.500           | 23.1           | 10.05       | 46.0         | 22.90       | AV       | N Line | Pass    |
| 2   | 0.730           | 32.1           | 10.05       | 56.0         | 23.90       | Peak     | N Line | Pass    |
| 2** | 0.730           | 19.1           | 10.05       | 46.0         | 26.90       | AV       | N Line | Pass    |
| 3   | 1.194           | 30.7           | 10.07       | 56.0         | 25.30       | Peak     | N Line | Pass    |
| 3** | 1.194           | 17.0           | 10.07       | 46.0         | 29.00       | AV       | N Line | Pass    |
| 4   | 1.732           | 31.1           | 10.08       | 56.0         | 24.90       | Peak     | N Line | Pass    |
| 4** | 1.732           | 19.3           | 10.08       | 46.0         | 26.70       | AV       | N Line | Pass    |
| 5   | 3.234           | 31.5           | 10.12       | 56.0         | 24.50       | Peak     | N Line | Pass    |
| 5** | 3.234           | 19.8           | 10.12       | 46.0         | 26.20       | AV       | N Line | Pass    |
| 6   | 7.386           | 33.4           | 10.24       | 60.0         | 26.60       | Peak     | N Line | Pass    |
| 6** | 7.386           | 19.5           | 10.24       | 50.0         | 30.50       | AV       | N Line | Pass    |

## A.2 Peak transmit power.


Note: Conducted:  $100\mu\text{W} \times \text{SQRT}(B)$  where B is the measured Emission Bandwidth in Hz, the antenna gain less than 3dBi.

| Frequency (MHz) | Measured Output Peak Power (dBm) | Maximum Antenna Gain (dBi) | Maximum Radiated Output Power Peak (dBm) | Limit (dBm) | Verdict |
|-----------------|----------------------------------|----------------------------|------------------------------------------|-------------|---------|
| Low             | 18.80                            | 1.5dBi                     | 20.30                                    | 20.73       | Pass    |
| Middle          | 18.79                            | 1.5dBi                     | 20.29                                    | 20.73       | Pass    |
| High            | 18.83                            | 1.5dBi                     | 20.33                                    | 20.73       | Pass    |


### LOW CHANNEL

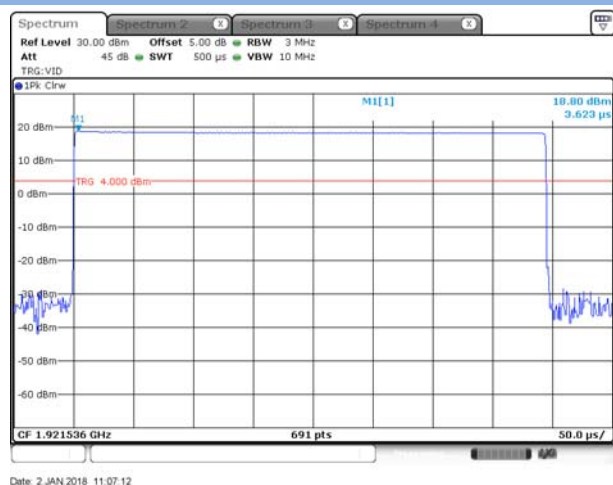

### MIDDLE CHANNEL

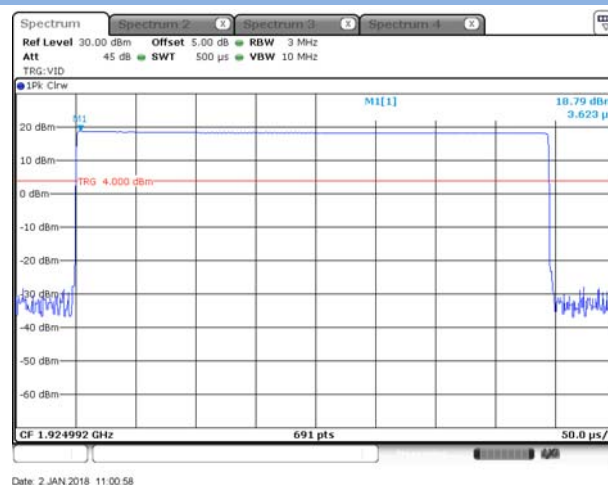

### HIGH CHANNEL

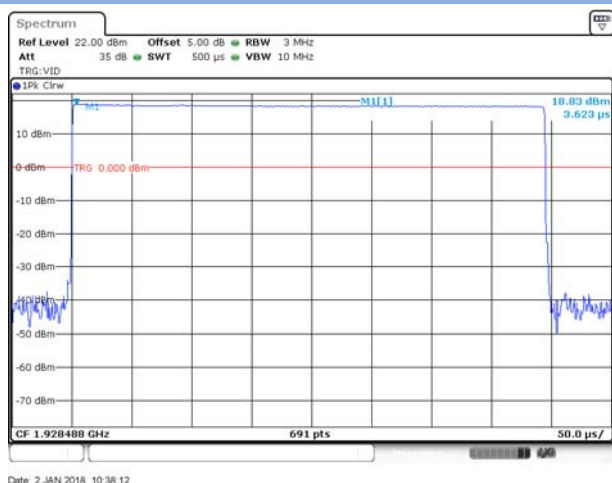

## A.3 Power Spectral Density (PSD)


### Test Data

802.11b Mode:

| Channel | Spectral power density (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|---------|-----------------------------------|------------------|---------|
| Low     | 1.56                              | 4.7              | Pass    |
| Middle  | 1.45                              | 4.7              | Pass    |
| High    | 1.19                              | 4.7              | Pass    |


### Test plots

#### LOW CHANNEL

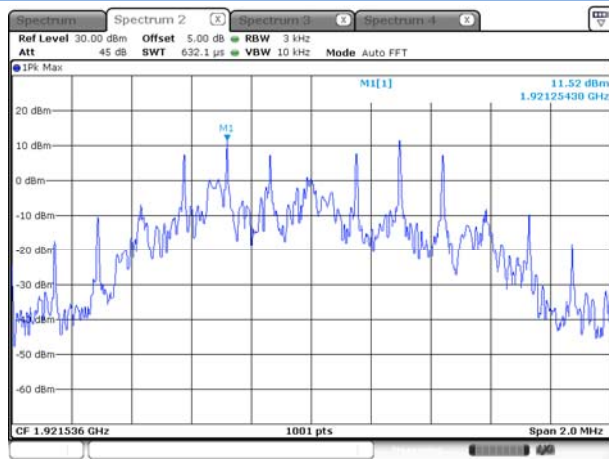


Date: 2 JAN 2018 11:05:58

#### LOW CHANNEL

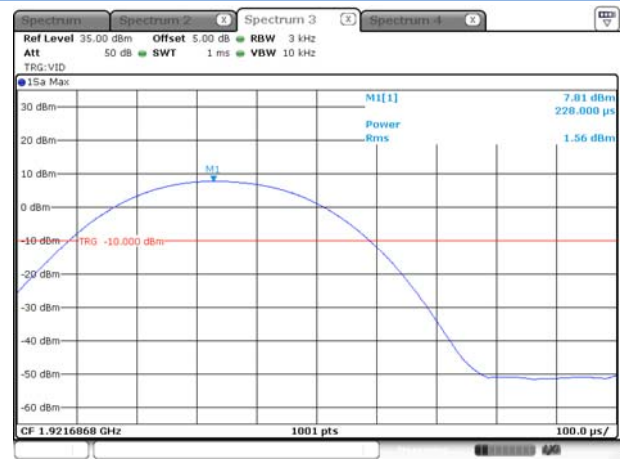


Date: 2 JAN 2018 11:06:52

#### MIDDLE CHANNEL

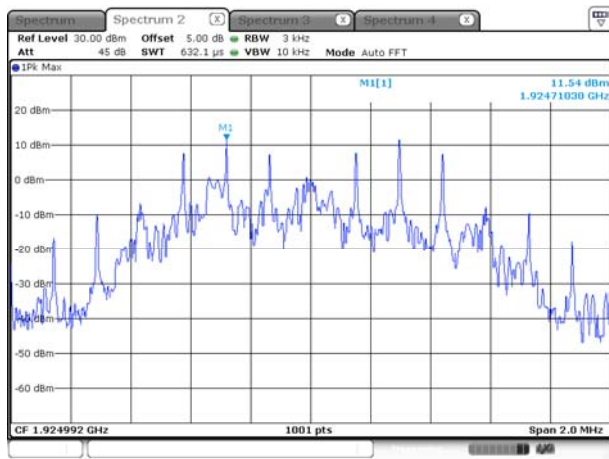


Date: 2 JAN 2018 11:02:08

#### MIDDLE CHANNEL

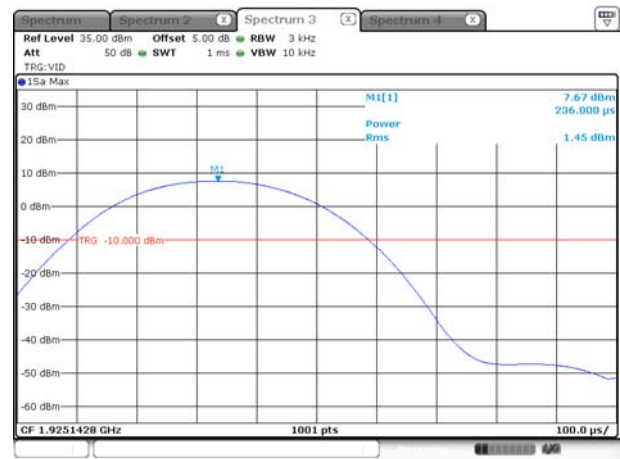


Date: 2 JAN 2018 11:02:51

## HIGH CHANNEL

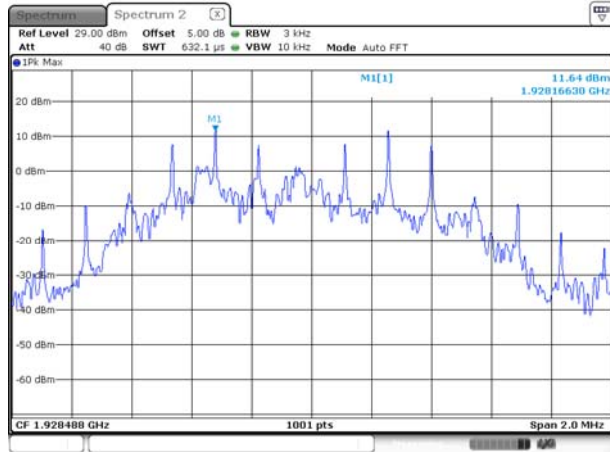

Date: 2 JAN 2018 10:41:15

## HIGH CHANNEL

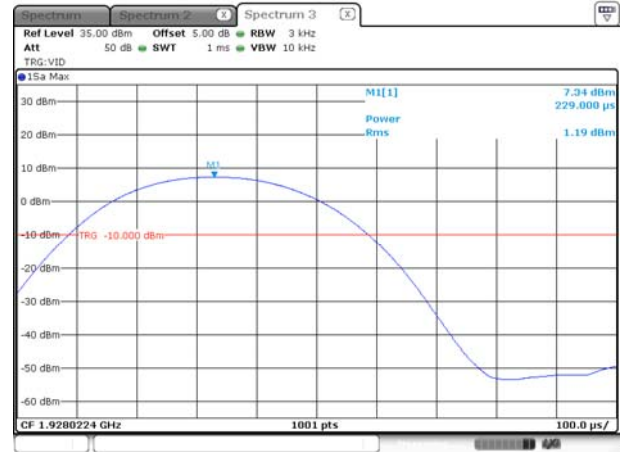

Date: 2 JAN 2018 10:53:15

## A.4 Emission bandwidth


### Test Data

| Channel | Emission Bandwidth B (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|----------------------------|------------------------------|
| Low     | 1.3169                     | 1.2012                       |
| Middle  | 1.3169                     | 1.1939                       |
| High    | 1.3965                     | 1.1939                       |


### Test plots

#### Emission Bandwidth B

##### LOW CHANNEL

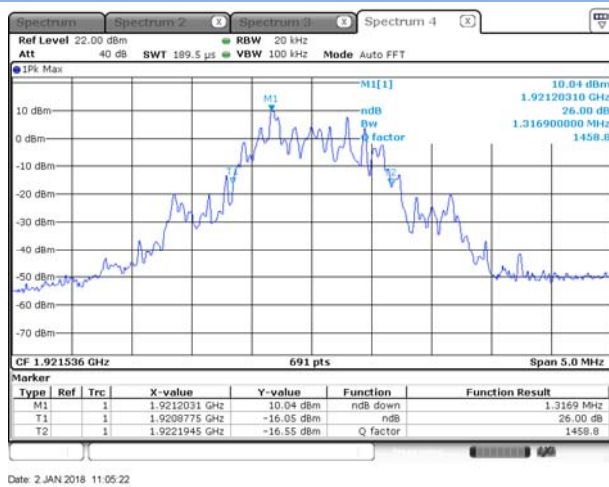

##### MIDDLE CHANNEL

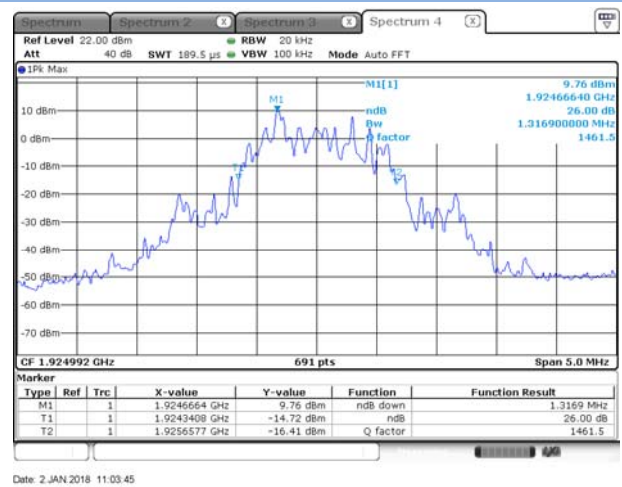

##### HIGH CHANNEL




## 99% Occupied Bandwidth (MHz)

### LOW CHANNEL




Date: 2 JAN 2018 11:05:39

### MIDDLE CHANNEL

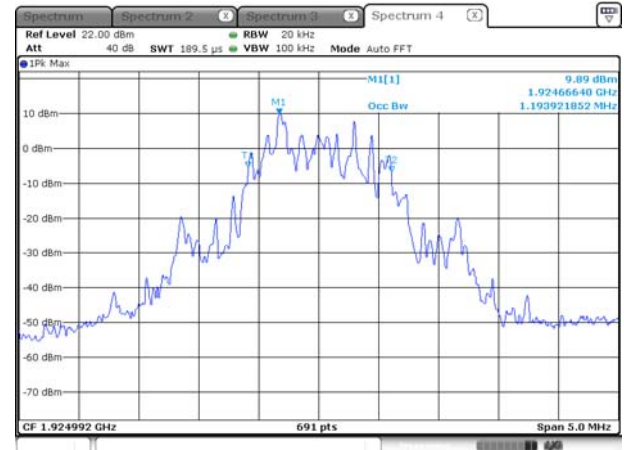

Date: 2 JAN 2018 11:03:24

### HIGH CHANNEL

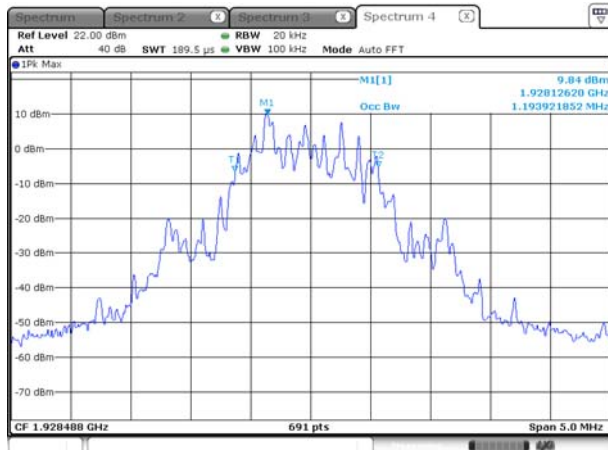


Date: 2 JAN 2018 10:57:01

## A.5 Emission Inside and Out the sub-band

### Test Plots


#### In-band emissions

##### LOW CHANNEL

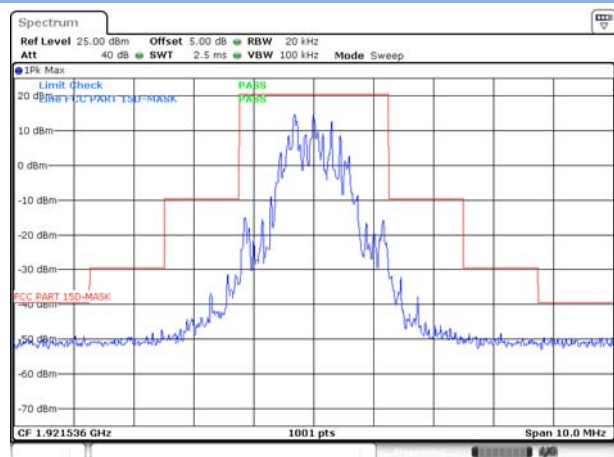


Date: 2 JAN 2018 11:10:13

##### MIDDLE CHANNEL

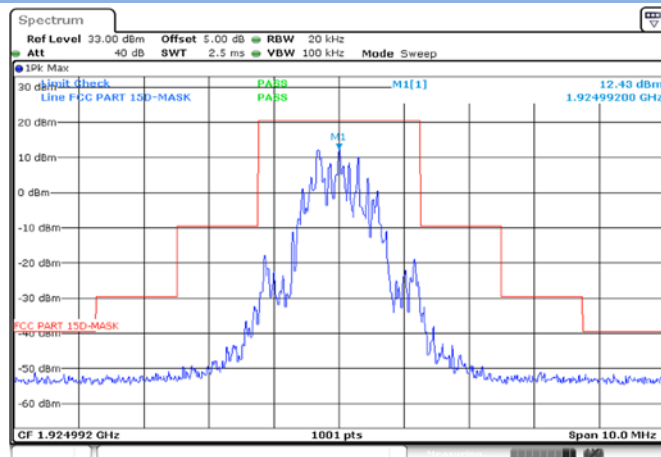

Date: 8 FEB 2018 19:55:14

##### HIGH CHANNEL

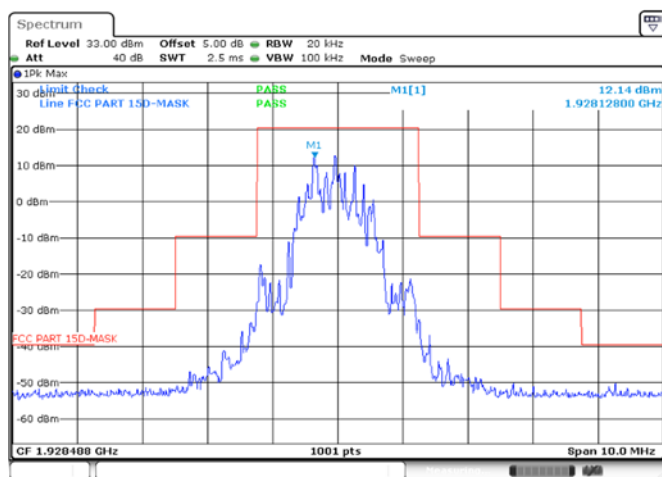


Date: 8 FEB 2018 19:20:50

## Out of band emissions


### Low CHANNEL

30MHz – 1.91G

1.91G – 1.92G

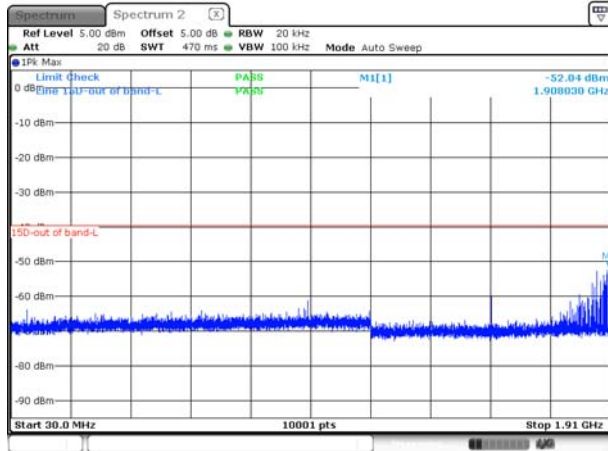


Date: 2 JAN 2018 11:19:56

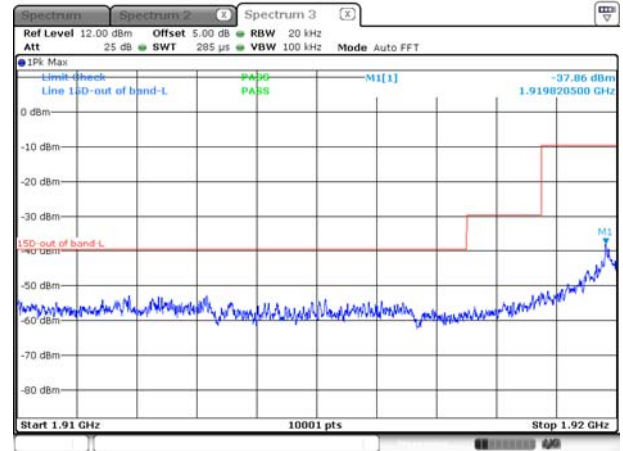


Date: 2 JAN 2018 11:22:15

1.93G – 1.94G

1.94G – 20G

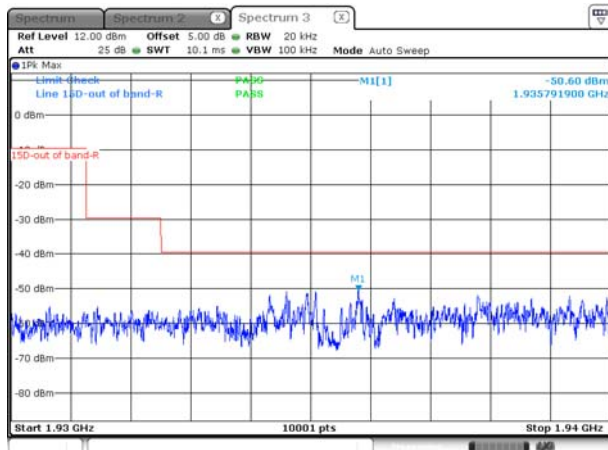

Date: 2 JAN 2018 11:24:19

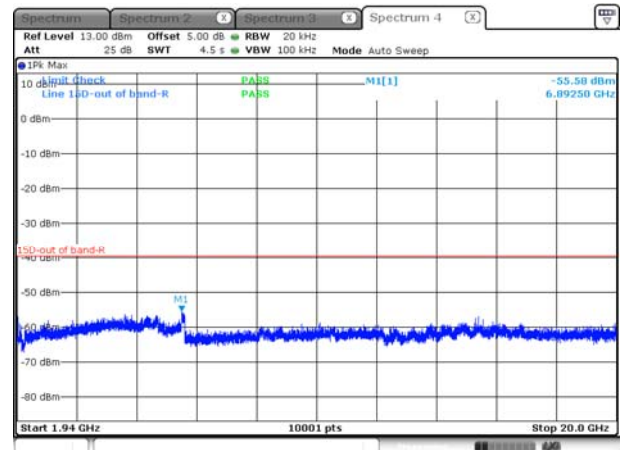


Date: 2 JAN 2018 11:26:09


# Middle CHANNEL

30MHz – 1.91G

1.91G – 1.92G

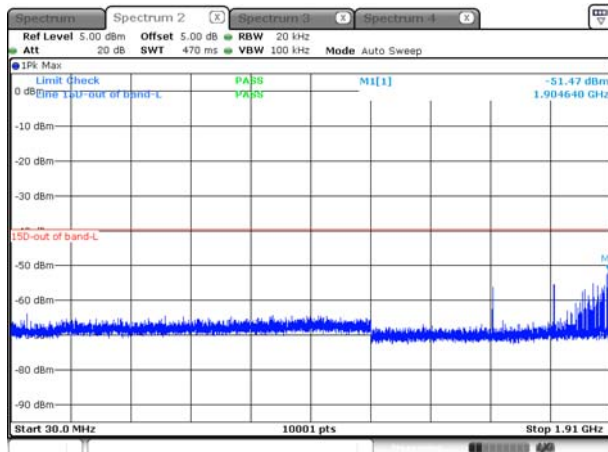


Date: 2 JAN 2018 11:28:45

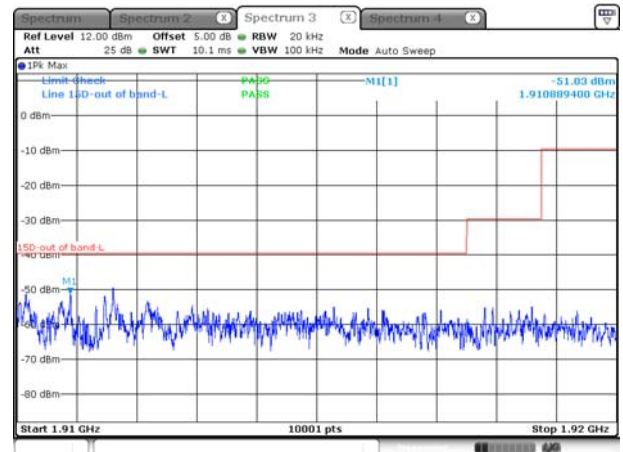


Date: 2 JAN 2018 11:28:30

1.93G – 1.94G

1.94G – 20G

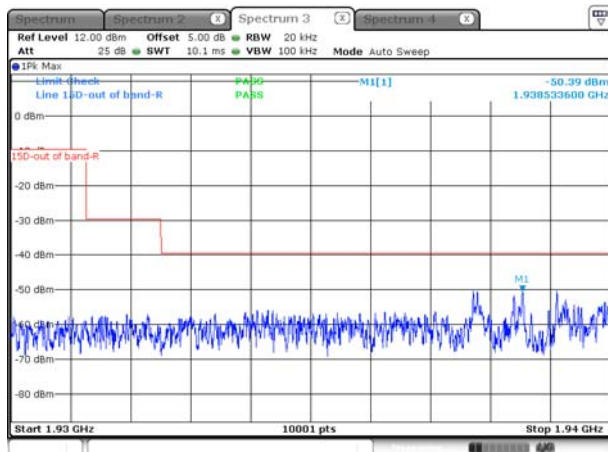

Date: 2 JAN 2018 11:27:33

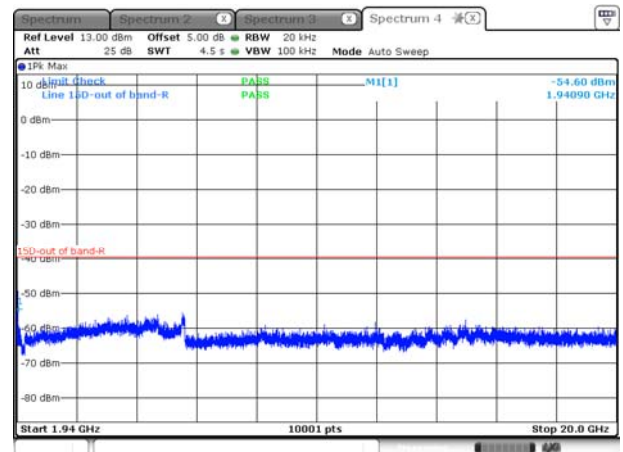


Date: 2 JAN 2018 11:27:09


# High CHANNEL

30MHz – 1.91G

1.91G – 1.92G

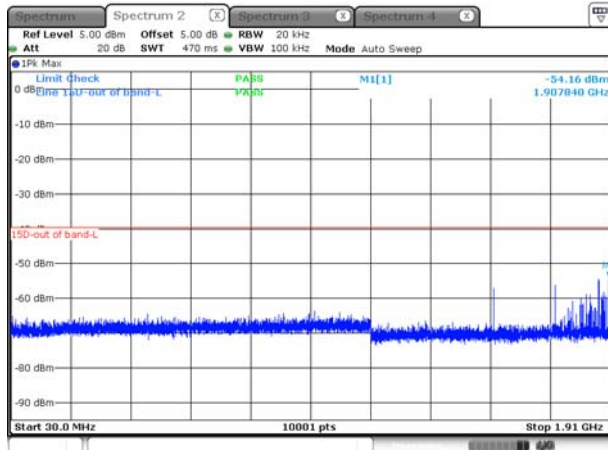


Date: 2 JAN 2018 11:29:11

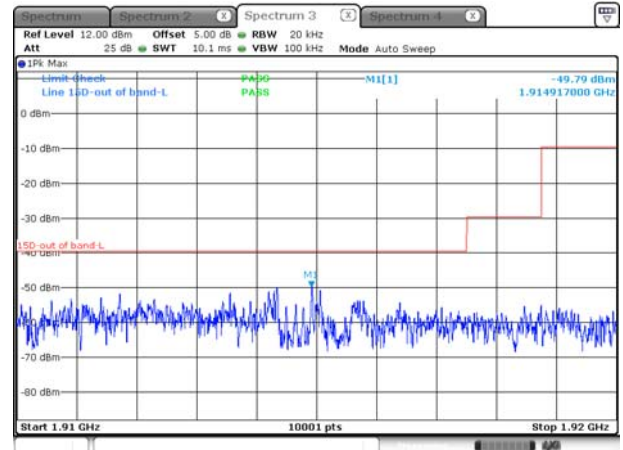


Date: 2 JAN 2018 11:29:24

1.93G – 1.94G

1.94G – 20G

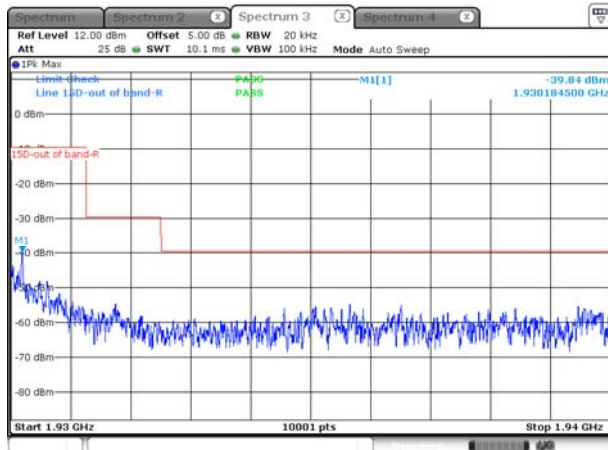

Date: 2 JAN 2018 11:30:13

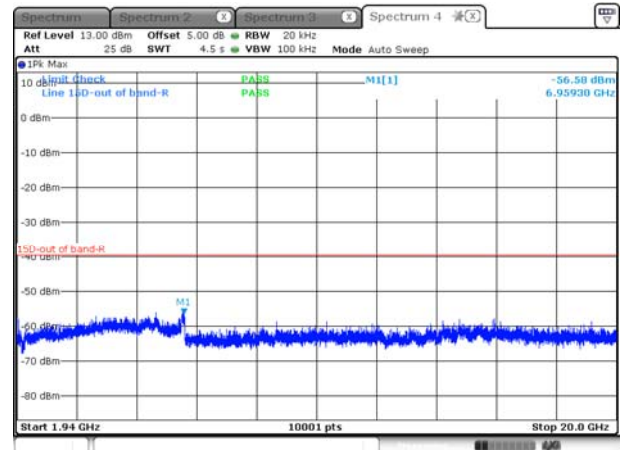

Date: 2 JAN 2018 11:30:27

## A.6 Carrier Frequency Stability

### Frequency Stability over Power Supply Voltage at Nominal Temperature

Note: Deviation ppm = ((Mean - Measured Frequency) / Mean) x 106

| Voltage      | Channel Frequency | Difference | Deviation | Limits  | Verdict |
|--------------|-------------------|------------|-----------|---------|---------|
| Tnom         | Middle            | -4 kHz     | 2.08 ppm  | ±10 ppm | Pass    |
| 85% of Vnom  | Middle            | -4 kHz     | 2.08 ppm  | ±10 ppm | Pass    |
| 115% of Vnom | Middle            | 3 kHz      | 1.60 ppm  | ±10 ppm | Pass    |

### Frequency Stability over Temperature at Nominal Power Supply Voltage

| Temp.        | Channel Frequency | Difference | Deviation | Limits  | Verdict |
|--------------|-------------------|------------|-----------|---------|---------|
| Vnom         | Middle            | 3 kHz      | 1.60 ppm  | ±10 ppm | Pass    |
| -20% of Tnom | Middle            | -3 kHz     | 1.60 ppm  | ±10 ppm | Pass    |
| +50% of Tnom | Middle            | 2 kHz      | 1.04 ppm  | ±10 ppm | Pass    |

## A.7 Frame repetition Stability, period and jitter

The Frame Repetition Stability is measured with the CMD60. The Frame Repetition Stability is 3 times the standard deviation.

| Channel | Standard Deviation (ppm) | Frame Repetition (ppm) | The Limit of Frame Repetition Stability (ppm) | Verdict |
|---------|--------------------------|------------------------|-----------------------------------------------|---------|
| Middle  | 0.2                      | 0.6                    | ±10                                           | Pass    |

| Channel | Frame Period (ms) | Max Jitter (μs) | 3xStandard Deviation of Jitter (μs) | Limit (μs) |                           | Verdict |
|---------|-------------------|-----------------|-------------------------------------|------------|---------------------------|---------|
|         |                   |                 |                                     | Max Jitter | 3 times St.Dev. of Jitter |         |
| Middle  | 10                | 0.007           | 0.006                               | 25         | 12.5                      | Pass    |

Max Jitter =  $(1/(\text{Frame Period} + \text{Pk-Pk})/2) - (1/\text{Frame Period})$ , when Pk-Pk and Frame Period are in Hz.

$3 \times \text{St. Dev. Jitter} = 3 \times (1/(\text{Frame Period} + \text{St. Dev})) - (1/\text{St. Dev}) \times 10^6$

## A.8 Monitoring the time

EUT monitors the combined time and spectrum window prior to initiation of transmission. The observation results as below

| Channel Selection                                                                                                                                                                                                                           | Observation result     | Verdict |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------|
| 1. Apply the interference on f1 at level $T_U + U_M$ , and no interference on f2. Initiate transmission and verify the transmission on f2.                                                                                                  | EUT transmission on f2 | Pass    |
| 2. Apply interference on f2 at a level of $T_U + U_M$ , in-band, and immediately remove all interference from f1 and immediately (but not sooner than 20 ms after the interference on f2 is applied) cause the EUT to attempt transmission. | EUT transmission on f1 | Pass    |

## A.9 Monitoring threshold

### Calculation of Monitoring Threshold Limit:

Lower Threshold:

$$TL < = 15 \log B - 184 + 30 - P_{EUT} \text{ (dBm)}$$

Upper Threshold:

$$TU < = 15 \log B - 184 + 50 - P_{EUT} \text{ (dBm)}$$

B is measured Emission Bandwidth in Hz

$P_{EUT}$  is measured Transmitter Power in dBm

The Lower Threshold is applicable for systems which have defined less than 40 duplex system access channels. The Upper Threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

Upper Threshold has been removed from FCC 15D but still exists in the current Industry Canada RSS-213.

### Test Data:

| Monitor Threshold | Measured Level (dBm) | Limit(dBm)             | Verdict             |
|-------------------|----------------------|------------------------|---------------------|
| Lower threshold   | N/A                  | Lower threshold + 6 dB | N/A <sup>Note</sup> |
| Upper threshold   | N/A                  | Upper threshold + 6 dB | N/A                 |

Note: For the EUT which support LIC there is no need to measure lower threshold because it is automatically met by LIC procedure

## A.10 Maximum transmit period

### Test Data:

| Test ref. to ANSI C63.17: 2013 clause 8.2.2             | Observation result (H) | Limit(H) | Verdict |
|---------------------------------------------------------|------------------------|----------|---------|
| Transmission duration on same time and frequency window | 2                      | 8        | Pass    |

## A.11 Acknowledgment system

| Test ref. to ANSI C63.17: 2013 clause 8.2.1      | Observation result (s) | Limit(s) | Verdict |
|--------------------------------------------------|------------------------|----------|---------|
| Initial transmission without acknowledgements    | 0.54                   | 1        | Pass    |
| Transmission time after loss of acknowledgements | 8                      | 30       | Pass    |

## A.12 Least Interfered Channel, LIC

Calculation of Monitoring Threshold Limit:

Lower Threshold:

$$TL < = 15 \log B - 184 + 30 - P_{EUT} \text{ (dBm)}$$

B is measured Emission Bandwidth in Hz

$P_{EUT}$  is measured Transmitter Power in dBm

Test Data:

| ANSI C63.17 clause 7.3.2 ref.   | EUT transmits on | Verdict |
|---------------------------------|------------------|---------|
| $f1$ TL + 13 dB, $f2$ TL + 6 dB | $f2$             | Pass    |
| $f1$ TL + 6 dB, $f2$ TL + 13 dB | $f1$             | Pass    |
| $f1$ TL + 7 dB, $f2$ TL         | $f2$             | Pass    |
| $f1$ TL, $f2$ at TL+ 7 dB       | $f1$             | Pass    |

## A.13 Random waiting

Test Data:

Random Waiting is not implemented in the EUT.

| Conditions                                      | Transmits Channel | Verdict |
|-------------------------------------------------|-------------------|---------|
| Interference applied at operating Channel, $f1$ | $f2$              | Pass    |

## A.14 Monitoring bandwidth and reaction time

### Monitoring bandwidth:

This test is only required if a dedicated monitoring receiver is used. If the test is not carried out the manufacturer shall declare and provide evidence that the monitoring is made through the radio receiver used for communication.

The test is passed if either the Simple Compliance Test or the More Detailed Test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

The More Detailed Test must be pass at both the -6dB and -12 dB points if the Simple Compliance Test fails.

### Test Data:

| Test performed                             | Observation result | Verdict |
|--------------------------------------------|--------------------|---------|
| Simple Compliance test, at $\pm 30\%$ of B | No transmissions   | Pass    |
| More Detailed Test, at -6 dB points        | N/A                | N/A     |
| More Detailed Test, at -12 dB points       | N/A                | N/A     |

Note 1: The tested EUT uses the same receiver for monitoring and communication, this test is therefore not required.

Note 2: The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended Transmission.

### Reaction time:

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency.

Time-synchronized pulsed interference was then applied on the carrier at pulsed levels TU + UM to check that the EUT does not transmit. The level was raised 6 dB for part d) with 35  $\mu$ s pulses.

The pulses are synchronized with the EUT timeslots and applied cantered within all timeslots.

### Test Data:

| Test performed                                                                                          | Observation result | Verdict |
|---------------------------------------------------------------------------------------------------------|--------------------|---------|
| c) > largest of 50 $\mu$ s and $50 \cdot \text{SQRT}(1.25/B)$                                           | No transmissions   | Pass    |
| d) > largest of 35 $\mu$ s and $35 \cdot \text{SQRT}(1.25/B)$ , and with interference level raised 6 dB | No transmissions   | Pass    |

Notes: Since B is larger than 1.25 MHz the test was performed with pulse lengths of 50  $\mu$ s and 35  $\mu$ s.

## A.15 Monitoring antenna

EUT uses the same antenna used for transmission and monitoring that is in compliance meet above provision.

## A.16 Duplex system LBT

Not tested.

## A.17 Co-located device LBT

Not appropriate, as the system always monitor both the transmit and receive time/spectrum windows, it is not a co-located device.

## A.18 Fair access

Not tested. The tested EUT does not implement this provision. See manufacturer's declaration.

## A.19 Radiated Emission

Note1: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note2: The EUT is working in the Normal link mode below 1 GHz.

Note3: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test data:

| 30 MHz to 1 GHz, ANT H |                 |                  |             |                |             |          |           |             |            |         |
|------------------------|-----------------|------------------|-------------|----------------|-------------|----------|-----------|-------------|------------|---------|
| No.                    | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT        | Verdict |
| 1                      | 48.425          | 10.03            | -13.30      | 30.0           | 19.97       | Peak     | 352.00    | 300         | Horizontal | Pass    |
| 2                      | 102.489         | 9.38             | -15.17      | 33.5           | 24.12       | Peak     | 295.00    | 400         | Horizontal | Pass    |
| 3                      | 171.100         | 10.20            | -17.48      | 33.5           | 23.30       | Peak     | 61.00     | 300         | Horizontal | Pass    |
| 4                      | 280.440         | 14.90            | -12.82      | 36.0           | 21.10       | Peak     | 249.00    | 300         | Horizontal | Pass    |
| 5                      | 326.988         | 18.63            | -11.64      | 36.0           | 17.37       | Peak     | 61.00     | 400         | Horizontal | Pass    |
| 6                      | 669.070         | 21.31            | -4.46       | 36.0           | 14.69       | Peak     | 69.00     | 100         | Horizontal | Pass    |

| 30 MHz to 1 GHz, ANT V |                 |                  |             |                |             |          |           |             |          |         |
|------------------------|-----------------|------------------|-------------|----------------|-------------|----------|-----------|-------------|----------|---------|
| No.                    | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT      | Verdict |
| 1                      | 30.970          | 26.07            | -16.82      | 30.0           | 3.93        | Peak     | 22.00     | 200         | Vertical | Pass    |
| 2                      | 64.426          | 21.04            | -15.63      | 30.0           | 8.96        | Peak     | 223.00    | 200         | Vertical | Pass    |
| 3                      | 204.071         | 19.14            | -14.92      | 33.5           | 14.36       | Peak     | 193.00    | 100         | Vertical | Pass    |
| 4                      | 294.501         | 20.45            | -12.48      | 36.0           | 15.55       | Peak     | 148.00    | 100         | Vertical | Pass    |
| 5                      | 330.382         | 18.68            | -11.39      | 36.0           | 17.32       | Peak     | 131.00    | 100         | Vertical | Pass    |
| 6                      | 701.072         | 20.07            | -4.16       | 36.0           | 15.93       | Peak     | 210.00    | 100         | Vertical | Pass    |

| 1GHz to 20 GHz channel 0 ANT V |                 |                  |             |                |             |          |           |             |            |         |
|--------------------------------|-----------------|------------------|-------------|----------------|-------------|----------|-----------|-------------|------------|---------|
| No.                            | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT        | Verdict |
| 1                              | 1279.000        | 41.62            | -5.64       | 74.0           | 32.38       | Peak     | 142.00    | 150         | Vertical   | Pass    |
| 2                              | 1928.500        | 99.41            | -4.05       | 74.0           | -25.41      | Peak     | 142.00    | 150         | Vertical   | N/A     |
| 3                              | 2874.500        | 45.95            | 0.86        | 74.0           | 28.05       | Peak     | 321.30    | 150         | Vertical   | Pass    |
| 4                              | 5007.000        | 45.39            | 12.82       | 74.0           | 28.61       | Peak     | 154.80    | 150         | Vertical   | Pass    |
| 5                              | 7711.563        | 47.49            | 14.32       | 74.0           | 26.51       | Peak     | 202.60    | 150         | Vertical   | Pass    |
| 6                              | 11894.688       | 50.37            | 19.17       | 74.0           | 23.63       | Peak     | 6.30      | 150         | Vertical   | Pass    |
| 1GHz to 20 GHz channel 0 ANT H |                 |                  |             |                |             |          |           |             |            |         |
| No.                            | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT        | Verdict |
| 1                              | 1735.000        | 43.88            | -5.18       | 74.0           | 30.12       | Peak     | 328.70    | 150         | Horizontal | Pass    |
| 2                              | 1928.500        | 101.74           | -4.05       | 74.0           | -27.74      | Peak     | 296.50    | 150         | Horizontal | N/A     |
| 3                              | 2892.000        | 47.59            | 0.90        | 74.0           | 26.41       | Peak     | 287.60    | 150         | Horizontal | Pass    |
| 4                              | 3857.000        | 44.75            | 8.64        | 74.0           | 29.25       | Peak     | 7.00      | 150         | Horizontal | N/A     |
| 5                              | 6571.000        | 46.38            | 13.54       | 74.0           | 27.62       | Peak     | 196.40    | 150         | Horizontal | Pass    |
| 6                              | 9461.000        | 49.58            | 18.46       | 74.0           | 24.42       | Peak     | 45.20     | 150         | Horizontal | Pass    |

| 1GHz to 20 GHz channel2 ANT V |                 |                  |             |                |             |          |           |             |          |         |
|-------------------------------|-----------------|------------------|-------------|----------------|-------------|----------|-----------|-------------|----------|---------|
| No.                           | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT      | Verdict |
| 1                             | 1283.000        | 42.62            | -5.24       | 74.0           | 31.38       | Peak     | 152.00    | 150         | Vertical | Pass    |
| 2                             | 1925.050        | 98.54            | -4.03       | 74.0           | -24.54      | Peak     | 157.00    | 150         | Vertical | N/A     |
| 3                             | 2886.500        | 46.95            | 0.87        | 74.0           | 27.05       | Peak     | 346.30    | 150         | Vertical | Pass    |
| 4                             | 5747.000        | 47.32            | 13.16       | 74.0           | 26.68       | Peak     | 49.50     | 150         | Vertical | Pass    |
| 5                             | 8467.500        | 48.49            | 14.32       | 74.0           | 25.51       | Peak     | 242.60    | 150         | Vertical | Pass    |
| 6                             | 13425.688       | 50.52            | 19.17       | 74.0           | 23.48       | Peak     | 75.40     | 150         | Vertical | Pass    |

| 1 GHz to 20 GHz channel2 ANT H |                 |                  |             |                |             |          |           |             |            |         |
|--------------------------------|-----------------|------------------|-------------|----------------|-------------|----------|-----------|-------------|------------|---------|
| No.                            | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT        | Verdict |
| 1                              | 1451.000        | 42.64            | -5.79       | 74.0           | 31.36       | Peak     | 90.20     | 150         | Horizontal | Pass    |
| 2                              | 1925.050        | 101.71           | -4.05       | 74.0           | -27.71      | Peak     | 162.40    | 150         | Horizontal | N/A     |
| 3                              | 2409.000        | 46.73            | -4.27       | 74.0           | 27.27       | Peak     | 156.60    | 150         | Horizontal | Pass    |
| 4                              | 10148.750       | 43.05            | 16.72       | 74.0           | 30.95       | Peak     | 125.90    | 150         | Horizontal | Pass    |
| 5                              | 11243.250       | 42.82            | 17.55       | 74.0           | 31.18       | Peak     | 203.90    | 150         | Horizontal | Pass    |
| 6                              | 13649.500       | 46.53            | 19.08       | 74.0           | 27.47       | Peak     | 105.00    | 150         | Horizontal | Pass    |

| 1 GHz to 20 GHz channel 4 ANT V |                 |                  |             |                |             |          |           |             |            |         |
|---------------------------------|-----------------|------------------|-------------|----------------|-------------|----------|-----------|-------------|------------|---------|
| No.                             | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT        | Verdict |
| 1                               | 1394.500        | 43.01            | -6.25       | 74.0           | 30.99       | Peak     | 314.70    | 150         | Vertical   | Pass    |
| 2                               | 1921.500        | 99.65            | -5.19       | 74.0           | -25.65      | Peak     | 75.60     | 150         | Vertical   | N/A     |
| 3                               | 2491.000        | 44.72            | -3.29       | 74.0           | 29.28       | Peak     | 325.40    | 150         | Vertical   | Pass    |
| 4                               | 12618.250       | 45.40            | 17.88       | 74.0           | 28.60       | Peak     | 245.30    | 150         | Vertical   | Pass    |
| 5                               | 14166.500       | 47.72            | 20.82       | 74.0           | 26.28       | Peak     | 188.30    | 150         | Vertical   | Pass    |
| 6                               | 15313.250       | 49.68            | 21.19       | 74.0           | 24.32       | Peak     | 0.00      | 150         | Vertical   | Pass    |
| 1 GHz to 20 GHz channel 4 ANT H |                 |                  |             |                |             |          |           |             |            |         |
| No.                             | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (o) | Height (cm) | ANT        | Verdict |
| 1                               | 1637.000        | 43.13            | -6.10       | 74.0           | 30.87       | Peak     | 180.30    | 150         | Horizontal | Pass    |
| 2                               | 1921.500        | 101.47           | -5.24       | 74.0           | -27.47      | Peak     | 251.90    | 150         | Horizontal | N/A     |
| 3                               | 2391.000        | 44.65            | -3.29       | 74.0           | 29.35       | Peak     | 75.30     | 150         | Horizontal | Pass    |
| 4                               | 11834.500       | 44.33            | 17.67       | 74.0           | 29.67       | Peak     | 223.70    | 150         | Horizontal | Pass    |
| 5                               | 13641.250       | 46.24            | 19.20       | 74.0           | 27.76       | Peak     | 159.20    | 150         | Horizontal | Pass    |
| 6                               | 15225.250       | 49.71            | 21.12       | 74.0           | 24.29       | Peak     | 209.50    | 150         | Horizontal | Pass    |

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document “BL-SZ17C0361-AR.pdf”.

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document “BL-SZ17C0361-AW.pdf”.

--END OF REPORT--