

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2604U27448E-RF-00G
FCC ID: YZZGRP2615PRO

Test Standard (s)

FCC PART 15C

Sample Description

Product Name: Carrier-Grade HD IP Phone
Model No.: GRP2615 Pro
Trade Mark: GRANDSTREAM
Received Date: 2026-06-17
Report Date: 2026-09-10

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Amanda Wei

Amanda Wei
Engineer

Approved By:

Bob Liao

Bob Liao
Supervisor

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming)

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
SPECIAL ACCESSORIES AND EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD.....	10
ANTENNA CONNECTOR CONSTRUCTION	10
AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP	11
TEST PROCEDURE	11
CALCULATION	12
TEST DATA	12
RADIATED EMISSIONS	15
APPLICABLE STANDARD.....	15
EUT SETUP.....	15
EMI TEST RECEIVER.....	16
TEST PROCEDURE	16
CALCULATION	17
TEST DATA	17
20DB EMISSION BANDWIDTH.....	26
APPLICABLE STANDARD.....	26
TEST PROCEDURE	26
TEST DATA	26
EXHIBIT A-EUT PHOTOGRAPHS	28
EXHIBIT B-TEST SETUP PHOTOGRAPHS	29

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2604U27448E-RF-00G	Original Report	2026-09-10

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Carrier-Grade HD IP Phone
Tested Model	GRP2615 Pro
Voltage Range [#]	DC 5V from adapter or DC 48V from POE
Adapter 1 Information [#]	Model:DCT12W050200US-A2 Input:100-240 V~ 50/60Hz 0.3A Max Output:5.0V $\Rightarrow$ 2.0A
Adapter 2 Information [#]	Model: GQ12-050200-AU Input: 100-240V~ 50/60Hz 0.4A max Output: 5.0V $\Rightarrow$ 2.0A
Adapter 3 Information [#]	Model: GLH0502000 Input: 100-240V~ 50/60Hz 0.5A max Output: 5.0V $\Rightarrow$ 2.0A 10.0W
Note: The EUT powered by adapter or POE.	

Frequency Range	WPT: 111-205kHz
Modulation Technique [#]	ASK
Antenna Type	Coil
Maximum E-field Strength(Peak) (actual test result)	67.52 dB μ V/m@3m
Wireless Output Power [#]	5 Watts
Sample Serial Number	3OJN-2 (Assigned by BACL, Shenzhen, Guangming)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of EUT with FCC rules, section 15.203, 15.205, 15.207 and 15.209.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming) to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
Unwanted Emission, conducted		1.2 dB
AC Power Lines Conducted Emissions		2.7 dB
Emissions, Radiated	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
Temperature		1 °C
Humidity		2 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing by manufacturer.

The EUT was tested under full load. Keep the EUT in continuous transmitting with modulation.

According to 15B report test result, the worst case (Adapter 2: Model: GQ12-050200-AU) was tested for AC Line Conducted Emissions, and the worst case (Adapter 3: Model: GLH0502000) was tested for Radiated Spurious Emissions(Below 1GHz) in this report.

Special Accessories and Equipment Modifications

No special accessories or modifications were used on the device under test (EUT) during the test.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	USB Disk1	Unknown	Unknown
Unknown	USB Disk2	Unknown	Unknown
Unknown	Earphone	Unknown	Unknown
GRANDSTREAM	Handset	Unknown	Unknown
Lenovo	Laptop	ThinkPad T470	PF-17P19A
GRANDSTREAM	IP phone	GXV3480	Unknown
GRANDSTREAM	Cordless Handset	BTH11R	Unknown

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
DC Cable	NO	1.5	Adapter	EUT
RJ45 Cable	NO	5.0	EUT	Laptop
RJ45 Cable	NO	5.0	EUT	IP phone
Audio cable	NO	1.2	EUT	Earphone
Coiled Handset Cord	NO	0.4	EUT	Handset

Block Diagram of Test Setup

For Conducted Emission:

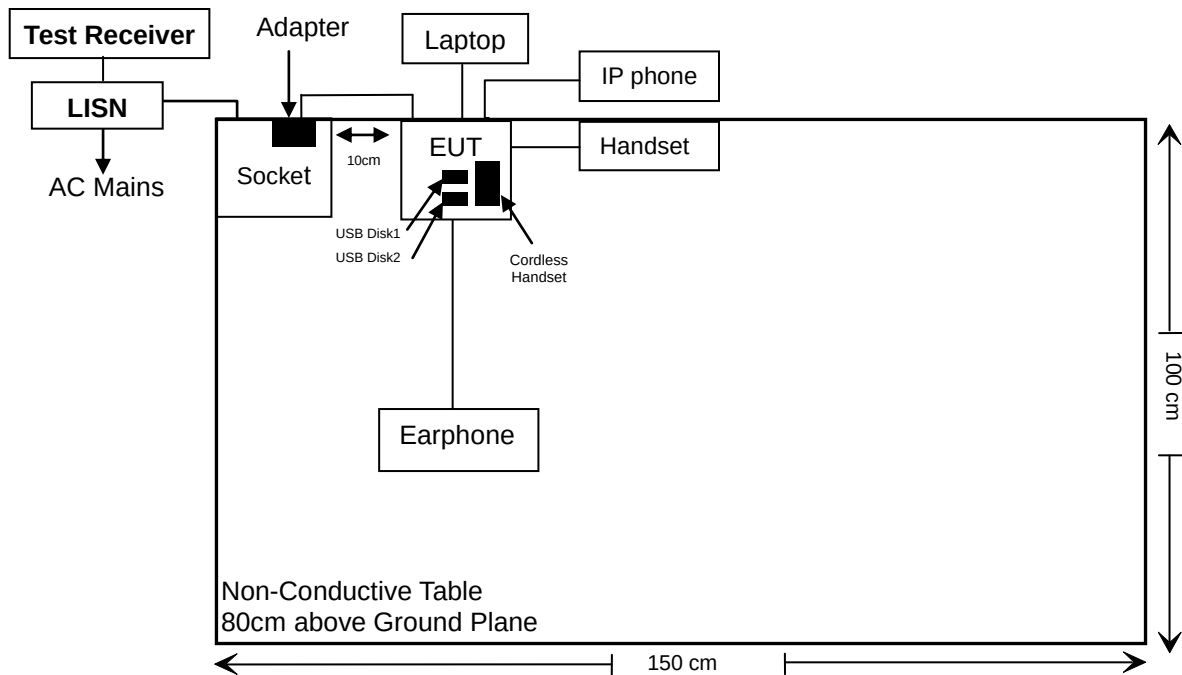

For Radiated Emission Below 1GHz:

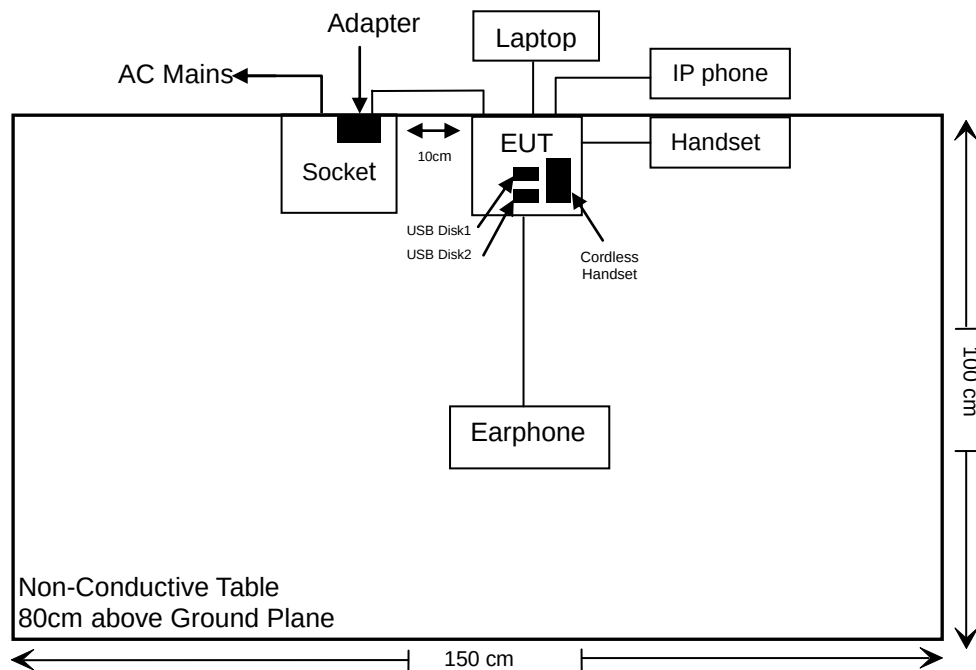

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.209 §15.205(a)	Radiated Emissions	Compliance
§15.215(c)	20dB Emission Bandwidth	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2026/05/07	2027/05/06
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2026/05/07	2027/05/06
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2026/05/07	2027/05/06
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100312	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.17	N0350	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test (Below 1GHz)/ 20dB Emission Bandwidth					
Rohde & Schwarz	Test Receiver	ESR	102725	2026/05/07	2027/05/06
SONOMA INSTRUMENT	Amplifier	310N	186131	2026/01/20	2027/01/19
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.13	N300	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.14	N800	2026/05/07	2027/05/06
BACL	LOOP ANTENNA	1313-1A	3110711	2024/01/16	2027/01/15
Test Software: e3 191218 (V9)					

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

Antenna Connector Construction

The EUT has one internal coil antenna, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

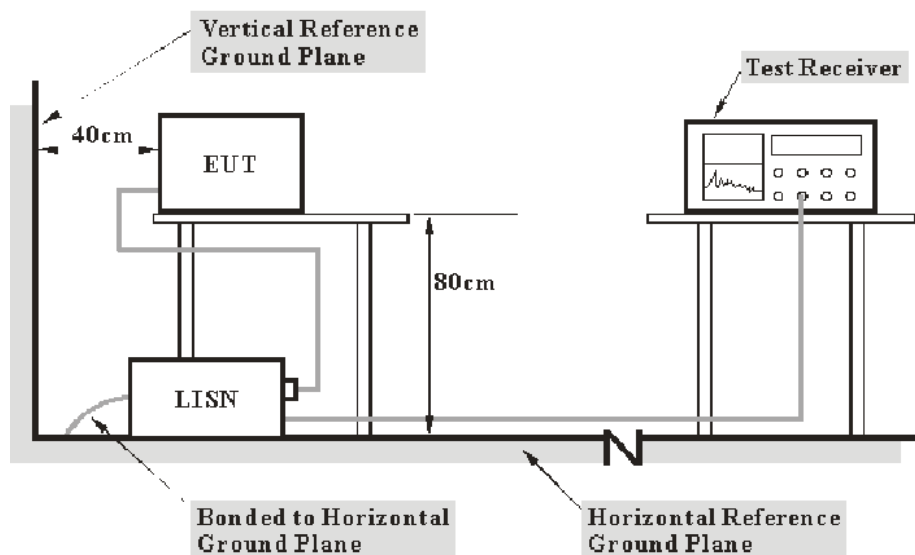

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2020. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + 10\text{dB Attenuation(Limiter)}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data


Environmental Conditions

Temperature:	24.6 °C
Relative Humidity:	49 %
ATM Pressure:	100.1 kPa
Test Engineer:	Homelander Dai
Test Date:	2026-07-07
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note: Choose the adapter 2 for test.


AC 120V/60Hz, Line:

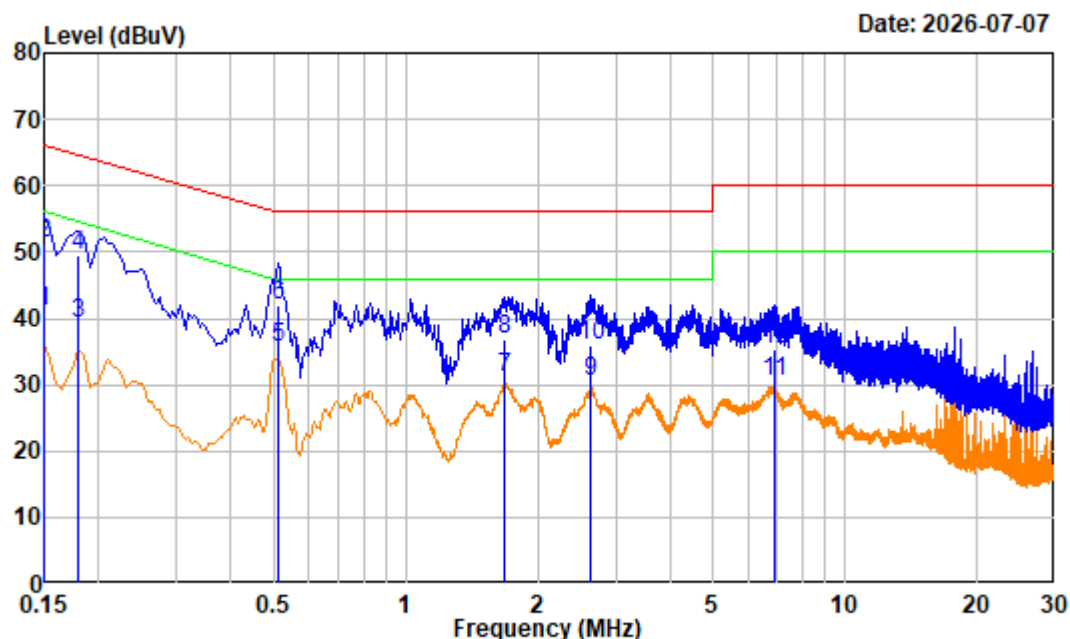

Site : Shielding Room
 Condition : Line
 Job No. : 2604U27448E-RF
 Test Mode : WPT Transmitting
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	19.80	21.30	41.10	56.00	-14.90	Average
2	0.150	19.80	31.57	51.37	66.00	-14.63	QP
3	0.180	19.55	19.57	39.12	54.49	-15.37	Average
4	0.180	19.55	30.07	49.62	64.49	-14.87	QP
5	0.510	19.58	16.19	35.77	46.00	-10.23	Average
6	0.510	19.58	22.37	41.95	56.00	-14.05	QP
7	1.670	20.62	10.40	31.02	46.00	-14.98	Average
8	1.670	20.62	16.31	36.93	56.00	-19.07	QP
9	2.625	20.62	9.75	30.37	46.00	-15.63	Average
10	2.625	20.62	15.36	35.98	56.00	-20.02	QP
11	6.895	20.74	9.68	30.42	50.00	-19.58	Average
12	6.895	20.74	14.73	35.47	60.00	-24.53	QP

AC 120V/60Hz, Neutral:

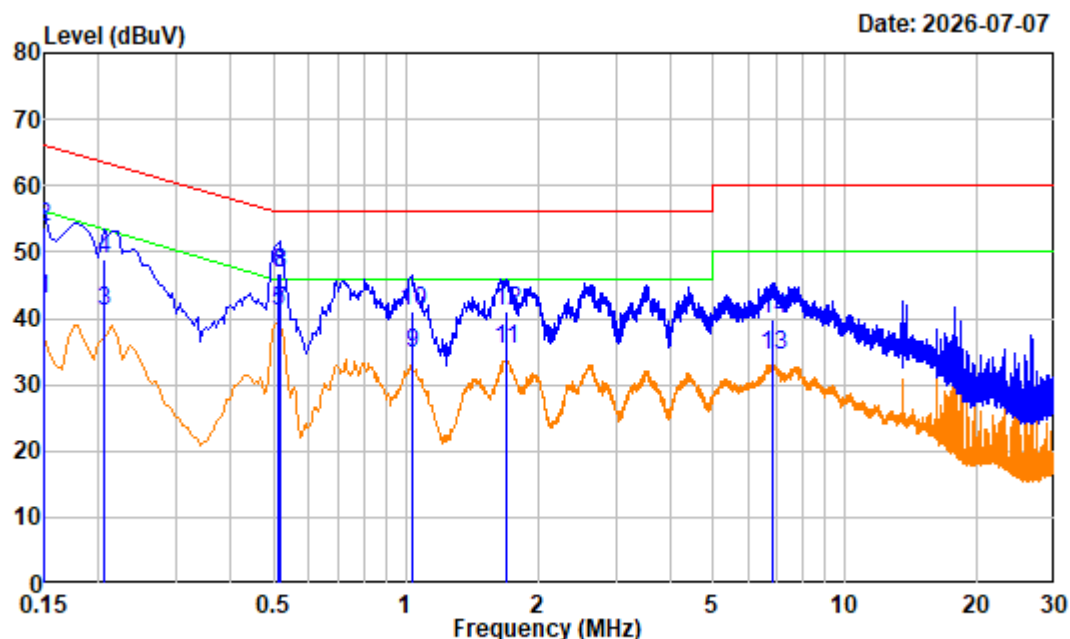

Site : Shielding Room
 Condition : neutral
 Job No. : 2604U27448E-RF
 Test Mode : WPT Transmitting
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.150	20.00	22.74	42.74	56.00	-13.26	Average
2	0.150	20.00	33.68	53.68	66.00	-12.32	QP
3	0.205	19.81	21.19	41.00	53.41	-12.41	Average
4	0.205	19.81	29.13	48.94	63.41	-14.47	QP
5	0.510	19.78	21.38	41.16	46.00	-4.84	Average
6	0.510	19.78	27.15	46.93	56.00	-9.07	QP
7	0.515	19.81	21.26	41.07	46.00	-4.93	Average
8	0.515	19.81	27.10	46.91	56.00	-9.09	QP
9	1.030	20.45	14.24	34.69	46.00	-11.31	Average
10	1.030	20.45	20.61	41.06	56.00	-14.94	QP
11	1.690	20.41	14.77	35.18	46.00	-10.82	Average
12	1.690	20.41	20.72	41.13	56.00	-14.87	QP
13	6.850	20.52	13.81	34.33	50.00	-15.67	Average
14	6.850	20.52	19.27	39.79	60.00	-20.21	QP

RADIATED EMISSIONS

Applicable Standard

FCC Part 15.209


(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

EUT Setup

9kHz - 30MHz:

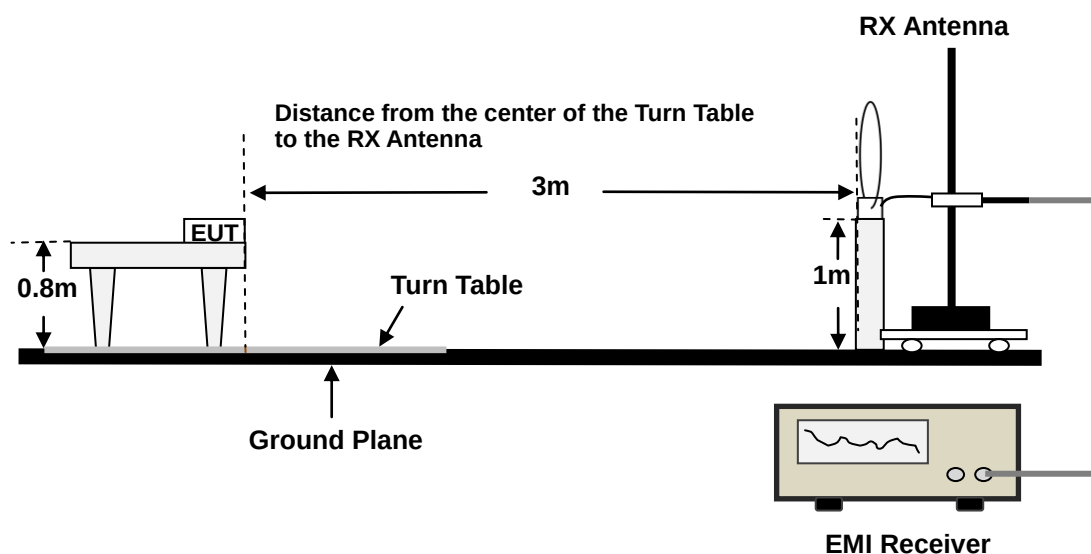

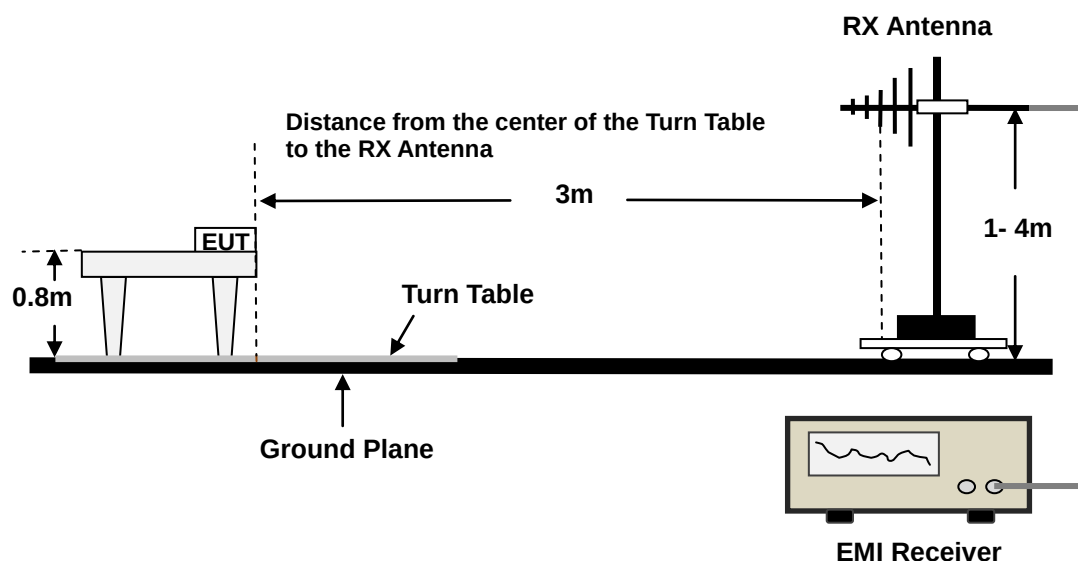30MHz - 1GHz:

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

9kHz – 1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz - 150 kHz	1 kHz	3kHz	/	PK
	/	/	200 Hz	QP
150 kHz - 30 MHz	9 kHz	30 kHz	/	PK
	/	/	600Hz	QP
30 MHz - 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120kHz	QP

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to FCC §15.209(e), the provisions in §15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

According to FCC§15.31 measurement standard (f)(2), at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

For 9kHz-30MHz, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10}\left(\frac{d_{\text{standard}}}{d_{\text{measure}}}\right)$$

Note: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

For Radiated Spurious Emissions, after pre-scan testing in the X and Z axes of orientation, the worst case as setup photos was recorded.

9kHz-1GHz


Environmental Conditions

Temperature:	25.1 to 25.3 °C
Relative Humidity:	50 to 54 %
ATM Pressure:	100.2 to 100.3 kPa
Test Engineer:	Jayden Luo
Test Date:	2026-06-30 to 2026-08-08
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.


Note: Choose the adapter 3 for test.

9kHz~30MHz:

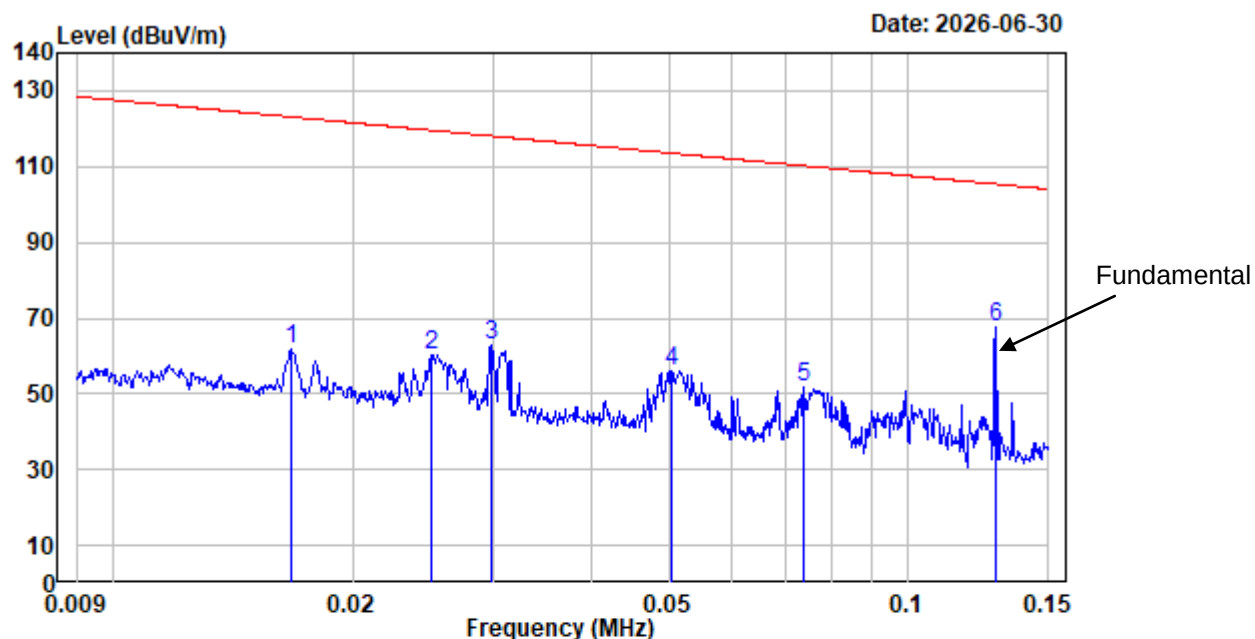


Site : chamber
 Condition : 3m
 Job No. : 2604U27448E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.017	32.83	28.90	61.73	123.12	-61.39	Peak
2	0.025	29.09	31.06	60.15	119.58	-59.43	Peak
3	0.030	27.02	35.67	62.69	118.11	-55.42	Peak
4	0.050	22.76	33.36	56.12	113.56	-57.44	Peak
5	0.074	19.41	32.46	51.87	110.24	-58.37	Peak
6	0.128	15.15	52.37	67.52	105.43	-37.91	Peak

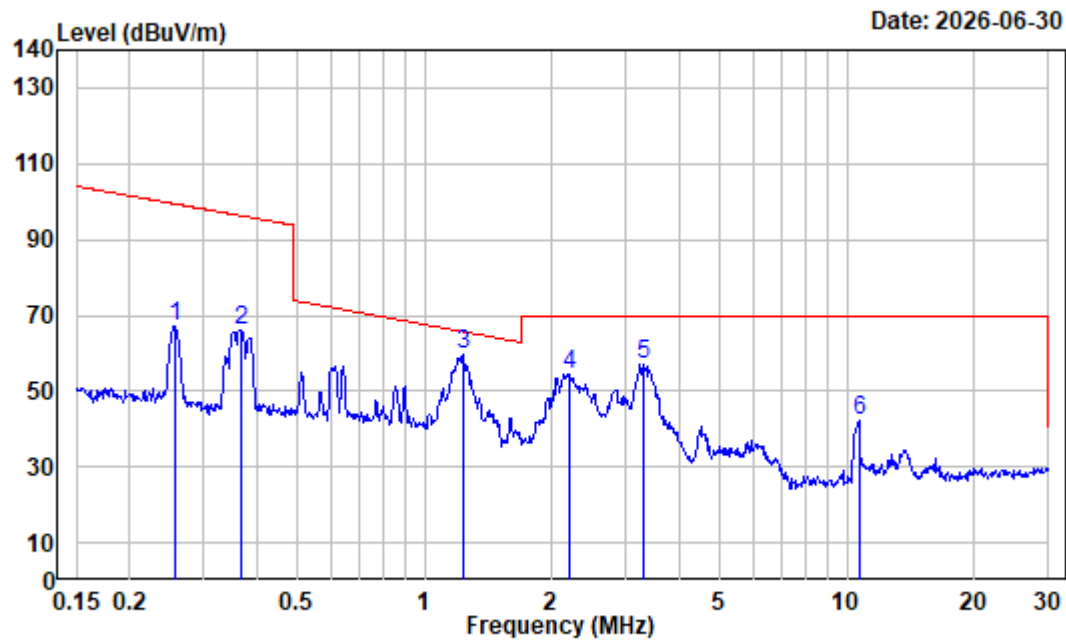


Site : chamber
 Condition : 3m
 Job No. : 2604U27448E-RF
 Polarization : Parallel Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.256	9.28	58.05	67.33	99.43	-32.10	Peak
2	0.367	5.92	60.04	65.96	96.30	-30.34	Peak
3	1.236	-2.67	62.55	59.88	65.60	-5.72	Peak
4	2.213	-5.48	59.91	54.43	69.54	-15.11	Peak
5	3.310	-5.98	63.03	57.05	69.54	-12.49	Peak
6	10.676	-5.18	47.46	42.28	69.54	-27.26	Peak

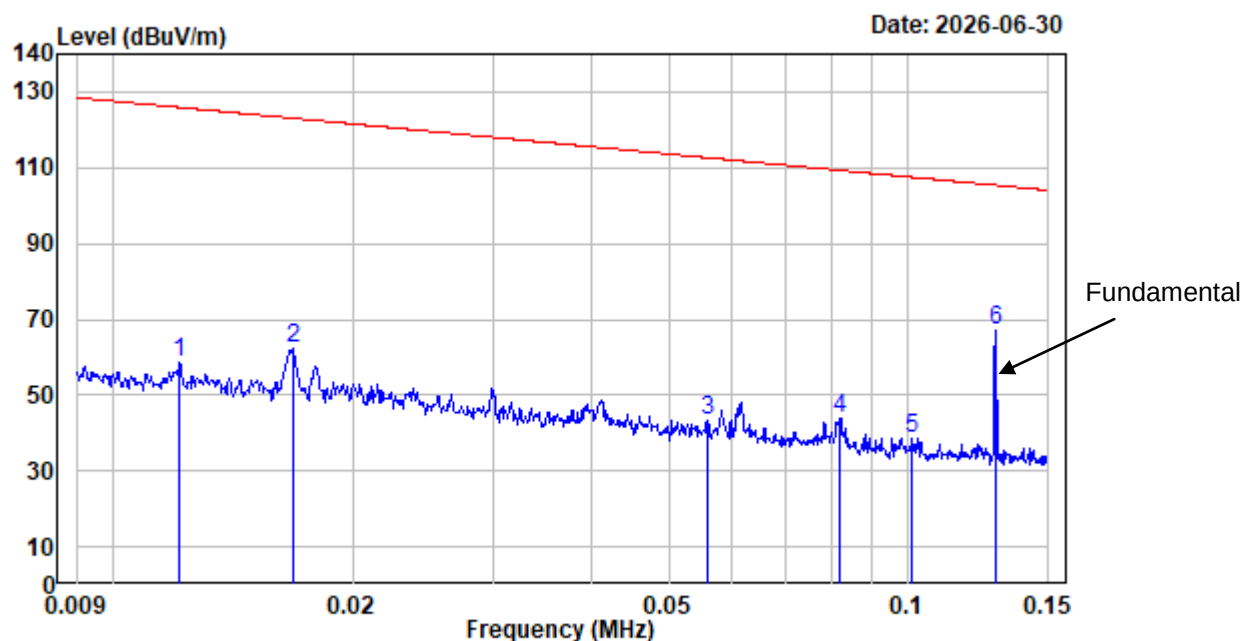


Site : chamber
 Condition : 3m
 Job No. : 2604U27448E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	34.88	23.54	58.42	125.93	-67.51	Peak
2	0.017	32.79	29.31	62.10	123.07	-60.97	Peak
3	0.056	21.97	21.60	43.57	112.66	-69.09	Peak
4	0.082	18.30	25.51	43.81	109.31	-65.50	Peak
5	0.101	16.39	22.35	38.74	107.50	-68.76	Peak
6	0.128	15.15	52.14	67.29	105.43	-38.14	Peak

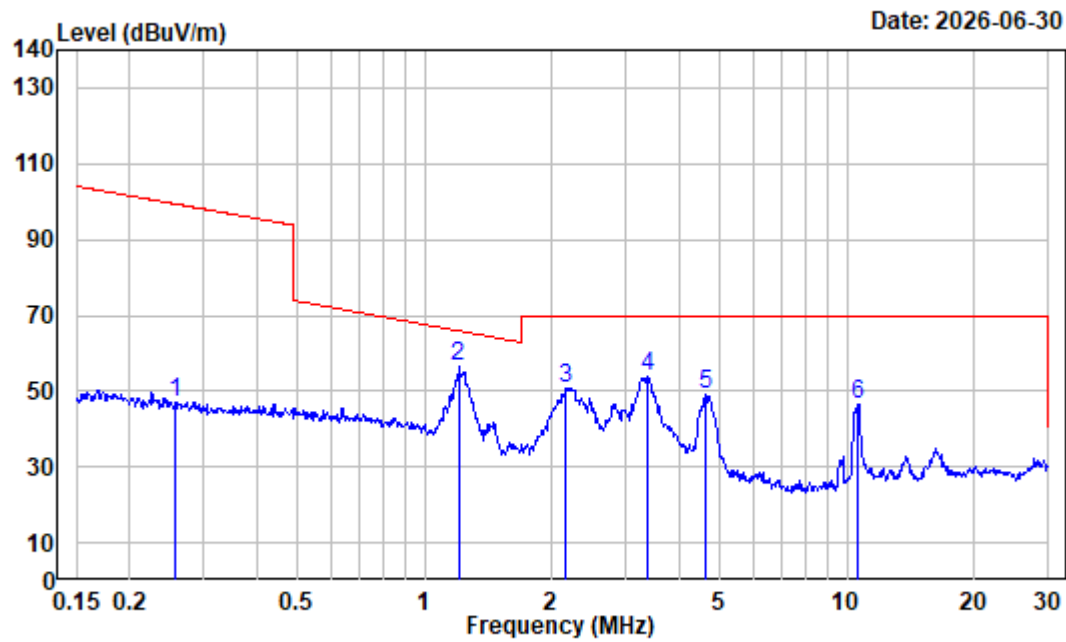


Site : chamber
 Condition : 3m
 Job No. : 2604U27448E-RF
 Polarization : Perpendicular Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:10kHz VBW:30kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.258	9.21	38.00	47.21	99.39	-52.18	Peak
2	1.203	-2.55	58.90	56.35	65.83	-9.48	Peak
3	2.167	-5.45	56.42	50.97	69.54	-18.57	Peak
4	3.381	-6.01	59.92	53.91	69.54	-15.63	Peak
5	4.622	-6.30	55.35	49.05	69.54	-20.49	Peak
6	10.620	-5.20	51.86	46.66	69.54	-22.88	Peak

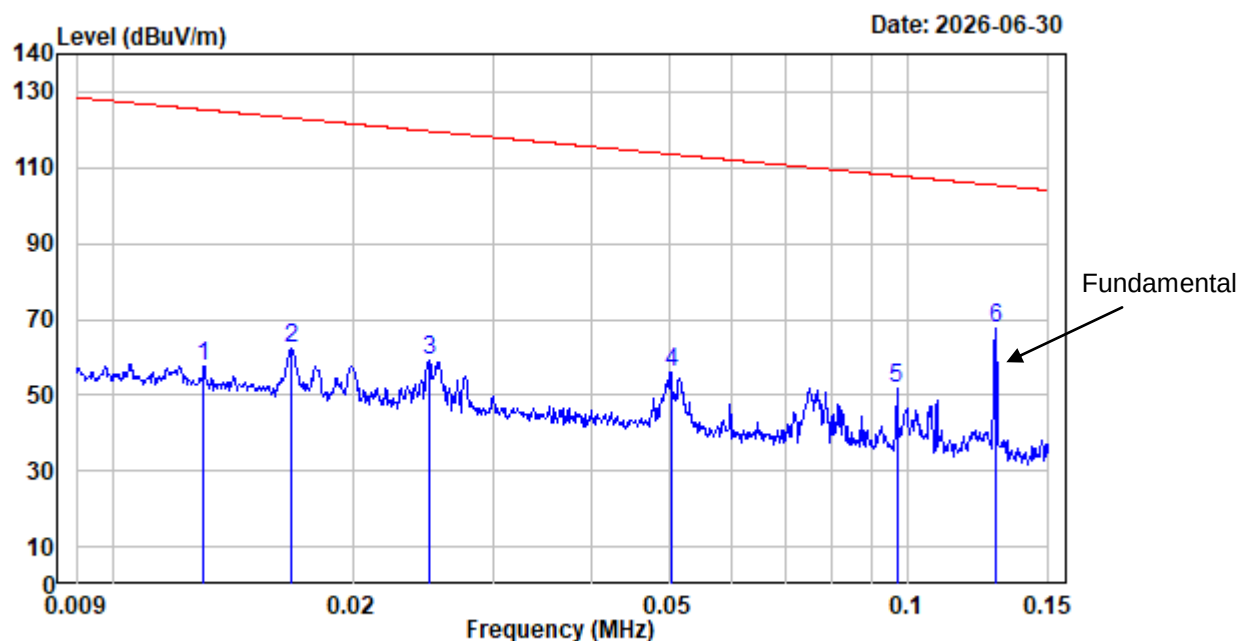

Site : chamber
 Condition : 3m
 Job No. : 2604U27448E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.013	34.49	23.19	57.68	125.32	-67.64	Peak
2	0.017	32.83	29.43	62.26	123.12	-60.86	Peak
3	0.025	29.18	30.11	59.29	119.65	-60.36	Peak
4	0.050	22.76	33.24	56.00	113.56	-57.56	Peak
5	0.097	16.79	35.20	51.99	107.89	-55.90	Peak
6	0.128	15.15	52.24	67.39	105.43	-38.04	Peak

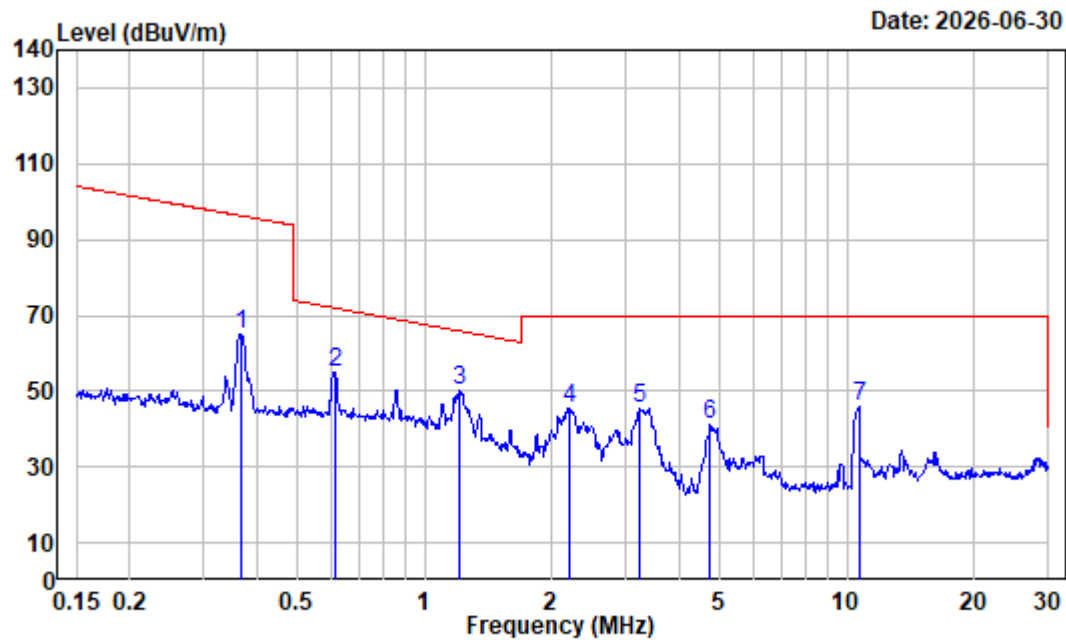

Site : chamber
 Condition : 3m
 Job No. : 2604U27448E-RF
 Polarization : Ground-parallel Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.369	5.89	58.99	64.88	96.26	-31.38	Peak
2	0.617	1.90	53.25	55.15	71.75	-16.60	Peak
3	1.210	-2.58	52.83	50.25	65.78	-15.53	Peak
4	2.213	-5.48	51.07	45.59	69.54	-23.95	Peak
5	3.241	-5.95	51.19	45.24	69.54	-24.30	Peak
6	4.746	-6.30	47.52	41.22	69.54	-28.32	Peak
7	10.676	-5.18	50.92	45.74	69.54	-23.80	Peak

30MHz~1GHz:

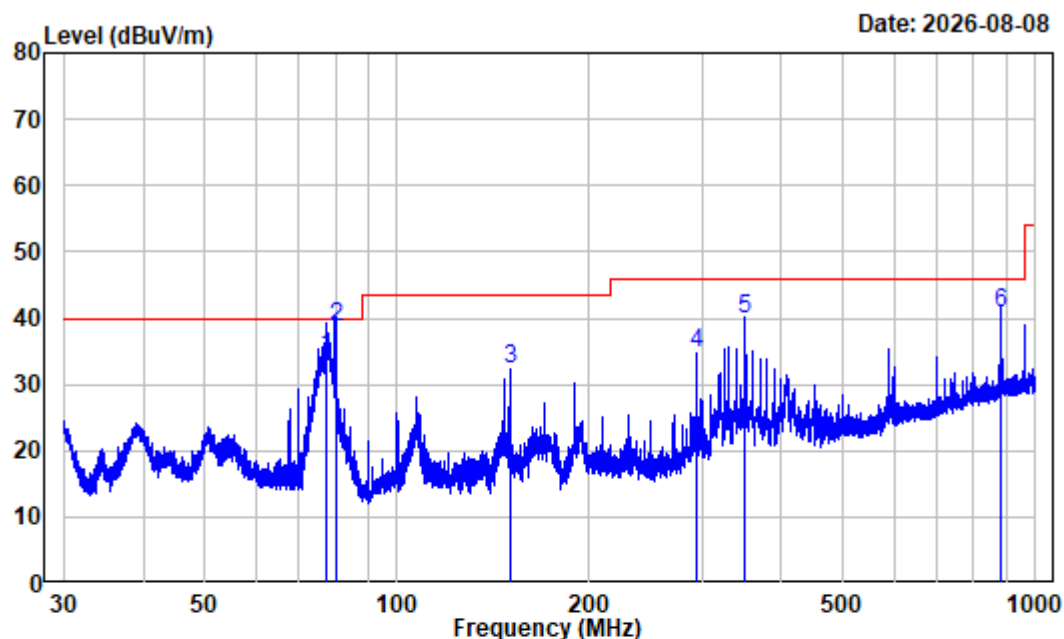

Site : chamber
 Condition : 3m HORIZONTAL
 Job No. : 2604U27448E-RF Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	77.525	-16.45	50.71	34.26	40.00	-5.74	QP
2	80.010	-16.72	55.35	38.63	40.00	-1.37	QP
3	150.011	-14.66	46.86	32.20	43.50	-11.30	Peak
4	295.018	-8.84	43.67	34.83	46.00	-11.17	Peak
5	350.016	-6.74	46.50	39.76	46.00	-6.24	QP
6	884.891	1.60	39.04	40.64	46.00	-5.36	QP

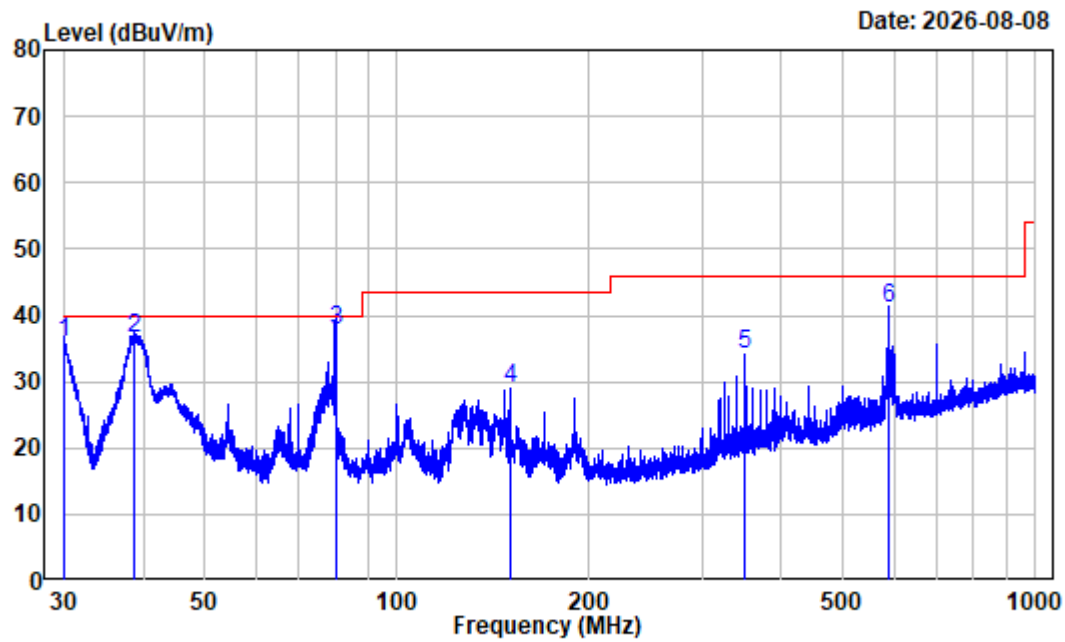

Site : chamber
 Condition : 3m VERTICAL
 Job No. : 2604U27448E-RF Tester: Jayden Luo
 Test Mode : Wireless Charging Transmitting
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.000	-11.74	47.63	35.89	40.00	-4.11	QP
2	38.718	-10.84	47.34	36.50	40.00	-3.50	QP
3	80.010	-16.72	54.32	37.60	40.00	-2.40	QP
4	150.011	-14.66	43.76	29.10	43.50	-14.40	Peak
5	350.016	-6.74	40.90	34.16	46.00	-11.84	Peak
6	589.939	-2.35	43.50	41.15	46.00	-4.85	QP

20dB EMISSION BANDWIDTH

Applicable Standard


According to FCC§15.215(c),

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

According to ANSI C63.10-2013, section 6.9.2

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

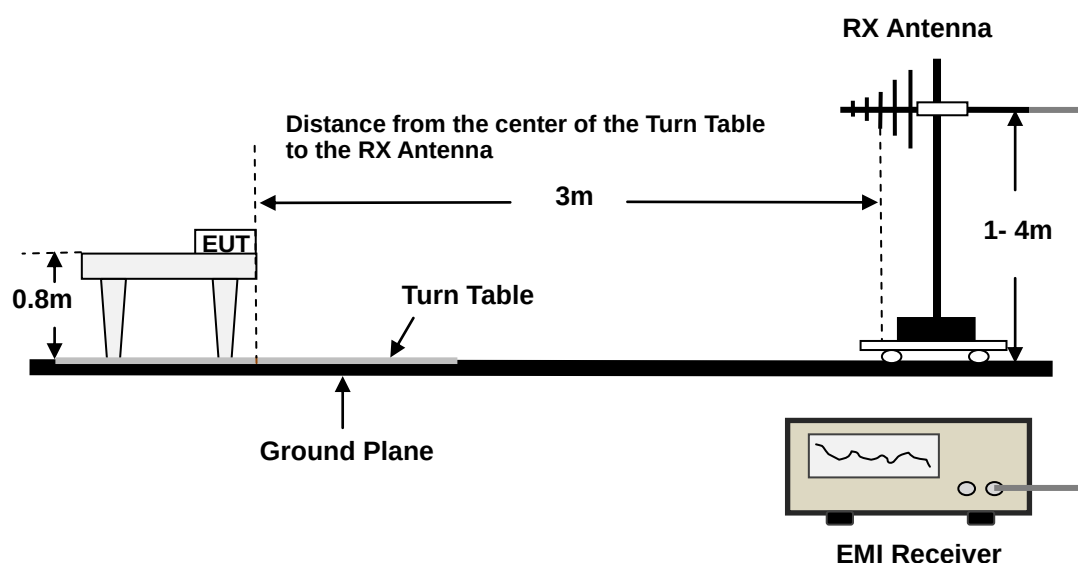

Test Data

Environmental Conditions

Temperature:	25.1 °C
Relative Humidity:	50 %
ATM Pressure:	100.2 kPa
Test Engineer:	Jayden Luo
Test Date:	2026-06-30
EUT Operation Mode:	Transmitting (Radiated Measurement)

Test Result: Compliance, please refer to the below data.

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2604U27448E-RF EUT External Photos and Attachment No.2 2604U27448E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.6 2604U27448E-RFG Test Photos.

***** END OF REPORT *****