Certificate #4312.01

# TEST REPORT

**Product Name:** IP Phone
**Trade Mark:** GRANDSTREAM
**Model No. / HVIN:** GRP2670
**Report Number:** 210821025RFC-4
**Test Standards:** FCC 47 CFR Part 15 Subpart E
RSS-247 Issue 2
RSS-Gen Issue 5
**FCC ID:** YZZGRP2670
**IC:** 11964A-GRP2670
**Test Result:** PASS
**Date of Issue:** October 18, 2021

Prepared for:

**Grandstream Networks, Inc.**
**126 Brookline Ave., 3rd Floor Boston, MA 02215, USA**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China**
**TEL: +86-755-2823 0888**
**FAX: +86-755-2823 0886**

Prepared by: Henry Lu, Team Leader

Reviewed by: Kevin Liang, Assistant Manager

Approved by: Billy Qi, Technical Director

Date: October 18, 2021

UnionTrust Laboratories UnionTrust *Certified*

## Version

| Version No. | Date | Description |
|---|---|---|
| V1.0 | October 18, 2021 | Original |

# CONTENTS


1. GENERAL INFORMATION ....4
   1.1 CLIENT INFORMATION ....4
   1.2 EUT INFORMATION ....4
      1.2.1 GENERAL DESCRIPTION OF EUT ....4
      1.2.2 DESCRIPTION OF ACCESSORIES ....4
   1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD ....5
   1.4 OTHER INFORMATION ....6
   1.5 DESCRIPTION OF SUPPORT UNITS ....7
   1.6 TEST LOCATION ....7
   1.7 TEST FACILITY ....7
   1.8 DEVIATION FROM STANDARDS ....8
   1.9 ABNORMALITIES FROM STANDARD CONDITIONS ....8
   1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER ....8
   1.11 MEASUREMENT UNCERTAINTY ....8
2. TEST SUMMARY ....9
3. EQUIPMENT LIST ....10
4. TEST CONFIGURATION ....10
   4.1 ENVIRONMENTAL CONDITIONS FOR TESTING ....11
      4.1.1 NORMAL OR EXTREME TEST CONDITIONS ....11
      4.1.2 RECORD OF NORMAL ENVIRONMENT ....11
   4.2 TEST CHANNELS ....11
   4.3 EUT TEST STATUS ....12
   4.4 PRE-SCAN ....12
   4.5 TEST SETUP ....13
      4.5.1 FOR RADIATED EMISSIONS TEST SETUP ....13
      4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP ....14
      4.5.3 FOR CONDUCTED RF TEST SETUP ....15
   4.6 SYSTEM TEST CONFIGURATION ....15
   4.7 DUTY CYCLE ....16
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION ....20
   5.1 REFERENCE DOCUMENTS FOR TESTING ....20
   5.2 ANTENNA REQUIREMENT ....20
   5.3 26 DB BANDWIDTH & OCCUPIED BANDWIDTH ....21
   5.4 6 DB BANDWIDTH & OCCUPIED BANDWIDTH ....32
   5.5 MAXIMUM CONDUCTED OUTPUT POWER OR E.I.R.P ....39
   5.6 PEAK POWER SPECTRAL DENSITY ....47
   5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT ....64
   5.8 DYNAMIC FREQUENCY SELECTION ....105
   5.9 AC POWER LINE CONDUCTED EMISSION ....115

APPENDIX 1 PHOTOS OF TEST SETUP ....118
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS ....118

# 1. GENERAL INFORMATION

## 1.1 CLIENT INFORMATION

| | |
|---|---|
| **Applicant:** | Grandstream Networks, Inc. |
| **Address of Applicant:** | 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA |
| **Manufacturer:** | Grandstream Networks, Inc. |
| **Address of Manufacturer:** | 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA |

## 1.2 EUT INFORMATION

### 1.2.1 General Description of EUT

| | | | |
|---|---|---|---|
| **Product Name:** | IP Phone | | |
| **Model No. / HVIN:** | GRP2670 | | |
| **Trade Mark:** | GRANDSTREAM | | |
| **DUT Stage:** | Identical Prototype | | |
| **EUT Supports Function:** | 2.4 GHz ISM Band: | IEEE 802.11b/g/n | |
| | | Bluetooth 5.0 | |
| | 5 GHz U-NII Bands: | 5 150 MHz to 5 250 MHz | IEEE 802.11a/n/ac |
| | | 5 250 MHz to 5 350 MHz | IEEE 802.11a/n/ac |
| | | 5 470 MHz to 5 725 MHz | IEEE 802.11a/n/ac |
| | | 5 725 MHz to 5 850 MHz | IEEE 802.11a/n/ac |
| **Sample Received Date:** | August 21, 2021 | | |
| **Sample Tested Date:** | August 21, 2021 to September 25, 2021 | | |

### 1.2.2 Description of Accessories

| **Adapter(1)** | |
|---|---|
| **Model No.:** | GQ12-120100-AU |
| **Input:** | 100-240 V~50/60 Hz 0.4A Max |
| **Output:** | 12 V ⎓ 1.0 A |
| **DC Cable:** | 2.5 Meter, Unshielded without ferrite |

| **Adapter(2)** | |
|---|---|
| **Model No.:** | DSA-12PFU-12 FUS 120100 |
| **Input:** | 100-240 V~50/60 Hz 0.5A |
| **Output:** | 12 V ⎓ 1.0 A 12.0W |
| **DC Cable:** | 2.5 Meter, Unshielded without ferrite |

| **Adapter(3)** | |
|---|---|
| **Model No.:** | F12US1200100A |
| **Input:** | 100-240 V~50/60 Hz 0.5A Max |
| **Output:** | 12 V ⎓ 1.0 A |
| **DC Cable:** | 2.5 Meter, Unshielded without ferrite |

| Cable(1) | |
|---|---|
| **Connector:** | Ethernet Cable |
| **Cable Type:** | Unshielded without ferrite |
| **Length:** | 1.5 Meter |

| Cable(2) | |
|---|---|
| **Connector:** | Phone Cord |
| **Cable Type:** | Unshielded without ferrite |
| **Length:** | 3.5 Meter |

| Others |
|---|
| 1x Handset, 1x Phone Stand |

## 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

| | |
|---|---|
| **Frequency Bands:** | 5150 MHz to 5250 MHz (U-NII-1) |
| | 5250 MHz to 5350 MHz (U-NII-2A) |
| | 5470 MHz to 5725 MHz (U-NII-2C) |
| | 5725 MHz to 5850 MHz (U-NII-3) |
| **Frequency Ranges:** | 5180 MHz to 5240 MHz |
| | 5260 MHz to 5320 MHz |
| | 5500 MHz to 5700 MHz |
| | 5745 MHz to 5825 MHz |
| **Support Standards:** | IEEE 802.11a/n/ac |
| **TPC Function:** | Not Support |
| **DFS Operational mode:** | Slave without radar Interference detection function |
| **Type of Modulation:** | IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) |
| | IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK) |
| | IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK) |
| **Channel Spacing:** | IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz |
| | IEEE 802.11n-HT40/ac-VHT40: 40 MHz |
| | IEEE 802.11ac-VHT80: 80 MHz |
| **Data Rate:** | IEEE 802.11a: Up to 54 Mbps |
| | IEEE 802.11n-HT20: Up to MCS7 |
| | IEEE 802.11n-HT40: Up to MCS7 |
| | IEEE 802.11ac-VHT20: Up to MCS8 |
| | IEEE 802.11ac-VHT40: Up to MCS9 |
| | IEEE 802.11ac-VHT80: Up to MCS9 |
| **Number of Channels:** | 5150 MHz to 5250 MHz:<br>4 for IEEE 802.11a/n-HT20/ac-VHT20<br>2 for IEEE 802.11n-HT40)/ac-VHT40<br>1 for IEEE 802.11acVHT80 |
| | 5250 MHz to 5350 MHz:<br>4 for IEEE 802.11a/n-HT20/ac-VHT20<br>2 for IEEE 802.11n-HT40)/ac-VHT40<br>1 for IEEE 802.11acVHT80 |
| | 5470 MHz to 5725 MHz:<br>11 for IEEE 802.11a/n-HT20/ac-VHT20<br>5 for IEEE 802.11n-HT40/ac-VHT40 |

| | | | | | |
|---|---|---|---|---|---|
| | 2 for IEEE 802.11ac-VHT80 | | | | |
| | 5725 MHz to 5850 MHz:<br>5 for IEEE 802.11a/n-HT20/ac-VHT20<br>2 for IEEE 802.11n-HT40/ac-VHT40<br>1 for IEEE 802.11ac-VHT80 | | | | |
| **Antenna Type:** | Dipole Antenna | | | | |
| **Antenna Gain:** | 5150 MHz to 5250 MHz: 4.5 dBi | | | | |
| | 5250 MHz to 5350 MHz: 4.5 dBi | | | | |
| | 5470 MHz to 5725 MHz: 4.5 dBi | | | | |
| | 5725 MHz to 5850 MHz: 4.5 dBi | | | | |
| **Maximum EIRP (dBm):** | **Chain 0** | **U-NII-1** | | | |
| | IEEE 802.11a: | 18.88 | | | |
| | IEEE 802.11n-HT20: | 18.51 | | | |
| | IEEE 802.11n-HT40: | 19.50 | | | |
| | IEEE 802.11ac-VHT20: | 18.48 | | | |
| | IEEE 802.11ac-VHT40: | 19.53 | | | |
| | IEEE 802.11ac-VHT80: | 17.28 | | | |
| **Maximum conducted output power (dBm):** | | **U-NII-1** | **U-NII-2A** | **U-NII-2C** | **U-NII-3** |
| | IEEE 802.11a: | 14.38 | 14.53 | 14.59 | 20.14 |
| | IEEE 802.11n-HT20: | 14.01 | 14.26 | 14.03 | 19.16 |
| | IEEE 802.11n-HT40: | 15.00 | 15.13 | 13.44 | 19.49 |
| | IEEE 802.11ac-VHT20 | 13.98 | 14.29 | 14.08 | 19.07 |
| | IEEE 802.11ac-VHT40 | 15.03 | 15.04 | 13.13 | 19.53 |
| | IEEE 802.11ac-VHT80: | 12.78 | 12.92 | 11.48 | 18.82 |
| **Normal Test Voltage:** | 120V~60Hz | | | | |

## 1.4 OTHER INFORMATION

| **Operation Frequency Each of Channel** | | | | |
|---|---|---|---|---|
| | **U-NII-1** | **U-NII-2A** | **U-NII-2C** | **U-NII-3** |
| **IEEE 802.11a, IEEE 802.11n-HT20, IEEE 802.11ac-VHT20** | **f = 5000 + 5k, k = 32 + 4n** | | | **f = 5000 + 5k, k = 145 + 4n** |
| | **n = 1,…, 4** | **n = 5,…, 8** | **n = 17,…, 27** | **n = 1,…, 5** |
| **IEEE 802.11n-HT40, IEEE 802.11ac-VHT40** | **f = 5000 + 5k, k = 30 + 8n** | | | **f = 5000 + 5k, k = 143 + 8n** |
| | **n = 1, 2** | **n = 1,…, 5** | **n = 9,…, 13** | **n = 1, 2** |
| **IEEE 802.11ac-VHT80** | **f = 5000 + 5k, k = 26 + 16n** | | | **f = 5000 + 5k, k = 155** |
| | **n = 1** | **n = 1, 2** | **n = 5, 6** | |
| Note:<br>**f** is the operating frequency (MHz);<br>**k** is the operating channel. | | | | |

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

| Description | Manufacturer | Model No. | Serial Number | FCC ID | Supplied by |
|---|---|---|---|---|---|
| Notebook | Lenovo | B40-80 | MP12NEQ6 | N/A | UnionTrust |
| USB disk | Kingston | DTSE9 | N/A | N/A | UnionTrust |
| Mouse | DELL | MS111 | CN-011D3V-738 | N/A | UnionTrust |
| Headset | YEY | VE120-MV | N/A | N/A | UnionTrust |
| Wireless Home Router | SAGEMCOM | FAST5280 | N/A | VW3FAST5280 | UnionTrust |
| Key-Press Attenuator | Huaxin | KT2.5-90/1S-2S | N/A | N/A | UnionTrust |
| 4 Way Divider | WOKEN | 0120A040560002D | N/A | N/A | UnionTrust |
| IP Phone | GRANDSTREAM | GRP2615 | N/A | YZZGRP2615 | Applicant |

2) Support Cable

| Cable No. | Description | Connector | Length | Supplied by |
|---|---|---|---|---|
| 1 | Ethernet Cable | RJ45 | 1.5 Unshielded without ferrite | UnionTrust |
| 2 | Ethernet Cable | RJ45 | 2.0 Unshielded without ferrite | UnionTrust |
| 3 | Ethernet Cable | RJ45 | 5.0 Unshielded without ferrite | UnionTrust |
| 4 | Antenna Cable | SMA | 0.3 Meter | UnionTrust |

## 1.6 TEST LOCATION

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

## 1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L9069**
The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**A2LA-Lab Certificate No.: 4312.01**
Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**ISED Wireless Device Testing Laboratories**

CAB identifier: CN0032

**FCC Accredited Lab.**
Designation Number: CN1194
Test Firm Registration Number: 259480

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item | Measurement Uncertainty |
|---|---|---|
| 1 | Conducted emission 9kHz-150kHz | ±3.2 dB |
| 2 | Conducted emission 150kHz-30MHz | ±2.7 dB |
| 3 | Radiated emission 9kHz-30MHz | ± 4.7 dB |
| 4 | Radiated emission 30MHz-1GHz | ± 4.9 dB |
| 5 | Radiated emission 1GHz-18GHz | ± 4.8 dB |
| 6 | Radiated emission 18GHz-26GHz | ± 5.1 dB |
| 7 | Radiated emission 26GHz-40GHz | ± 5.1 dB |
| 8 | Conducted spurious emissions | ± 2.7 dB |
| 9 | RF Power, Conducted | ± 0.9 dB |
| 10 | Occupied Bandwidth | ± 1.86 % |
| 11 | Radio Frequency | 2.4 GHz: ± 6.5 x $10^{-8}$ |
| 12 | Transmission Time | ± 0.19 % |

## 2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart E Test Cases | | | |
|---|---|---|---|
| **Test Item** | **Test Requirement** | **Test Method** | **Result** |
| **Antenna Requirement** | FCC 47 CFR Part 15 Subpart C Section 15.203<br>FCC 47 CFR Part 15 Subpart E Section 15.407(a)(1) (2)<br>RSS-Gen Issue 5, Section 6.8 | N/A | PASS |
| **26 dB emission bandwidth** | FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)<br>RSS-247 Issue 2 Section 6.2.1.2 | KDB 789033 D02 v02r01 Section C.1 | PASS |
| **6 dB bandwidth** | FCC 47 CFR Part 15 Subpart E Section 15.407 (e)<br>RSS-247 Issue 2 Section 6.2.4.1 | KDB 789033 D02 v02r01 Section C.2 | PASS |
| **Occupied Bandwidth** | RSS-Gen Issue 5, Section 6.7 | RSS-Gen Issue 5, section 6.7 | PASS |
| **Maximum conducted output power** | FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)<br>RSS-247 Issue 2 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1 | KDB 789033 D02 v02r01 Section E.3.a (Method PM) | PASS |
| **Peak Power Spectral Density** | FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)<br>RSS-247 Issue 2 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1 | KDB 789033 D02 v02r01 Section F | PASS |
| **Radiated Emissions and Band Edge Measurement** | FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6)<br>FCC 47 CFR Part 15 Subpart C Section 15.209/205<br>RSS-247 Issue 2 Section 6.2.1.2/6.2.2.2/6.2.3.2/6.2.4.2 | KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6 | PASS |
| **Dynamic Frequency Selection** | FCC 47 CFR Part 15 Subpart E Section 15.407 (h)<br>RSS-247 Issue 2 Section 6.3 | KDB 905462 D03 Client Without DFS New Rules v01r02 | PASS |
| **AC Power Line Conducted Emission** | FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6)<br>FCC 47 CFR Part 15 Subpart C Section 15.207<br>RSS-Gen Issue 5, Section 8.8 | ANSI C63.10-2013, Section 6.2. | PASS |
| **Note:**<br>1) N/A: In this whole report not applicable. | | | |

**For Dynamic Frequency Selection**

| Test Case | Result |
|---|---|
| Channel Availability Check Time | N/A[1] |
| U-NII Detection Bandwidth | N/A[1] |
| Channel Closing Transmission Time | PASS |
| Channel Move Time | PASS |
| DFS Detection Threshold | N/A[1] |
| Non- Occupancy Period | N/A[1] |
| **Note:**<br>1) The EUT is slave, NA In this whole report not applicable. | |

# 3. EQUIPMENT LIST

| Radiated Emission Test Equipment List | | | | | | |
|---|---|---|---|---|---|---|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| ☒ | 3m SAC | ETS-LINDGREN | 3m | N/A | Jan. 22, 2021 | Jan. 21, 2024 |
| ☒ | Receiver | R&S | ESIB26 | 100114 | Nov. 18, 2020 | Nov. 17, 2021 |
| ☒ | EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY51440197 | Apr. 22, 2021 | Apr. 21, 2022 |
| ☒ | Loop Antenna | ETS-LINDGREN | 6502 | 00202525 | Nov. 14, 2020 | Nov. 13, 2021 |
| ☒ | Broadband Antenna | ETS-LINDGREN | 3142E | 00201566 | Nov. 14, 2020 | Nov. 13, 2021 |
| ☒ | 6dB Attenuator | Talent | RA6A5-N-18 | 18103001 | Nov. 14, 2020 | Nov.13, 2021 |
| ☒ | Preamplifier | HP | 8447F | 2805A02960 | Nov. 10, 2020 | Nov. 9, 2021 |
| ☒ | Double-Ridged Waveguide Horn Antenna (Pre-amplifier) | ETS-LINDGREN | 3117-PA | 00201541 | Apr. 30, 2021 | Apr. 29, 2023 |
| ☒ | Pre-amplifier | ETS-Lindgren | 00118385 | 00201874 | Nov. 10, 2020 | Nov. 9, 2021 |
| ☒ | Double-Ridged Waveguide Horn Antenna (Pre-amplifier) | ETS-LINDGREN | 3116C-PA | 00202652 | Nov. 14, 2020 | Nov. 13, 2022 |
| ☒ | Pre-amplifier | ETS-Lindgren | 00118384 | 00202652 | Nov. 17, 2020 | Nov. 16, 2022 |
| ☒ | Multi device Controller | ETS-LINDGREN | 7006-001 | 00160105 | N/A | N/A |
| ☐ | Band Rejection Filter (2400MHz~2500MHz) | Micro-Tronics | BRM50702 | G248 | Nov. 16, 2020 | Nov. 15, 2021 |
| ☒ | Band Rejection Filter (5150MHz~5880MHz) | Micro-Tronics | BRM50716 | G186 | Nov. 16, 2020 | Nov. 15, 2021 |
| ☒ | Test Software | Audix | e3 | Software Version: 9.160323 | | |

| Conducted Emission Test Equipment List | | | | | | |
|---|---|---|---|---|---|---|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| ☒ | Receiver | R&S | ESR7 | 1316.3003K07 -101181-K3 | Nov. 18, 2020 | Nov.17, 2021 |
| ☒ | Pulse Limiter | R&S | ESH3-Z2 | 0357.8810.54 | Nov. 18, 2020 | Nov.17, 2021 |
| ☒ | LISN | R&S | ESH2-Z5 | 860014/024 | Nov. 18, 2020 | Nov.17, 2021 |
| ☒ | LISN | ETS-Lindgren | 3816/2SH | 00201088 | Nov. 18, 2020 | Nov.17, 2021 |
| ☒ | Test Software | Audix | e3 | Software Version: 9.160323 | | |

| Conducted RF test Equipment List | | | | | | |
|---|---|---|---|---|---|---|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| ☒ | EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY51440197 | Apr. 22, 2021 | Apr. 21, 2022 |
| ☒ | USB Wideband Power Sensor | KEYSIGHT | U2021XA | MY55430035 | Nov. 10, 2020 | Nov. 9, 2021 |
| ☐ | USB Wideband Power Sensor | KEYSIGHT | U2021XA | MY55430023 | Nov. 10, 2020 | Nov. 9, 2021 |
| ☒ | MXG X-Series RF Vector Signal Generator | KEYSIGHT | N5182B | MY51350267 | Nov. 10, 2020 | Nov. 9, 2021 |

# 4. TEST CONFIGURATION

## 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

### 4.1.1 Normal or Extreme Test Conditions

| Environment Parameter | Selected Values During Tests | | |
|---|---|---|---|
| Test Condition | Ambient | | |
| | Temperature (°C) | Voltage | Relative Humidity (%) |
| NT/NV | +15 to +35 | 120V~60Hz | 20 to 75 |
| **Remark:**<br>1) NV: Normal Voltage; NT: Normal Temperature | | | |

### 4.1.2 Record of Normal Environment

| Test Item | Temperature (°C) | Relative Humidity (%) | Pressure (kPa) | Tested by |
|---|---|---|---|---|
| 26 dB emission bandwidth | 24.5 | 49 | 99.80 | Bert Xiong |
| 6 dB bandwidth | | | | |
| Occupied Bandwidth | | | | |
| Maximum conducted output power | | | | |
| Peak Power Spectral Density | | | | |
| Radiated Emissions and Band Edge Measurement | 25.2 | 52 | 100.02 | Asia Yan |
| Dynamic Frequency Selection | 24.5 | 49 | 99.80 | Bert Xiong |
| AC Power Line Conducted Emission | 25.5 | 53 | 99.71 | Niko Su |

## 4.2 TEST CHANNELS

| Mode | Tx/Rx Frequency | Test RF Channel Lists | | |
|---|---|---|---|---|
| | | Lowest(L) | Middle(M) | Highest(H) |
| IEEE 802.11a<br>IEEE 802.11n-HT20<br>IEEE 802.11ac-VHT20 | 5150 MHz to 5250 MHz | Channel 36 | Channel 44 | Channel 48 |
| | | 5180 MHz | 5220 MHz | 5240 MHz |
| | 5250 MHz to 5350 MHz | Channel 52 | Channel 60 | Channel 64 |
| | | 5260 MHz | 5300 MHz | 5320 MHz |
| | 5470 MHz to 5725 MHz | Channel 100 | Channel 116 | Channel 140 |
| | | 5500 MHz | 5580 MHz | 5700 MHz |
| | 5725 MHz to 5850 MHz | Channel 149 | Channel 157 | Channel 165 |
| | | 5745 MHz | 5785 MHz | 5825 MHz |
| IEEE 802.11n-HT40<br>IEEE 802.11ac-VHT40 | 5150 MHz to 5250 MHz | Channel 38 | -- | Channel 46 |
| | | 5190 MHz | -- | 5230 MHz |
| | 5250 MHz to 5350 MHz | Channel 54 | -- | Channel 62 |
| | | 5270 MHz | -- | 5310 MHz |
| | 5470 MHz to 5725 MHz | Channel 102 | Channel 110 | Channel 134 |
| | | 5510 MHz | 5550 MHz | 5670 MHz |
| | 5725 MHz to 5850 MHz | Channel 151 | -- | Channel 159 |
| | | 5755 MHz | -- | 5795 MHz |
| IEEE 802.11ac-VHT80 | 5150 MHz to 5250 MHz | -- | Channel 42 | -- |
| | | -- | 5210 MHz | -- |
| | 5250 MHz to 5350 MHz | -- | Channel 58 | -- |

| | | | | |
|---|---|---|---|---|
| | | -- | 5290 MHz | -- |
| | 5470 MHz to 5725 MHz | Channel 106 | -- | -- |
| | | 5530 MHz | -- | -- |
| | 5725 MHz to 5850 MHz | -- | Channel 155 | -- |
| | | -- | 5775 MHz | -- |

## 4.3 EUT TEST STATUS

| Mode | Tx/Rx Function | Description |
|---|---|---|
| IEEE 802.11a/n/ac | 1Tx/1Rx | 1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. |

| Power Setting | | | | |
|---|---|---|---|---|
| | U-NII-1 | U-NII-2A | U-NII-2C | U-NII-3 |
| IEEE 802.11a | 13 | 13 | 13 | 18 |
| IEEE 802.11n-HT20 | 13 | 13 | 13 | 18 |
| IEEE 802.11n-HT40 | 14 | 14 | 12 | 18 |
| IEEE 802.11ac-VHT20 | 13 | 13 | 13 | 18 |
| IEEE 802.11ac-VHT40 | 14 | 14 | 12 | 18 |
| IEEE 802.11ac-VHT80 | 12 | 12 | 11 | 18 |

| Test Software |
|---|
| Test software name: Putty commands; |

## 4.4 PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

| Mode | Worst-case data rates |
|---|---|
| IEEE 802.11a | 6 Mbps |
| IEEE 802.11n-HT20 | MCS0 |
| IEEE 802.11n-HT40 | MCS0 |
| IEEE 802.11ac-VHT20 | MCS0 |
| IEEE 802.11ac-VHT40 | MCS0 |
| IEEE 802.11ac-VHT80 | MCS0 |

## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup

**Figure 1. Below 30MHz**

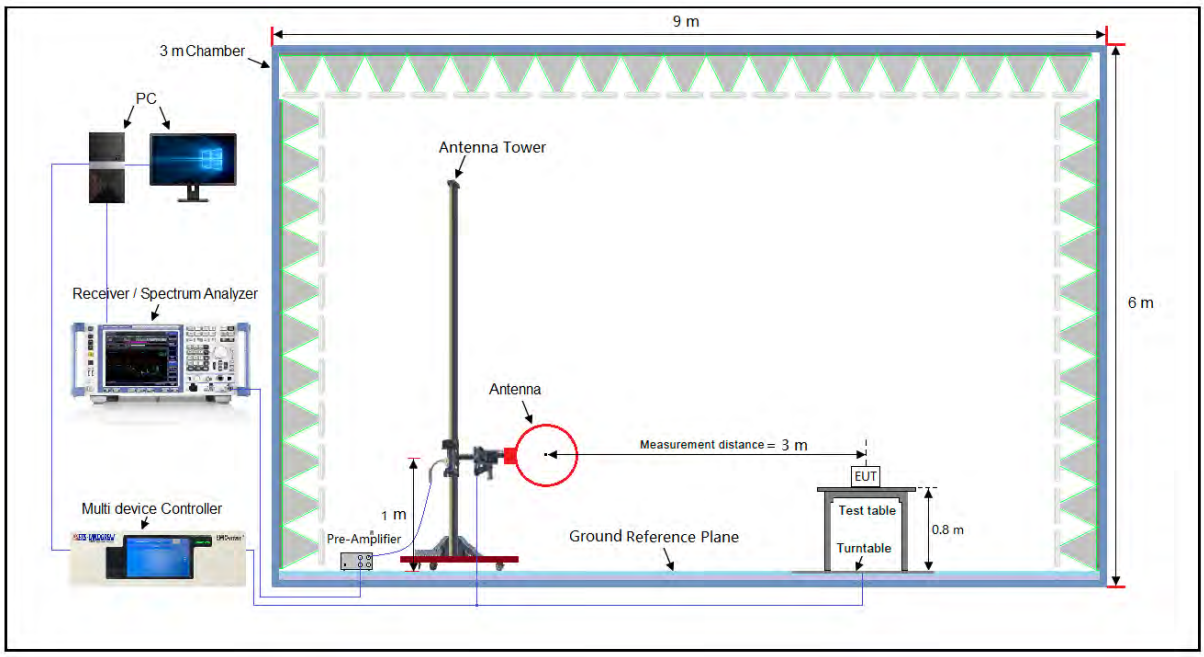


**Figure 2. 30MHz to 1GHz**

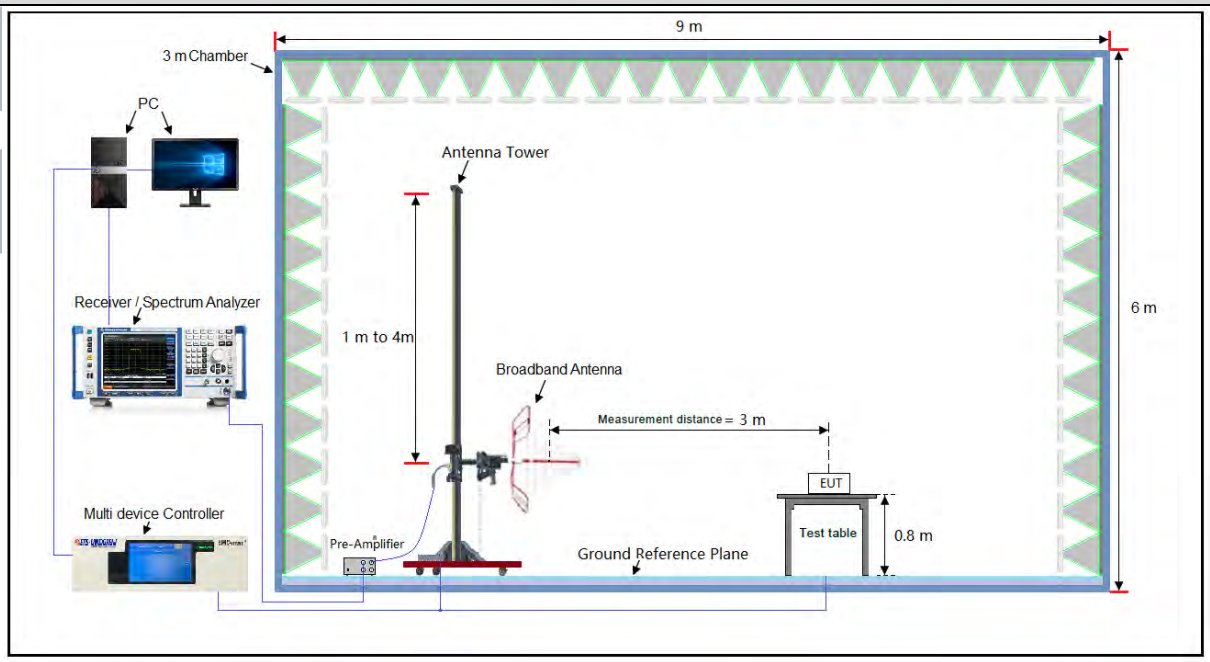

**Figure 3. Above 1GHz**

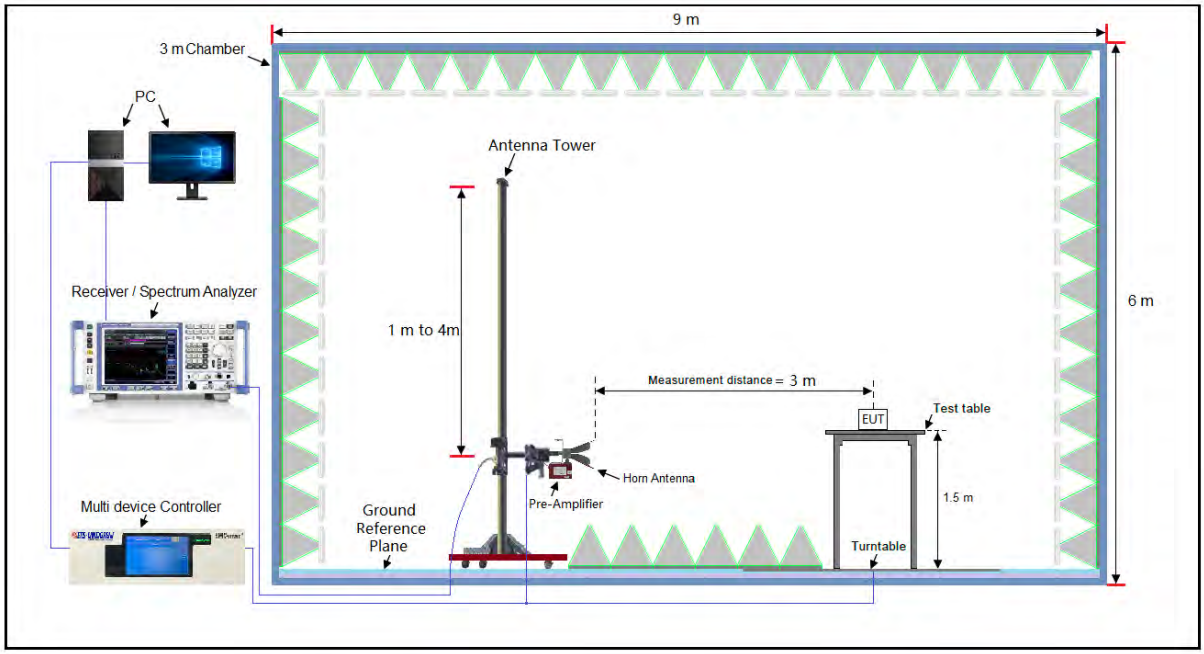


## 4.5.2 For Conducted Emissions test setup

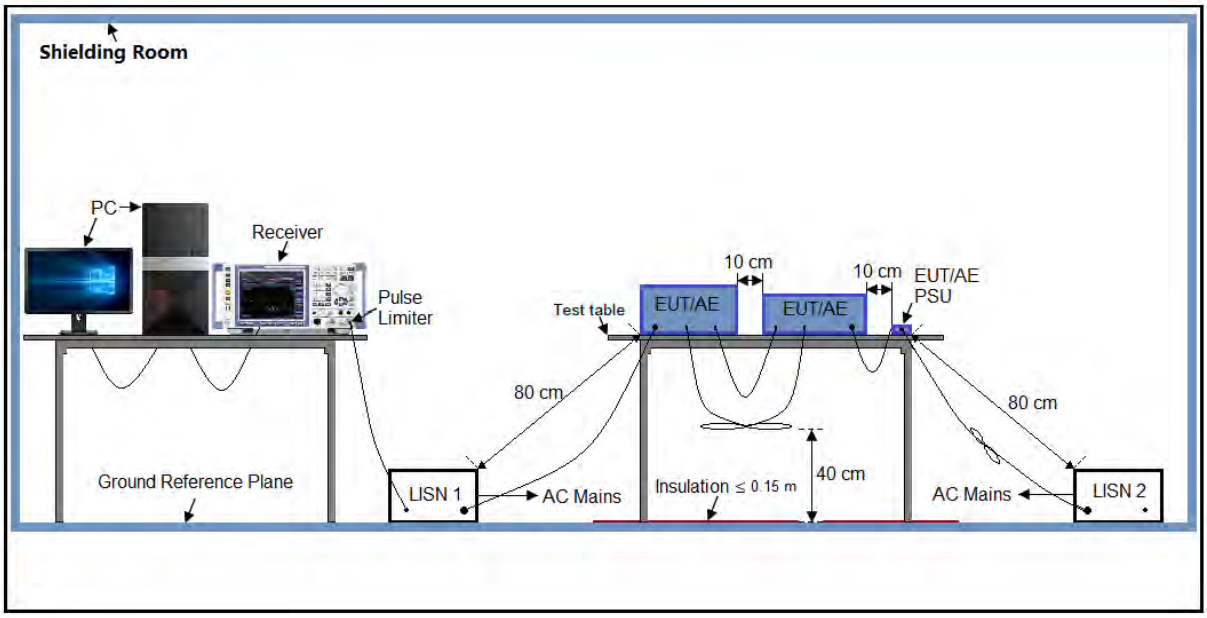

### 4.5.3 For Conducted RF test setup

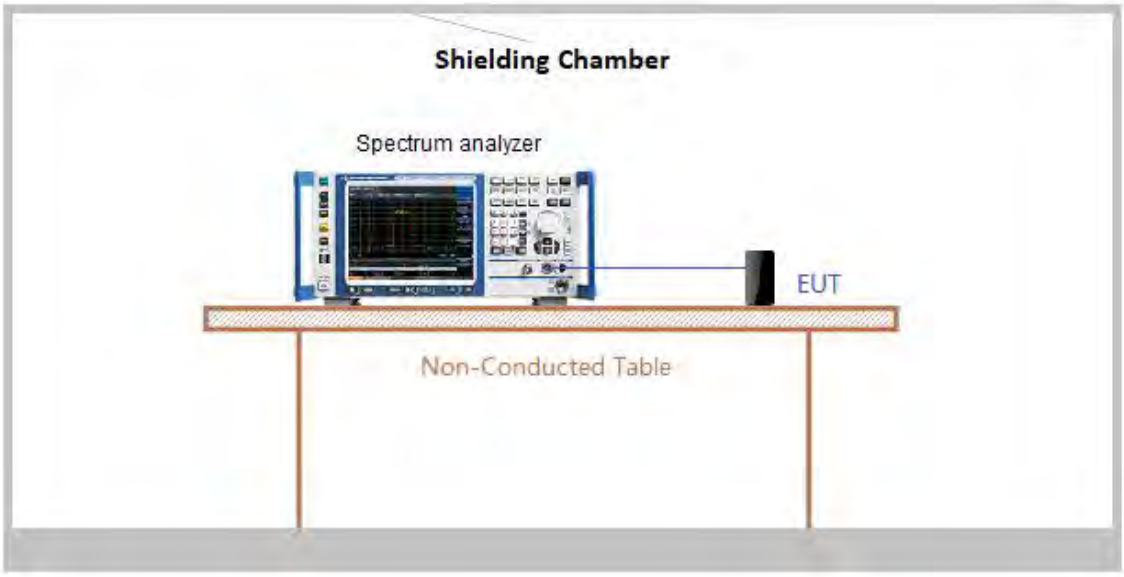


Normal Environment

## 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 4.7 DUTY CYCLE

**Test Procedure:** ANSI C63.10-2013 Clause 12.2.

**Test Results**

| Mode | Data rates (Mbps) | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/ T Minimum VBW (kHz) | Average Factor (dB) |
|---|---|---|---|---|---|---|---|---|
| IEEE 802.11a | 6 | 1.3800 | 1.4400 | 0.96 | 95.83 | 0.18 | 0.72 | -0.37 |
| IEEE 802.11n-HT20 | MCS0 | 1.2900 | 1.3500 | 0.96 | 95.56 | 0.20 | 0.78 | -0.39 |
| IEEE 802.11n-HT40 | MCS0 | 0.6300 | 0.7000 | 0.90 | 90.00 | 0.46 | 1.59 | -0.92 |
| IEEE 802.11ac-VHT20 | MCS0 | 1.3000 | 1.3600 | 0.96 | 95.59 | 0.20 | 0.77 | -0.39 |
| IEEE 802.11ac-VHT40 | MCS0 | 0.6400 | 0.7100 | 0.90 | 90.14 | 0.45 | 1.56 | -0.90 |
| IEEE 802.11ac-VHT80 | MCS0 | 0.3150 | 0.3650 | 0.86 | 86.30 | 0.64 | 3.17 | -1.28 |

**Remark:**

1) Duty cycle= On Time/ Period;
2) Duty Cycle factor = 10 * log(1/ Duty cycle);
3) Average factor = 20 $\log_{10}$ Duty Cycle.

**The test plots as follows**

**IEEE 802.11a**

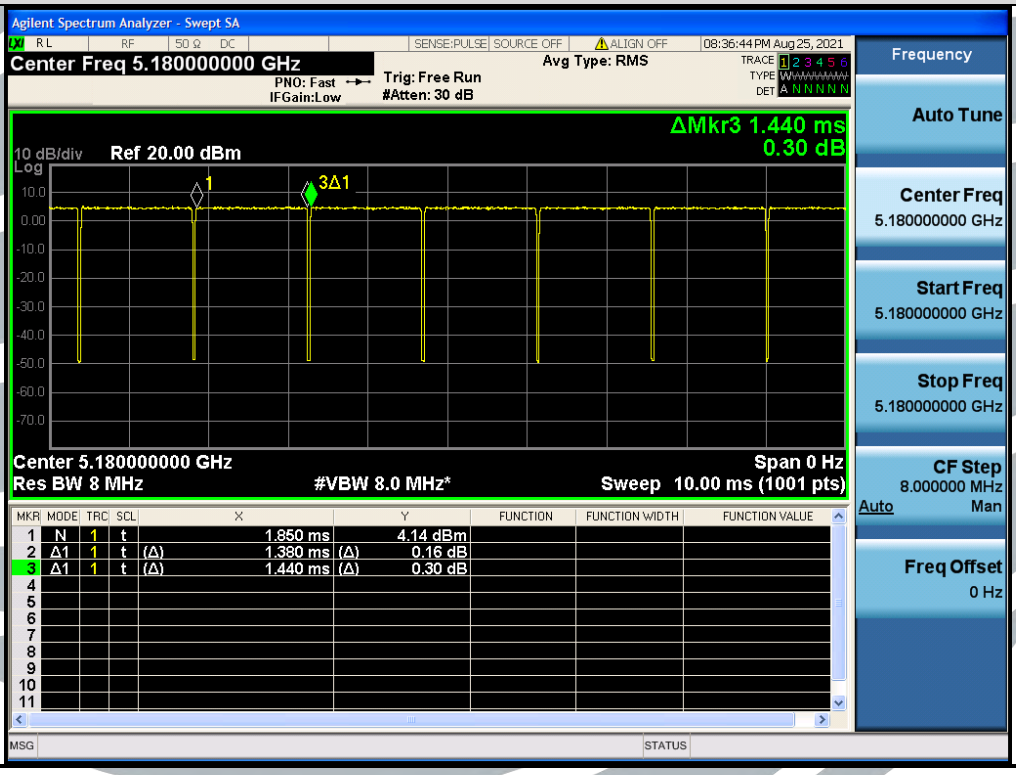

## IEEE 802.11n-HT20

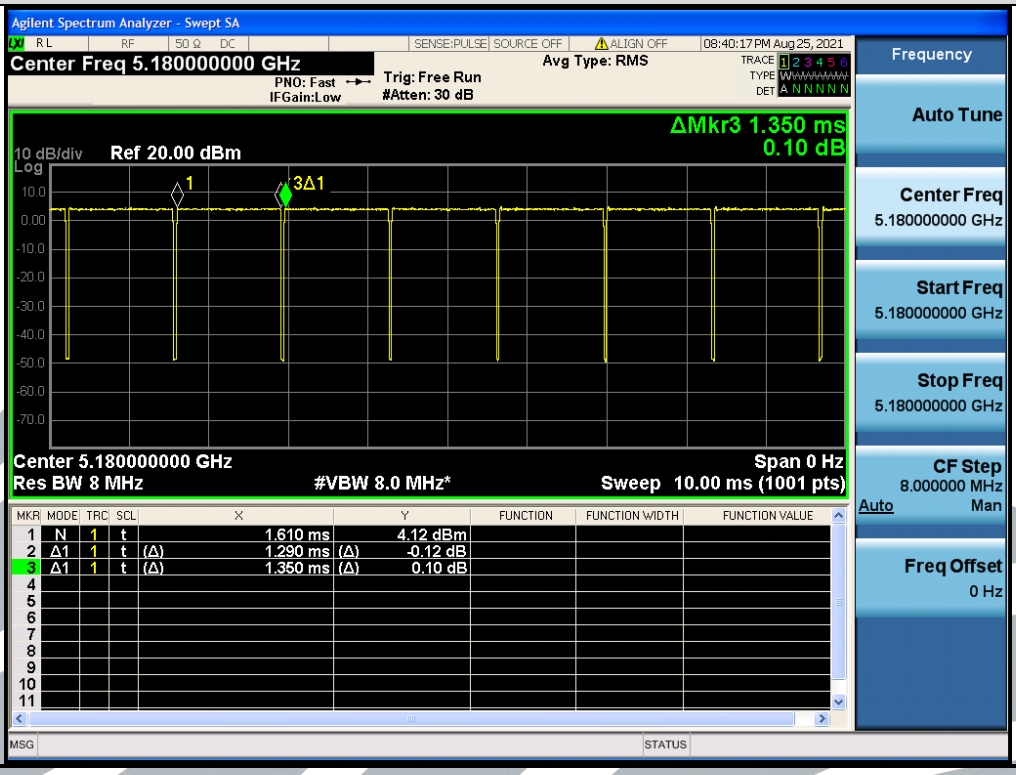


## IEEE 802.11n-HT40

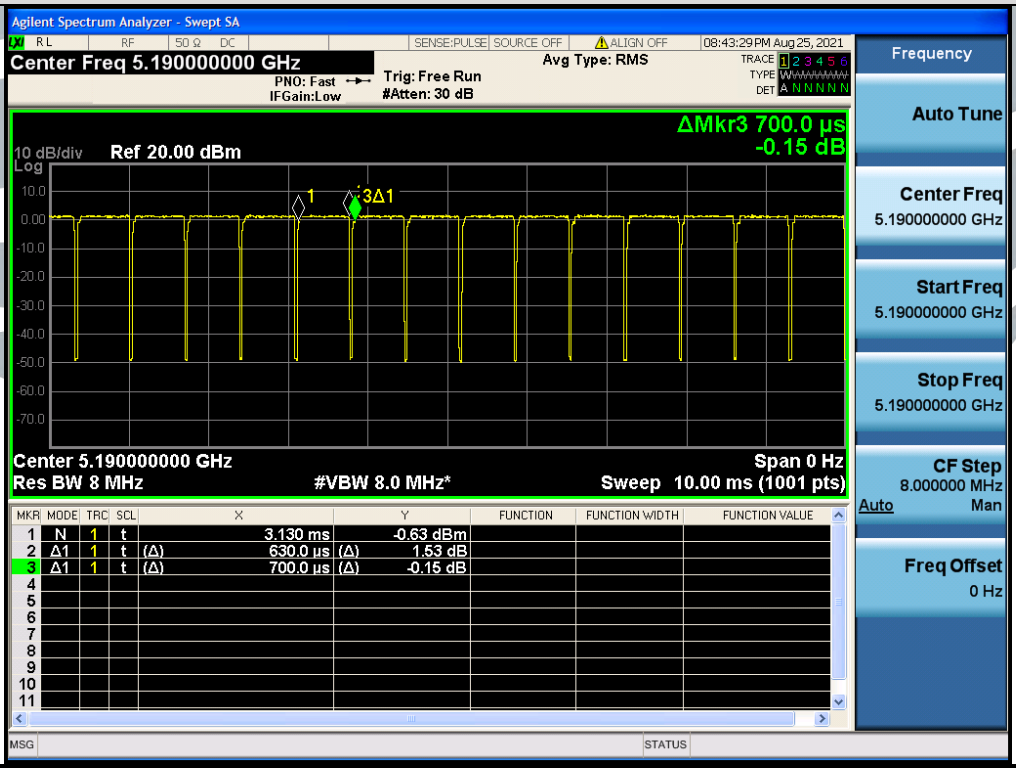

## IEEE 802.11ac-VHT20

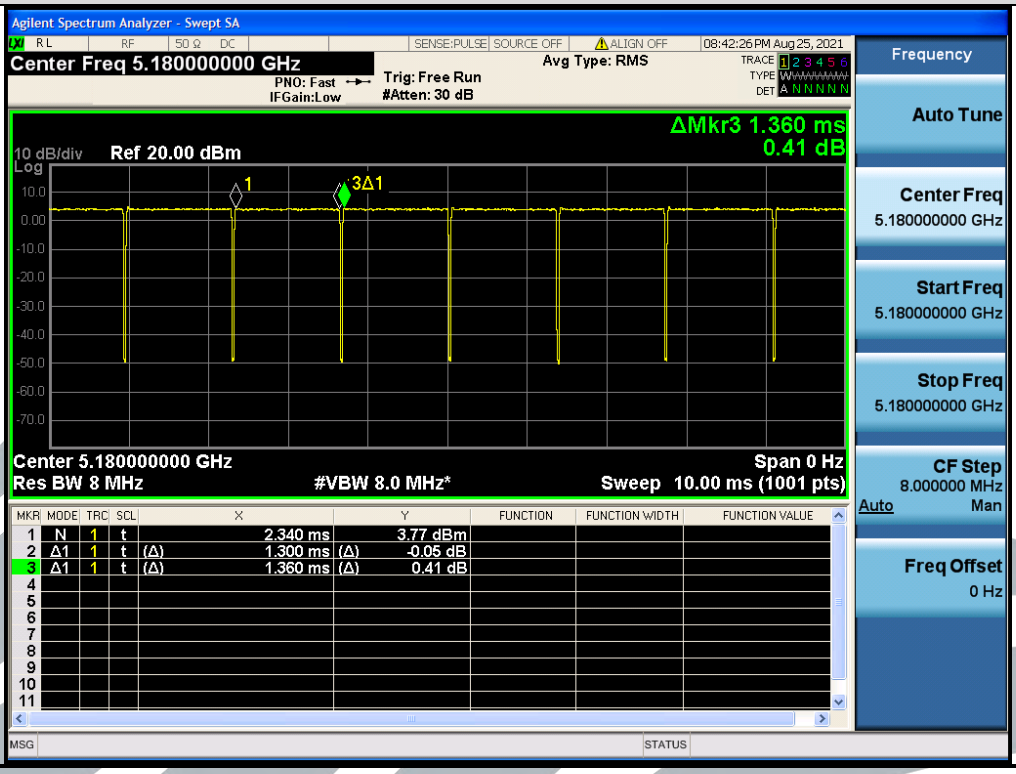


## IEEE 802.11ac-VHT40

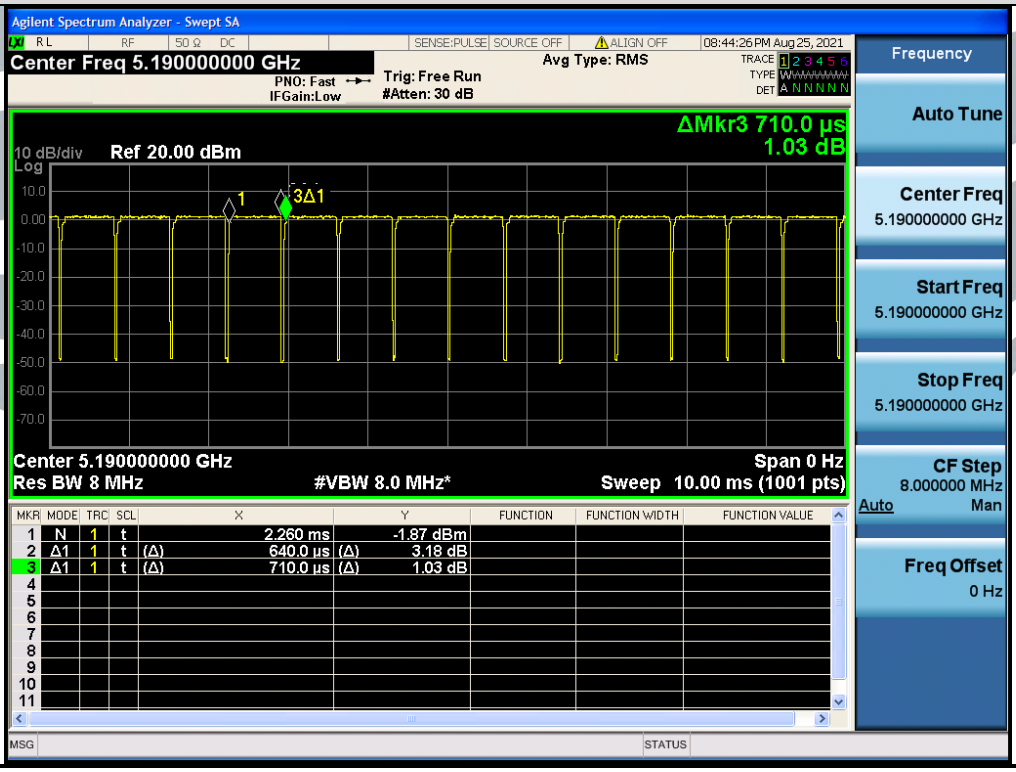

**IEEE 802.11ac-VHT80**

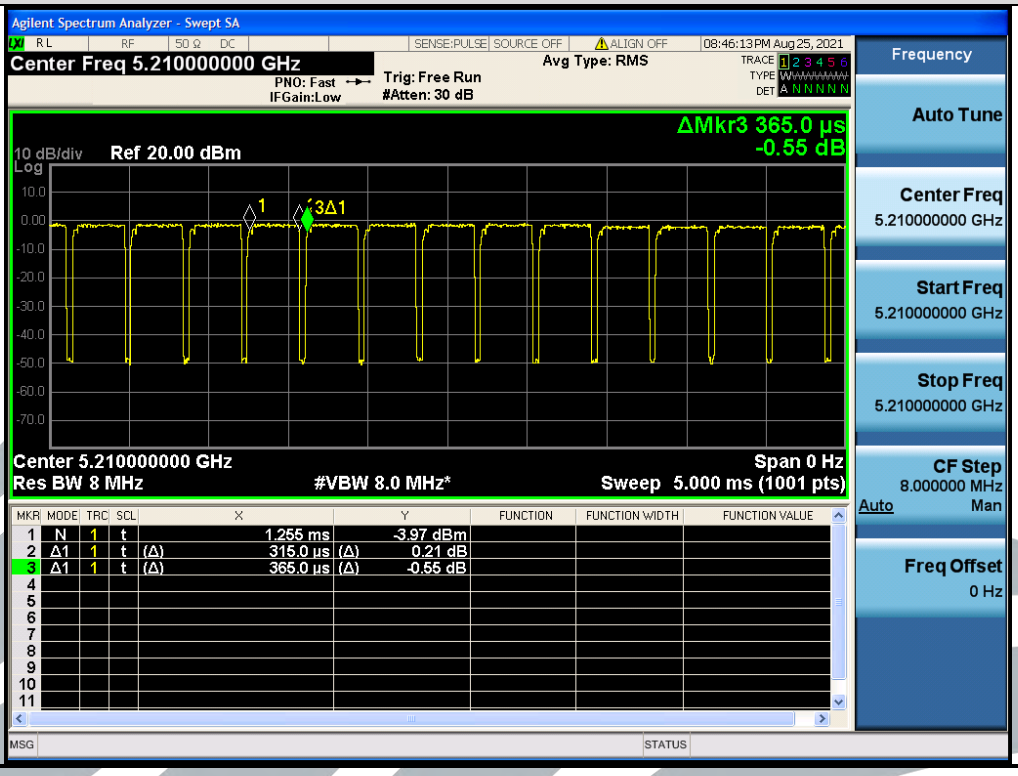

# 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

## 5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity | Document Title |
|---|---|---|
| 1 | FCC 47 CFR Part 2 | Frequency allocations and radio treaty matters; general rules and regulations |
| 2 | FCC 47 CFR Part 15 | Radio Frequency Devices |
| 3 | RSS-247 Issue 2 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |
| 4 | RSS-Gen Issue 5 | General Requirements for Compliance of Radio Apparatus |
| 5 | ANSI C63.10-2013 | American National Standard for Testing Unlicesed Wireless Devices |
| 6 | KDB 789033 D02 General UNII Test Procedures New Rules v02r01 | Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E |
| 7 | KDB 905462 D06 802.11 Channel Plans New Rules v02 | Operation in U-NII bands -802.11 channel PLAN(§15.407) |
| 8 | KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 | Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection |
| 9 | KDB 905462 D03 Client Without DFS New Rules v01r02 | U-NII client devices without radar detection capability |

## 5.2 ANTENNA REQUIREMENT

| Standard Requirement |
|---|
| **15.203 requirement:**<br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.<br>**15.407(a)(1) (2) requirement:**<br>The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi.<br>**RSS-Gen Issue 5, Section 6.8 requirement:**<br>According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. |
| **EUT Antenna:** |
| Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 4.5 dBi. |

## 5.3 26 DB BANDWIDTH & OCCUPIED BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)
RSS-247 Issue 2 Section 6.2.1.2

**Test Method:** KDB 789033 D02 v02r01 Section C.1

**Limit:** None; for reporting purposes only.

**Test Procedure:**

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

Spectrum analyzer according to the following Settings:
a) Set RBW = approximately 1 % of the emission bandwidth.
b) Set the VBW > RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

| Mode | Channel | 26 dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---|---|---|---|
| IEEE 802.11a | 36 (5180) | 20.91 | 16.542 |
| | 44 (5220) | 20.45 | 16.602 |
| | 48 (5240) | 20.97 | 16.602 |
| | 52 (5260) | 20.51 | 16.553 |
| | 60 (5300) | 20.95 | 16.632 |
| | 64 (5320) | 20.68 | 16.517 |
| | 100 (5500) | 21.24 | 16.599 |
| | 116 (5580) | 20.95 | 16.656 |
| | 140 (5700) | 20.82 | 16.541 |
| IEEE 802.11n-HT20 | 36 (5180) | 21.21 | 17.685 |
| | 44 (5220) | 20.76 | 17.693 |
| | 48 (5240) | 21.30 | 17.733 |
| | 52 (5260) | 21.05 | 17.679 |
| | 60 (5300) | 21.31 | 17.693 |
| | 64 (5320) | 21.06 | 17.652 |
| | 100 (5500) | 21.19 | 17.693 |
| | 116 (5580) | 21.25 | 17.714 |
| | 140 (5700) | 20.82 | 17.688 |
| IEEE 802.11n-HT40 | 38 (5190) | 39.13 | 36.108 |
| | 46 (5230) | 39.28 | 36.082 |
| | 54 (5270) | 39.24 | 36.122 |
| | 62 (5310) | 39.65 | 36.075 |
| | 102 (5510) | 39.14 | 36.069 |
| | 110 (5550) | 39.47 | 36.099 |
| | 134 (5670) | 39.57 | 36.160 |

| Mode | Channel | 26 dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---|---|---|---|
| IEEE 802.11ac-VHT20 | 36 (5180) | 21.08 | 17.711 |
| | 44 (5220) | 20.82 | 17.694 |
| | 48 (5240) | 21.12 | 17.678 |
| | 52 (5260) | 20.81 | 17.646 |
| | 60 (5300) | 20.97 | 17.717 |
| | 64 (5320) | 21.25 | 17.679 |
| | 100 (5500) | 21.17 | 17.682 |
| | 116 (5580) | 21.13 | 17.694 |
| | 140 (5700) | 20.81 | 17.654 |
| IEEE 802.11ac-VHT40 | 38 (5190) | 40.02 | 36.127 |
| | 46 (5230) | 39.37 | 36.093 |
| | 54 (5270) | 39.42 | 36.125 |
| | 62 (5310) | 39.49 | 36.091 |
| | 102 (5510) | 39.31 | 36.092 |
| | 110 (5550) | 39.44 | 36.074 |
| | 134 (5670) | 39.39 | 36.073 |
| IEEE 802.11ac-VHT80 | 42 (5210) | 81.04 | 75.421 |
| | 58 (5290) | 80.37 | 75.404 |
| | 106 (5530) | 80.62 | 75.469 |

**The test plots as follows:**

## IEEE 802.11a

### Channel 36

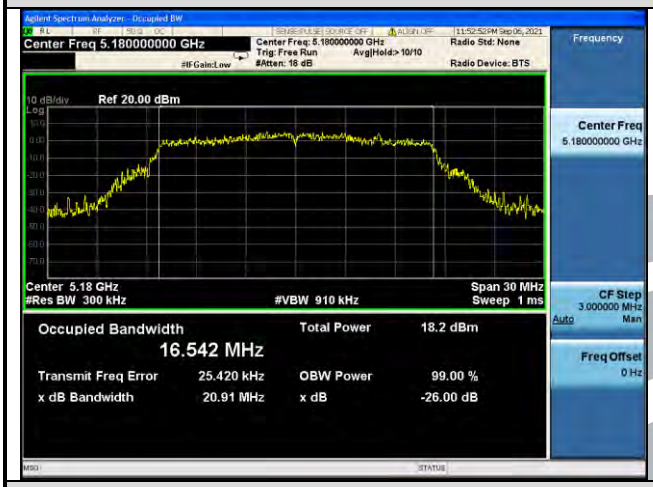


### Channel 44

### Channel 48

### Channel 52

### Channel 60

### Channel 64

**Channel 100**

**Channel 116**

**Channel 140**

**IEEE 802.11n-HT20**

**Channel 36**

**Channel 44**

**Channel 48**

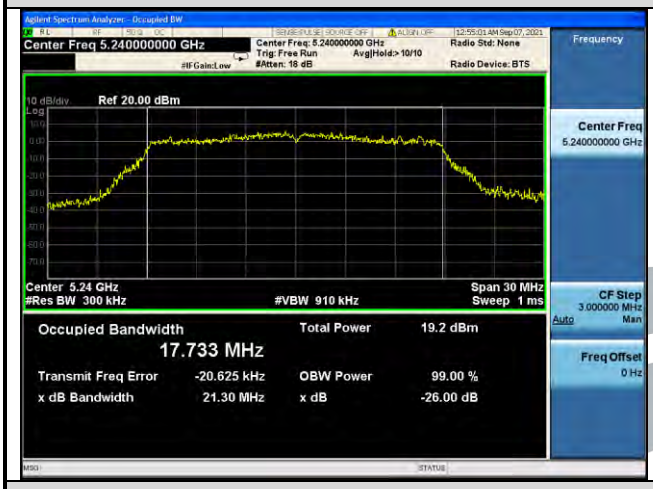


**Channel 52**

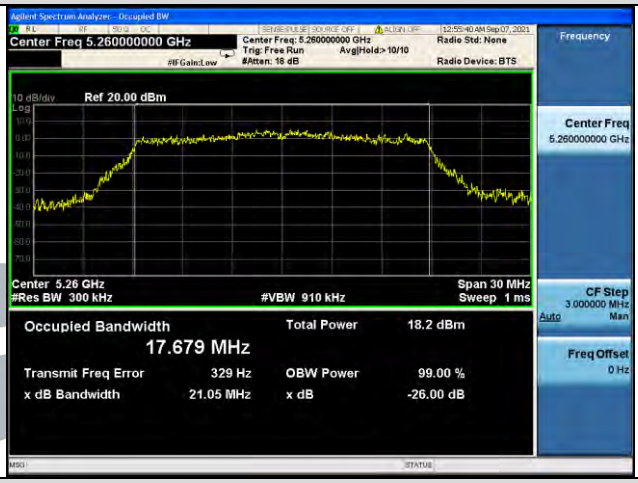


**Channel 60**

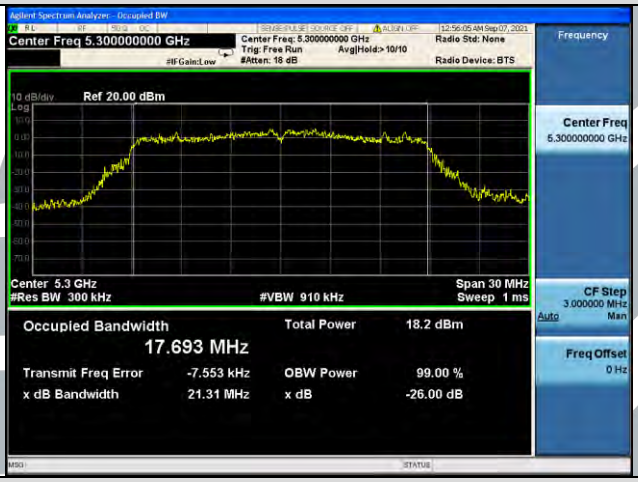


**Channel 64**

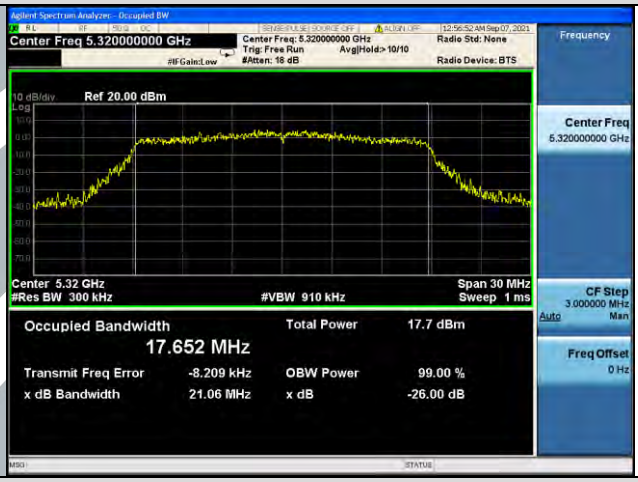


**Channel 100**

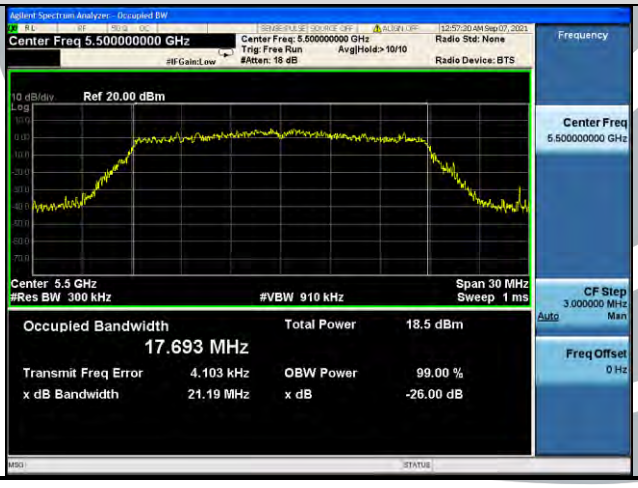


**Channel 116**

**Channel 140**

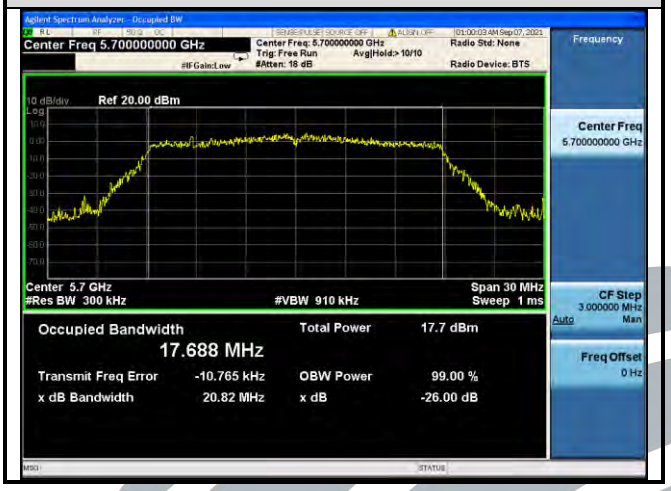


## IEEE 802.11n-HT40

**Channel 38**

**Channel 46**

**Channel 54**

**Channel 62**

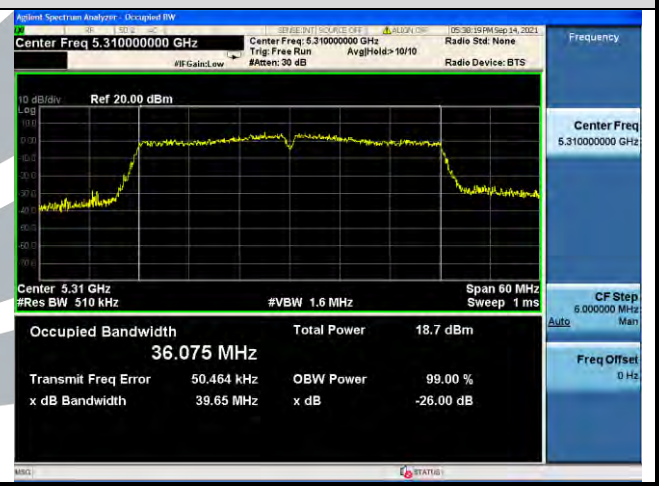

**Channel 102**

**Channel 110**

**Channel 134**

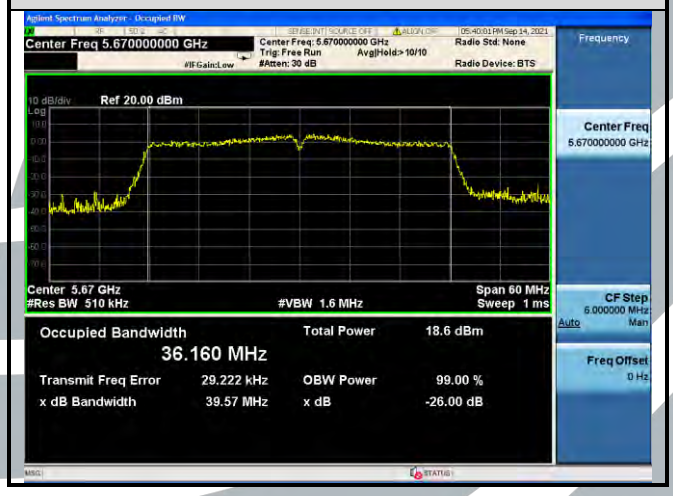

## IEEE 802.11ac-VHT20

### Channel 36

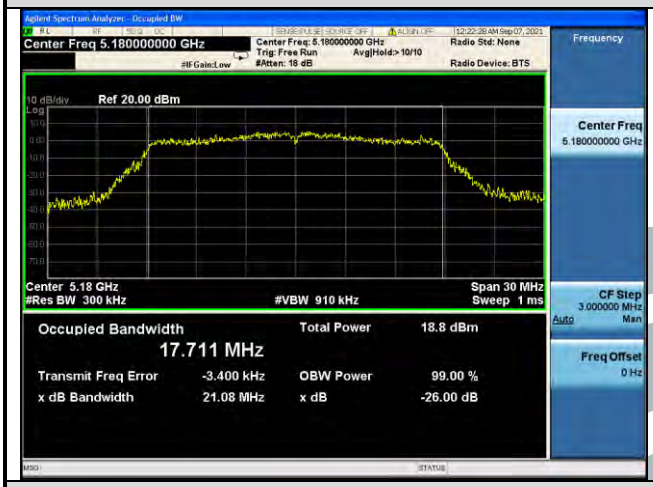


### Channel 44

### Channel 48

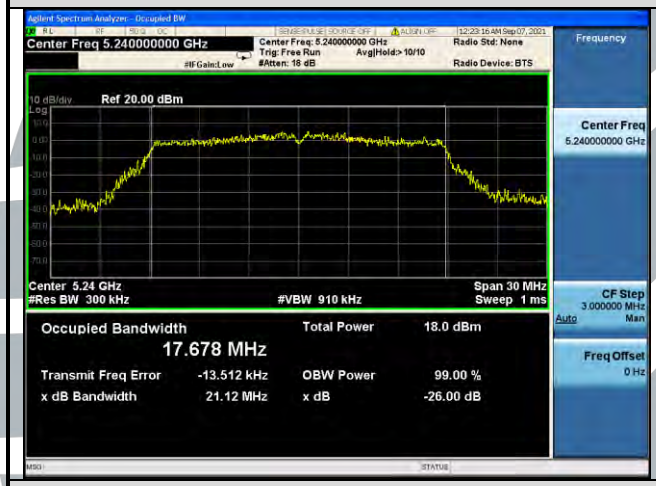


### Channel 52

### Channel 60

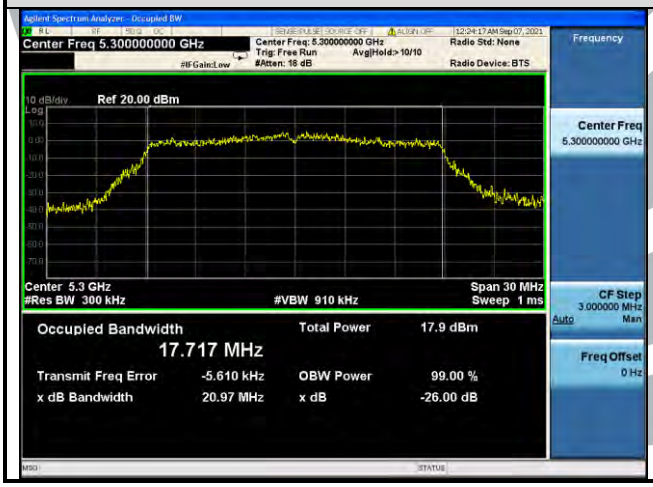


### Channel 64

**Channel 100**

**Channel 116**

**Channel 140**

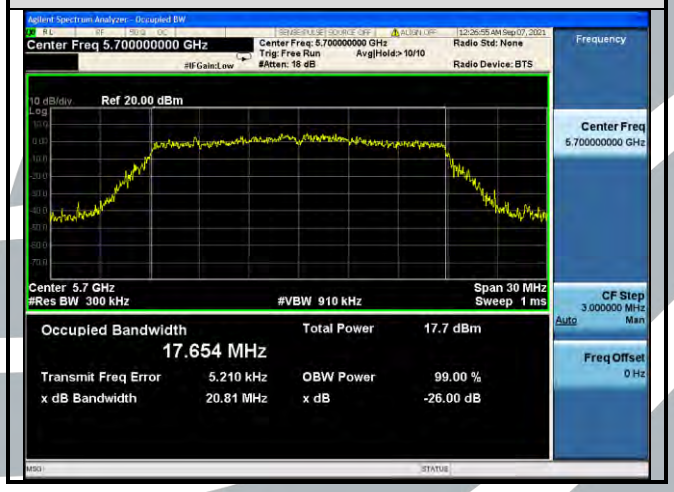


## IEEE 802.11ac-VHT40

**Channel 38**

**Channel 46**

**Channel 54**

**Channel 62**

**Channel 102**

**Channel 110**

**Channel 134**

## IEEE 802.11ac-VHT80

### Channel 42

### Channel 58

### Channel 106

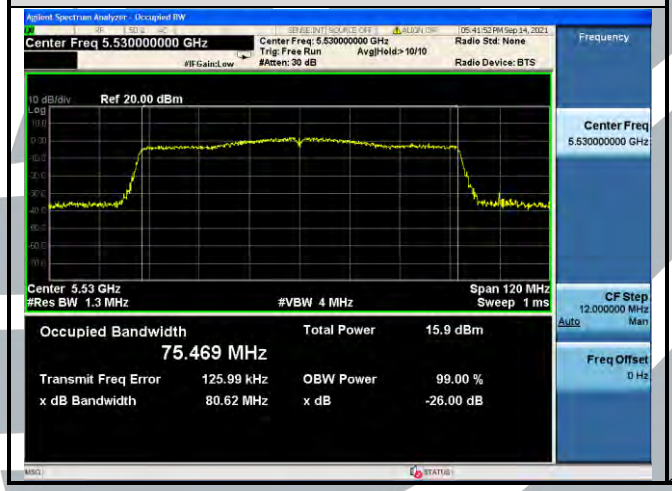

## 5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (e)
RSS-247 Issue 2 Section 6.2.4.1

**Test Method:** KDB 789033 D02 v02r01 Section C.2

**Limit:** Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

**Test Procedure:**

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:
a) Set RBW = 100 kHz.
b) Set the video bandwidth (VBW) ≥ 3 * RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

| Mode | Channel/ Frequency (MHz) | 6 dB Bandwidth (MHz) | 99% Bandwidth (MHz) | 6 dB Bandwidth Limit | Pass / Fail |
|---|---|---|---|---|---|
| IEEE 802.11a | 149 (5745) | 15.72 | 16.972 | > 500 kHz | Pass |
| | 157 (5785) | 15.39 | 16.868 | > 500 kHz | Pass |
| | 165 (5825) | 16.02 | 16.893 | > 500 kHz | Pass |
| IEEE 802.11n-HT20 | 149 (5745) | 15.96 | 17.837 | > 500 kHz | Pass |
| | 157 (5785) | 15.35 | 17.924 | > 500 kHz | Pass |
| | 165 (5825) | 16.37 | 17.855 | > 500 kHz | Pass |
| IEEE 802.11n-HT40 | 151 (5755) | 35.14 | 36.506 | > 500 kHz | Pass |
| | 159 (5795) | 35.31 | 36.431 | > 500 kHz | Pass |
| IEEE 802.11ac-VHT20 | 149 (5745) | 15.45 | 17.915 | > 500 kHz | Pass |
| | 157 (5785) | 15.09 | 17.895 | > 500 kHz | Pass |
| | 165 (5825) | 15.15 | 17.873 | > 500 kHz | Pass |
| IEEE 802.11ac-VHT40 | 151 (5755) | 35.20 | 36.494 | > 500 kHz | Pass |
| | 159 (5795) | 35.47 | 36.591 | > 500 kHz | Pass |
| IEEE 802.11ac-VHT80 | 155 (5775) | 75.15 | 75.747 | > 500 kHz | Pass |

**The test plots as follows:**

**6 dB Bandwidth**

| IEEE 802.11a | IEEE 802.11n-HT20 |
|---|---|
| **Channel 149** | |
| | |
| **Channel 157** | |
| | 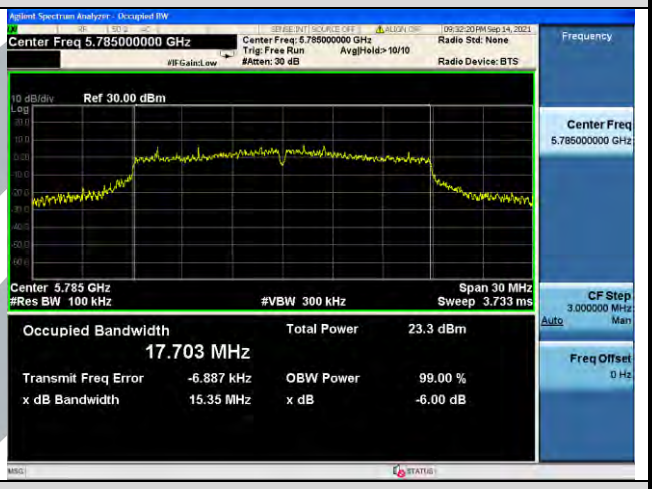 |
| **Channel 165** | |
| | |

## IEEE 802.11n-HT40

### Channel 151

### Channel 159

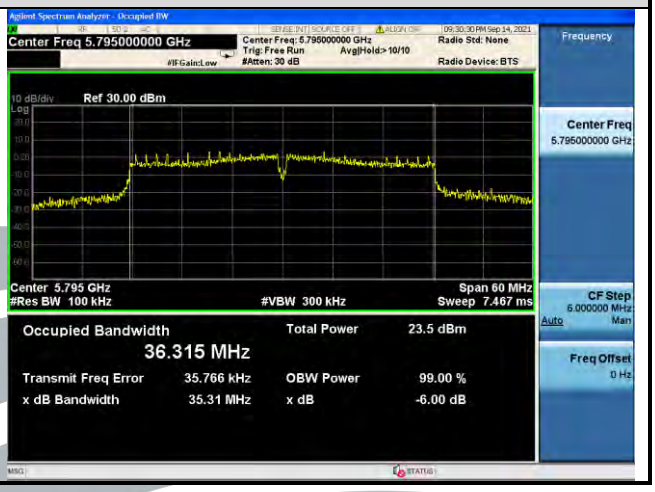


## IEEE 802.11ac-VHT20

### Channel 149

### Channel 157

### Channel 165

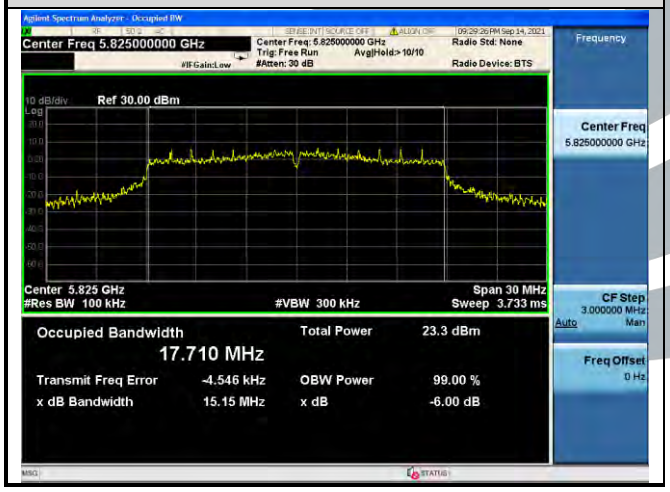

## IEEE 802.11 ac-VHT40

### Channel 151

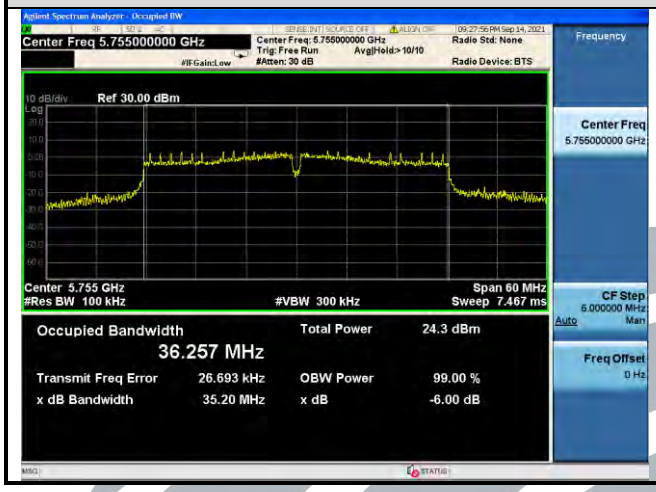


### Channel 159

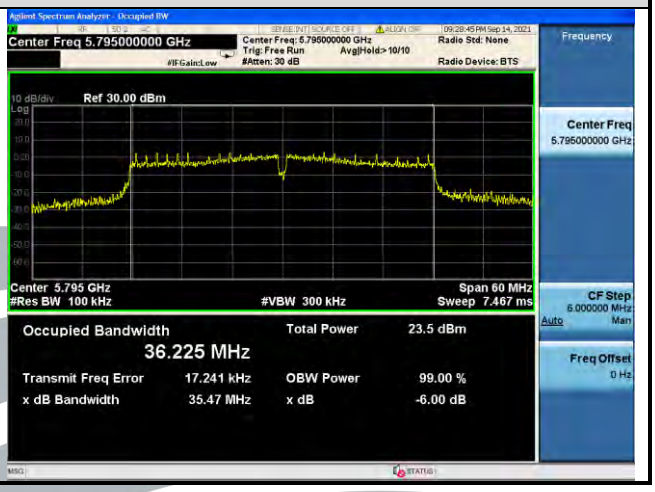


## IEEE 802.11ac-VHT80

### Channel 155

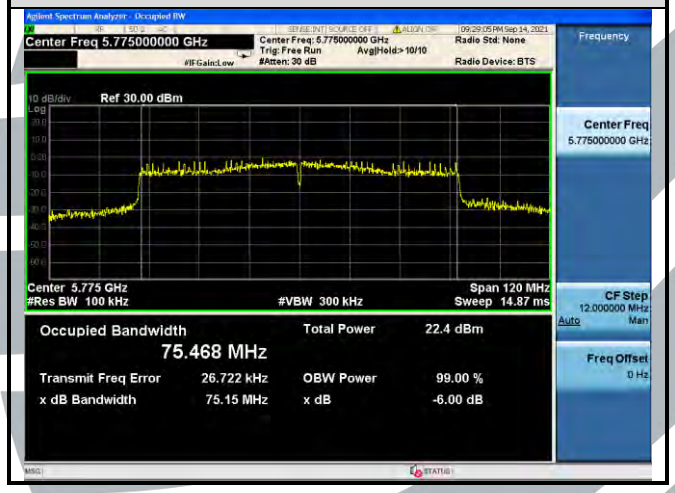

## Occupied Bandwidth

| IEEE 802.11a | IEEE 802.11n-HT20 |
|---|---|
| **Channel 149** | |
| 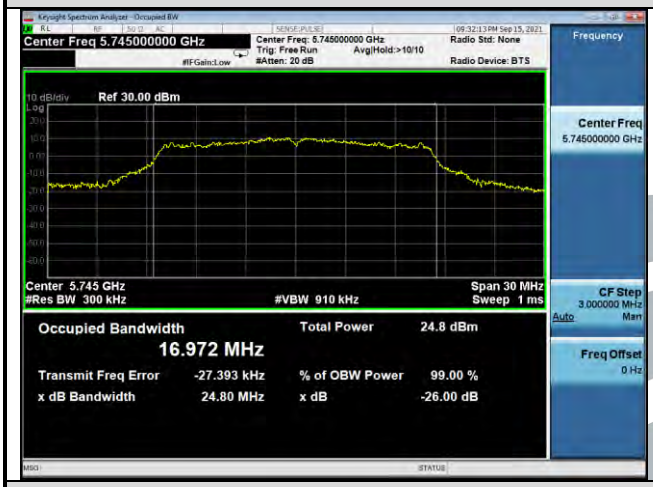 | |
| **Channel 157** | |
| | |
| **Channel 165** | |
| | 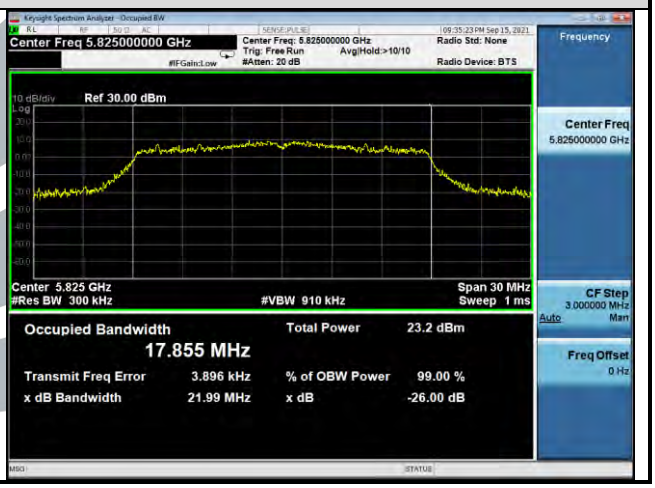 |

## IEEE 802.11n-HT40

### Channel 151

### Channel 159

## IEEE 802.11ac-VHT20

### Channel 149

### Channel 157

### Channel 165

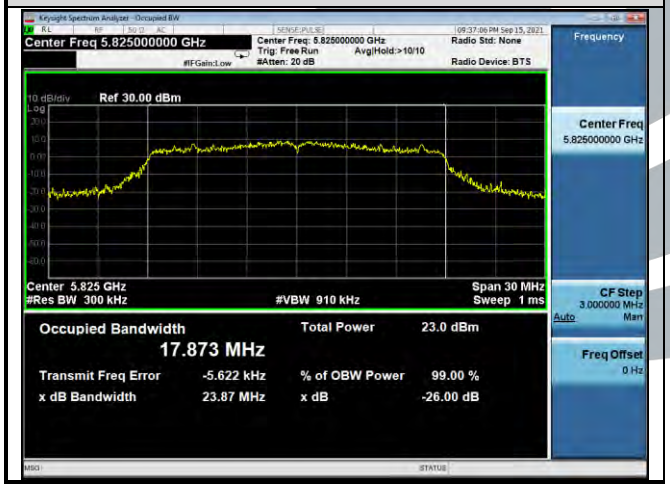

## IEEE 802.11 ac-VHT40

| Channel 151 | Channel 159 |
|---|---|
| | |





## IEEE 802.11ac-VHT80

### Channel 155

## 5.5 MAXIMUM CONDUCTED OUTPUT POWER OR E.I.R.P

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)
RSS-247 Issue 2 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1

**Test Method:** KDB 789033 D02 v02r01 Section E.3.a (Method PM)

**Limits:** FCC 47 CFR Part 15 Subpart E

1. For the band 5.15-5.25 GHz.
   (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

   (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

   (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

   (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Limits:** RSS-247 Issue 2

1. **Frequency band 5150-5250 MHz**
For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 $\log_{10}$B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

2. **Frequency band 5250-5350 MHz**
For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:
   a) The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

   b) The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

**Additional requirements**
In addition to the above requirements, devices shall comply with the following, where applicable:
   a) Outdoor fixed devices with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below:
      i. -13 dBW/MHz for $0^o \leq \theta < 8^o$
      ii. -13 − 0.716 (θ-8) dBW/MHz for $8^o \leq \theta < 40^o$
      iii. -35.9 − 1.22 (θ-40) dBW/MHz for $40^o \leq \theta \leq 45^o$
      iv. -42 dBW/MHz for $\theta > 45^o$

The measurement procedure defined in Annex A of this document shall be used to verify the compliance to the e.i.r.p. at different elevations.
   b) Devices, other than outdoor fixed devices, having an e.i.r.p. greater than 200 mW shall comply with either i. or ii. below:
      i. devices shall comply with the e.i.r.p. elevation mask in 6.2.2.3(a); or
      ii. devices shall implement a method to permanently reduce their e.i.r.p. via a firmwarefeature in the event that the Department requires it. The test report must demonstratehow the device's power table can be updated to meet this firmware requirement. Themanufacturer shall provide this firmware to update all systems automatically incompliance with the directions received from the Department.

3. **Frequency bands 5470-5600 MHz and 5650-5725 MHz**
The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

4. **Frequency band 5725-5850 MHz**
The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices

operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint[3] systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

**Test Procedure:**

1. Connected the EUT's antenna port to measure device by 10dB attenuator.
2. Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of Tx on burst.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

**Directional gain and the maximum output power limit.**

**RSS-247 Issue 2**

| Frequency Band | Antenna Gain (dBi)) | Power Limits (dBm) |
|---|---|---|
| U-NII-1 | 4.50 | 23.00 |
| U-NII-2A | 4.50 | 24.00 |
| U-NII-2C | 4.50 | 24.00 |
| U-NII-3 | 4.50 | 30.00 |

**FCC 47 CFR Part 15 Subpart E**

| Frequency Band | Antenna Gain (dBi)) | Power Limits (dBm) |
|---|---|---|
| U-NII-1 | 4.50 | 24.00 |
| U-NII-2A | 4.50 | 24.00 |
| U-NII-2C | 4.50 | 24.00 |
| U-NII-3 | 4.50 | 30.00 |

**Frequency band 5150-5250 MHz**
**RSS-247 Issue 2:**
For IEEE 802.11a, the minimum 99% emission bandwidth is 16.542 MHz
10 dBm + $10\log_{10}$ (16.542) = 22.19 dBm < 23 dBm
So the 22.19dB limit applicable

For IEEE 802.11n-HT20/ ac-VHT20, the minimum 99% emission bandwidth is 17.678MHz
10 dBm + $10\log_{10}$ (17.678) = 22.47 dBm < 23 dBm
So the 22.47dB limit applicable

For IEEE 802.11n-HT40/ ac-VHT40/ ac-VHT80, the minimum 99% emission bandwidth is 36.082 MHz
10 dBm + $10\log_{10}$ (36.082) = 25.57 dBm > 23 dBm
So the 23 dB limit applicable

| Mode | Channel/ Frequency (MHz) | Maximum e.i.r.p (dBm) | Limit (dBm) | Pass / Fail |
|---|---|---|---|---|
| IEEE 802.11a | 36 (5180) | 18.80 | 22.19 | Pass |
| | 44 (5220) | 18.71 | 22.19 | Pass |
| | 48 (5240) | 18.88 | 22.19 | Pass |
| IEEE 802.11n-HT20 | 36 (5180) | 18.51 | 22.47 | Pass |
| | 44 (5220) | 18.45 | 22.47 | Pass |
| | 48 (5240) | 18.35 | 22.47 | Pass |
| IEEE 802.11n-HT40 | 38 (5190) | 19.48 | 23.00 | Pass |
| | 46 (5230) | 19.50 | 23.00 | Pass |
| IEEE 802.11ac-VHT20 | 36 (5180) | 18.48 | 22.47 | Pass |
| | 44 (5220) | 18.44 | 22.47 | Pass |
| | 48 (5240) | 18.37 | 22.47 | Pass |
| IEEE 802.11ac-VHT40 | 38 (5190) | 19.53 | 23.00 | Pass |
| | 46 (5230) | 19.45 | 23.00 | Pass |
| IEEE 802.11ac-VHT80 | 42 (5210) | 17.28 | 23.00 | Pass |

**Remark:**
1. Maximum e.i.r.p = Maximum conducted output power + Antenna Gain

**FCC 47 CFR Part 15 Subpart E:**

| Mode | Channel/ Frequency (MHz) | Maximum conducted output power (dBm) | | Limit (dBm) | Pass / Fail |
|---|---|---|---|---|---|
| | | Meas Power | Corr'd Power | | |
| IEEE 802.11a | 36 (5180) | 14.12 | 14.30 | 24.00 | Pass |
| | 44 (5220) | 14.03 | 14.21 | 24.00 | Pass |
| | 48 (5240) | 14.20 | 14.38 | 24.00 | Pass |
| IEEE 802.11n-HT20 | 36 (5180) | 13.81 | 14.01 | 24.00 | Pass |
| | 44 (5220) | 13.75 | 13.95 | 24.00 | Pass |
| | 48 (5240) | 13.65 | 13.85 | 24.00 | Pass |
| IEEE 802.11n-HT40 | 38 (5190) | 14.52 | 14.98 | 24.00 | Pass |
| | 46 (5230) | 14.54 | 15.00 | 24.00 | Pass |
| IEEE 802.11ac-VHT20 | 36 (5180) | 13.78 | 13.98 | 24.00 | Pass |
| | 44 (5220) | 13.74 | 13.94 | 24.00 | Pass |
| | 48 (5240) | 13.67 | 13.87 | 24.00 | Pass |
| IEEE 802.11ac-VHT40 | 38 (5190) | 14.58 | 15.03 | 24.00 | Pass |
| | 46 (5230) | 14.50 | 14.95 | 24.00 | Pass |
| IEEE 802.11ac-VHT80 | 42 (5210) | 12.14 | 12.78 | 24.00 | Pass |

**Remark:**

1. Corr'd Power = Meas Power + Duty Cycle Factor

**Frequency band 5250-5350 MHz**
**RSS-247 Issue 2:**
For IEEE 802.11 a, the minimum 99% emission bandwidth is 16.517 MHz
11 dBm + $10\log_{10}$ (16.517) = 23.18dBm < 24dBm
So the 23.18 dB limit applicable

For IEEE 802.11n-HT20/ ac-VHT20, the minimum 99% emission bandwidth is 17.646 MHz
11 dBm + $10\log_{10}$ (17.646) =23.47 dBm < 24dBm
So the 23.47 dB limit applicable

For IEEE 802.11 n-HT40/ac-VHT40/ac-VHT80, the minimum 99% emission bandwidth is 36.075 MHz
11 dBm + $10\log_{10}$ (36.075) = 26.57dBm > 24 dBm (200mW)
So the 24 dB limit applicable

**FCC 47 CFR Part 15 Subpart E:**
For IEEE 802.11 a/n/ac, the minimum 26 dB emission bandwidth is 20.45MHz
11 dBm + $10\log_{10}$ (20.45) = 24.11 dBm> 24 dBm (200mW)
So the 24 dB limit applicable

| Mode | Channel/ Frequency (MHz) | Maximum conducted output power (dBm) | | Limit (dBm) | | Pass / Fail |
|---|---|---|---|---|---|---|
| | | Meas Power | Corr'd Power | FCC Part 15E | RSS-247 | |
| IEEE 802.11a | 52 (5260) | 14.18 | 14.36 | 24.00 | 23.18 | Pass |
| | 60 (5300) | 14.11 | 14.29 | 24.00 | 23.18 | Pass |
| | 64 (5320) | 14.35 | 14.53 | 24.00 | 23.18 | Pass |
| IEEE 802.11n-HT20 | 52 (5260) | 13.88 | 14.08 | 24.00 | 23.47 | Pass |
| | 60 (5300) | 14.01 | 14.21 | 24.00 | 23.47 | Pass |
| | 64 (5320) | 14.06 | 14.26 | 24.00 | 23.47 | Pass |
| IEEE 802.11n-HT40 | 54 (5270) | 14.66 | 15.12 | 24.00 | 24.00 | Pass |
| | 62 (5310) | 14.67 | 15.13 | 24.00 | 24.00 | Pass |
| IEEE 802.11ac-VHT20 | 52 (5260) | 13.98 | 14.18 | 24.00 | 23.47 | Pass |
| | 60 (5300) | 13.92 | 14.12 | 24.00 | 23.47 | Pass |
| | 64 (5320) | 14.09 | 14.29 | 24.00 | 23.47 | Pass |
| IEEE 802.11ac-VHT40 | 54 (5270) | 14.54 | 14.99 | 24.00 | 24.00 | Pass |
| | 62 (5310) | 14.59 | 15.04 | 24.00 | 24.00 | Pass |
| IEEE 802.11ac-VHT80 | 58 (5290) | 12.28 | 12.92 | 24.00 | 24.00 | Pass |

**Remark:**
1. Maximum conducted output power = Conducted output power + Duty Cycle Factor

**Frequency bands 5470-5725 MHz (RSS-247 Issue 2 Not including 5600-5650 MHz)**
**RSS-247 Issue 2:**
For IEEE 802.11 a, the minimum 99% emission bandwidth is 16.541MHz
11 dBm + $10\log_{10}$ (16.541) = 23.19 dBm < 24 dBm
So the 23.19 dB limit applicable

For IEEE 802.11n-HT20/ac-VHT20, the minimum 99% emission bandwidth is 17.654MHz
11 dBm + $10\log_{10}$ (17.654) = 23.47 dBm < 24 dBm
So the 23.47dB limit applicable

For IEEE 802.11 n-HT40/ac-VHT40/ac-VHT80, the minimum 99% emission bandwidth is 36.069 MHz
11 dBm + $10\log_{10}$ (36.069) = 26.57Bm > 24 dBm
So the 24 dB limit applicable

**FCC 47 CFR Part 15 Subpart E:**
For IEEE 802.11 a/n/ac, the minimum 26 dB emission bandwidth is 20.81 MHz
11 dBm + $10\log_{10}$ (20.81) = 24.18 dBm > 24 dBm
So the 24 dB limit applicable

| Mode | Channel/ Frequency (MHz) | Maximum conducted output power (dBm) | | Limit (dBm) | | Pass / Fail |
|---|---|---|---|---|---|---|
| | | SISO | | | | |
| | | Meas Power | Corr'd Power | FCC Part 15E | RSS-247 | |
| IEEE 802.11a | 100 (5500) | 14.34 | 14.52 | 24.00 | 23.19 | Pass |
| | 116 (5580) | 14.29 | 14.47 | 24.00 | 23.19 | Pass |
| | 140 (5700) | 14.41 | 14.59 | 24.00 | 23.19 | Pass |
| IEEE 802.11n-HT20 | 100 (5500) | 13.83 | 14.03 | 24.00 | 23.47 | Pass |
| | 116 (5580) | 13.41 | 13.61 | 24.00 | 23.47 | Pass |
| | 140 (5700) | 13.45 | 13.65 | 24.00 | 23.47 | Pass |
| IEEE 802.11n-HT40 | 102 (5510) | 12.81 | 13.27 | 24.00 | 24.00 | Pass |
| | 110 (5550) | 12.79 | 13.25 | 24.00 | 24.00 | Pass |
| | 134 (5670) | 12.98 | 13.44 | 24.00 | 24.00 | Pass |
| IEEE 802.11ac-VHT20 | 100 (5500) | 13.72 | 13.92 | 24.00 | 23.47 | Pass |
| | 116 (5580) | 13.84 | 14.04 | 24.00 | 23.47 | Pass |
| | 140 (5700) | 13.88 | 14.08 | 24.00 | 23.47 | Pass |
| IEEE 802.11ac-VHT40 | 102 (5510) | 12.54 | 12.99 | 24.00 | 24.00 | Pass |
| | 110 (5550) | 12.68 | 13.13 | 24.00 | 24.00 | Pass |
| | 134 (5670) | 12.57 | 13.02 | 24.00 | 24.00 | Pass |
| IEEE 802.11ac-VHT80 | 106 (5530) | 10.84 | 11.48 | 24.00 | 24.00 | Pass |

**Remark:**
1. Maximum conducted output power = Conducted output power + Duty Cycle Factor

**Frequency band 5725-5850 MHz**

| Mode | Channel/ Frequency (MHz) | Maximum conducted output power (dBm) | | Limit (dBm) | Pass / Fail |
|---|---|---|---|---|---|
| | | Meas Power | Corr'd Power | | |
| IEEE 802.11a | 149 (5745) | 19.16 | 19.34 | 30 | Pass |
| | 157 (5785) | 19.87 | 20.05 | 30 | Pass |
| | 165 (5825) | 19.96 | 20.14 | 30 | Pass |
| IEEE 802.11n-HT20 | 149 (5745) | 18.96 | 19.16 | 30 | Pass |
| | 157 (5785) | 18.81 | 19.01 | 30 | Pass |
| | 165 (5825) | 18.60 | 18.80 | 30 | Pass |
| IEEE 802.11n-HT40 | 151 (5755) | 19.03 | 19.49 | 30 | Pass |
| | 159 (5795) | 19.01 | 19.47 | 30 | Pass |
| IEEE 802.11ac-VHT20 | 149 (5745) | 18.82 | 19.02 | 30 | Pass |
| | 157 (5785) | 18.83 | 19.03 | 30 | Pass |
| | 165 (5825) | 18.87 | 19.07 | 30 | Pass |
| IEEE 802.11ac-VHT40 | 151 (5755) | 19.08 | 19.53 | 30 | Pass |
| | 159 (5795) | 19.02 | 19.47 | 30 | Pass |
| IEEE 802.11ac-VHT80 | 155 (5775) | 18.18 | 18.82 | 30 | Pass |

**Remark:**

1. Maximum conducted output power = Conducted output power + Duty Cycle Factor

## 5.6 PEAK POWER SPECTRAL DENSITY

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)
RSS-247 Issue 2 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1

**Test Method:** KDB 789033 D02 v02r01 Section F

**Limits:** FCC 47 CFR Part 15 Subpart E

1. For the band 5.15-5.25 GHz.
   (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

   (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

   (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

   (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Limits:** RSS-247 Issue 2

1. **Frequency band 5150-5250 MHz**
For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 $\log_{10}$B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

2. **Frequency band 5250-5350 MHz**
For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

**Additional requirements**
In addition to the above requirements, devices shall comply with the following, where applicable:

a) Outdoor fixed devices with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below:

i. -13 dBW/MHz for $0^o \leq \theta < 8^o$

ii. -13 − 0.716 (θ-8) dBW/MHz for $8^o \leq \theta < 40^o$

iii. -35.9 − 1.22 (θ-40) dBW/MHz for $40^o \leq \theta \leq 45^o$

iv. -42 dBW/MHz for $\theta > 45^o$

The measurement procedure defined in Annex A of this document shall be used to verify the compliance to the e.i.r.p. at different elevations.

b) Devices, other than outdoor fixed devices, having an e.i.r.p. greater than 200 mW shall comply with either i. or ii. below:

iii. devices shall comply with the e.i.r.p. elevation mask in 6.2.2.3(a); or

iv. devices shall implement a method to permanently reduce their e.i.r.p. via a firmwarefeature in the event that the Department requires it. The test report must demonstratehow the device's power table can be updated to meet this firmware requirement. Themanufacturer shall provide this firmware to update all systems automatically incompliance with the directions received from the Department.

3. **Frequency bands 5470-5600 MHz and 5650-5725 MHz**
The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

4. **Frequency band 5725-5850 MHz**
The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices

operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint[3] systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

**Test Procedure:**

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

**1. For U-NII-1, U-NII-2A, U-NII-2C band:**

Using method SA-2

a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
b) Set RBW = 1 MHz, Set VBW ≥ 3 RBW, Detector = RMS
c) Sweep time = auto, trigger set to “free run”.
d) Trace average at least 100 traces in power averaging mode.
e) Record the max value and add 10 log (1/duty cycle)

**2. For U-NII-3 band:**

a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
b) Set RBW = 500 kHz, Set VBW ≥ 3 RBW, Detector = RMS
c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
d) Sweep time = auto, trigger set to “free run”.
e) Trace average at least 100 traces in power averaging mode.
f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

**Directional gain and the maximum output power limit.**

**RSS-247 Issue 2:**

| Frequency Band | Antenna Gain (dBi)) | PSD Limits (dBm/MHz or dBm/500kHz) |
|---|---|---|
| U-NII-1 | 4.50 | 10.00 |
| U-NII-2A | 4.50 | 11.00 |
| U-NII-2C | 4.50 | 11.00 |
| U-NII-3 | 4.50 | 30.00 |

**FCC 47 CFR Part 15 Subpart E:**

| Frequency Band | Antenna Gain (dBi)) | PSD Limits (dBm/MHz or dBm/500kHz) |
|---|---|---|
| U-NII-1 | 4.50 | 11.00 |
| U-NII-2A | 4.50 | 11.00 |
| U-NII-2C | 4.50 | 11.00 |
| U-NII-3 | 4.50 | 30.00 |

**Frequency band 5150-5250 MHz**
**RSS-247 Issue 2**

| Mode | Channel/ Frequency (MHz) | e.i.r.p. spectral density (dBm/MHz) | Limit (dBm/MHz) | Pass / Fail |
|---|---|---|---|---|
| IEEE 802.11a | 36 (5180) | 9.990 | 10 | Pass |
| | 44 (5220) | 9.012 | 10 | Pass |
| | 48 (5240) | 9.843 | 10 | Pass |
| IEEE 802.11n-HT20 | 36 (5180) | 9.631 | 10 | Pass |
| | 44 (5220) | 9.520 | 10 | Pass |
| | 48 (5240) | 9.303 | 10 | Pass |
| IEEE 802.11n-HT40 | 38 (5190) | 7.843 | 10 | Pass |
| | 46 (5230) | 7.305 | 10 | Pass |
| IEEE 802.11ac-VHT20 | 36 (5180) | 9.633 | 10 | Pass |
| | 44 (5220) | 9.417 | 10 | Pass |
| | 48 (5240) | 9.068 | 10 | Pass |
| IEEE 802.11ac-VHT40 | 38 (5190) | 7.492 | 10 | Pass |
| | 46 (5230) | 7.738 | 10 | Pass |
| IEEE 802.11ac-VHT80 | 42 (5210) | 4.668 | 10 | Pass |

**Remark:**

1. e.i.r.p. spectral density = Power spectral density + Duty Cycle Factor + Antenna Gain

**FCC 47 CFR Part 15 Subpart E**

| Mode | Channel/ Frequency (MHz) | Power spectral density (dBm/MHz) | | Limit (dBm/MHz) | Pass / Fail |
|---|---|---|---|---|---|
| | | Meas PSD | Corr'd PSD | | |
| IEEE 802.11a | 36 (5180) | 5.305 | 5.490 | 11 | Pass |
| | 44 (5220) | 5.227 | 5.412 | 11 | Pass |
| | 48 (5240) | 5.158 | 5.343 | 11 | Pass |
| IEEE 802.11n-HT20 | 36 (5180) | 4.934 | 5.131 | 11 | Pass |
| | 44 (5220) | 4.823 | 5.020 | 11 | Pass |
| | 48 (5240) | 4.606 | 4.803 | 11 | Pass |
| IEEE 802.11n-HT40 | 38 (5190) | 2.885 | 3.343 | 11 | Pass |
| | 46 (5230) | 2.347 | 2.805 | 11 | Pass |
| IEEE 802.11ac-VHT20 | 36 (5180) | 4.937 | 5.133 | 11 | Pass |
| | 44 (5220) | 4.721 | 4.917 | 11 | Pass |
| | 48 (5240) | 4.372 | 4.568 | 11 | Pass |
| IEEE 802.11ac-VHT40 | 38 (5190) | 2.541 | 2.992 | 11 | Pass |
| | 46 (5230) | 2.787 | 3.238 | 11 | Pass |
| IEEE 802.11ac-VHT80 | 42 (5210) | -0.472 | 0.168 | 11 | Pass |

**Remark:**

1. Power spectral density = Conducted power spectral density + Duty Cycle Factor

**Frequency band 5250-5350 MHz**

| Mode | Channel/ Frequency (MHz) | Power spectral density (dBm/MHz) | | Limit (dBm/MHz) | Pass / Fail |
|---|---|---|---|---|---|
| | | Meas PSD | Corr'd PSD | | |
| IEEE 802.11a | 52 (5260) | 4.901 | 5.086 | 11 | Pass |
| | 60 (5300) | 4.998 | 5.183 | 11 | Pass |
| | 64 (5320) | 5.111 | 5.296 | 11 | Pass |
| IEEE 802.11n-HT20 | 52 (5260) | 4.599 | 4.796 | 11 | Pass |
| | 60 (5300) | 4.177 | 4.374 | 11 | Pass |
| | 64 (5320) | 4.402 | 4.599 | 11 | Pass |
| IEEE 802.11n-HT40 | 54 (5270) | 2.420 | 2.878 | 11 | Pass |
| | 62 (5310) | 2.307 | 2.765 | 11 | Pass |
| IEEE 802.11ac-VHT20 | 52 (5260) | 4.549 | 4.745 | 11 | Pass |
| | 60 (5300) | 4.148 | 4.344 | 11 | Pass |
| | 64 (5320) | 4.195 | 4.391 | 11 | Pass |
| IEEE 802.11ac-VHT40 | 54 (5270) | 2.386 | 2.837 | 11 | Pass |
| | 62 (5310) | 2.046 | 2.497 | 11 | Pass |
| IEEE 802.11ac-VHT80 | 58 (5290) | -1.096 | -0.456 | 11 | Pass |

**Remark:**

1. Power spectral density = Conducted power spectral density + Duty Cycle Factor

**Frequency bands 5470-5725 MHz (RSS-247 Issue 2 Not including 5600-5650 MHz)**

| Mode | Channel/ Frequency (MHz) | Power spectral density (dBm/MHz) | | Limit (dBm/MHz) | Pass / Fail |
|---|---|---|---|---|---|
| | | Meas PSD | Corr'd PSD | | |
| IEEE 802.11a | 100 (5500) | 5.007 | 5.192 | 11 | Pass |
| | 116 (5580) | 4.603 | 4.788 | 11 | Pass |
| | 140 (5700) | 4.491 | 4.676 | 11 | Pass |
| IEEE 802.11n-HT20 | 100 (5500) | 4.164 | 4.361 | 11 | Pass |
| | 116 (5580) | 3.991 | 4.188 | 11 | Pass |
| | 140 (5700) | 3.897 | 4.094 | 11 | Pass |
| IEEE 802.11n-HT40 | 102 (5510) | -0.690 | -0.232 | 11 | Pass |
| | 110 (5550) | 2.181 | 2.639 | 11 | Pass |
| | 134 (5670) | -0.696 | -0.238 | 11 | Pass |
| IEEE 802.11ac-VHT20 | 100 (5500) | 4.275 | 4.471 | 11 | Pass |
| | 116 (5580) | 3.628 | 3.824 | 11 | Pass |
| | 140 (5700) | 4.176 | 4.372 | 11 | Pass |
| IEEE 802.11ac-VHT40 | 102 (5510) | 1.099 | 1.550 | 11 | Pass |
| | 110 (5550) | 1.861 | 2.312 | 11 | Pass |
| | 134 (5670) | 1.402 | 1.853 | 11 | Pass |
| IEEE 802.11ac-VHT80 | 106 (5530) | -2.147 | -1.507 | 11 | Pass |

**Remark:**

1. Power spectral density = Conducted power spectral density + Duty Cycle Factor

**Frequency band 5725-5850 MHz**

| Mode | Channel/ Frequency (MHz) | Power spectral density (dBm/500kHz) | | Limit (dBm/500KHz) | Pass / Fail |
|---|---|---|---|---|---|
| | | Meas PSD | Corr'd PSD | | |
| IEEE 802.11a | 149 (5745) | 6.134 | 6.319 | 30 | Pass |
| | 157 (5785) | 6.061 | 6.246 | 30 | Pass |
| | 165 (5825) | 5.605 | 5.790 | 30 | Pass |
| IEEE 802.11n-HT20 | 149 (5745) | 5.733 | 5.930 | 30 | Pass |
| | 157 (5785) | 5.310 | 5.507 | 30 | Pass |
| | 165 (5825) | 6.094 | 6.291 | 30 | Pass |
| IEEE 802.11n-HT40 | 151 (5755) | 2.588 | 3.046 | 30 | Pass |
| | 159 (5795) | 2.420 | 2.878 | 30 | Pass |
| IEEE 802.11ac-VHT20 | 149 (5745) | 5.749 | 5.945 | 30 | Pass |
| | 157 (5785) | 5.399 | 5.595 | 30 | Pass |
| | 165 (5825) | 4.874 | 5.070 | 30 | Pass |
| IEEE 802.11ac-VHT40 | 151 (5755) | 2.827 | 3.278 | 30 | Pass |
| | 159 (5795) | 2.771 | 3.222 | 30 | Pass |
| IEEE 802.11ac-VHT80 | 155 (5775) | -1.000 | -0.360 | 30 | Pass |

**Remark:**

1. Power spectral density = Conducted power spectral density + Duty Cycle Factor

**The test plots as follows:**

| IEEE 802.11a | IEEE 802.11n-HT20 |
|---|---|
| **Channel 36** | |
| | |
| **Channel 44** | |
| | |
| **Channel 48** | |
| | |

| IEEE 802.11a | IEEE 802.11n-HT20 |
|---|---|
| **Channel 52** | |
| | |
| **Channel 60** | |
| | |
| **Channel 64** | |
| | |

| IEEE 802.11a | IEEE 802.11n-HT20 |
|---|---|
| **Channel 100** | |
| | |
| **Channel 116** | |
| | |
| **Channel 140** | |
| | |

| IEEE 802.11a | IEEE 802.11n-HT20 |
|---|---|
| **Channel 149** | |
| | |
| **Channel 157** | |
| | |
| **Channel 165** | |
| | |

## IEEE 802.11n-HT40

### Channel 38

### Channel 46

### Channel 54

### Channel 62

### Channel 102

### Channel 110

## IEEE 802.11n-HT40

### Channel 134

### Channel 151

### Channel 159

| IEEE 802.11ac-VHT20 | IEEE 802.11ac-VHT40 |
|---|---|
| **Channel 36** | **Channel 38** |
| | |
| **Channel 44** | |
| | / |
| **Channel 48** | **Channel 46** |
| | |

| IEEE 802.11ac-VHT20 | IEEE 802.11ac-VHT40 |
|---|---|
| **Channel 52** | **Channel 54** |
| | |
| **Channel 60** | / |
| | |
| **Channel 64** | **Channel 62** |
| | |

| IEEE 802.11ac-VHT20 | IEEE 802.11ac-VHT40 |
|---|---|
| **Channel 100** | **Channel 102** |
| | |
| **Channel 116** | **Channel 110** |
| | |
| **Channel 140** | **Channel 134** |
| | |

| IEEE 802.11ac-VHT20 | IEEE 802.11ac-VHT40 |
|---|---|
| **Channel 149** | **Channel 151** |
| | |
| **Channel 157** | / |
| | |
| **Channel 165** | **Channel 159** |
| | |

| IEEE 802.11ac-VHT80 | |
|---|---|
| Channel 42 | Channel 58 |
| | |
| Channel 106 | Channel 155 |
| 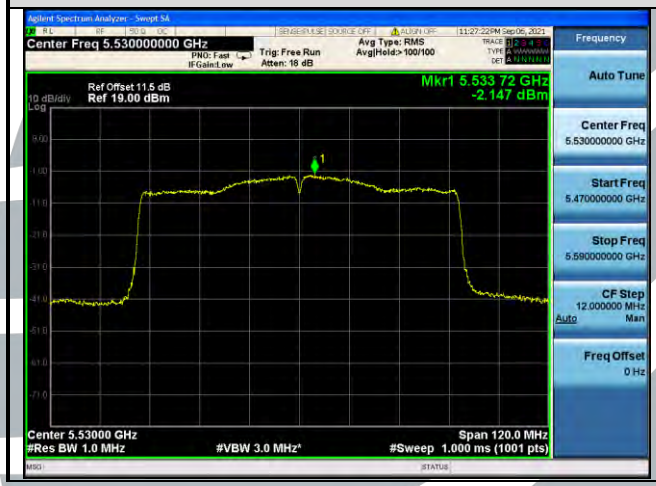 | |

## 5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6)
FCC 47 CFR Part 15 Subpart C Section 15.209/205
RSS-247 Issue 2 Section 6.2.1.2/6.2.2.2/6.2.3.2/6.2.4.2

**Test Method:** KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6

**Receiver Setup:**

| Frequency | RBW |
|---|---|
| 0.009 MHz-0.150 MHz | 200/300 kHz |
| 0.150 MHz -30 MHz | 9/10 kHz |
| 30 MHz-1 GHz | 100/120 kHz |
| Above 1 GHz | 1 MHz |

**Limits:**

**1. Limits of Radiated Emission and Band edge Measurement**

Radiated emissions that fall in the restricted bands must comply with the general emissions limits in 15.209(a) as below table. Other emissions shall be at least 20 dB below the highest level of the desired power.

| Frequency | Field strength (microvolt/meter) | Limit (dBμV/m ) | Remark | Measurement distance (m) |
|---|---|---|---|---|
| 0.009 MHz-0.490 MHz | 2400/F(kHz) | -- | -- | 300 |
| 0.490 MHz-1.705 MHz | 24000/F(kHz) | -- | -- | 30 |
| 1.705 MHz-30 MHz | 30 | -- | -- | 30 |
| 30 MHz-88 MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88 MHz-216 MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216 MHz-960 MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1 GHz | 500 | 54.0 | Average | 3 |

**Remark:**

a. The lower limit shall apply at the transition frequencies.
b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

**2. Limits of Unwanted Emission Out of the Restricted Bands**

| Applicable To | Limit | |
|---|---|---|
| **789033 D02 General U-NII Test Procedures New Rules v01r04** | **Field Strength at 3 m** | |
| | **PK: 74 (dBμV/m)** | **AV: 54 (dBμV/m)** |
| Applicable To | EIRP Limit | Equivalent Field Strength at 3 m |
| RSS-247 Issue 2 Section 6.2.1.2 | PK: -27 (dBm/MHz) | PK: 74 (dBμV/m) |
| RSS-247 Issue 2 Section 6.2.2.2 | PK: -27 (dBm/MHz) | PK: 74 (dBμV/m) |
| RSS-247 Issue 2 Section 6.2.3.2 | PK: -27 (dBm/MHz) | PK: 68.2 (dBμV/m) |
| RSS-247 Issue 2 Section 6.2.4.2 | 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges; | PK: 68.2 (dBμV/m) |
| | 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; | |
| | 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; | |
| | -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges. | |

**Test Setup:** Refer to section 4.5.1 for details.

**Test Procedures:**

1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
6. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Remark:

a) The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
b) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
c) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98 %) for Average detection (AV) at frequency above 1 GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
d) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) or ≥ 1/T(duty cycle is < 98%) for Average detection (AV) at frequency above 1 GHz.
e) All modes of operation were investigated and the worst-case emissions are reported.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The measurement data as follows:**

| Radiated Emission Test Data (9 KHz ~ 30 MHz): |
|---|
| The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report. |

**Radiated Emission Test Data (30 MHz ~ 1 GHz Worst Case):**

**Worst-Case Configuration**

**Horizontal**

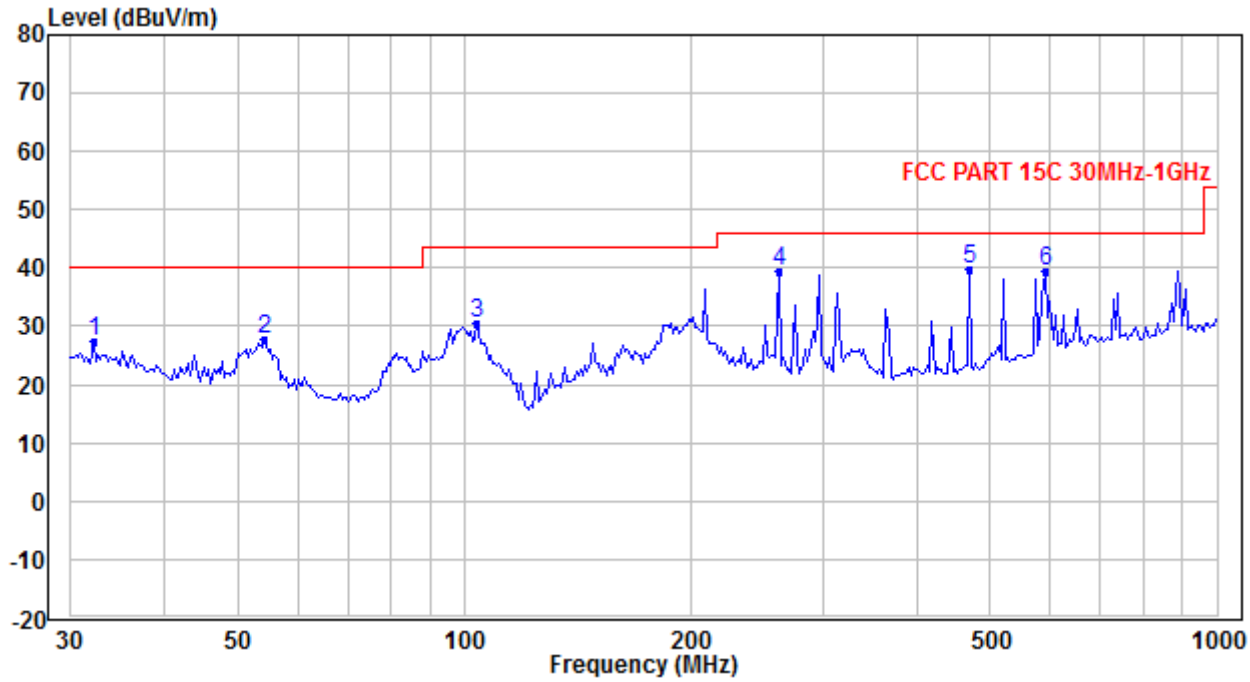


| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB/m ) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 32.184 | 32.35 | -4.89 | 27.46 | 40.00 | -12.54 | QP |
| 2 | 54.135 | 44.69 | -16.89 | 27.80 | 40.00 | -12.20 | QP |
| 3 | 104.064 | 46.21 | -15.78 | 30.43 | 43.50 | -13.07 | QP |
| 4 | 261.273 | 47.63 | -8.23 | 39.40 | 46.00 | -6.60 | QP |
| 5 | 468.165 | 43.24 | -3.55 | 39.69 | 46.00 | -6.31 | QP |
| 6 | 590.351 | 40.67 | -1.28 | 39.39 | 46.00 | -6.61 | QP |

**Vertical**

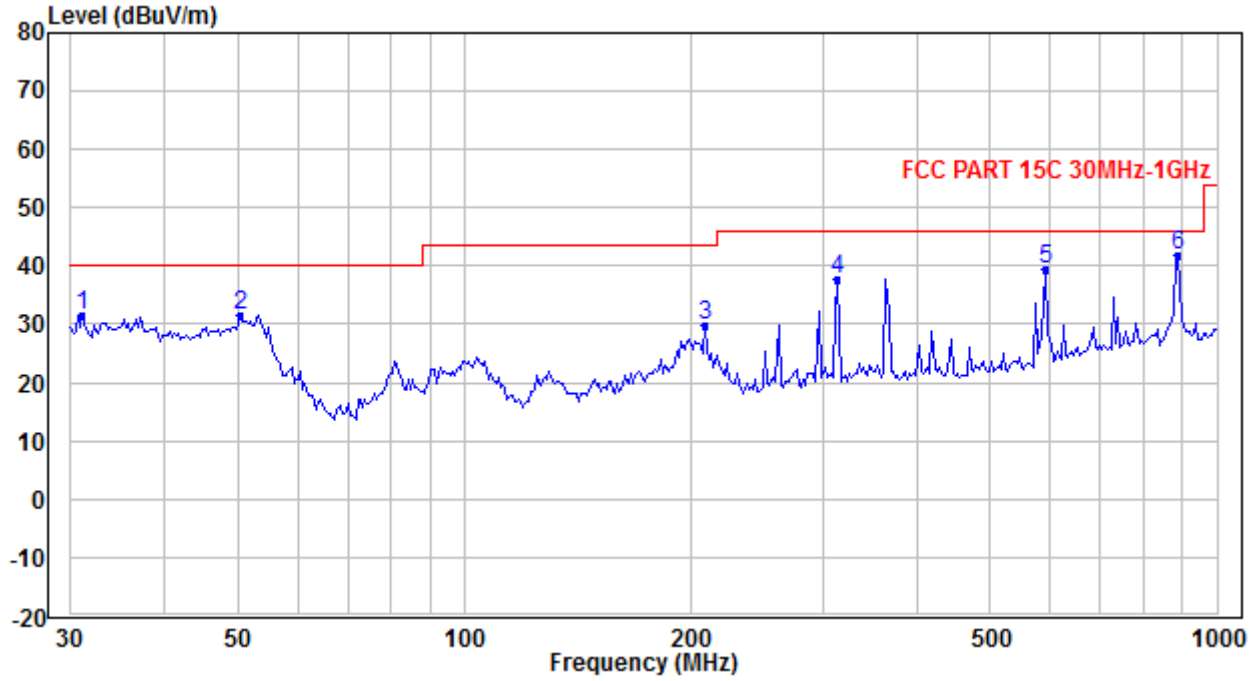


| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB/m ) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 31.073 | 36.37 | -4.68 | 31.69 | 40.00 | -8.31 | QP |
| 2 | 50.461 | 46.65 | -14.97 | 31.68 | 40.00 | -8.32 | QP |
| 3 | 208.658 | 40.83 | -10.85 | 29.98 | 43.50 | -13.52 | QP |
| 4 | 313.648 | 43.67 | -5.97 | 37.70 | 46.00 | -8.30 | QP |
| 5 | 590.351 | 40.70 | -1.28 | 39.42 | 46.00 | -6.58 | QP |
| 6 | 887.398 | 37.83 | 4.07 | 41.90 | 46.00 | -4.10 | QP |

**Radiated Emission Test Data (Above 1GHz):**

**IEEE 802.11a_Channel 36**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10360.00 | 41.24 | 6.24 | 47.48 | 74.00 | -26.52 | Peak | Horizontal |
| 2 | 10360.00 | 28.96 | 6.24 | 35.20 | 54.00 | -18.80 | Average | Horizontal |
| 3 | 15540.00 | 38.45 | 11.38 | 49.83 | 74.00 | -24.17 | Peak | Horizontal |
| 4 | 15540.00 | 25.76 | 11.38 | 37.14 | 54.00 | -16.86 | Average | Horizontal |
| 5 | 10360.00 | 41.45 | 6.24 | 47.69 | 74.00 | -26.31 | Peak | Vertical |
| 6 | 10360.00 | 28.85 | 6.24 | 35.09 | 54.00 | -18.91 | Average | Vertical |
| 7 | 15540.00 | 38.10 | 11.38 | 49.48 | 74.00 | -24.52 | Peak | Vertical |
| 8 | 15540.00 | 25.76 | 11.38 | 37.14 | 54.00 | -16.86 | Average | Vertical |

**IEEE 802.11a_Channel 44**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10440.00 | 40.77 | 6.30 | 47.07 | 74.00 | -26.93 | Peak | Horizontal |
| 2 | 10440.00 | 28.68 | 6.30 | 34.98 | 54.00 | -19.02 | Average | Horizontal |
| 3 | 15660.00 | 38.77 | 11.53 | 50.30 | 74.00 | -23.70 | Peak | Horizontal |
| 4 | 15660.00 | 25.81 | 11.53 | 37.34 | 54.00 | -16.66 | Average | Horizontal |
| 5 | 10440.00 | 40.33 | 6.30 | 46.63 | 74.00 | -27.37 | Peak | Vertical |
| 6 | 10440.00 | 28.52 | 6.30 | 34.82 | 54.00 | -19.18 | Average | Vertical |
| 7 | 15660.00 | 38.36 | 11.53 | 49.89 | 74.00 | -24.11 | Peak | Vertical |
| 8 | 15660.00 | 25.89 | 11.53 | 37.42 | 54.00 | -16.58 | Average | Vertical |

**MIMO IEEE 802.11a_Channel 48**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10480.00 | 40.17 | 6.33 | 46.50 | 74.00 | -27.50 | Peak | Horizontal |
| 2 | 10480.00 | 28.42 | 6.33 | 34.75 | 54.00 | -19.25 | Average | Horizontal |
| 3 | 15720.00 | 37.85 | 11.63 | 49.48 | 74.00 | -24.52 | Peak | Horizontal |
| 4 | 15720.00 | 25.70 | 11.63 | 37.33 | 54.00 | -16.67 | Average | Horizontal |
| 5 | 10480.00 | 41.05 | 6.33 | 47.38 | 74.00 | -26.62 | Peak | Vertical |
| 6 | 10480.00 | 28.31 | 6.33 | 34.64 | 54.00 | -19.36 | Average | Vertical |
| 7 | 15720.00 | 37.55 | 11.63 | 49.18 | 74.00 | -24.82 | Peak | Vertical |
| 8 | 15720.00 | 25.70 | 11.63 | 37.33 | 54.00 | -16.67 | Average | Vertical |

**IEEE 802.11a_Channel 52**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10520.00 | 40.96 | 6.33 | 47.29 | 74.00 | -26.71 | Peak | Horizontal |
| 2 | 10520.00 | 28.31 | 6.33 | 34.64 | 54.00 | -19.36 | Average | Horizontal |
| 3 | 15780.00 | 38.03 | 11.71 | 49.74 | 74.00 | -24.26 | Peak | Horizontal |
| 4 | 15780.00 | 25.69 | 11.71 | 37.40 | 54.00 | -16.60 | Average | Horizontal |
| 5 | 10520.00 | 40.85 | 6.33 | 47.18 | 74.00 | -26.82 | Peak | Vertical |
| 6 | 10520.00 | 28.31 | 6.33 | 34.64 | 54.00 | -19.36 | Average | Vertical |
| 7 | 15780.00 | 37.50 | 11.71 | 49.21 | 74.00 | -24.79 | Peak | Vertical |
| 8 | 15780.00 | 25.62 | 11.71 | 37.33 | 54.00 | -16.67 | Average | Vertical |

**IEEE 802.11a_Channel 60**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10600.00 | 40.42 | 6.30 | 46.72 | 74.00 | -27.28 | Peak | Horizontal |
| 2 | 10600.00 | 27.35 | 6.30 | 33.65 | 54.00 | -20.35 | Average | Horizontal |
| 3 | 15900.00 | 39.53 | 11.89 | 51.42 | 74.00 | -22.58 | Peak | Horizontal |
| 4 | 15900.00 | 25.92 | 11.89 | 37.81 | 54.00 | -16.19 | Average | Horizontal |
| 5 | 10600.00 | 40.10 | 6.30 | 46.40 | 74.00 | -27.60 | Peak | Vertical |
| 6 | 10600.00 | 27.35 | 6.30 | 33.65 | 54.00 | -20.35 | Average | Vertical |
| 7 | 15900.00 | 37.76 | 11.89 | 49.65 | 74.00 | -24.35 | Peak | Vertical |
| 8 | 15900.00 | 25.85 | 11.89 | 37.74 | 54.00 | -16.26 | Average | Vertical |

**IEEE 802.11a_Channel 64**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10640.00 | 39.71 | 6.28 | 45.99 | 74.00 | -28.01 | Peak | Horizontal |
| 2 | 10640.00 | 27.37 | 6.28 | 33.65 | 54.00 | -20.35 | Average | Horizontal |
| 3 | 15960.00 | 38.06 | 11.96 | 50.02 | 74.00 | -23.98 | Peak | Horizontal |
| 4 | 15960.00 | 25.78 | 11.96 | 37.74 | 54.00 | -16.26 | Average | Horizontal |
| 5 | 10640.00 | 39.73 | 6.28 | 46.01 | 74.00 | -27.99 | Peak | Vertical |
| 6 | 10640.00 | 27.30 | 6.28 | 33.58 | 54.00 | -20.42 | Average | Vertical |
| 7 | 15960.00 | 38.13 | 11.96 | 50.09 | 74.00 | -23.91 | Peak | Vertical |
| 8 | 15960.00 | 25.85 | 11.96 | 37.81 | 54.00 | -16.19 | Average | Vertical |

**IEEE 802.11a_Channel 100**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11000.00 | 40.59 | 6.12 | 46.71 | 74.00 | -27.29 | Peak | Horizontal |
| 2 | 11000.00 | 27.84 | 6.12 | 33.96 | 54.00 | -20.04 | Average | Horizontal |
| 3 | 16500.00 | 38.17 | 12.95 | 51.12 | 74.00 | -22.88 | Peak | Horizontal |
| 4 | 16500.00 | 25.65 | 12.95 | 38.60 | 54.00 | -15.40 | Average | Horizontal |
| 5 | 11000.00 | 40.35 | 6.28 | 46.63 | 74.00 | -27.37 | Peak | Vertical |
| 6 | 11000.00 | 27.74 | 6.28 | 34.02 | 54.00 | -19.98 | Average | Vertical |
| 7 | 16500.00 | 37.88 | 12.95 | 50.83 | 74.00 | -23.17 | Peak | Vertical |
| 8 | 16500.00 | 25.65 | 12.95 | 38.60 | 54.00 | -15.40 | Average | Vertical |

**IEEE 802.11a_Channel 116**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11160.00 | 40.23 | 6.37 | 46.60 | 74.00 | -27.40 | Peak | Horizontal |
| 2 | 11160.00 | 26.99 | 6.37 | 33.36 | 54.00 | -20.64 | Average | Horizontal |
| 3 | 16740.00 | 38.00 | 13.01 | 51.01 | 74.00 | -22.99 | Peak | Horizontal |
| 4 | 16740.00 | 25.94 | 13.01 | 38.95 | 54.00 | -15.05 | Average | Horizontal |
| 5 | 11160.00 | 39.16 | 6.37 | 45.53 | 74.00 | -28.47 | Peak | Vertical |
| 6 | 11160.00 | 26.93 | 6.37 | 33.30 | 54.00 | -20.70 | Average | Vertical |
| 7 | 16740.00 | 38.78 | 13.01 | 51.79 | 74.00 | -22.21 | Peak | Vertical |
| 8 | 16740.00 | 25.79 | 13.01 | 38.80 | 54.00 | -15.20 | Average | Vertical |

**IEEE 802.11a_Channel 140**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11400.00 | 40.00 | 6.73 | 46.73 | 74.00 | -27.27 | Peak | Horizontal |
| 2 | 11400.00 | 26.90 | 6.73 | 33.63 | 54.00 | -20.37 | Average | Horizontal |
| 3 | 17100.00 | 37.15 | 13.34 | 50.49 | 74.00 | -23.51 | Peak | Horizontal |
| 4 | 17100.00 | 24.49 | 13.34 | 37.83 | 54.00 | -16.17 | Average | Horizontal |
| 5 | 11400.00 | 39.13 | 6.73 | 45.86 | 74.00 | -28.14 | Peak | Vertical |
| 6 | 11400.00 | 26.90 | 6.73 | 33.63 | 54.00 | -20.37 | Average | Vertical |
| 7 | 17100.00 | 36.97 | 13.34 | 50.31 | 74.00 | -23.69 | Peak | Vertical |
| 8 | 17100.00 | 24.49 | 13.34 | 37.83 | 54.00 | -16.17 | Average | Vertical |

**IEEE 802.11a_Channel 149**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11490.00 | 39.38 | 6.87 | 46.25 | 74.00 | -27.75 | Peak | Horizontal |
| 2 | 11490.00 | 27.18 | 6.87 | 34.05 | 54.00 | -19.95 | Average | Horizontal |
| 3 | 17235.00 | 37.84 | 13.70 | 51.54 | 74.00 | -22.46 | Peak | Horizontal |
| 4 | 17235.00 | 24.90 | 13.70 | 38.60 | 54.00 | -15.40 | Average | Horizontal |
| 5 | 11490.00 | 39.39 | 6.87 | 46.26 | 74.00 | -27.74 | Peak | Vertical |
| 6 | 11490.00 | 27.24 | 6.87 | 34.11 | 54.00 | -19.89 | Average | Vertical |
| 7 | 17235.00 | 37.45 | 13.70 | 51.15 | 74.00 | -22.85 | Peak | Vertical |
| 8 | 17235.00 | 24.90 | 13.70 | 38.60 | 54.00 | -15.40 | Average | Vertical |

**IEEE 802.11a_Channel 157**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11570.00 | 38.48 | 7.06 | 45.54 | 74.00 | -28.46 | Peak | Horizontal |
| 2 | 11570.00 | 26.63 | 7.06 | 33.69 | 54.00 | -20.31 | Average | Horizontal |
| 3 | 17355.00 | 37.81 | 14.01 | 51.82 | 74.00 | -22.18 | Peak | Horizontal |
| 4 | 17355.00 | 25.42 | 14.01 | 39.43 | 54.00 | -14.57 | Average | Horizontal |
| 5 | 11570.00 | 39.59 | 7.06 | 46.65 | 74.00 | -27.35 | Peak | Vertical |
| 6 | 11570.00 | 26.70 | 7.06 | 33.76 | 54.00 | -20.24 | Average | Vertical |
| 7 | 17355.00 | 38.27 | 14.01 | 52.28 | 74.00 | -21.72 | Peak | Vertical |
| 8 | 17355.00 | 25.35 | 14.01 | 39.36 | 54.00 | -14.64 | Average | Vertical |

**IEEE 802.11a_Channel 165**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11650.00 | 40.42 | 7.26 | 47.68 | 74.00 | -26.32 | Peak | Horizontal |
| 2 | 11650.00 | 26.74 | 7.26 | 34.00 | 54.00 | -20.00 | Average | Horizontal |
| 3 | 17475.00 | 37.39 | 14.33 | 51.72 | 74.00 | -22.28 | Peak | Horizontal |
| 4 | 17475.00 | 24.80 | 14.33 | 39.13 | 54.00 | -14.87 | Average | Horizontal |
| 5 | 11650.00 | 39.31 | 7.26 | 46.57 | 74.00 | -27.43 | Peak | Vertical |
| 6 | 11650.00 | 26.67 | 7.26 | 33.93 | 54.00 | -20.07 | Average | Vertical |
| 7 | 17475.00 | 36.72 | 14.33 | 51.05 | 74.00 | -22.95 | Peak | Vertical |
| 8 | 17475.00 | 24.72 | 14.33 | 39.05 | 54.00 | -14.95 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 36**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10360.00 | 41.38 | 6.30 | 47.68 | 74.00 | -26.32 | Peak | Horizontal |
| 2 | 10360.00 | 28.73 | 6.30 | 35.03 | 54.00 | -18.97 | Average | Horizontal |
| 3 | 15540.00 | 38.22 | 11.53 | 49.75 | 74.00 | -24.25 | Peak | Horizontal |
| 4 | 15540.00 | 25.81 | 11.53 | 37.34 | 54.00 | -16.66 | Average | Horizontal |
| 5 | 10360.00 | 41.24 | 6.30 | 47.54 | 74.00 | -26.46 | Peak | Vertical |
| 6 | 10360.00 | 29.00 | 6.30 | 35.30 | 54.00 | -18.70 | Average | Vertical |
| 7 | 15540.00 | 37.97 | 11.53 | 49.50 | 74.00 | -24.50 | Peak | Vertical |
| 8 | 15540.00 | 25.89 | 11.53 | 37.42 | 54.00 | -16.58 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 44**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10440.00 | 41.38 | 6.30 | 47.68 | 74.00 | -26.32 | Peak | Horizontal |
| 2 | 10440.00 | 28.73 | 6.30 | 35.03 | 54.00 | -18.97 | Average | Horizontal |
| 3 | 15660.00 | 38.22 | 11.53 | 49.75 | 74.00 | -24.25 | Peak | Horizontal |
| 4 | 15660.00 | 25.81 | 11.53 | 37.34 | 54.00 | -16.66 | Average | Horizontal |
| 5 | 10440.00 | 41.24 | 6.30 | 47.54 | 74.00 | -26.46 | Peak | Vertical |
| 6 | 10440.00 | 28.73 | 6.30 | 35.03 | 54.00 | -18.97 | Average | Vertical |
| 7 | 15660.00 | 37.97 | 11.53 | 49.50 | 74.00 | -24.50 | Peak | Vertical |
| 8 | 15660.00 | 25.89 | 11.53 | 37.42 | 54.00 | -16.58 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 48**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10480.00 | 40.93 | 6.33 | 47.26 | 74.00 | -26.74 | Peak | Horizontal |
| 2 | 10480.00 | 28.42 | 6.33 | 34.75 | 54.00 | -19.25 | Average | Horizontal |
| 3 | 15720.00 | 37.98 | 11.63 | 49.61 | 74.00 | -24.39 | Peak | Horizontal |
| 4 | 15720.00 | 25.70 | 11.63 | 37.33 | 54.00 | -16.67 | Average | Horizontal |
| 5 | 10480.00 | 41.58 | 6.33 | 47.91 | 74.00 | -26.09 | Peak | Vertical |
| 6 | 10480.00 | 28.48 | 6.33 | 34.81 | 54.00 | -19.19 | Average | Vertical |
| 7 | 15720.00 | 38.00 | 11.63 | 49.63 | 74.00 | -24.37 | Peak | Vertical |
| 8 | 15720.00 | 25.70 | 11.63 | 37.33 | 54.00 | -16.67 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 52**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10520.00 | 41.14 | 6.33 | 47.47 | 74.00 | -26.53 | Peak | Horizontal |
| 2 | 10520.00 | 28.31 | 6.33 | 34.64 | 54.00 | -19.36 | Average | Horizontal |
| 3 | 15780.00 | 38.15 | 11.71 | 49.86 | 74.00 | -24.14 | Peak | Horizontal |
| 4 | 15780.00 | 25.62 | 11.71 | 37.33 | 54.00 | -16.67 | Average | Horizontal |
| 5 | 10520.00 | 41.91 | 6.33 | 48.24 | 74.00 | -25.76 | Peak | Vertical |
| 6 | 10520.00 | 28.37 | 6.33 | 34.70 | 54.00 | -19.30 | Average | Vertical |
| 7 | 15780.00 | 38.60 | 11.71 | 50.31 | 74.00 | -23.69 | Peak | Vertical |
| 8 | 15780.00 | 25.69 | 11.71 | 37.40 | 54.00 | -16.60 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 60**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10600.00 | 40.17 | 6.30 | 46.47 | 74.00 | -27.53 | Peak | Horizontal |
| 2 | 10600.00 | 27.47 | 6.30 | 33.77 | 54.00 | -20.23 | Average | Horizontal |
| 3 | 15900.00 | 38.47 | 11.89 | 50.36 | 74.00 | -23.64 | Peak | Horizontal |
| 4 | 15900.00 | 25.92 | 11.89 | 37.81 | 54.00 | -16.19 | Average | Horizontal |
| 5 | 10600.00 | 40.06 | 6.30 | 46.36 | 74.00 | -27.64 | Peak | Vertical |
| 6 | 10600.00 | 27.41 | 6.30 | 33.71 | 54.00 | -20.29 | Average | Vertical |
| 7 | 15900.00 | 38.22 | 11.89 | 50.11 | 74.00 | -23.89 | Peak | Vertical |
| 8 | 15900.00 | 25.92 | 11.89 | 37.81 | 54.00 | -16.19 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 64**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10640.00 | 40.23 | 6.28 | 46.51 | 74.00 | -27.49 | Peak | Horizontal |
| 2 | 10640.00 | 27.37 | 6.28 | 33.65 | 54.00 | -20.35 | Average | Horizontal |
| 3 | 15960.00 | 38.27 | 11.96 | 50.23 | 74.00 | -23.77 | Peak | Horizontal |
| 4 | 15960.00 | 25.85 | 11.96 | 37.81 | 54.00 | -16.19 | Average | Horizontal |
| 5 | 10640.00 | 40.35 | 6.28 | 46.63 | 74.00 | -27.37 | Peak | Vertical |
| 6 | 10640.00 | 27.37 | 6.28 | 33.65 | 54.00 | -20.35 | Average | Vertical |
| 7 | 15960.00 | 37.91 | 11.96 | 49.87 | 74.00 | -24.13 | Peak | Vertical |
| 8 | 15960.00 | 25.85 | 11.96 | 37.81 | 54.00 | -16.19 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 100**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11000.00 | 39.68 | 6.12 | 45.80 | 74.00 | -28.20 | Peak | Horizontal |
| 2 | 11000.00 | 27.96 | 6.12 | 34.08 | 54.00 | -19.92 | Average | Horizontal |
| 3 | 16500.00 | 37.73 | 12.95 | 50.68 | 74.00 | -23.32 | Peak | Horizontal |
| 4 | 16500.00 | 25.65 | 12.95 | 38.60 | 54.00 | -15.40 | Average | Horizontal |
| 5 | 11000.00 | 40.51 | 6.12 | 46.63 | 74.00 | -27.37 | Peak | Vertical |
| 6 | 11000.00 | 28.02 | 6.12 | 34.14 | 54.00 | -19.86 | Average | Vertical |
| 7 | 16500.00 | 37.94 | 12.95 | 50.89 | 74.00 | -23.11 | Peak | Vertical |
| 8 | 16500.00 | 25.73 | 12.95 | 38.68 | 54.00 | -15.32 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 116**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11160.00 | 38.87 | 6.37 | 45.24 | 74.00 | -28.76 | Peak | Horizontal |
| 2 | 11160.00 | 26.99 | 6.37 | 33.36 | 54.00 | -20.64 | Average | Horizontal |
| 3 | 16740.00 | 39.41 | 13.01 | 52.42 | 74.00 | -21.58 | Peak | Horizontal |
| 4 | 16740.00 | 25.87 | 13.01 | 38.88 | 54.00 | -15.12 | Average | Horizontal |
| 5 | 11160.00 | 39.41 | 6.37 | 45.78 | 74.00 | -28.22 | Peak | Vertical |
| 6 | 11160.00 | 26.99 | 6.37 | 33.36 | 54.00 | -20.64 | Average | Vertical |
| 7 | 16740.00 | 38.95 | 13.01 | 51.96 | 74.00 | -22.04 | Peak | Vertical |
| 8 | 16740.00 | 25.94 | 13.01 | 38.95 | 54.00 | -15.05 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 140**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11400.00 | 38.91 | 6.73 | 45.64 | 74.00 | -28.36 | Peak | Horizontal |
| 2 | 11400.00 | 27.03 | 6.73 | 33.76 | 54.00 | -20.24 | Average | Horizontal |
| 3 | 17100.00 | 36.61 | 13.34 | 49.95 | 74.00 | -24.05 | Peak | Horizontal |
| 4 | 17100.00 | 24.49 | 13.34 | 37.83 | 54.00 | -16.17 | Average | Horizontal |
| 5 | 11400.00 | 39.44 | 6.87 | 46.31 | 74.00 | -27.69 | Peak | Vertical |
| 6 | 11400.00 | 26.82 | 6.87 | 33.69 | 54.00 | -20.31 | Average | Vertical |
| 7 | 17100.00 | 36.95 | 13.70 | 50.65 | 74.00 | -23.35 | Peak | Vertical |
| 8 | 17100.00 | 24.90 | 13.70 | 38.60 | 54.00 | -15.40 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 149**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11490.00 | 40.73 | 6.87 | 47.60 | 74.00 | -26.40 | Peak | Horizontal |
| 2 | 11490.00 | 27.37 | 6.87 | 34.24 | 54.00 | -19.76 | Average | Horizontal |
| 3 | 17235.00 | 37.13 | 13.70 | 50.83 | 74.00 | -23.17 | Peak | Horizontal |
| 4 | 17235.00 | 24.90 | 13.70 | 38.60 | 54.00 | -15.40 | Average | Horizontal |
| 5 | 11490.00 | 40.41 | 6.87 | 47.28 | 74.00 | -26.72 | Peak | Vertical |
| 6 | 11490.00 | 27.31 | 6.87 | 34.18 | 54.00 | -19.82 | Average | Vertical |
| 7 | 17235.00 | 36.73 | 13.70 | 50.43 | 74.00 | -23.57 | Peak | Vertical |
| 8 | 17235.00 | 24.99 | 13.70 | 38.69 | 54.00 | -15.31 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 157**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11570.00 | 38.48 | 7.06 | 45.54 | 74.00 | -28.46 | Peak | Horizontal |
| 2 | 11570.00 | 26.63 | 7.06 | 33.69 | 54.00 | -20.31 | Average | Horizontal |
| 3 | 17355.00 | 37.83 | 14.01 | 51.84 | 74.00 | -22.16 | Peak | Horizontal |
| 4 | 17355.00 | 25.35 | 14.01 | 39.36 | 54.00 | -14.64 | Average | Horizontal |
| 5 | 11570.00 | 38.47 | 7.06 | 45.53 | 74.00 | -28.47 | Peak | Vertical |
| 6 | 11570.00 | 26.77 | 7.06 | 33.83 | 54.00 | -20.17 | Average | Vertical |
| 7 | 17355.00 | 37.41 | 14.01 | 51.42 | 74.00 | -22.58 | Peak | Vertical |
| 8 | 17355.00 | 25.35 | 14.01 | 39.36 | 54.00 | -14.64 | Average | Vertical |

**IEEE 802.11n-HT20_Channel 165**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11650.00 | 39.11 | 7.26 | 46.37 | 74.00 | -27.63 | Peak | Horizontal |
| 2 | 11650.00 | 26.74 | 7.26 | 34.00 | 54.00 | -20.00 | Average | Horizontal |
| 3 | 17475.00 | 36.46 | 14.33 | 50.79 | 74.00 | -23.21 | Peak | Horizontal |
| 4 | 17475.00 | 24.72 | 14.33 | 39.05 | 54.00 | -14.95 | Average | Horizontal |
| 5 | 11650.00 | 39.55 | 7.26 | 46.81 | 74.00 | -27.19 | Peak | Vertical |
| 6 | 11650.00 | 26.80 | 7.26 | 34.06 | 54.00 | -19.94 | Average | Vertical |
| 7 | 17475.00 | 37.66 | 14.33 | 51.99 | 74.00 | -22.01 | Peak | Vertical |
| 8 | 17475.00 | 24.80 | 14.33 | 39.13 | 54.00 | -14.87 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 38**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10380.00 | 41.50 | 6.25 | 47.75 | 74.00 | -26.25 | Peak | Horizontal |
| 2 | 10380.00 | 28.95 | 6.25 | 35.20 | 54.00 | -18.80 | Average | Horizontal |
| 3 | 15570.00 | 37.29 | 11.41 | 48.70 | 74.00 | -25.30 | Peak | Horizontal |
| 4 | 15570.00 | 25.73 | 11.41 | 37.14 | 54.00 | -16.86 | Average | Horizontal |
| 5 | 10380.00 | 40.98 | 6.25 | 47.23 | 74.00 | -26.77 | Peak | Vertical |
| 6 | 10380.00 | 28.95 | 6.25 | 35.20 | 54.00 | -18.80 | Average | Vertical |
| 7 | 15570.00 | 37.71 | 11.41 | 49.12 | 74.00 | -24.88 | Peak | Vertical |
| 8 | 15570.00 | 25.73 | 11.41 | 37.14 | 54.00 | -16.86 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 46**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10460.00 | 40.35 | 6.32 | 46.67 | 74.00 | -27.33 | Peak | Horizontal |
| 2 | 10460.00 | 28.61 | 6.32 | 34.93 | 54.00 | -19.07 | Average | Horizontal |
| 3 | 15690.00 | 38.74 | 11.59 | 50.33 | 74.00 | -23.67 | Peak | Horizontal |
| 4 | 15690.00 | 25.75 | 11.59 | 37.34 | 54.00 | -16.66 | Average | Horizontal |
| 5 | 10460.00 | 41.12 | 6.32 | 47.44 | 74.00 | -26.56 | Peak | Vertical |
| 6 | 10460.00 | 28.61 | 6.32 | 34.93 | 54.00 | -19.07 | Average | Vertical |
| 7 | 15690.00 | 38.54 | 11.59 | 50.13 | 74.00 | -23.87 | Peak | Vertical |
| 8 | 15690.00 | 25.75 | 11.59 | 37.34 | 54.00 | -16.66 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 54**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10540.00 | 41.22 | 6.32 | 47.54 | 74.00 | -26.46 | Peak | Horizontal |
| 2 | 10540.00 | 28.46 | 6.32 | 34.78 | 54.00 | -19.22 | Average | Horizontal |
| 3 | 15810.00 | 38.14 | 11.75 | 49.89 | 74.00 | -24.11 | Peak | Horizontal |
| 4 | 15810.00 | 25.71 | 11.75 | 37.46 | 54.00 | -16.54 | Average | Horizontal |
| 5 | 10540.00 | 40.43 | 6.32 | 46.75 | 74.00 | -27.25 | Peak | Vertical |
| 6 | 10540.00 | 28.51 | 6.32 | 34.83 | 54.00 | -19.17 | Average | Vertical |
| 7 | 15810.00 | 37.90 | 11.75 | 49.65 | 74.00 | -24.35 | Peak | Vertical |
| 8 | 15810.00 | 25.63 | 11.75 | 37.38 | 54.00 | -16.62 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 62**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10620.00 | 39.50 | 6.29 | 45.79 | 74.00 | -28.21 | Peak | Horizontal |
| 2 | 10620.00 | 27.23 | 6.29 | 33.52 | 54.00 | -20.48 | Average | Horizontal |
| 3 | 15930.00 | 38.09 | 11.93 | 50.02 | 74.00 | -23.98 | Peak | Horizontal |
| 4 | 15930.00 | 25.74 | 11.93 | 37.67 | 54.00 | -16.33 | Average | Horizontal |
| 5 | 10620.00 | 40.27 | 6.29 | 46.56 | 74.00 | -27.44 | Peak | Vertical |
| 6 | 10620.00 | 27.29 | 6.29 | 33.58 | 54.00 | -20.42 | Average | Vertical |
| 7 | 15930.00 | 38.80 | 11.93 | 50.73 | 74.00 | -23.27 | Peak | Vertical |
| 8 | 15930.00 | 25.81 | 11.93 | 37.74 | 54.00 | -16.26 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 102**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11020.00 | 39.97 | 6.15 | 46.12 | 74.00 | -27.88 | Peak | Horizontal |
| 2 | 11020.00 | 27.81 | 6.15 | 33.96 | 54.00 | -20.04 | Average | Horizontal |
| 3 | 16530.00 | 37.86 | 12.97 | 50.83 | 74.00 | -23.17 | Peak | Horizontal |
| 4 | 16530.00 | 25.56 | 12.97 | 38.53 | 54.00 | -15.47 | Average | Horizontal |
| 5 | 11020.00 | 40.18 | 6.15 | 46.33 | 74.00 | -27.67 | Peak | Vertical |
| 6 | 11020.00 | 27.87 | 6.15 | 34.02 | 54.00 | -19.98 | Average | Vertical |
| 7 | 16530.00 | 37.58 | 12.97 | 50.55 | 74.00 | -23.45 | Peak | Vertical |
| 8 | 16530.00 | 25.56 | 12.97 | 38.53 | 54.00 | -15.47 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 110**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11100.00 | 38.77 | 6.27 | 45.04 | 74.00 | -28.96 | Peak | Horizontal |
| 2 | 11100.00 | 27.15 | 6.27 | 33.42 | 54.00 | -20.58 | Average | Horizontal |
| 3 | 16650.00 | 38.57 | 12.99 | 51.56 | 74.00 | -22.44 | Peak | Horizontal |
| 4 | 16650.00 | 26.03 | 12.99 | 39.02 | 54.00 | -14.98 | Average | Horizontal |
| 5 | 11100.00 | 39.51 | 6.27 | 45.78 | 74.00 | -28.22 | Peak | Vertical |
| 6 | 11100.00 | 27.15 | 6.27 | 33.42 | 54.00 | -20.58 | Average | Vertical |
| 7 | 16650.00 | 38.16 | 12.99 | 51.15 | 74.00 | -22.85 | Peak | Vertical |
| 8 | 16650.00 | 25.96 | 12.99 | 38.95 | 54.00 | -15.05 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 134**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11340.00 | 38.99 | 6.64 | 45.63 | 74.00 | -28.37 | Peak | Horizontal |
| 2 | 11340.00 | 26.89 | 6.64 | 33.53 | 54.00 | -20.47 | Average | Horizontal |
| 3 | 17010.00 | 37.58 | 13.11 | 50.69 | 74.00 | -23.31 | Peak | Horizontal |
| 4 | 17010.00 | 24.57 | 13.11 | 37.68 | 54.00 | -16.32 | Average | Horizontal |
| 5 | 11340.00 | 38.55 | 6.64 | 45.19 | 74.00 | -28.81 | Peak | Vertical |
| 6 | 11340.00 | 26.89 | 6.64 | 33.53 | 54.00 | -20.47 | Average | Vertical |
| 7 | 17010.00 | 36.72 | 13.11 | 49.83 | 74.00 | -24.17 | Peak | Vertical |
| 8 | 17010.00 | 24.49 | 13.11 | 37.60 | 54.00 | -16.40 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 151**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11510.00 | 39.48 | 6.91 | 46.39 | 74.00 | -27.61 | Peak | Horizontal |
| 2 | 11510.00 | 27.39 | 6.91 | 34.30 | 54.00 | -19.70 | Average | Horizontal |
| 3 | 17265.00 | 37.07 | 13.78 | 50.85 | 74.00 | -23.15 | Peak | Horizontal |
| 4 | 17265.00 | 24.82 | 13.78 | 38.60 | 54.00 | -15.40 | Average | Horizontal |
| 5 | 11510.00 | 40.56 | 6.91 | 47.47 | 74.00 | -26.53 | Peak | Vertical |
| 6 | 11510.00 | 27.33 | 6.91 | 34.24 | 54.00 | -19.76 | Average | Vertical |
| 7 | 17265.00 | 38.07 | 13.78 | 51.85 | 74.00 | -22.15 | Peak | Vertical |
| 8 | 17265.00 | 24.82 | 13.78 | 38.60 | 54.00 | -15.40 | Average | Vertical |

**IEEE 802.11n-HT40_Channel 159**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11590.00 | 40.10 | 7.11 | 47.21 | 74.00 | -26.79 | Peak | Horizontal |
| 2 | 11590.00 | 26.72 | 7.11 | 33.83 | 54.00 | -20.17 | Average | Horizontal |
| 3 | 17385.00 | 38.22 | 14.09 | 52.31 | 74.00 | -21.69 | Peak | Horizontal |
| 4 | 17385.00 | 25.27 | 14.09 | 39.36 | 54.00 | -14.64 | Average | Horizontal |
| 5 | 11590.00 | 38.86 | 7.11 | 45.97 | 74.00 | -28.03 | Peak | Vertical |
| 6 | 11590.00 | 26.58 | 7.11 | 33.69 | 54.00 | -20.31 | Average | Vertical |
| 7 | 17385.00 | 37.99 | 14.09 | 52.08 | 74.00 | -21.92 | Peak | Vertical |
| 8 | 17385.00 | 25.27 | 14.09 | 39.36 | 54.00 | -14.64 | Average | Vertical |

**IEEE 802.11ac-VHT80_Channel 42**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10460.00 | 40.85 | 6.29 | 47.14 | 74.00 | -26.86 | Peak | Horizontal |
| 2 | 10460.00 | 28.58 | 6.29 | 34.87 | 54.00 | -19.13 | Average | Horizontal |
| 3 | 15690.00 | 37.75 | 11.49 | 49.24 | 74.00 | -24.76 | Peak | Horizontal |
| 4 | 15690.00 | 25.93 | 11.49 | 37.42 | 54.00 | -16.58 | Average | Horizontal |
| 5 | 10460.00 | 41.84 | 6.29 | 48.13 | 74.00 | -25.87 | Peak | Vertical |
| 6 | 10460.00 | 28.64 | 6.29 | 34.93 | 54.00 | -19.07 | Average | Vertical |
| 7 | 15690.00 | 38.52 | 11.49 | 50.01 | 74.00 | -23.99 | Peak | Vertical |
| 8 | 15690.00 | 26.00 | 11.49 | 37.49 | 54.00 | -16.51 | Average | Vertical |

**IEEE 802.11ac-VHT80_Channel 58**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 10580.00 | 40.71 | 6.31 | 47.02 | 74.00 | -26.98 | Peak | Horizontal |
| 2 | 10580.00 | 28.41 | 6.31 | 34.72 | 54.00 | -19.28 | Average | Horizontal |
| 3 | 15870.00 | 37.59 | 11.85 | 49.44 | 74.00 | -24.56 | Peak | Horizontal |
| 4 | 15870.00 | 25.61 | 11.85 | 37.46 | 54.00 | -16.54 | Average | Horizontal |
| 5 | 10580.00 | 40.94 | 6.31 | 47.25 | 74.00 | -26.75 | Peak | Vertical |
| 6 | 10580.00 | 28.41 | 6.31 | 34.72 | 54.00 | -19.28 | Average | Vertical |
| 7 | 15870.00 | 38.60 | 11.85 | 50.45 | 74.00 | -23.55 | Peak | Vertical |
| 8 | 15870.00 | 25.61 | 11.85 | 37.46 | 54.00 | -16.54 | Average | Vertical |

**IEEE 802.11ac-VHT80_Channel 106**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11060.00 | 39.88 | 6.21 | 46.09 | 74.00 | -27.91 | Peak | Horizontal |
| 2 | 11060.00 | 28.14 | 6.21 | 34.35 | 54.00 | -19.65 | Average | Horizontal |
| 3 | 16590.00 | 37.10 | 12.98 | 50.08 | 74.00 | -23.92 | Peak | Horizontal |
| 4 | 16590.00 | 25.42 | 12.98 | 38.40 | 54.00 | -15.60 | Average | Horizontal |
| 5 | 11060.00 | 40.82 | 6.21 | 47.03 | 74.00 | -26.97 | Peak | Vertical |
| 6 | 11060.00 | 28.08 | 6.21 | 34.29 | 54.00 | -19.71 | Average | Vertical |
| 7 | 16590.00 | 37.46 | 12.98 | 50.44 | 74.00 | -23.56 | Peak | Vertical |
| 8 | 16590.00 | 25.50 | 12.98 | 38.48 | 54.00 | -15.52 | Average | Vertical |

**IEEE 802.11ac-VHT80_Channel 155**

| No. | Frequency (MHz) | Reading (dBμV/m) | Correction factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
|---|---|---|---|---|---|---|---|---|
| 1 | 11550.00 | 39.86 | 7.01 | 46.87 | 74.00 | -27.13 | Peak | Horizontal |
| 2 | 11550.00 | 26.98 | 7.01 | 33.99 | 54.00 | -20.01 | Average | Horizontal |
| 3 | 17325.00 | 37.44 | 13.93 | 51.37 | 74.00 | -22.63 | Peak | Horizontal |
| 4 | 17325.00 | 24.67 | 13.93 | 38.60 | 54.00 | -15.40 | Average | Horizontal |
| 5 | 11550.00 | 39.32 | 7.01 | 46.33 | 74.00 | -27.67 | Peak | Vertical |
| 6 | 11550.00 | 27.10 | 7.01 | 34.11 | 54.00 | -19.89 | Average | Vertical |
| 7 | 17325.00 | 37.06 | 13.93 | 50.99 | 74.00 | -23.01 | Peak | Vertical |
| 8 | 17325.00 | 24.67 | 13.93 | 38.60 | 54.00 | -15.40 | Average | Vertical |

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

**Band Edge Measurements (Radiated)**

**IEEE 802.11a**

| Test Channel: | Channel 36 | Ant. Polar. : | Horizontal |
|---|---|---|---|

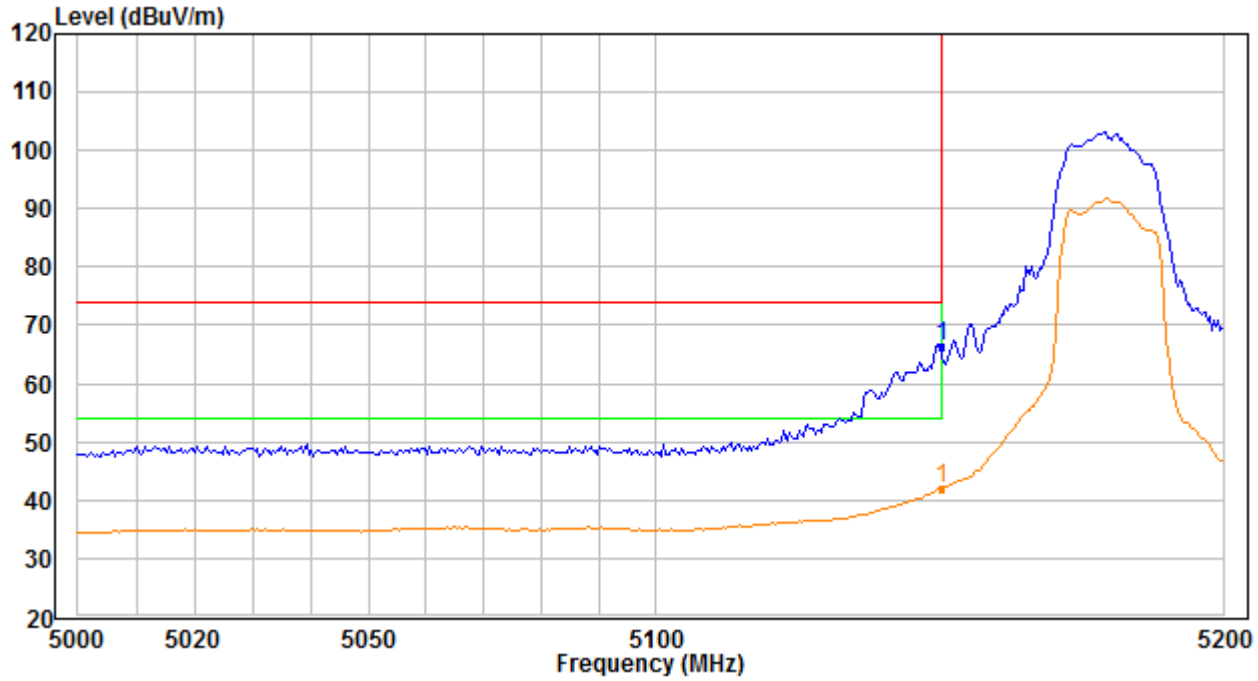


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5150.0000 | 66.47 | 74.00 | 42.04 | 54.00 | Pass |

| Test Channel: | Channel 36 | Ant. Polar. : | Vertical |
|---|---|---|---|

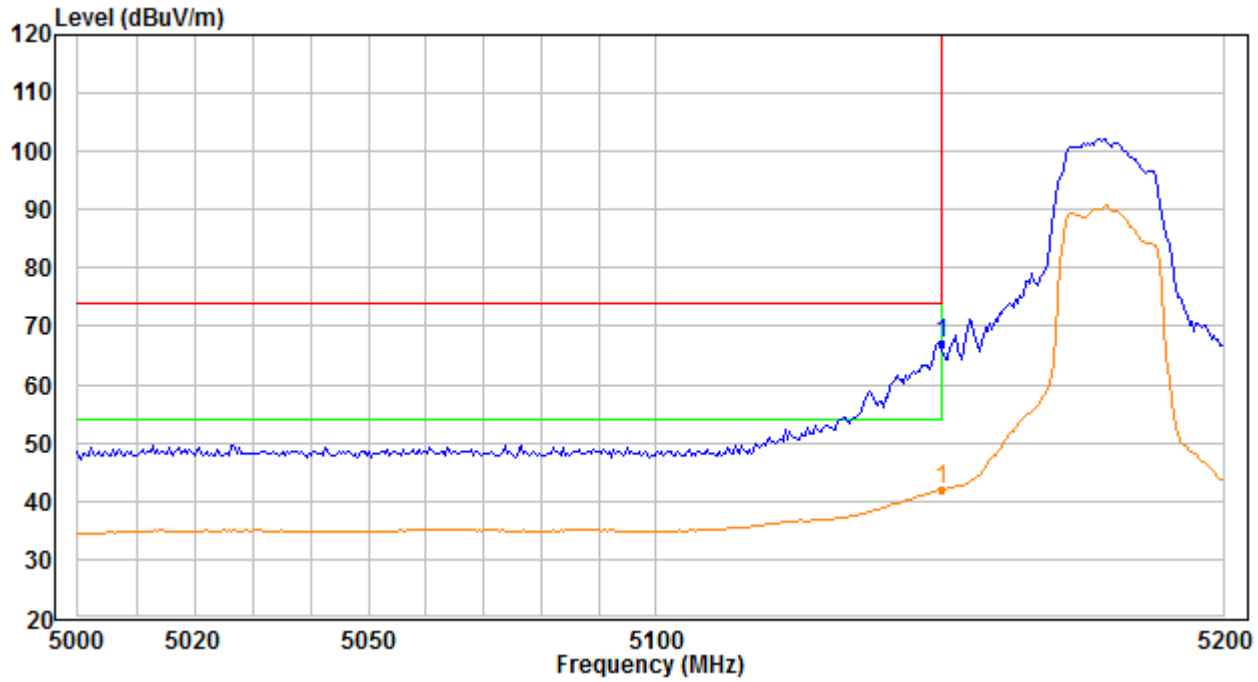


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5150.0000 | 67.10 | 74.00 | 42.11 | 54.00 | Pass |

| Test Channel: | Channel 64 | Ant. Polar. : | Horizontal |
|---|---|---|---|

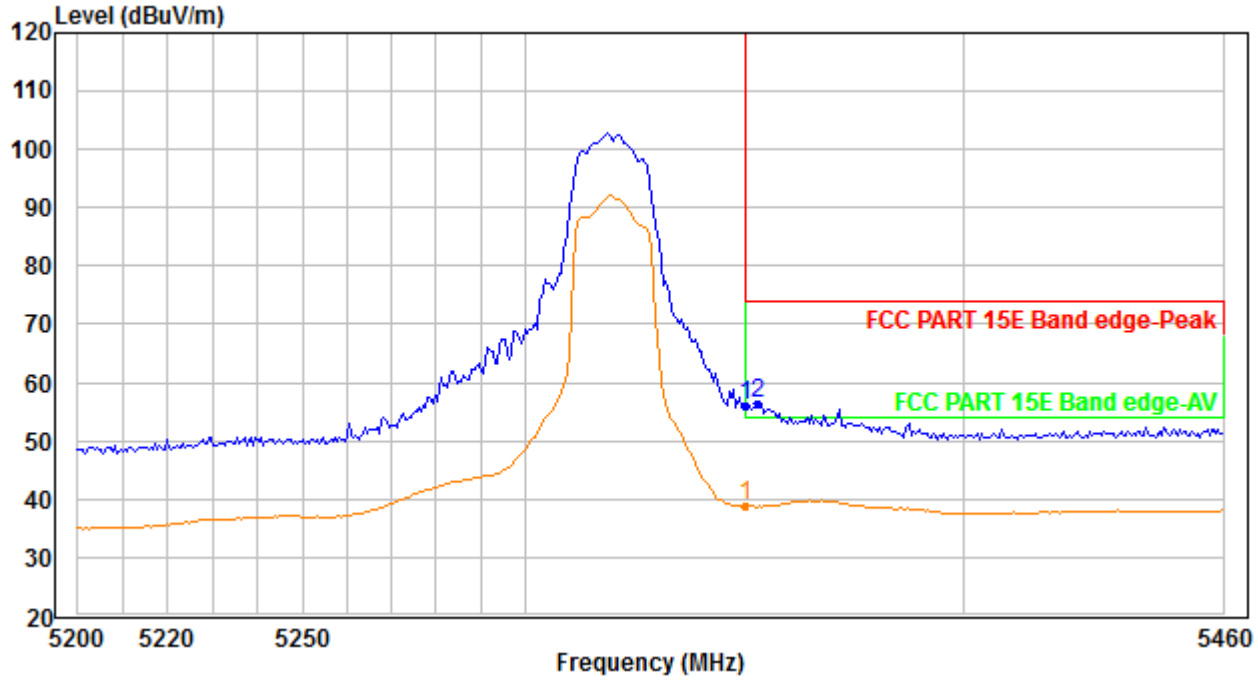


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5350.0000 | 56.12 | 74.00 | 38.81 | 54.00 | Pass |
| 5352.6660 | 56.55 | 74.00 | - | - | Pass |

| Test Channel: | Channel 64 | Ant. Polar. : | Vertical |
|---|---|---|---|

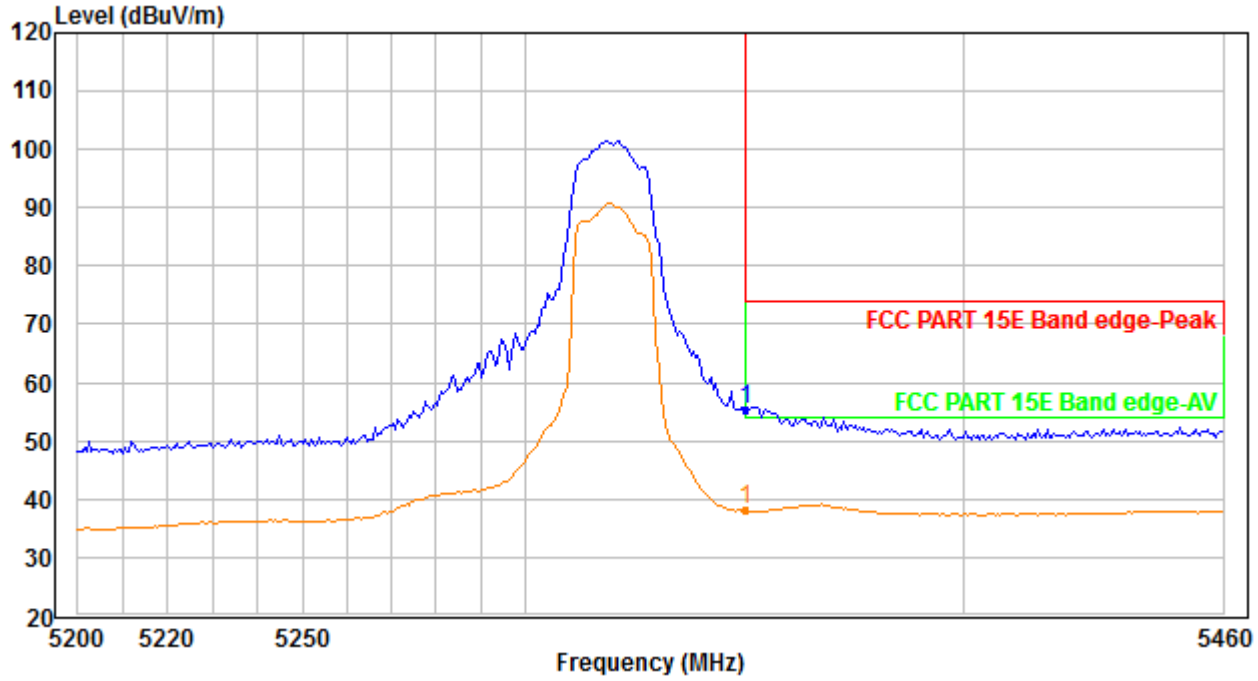


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5350.0000 | 55.55 | 74.00 | 38.10 | 54.00 | Pass |

| Test Channel: | Channel 100 | Ant. Polar. : | Horizontal |
|---|---|---|---|

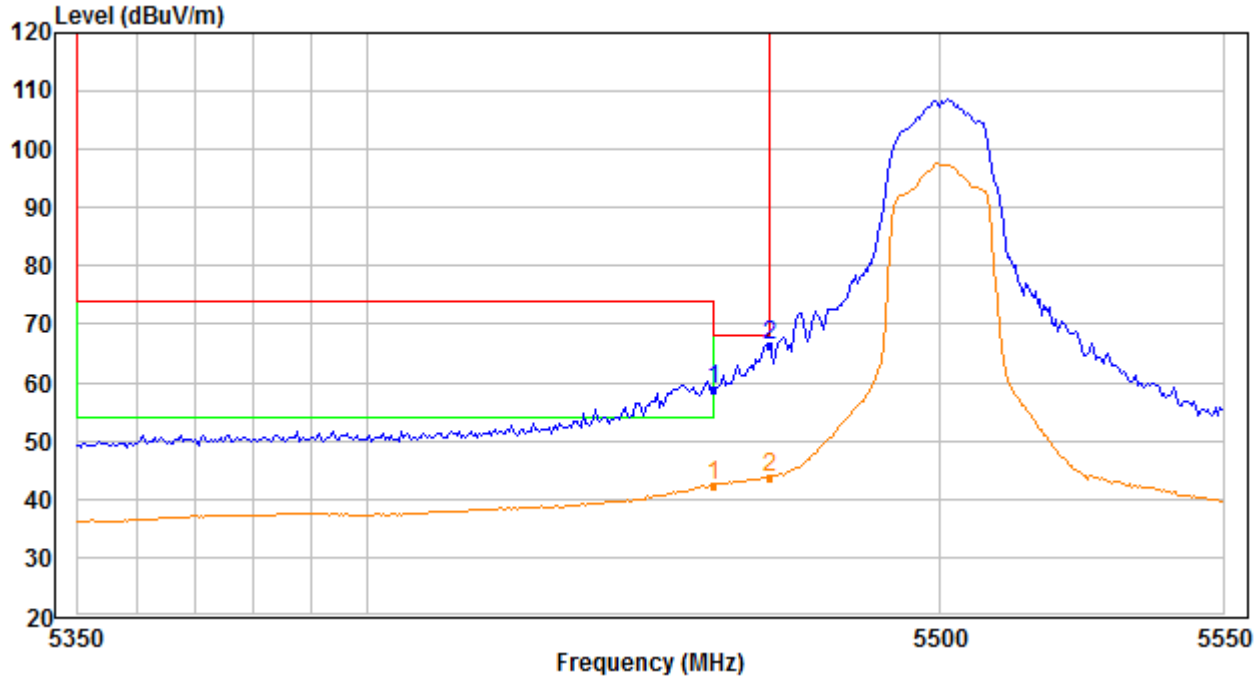


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5460.0000 | 58.70 | 68.20 | 42.43 | 54.00 | Pass |
| 5470.0000 | 66.27 | 68.20 | 43.81 | 54.00 | Pass |

| Test Channel: | Channel 100 | Ant. Polar. : | Vertical |
|---|---|---|---|

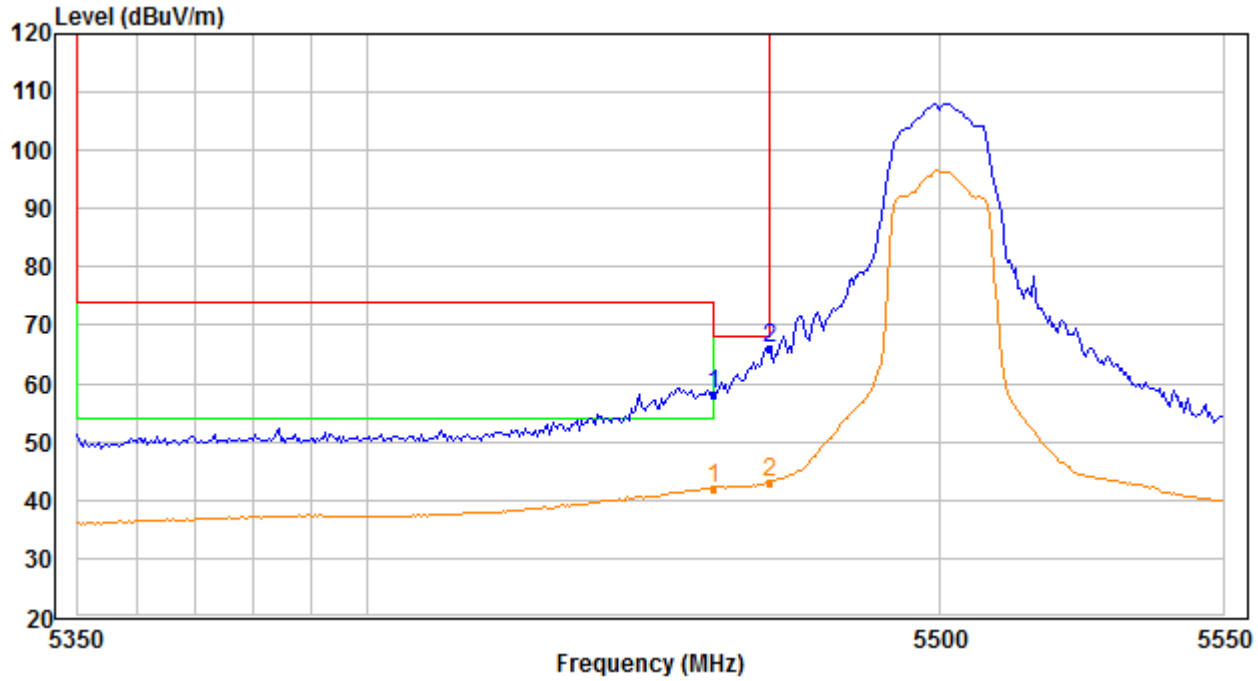


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5460.0000 | 58.14 | 68.20 | 41.95 | 54.00 | Pass |
| 5470.0000 | 65.89 | 68.20 | 43.09 | 54.00 | Pass |

| Test Channel: | Channel 140 | Ant. Polar. : | Horizontal |
|---|---|---|---|

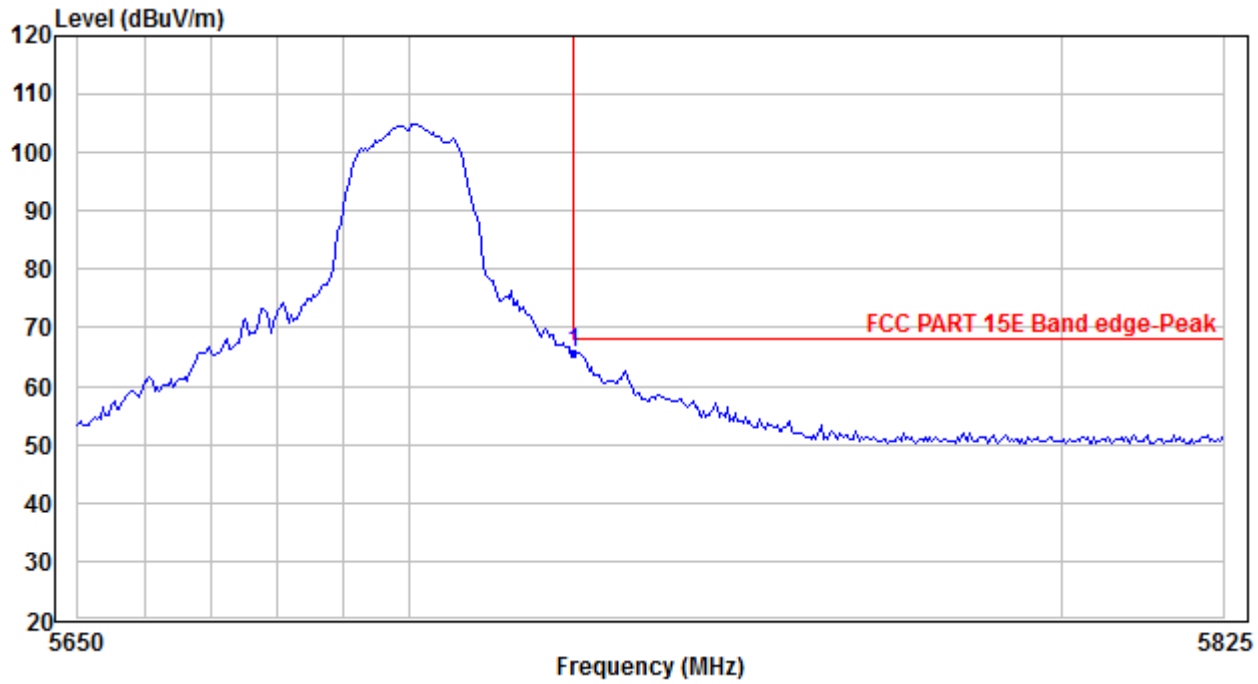


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | Conclusion |
|---|---|---|---|
| 5725.0000 | 65.82 | 68.20 | Pass |

| Test Channel: | Channel 140 | Ant. Polar. : | Vertical |
|---|---|---|---|

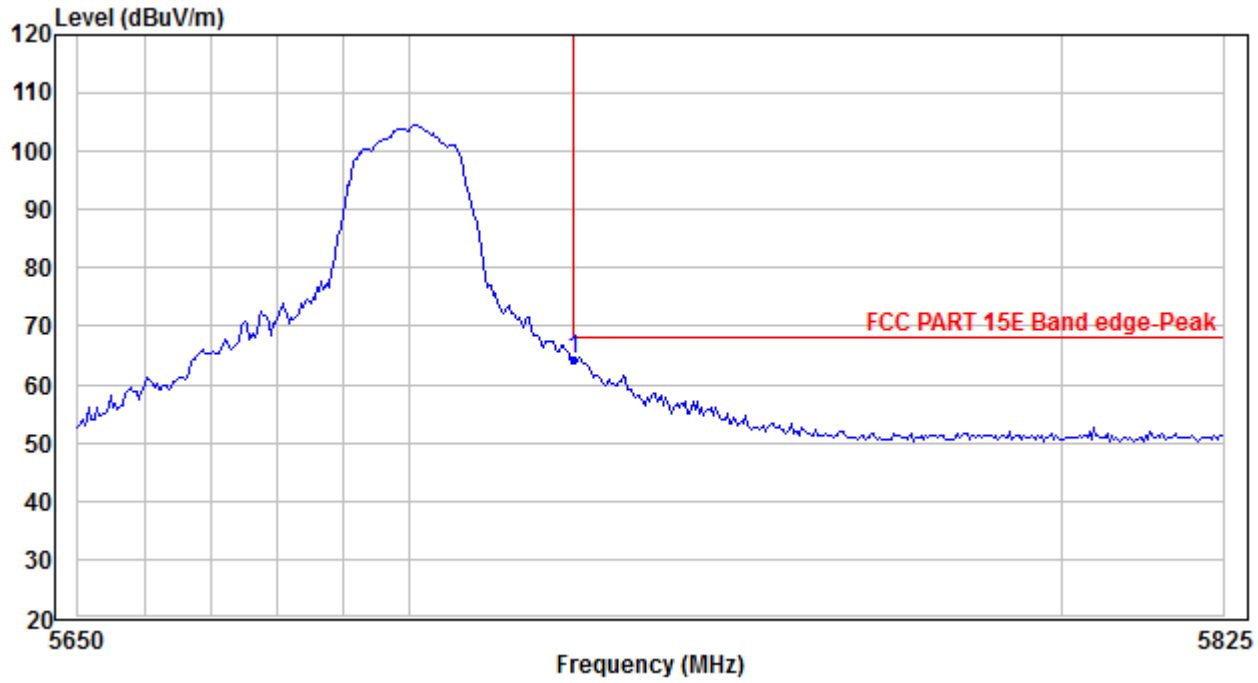


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | Conclusion |
|---|---|---|---|
| 5725.0000 | 64.17 | 68.20 | Pass |

| Test Channel: | Channel 149 | Ant. Polar. : | Horizontal |
|---|---|---|---|

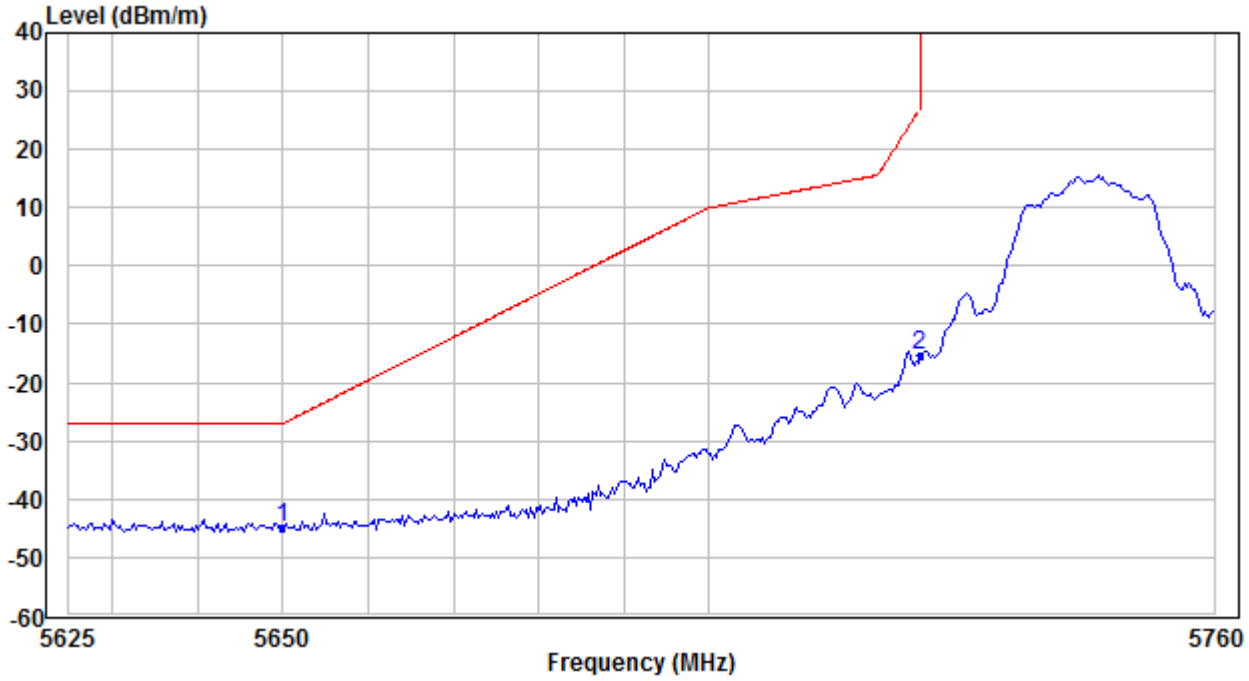


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5650.0000 | -44.96 | -27.00 | Pass |
| 5725.0000 | -15.22 | 27.00 | Pass |

| Test Channel: | Channel 149 | Ant. Polar. : | Vertical |
|---|---|---|---|

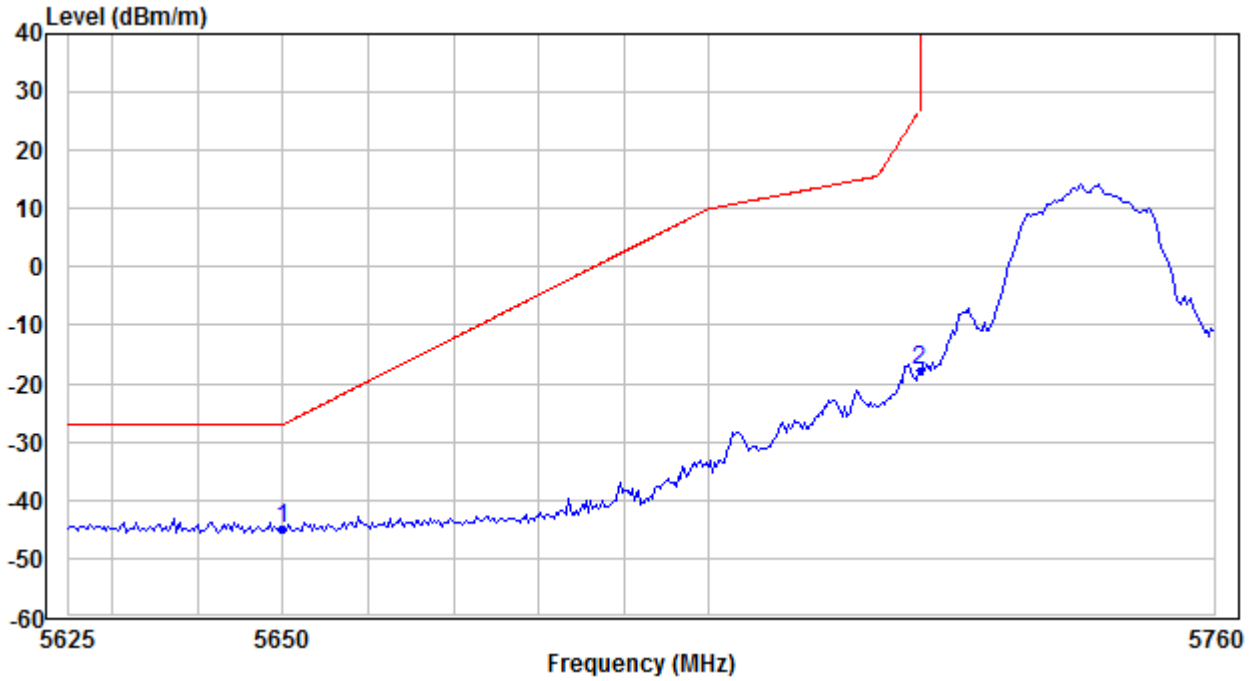


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5650.0000 | -44.98 | -27.00 | Pass |
| 5725.0000 | -17.79 | 27.00 | Pass |

| Test Channel: | Channel 165 | Ant. Polar. : | Horizontal |
|---|---|---|---|

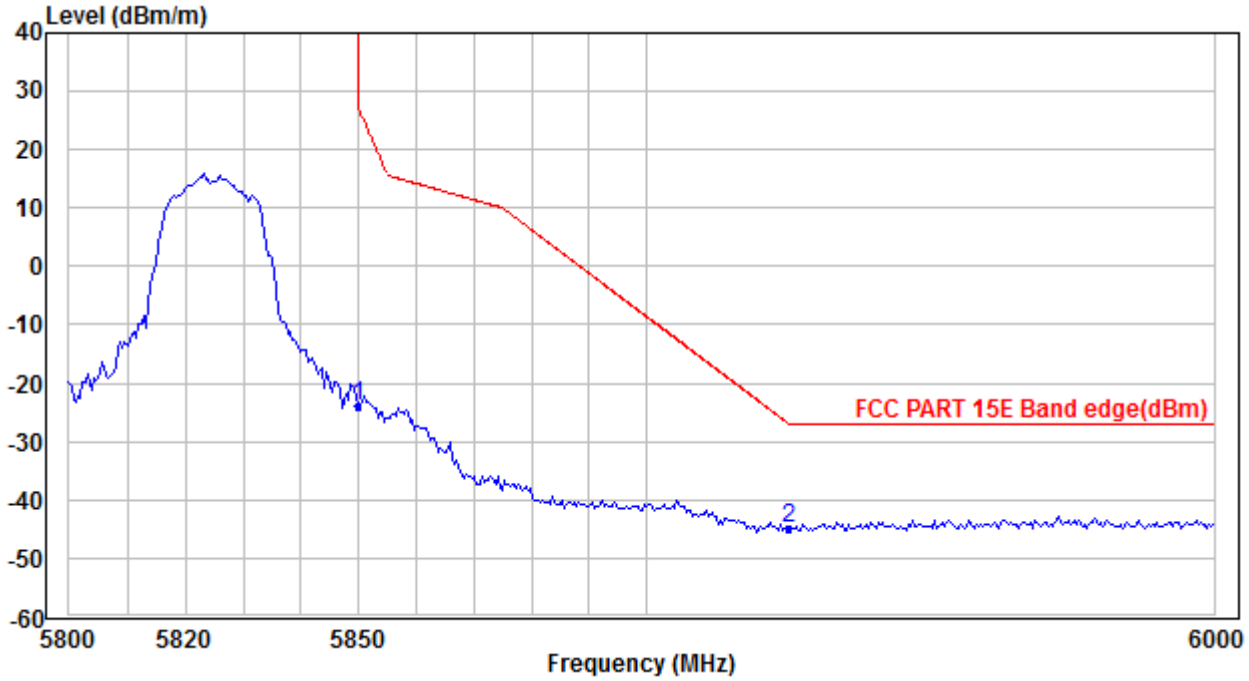


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5850.0000 | -23.80 | 27.00 | Pass |
| 5925.0000 | -44.87 | -27.00 | Pass |

| Test Channel: | Channel 165 | Ant. Polar. : | Vertical |
|---|---|---|---|

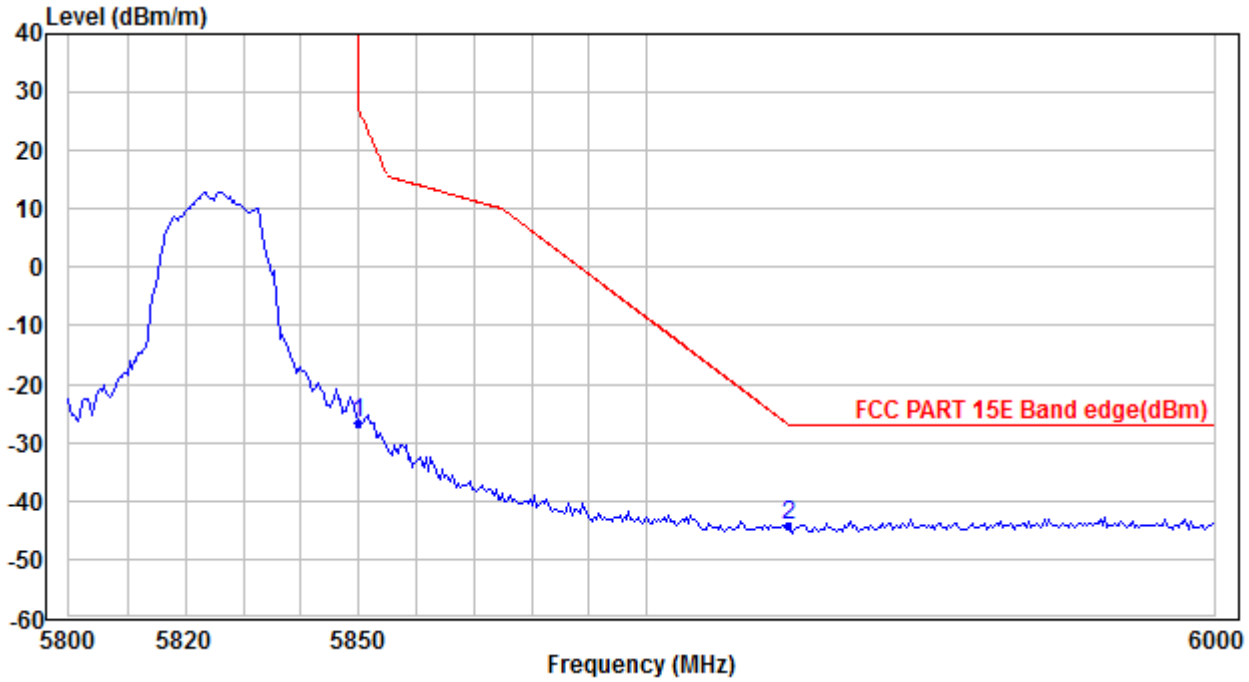


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5850.0000 | -26.54 | 27.00 | Pass |
| 5925.0000 | -44.30 | -27.00 | Pass |

IEEE 802.11n-HT20

| Test Channel: | Channel 36 | Ant. Polar. : | Horizontal |
|---|---|---|---|

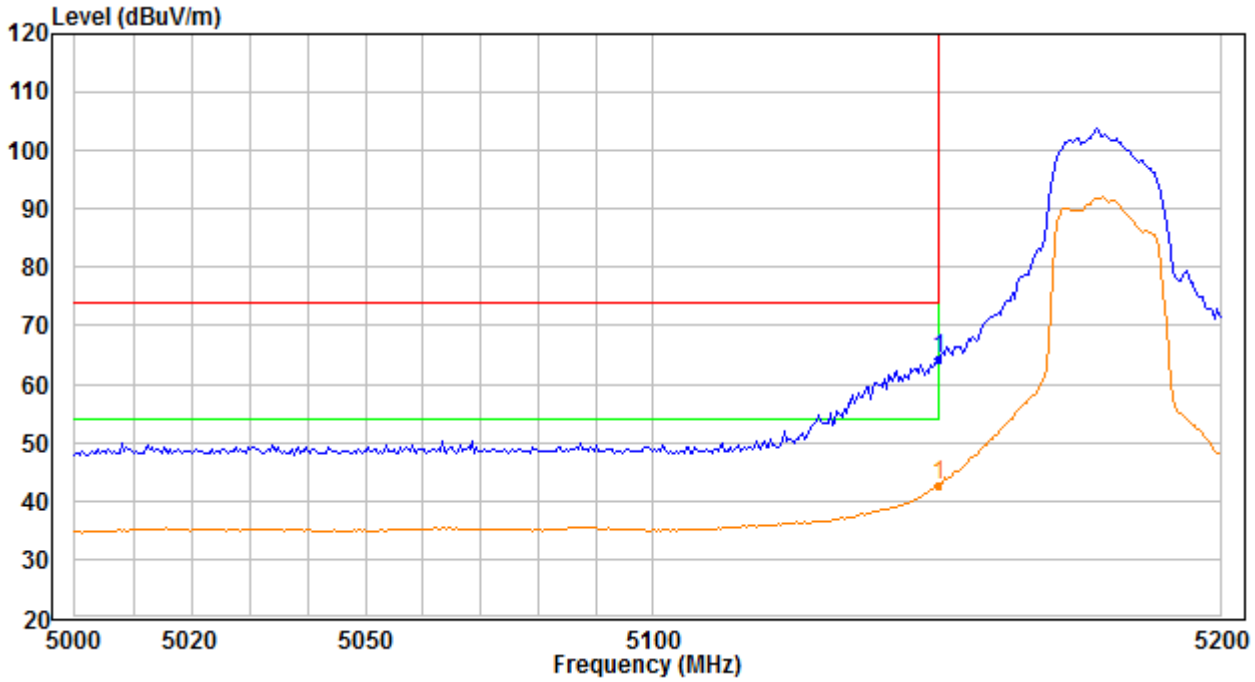


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5150.0000 | 64.42 | 74.00 | 42.69 | 54.00 | Pass |

| Test Channel: | Channel 36 | Ant. Polar. : | Vertical |
|---|---|---|---|

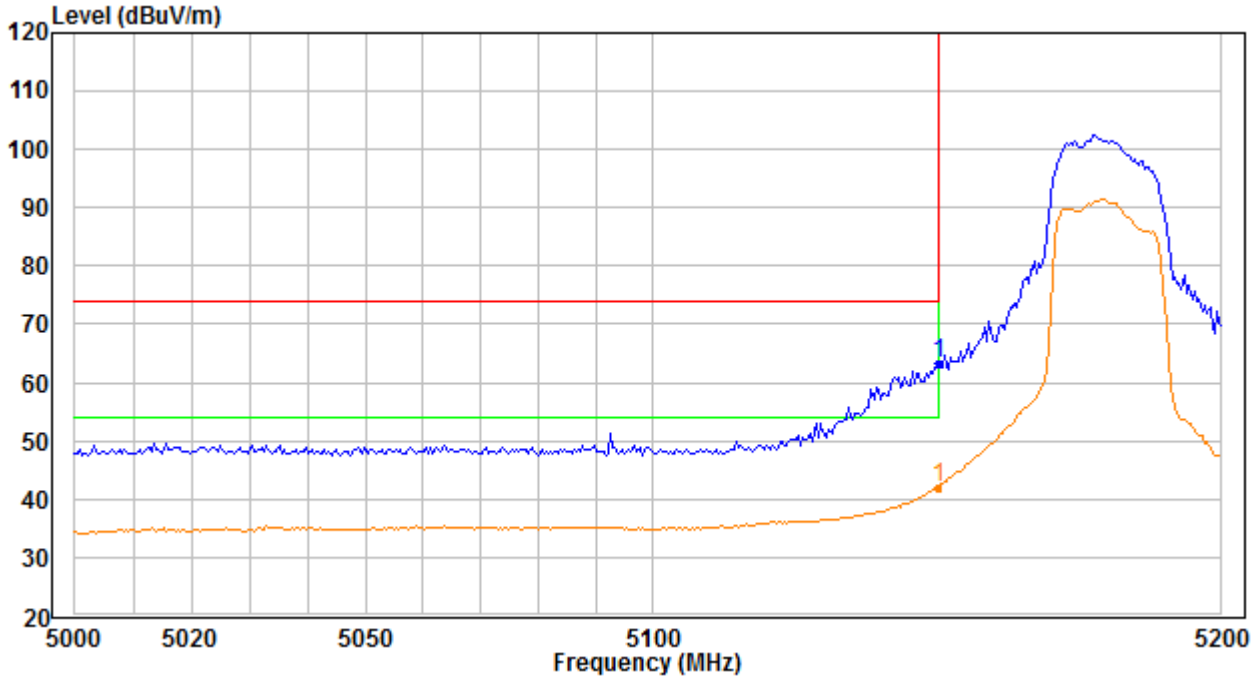


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5150.0000 | 63.20 | 74.00 | 42.03 | 54.00 | Pass |

| Test Channel: | Channel 64 | Ant. Polar. : | Horizontal |
|---|---|---|---|

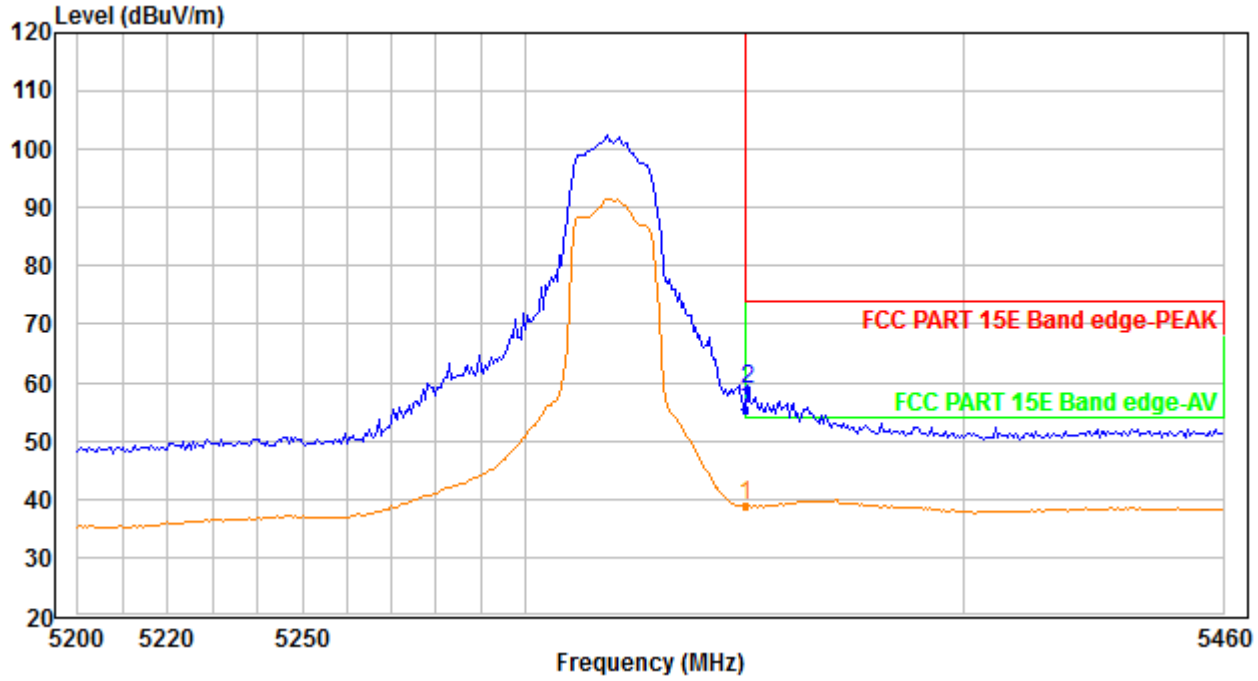


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5350.0000 | 55.35 | 74.00 | 38.77 | 54.00 | Pass |
| 5350.5810 | 58.75 | 74.00 | - | - | Pass |

| Test Channel: | Channel 64 | Ant. Polar. : | Vertical |
|---|---|---|---|

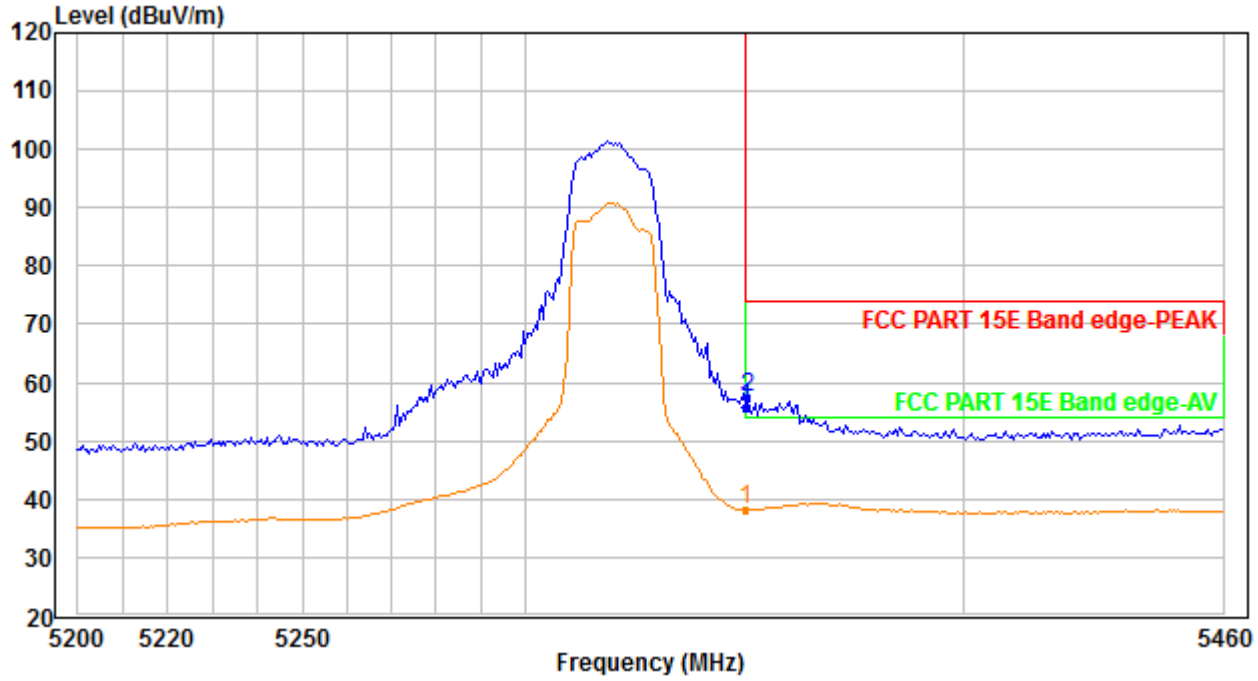


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5350.0000 | 55.62 | 74.00 | 38.37 | 54.00 | Pass |
| 5350.5810 | 57.61 | 74.00 | - | - | Pass |

| Test Channel: | Channel 100 | Ant. Polar. : | Horizontal |
|---|---|---|---|

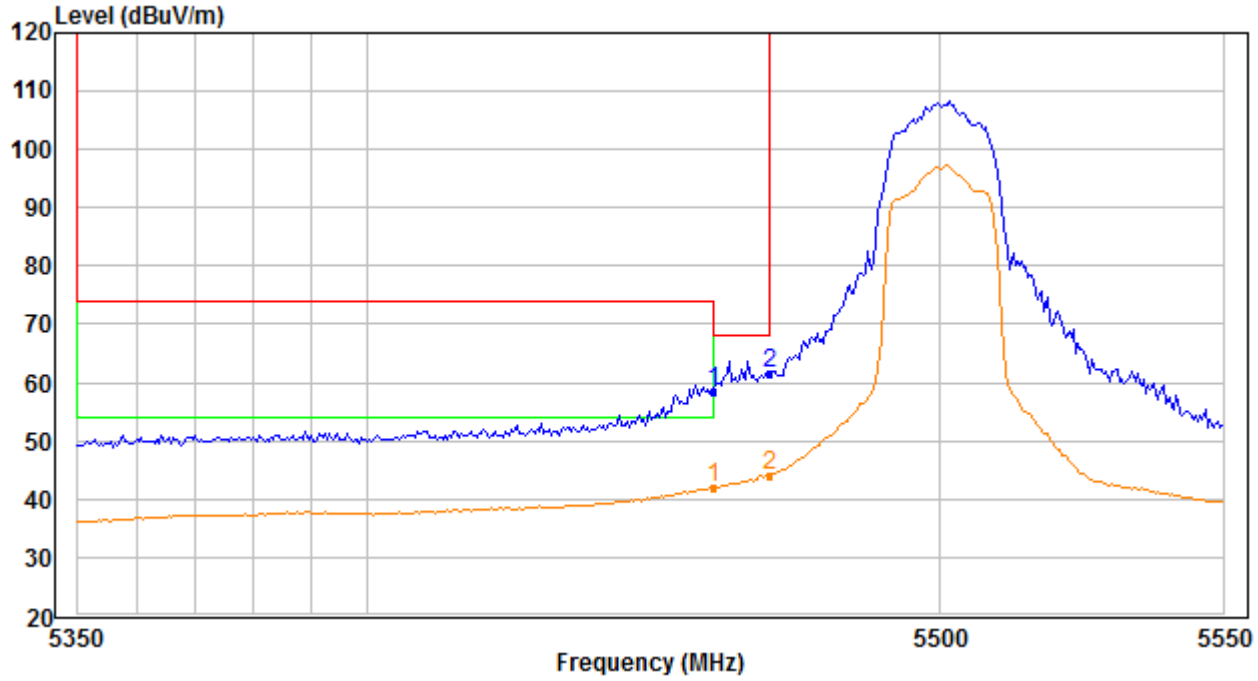


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5460.0000 | 58.36 | 68.20 | 41.96 | 54.00 | Pass |
| 5470.0000 | 61.60 | 68.20 | 44.07 | 54.00 | Pass |

| Test Channel: | Channel 100 | Ant. Polar. : | Vertical |
|---|---|---|---|

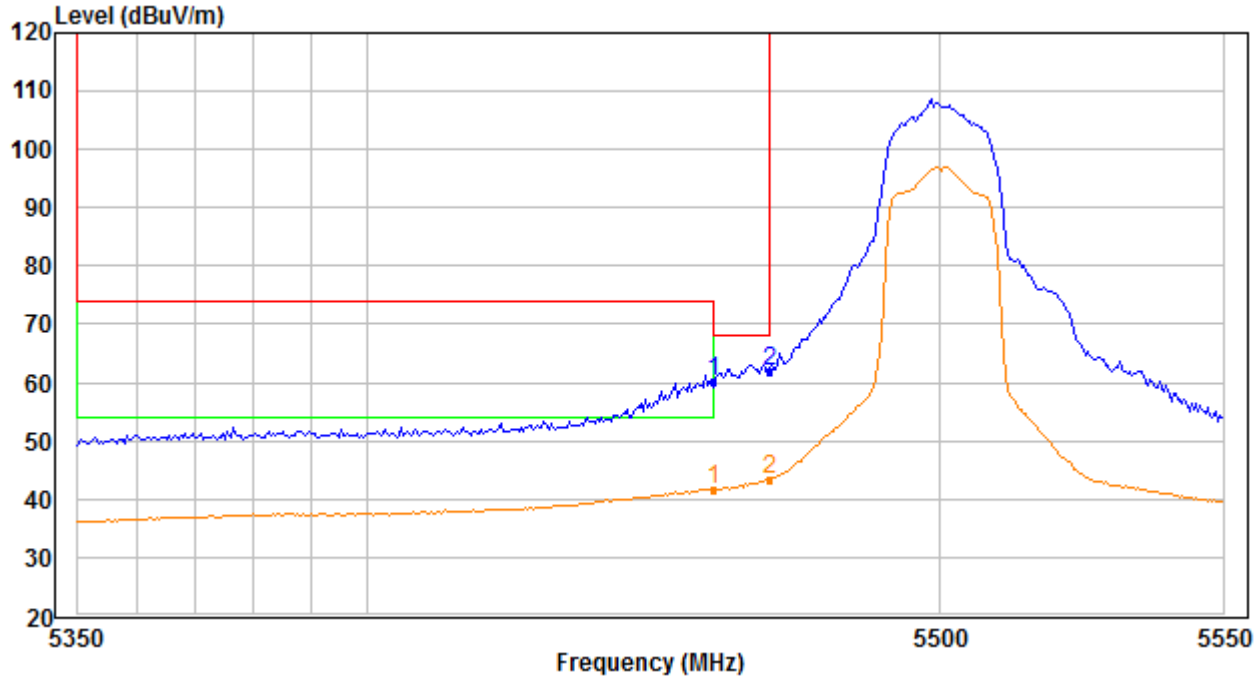


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5460.0000 | 60.36 | 68.20 | 41.62 | 54.00 | Pass |
| 5470.0000 | 61.89 | 68.20 | 43.32 | 54.00 | Pass |

| Test Channel: | Channel 140 | Ant. Polar. : | Horizontal |
|---|---|---|---|

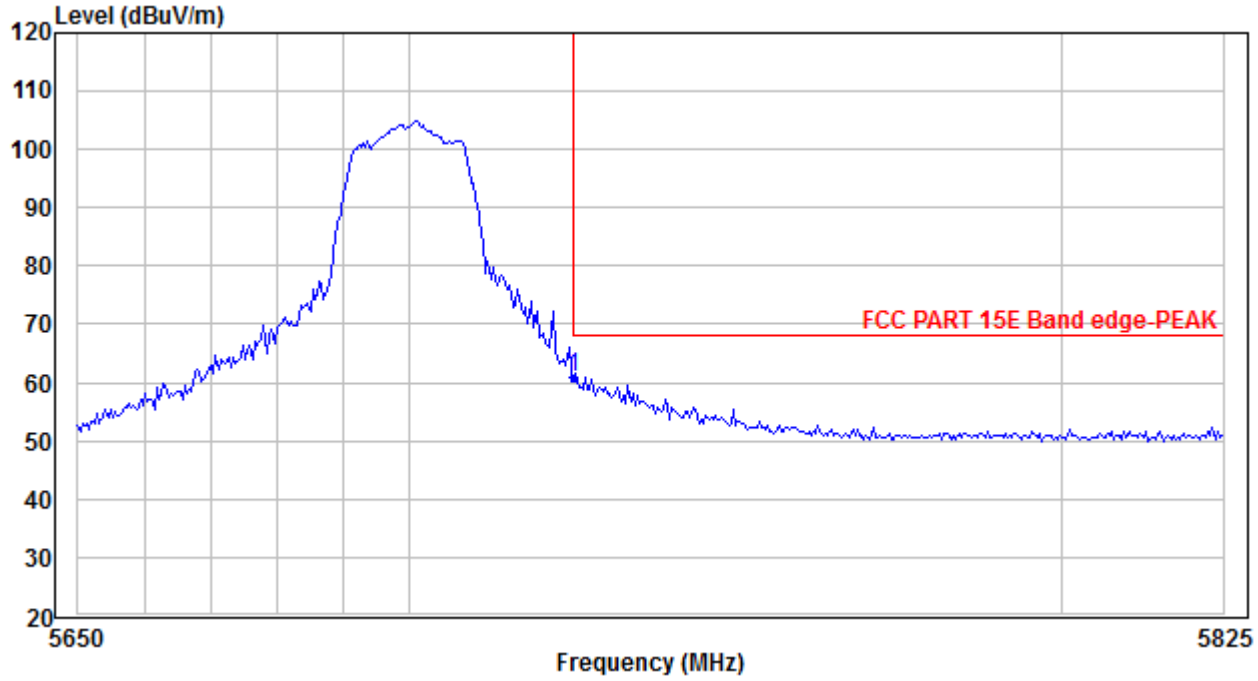


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | Conclusion |
|---|---|---|---|
| 5725.0000 | 61.04 | 68.20 | Pass |

| Test Channel: | Channel 140 | Ant. Polar. : | Vertical |
|---|---|---|---|

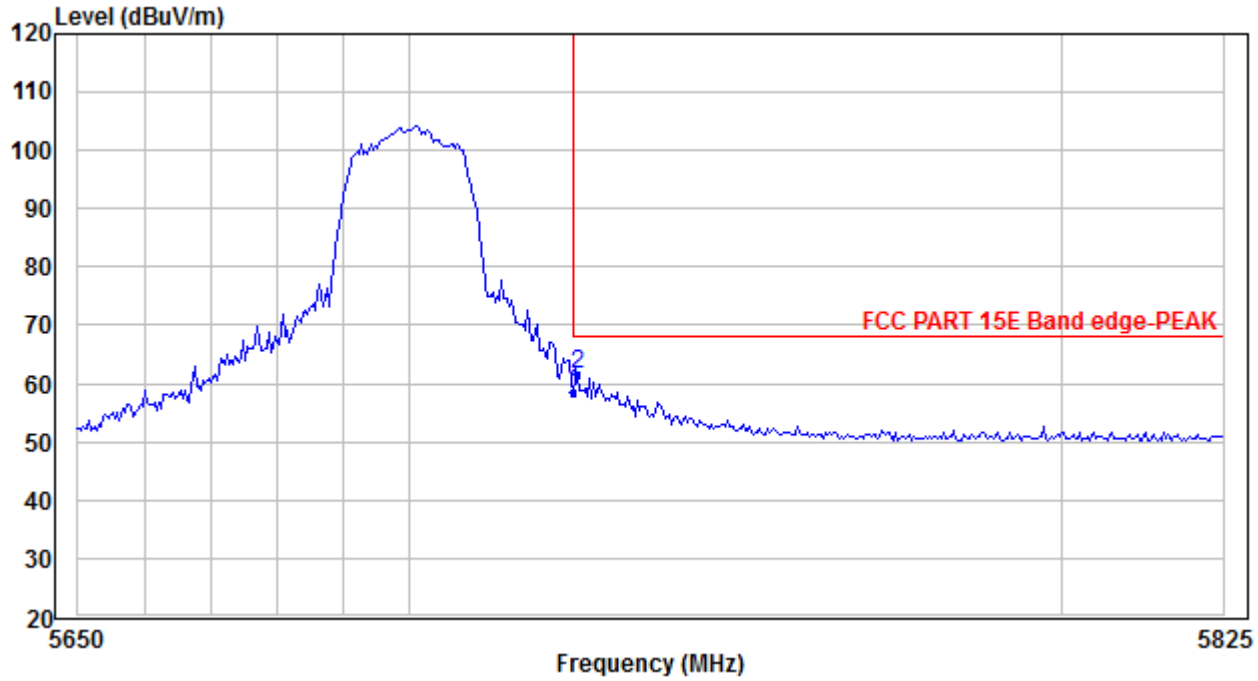


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | Conclusion |
|---|---|---|---|
| 5725.0000 | 58.66 | 68.20 | Pass |
| 5725.7510 | 61.48 | 68.20 | Pass |

| Test Channel: | Channel 149 | Ant. Polar. : | Horizontal |
|---|---|---|---|

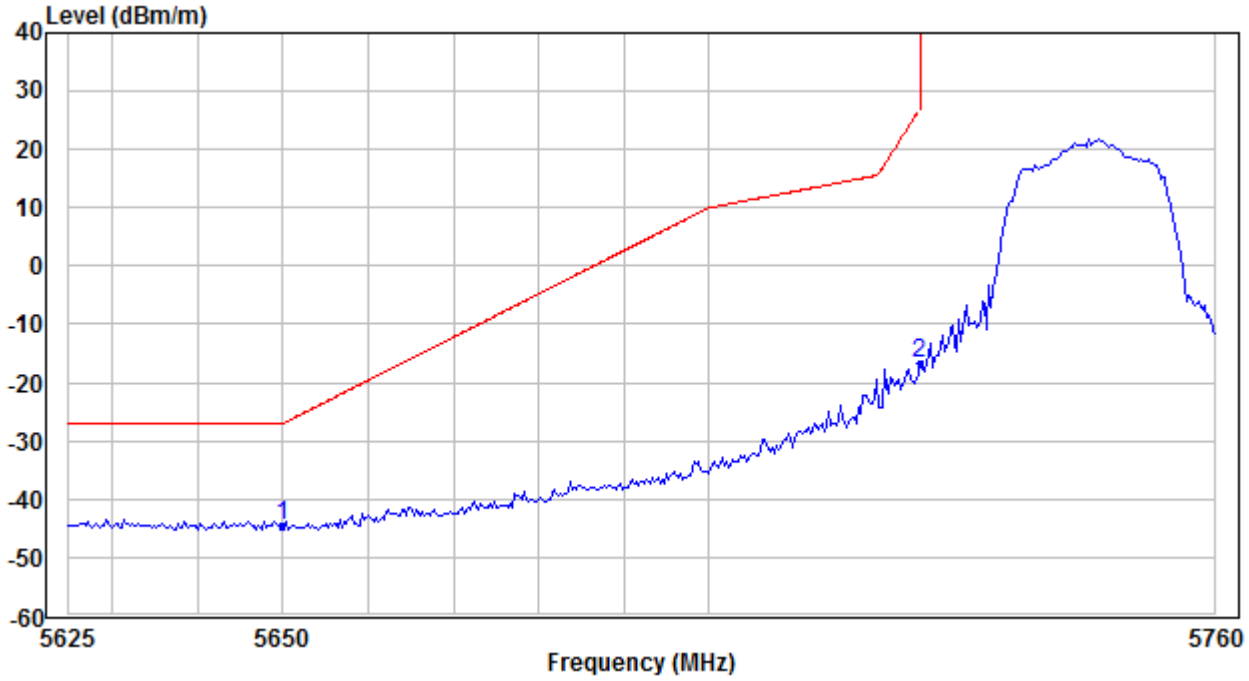


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5650.0000 | -44.41 | -27.00 | Pass |
| 5725.0000 | -16.78 | 27.00 | Pass |

| Test Channel: | Channel 149 | Ant. Polar. : | Vertical |
|---|---|---|---|

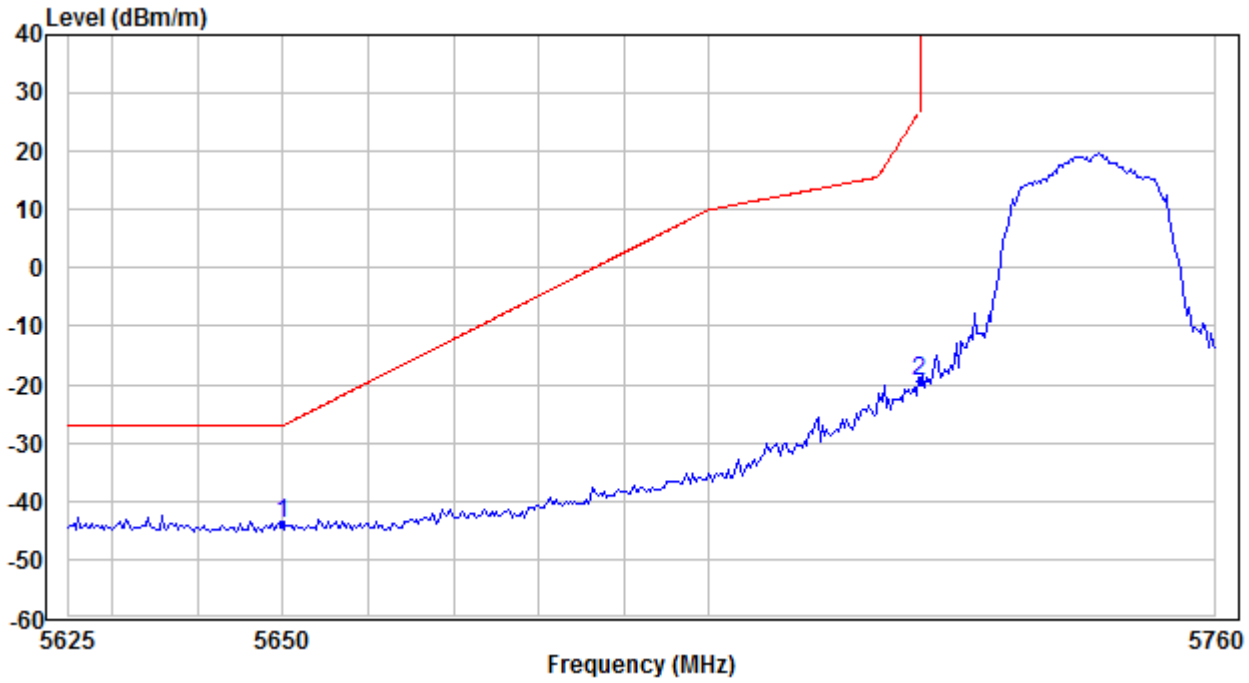


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5650.0000 | -43.94 | -27.00 | Pass |
| 5725.0000 | -19.49 | 27.00 | Pass |

| Test Channel: | Channel 165 | Ant. Polar. : | Horizontal |
|---|---|---|---|

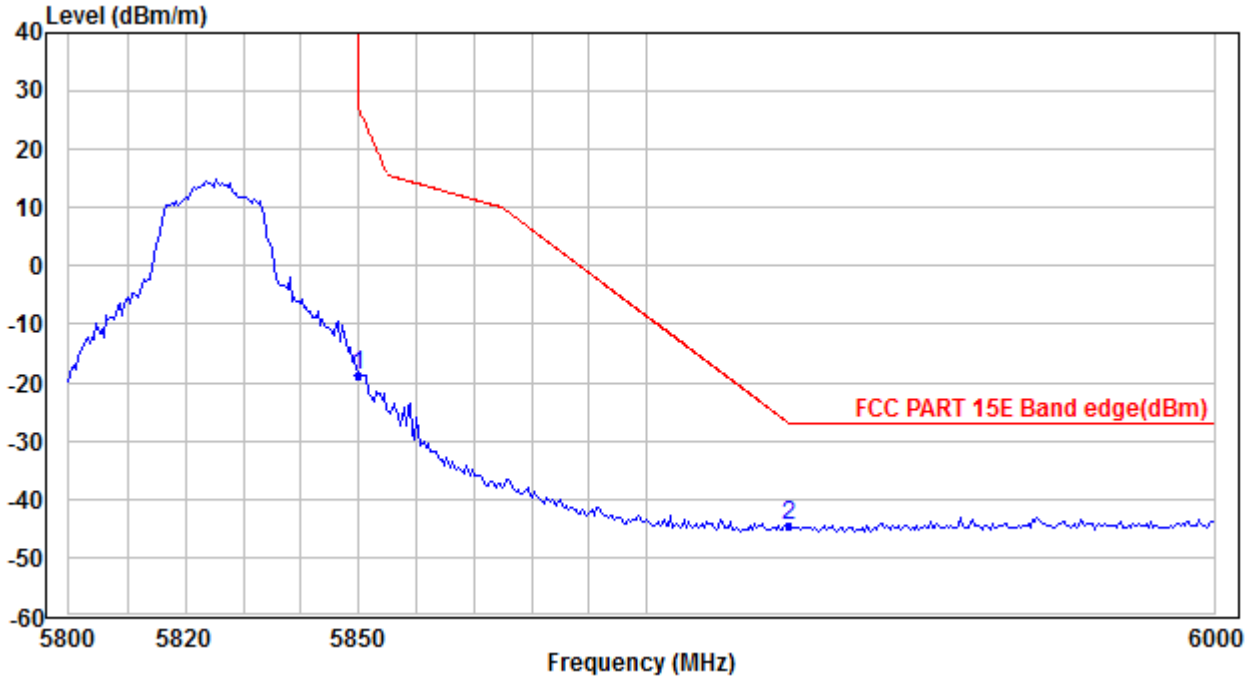


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5850.0000 | -18.63 | 27.00 | Pass |
| 5925.0000 | -44.40 | -27.00 | Pass |

| Test Channel: | Channel 165 | Ant. Polar. : | Vertical |
|---|---|---|---|

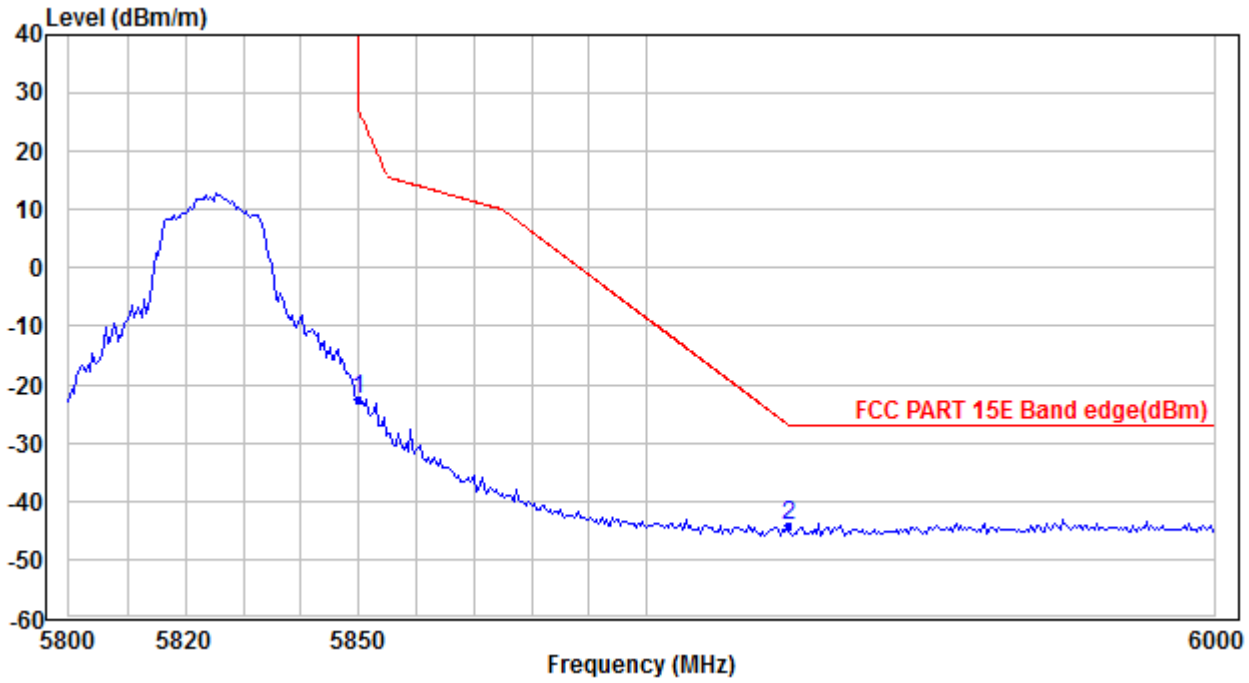


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5850.0000 | -22.63 | 27.00 | Pass |
| 5925.0000 | -44.22 | -27.00 | Pass |

IEEE 802.11n-HT40

| Test Channel: | Channel 38 | Ant. Polar. : | Horizontal |
|---|---|---|---|

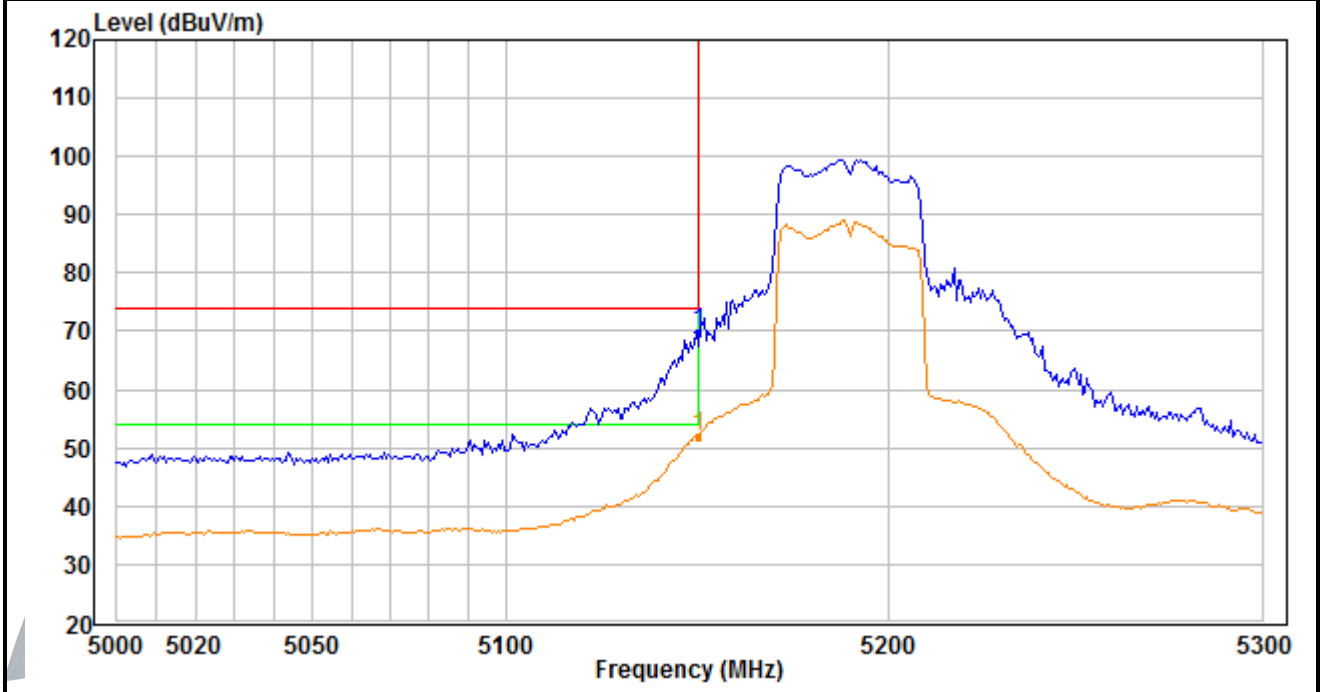


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5150.0000 | 69.75 | 74.00 | 51.85 | 54.00 | Pass |

| Test Channel: | Channel 38 | Ant. Polar. : | Vertical |
|---|---|---|---|

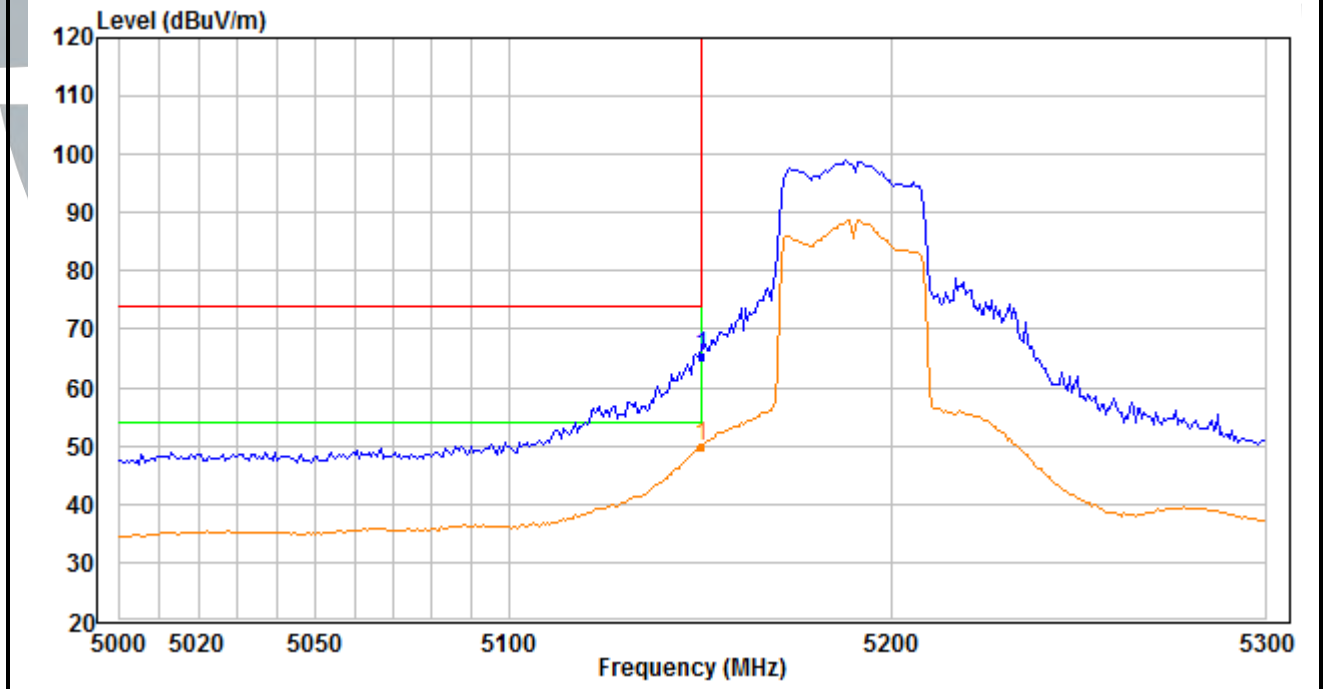


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5150.0000 | 65.37 | 74.00 | 49.97 | 54.00 | Pass |

| Test Channel: | Channel 62 | Ant. Polar. : | Horizontal |
|---|---|---|---|

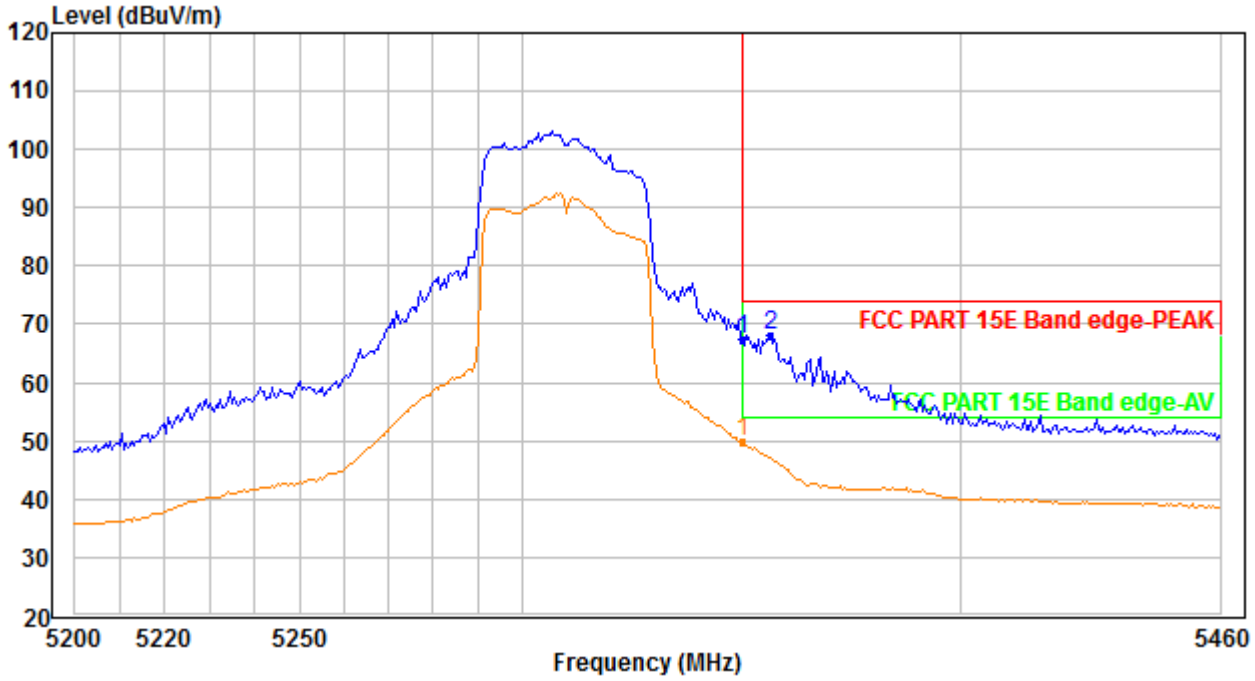


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5350.0000 | 67.43 | 74.00 | 49.73 | 54.00 | Pass |
| 5356.3130 | 68.19 | 74.00 | - | - | Pass |

| Test Channel: | Channel 62 | Ant. Polar. : | Vertical |
|---|---|---|---|

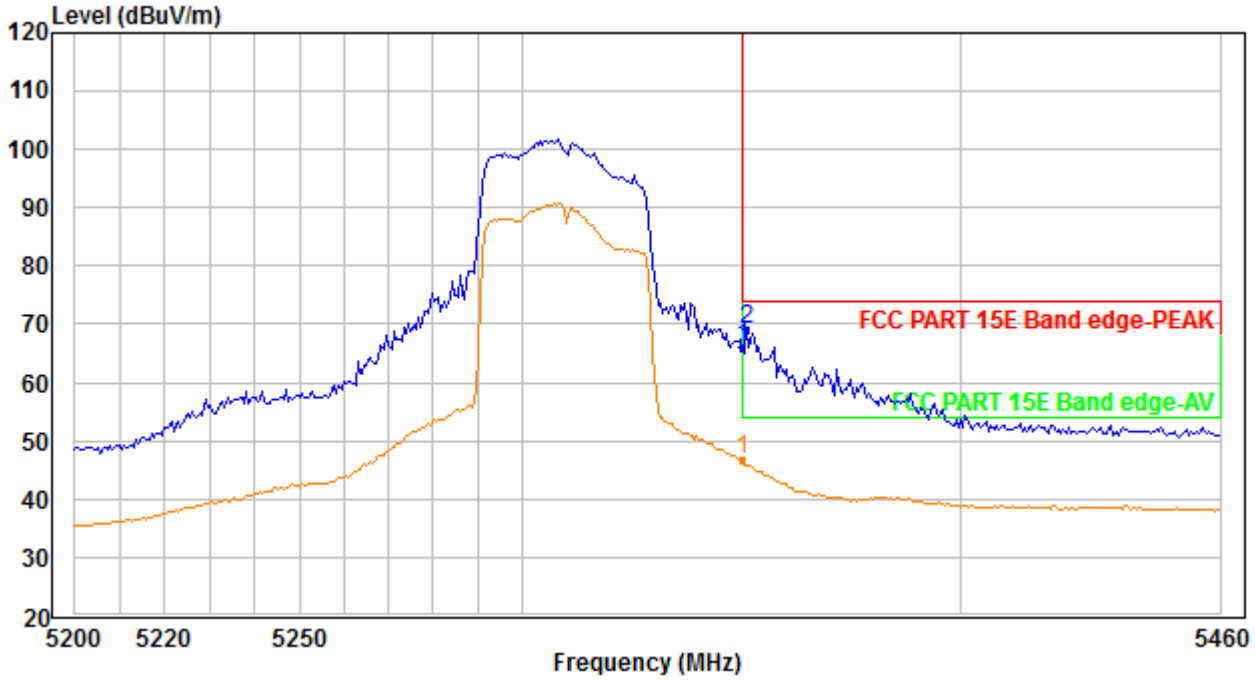


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5350.0000 | 65.92 | 74.00 | 46.64 | 54.00 | Pass |
| 5351.1020 | 69.20 | 74.00 | - | - | Pass |

| Test Channel: | Channel 102 | Ant. Polar. : | Horizontal |
|---|---|---|---|

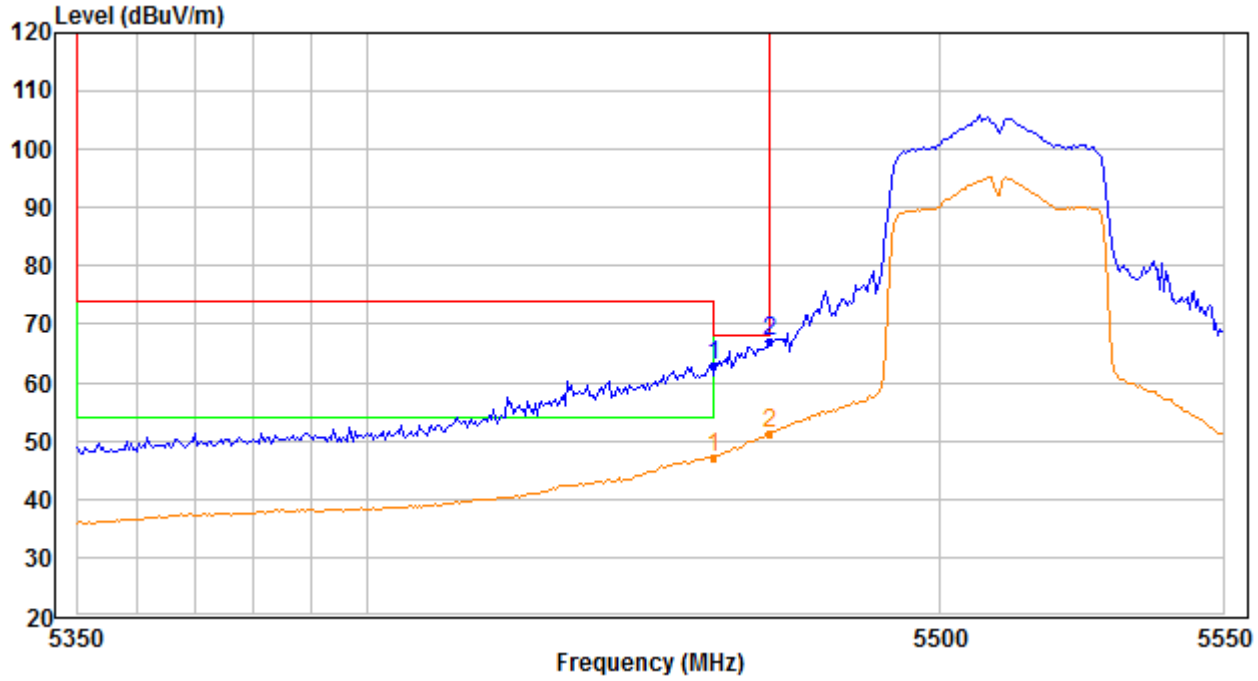


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5460.0000 | 62.96 | 68.20 | 47.29 | 54.00 | Pass |
| 5470.0000 | 67.08 | 68.20 | 51.27 | 54.00 | Pass |

| Test Channel: | Channel 102 | Ant. Polar. : | Vertical |
|---|---|---|---|

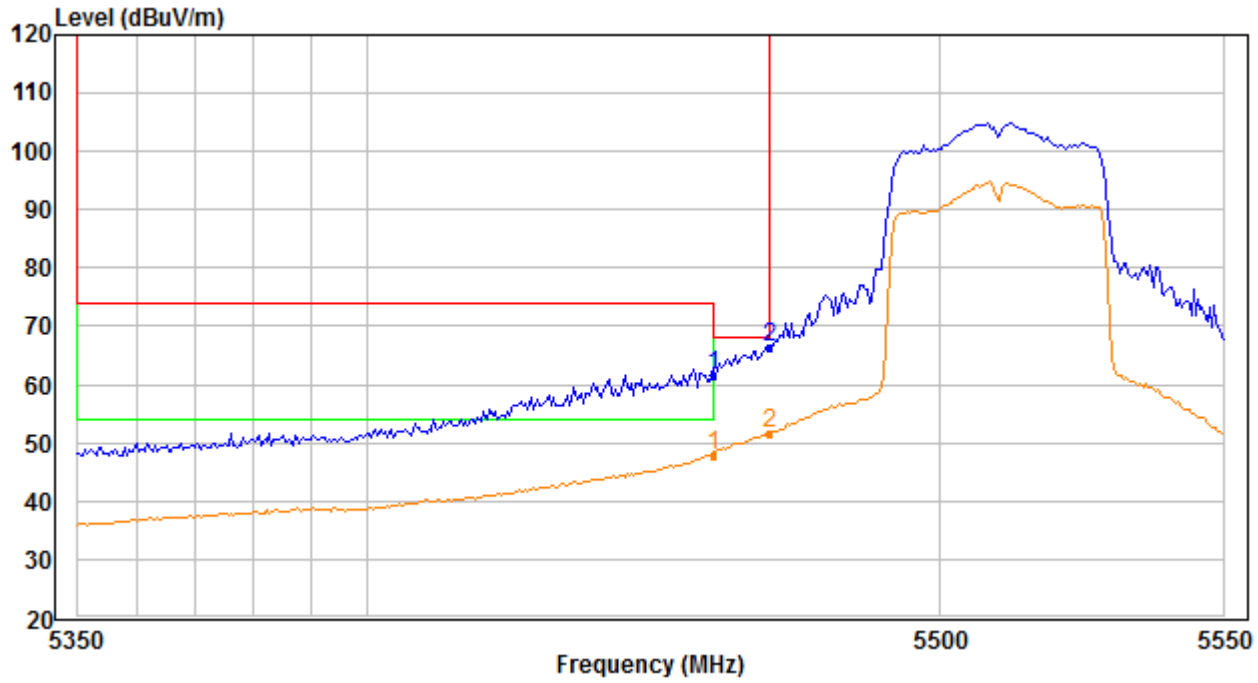


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | AV level (dBμV/m) | AV Limit (dBμV/m) | Conclusion |
|---|---|---|---|---|---|
| 5460.0000 | 61.52 | 68.20 | 47.95 | 54.00 | Pass |
| 5470.0000 | 66.36 | 68.20 | 51.72 | 54.00 | Pass |

| Test Channel: | Channel 134 | Ant. Polar. : | Horizontal |
|---|---|---|---|

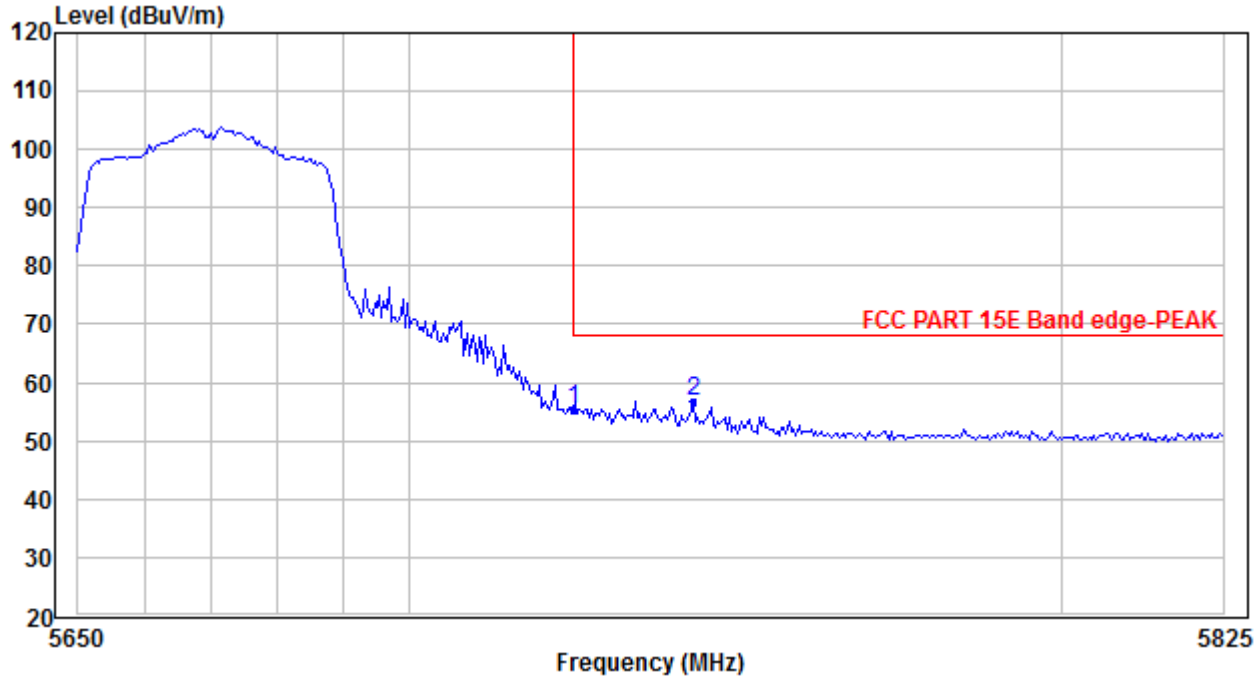


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | Conclusion |
|---|---|---|---|
| 5725.0000 | 55.41 | 68.20 | Pass |
| 5743.2870 | 56.77 | 68.20 | Pass |

| Test Channel: | Channel 134 | Ant. Polar. : | Vertical |
|---|---|---|---|

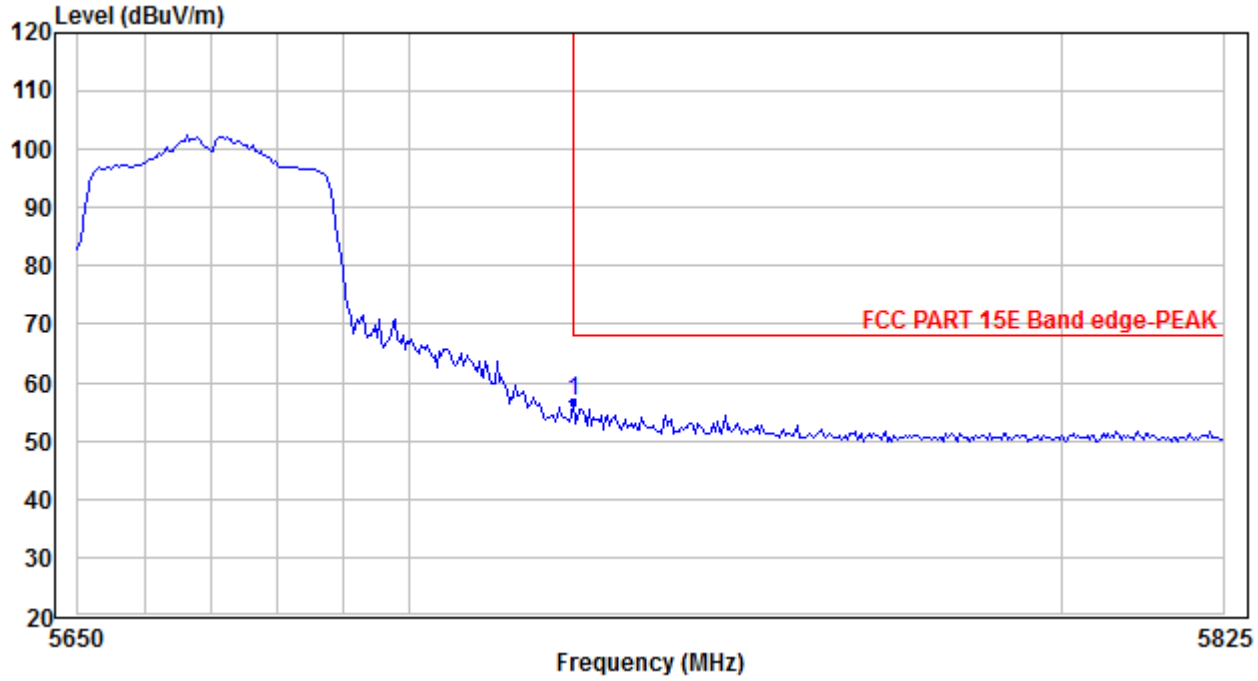


| Frequency (MHz) | Peak level (dBμV/m) | Peak Limit (dBμV/m) | Conclusion |
|---|---|---|---|
| 5725.0000 | 56.74 | 68.20 | Pass |

| Test Channel: | Channel 151 | Ant. Polar. : | Horizontal |
|---|---|---|---|

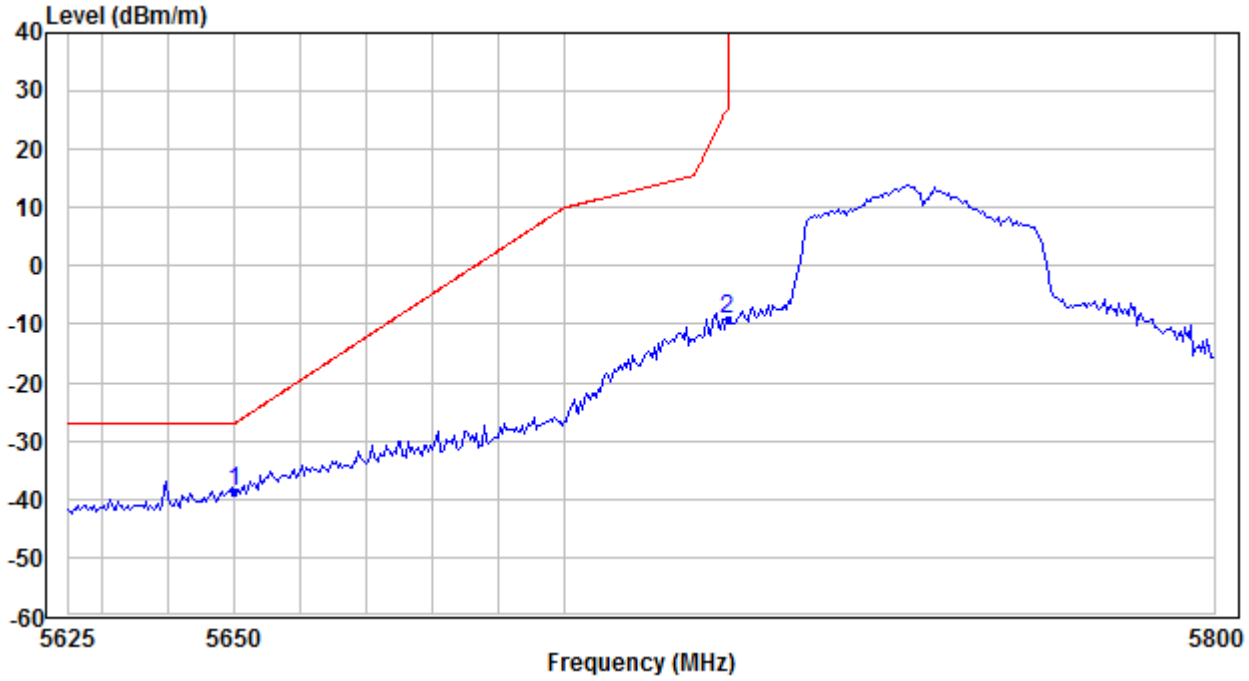


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5650.0000 | -38.85 | -27.00 | Pass |
| 5725.0000 | -9.13 | 27.00 | Pass |

| Test Channel: | Channel 151 | Ant. Polar. : | Vertical |
|---|---|---|---|

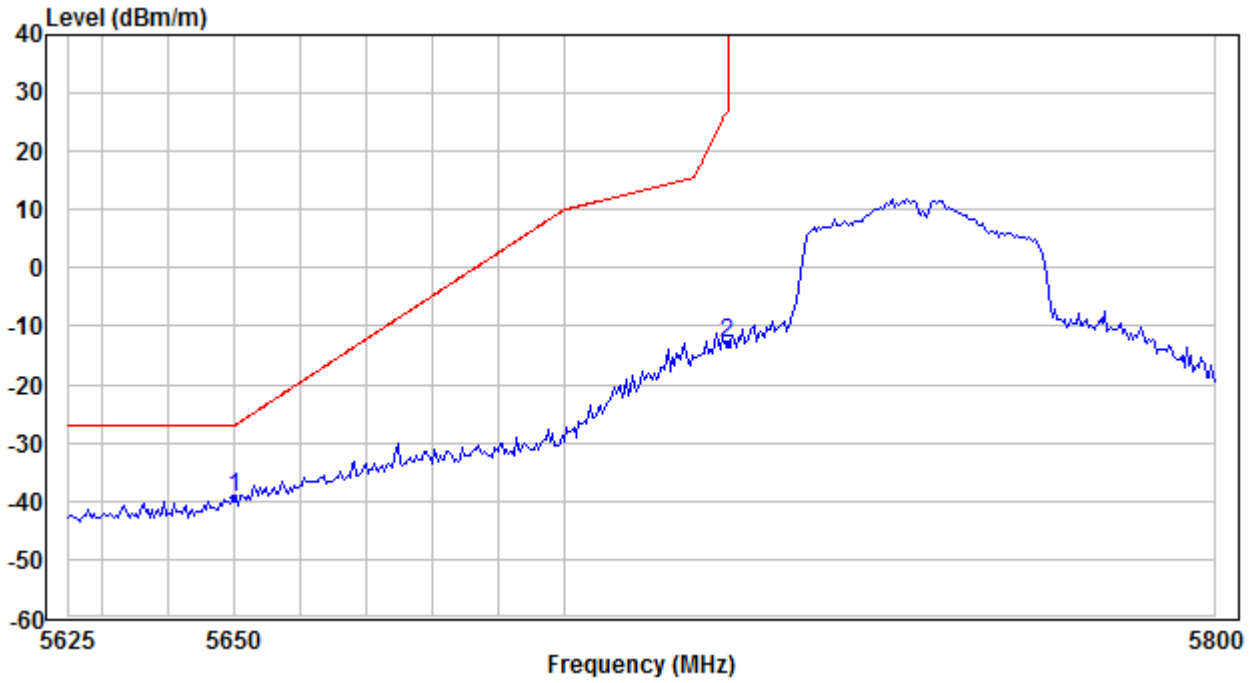


| Frequency (MHz) | Peak level (dBm) | Peak Limit (dBm) | Conclusion |
|---|---|---|---|
| 5650.0000 | -39.48 | -27.00 | Pass |
| 5725.0000 | -12.79 | 27.00 | Pass |