



MRT Technology (Suzhou) Co., Ltd
Phone: +86-512-66308358
Fax: +86-512-66308368
Web: www.mrt-cert.com

Report No.: 1511RSU00501
Report Version: V02
Issue Date: 12-18-2015

MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n

FCC ID: YZZGVC3200

APPLICANT: Grandstream Networks, Inc.

Application Type: Certification

Product: Full HD Video Conferencing System

Model No.: GVC3202

Brand Name: Grandstream

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15.247

Test Procedure(s): ANSI C63.10-2009, KDB 558074 D01v03r03

Test Date: November 18 ~ 21, 2015

Reviewed By : Robin Wu
(Robin Wu)

Approved By : Marlin Chen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r03. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1511RSU00501	Rev. 01	Initial report	11-24-2015
1511RSU00501	Rev. 02	Delete the conducted power and add some band-edge and conducted emission data	12-18-2015

Note: This report was based on original report no. 1506RSU00101. The EUT makes some changes on the basis of the original. The main board removed the HDMI OUT3 interface and replaced the OLYMPUS lens with UNION len. Others are the same as before.

We have assessed the worst-case mode for conducted emission & radiated spurious emission & radiated restricted band edge and shown the worst-case on the report.

CONTENTS

Description	Page
1. INTRODUCTION	5
1.1. Scope	5
1.2. MRT Test Location	5
2. PRODUCT INFORMATION	6
2.1. Equipment Description.....	6
2.2. Test Software	6
3. DESCRIPTION OF TEST	7
3.1. Evaluation Procedure	7
3.2. AC Line Conducted Emissions	7
3.3. Radiated Emissions	8
4. TEST EQUIPMENT CALIBRATION DATE	9
5. MEASUREMENT UNCERTAINTY	10
6. TEST RESULT	11
6.1. Summary	11
6.2. Radiated Spurious Emission Measurement	12
6.2.1. Test Limit	12
6.2.2. Test Procedure Used	12
6.2.3. Test Setting	12
6.2.4. Test Setup.....	14
6.2.5. Test Result.....	15
6.3. Radiated Restricted Band Edge Measurement	18
6.3.1. Test Result.....	18
6.4. AC Conducted Emissions Measurement.....	26
6.4.1. Test Limit	26
6.4.2. Test Setup.....	26
6.4.3. Test Result.....	27

§2.1033 General Information

Applicant:	Grandstream Networks, Inc.
Applicant Address:	4th Floor, Rainbow Technology Building #16 New West Rd, Nanshan Science & Technology Park (North District), Shenzhen, China 518057
Manufacturer:	Grandstream Networks, Inc.
Manufacturer Address:	4th Floor, Rainbow Technology Building #16 New West Rd, Nanshan Science & Technology Park (North District), Shenzhen, China 518057
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
FCC Rule Part(s):	Part 15.247
Model No.:	GVC3202
FCC ID:	YZZGVC3200
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	Digital Transmission System (DTS)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Full HD Video Conferencing System
Model No.	GVC3202
Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462 MHz
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Antenna Type	PCB Antenna
Antenna Gain	2.12dBi
Components	
Adapter	M/N: NBS65A120500M3 INPUT: 100-240V ~ 50/60Hz, 1.5A OUTPUT: 12.0Vdc, 5.0A

Channel List for 802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	N/A	N/A

2.2. Test Software

The test utility software used during testing was engineering order by applicant.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 D01v03r03 were used in the measurement of the **Full HD Video Conferencing System FCC ID: YZZGVC3200**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 6.4.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB BeamWidth of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2016/11/03
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06114	1 year	2016/11/20

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2016/12/08
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Preamplifier	Agilent	83017A	MRTSUE06020	1 year	2016/03/29
Preamplifier	Schwarzbeck	BBV9721	MRTSUE06121	1 year	2016/04/16
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2016/11/07
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2016/11/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2016/11/07
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06115	1 year	2016/11/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

6. TEST RESULT

6.1. Summary

Company Name: Grandstream Networks, Inc.
FCC ID: YZZGVC3200
FCC Classification: Digital Transmission System (DTS)
Data Rate(s) 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);
Tested: 6.5/7.2Mbps ~ 65/72.2Mbps (n-HT20)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 6.2 & 6.3
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 6.4

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

6.2. Radiated Spurious Emission Measurement

6.2.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.2.2. Test Procedure Used

KDB 558074 D01v03r03 - Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r03 - Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r03 - Section 12.2.5 (average power measurements)

6.2.3. Test Setting

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r03

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 D01v03r03


1. RBW = 1MHz.
2. VBW $\geq 3 \times$ RBW.
3. Detector = RMS, if span/(# of points in sweep) $\leq$ (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., RMS).
 - As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

6.2.4. Test Setup


9kHz ~ 30MHz Test Setup:

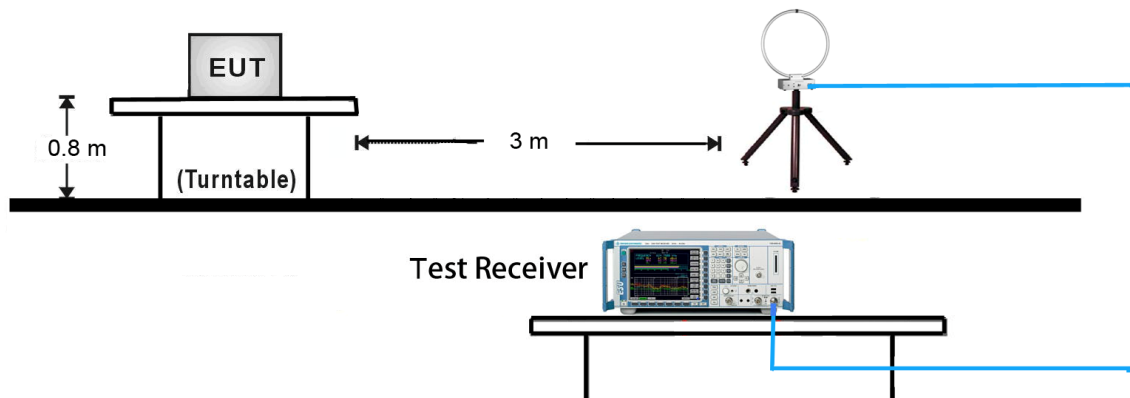

30MHz ~ 1GHz Test Setup:

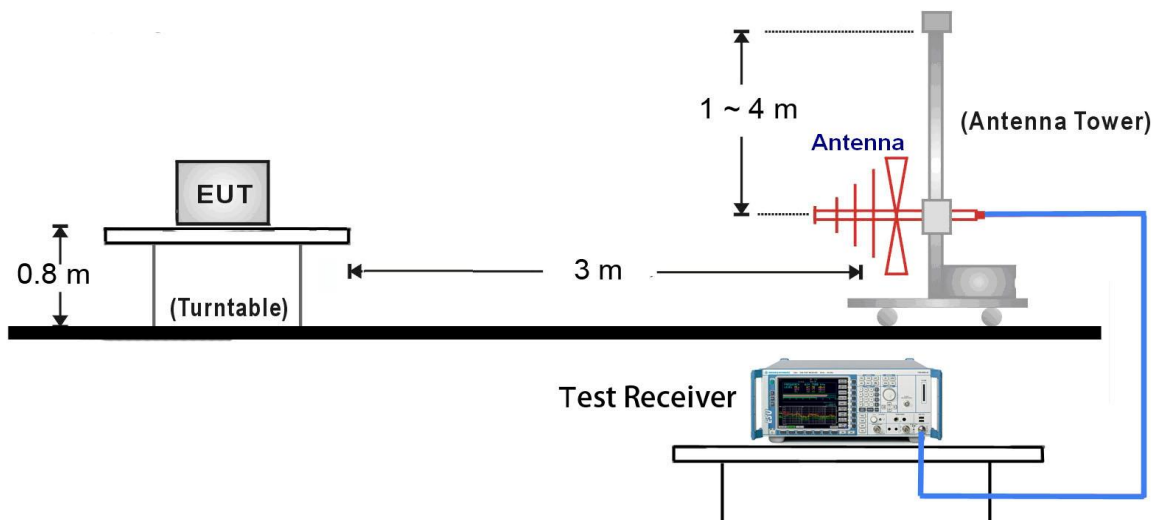

1GHz ~ 25GHz Test Setup:

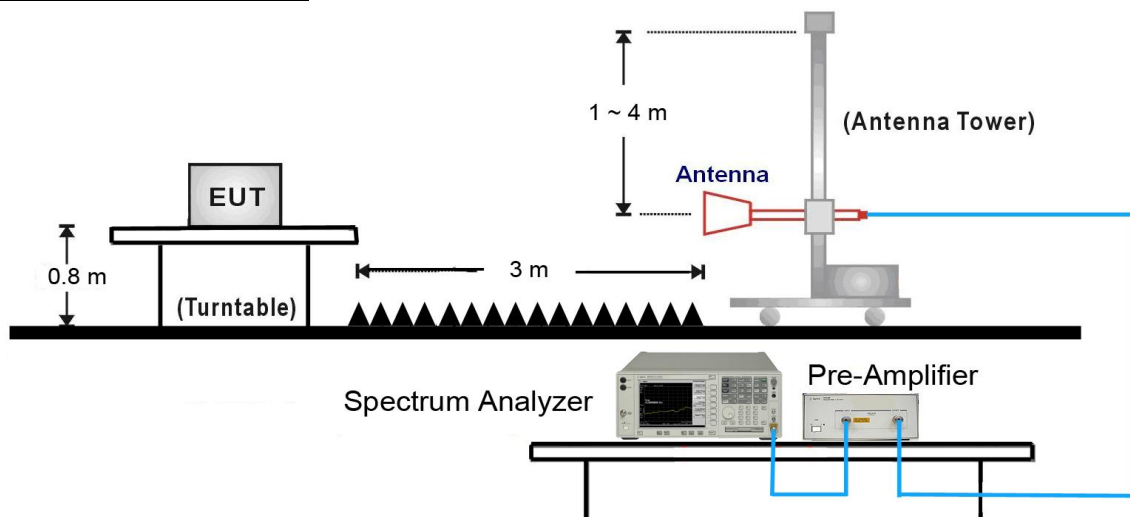

6.2.5. Test Result

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3142.0	41.0	-1.6	39.4	84.6	-43.4	Peak	Horizontal
*	3303.5	39.6	-1.8	37.8	84.6	-45.0	Peak	Horizontal
	3626.5	52.3	-0.6	51.7	74.0	-22.3	Peak	Horizontal
	4723.0	38.0	2.4	40.4	74.0	-33.6	Peak	Horizontal
*	3210.0	40.4	-1.6	38.8	84.6	-44.0	Peak	Vertical
*	3397.0	39.2	-1.7	37.5	84.6	-45.3	Peak	Vertical
	3618.0	48.8	-0.6	48.2	74.0	-25.8	Peak	Vertical
	4816.5	39.1	2.7	41.8	74.0	-32.2	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level 104.6dBμV/m.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2015/11/20 - 11:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Worse Case Mode: Transmit at Channel 2412MHz by 802.11g	

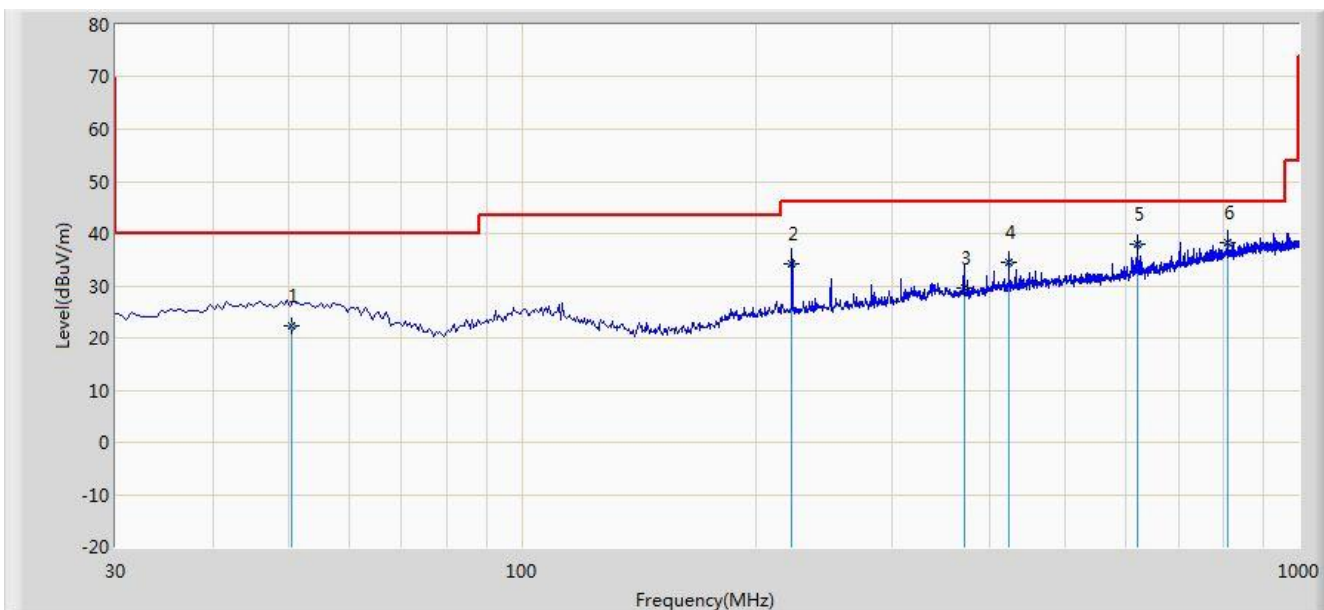


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			50.520	22.398	7.500	-17.602	40.000	14.898	QP
2			222.640	34.096	21.400	-11.904	46.000	12.696	QP
3			371.000	29.694	13.600	-16.306	46.000	16.094	QP
4			423.400	34.486	17.500	-11.514	46.000	16.985	QP
5			620.490	37.964	17.740	-8.036	46.000	20.224	QP
6		*	809.500	38.395	15.520	-7.605	46.000	22.875	QP

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 11:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Worse Case Mode: Transmit at Channel 2412MHz by 802.11g	

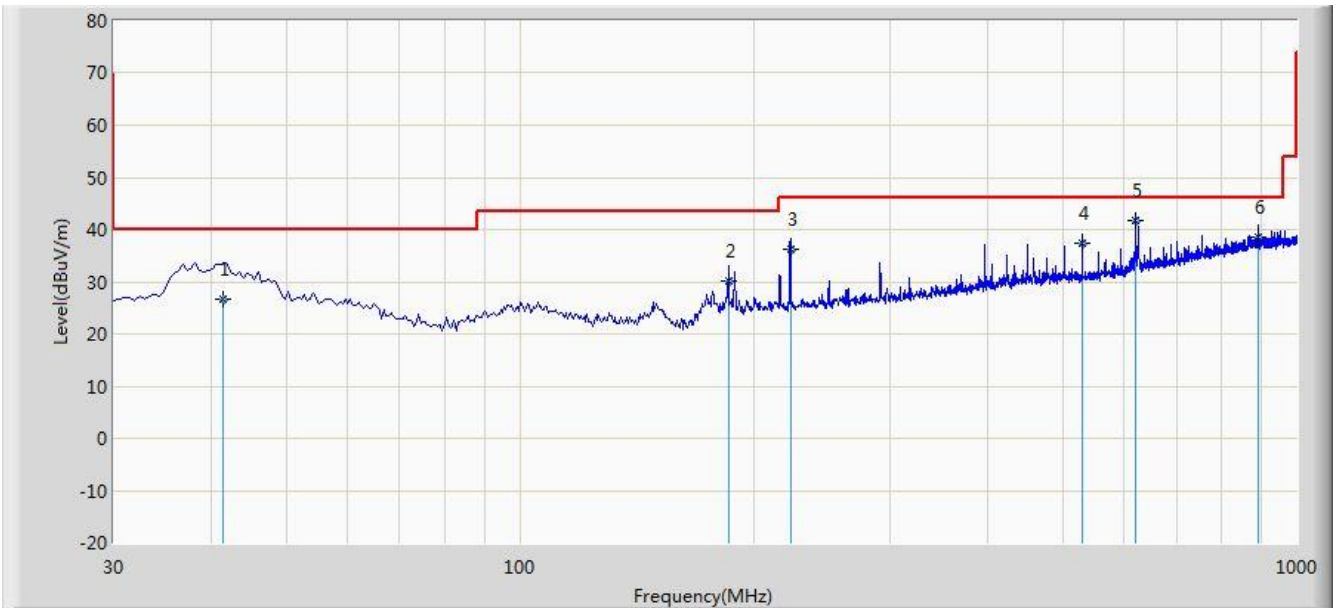

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			41.520	26.632	12.500	-13.368	40.000	14.132	QP
2			185.630	30.271	18.890	-13.229	43.500	11.381	QP
3			223.150	36.219	23.500	-9.781	46.000	12.718	QP
4			529.400	37.292	18.630	-8.708	46.000	18.662	QP
5		*	620.354	41.823	21.600	-4.177	46.000	20.223	QP
6			890.670	38.511	14.600	-7.489	46.000	23.911	QP


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

6.3. Radiated Restricted Band Edge Measurement

6.3.1. Test Result

Site: AC1	Time: 2015/11/20 - 10:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2412MHz by 802.11g	

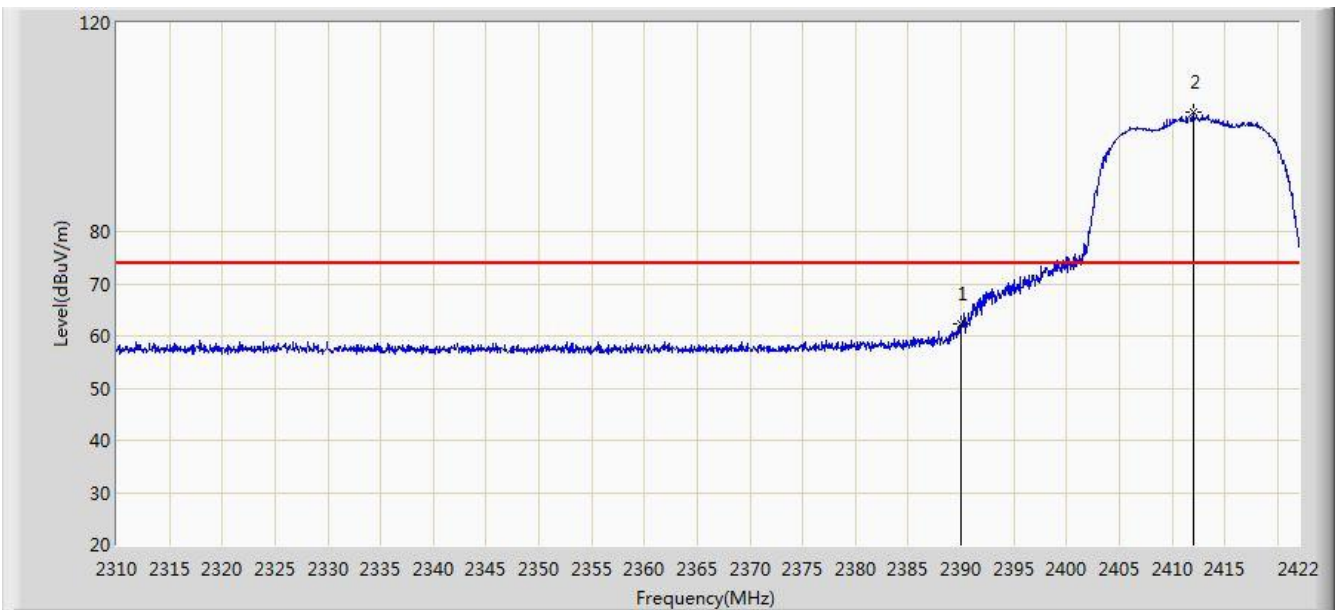


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	62.319	31.116	-11.681	74.000	31.203	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 10:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2412MHz by 802.11g	

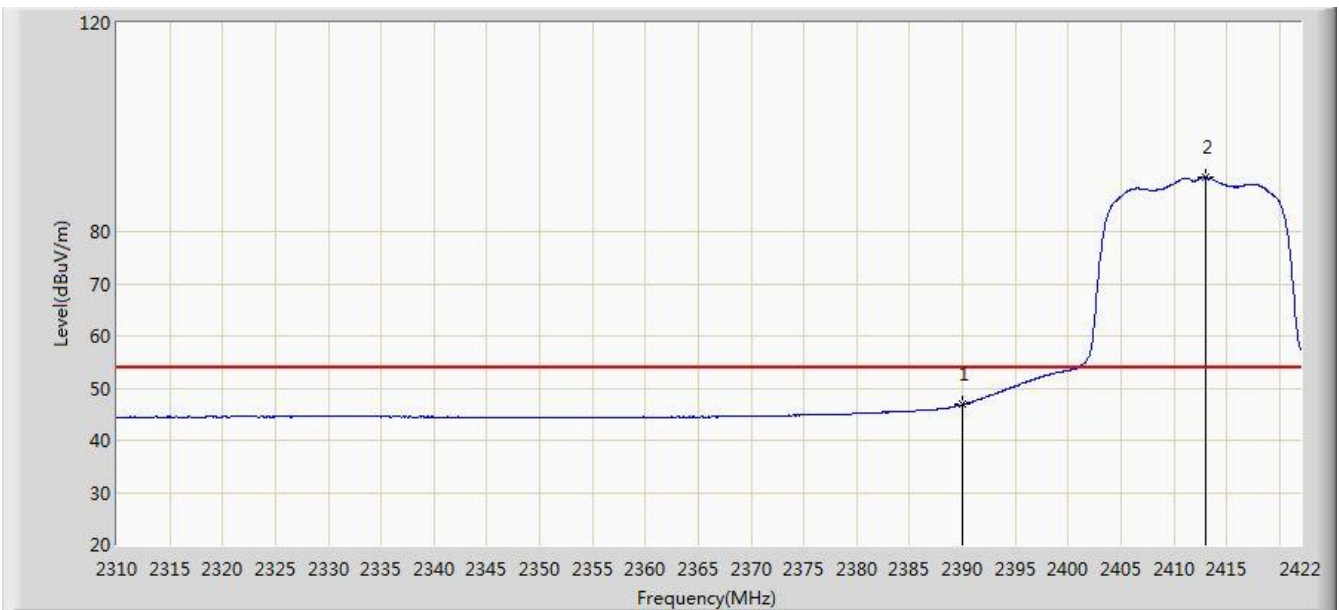


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.851	15.648	-7.149	54.000	31.203	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 10:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2412MHz by 802.11g	

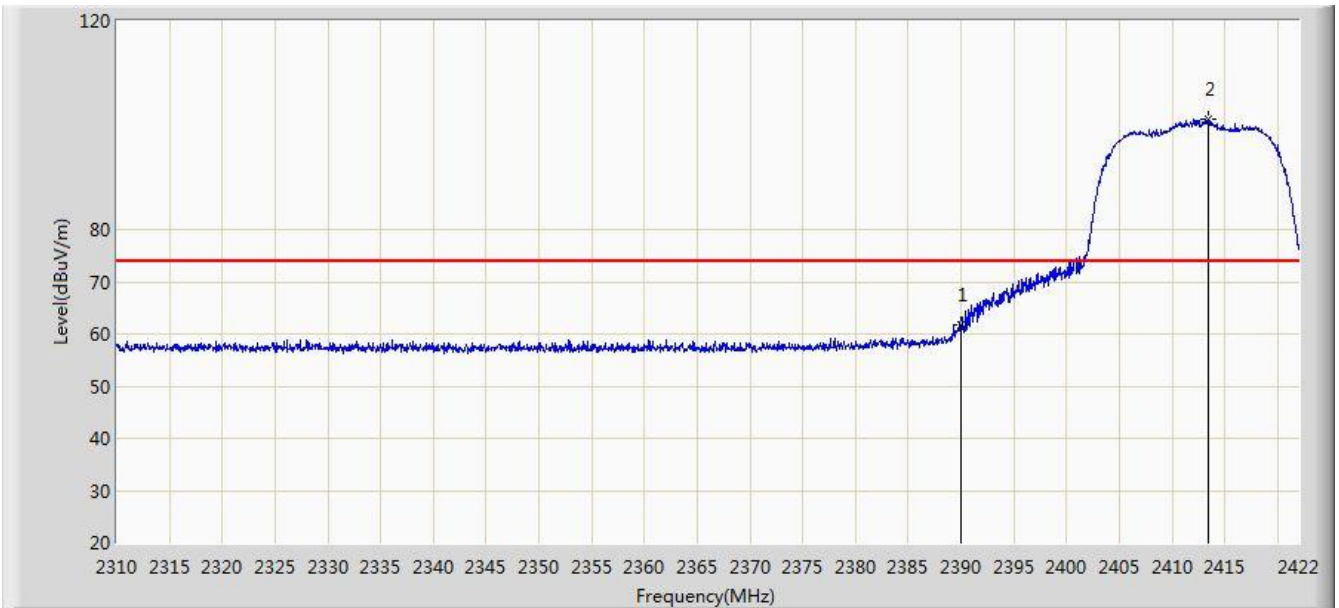


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	61.639	30.436	-12.361	74.000	31.203	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 10:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2412MHz by 802.11g	

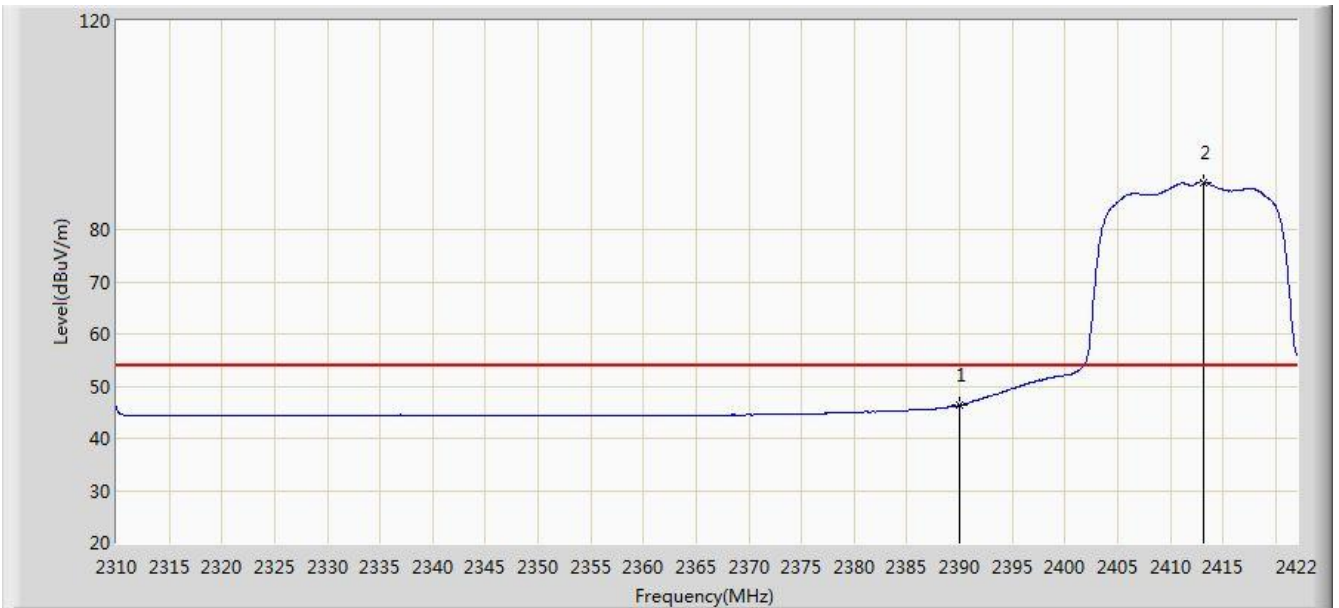


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.336	15.133	-7.664	54.000	31.203	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 10:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2462MHz by 802.11g	

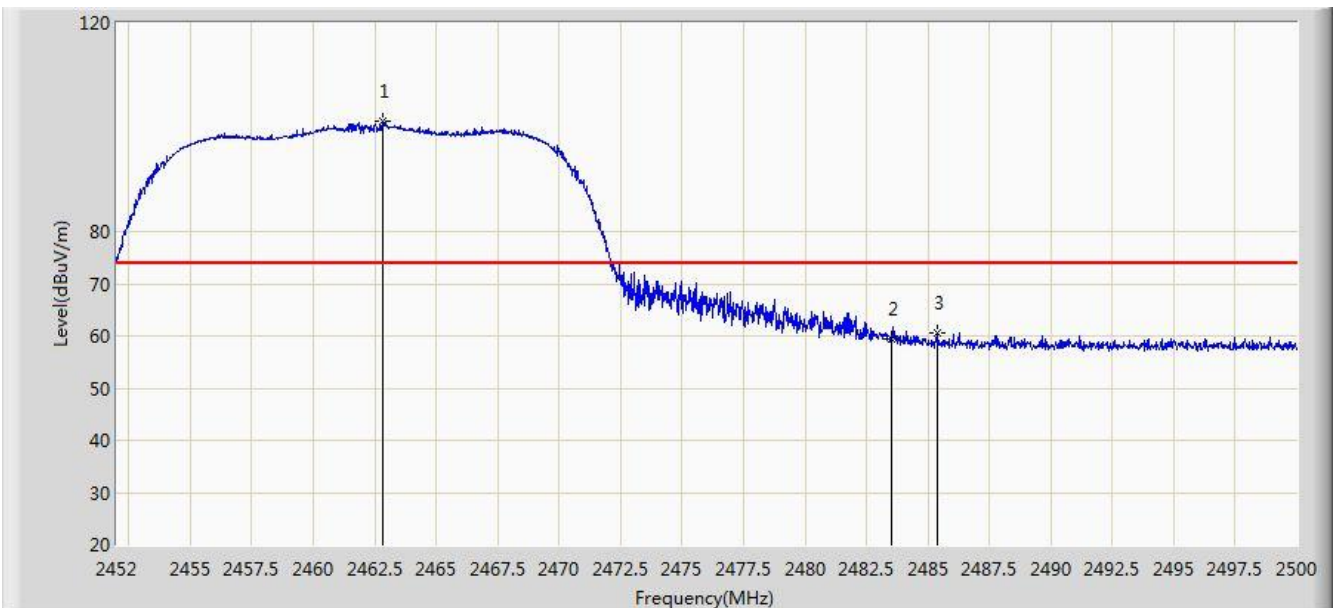


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
2			2483.500	59.499	28.305	-14.501	74.000	31.194	PK
3			2485.360	60.598	29.400	-13.402	74.000	31.198	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 10:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2462MHz by 802.11g	

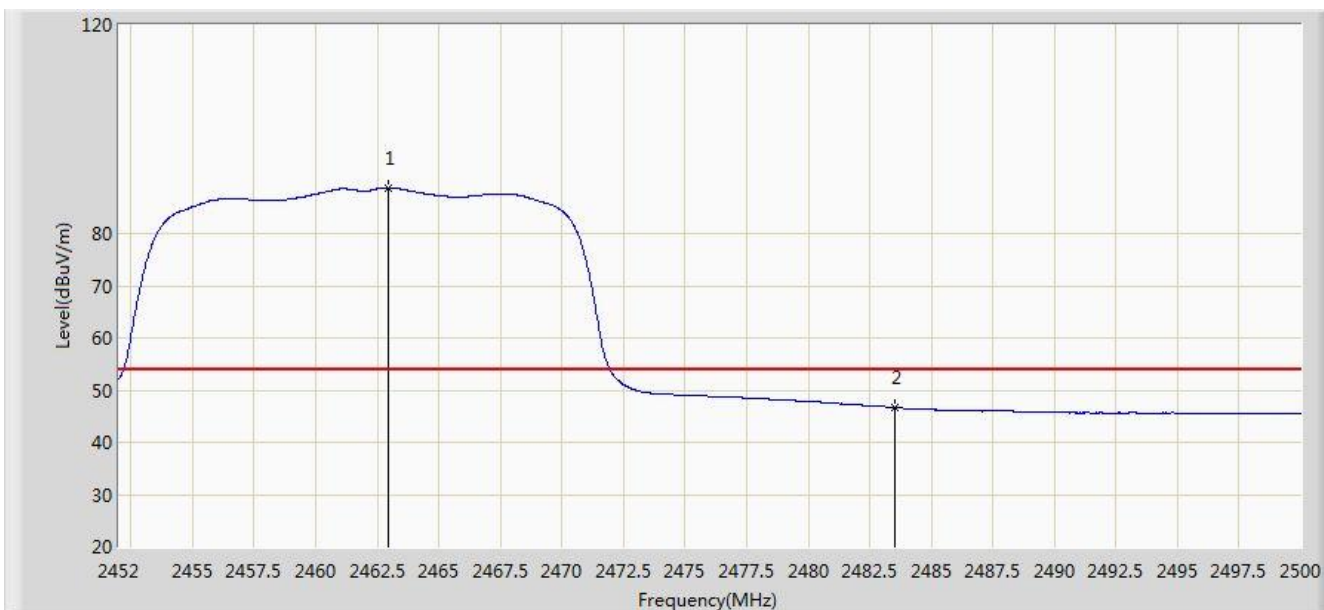


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
2			2483.500	46.714	15.520	-7.286	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 10:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2462MHz by 802.11g	

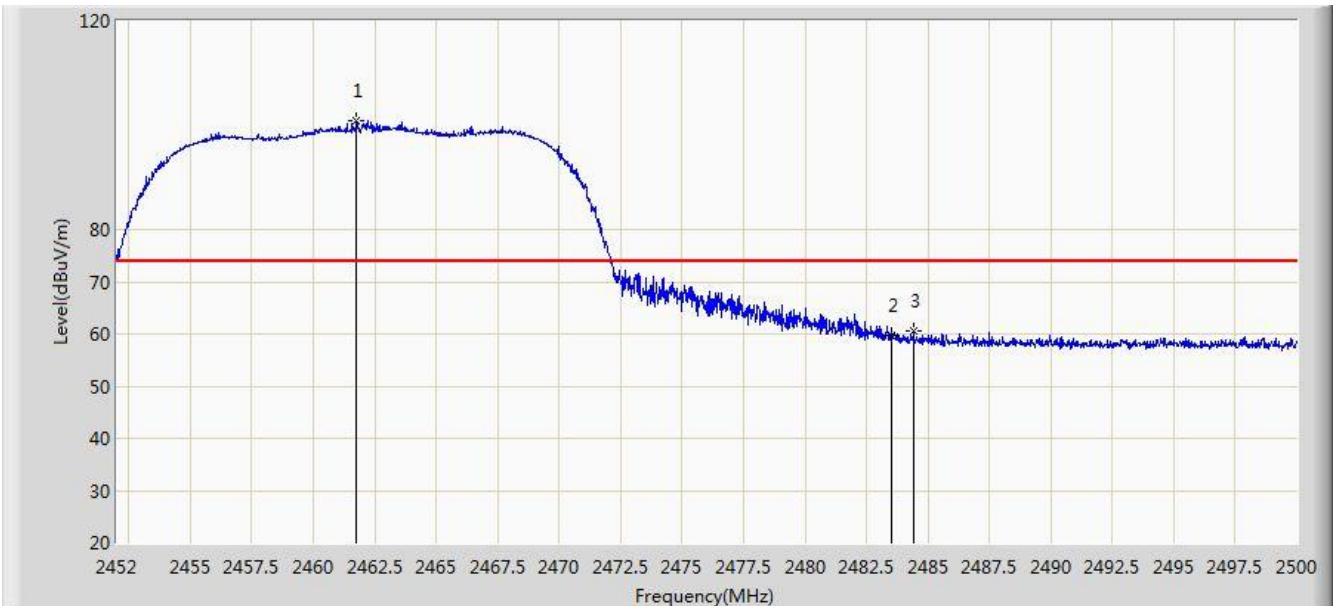


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
2			2483.500	59.833	28.639	-14.167	74.000	31.194	PK
3			2484.424	60.466	29.271	-13.534	74.000	31.195	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/20 - 10:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Mode: Transmit at Channel 2462MHz by 802.11g	

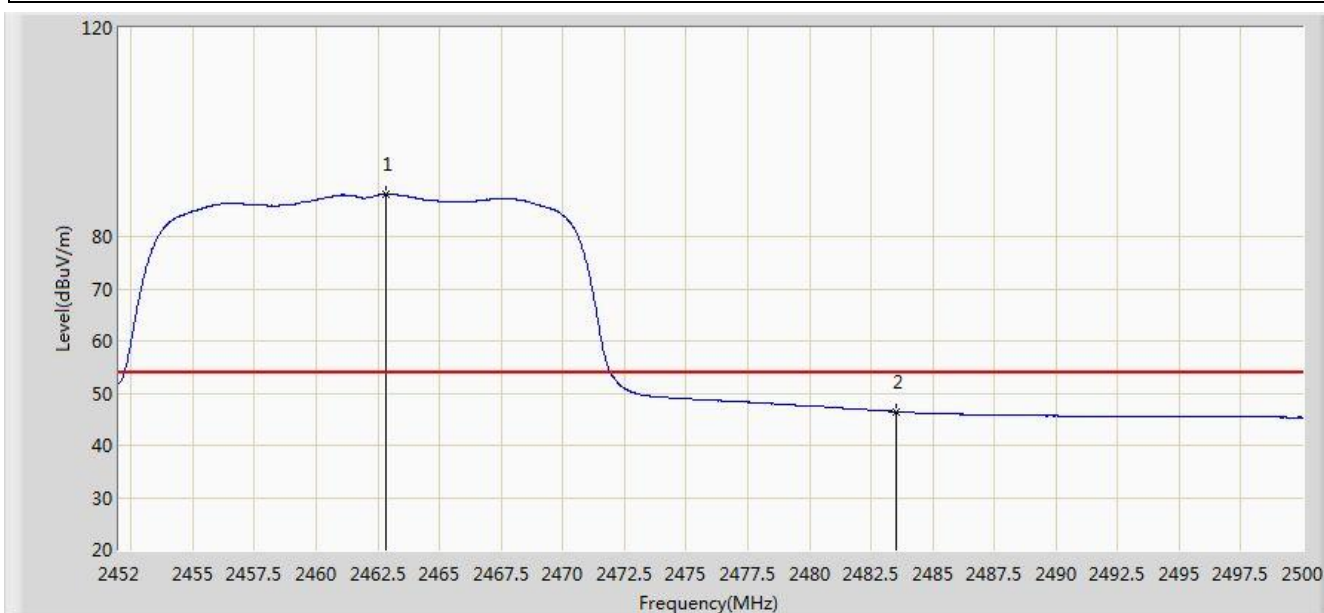

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
2			2483.500	46.471	15.277	-7.529	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

6.4. AC Conducted Emissions Measurement


6.4.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.4.2. Test Setup

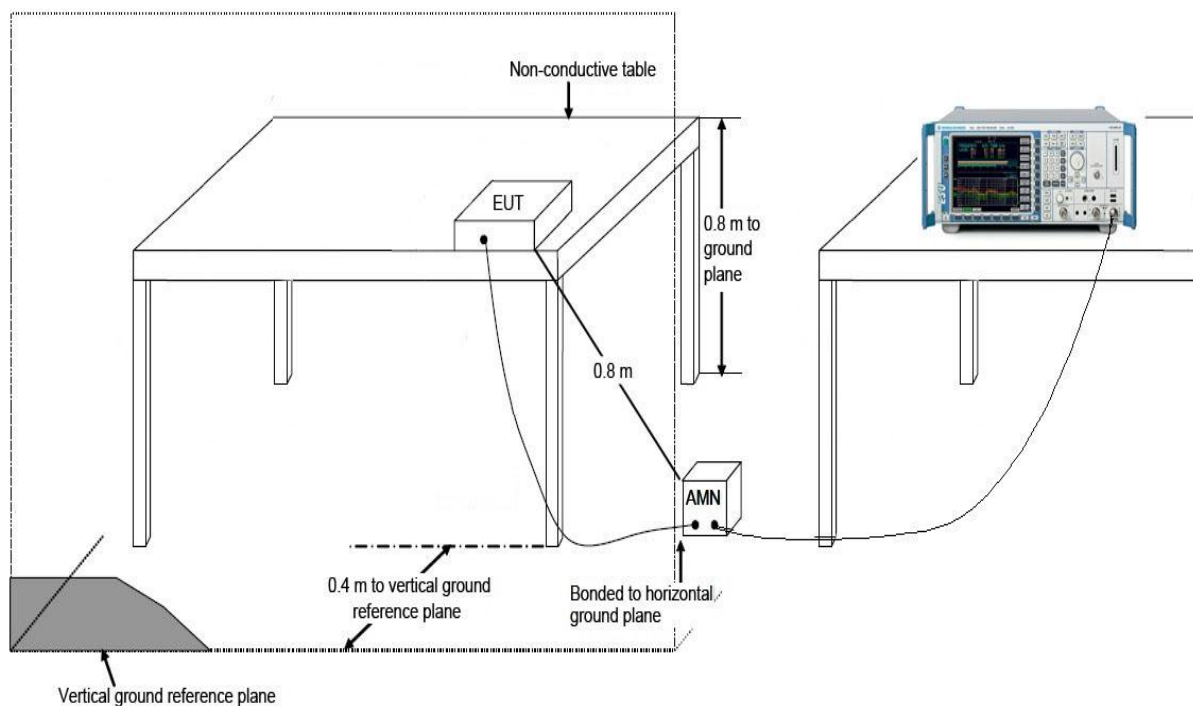

6.4.3. Test Result

Site: SR2	Time: 2015/11/20 - 10:46
Limit: FCC_Part15.207_CE_AC Power	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Note: Mode 1	

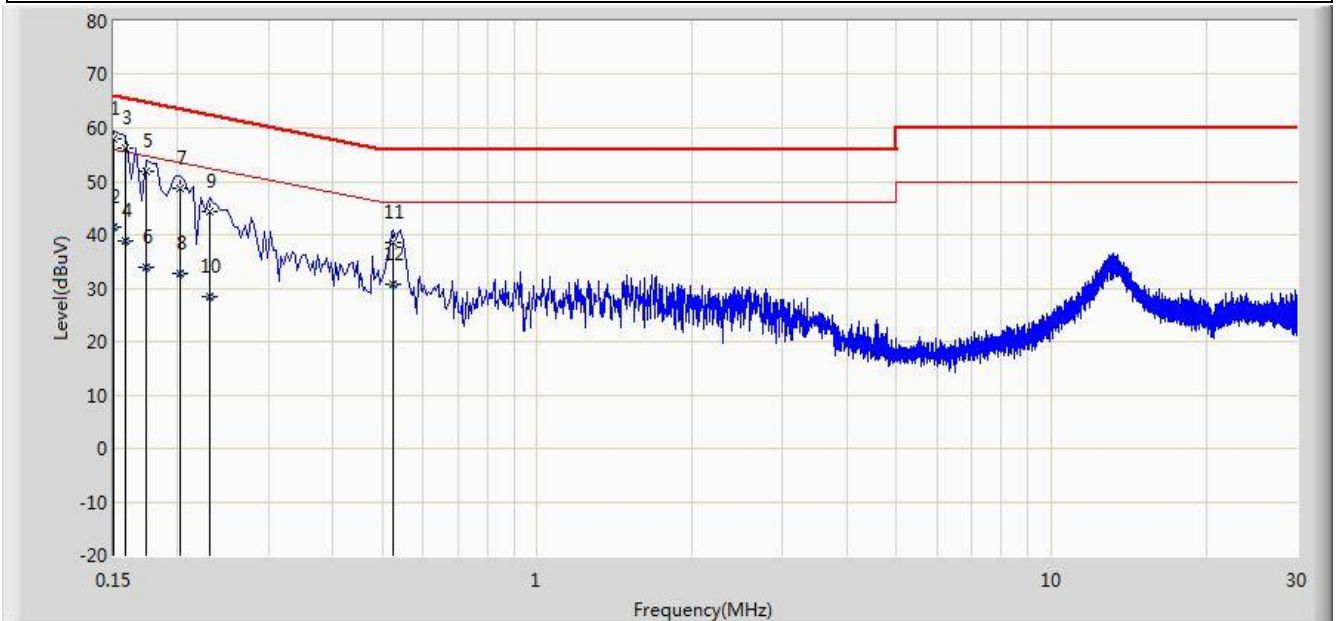


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	57.938	46.770	-8.062	66.000	11.168	QP
2			0.150	41.448	30.280	-14.552	56.000	11.168	AV
3			0.158	56.229	45.918	-9.340	65.568	10.311	QP
4			0.158	38.891	28.580	-16.678	55.568	10.311	AV
5			0.174	51.937	41.869	-12.830	64.767	10.068	QP
6			0.174	33.784	23.716	-20.983	54.767	10.068	AV
7			0.202	48.728	38.736	-14.799	63.528	9.993	QP
8			0.202	32.695	22.702	-20.833	53.528	9.993	AV
9			0.230	44.411	34.463	-18.039	62.450	9.947	QP
10			0.230	28.464	18.517	-23.986	52.450	9.947	AV
11			0.526	38.414	28.261	-17.586	56.000	10.153	QP
12			0.526	30.627	20.474	-15.373	46.000	10.153	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/11/20 - 10:52
Limit: FCC_Part15.207_CE_AC Power	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Full HD Video Conferencing System	Power: AC 120V/60Hz
Note: Mode 1	

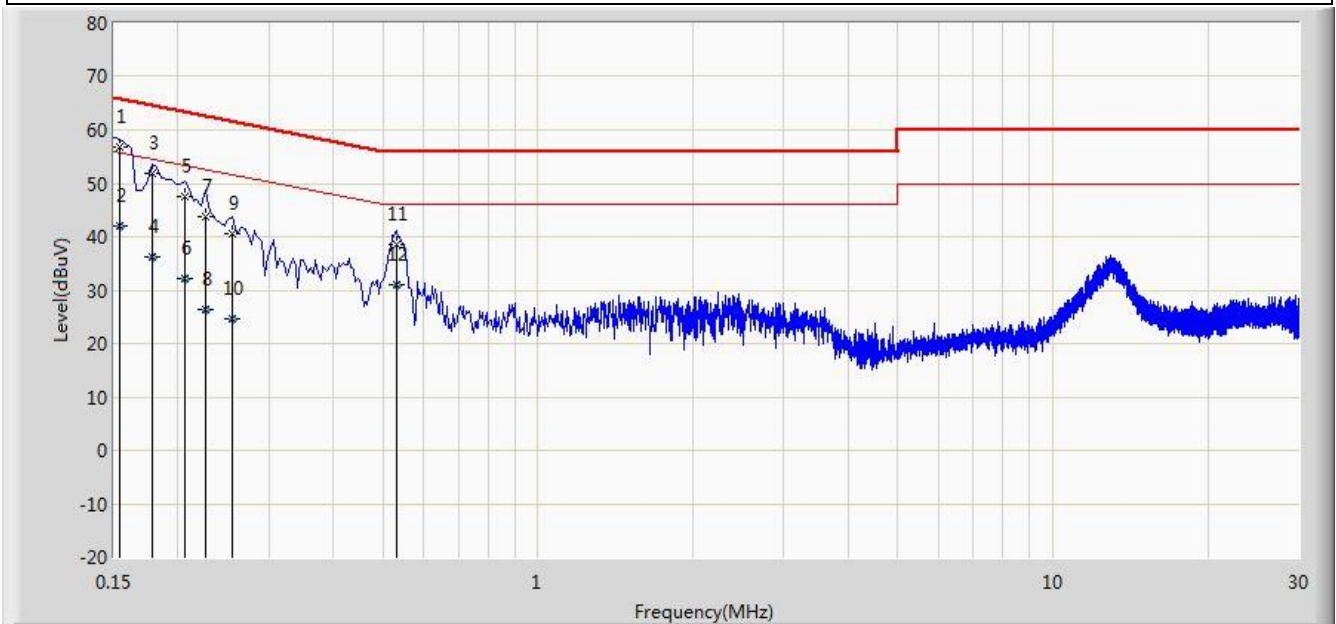

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	56.936	46.220	-8.846	65.781	10.716	QP
2			0.154	41.952	31.236	-13.830	55.781	10.716	AV
3			0.178	51.892	41.843	-12.686	64.578	10.049	QP
4			0.178	36.364	26.315	-18.214	54.578	10.049	AV
5			0.206	47.672	37.671	-15.693	63.365	10.001	QP
6			0.206	32.158	22.157	-21.207	53.365	10.001	AV
7			0.226	43.873	33.891	-18.722	62.595	9.982	QP
8			0.226	26.311	16.328	-26.284	52.595	9.982	AV
9			0.254	40.523	30.519	-21.103	61.625	10.004	QP
10			0.254	24.714	14.710	-26.912	51.625	10.004	AV
11			0.530	38.611	28.441	-17.389	56.000	10.169	QP
12			0.530	30.926	20.757	-15.074	46.000	10.169	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

The End