

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2401Y27848E-RFB
FCC ID: YZZGWN7062E
IC: 11964A-GWN7062E

Test Standard (s)

FCC PART 15.407; RSS-247 ISSUE 3, AUGUST 2023

Sample Description

Product Type: Wi-Fi 6 Router
Model No.: GWN7062E
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2024-10-29
Issue Date: 2025-02-05

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ekko Wu

Ekko Wu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	6
TEST METHODOLOGY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
APPLICABLE STANDARDS.....	10
DFS REQUIREMENT	10
DFS MEASUREMENT SYSTEM.....	14
SYSTEM BLOCK DIAGRAM.....	14
CONDUCTED METHOD	15
RADIATED METHOD.....	16
TEST PROCEDURE	16
TEST RESULTS.....	17
DESCRIPTION OF EUT	17
RADAR WAVEFORM CALIBRATION	17
TEST DATA	17
CHANNEL AVAILABILITY CHECK TIME (CAC)	18
TEST PROCEDURE	18
TEST DATA	18
CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME	19
TEST PROCEDURE	19
TEST DATA	19
NON-OCCUPANCY PERIOD.....	20
TEST PROCEDURE	20
TEST DATA	20
DETECTION BANDWIDTH.....	21
TEST PROCEDURE	21
TEST DATA	21
STATISTICAL PERFORMANCE CHECK	22
TEST PROCEDURE	22
TEST DATA	22

CHANNEL LOADING	23
TEST PROCEDURE	23
TEST DATA	23
BRIDGE AND/OR MESH MODE.....	24
TEST PROCEDURE	24
TEST DATA	24
EUT PHOTOGRAPHS.....	25
TEST SETUP PHOTOGRAPHS	26
APPENDIX	27
APPENDIX A: DFS DETECTION THRESHOLDS	27
APPENDIX B: CHANNEL AVAILABILITY CHECK TIME	50
APPENDIX C: CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME	57
APPENDIX D: NON-OCCUPANCY PERIOD	59
APPENDIX E: U-NII DETECTION BANDWIDTH	62
APPENDIX F: STATISTICAL PERFORMANCE CHECK.....	70
APPENDIX G: CHANNEL LOADING	173

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y27848E-RFB	Original Report	2025-02-05

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	GWN7062E
FVIN	0.0.2.10
Product	Wi-Fi 6 Router
Tested Model	GWN7062E
Multiple Model(s)	N/A
Frequency Range	5GHz Wi-Fi: 5250-5350 MHz; 5470-5725MHz Note: frequency range 5600-5650MHz can't be use in Canada
Mode	802.11a/n20/n40/ac20/ac40/ac80/ac160/ax20/ax40/ax80/ax160
Device Type	Master
Maximum Conducted Average Output Power	FCC: 5250-5350MHz: 21.35dBm 5470-5725MHz: 20.95dBm IC: 5250-5350MHz: 18.35dBm 5470-5600MHz & 5650-5725MHz: 20.95dBm
EIRP	FCC: 5250-5350MHz: 29.22dBm 5470-5725MHz: 29.16dBm IC: 5250-5350MHz: 22.61dBm 5470-5600MHz & 5650-5725MHz: 29.16dBm
Modulation Technique	OFDM, OFDMA
Antenna Specification [#]	ANT0 (Chain 0): 3.98dBi; ANT1 (Chain 1): 4.26dBi ANT2 (Chain 2): 3.43dBi (provided by the applicant)
Voltage Range	DC 5V from Adapter
Sample serial number	2TPH-12 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: DCT18W050300US-A0 Input: 100-240V~50/60Hz, 0.7A max Output: 5.0V, 3.0A Adapter 2 Model: GQ24-050300-AU Input: 100-240V~50/60Hz, 1.0A Max Output: 5.0V, 3.0A Adapter 3 Model: TS-A015-050300A2 Input: 100-240V~50/60Hz, 0.6A Output: 5.0V, 3.0A, 15.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts E of the Federal Communications Commission's rules, and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada.

The objective is to determine compliance with FCC Part 15, Subpart E, section 15.407 Dynamic Frequency Selection (DFS) for devices operating in the bands 5250-5350 MHz, 5470-5725 MHz.

The objective is to determine compliance with Dynamic Frequency Selection (DFS) of the RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada for devices operating in the bands 5250-5350 MHz, 5470-5600MHz and 5650-5725 MHz.

Test Methodology

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Each test item follows test standards and with no deviation.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

EUT Exercise Software

N/A

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Lenovo	PC	TIANYI510Pro-18ICB	R3NO28B21001
Lenovo	LED display	L2364A	U310FZR9
Lenovo	Keyboard	EKB-536A	811A19A5
DELL	Mouse	Ms116P	Ms116P
Redmi	Mobile phone	M2012K10C	32702
DELL	Notebook	Latitude E6410	11429208685

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded un-detachable DC cable	1.2	EUT	Adapter
Shielded detachable RJ45 cable	1.0	EUT	Notebook

SUMMARY OF TEST RESULTS

The following result table represents the list of measurements required under the CFR §47 Part 15.407(h), RSS-247 Issue 3 §6.3 and KDB: 905462 D02 UNII DFS Compliance Procedures New Rules v02

Items	Description of Test	Result
Detection Bandwidth	UNII Detection Bandwidth	Compliant
Performance Requirements Check	Initial Channel Availability Check Time (CAC)	Compliant
	Radar Burst at the Beginning of the CAC	Compliant
	Radar Burst at the End of the CAC	Compliant
In-Service Monitoring	Channel Move Time	Compliant
	Channel Closing Transmission Time	Compliant
	Non-Occupancy Period	Compliant
Radar Detection	Statistical Performance Check	Compliant
Channel Loading	Channel Loading	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Keysight	MXG Vector Signal Generator	N5182B	MY53051503	2024/01/08	2025/01/07
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26
HP	Power Splitter	11667A	1610A	2024/06/27	2025/06/26
Unknown	RF Cable	65475	01670515	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

APPLICABLE STANDARDS

DFS Requirement

CFR §47 Part 15.407(h) & RSS-247 Issue 3, August 2023 section 6.3

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{SEC}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 usec is selected, the number of pulses

would be $\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Roundup} \{17.2\} = 18$.

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μ sec)	Chirp Width (MHz)	PRI (μ sec)	Number of Pulses per <i>Burst</i>	Number of <i>Bursts</i>	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μ sec)	PRI (μ sec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30


DFS Measurement System

BACL DFS measurement system consists of two subsystems: (1) The radar signal generating subsystem and (2) the traffic monitoring subsystem.


System Block Diagram

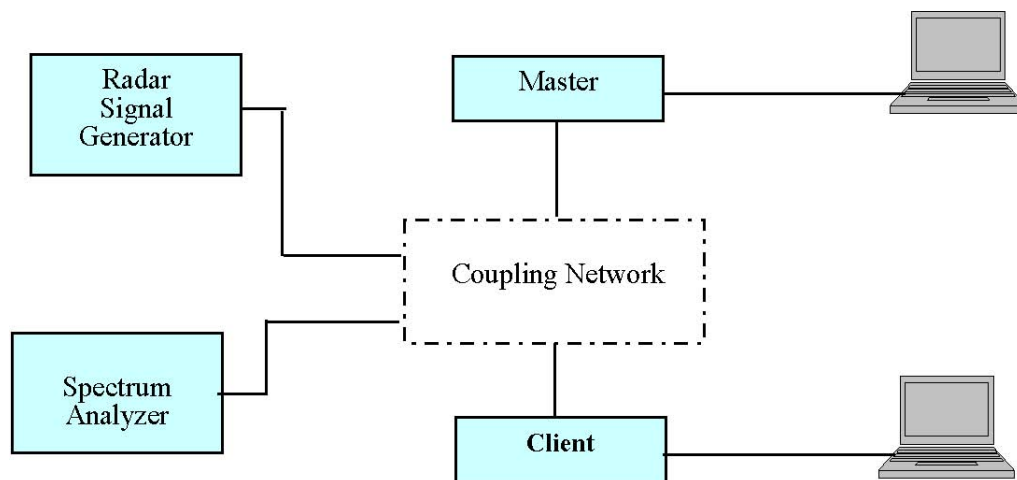


Conducted Method

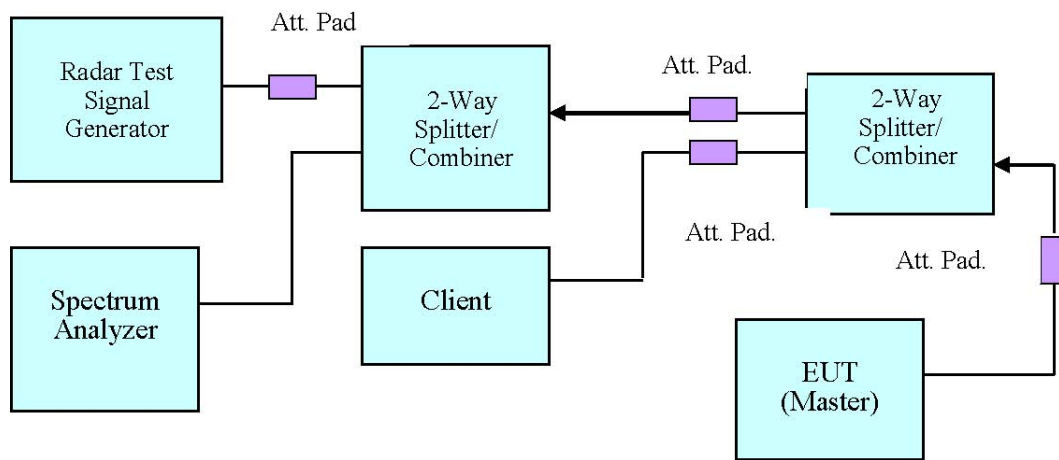

Setup for Master with injection at the Master

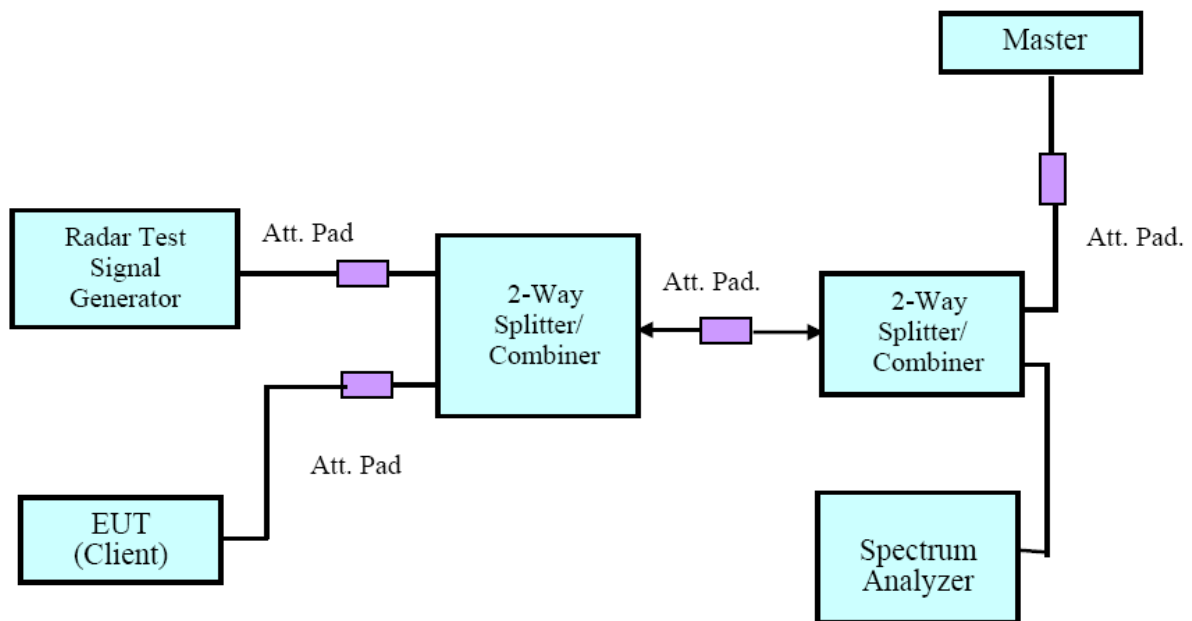


Setup for Client with injection at the Master

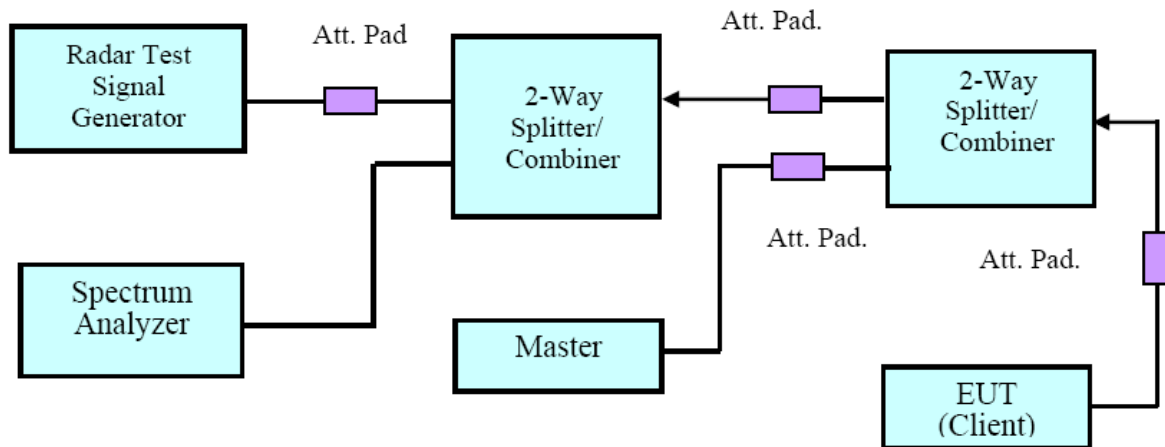

Setup for Client with injection at the Client

Radiated Method

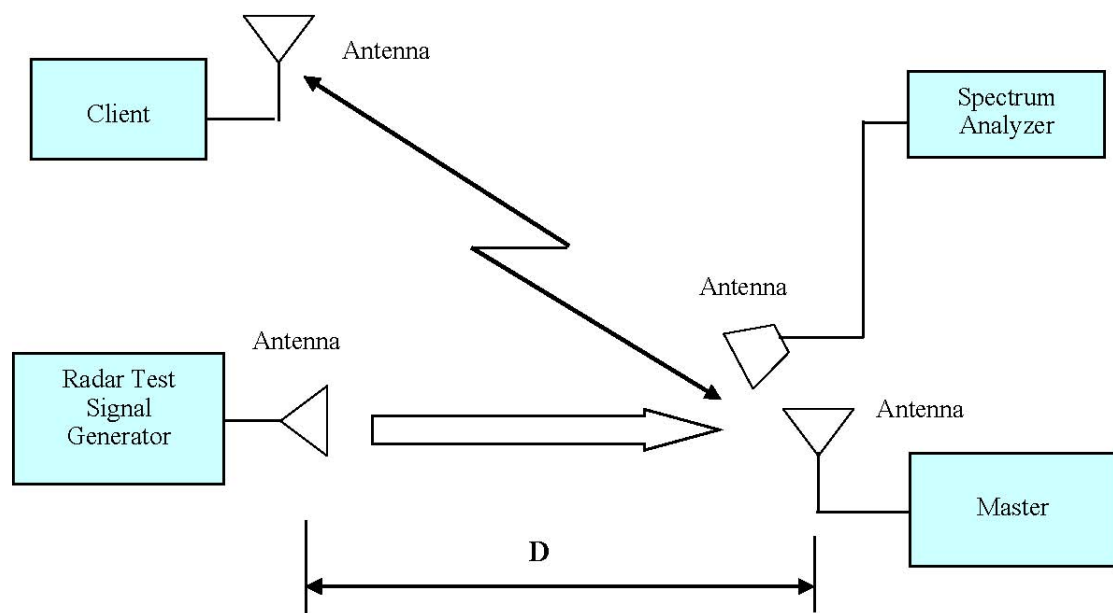

Test Procedure


A spectrum analyzer is used as a monitor verifies that the EUT status including Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the diction and Channel move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.

TEST RESULTS

Description of EUT

The maximum EIRP is great than 200mW. The calibrated radiated DFS detection threshold level is set to -64dBm.

Radar Waveform Calibration

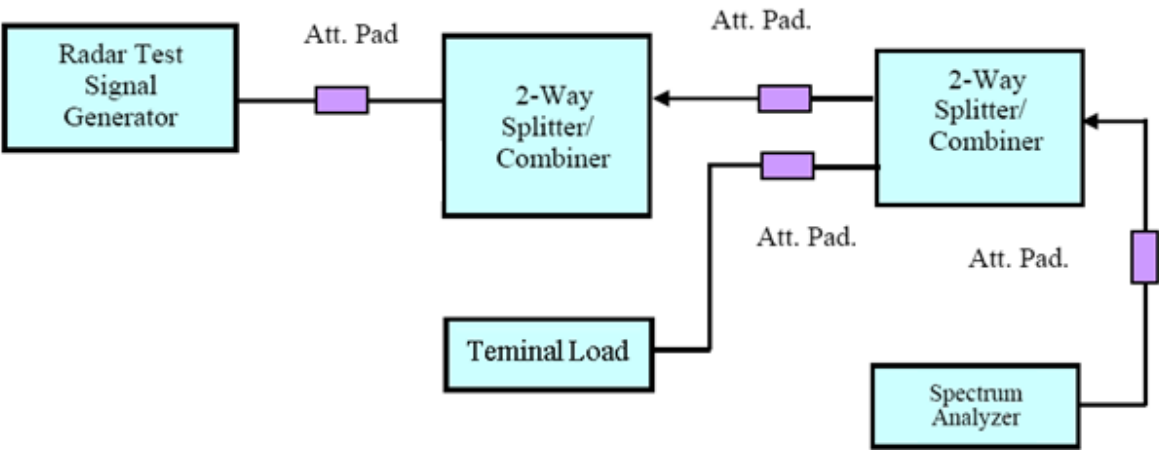

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

CHANNEL AVAILABILITY CHECK TIME (CAC)

Test Procedure

1. Initial Channel Availability Check Time

The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the UUT is powered on, the spectrum analyzer will be set to zero span and the spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.

The UUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

Confirm that the UUT initiates transmission on the channel

2. Radar Burst at the Beginning of the Channel Availability Check Time

A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window at the beginning of CAC time. Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported.

3. Radar Burst at the End of the Channel Availability Check Time

A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window at the end of CAC time. Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported.

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

Test Procedure

Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. repeat using a long pulse radar type5 waveform.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = $N \times \text{Dwell Time}$

N is the number of spectrum analyzer bins showing a device transmission Dwell Time is the dwell time per bin (i.e. $\text{Dwell Time} = S/B$, S is the sweep time and B is the number of bin, i.e. 8192)

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

NON-OCCUPANCY PERIOD

Test Procedure

Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this channel. Provide one plot to demonstrate no transmission on the channel for the non-occupancy period (30 minutes observation time)

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

DETECTION BANDWIDTH

Test Procedure

Performed with Type 0 radar waveforms

Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.

Starting at the center frequency of the UUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance

The *U-NII Detection Bandwidth* is calculated as follows: $U-NII\ Detection\ Bandwidth = F_H - F_L$

The *U-NII Detection Bandwidth* must meet the *U-NII Detection Bandwidth* criterion specified in Table 4. Otherwise, the UUT does not comply with DFS requirements. This is essential to ensure that the UUT is capable of detecting *Radar Waveforms* across the same frequency spectrum that contains the significant energy from the system. In the case that the *U-NII Detection Bandwidth* is greater than or equal to the 99 percent power bandwidth for the measured F_H and F_L , the test can be truncated and the *U-NII Detection Bandwidth* can be reported as the measured F_H and F_L .

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

STATISTICAL PERFORMANCE CHECK

Test Procedure

The steps below define the procedure to determine the minimum percentage of successful detection requirements found in **Tables 5-7** when a radar burst with a level equal to the *DFS Detection Threshold* + 1dB is generated on the *Operating Channel* of the U-NII device (*In-Service Monitoring*).

- a) One frequency will be chosen from the *Operating Channels* of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- b) In case the UUT is a U-NII device operating as a *Client Device* (with or without Radar Detection), a U-NII device operating as a *Master Device* will be used to allow the UUT (Client device) to *Associate* with the *Master Device*. In case the UUT is a *Master Device*, a U-NII device operating as a *Client Device* will be used and it is assumed that the Client will *Associate* with the UUT (Master). In both cases for conducted tests, the *Radar Waveform* generator will be connected to the *Master Device*. For radiated tests, the emissions of the *Radar Waveform* generator will be directed towards the *Master Device*. If the *Master Device* has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) Stream the channel loading test file from the *Master Device* to the Client Device on the test *Channel* for the entire period of the test.
- d) At time T_0 the *Radar Waveform* generator sends the individual waveform for each of the Radar Types 1-6 in **Tables 5-7**, at levels defined in **Table 3**, on the *Operating Channel*. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.
- e) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 10 seconds for Radar Type 0 to ensure detection occurs.
- f) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
- g) In case the UUT is a U-NII device operating as a *Client Device* with *In-Service Monitoring*, perform steps a) to f).

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

CHANNEL LOADING

Test Procedure

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

- a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
- b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
- c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time). This can be done with any appropriate channel BW and modulation type.
- d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

BRIDGE AND/OR MESH MODE

Test Procedure

Networks Access Points with Bridge and/or MESH modes of operation are permitted to operate in the DFS bands but must employ a DFS function. The functionality of the Bridge mode as specified in ?15.403(a) must be validated in the DFS test report. Devices operating as relays where they act as master and client must also employ DFS function for the master. The method used to validate the functionality must be documented and validation data must be documented. Bridge mode can be validated by performing a test statistical performance check (Section 7.8.4) on any one of the radar types. This is an abbreviated test to verify DFS functionality. MESH mode operational methodology must be submitted in the application for certification for evaluation by the FCC.

Test Data

Environmental Conditions

Temperature:	25~28℃
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Lee Li on 2024-12-13~2024-12-21.

EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment 2401Y27848E-RF External photo and 2401Y27848E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Y27848E-RFB Test Setup photo.

APPENDIX


Appendix A: DFS Detection Thresholds


Test Result


Test Mode	Frequency[MHz]	Radar Type	Result[dBm]	Limit[dBm]	Verdict
20M	5260	Type0	-64.16	-64.00	PASS
		Type1	-64.17	-64.00	PASS
		Type2	-64.31	-64.00	PASS
		Type3	-64.40	-64.00	PASS
		Type4	-64.35	-64.00	PASS
		Type5	-64.35	-64.00	PASS
		Type6	-64.23	-64.00	PASS
	5500	Type0	-64.07	-64.00	PASS
		Type1	-64.38	-64.00	PASS
		Type2	-64.10	-64.00	PASS
		Type3	-64.24	-64.00	PASS
		Type4	-64.36	-64.00	PASS
		Type5	-64.29	-64.00	PASS
		Type6	-64.30	-64.00	PASS
40M	5270	Type0	-64.15	-64.00	PASS
		Type1	-64.14	-64.00	PASS
		Type2	-64.04	-64.00	PASS
		Type3	-64.08	-64.00	PASS
		Type4	-64.47	-64.00	PASS
		Type5	-64.16	-64.00	PASS
		Type6	-64.33	-64.00	PASS
	5510	Type0	-64.18	-64.00	PASS
		Type1	-64.36	-64.00	PASS
		Type2	-64.13	-64.00	PASS
		Type3	-64.43	-64.00	PASS
		Type4	-64.28	-64.00	PASS
		Type5	-64.45	-64.00	PASS
		Type6	-64.17	-64.00	PASS
80M	5290	Type0	-64.22	-64.00	PASS
		Type1	-64.30	-64.00	PASS
		Type2	-64.41	-64.00	PASS
		Type3	-64.18	-64.00	PASS
		Type4	-64.01	-64.00	PASS
		Type5	-64.29	-64.00	PASS
		Type6	-64.07	-64.00	PASS
	5530	Type0	-64.23	-64.00	PASS
		Type1	-64.01	-64.00	PASS
		Type2	-64.39	-64.00	PASS
		Type3	-64.04	-64.00	PASS
		Type4	-64.17	-64.00	PASS
		Type5	-64.38	-64.00	PASS
		Type6	-64.20	-64.00	PASS


Test Mode	Frequency[MHz]	Radar Type	Result[dBm]	Limit[dBm]	Verdict
160M	5250	Type0	-64.20	-64.00	PASS
		Type1	-64.12	-64.00	PASS
		Type2	-64.10	-64.00	PASS
		Type3	-64.05	-64.00	PASS
		Type4	-64.45	-64.00	PASS
		Type5	-64.48	-64.00	PASS
		Type6	-64.22	-64.00	PASS
	5570	Type0	-64.45	-64.00	PASS
		Type1	-64.31	-64.00	PASS
		Type2	-64.10	-64.00	PASS
		Type3	-64.12	-64.00	PASS
		Type4	-64.35	-64.00	PASS
		Type5	-64.17	-64.00	PASS
		Type6	-64.42	-64.00	PASS


Test Graphs

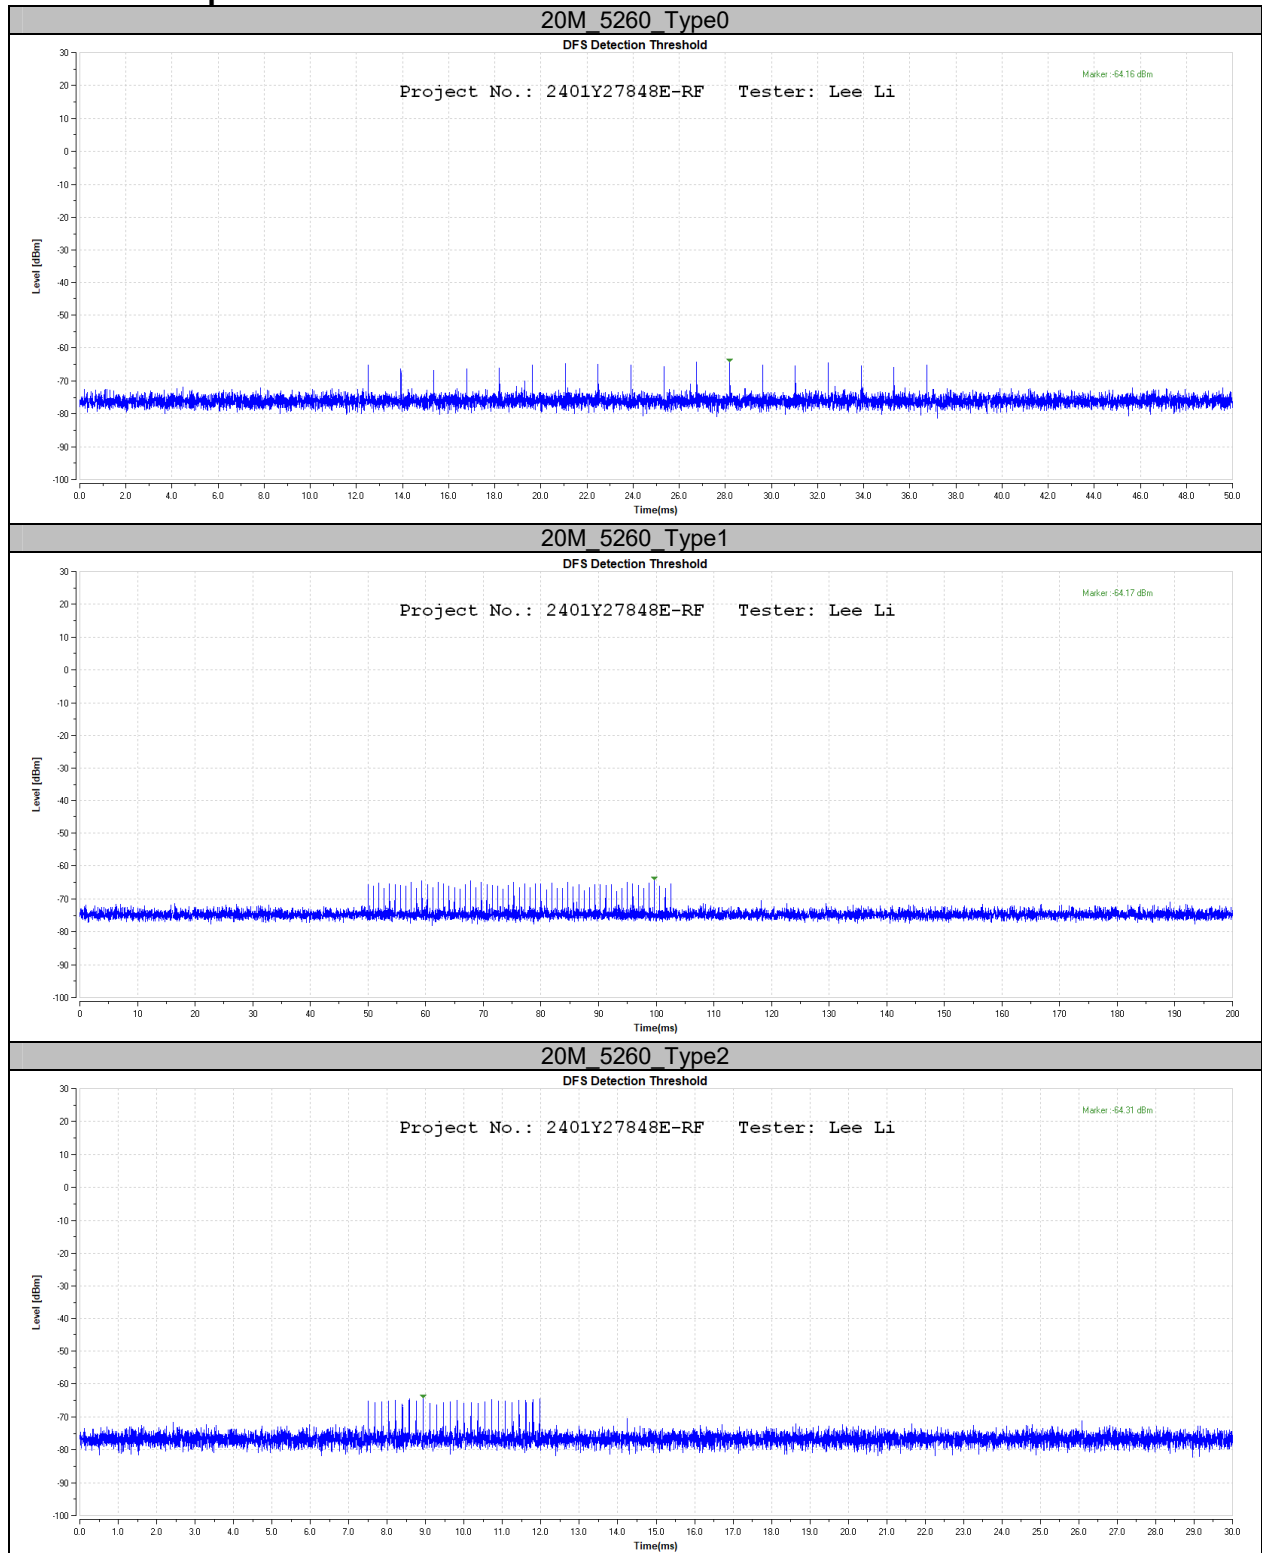


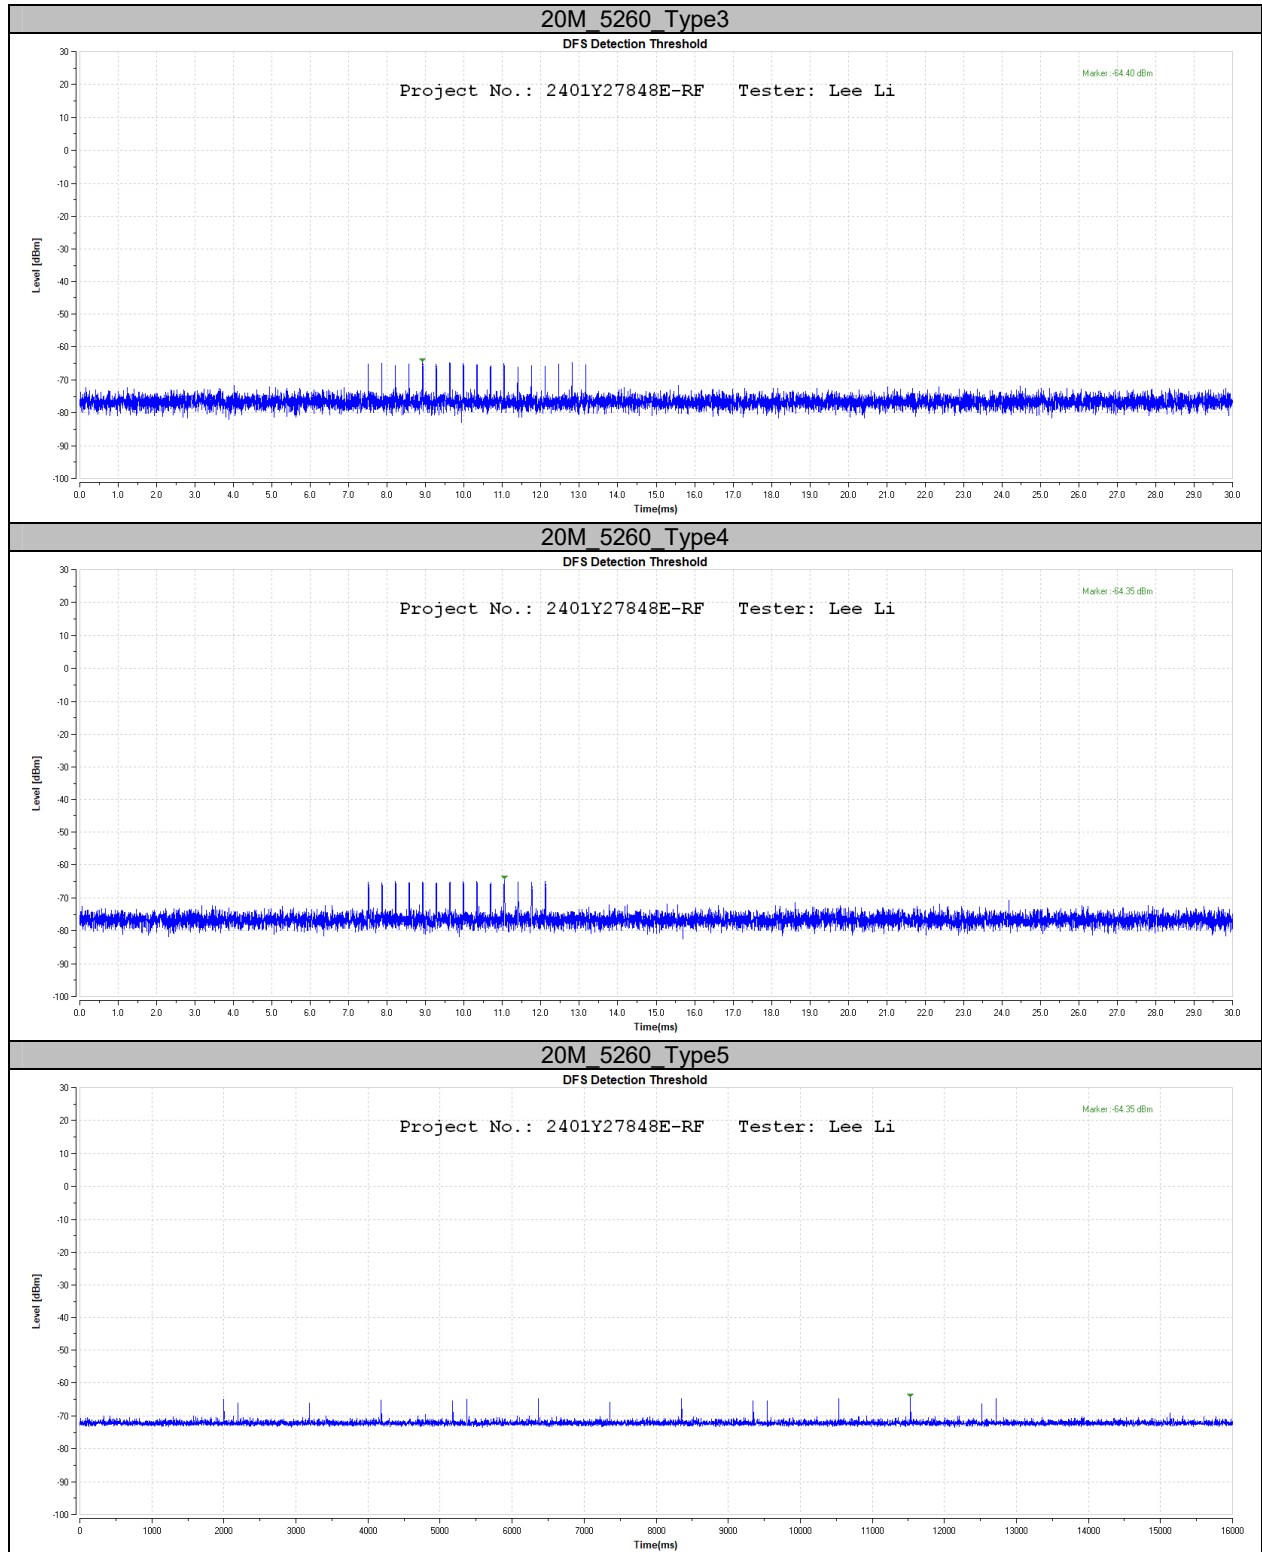


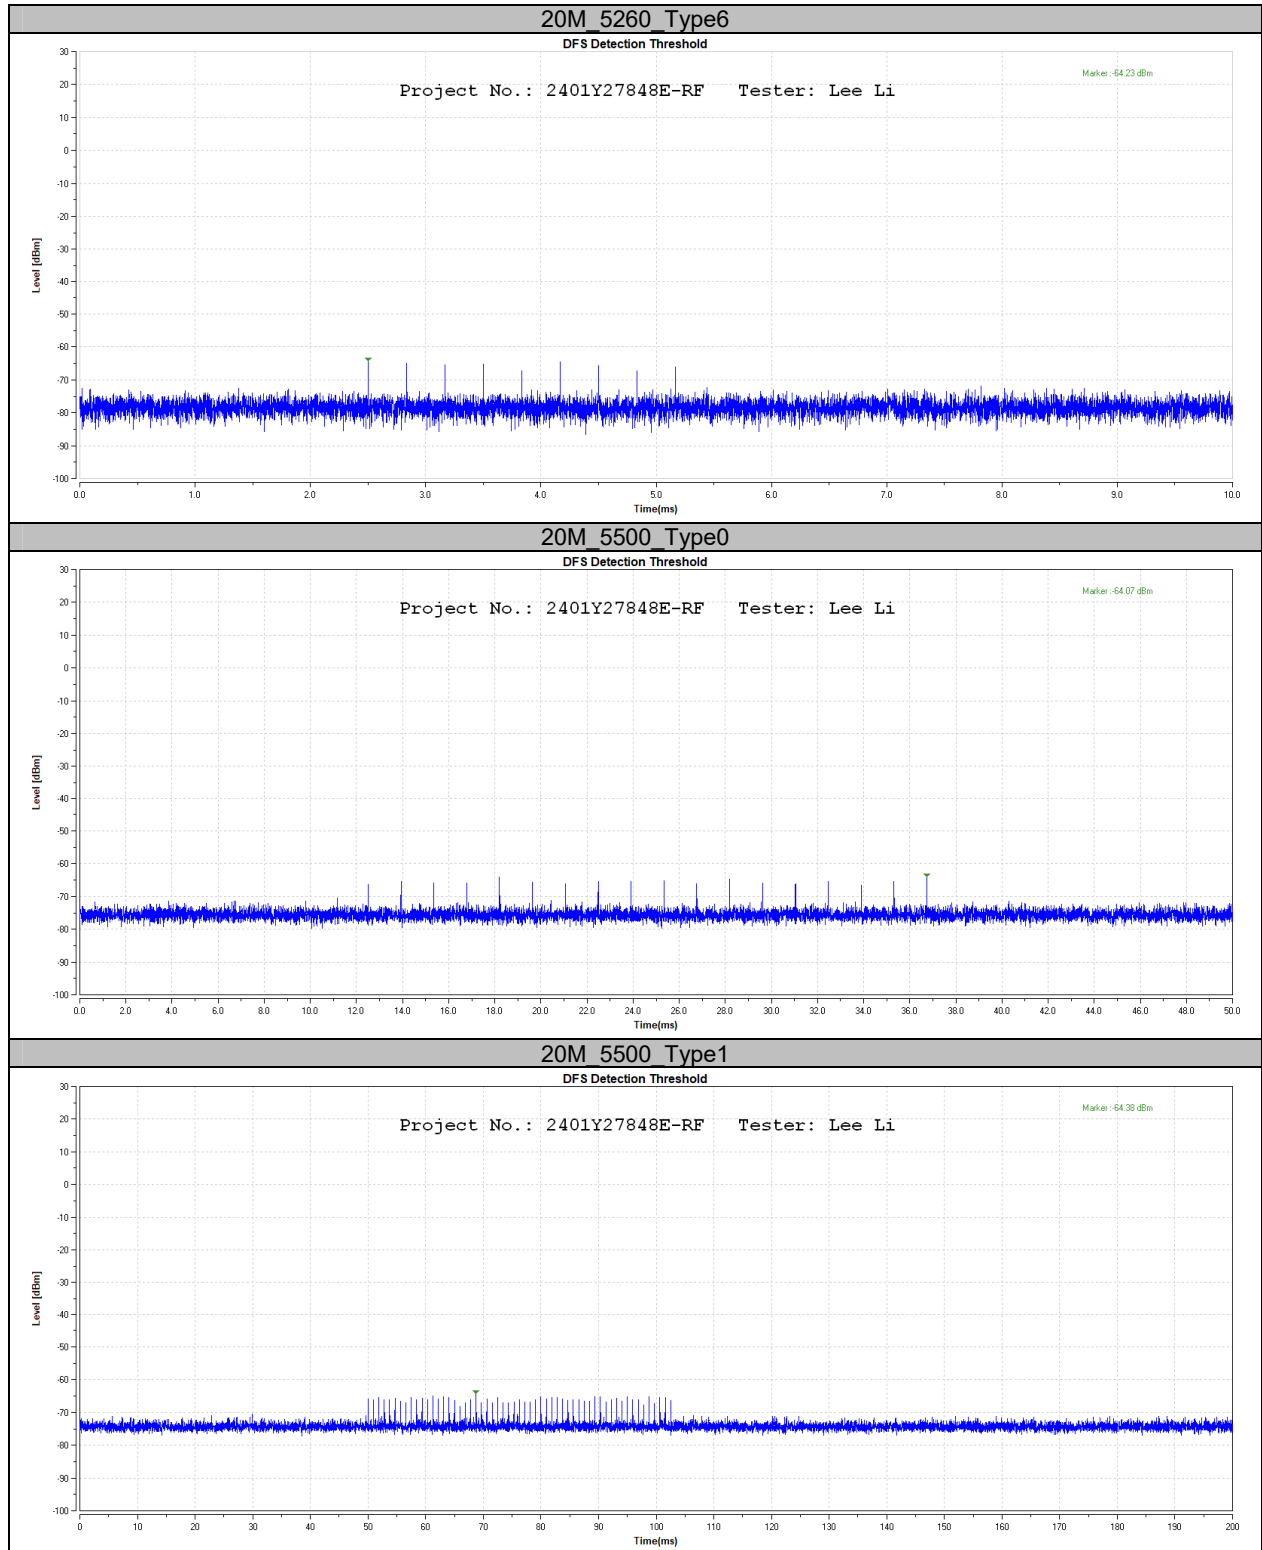


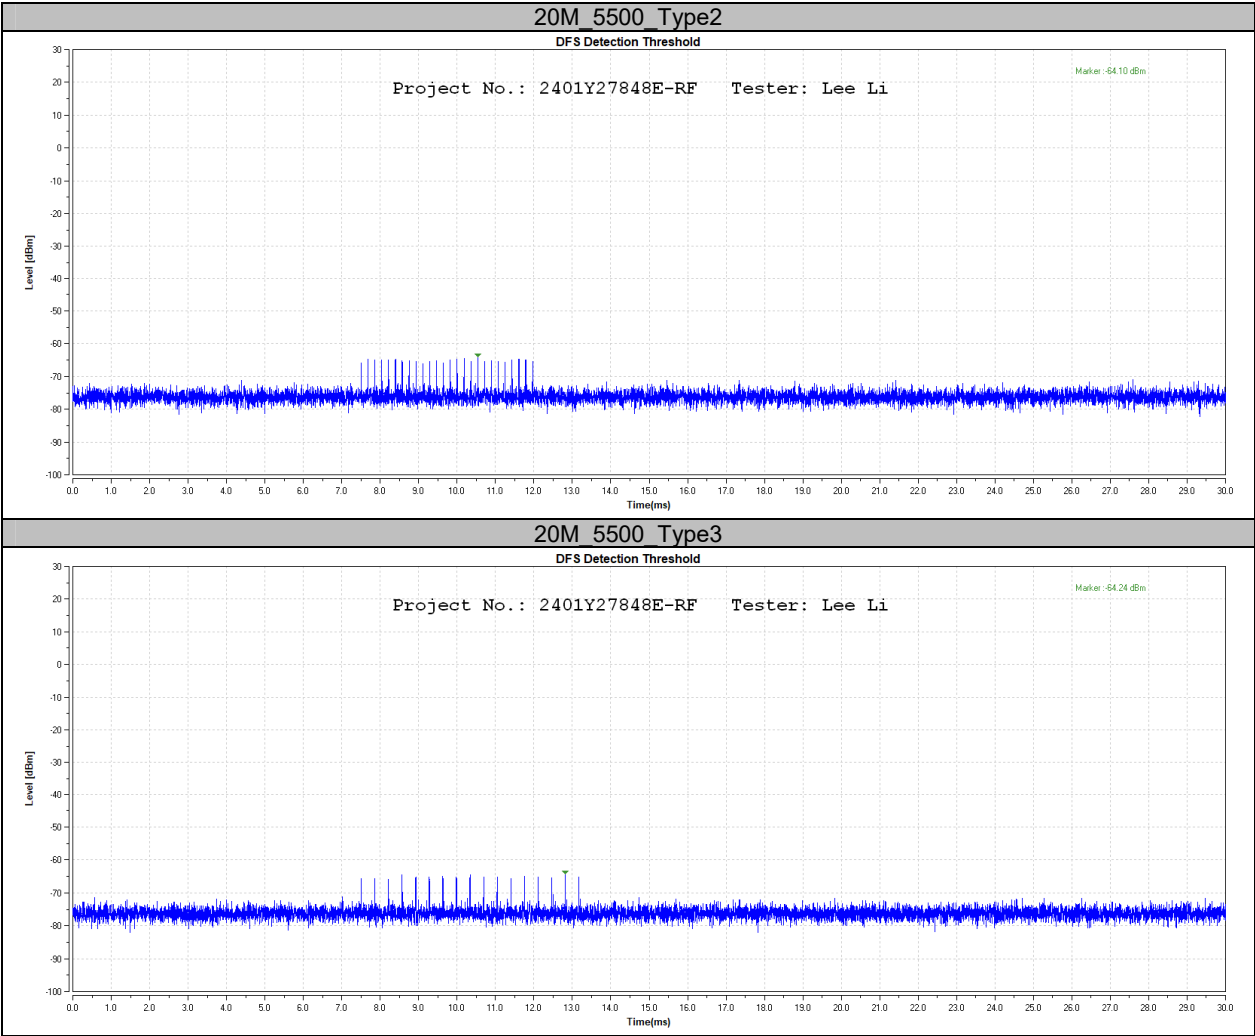


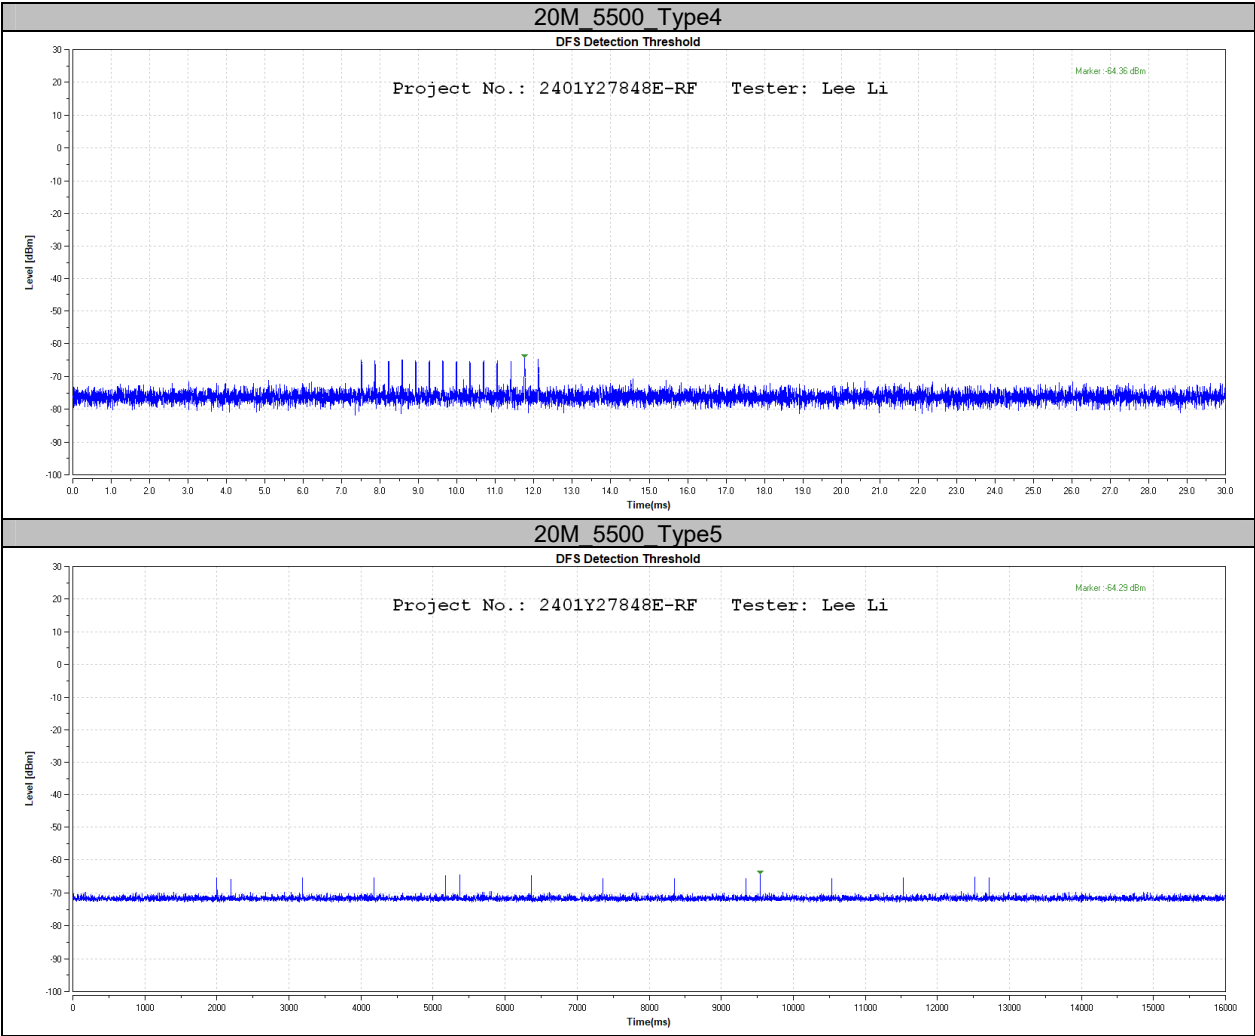


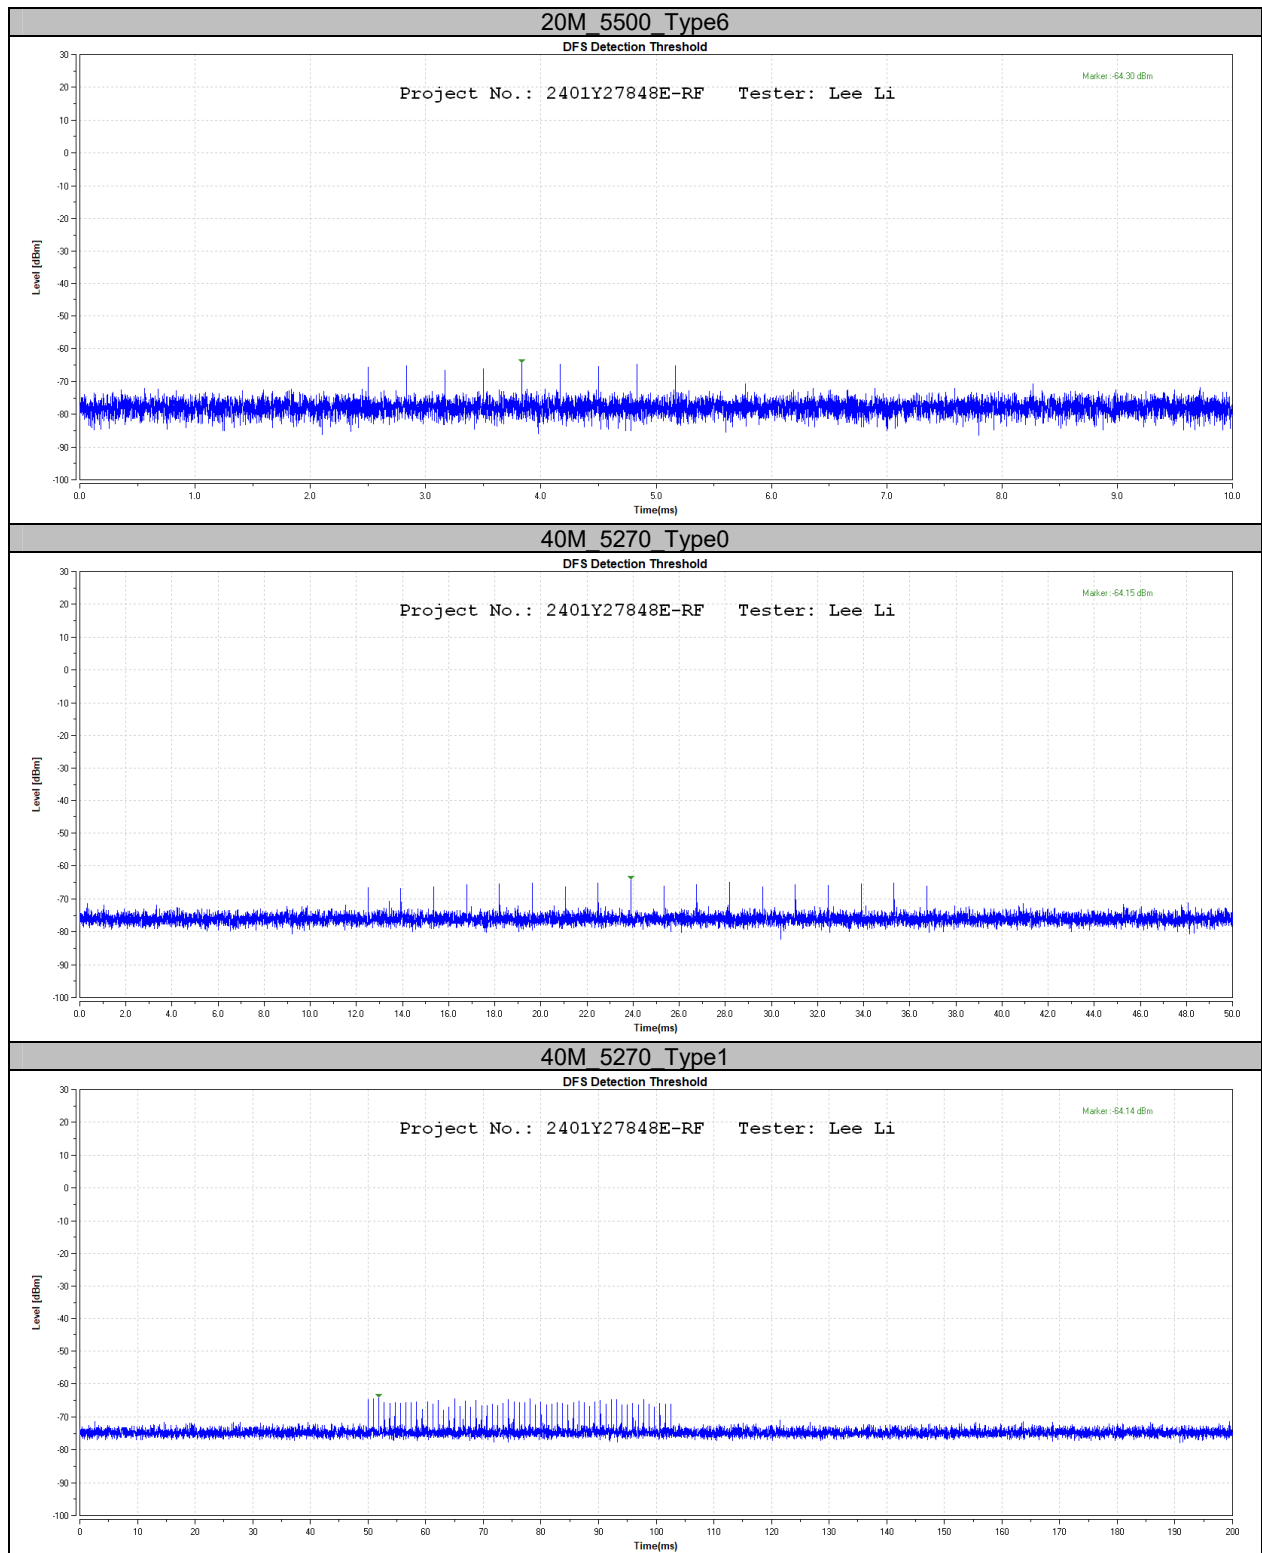


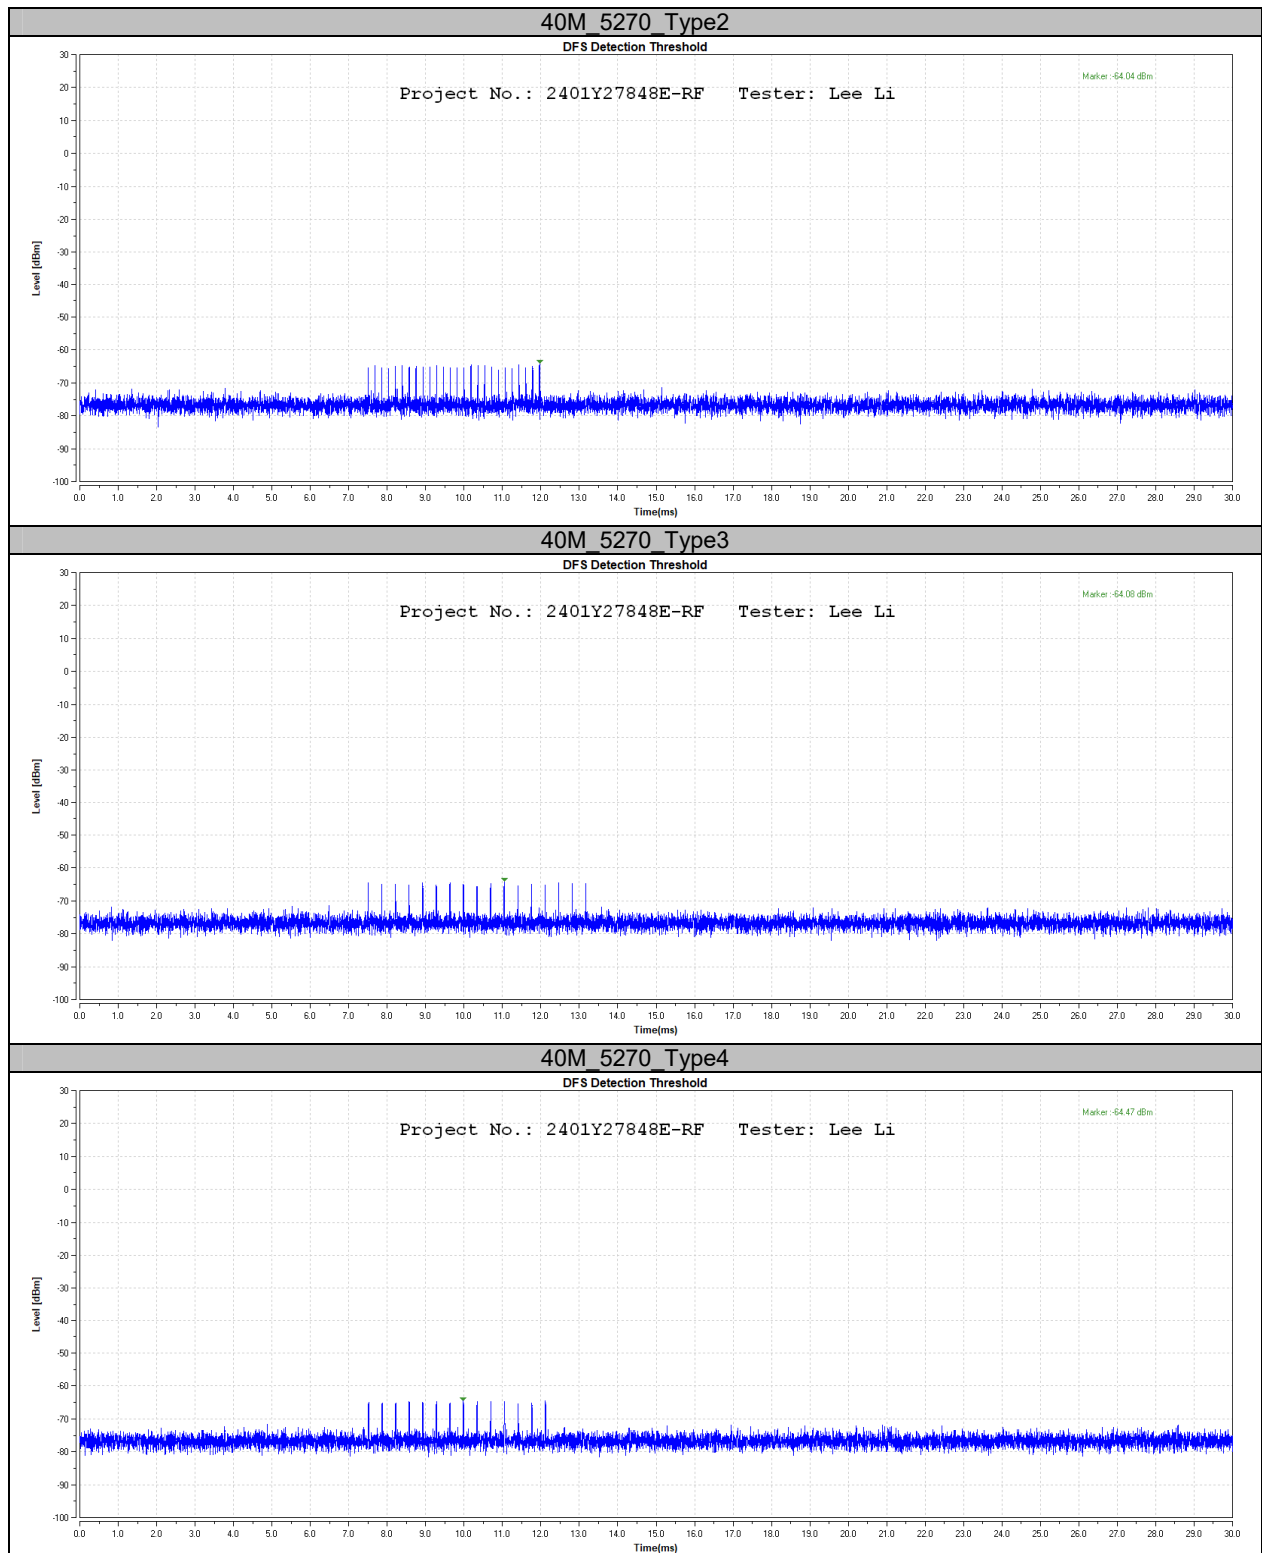


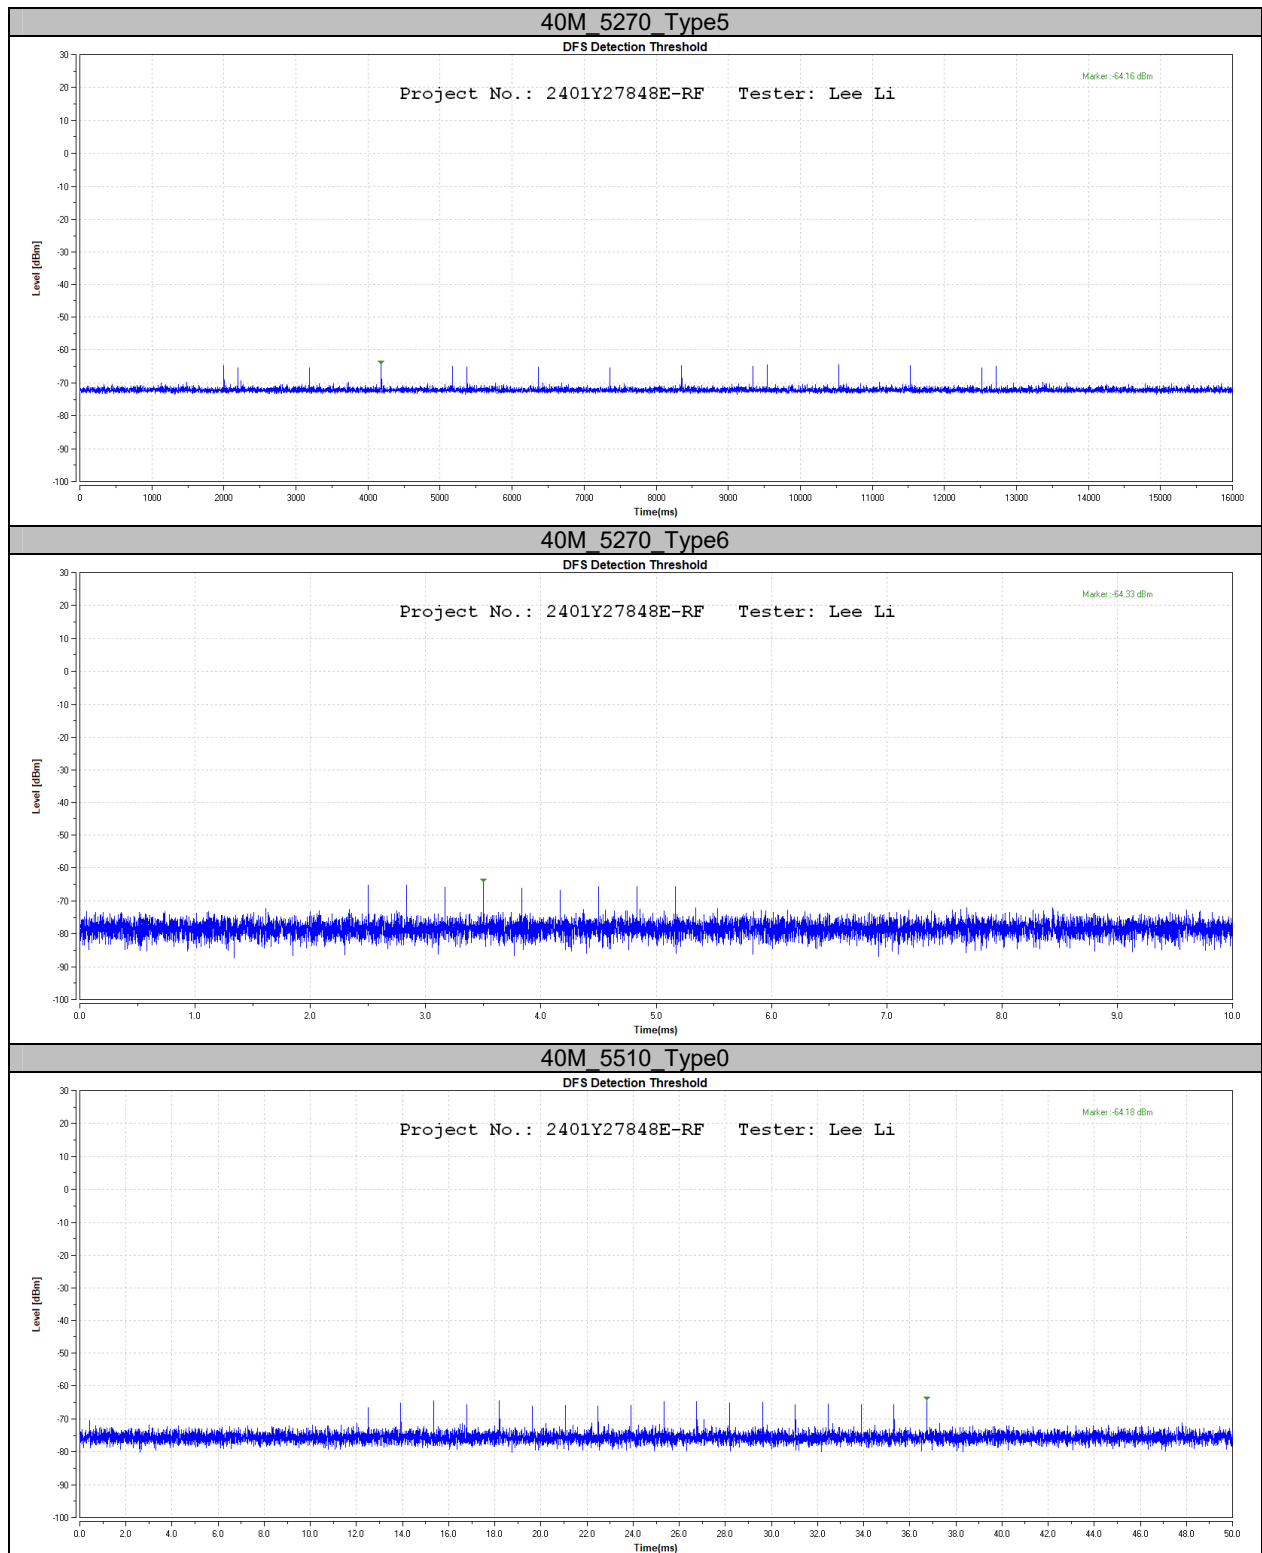


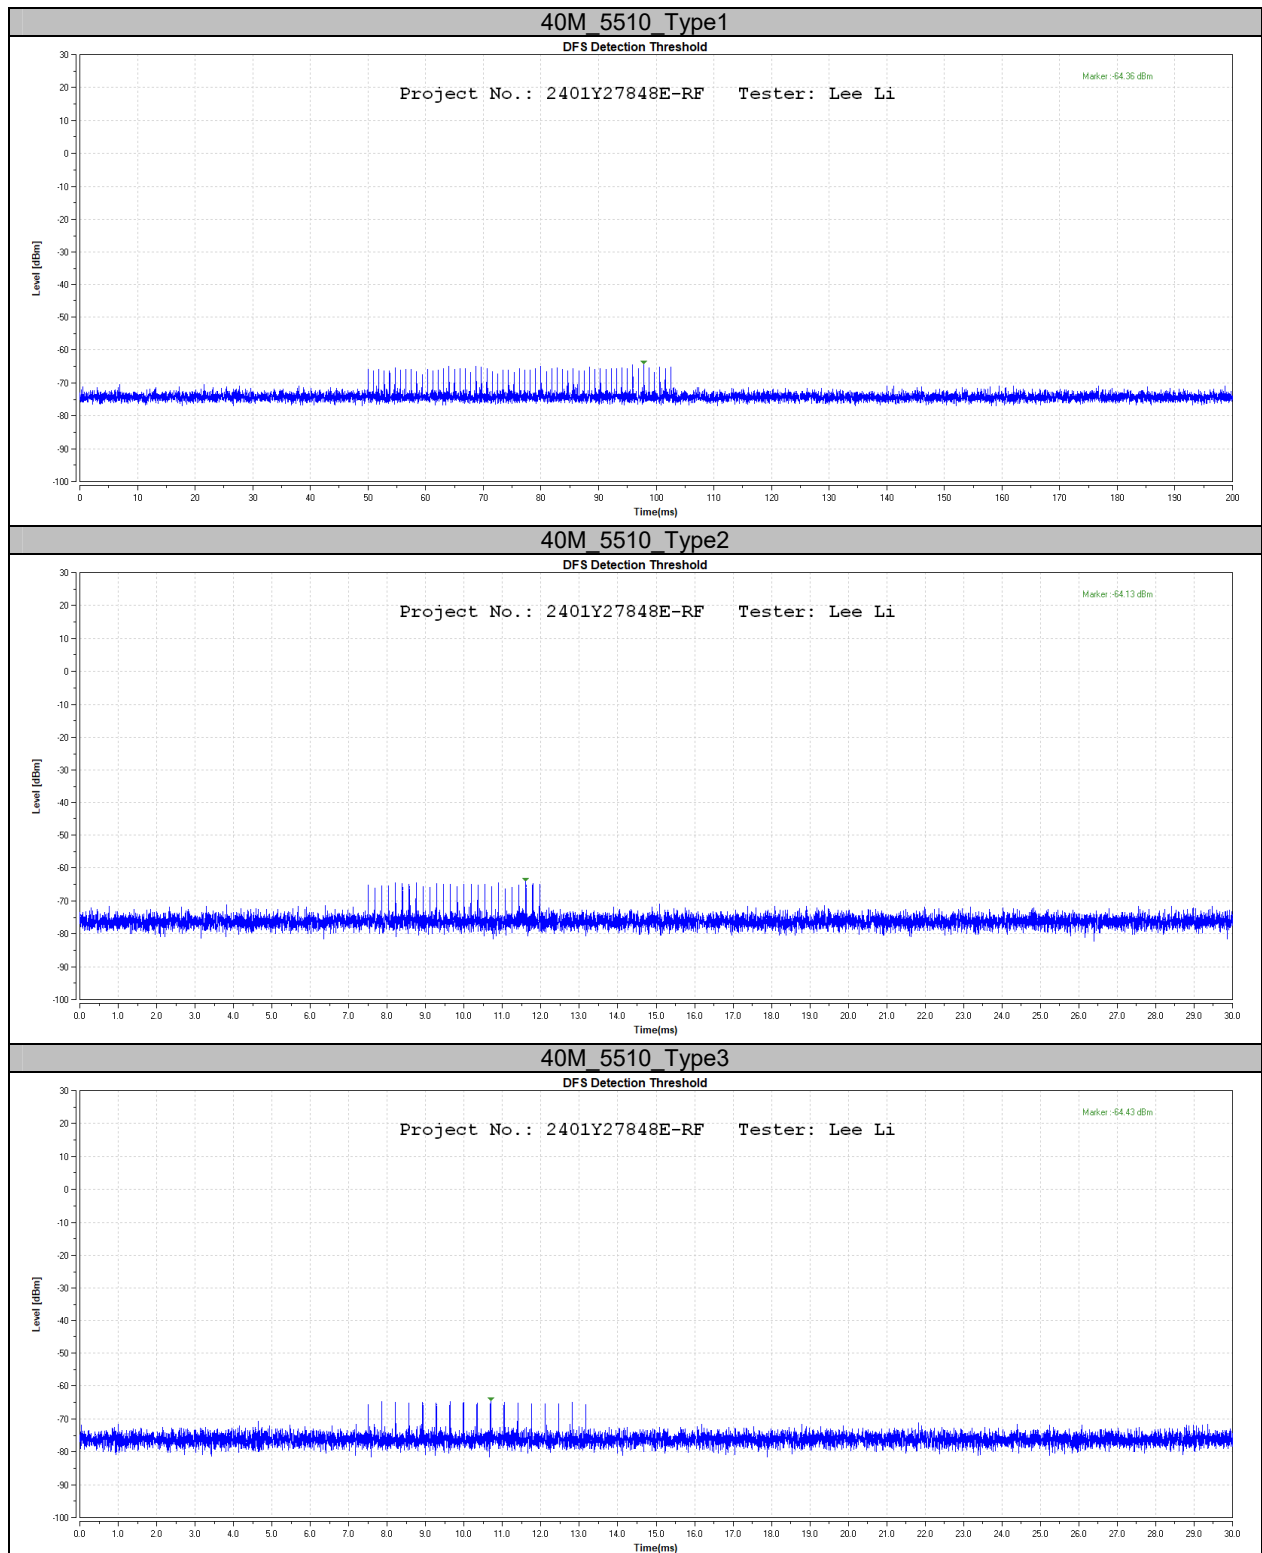


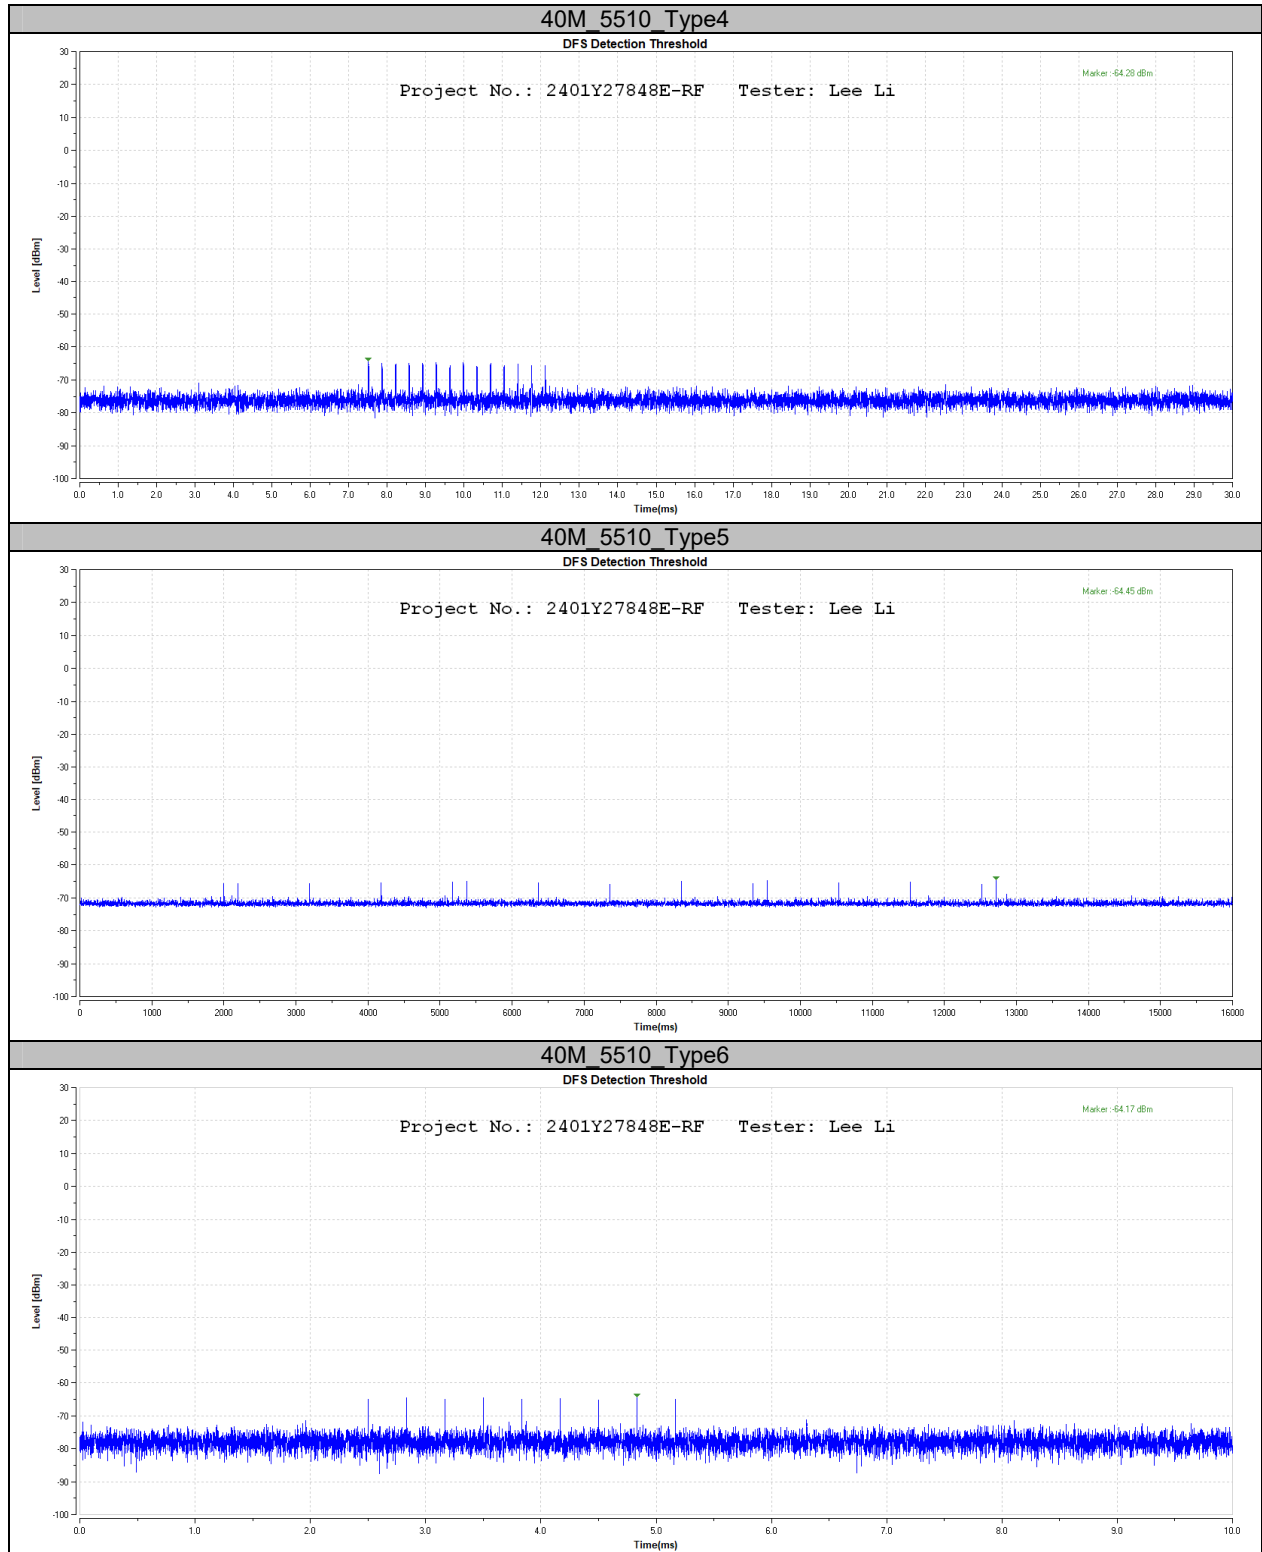


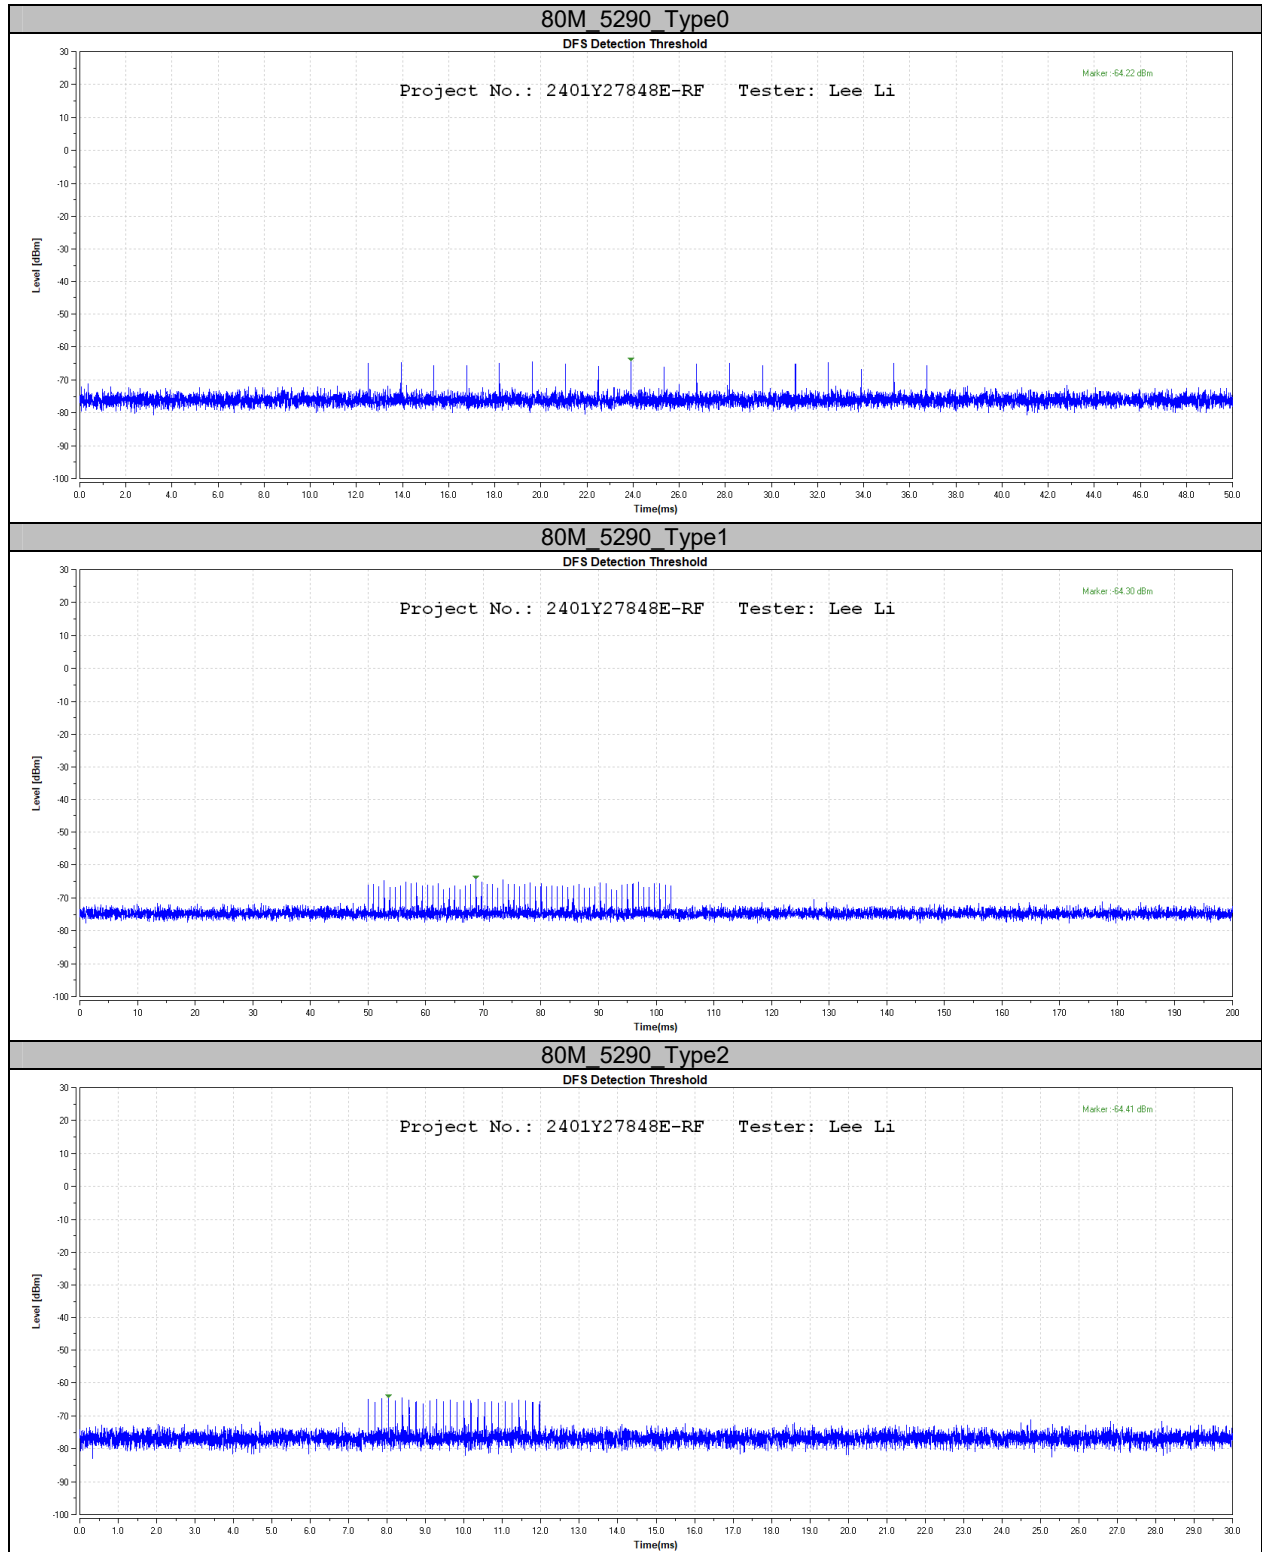


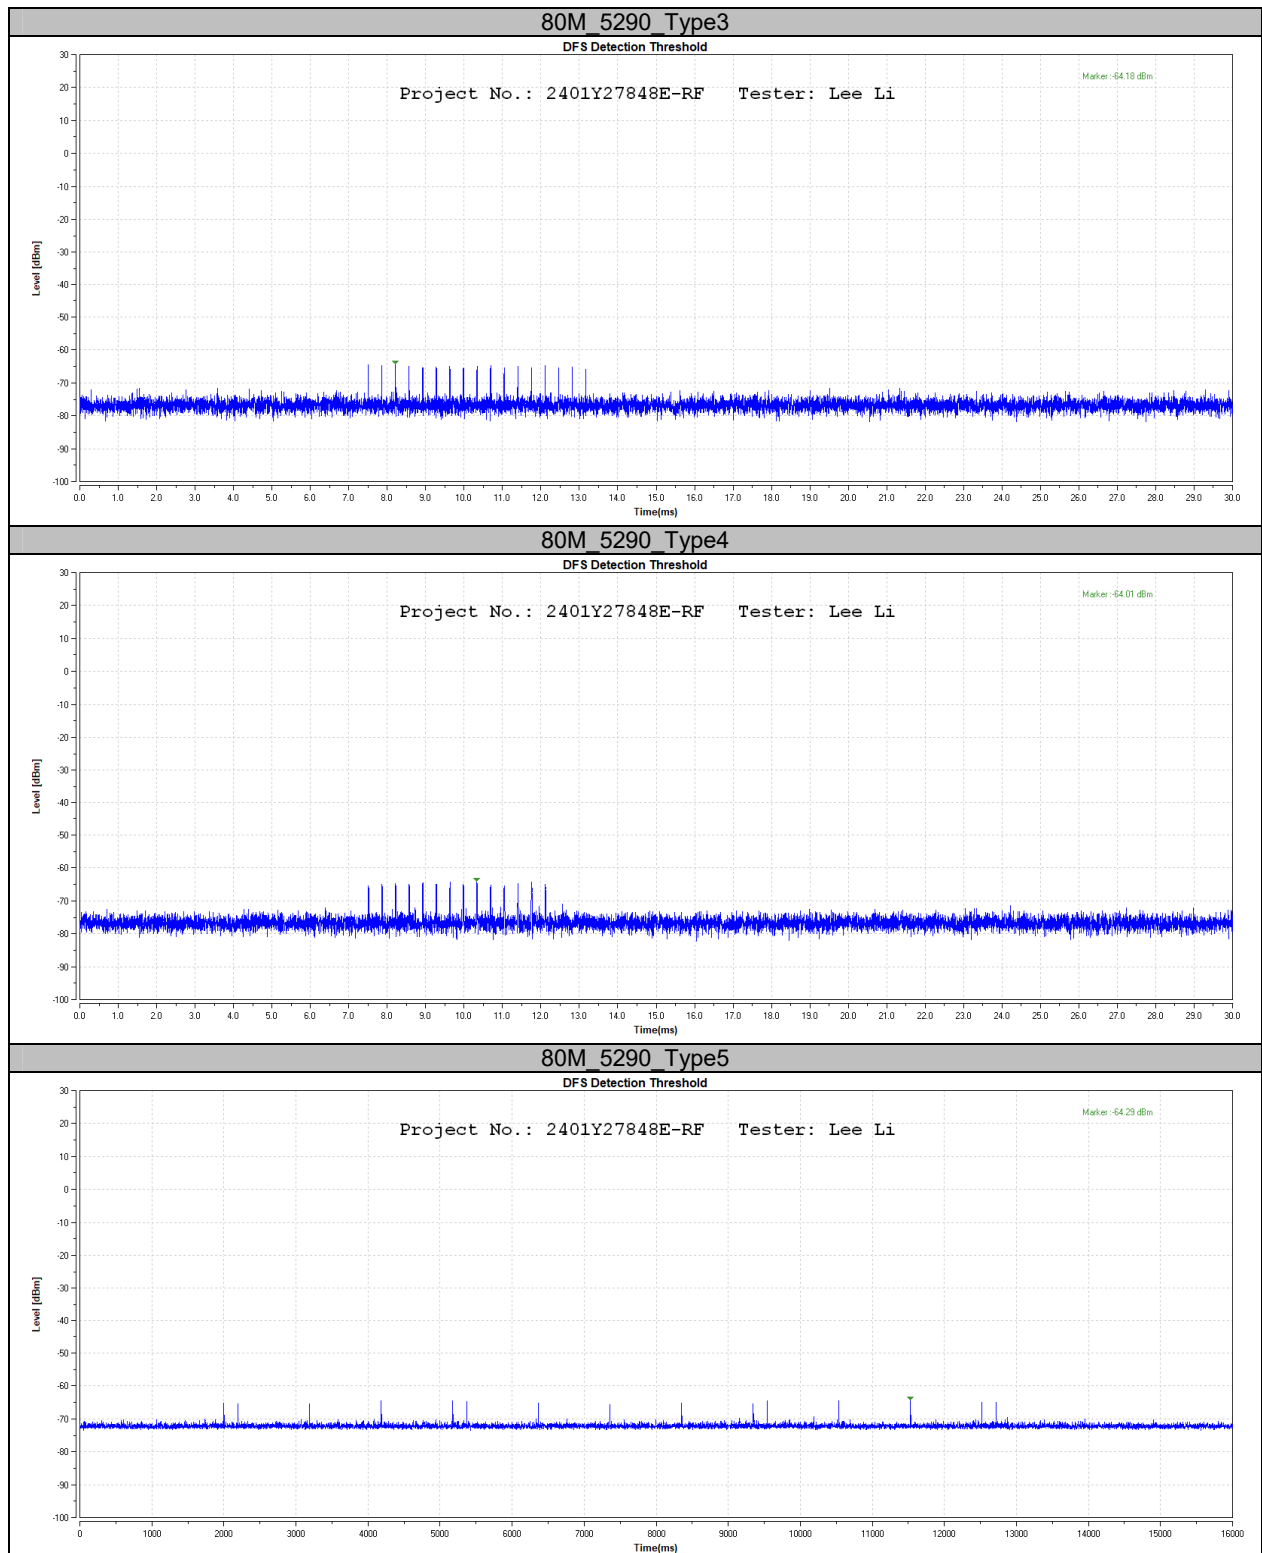


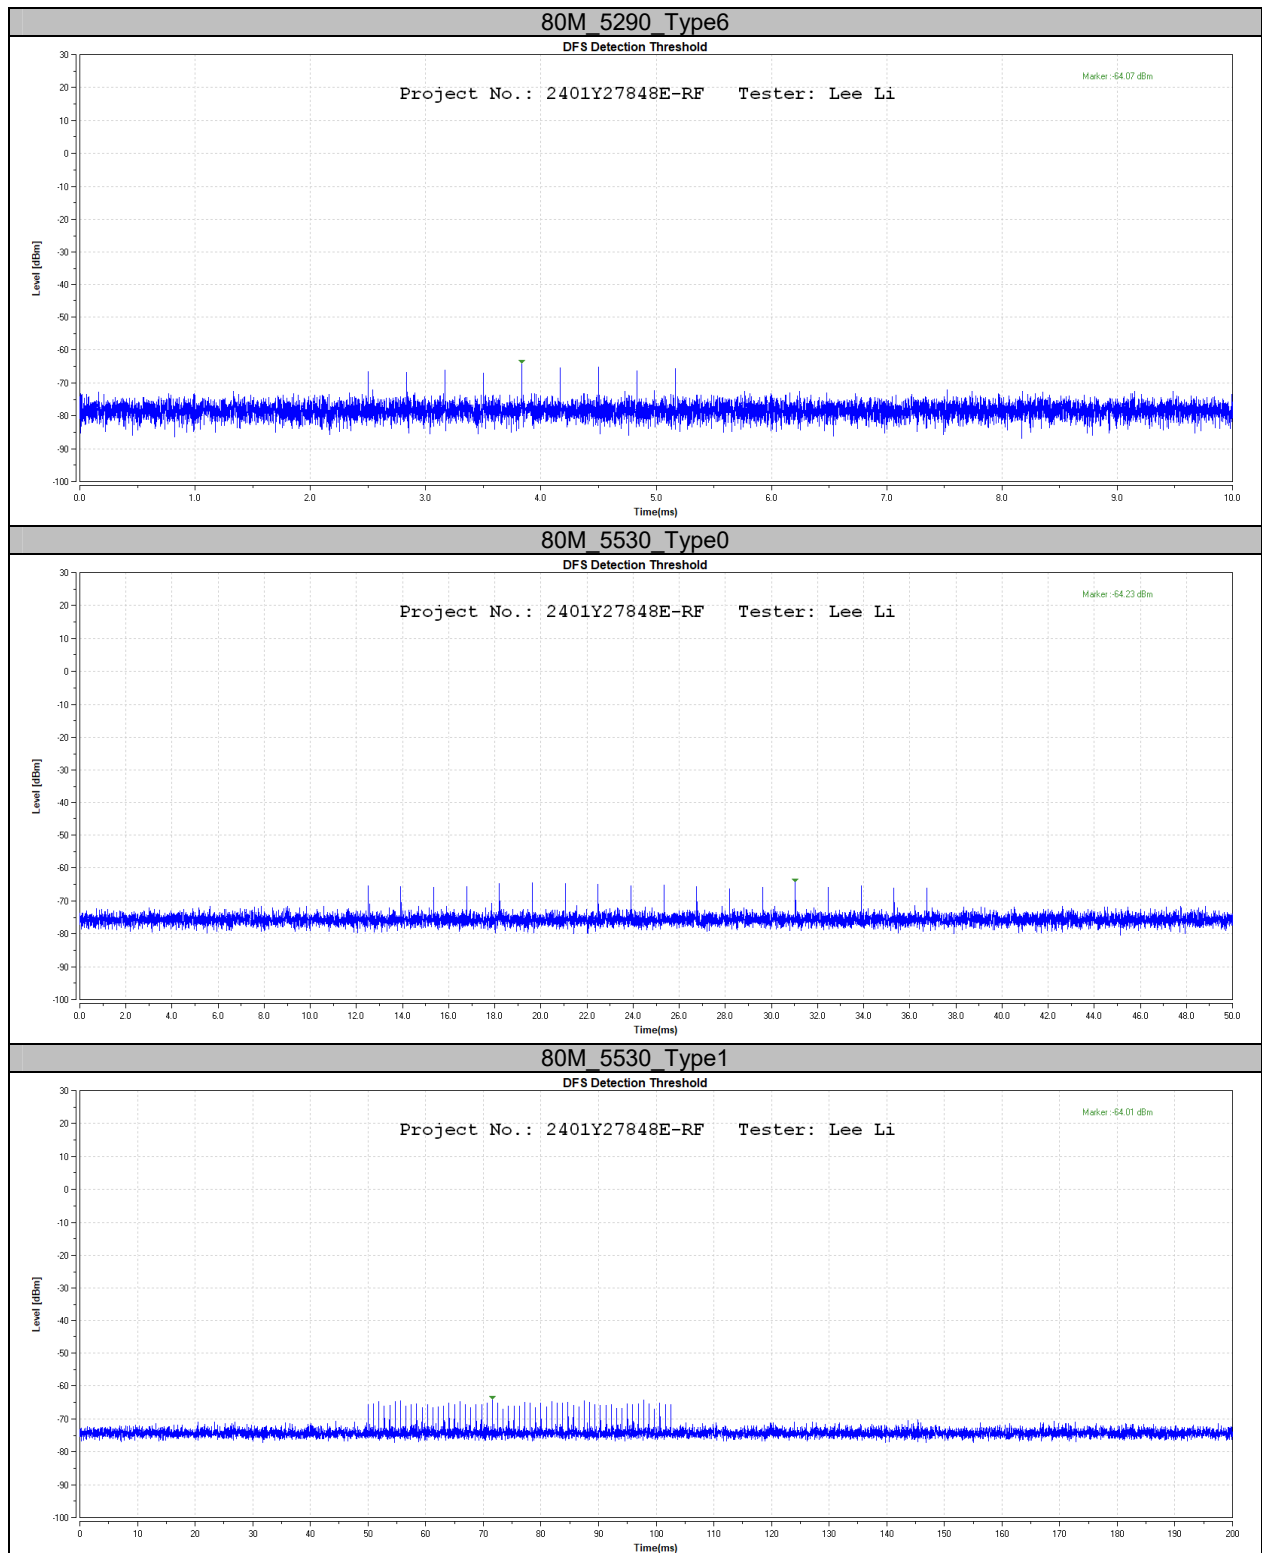


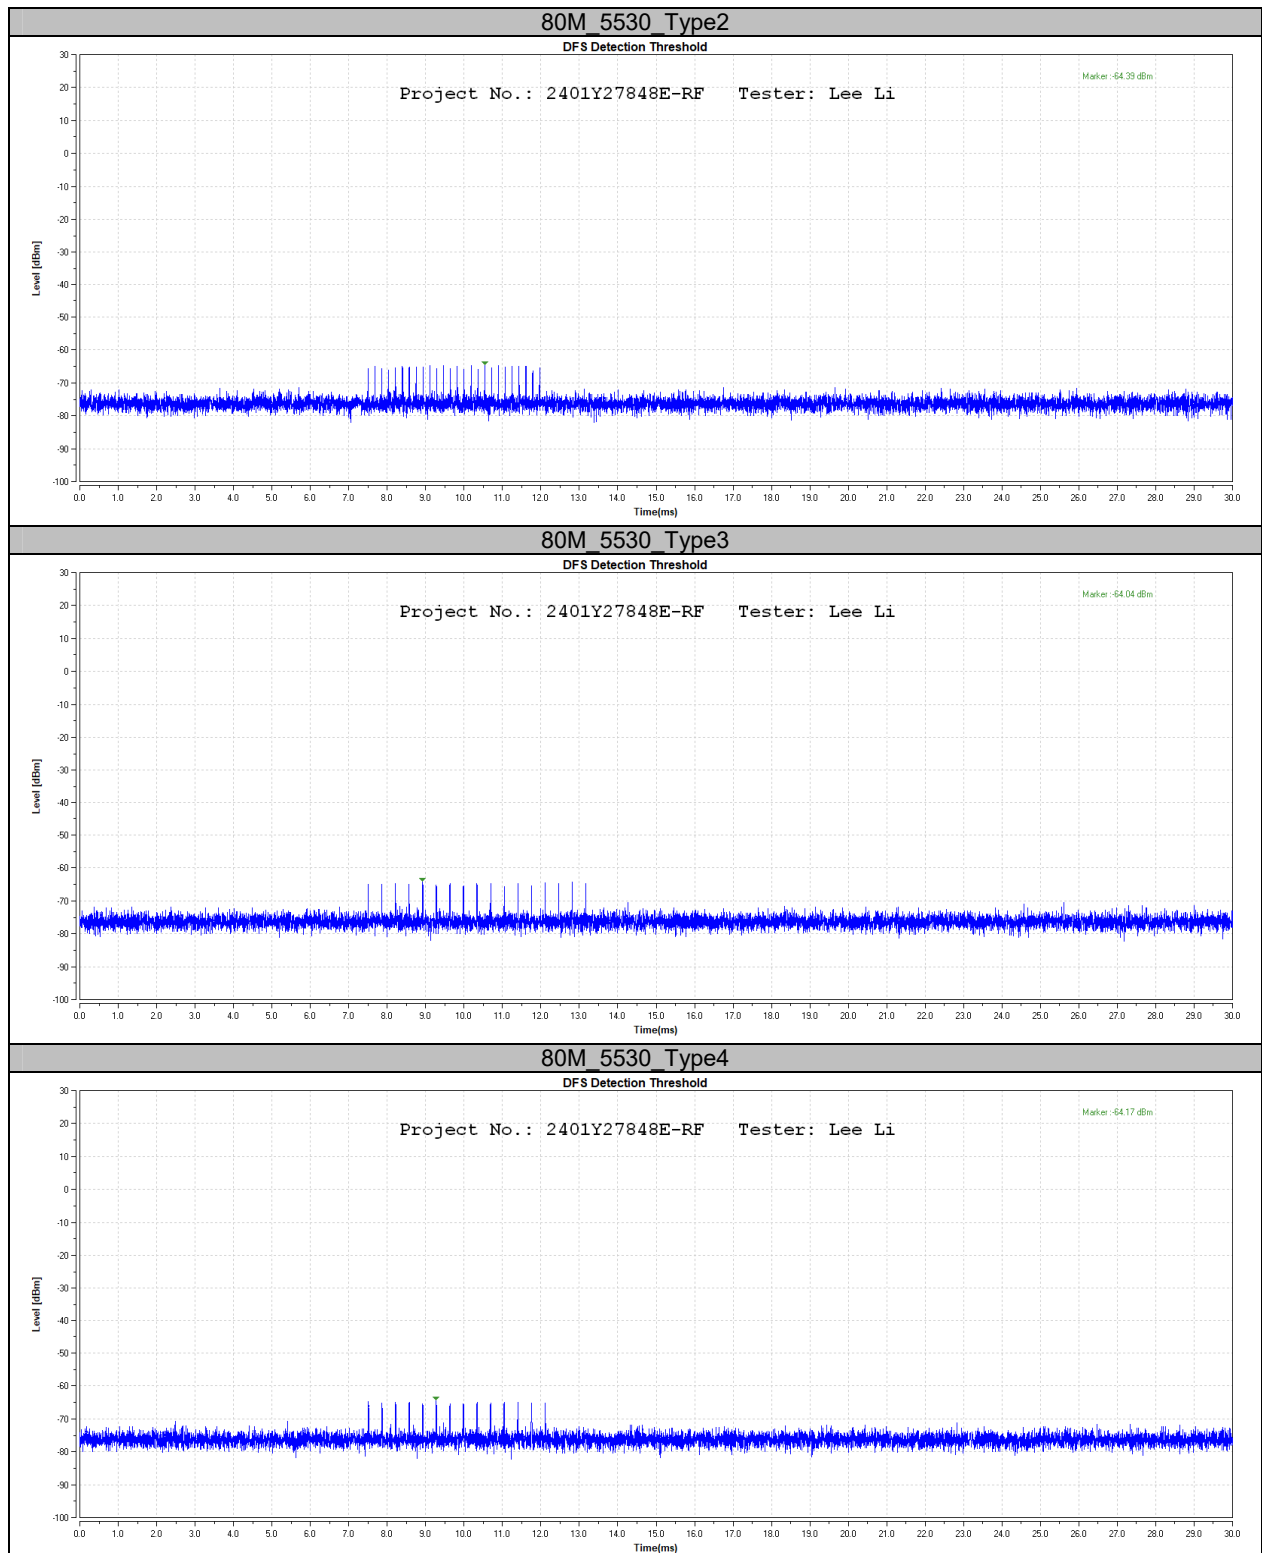


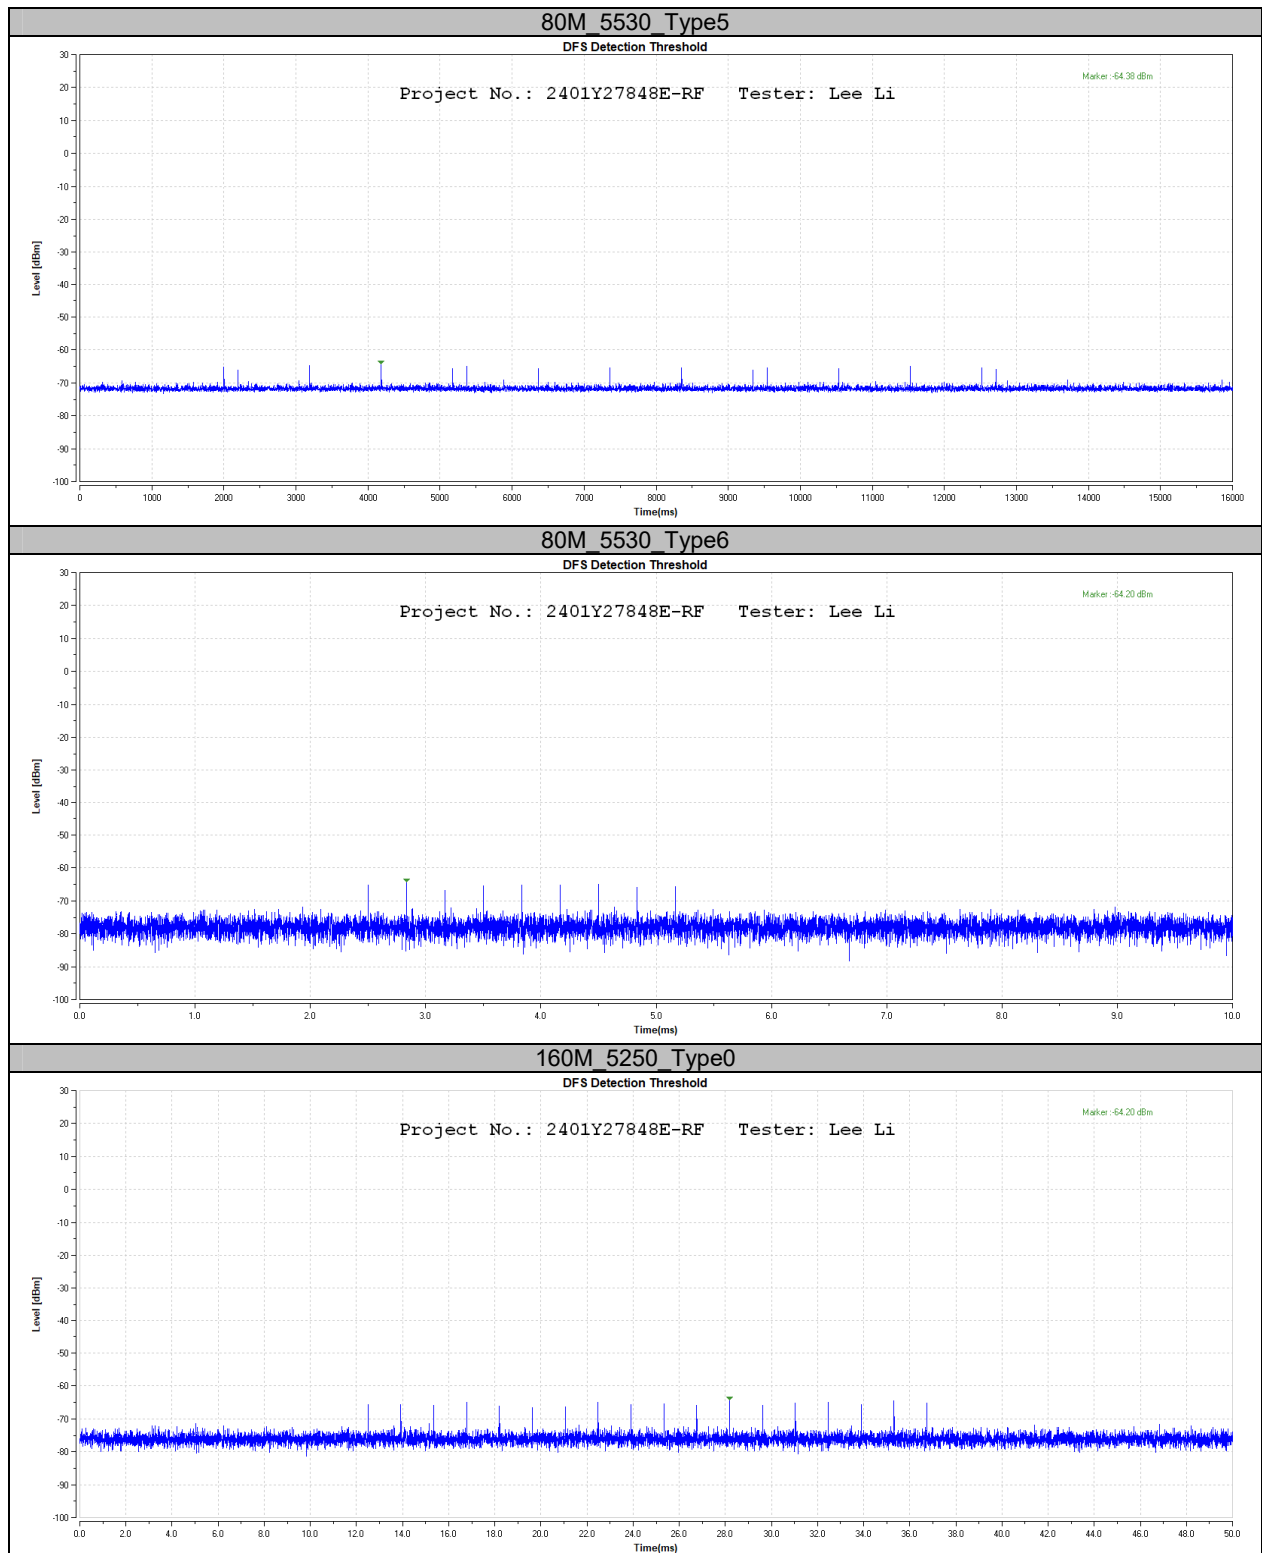


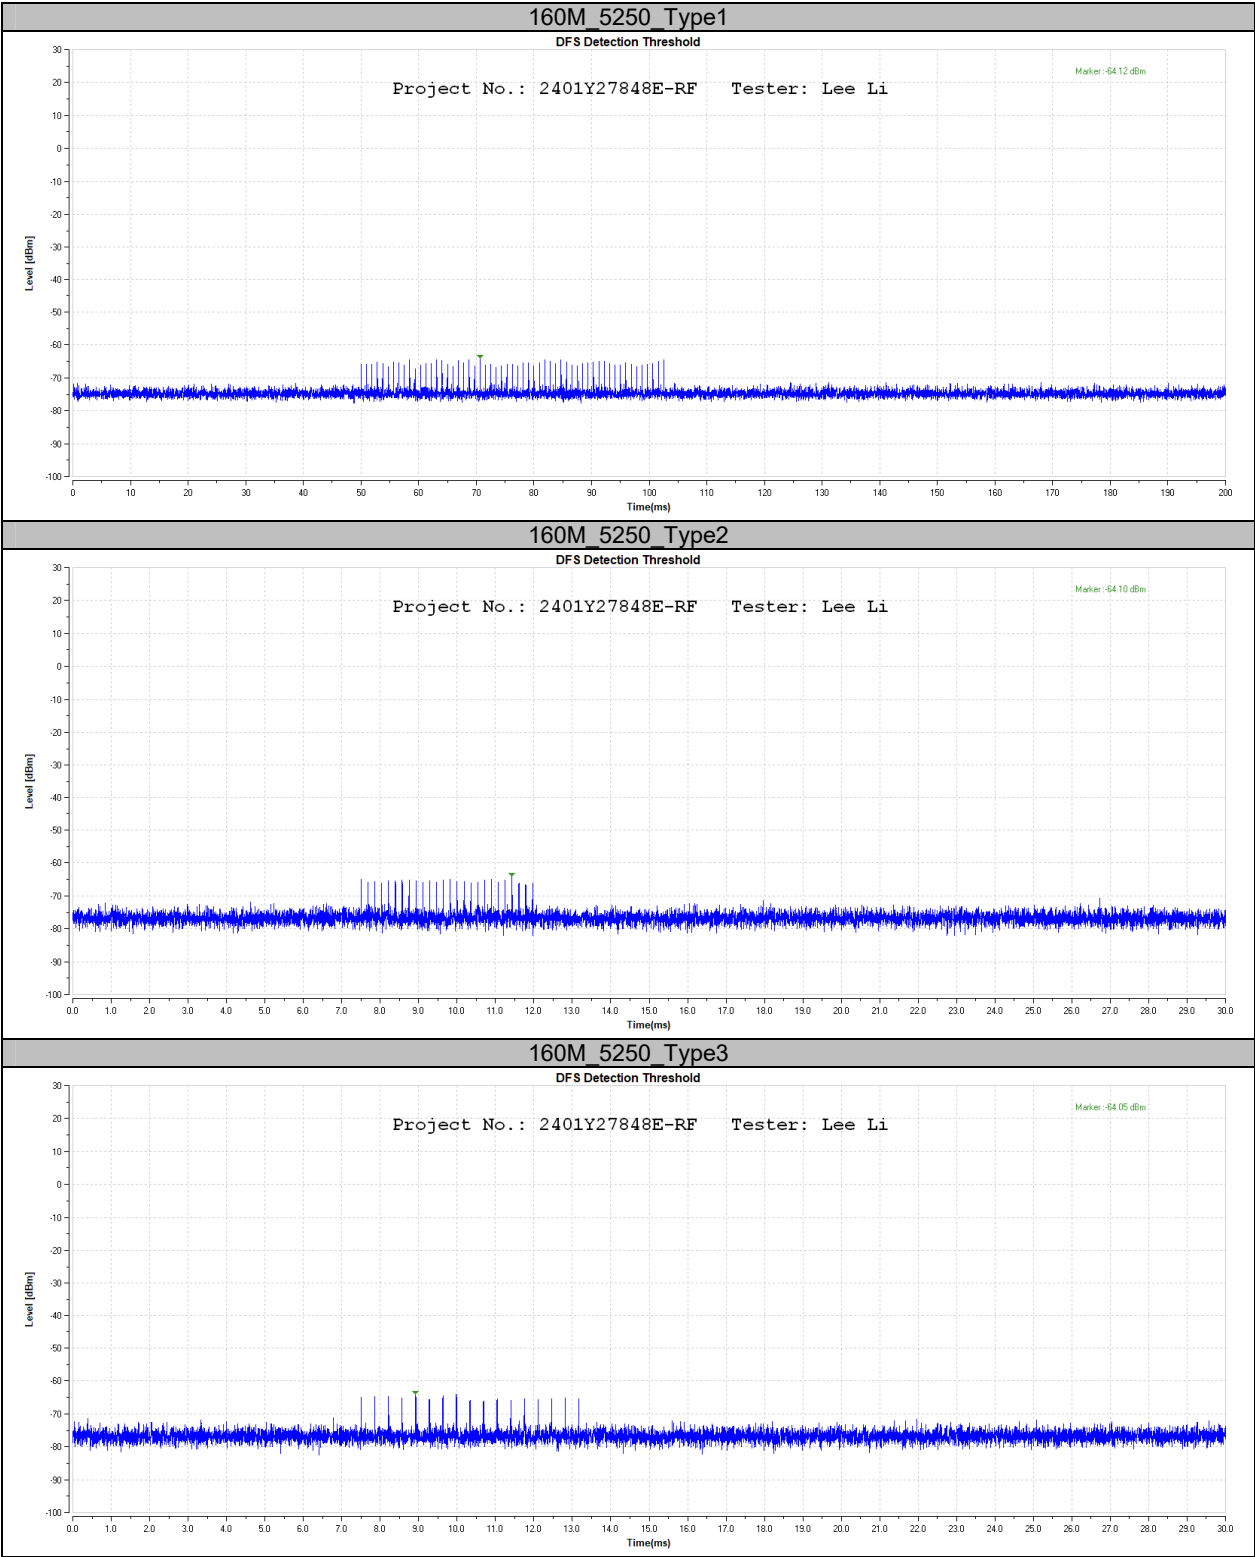


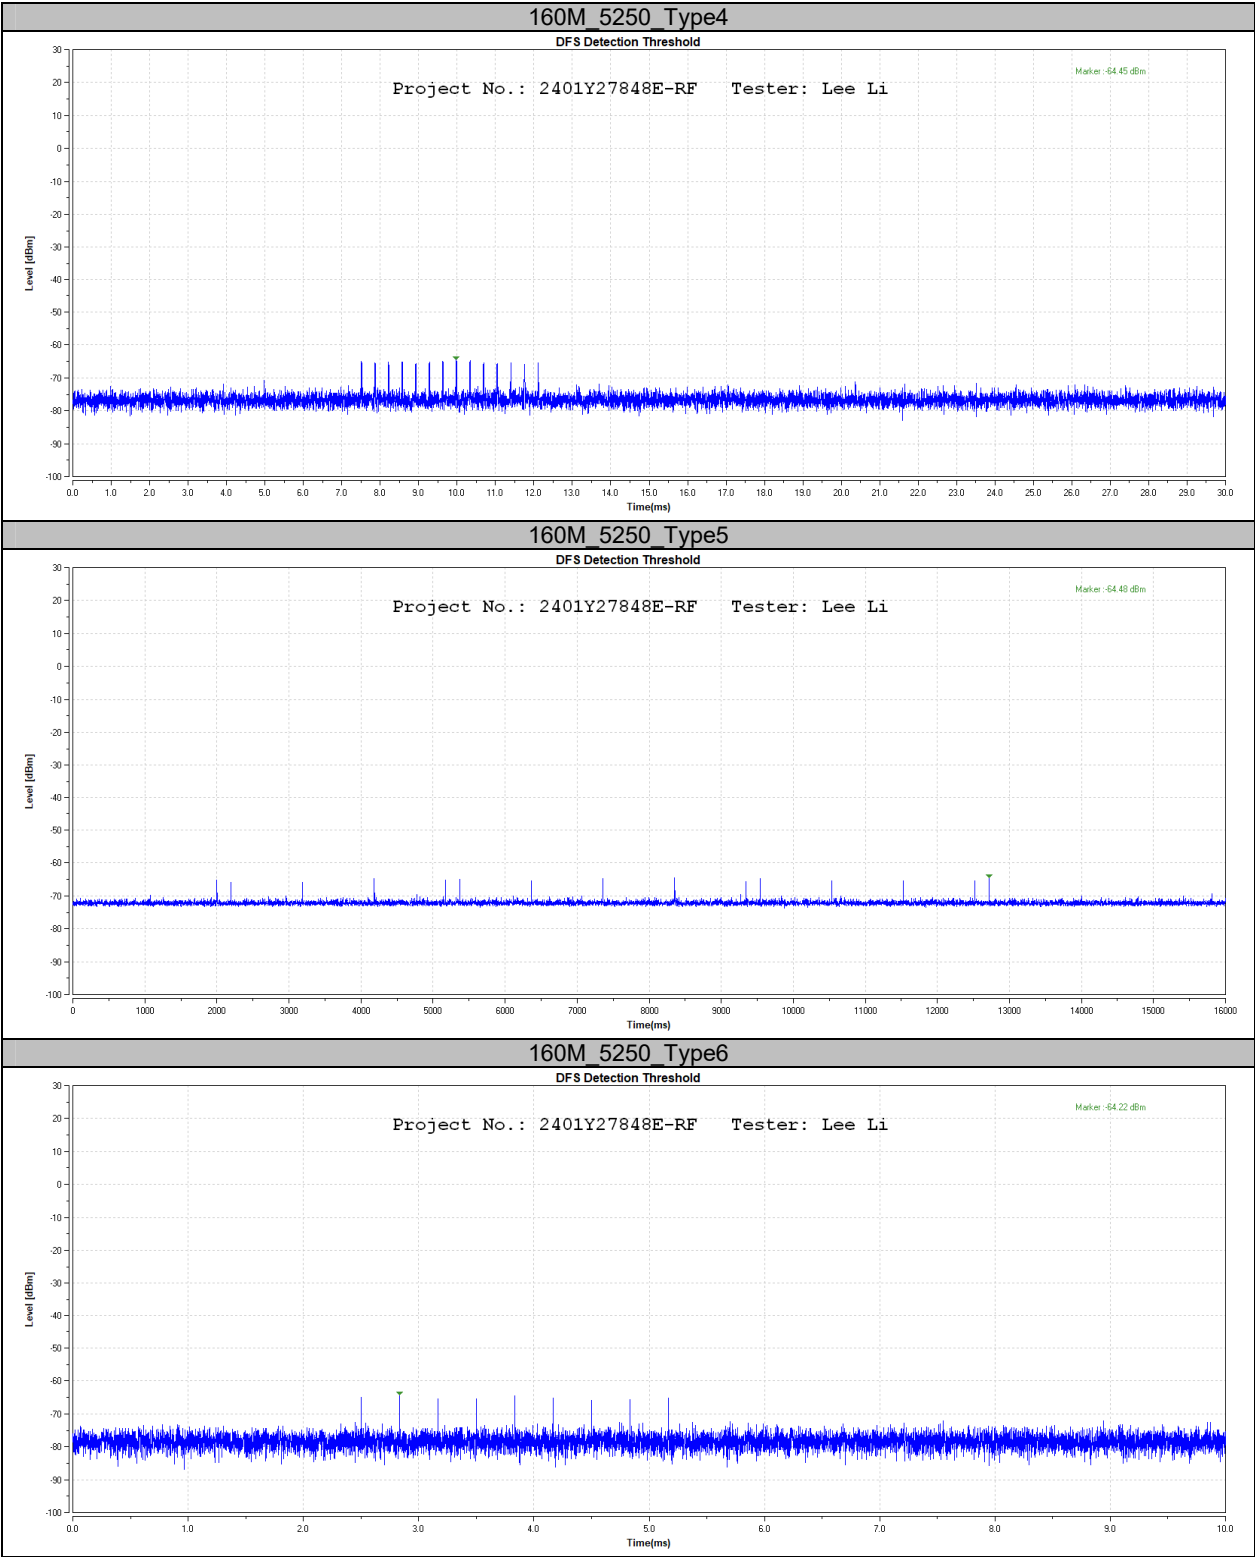

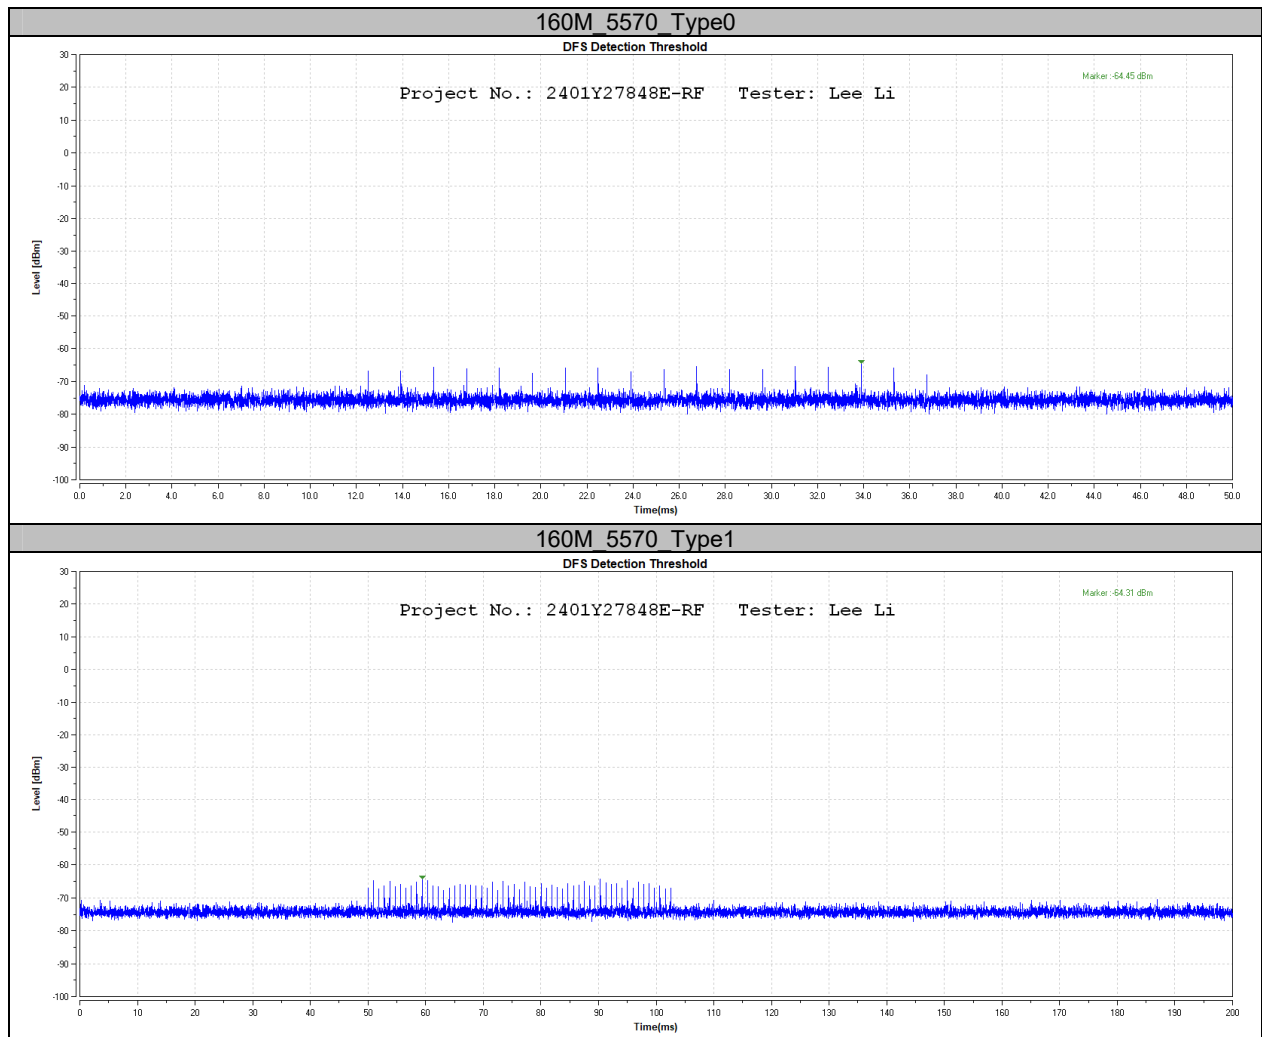

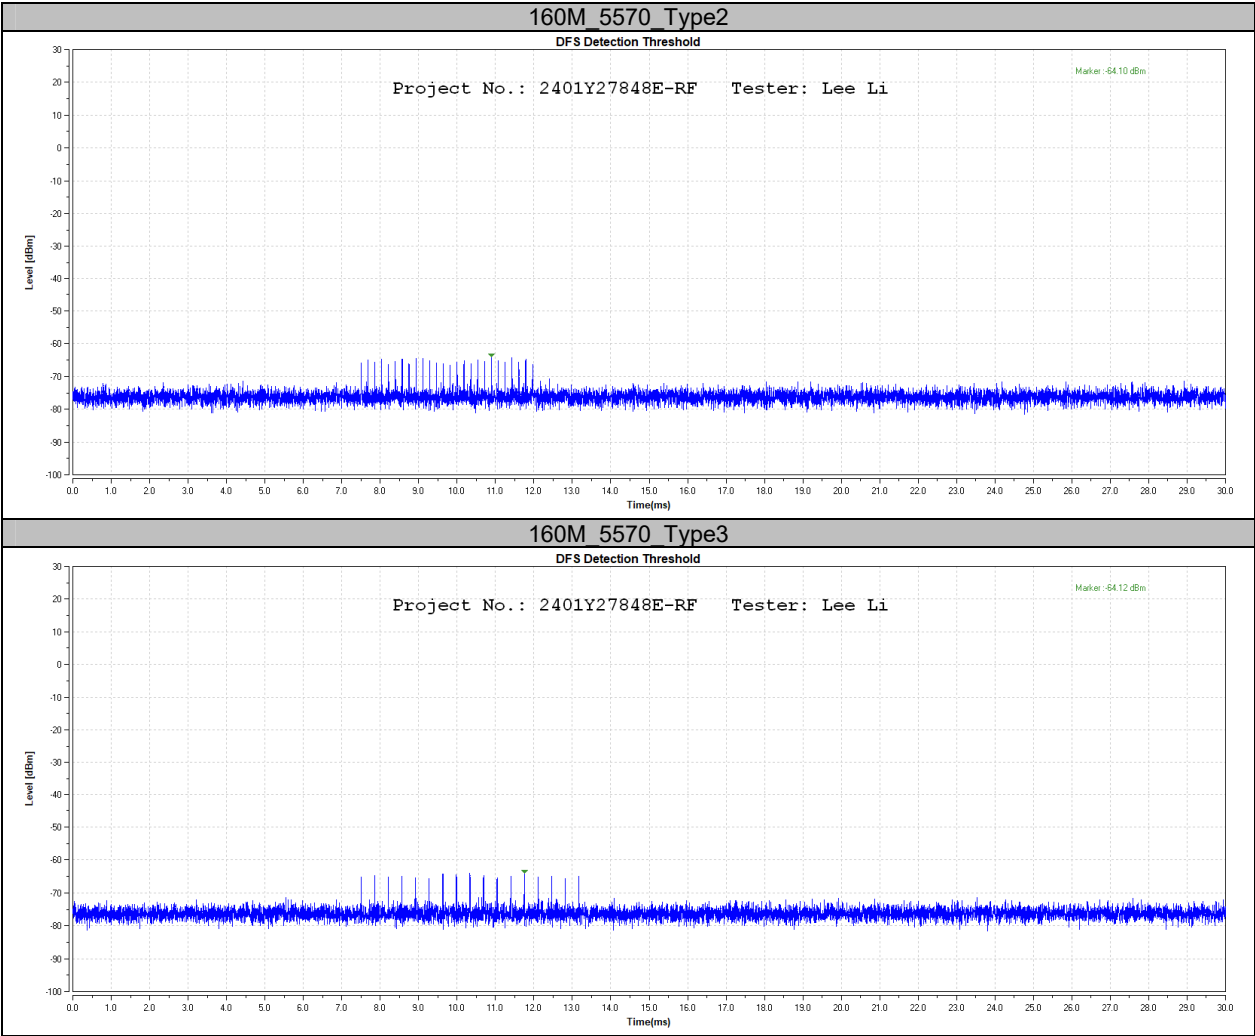

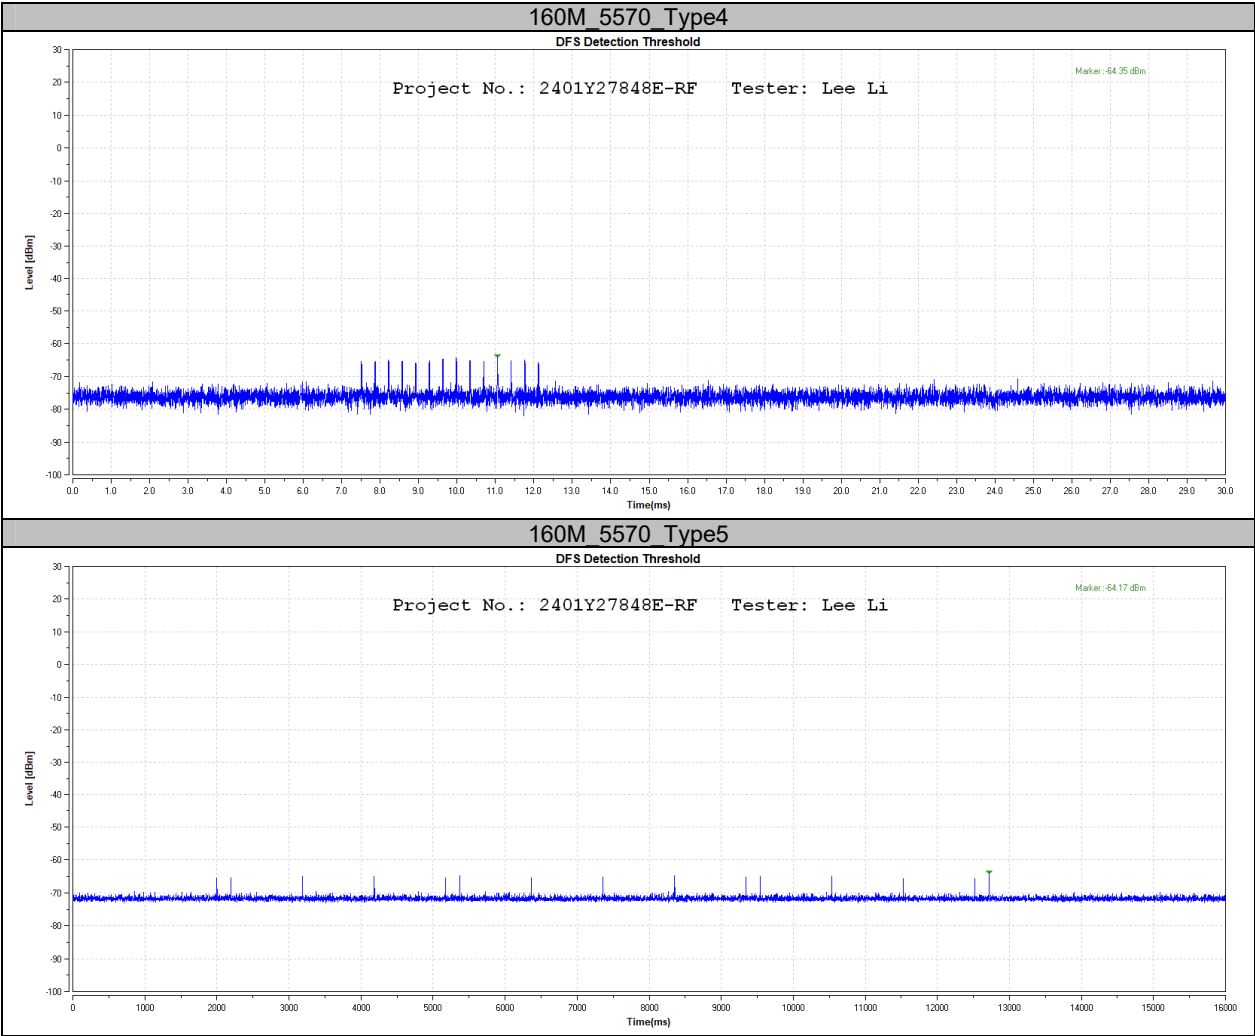

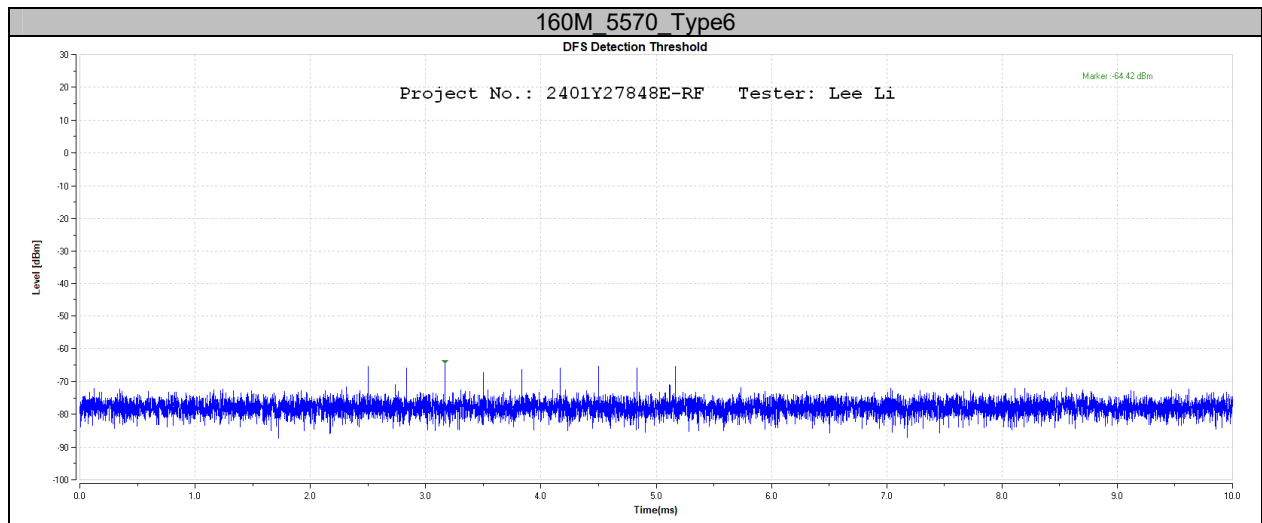

Appendix B: Channel Availability Check Time**Test Result****Initial Channel Availability Check Time**

Test Mode	Frequency[MHz]	Result	Verdict
11AX20MIMO	5260	See test Graph	PASS
	5500	See test Graph	PASS
11AX160MIMO	5250	See test Graph	PASS
	5570	See test Graph	PASS


Beginning of Channel Availability Check Time


Test Mode	Frequency[MHz]	Result	Verdict
11AX20MIMO	5260	See test Graph	PASS
	5500	See test Graph	PASS
11AX160MIMO	5250	See test Graph	PASS
	5570	See test Graph	PASS

End of Channel Availability Check Time

Test Mode	Frequency[MHz]	Result	Verdict
11AX20MIMO	5260	See test Graph	PASS
	5500	See test Graph	PASS
11AX160MIMO	5250	See test Graph	PASS
	5570	See test Graph	PASS


Test Graphs

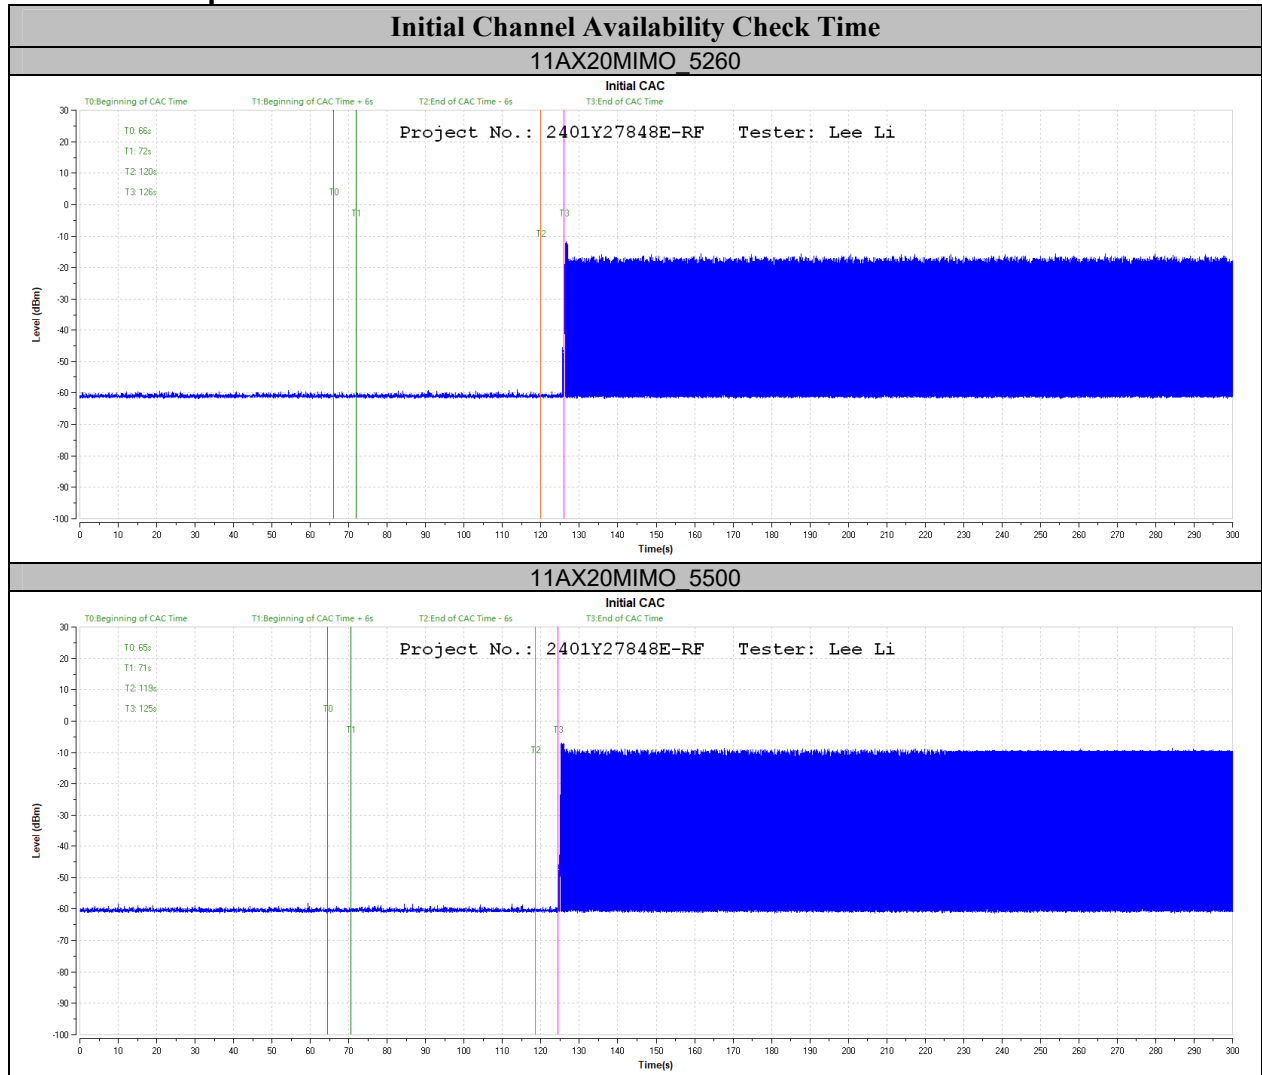

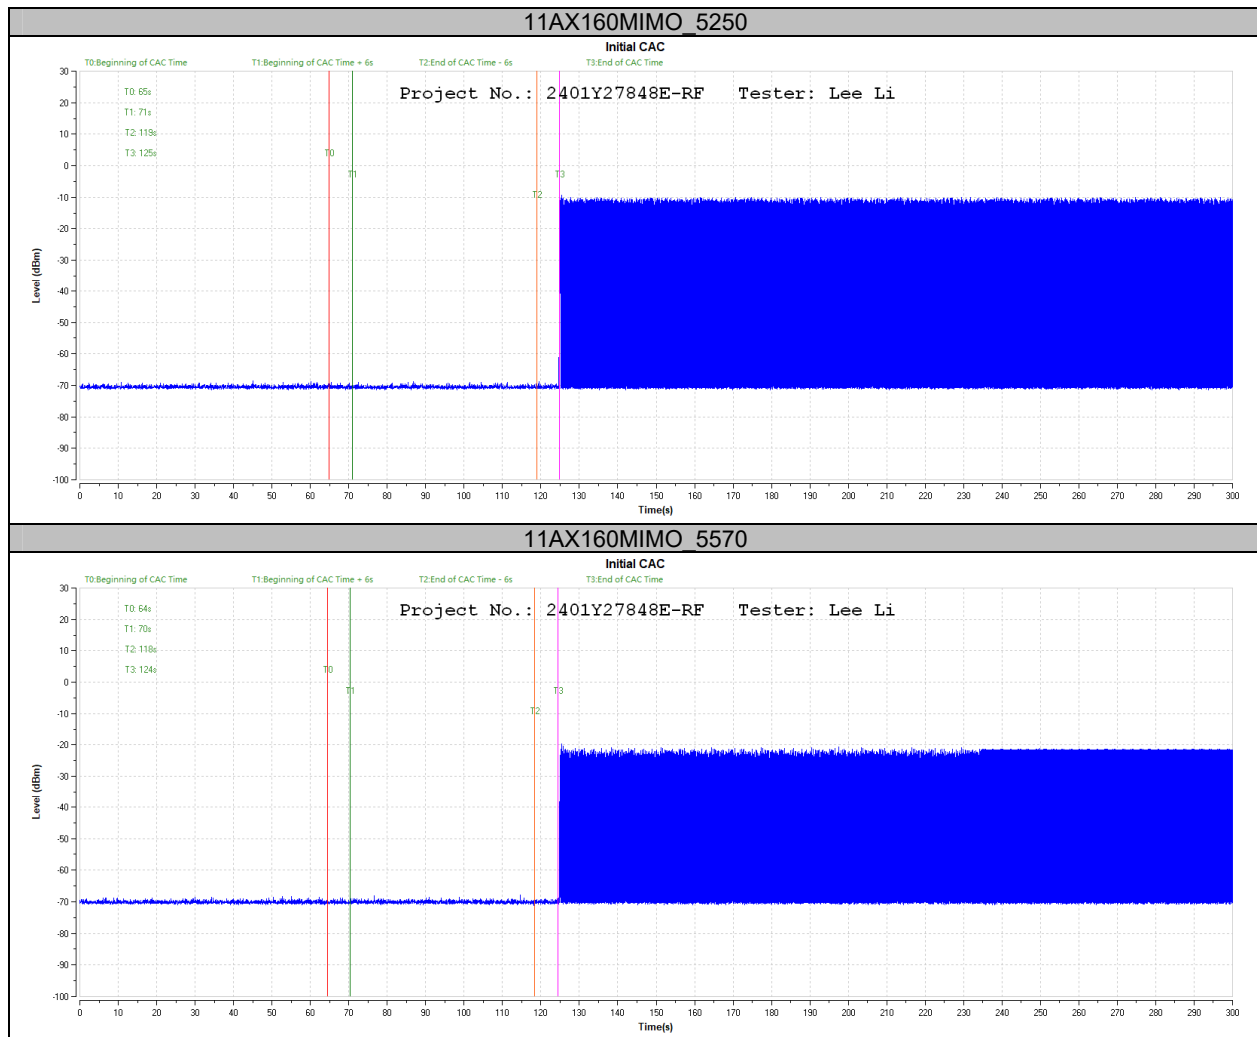



Beginning of Channel Availability Check Time

11AX20MIMO_5260

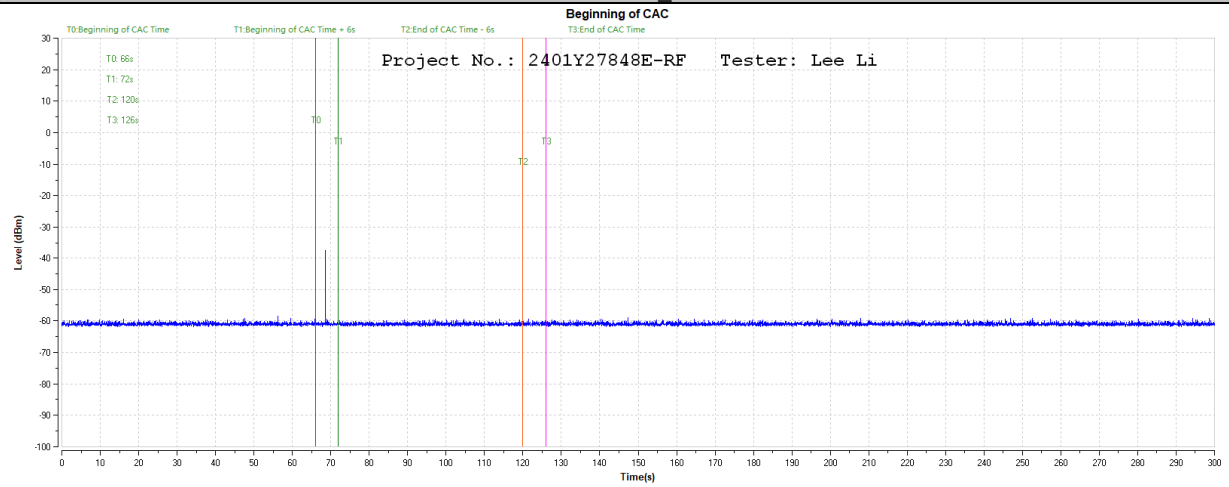


11AX20MIMO_5500

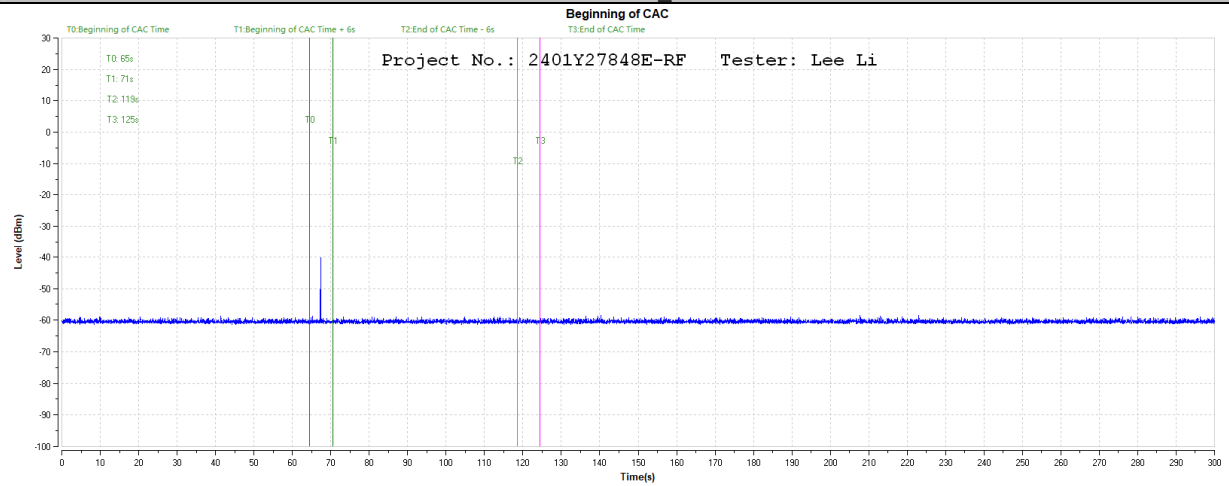

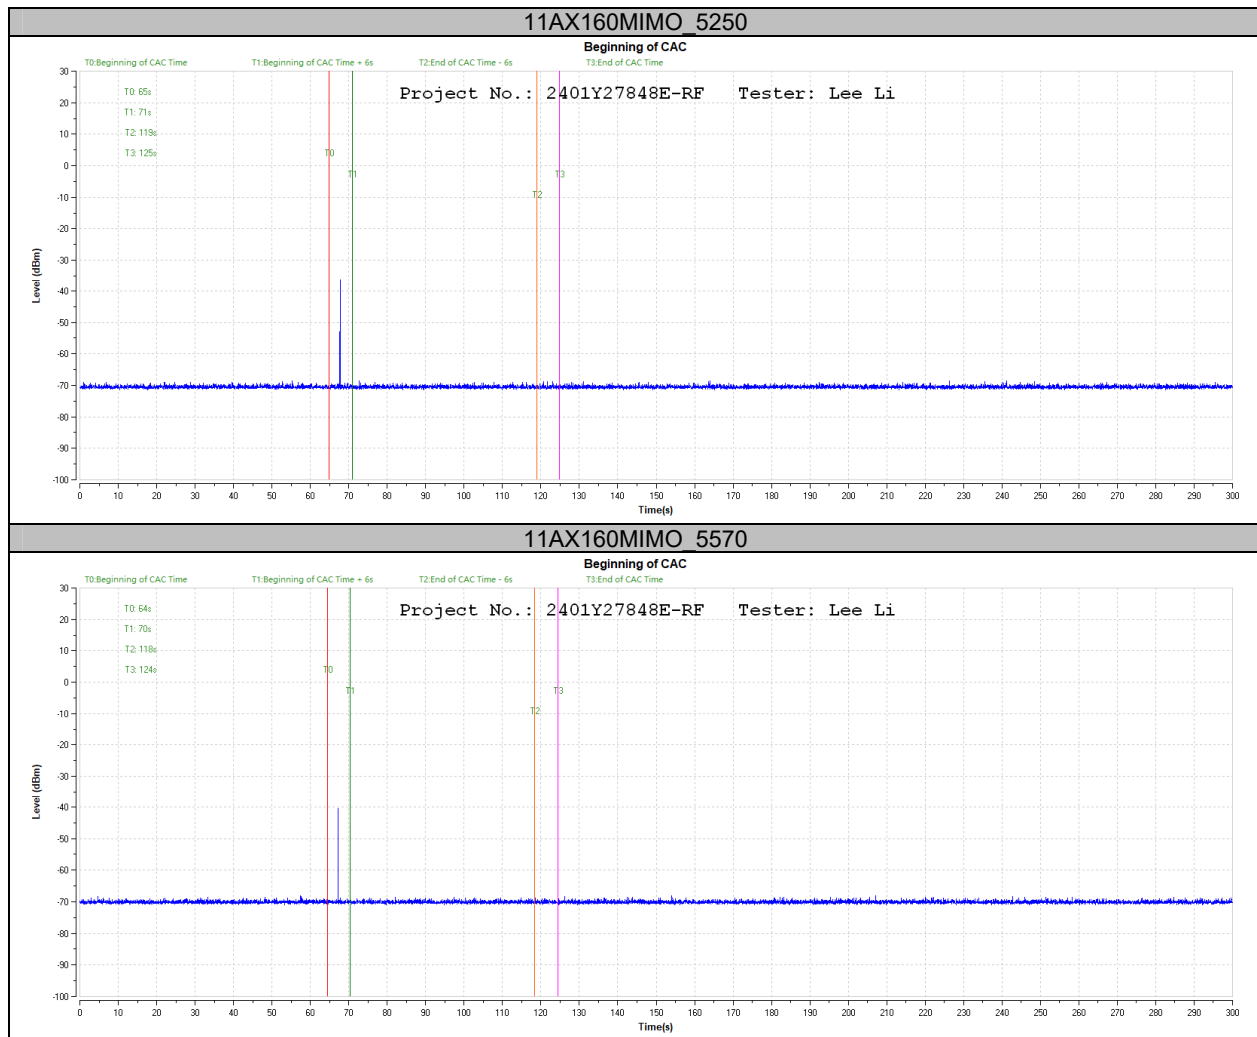



End of Channel Availability Check Time

11AX20MIMO 5260

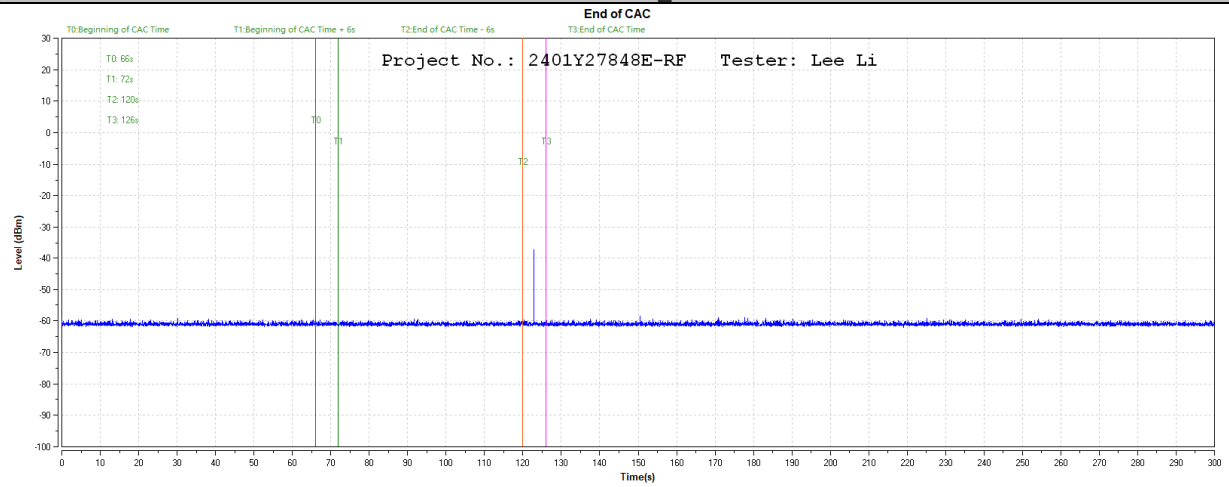


11AX20MIMO 5500

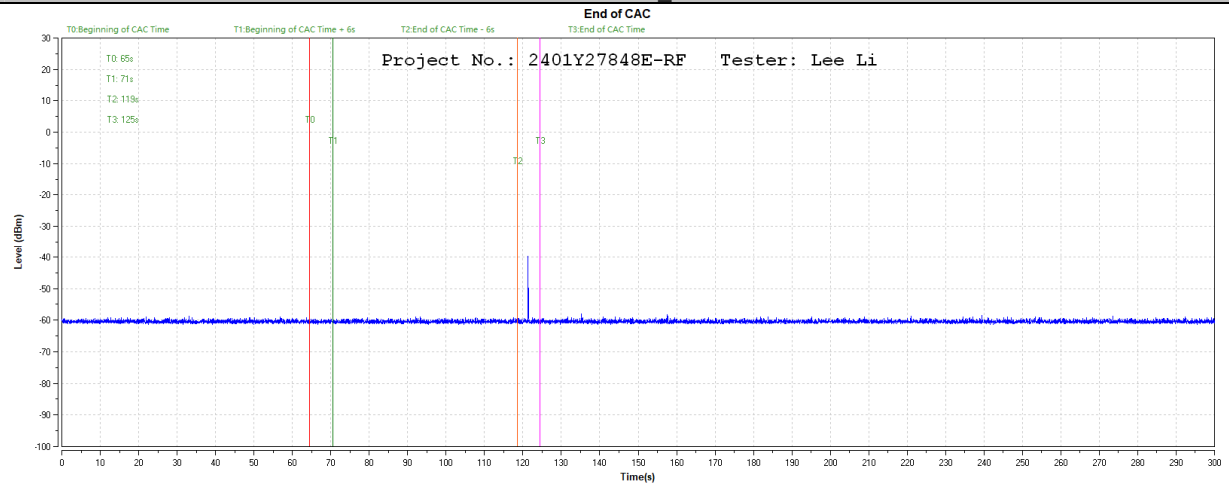


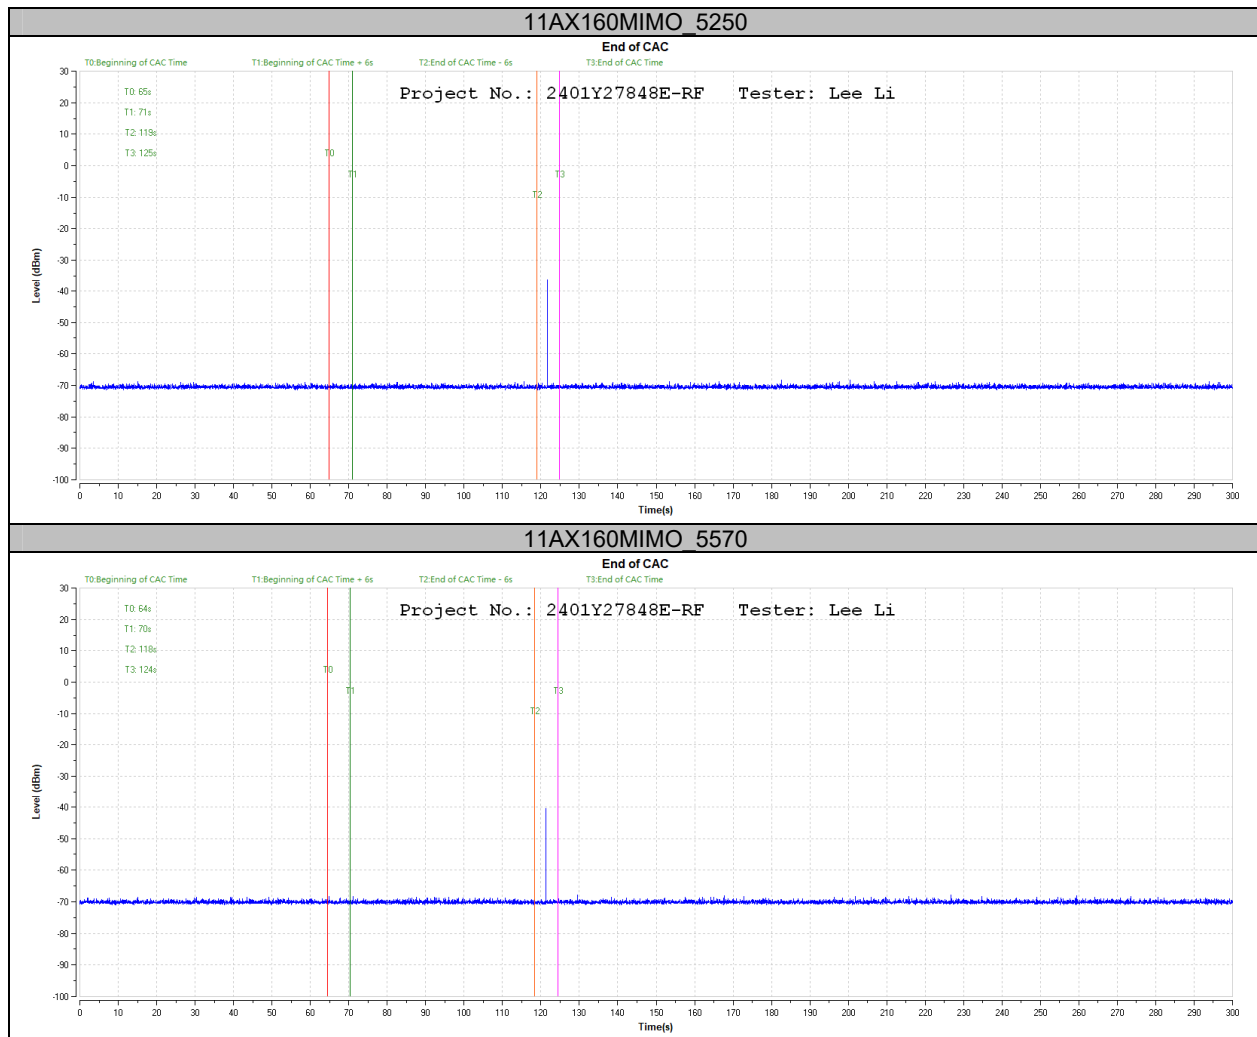

Appendix C: Channel Move Time and Channel Closing Transmission Time**Test Result**

Test Mode	Frequency[MHz]	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AX20MIMO	5260	200+14.3	200+60	975	10000	PASS
	5500	200+16.9	200+60	1020.5	10000	PASS
11AX160MIMO	5250	200+13	200+60	1003.6	10000	PASS
	5570	200+14.3	200+60	923	10000	PASS

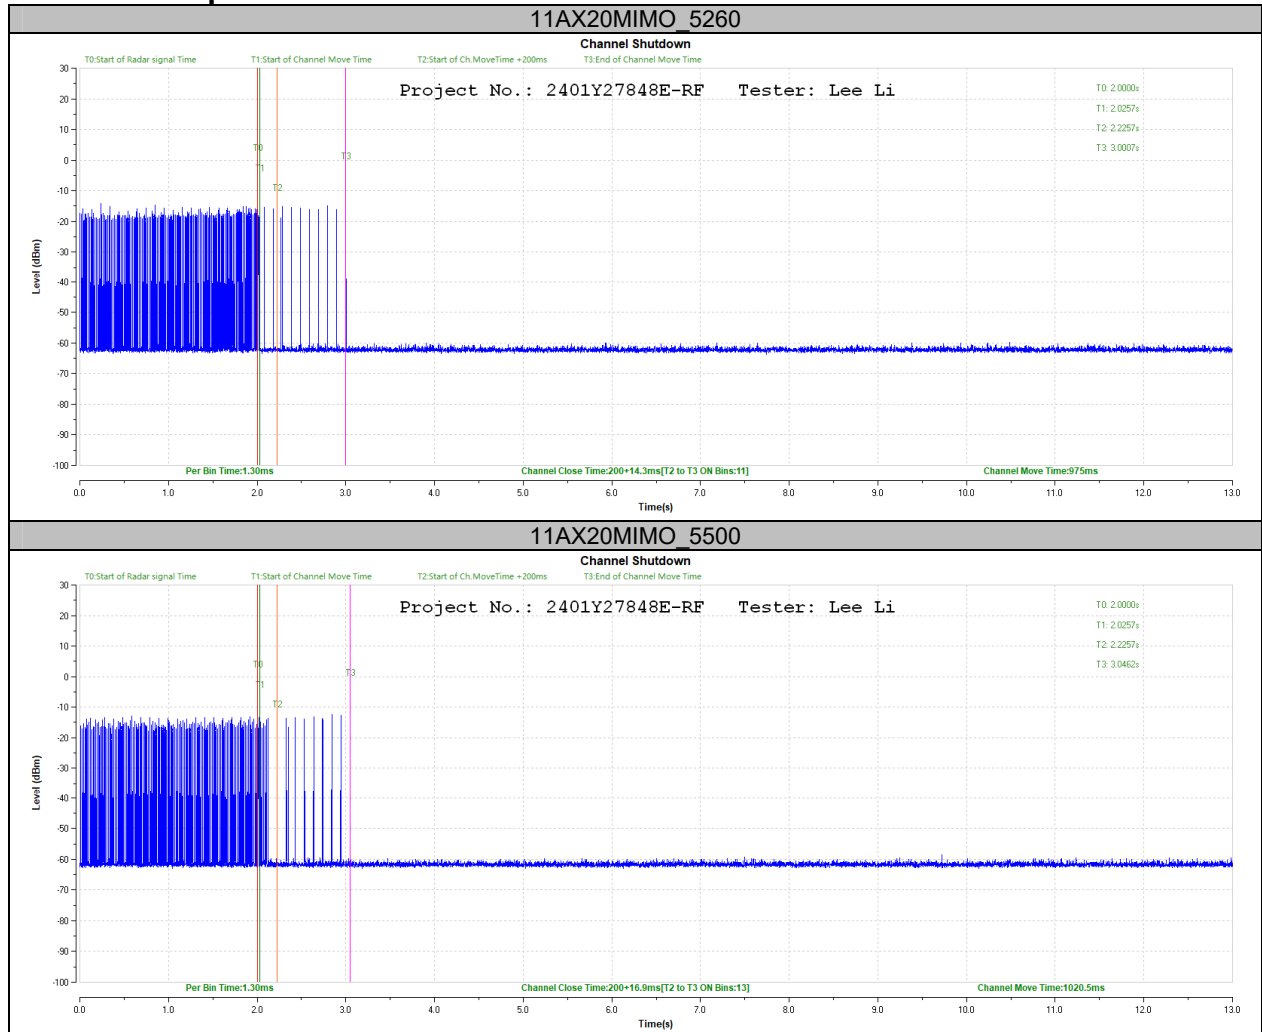
Test Graphs

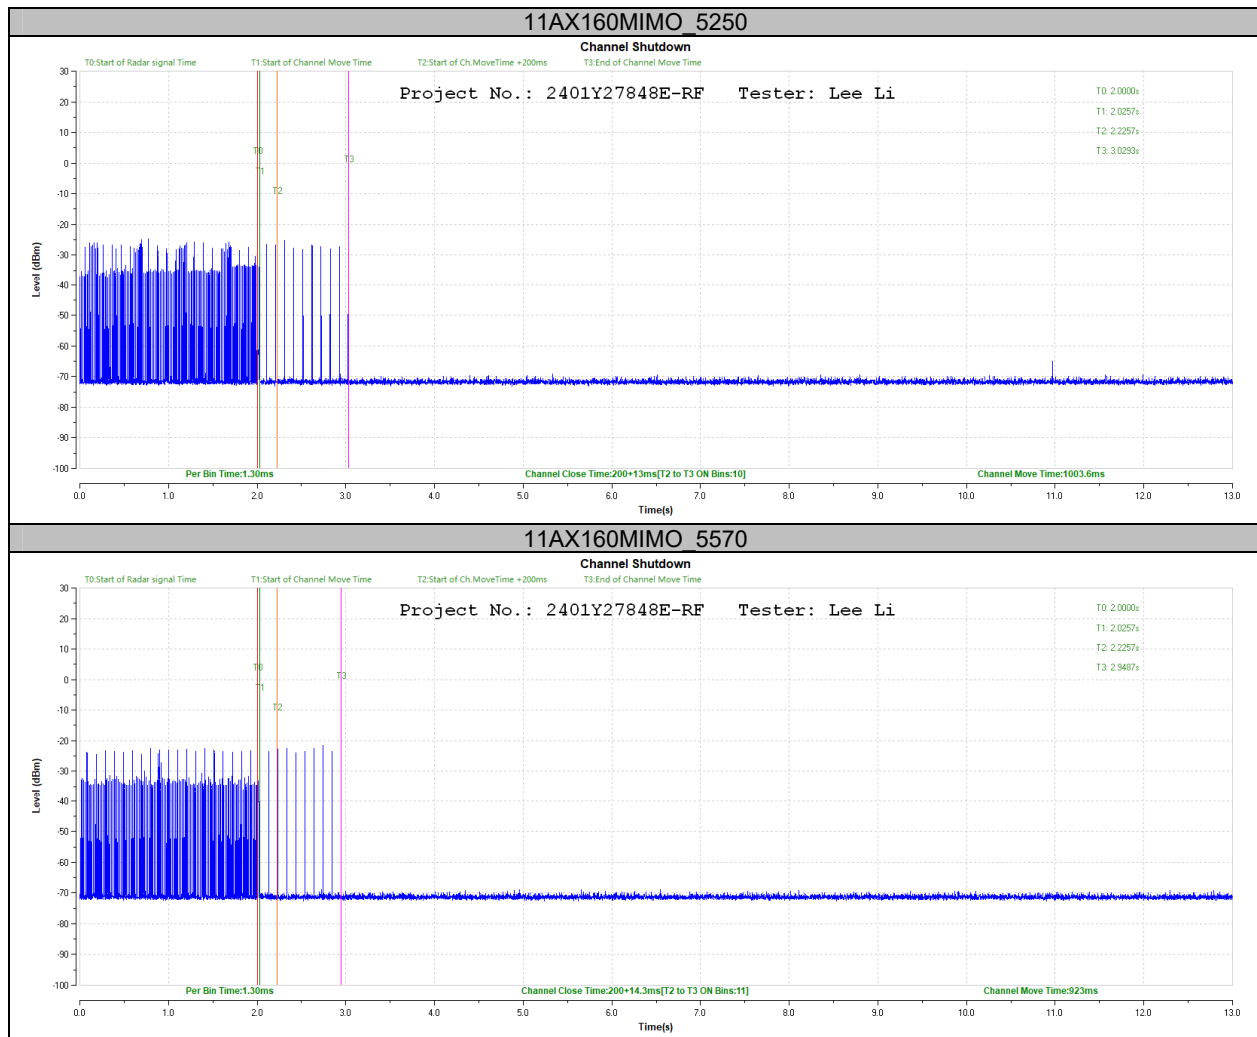


Appendix D: Non-Occupancy Period**Test Result**

Test Mode	Frequency[MHz]	Result	Limit[s]	Verdict
11AX20MIMO	5260	see test graph	≥1800	PASS
	5500	see test graph	≥1800	PASS
11AX160MIMO	5250	see test graph	≥1800	PASS
	5570	see test graph	≥1800	PASS

Test Graphs

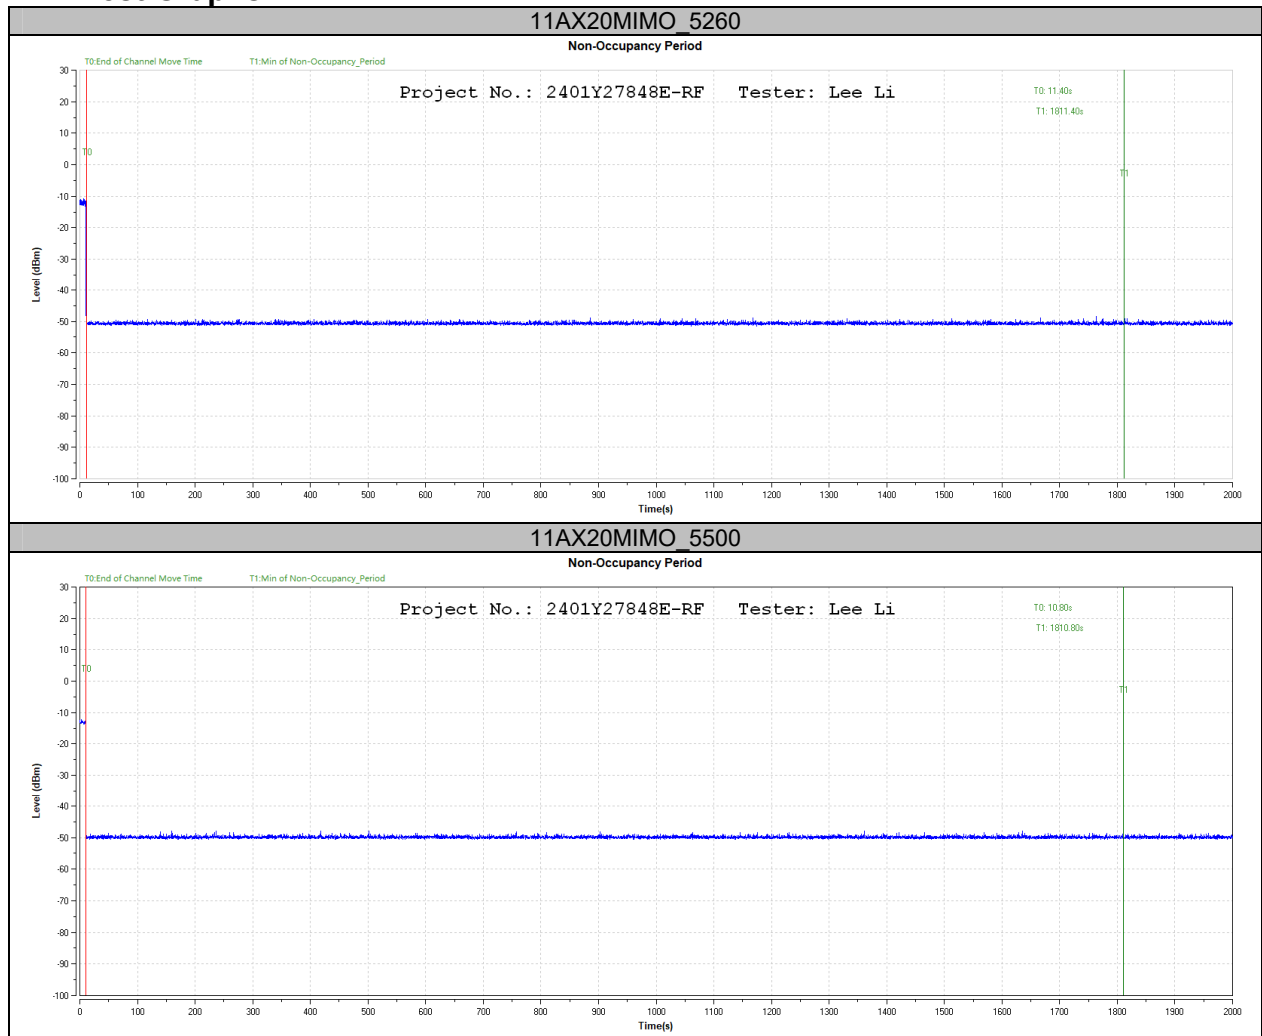

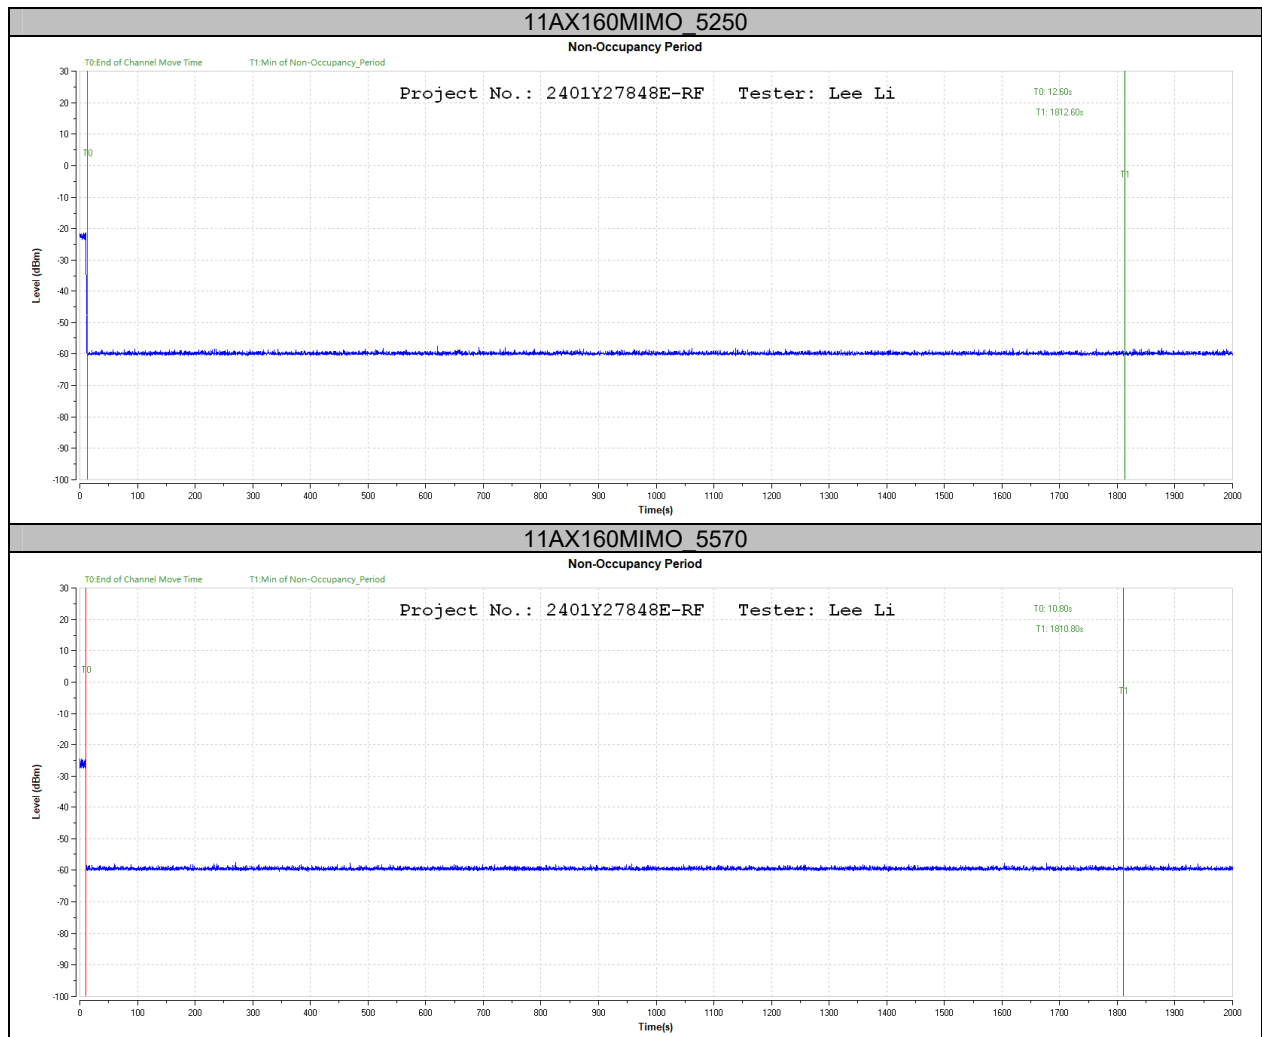

Appendix E: U-NII Detection Bandwidth**Test Result**

Test Mode	Frequency[MHz]	FL[MHz]	FH[MHz]	Detection Bandwidth [MHz]	OCB [MHz]	Ratio [%]	Limit [%]	Verdict
11AX20MIMO	5260	5247	5273	26	19.181	135.55	≥100	PASS
	5500	5487	5513	26	19.421	133.88	≥100	PASS
11AX40MIMO	5270	5240	5301	61	37.642	162.05	≥100	PASS
	5510	5478	5542	64	38.122	167.88	≥100	PASS
11AX80MIMO	5290	5232	5355	123	77.522	158.66	≥100	PASS
	5530	5467	5594	127	77.682	163.49	≥100	PASS
11AX160MIMO	5250	5145	5356	211	156.324	134.98	≥100	PASS
	5570	5463	5673	210	156.643	134.06	≥100	PASS

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX20M IMO	5260	5246	0	0	0	0	0	0	0	0	0	0	0
		5247	1	1	1	1	1	1	1	1	1	1	100
		5248	1	1	1	1	1	1	1	1	1	1	100
		5249	1	1	1	1	1	1	1	1	1	1	100
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5271	1	1	1	1	1	1	1	1	1	1	100
		5272	1	1	1	1	1	1	1	1	1	1	100
		5273	1	1	1	1	1	1	1	1	1	1	100
		5274	0	0	0	0	0	0	1	0	0	0	10
	5500	5486	0	0	0	0	0	0	0	0	0	0	0
		5487	1	1	1	1	1	1	1	1	1	1	100
		5488	1	1	1	1	1	1	1	1	1	1	100
		5489	1	1	1	1	1	1	1	1	1	1	100
		5490	1	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	1	100
		5511	1	1	1	1	1	1	1	1	1	1	100
		5512	1	1	1	1	1	1	1	1	1	1	100
		5513	1	1	1	1	1	1	1	1	1	1	100
		5514	0	0	0	0	0	0	0	0	0	0	0
11AX40M IMO	5270	5239	1	0	0	0	0	0	0	0	0	0	10
		5240	1	1	1	1	1	1	1	1	1	1	100
		5245	1	1	1	1	1	1	1	1	1	1	100
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	0	1	1	1	1	90
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5301	1	1	1	1	1	1	1	1	1	1	100
		5302	0	0	0	0	0	0	0	0	0	0	0

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX40M IMO	5510	5477	0	0	0	0	0	0	0	0	0	0	0
		5478	1	1	1	1	1	1	1	1	1	1	100
		5479	1	1	1	1	1	1	1	1	1	1	100
		5480	1	1	1	1	1	1	1	1	1	1	100
		5485	1	1	1	1	1	1	1	1	1	1	100
		5490	1	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	1	100
		5515	1	1	1	1	1	1	1	1	1	1	100
		5520	1	1	1	1	1	1	1	1	1	1	100
		5525	1	1	1	1	1	1	1	1	1	1	100
		5530	1	1	1	1	1	1	1	1	1	1	100
		5535	1	1	1	1	1	1	1	1	1	1	100
		5540	1	1	1	1	1	1	1	1	1	1	100
		5541	1	1	1	1	1	1	1	1	1	1	100
		5542	1	1	1	1	1	1	1	1	1	1	100
		5543	1	1	0	0	0	0	0	1	0	0	30
11AX80M IMO	5290	5231	0	0	0	0	0	0	0	0	0	0	0
		5232	1	1	1	1	1	1	1	1	1	1	100
		5233	1	1	1	1	1	1	1	1	1	1	100
		5234	1	1	1	1	1	1	1	1	1	1	100
		5235	1	1	1	1	1	1	1	1	1	1	100
		5240	1	1	1	1	1	1	1	1	1	1	100
		5245	1	1	1	1	1	1	1	1	1	1	100
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100
		5335	1	1	1	1	1	1	1	1	1	1	100
		5340	1	1	1	1	1	1	1	1	1	1	100
		5345	1	1	1	1	1	1	1	1	1	1	100
		5350	1	1	1	1	1	1	1	1	1	1	100
		5355	1	1	1	1	1	1	1	1	1	1	100
		5356	0	0	0	0	0	0	0	0	0	0	0

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX8 0MIMO	5530	5466	0	0	0	0	0	0	0	0	0	0	0
		5467	1	1	1	1	1	0	1	1	1	1	90
		5468	1	1	1	1	1	1	1	1	1	1	100
		5469	1	1	1	1	1	1	1	1	1	1	100
		5470	1	1	1	1	1	1	1	1	1	1	100
		5475	1	1	1	1	1	1	1	1	1	1	100
		5480	1	1	1	1	1	1	1	1	1	1	100
		5485	1	1	1	1	1	1	1	1	1	1	100
		5490	1	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	1	100
		5515	1	1	1	1	1	1	1	1	1	1	100
		5520	1	1	1	1	1	1	1	1	1	1	100
		5525	1	1	1	1	1	1	1	1	1	1	100
		5530	1	1	1	1	1	1	1	1	1	1	100
		5535	1	1	1	1	1	1	1	1	1	1	100
		5540	1	1	1	1	1	1	1	1	1	1	100
		5545	1	1	1	1	1	1	1	1	1	1	100
		5550	1	1	1	1	1	1	1	1	1	1	100
		5555	1	1	1	1	1	1	1	1	1	1	100
		5560	1	1	1	1	1	1	1	1	1	1	100
		5565	1	1	1	1	1	1	1	1	1	1	100
		5570	1	1	1	1	1	1	1	1	1	1	100
		5575	1	1	1	1	1	1	1	1	1	1	100
		5580	1	1	1	1	1	1	1	1	1	1	100
		5585	1	1	1	1	1	1	1	1	1	1	100
		5590	0	1	1	1	1	1	1	1	1	1	90
		5591	1	1	1	1	1	1	1	1	1	1	100
		5592	1	1	1	1	1	1	1	1	1	1	100
		5593	1	1	1	1	1	1	1	1	1	1	100
		5594	1	1	1	1	1	1	1	1	1	1	100
		5595	0	0	0	0	0	0	0	0	0	0	0

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX160 MIMO	5250	5144	0	0	1	1	1	1	1	1	1	1	80
		5145	1	1	1	1	1	1	0	1	1	1	90
		5146	1	1	1	1	1	1	1	1	1	1	100
		5147	1	1	1	1	1	1	1	1	1	1	100
		5148	1	1	1	1	1	1	1	1	1	1	100
		5149	1	1	1	1	1	1	1	1	1	1	100
		5150	1	1	1	1	1	1	1	1	1	1	100
		5151	1	1	1	1	1	1	1	1	1	1	100
		5152	1	1	1	1	1	1	1	1	1	1	100
		5153	1	1	1	1	1	1	1	1	1	1	100
		5154	1	1	1	1	1	1	1	1	1	1	100
		5155	1	1	1	1	1	1	1	1	1	1	100
		5156	1	1	1	1	1	1	1	1	1	1	100
		5157	1	1	1	1	1	1	1	1	1	1	100
		5158	1	1	1	1	1	1	1	1	1	1	100
		5159	1	1	1	1	1	1	1	1	1	1	100
		5160	1	1	1	1	1	1	1	1	1	1	100
		5161	1	1	1	1	1	1	1	1	1	1	100
		5162	1	1	1	1	1	1	1	1	1	1	100
		5163	1	1	1	1	1	1	1	1	1	1	100
		5164	1	1	1	1	1	1	1	1	1	1	100
		5165	1	1	1	1	1	1	1	1	1	1	100
		5166	1	1	1	1	1	1	1	1	1	1	100
		5167	1	1	1	1	1	1	1	1	1	1	100
		5168	1	1	1	1	1	1	1	1	1	1	100
		5169	1	1	1	1	1	1	1	1	1	1	100
		5170	1	1	1	1	1	1	1	1	1	1	100
		5171	1	1	1	1	1	1	1	1	1	1	100
		5172	1	1	1	1	1	1	1	1	1	1	100
		5173	1	1	1	1	1	1	1	1	1	1	100
		5174	1	1	1	1	1	1	1	1	1	1	100
		5175	1	1	1	1	1	1	1	1	1	1	100
		5176	1	1	1	1	1	1	1	1	1	1	100
		5177	1	1	1	1	1	1	1	1	1	1	100
		5178	1	1	1	1	1	1	1	1	1	1	100
		5179	1	1	1	1	1	1	1	1	1	1	100
		5180	1	1	1	1	1	1	1	1	1	1	100
		5181	1	1	1	1	1	1	1	1	1	1	100
		5182	1	1	1	1	1	1	1	1	1	1	100
		5183	1	1	1	1	1	1	1	1	1	1	100
		5184	1	1	1	1	1	1	1	1	1	1	100
		5185	1	1	1	1	1	1	1	1	1	1	100
		5186	1	1	1	1	1	1	1	1	1	1	100
		5187	1	1	1	1	1	1	1	1	1	1	100
		5188	1	1	1	1	1	1	1	1	1	1	100
		5189	1	1	1	1	1	1	1	1	1	1	100
		5190	1	1	1	1	1	1	1	1	1	1	100
		5191	1	1	1	1	1	1	1	1	1	1	100
		5192	1	1	1	1	1	1	1	1	1	1	100
		5193	1	1	1	1	1	1	1	1	1	1	100
		5194	1	1	1	1	1	1	1	1	1	1	100
		5195	1	1	1	1	1	1	1	1	1	1	100

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX160 MIMO	5250	5196	1	1	1	1	1	1	1	1	1	1	100
		5197	1	1	1	1	1	1	1	1	1	1	100
		5198	1	1	1	1	1	1	1	1	1	1	100
		5199	1	1	1	1	1	1	1	1	1	1	100
		5200	1	1	1	1	1	1	1	1	1	1	100
		5201	1	1	1	1	1	1	1	1	1	1	100
		5202	1	1	1	1	1	1	1	1	1	1	100
		5203	1	1	1	1	1	1	1	1	1	1	100
		5204	1	1	1	1	1	1	1	1	1	1	100
		5205	1	1	1	1	1	1	1	1	1	1	100
		5206	1	1	1	1	1	1	1	1	1	1	100
		5207	1	1	1	1	1	1	1	1	1	1	100
		5208	1	1	1	1	1	1	1	1	1	1	100
		5209	1	1	1	1	1	1	1	1	1	1	100
		5210	1	1	1	1	1	1	1	1	1	1	100
		5211	1	1	1	1	1	1	1	1	1	1	100
		5212	1	1	1	1	1	1	1	1	1	1	100
		5213	1	1	1	1	1	1	1	1	1	1	100
		5214	1	1	1	1	1	1	1	1	1	1	100
		5215	1	1	1	1	1	1	1	1	1	1	100
		5216	1	1	1	1	1	1	1	1	1	1	100
		5217	1	1	1	1	1	1	1	1	1	1	100
		5218	1	1	1	1	1	1	1	1	1	1	100
		5219	1	1	1	1	1	1	1	1	1	1	100
		5220	1	1	1	1	1	1	1	1	1	1	100
		5221	1	1	1	1	1	1	1	1	1	1	100
		5222	1	1	1	1	1	1	1	1	1	1	100
		5223	1	1	1	1	1	1	1	1	1	1	100
		5224	1	1	1	1	1	1	1	1	1	1	100
		5225	1	1	1	1	1	1	1	1	1	1	100
		5226	1	1	1	1	1	1	1	1	1	1	100
		5227	1	1	1	1	1	1	1	1	1	1	100
		5228	1	1	1	1	1	1	1	1	1	1	100
		5229	1	1	1	1	1	1	1	1	1	1	100
		5230	1	1	1	1	1	1	1	1	1	1	100
		5231	1	1	1	1	1	1	1	1	1	1	100
		5232	1	1	1	1	1	1	1	1	1	1	100
		5233	1	1	1	1	1	1	1	1	1	1	100
		5234	1	1	1	1	1	1	1	1	1	1	100
		5235	1	1	1	1	1	1	1	1	1	1	100
		5236	1	1	1	1	1	1	1	1	1	1	100
		5237	1	1	1	1	1	1	1	1	1	1	100
		5238	1	1	1	1	1	1	1	1	1	1	100
		5239	1	1	1	1	1	1	1	1	1	1	100
		5240	1	1	1	1	1	1	1	1	1	1	100
		5241	1	1	1	1	1	1	1	1	1	1	100
		5242	1	1	1	1	1	1	1	1	1	1	100
		5243	1	1	1	1	1	1	1	1	1	1	100
		5244	1	1	1	1	1	1	1	1	1	1	100
		5245	1	1	1	1	1	1	1	1	1	1	100
		5246	1	1	1	1	1	1	1	1	1	1	100
		5247	1	1	1	1	1	1	1	1	1	1	100
		5248	1	1	1	1	1	1	1	1	1	1	100
		5249	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX160 MIMO	5250	5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100
		5335	1	1	1	1	1	1	1	1	1	1	100
		5340	1	1	1	1	1	1	1	1	1	1	100
		5345	1	1	1	1	1	1	1	1	1	1	100
		5350	0	1	1	1	1	1	1	1	1	1	90
		5355	1	1	1	1	1	1	1	1	1	1	100
		5356	1	1	1	1	1	1	1	1	1	1	100
		5357	0	0	0	0	0	0	0	0	0	0	0
	5570	5462	0	0	0	0	0	0	0	0	0	0	0
		5463	1	1	1	1	1	1	1	1	1	1	100
		5464	1	1	1	1	1	1	1	1	1	1	100
		5465	1	1	1	1	1	1	1	1	1	1	100
		5470	1	1	1	1	1	1	1	1	1	1	100
		5475	1	1	1	1	1	1	1	1	1	1	100
		5480	1	1	1	1	1	1	1	1	1	1	100
		5485	1	1	1	1	1	1	1	1	1	1	100
		5490	1	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	1	100
		5515	1	1	1	1	1	1	1	1	1	1	100
		5520	1	1	1	1	1	1	1	1	1	1	100
		5525	1	1	1	1	1	1	1	1	1	1	100
		5530	1	1	1	1	1	1	1	1	1	1	100
		5535	1	1	1	1	1	1	1	1	1	1	100
		5540	1	1	1	1	1	1	1	1	1	1	100
		5545	1	1	1	1	1	1	1	1	1	1	100
		5550	1	1	1	1	1	1	1	1	1	1	100
		5555	1	1	1	1	1	1	1	1	1	1	100
		5560	1	1	1	1	1	1	1	1	1	1	100
		5565	1	1	1	1	1	1	1	1	1	1	100
		5570	1	1	1	1	1	1	1	1	1	1	100
		5575	1	1	1	1	1	1	1	1	1	1	100
		5580	1	1	1	1	1	1	1	1	1	1	100
		5585	1	1	1	1	1	1	1	1	1	1	100
		5590	1	1	1	1	1	1	1	1	1	1	100
		5595	1	1	1	1	1	1	1	1	1	1	100
		5600	1	1	1	1	1	1	1	1	1	1	100
		5605	1	1	1	1	1	1	1	1	1	1	100
		5610	1	1	1	1	1	1	1	1	1	1	100
		5615	1	1	1	1	1	1	1	1	1	1	100

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX160 MIMO	5570	5620	1	1	1	1	1	1	1	1	1	1	100
		5625	1	1	1	1	1	1	1	1	1	1	100
		5630	1	1	1	1	1	1	1	1	1	1	100
		5635	1	1	1	1	1	1	1	1	1	1	100
		5640	1	1	1	1	1	1	1	1	0	1	90
		5645	1	1	1	1	1	1	1	1	1	1	100
		5650	1	1	1	1	1	1	1	1	1	1	100
		5655	1	1	1	1	1	1	1	1	1	1	100
		5660	1	1	1	1	1	1	1	1	1	1	100
		5665	1	1	1	1	1	1	1	1	1	1	100
		5670	1	1	1	1	1	1	1	1	1	1	100
		5671	1	1	1	1	1	1	1	1	1	1	100
		5672	1	1	1	1	1	1	1	1	1	1	100
		5673	1	1	1	1	1	1	1	1	1	1	100
		5674	1	1	1	1	0	1	0	1	1	0	70

Appendix F: Statistical Performance check**Test Result**

Test Mode	Frequency [MHz]	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11AX20MIMO	5260	Type1	29	1	96.67	60	PASS
		Type2	29	1	96.67	60	PASS
		Type3	28	2	93.33	60	PASS
		Type4	27	3	90.00	60	PASS
		Type 1-4	---	---	94.17	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
	5500	Type1	28	2	93.33	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	29	1	96.67	60	PASS
		Type4	29	1	96.67	60	PASS
		Type 1-4	---	---	96.67	80	PASS
		Type5	29	1	96.67	80	PASS
		Type6	30	0	100.00	70	PASS
11AX40MIMO	5270	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	29	1	96.67	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	99.17	80	PASS
		Type5	28	2	93.33	80	PASS
		Type6	30	0	100.00	70	PASS
	5510	Type1	30	0	100.00	60	PASS
		Type2	28	2	93.33	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	98.33	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	29	1	96.67	70	PASS
11AX80MIMO	5290	Type1	30	0	100.00	60	PASS
		Type2	29	1	96.67	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	27	3	90.00	60	PASS
		Type 1-4	---	---	96.67	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
	5530	Type1	29	1	96.67	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	99.17	80	PASS
		Type5	28	2	93.33	80	PASS
		Type6	29	1	96.67	70	PASS

Test Mode	Frequency[MHz]	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11AX160MIMO	5250	Type1	30	0	100.00	60	PASS
		Type2	29	1	96.67	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	99.17	80	PASS
		Type5	30	0	100.00	80	PASS
	5570	Type6	29	1	96.67	70	PASS
		Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	29	1	96.67	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	99.17	80	PASS
5570	Type5	30	0	100.00	80	PASS	
	Type6	30	0	100.00	70	PASS	

Bridge Mode:

Test Mode	Frequency[MHz]	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11AX160MIMO	5570	Type2	27	3	90.00	60	PASS

Test Mode	Frequency [MHz]	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AX20MI MO	5260	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	0
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	0
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1
		Type2	21	2.2	176.0	25	1
		Type2	22	4.9	195.0	29	1
		Type2	23	2.9	202.0	26	1
		Type2	24	2.5	178.0	25	1

	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	0
	Type3	4	8.9	230.0	18	0
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	0
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	0
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	0
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1
	Type4	15	15.5	412.0	14	1
	Type4	16	19.9	324.0	16	1
	Type4	17	14.1	271.0	13	1
	Type4	18	15.2	349.0	14	1
	Type4	19	13.8	409.0	13	1
	Type4	20	17.1	373.0	15	1
	Type4	21	13.8	254.0	13	1
	Type4	22	19.8	274.0	16	1

		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5500	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	0
		Type1	11	1.0	718.0	74	0
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1

Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	0
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1
Type3	29	9.2	284.0	18	1
Type4	0	16.0	355.0	14	1
Type4	1	11.3	487.0	12	1
Type4	2	13.5	344.0	13	1
Type4	3	19.4	288.0	16	1
Type4	4	17.5	230.0	15	1
Type4	5	15.3	432.0	14	1
Type4	6	15.9	207.0	14	1
Type4	7	14.3	443.0	13	1
Type4	8	15.8	439.0	14	1
Type4	9	11.5	223.0	12	1
Type4	10	17.4	208.0	15	1
Type4	11	19.0	463.0	16	1
Type4	12	16.0	441.0	14	1
Type4	13	13.8	323.0	13	1
Type4	14	18.9	297.0	16	1
Type4	15	15.5	412.0	14	1
Type4	16	19.9	324.0	16	1
Type4	17	14.1	271.0	13	1
Type4	18	15.2	349.0	0	1

		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
11AX40MI MO	5270	Type4	29	18.2	284.0	15	1
		Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1

	Type2	17	2.4	217.0	25	1
	Type2	18	2.9	191.0	26	1
	Type2	19	2.3	166.0	25	1
	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	0
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	1
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1

		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5510	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	0
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	0
		Type2	12	3.2	162.0	26	1

	Type2	13	2.2	197.0	25	1
	Type2	14	4.5	163.0	29	1
	Type2	15	3.0	203.0	26	1
	Type2	16	5.0	168.0	29	1
	Type2	17	2.4	217.0	25	1
	Type2	18	2.9	191.0	26	1
	Type2	19	2.3	166.0	25	1
	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1

		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
11AX80MI MO	5290	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	0
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1

Type2	9	1.2	156.0	23	1
Type2	10	3.9	210.0	27	1
Type2	11	4.6	201.0	29	1
Type2	12	3.2	162.0	26	1
Type2	13	2.2	197.0	25	1
Type2	14	4.5	163.0	29	1
Type2	15	3.0	203.0	26	1
Type2	16	5.0	168.0	29	1
Type2	17	2.4	217.0	25	1
Type2	18	2.9	191.0	26	1
Type2	19	2.3	166.0	25	1
Type2	20	3.7	150.0	27	1
Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1
Type3	29	9.2	284.0	18	1
Type4	0	16.0	355.0	14	1
Type4	1	11.3	487.0	12	1
Type4	2	13.5	344.0	13	1
Type4	3	19.4	288.0	16	1
Type4	4	17.5	230.0	15	1
Type4	5	15.3	432.0	14	1
Type4	6	15.9	207.0	14	1

		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5530	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	0
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1

	Type2	5	2.9	222.0	26	1
	Type2	6	3.2	204.0	26	1
	Type2	7	2.5	192.0	25	1
	Type2	8	3.1	164.0	26	1
	Type2	9	1.2	156.0	23	1
	Type2	10	3.9	210.0	27	1
	Type2	11	4.6	201.0	29	1
	Type2	12	3.2	162.0	26	1
	Type2	13	2.2	197.0	25	1
	Type2	14	4.5	163.0	29	1
	Type2	15	3.0	203.0	26	1
	Type2	16	5.0	168.0	29	1
	Type2	17	2.4	217.0	25	1
	Type2	18	2.9	191.0	26	1
	Type2	19	2.3	166.0	25	1
	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1

		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
11AX160MI MO	5250	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1

Type2	1	1.1	207.0	23	1
Type2	2	2.1	230.0	24	1
Type2	3	4.8	200.0	29	1
Type2	4	3.9	214.0	28	1
Type2	5	2.9	222.0	26	1
Type2	6	3.2	204.0	26	1
Type2	7	2.5	192.0	25	1
Type2	8	3.1	164.0	26	1
Type2	9	1.2	156.0	23	1
Type2	10	3.9	210.0	27	1
Type2	11	4.6	201.0	29	1
Type2	12	3.2	162.0	26	1
Type2	13	2.2	197.0	25	1
Type2	14	4.5	163.0	29	1
Type2	15	3.0	203.0	26	0
Type2	16	5.0	168.0	29	1
Type2	17	2.4	217.0	25	1
Type2	18	2.9	191.0	26	1
Type2	19	2.3	166.0	25	1
Type2	20	3.7	150.0	27	1
Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1

		Type3	29	9.2	284.0	18	1
		Type4	0	16.0	355.0	14	1
		Type4	1	11.3	487.0	12	1
		Type4	2	13.5	344.0	13	1
		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5570	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1

	Type1	27	1.0	1600.0	33	1
	Type1	28	1.0	1172.0	46	1
	Type1	29	1.0	1177.0	45	1
	Type2	0	3.2	179.0	26	1
	Type2	1	1.1	207.0	23	1
	Type2	2	2.1	230.0	24	1
	Type2	3	4.8	200.0	29	1
	Type2	4	3.9	214.0	28	1
	Type2	5	2.9	222.0	26	1
	Type2	6	3.2	204.0	26	1
	Type2	7	2.5	192.0	25	1
	Type2	8	3.1	164.0	26	1
	Type2	9	1.2	156.0	23	1
	Type2	10	3.9	210.0	27	1
	Type2	11	4.6	201.0	29	1
	Type2	12	3.2	162.0	26	1
	Type2	13	2.2	197.0	25	1
	Type2	14	4.5	163.0	29	1
	Type2	15	3.0	203.0	26	1
	Type2	16	5.0	168.0	29	1
	Type2	17	2.4	217.0	25	1
	Type2	18	2.9	191.0	26	1
	Type2	19	2.3	166.0	25	1
	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	0
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1

	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	1
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1
	Type4	15	15.5	412.0	14	1
	Type4	16	19.9	324.0	16	1
	Type4	17	14.1	271.0	13	1
	Type4	18	15.2	349.0	14	1
	Type4	19	13.8	409.0	13	1
	Type4	20	17.1	373.0	15	1
	Type4	21	13.8	254.0	13	1
	Type4	22	19.8	274.0	16	1
	Type4	23	15.3	278.0	14	1
	Type4	24	14.5	317.0	13	1
	Type4	25	11.3	260.0	12	1
	Type4	26	17.3	211.0	15	1
	Type4	27	19.2	272.0	16	1
	Type4	28	14.2	264.0	13	1
	Type4	29	18.2	284.0	15	1

Test Mode	Frequency [MHz]	Radar Type	Trial ID	Number Of Bursts	Wavform Length (s)	Radar Frequency	Detection (1: Yes; 0: No)
11AX20MI MO	5260	Type5	0	15	12	5260	1
		Type5	1	8	12	5260	1
		Type5	2	11	12	5260	1
		Type5	3	20	12	5260	1
		Type5	4	17	12	5260	1
		Type5	5	14	12	5260	1
		Type5	6	15	12	5260	1
		Type5	7	12	12	5260	1
		Type5	8	14	12	5260	1
		Type5	9	8	12	5260	1
		Type5	10	17	12	5228.8375	1
		Type5	11	19	12	5230.0375	1
		Type5	12	15	12	5227.6375	1
		Type5	13	12	12	5226.4375	1
		Type5	14	19	12	5229.6375	1
		Type5	15	14	12	5227.2375	1
		Type5	16	20	12	5230.4375	1
		Type5	17	12	12	5226.4375	1
		Type5	18	14	12	5227.2375	1
		Type5	19	12	12	5226.4375	1
		Type5	20	16	12	5291.5625	1
		Type5	21	12	12	5293.9625	1
		Type5	22	20	12	5289.5625	1
		Type5	23	14	12	5292.7625	1
		Type5	24	13	12	5293.1625	1
		Type5	25	8	12	5295.5625	1
		Type5	26	17	12	5291.1625	1
		Type5	27	19	12	5289.9625	1
		Type5	28	12	12	5293.5625	1
		Type5	29	18	12	5290.7625	1
	5500	Type5	0	15	12	5500	1
		Type5	1	8	12	5500	1
		Type5	2	11	12	5500	1
		Type5	3	20	12	5500	1
		Type5	4	17	12	5500	1
		Type5	5	14	12	5500	1
		Type5	6	15	12	5500	1
		Type5	7	12	12	5500	1
		Type5	8	14	12	5500	1
		Type5	9	8	12	5500	1
		Type5	10	17	12	5468.8375	1
		Type5	11	19	12	5470.0375	1
		Type5	12	15	12	5467.6375	1
		Type5	13	12	12	5466.4375	1
		Type5	14	19	12	5469.6375	1
		Type5	15	14	12	5467.2375	1
		Type5	16	20	12	5470.4375	1
		Type5	17	12	12	5466.4375	1
		Type5	18	14	12	5467.2375	1
		Type5	19	12	12	5466.4375	1
		Type5	20	16	12	5531.5625	1
		Type5	21	12	12	5533.9625	1
		Type5	22	20	12	5529.5625	1
		Type5	23	14	12	5532.7625	1

11AX40MI MO		Type5	24	13	12	5533.1625	1
		Type5	25	8	12	5535.5625	1
		Type5	26	17	12	5531.1625	0
		Type5	27	19	12	5529.9625	1
		Type5	28	12	12	5533.5625	1
		Type5	29	18	12	5530.7625	1
	5270	Type5	0	15	12	5270	0
		Type5	1	8	12	5270	1
		Type5	2	11	12	5270	1
		Type5	3	20	12	5270	1
		Type5	4	17	12	5270	1
		Type5	5	14	12	5270	1
		Type5	6	15	12	5270	0
		Type5	7	12	12	5270	1
		Type5	8	14	12	5270	1
		Type5	9	8	12	5270	1
		Type5	10	17	12	5258.271	1
		Type5	11	19	12	5259.471	1
		Type5	12	15	12	5257.071	1
		Type5	13	12	12	5255.871	1
		Type5	14	19	12	5259.071	1
		Type5	15	14	12	5256.671	1
		Type5	16	20	12	5259.871	1
		Type5	17	12	12	5255.871	1
		Type5	18	14	12	5256.671	1
		Type5	19	12	12	5255.871	1
		Type5	20	16	12	5282.129	1
		Type5	21	12	12	5284.529	1
		Type5	22	20	12	5280.129	1
		Type5	23	14	12	5283.329	1
		Type5	24	13	12	5283.729	1
		Type5	25	8	12	5286.129	1
		Type5	26	17	12	5281.729	1
		Type5	27	19	12	5280.529	1
		Type5	28	12	12	5284.129	1
		Type5	29	18	12	5281.329	1
	5510	Type5	0	15	12	5510	1
		Type5	1	8	12	5510	1
		Type5	2	11	12	5510	1
		Type5	3	20	12	5510	1
		Type5	4	17	12	5510	1
		Type5	5	14	12	5510	1
		Type5	6	15	12	5510	1
		Type5	7	12	12	5510	1
		Type5	8	14	12	5510	1
		Type5	9	8	12	5510	1
		Type5	10	17	12	5498.271	1
		Type5	11	19	12	5499.471	1
		Type5	12	15	12	5497.071	1
		Type5	13	12	12	5495.871	1
		Type5	14	19	12	5499.071	1
		Type5	15	14	12	5496.671	1
		Type5	16	20	12	5499.871	1
		Type5	17	12	12	5495.871	1
		Type5	18	14	12	5496.671	1
		Type5	19	12	12	5495.871	1
		Type5	20	16	12	5522.129	1
		Type5	21	12	12	5524.529	1

		Type5	22	20	12	5520.129	1
		Type5	23	14	12	5523.329	1
		Type5	24	13	12	5523.729	1
		Type5	25	8	12	5526.129	1
		Type5	26	17	12	5521.729	1
		Type5	27	19	12	5520.529	1
		Type5	28	12	12	5524.129	1
11AX80MI MO	5290	Type5	29	18	12	5521.329	1
		Type5	0	15	12	5290	1
		Type5	1	8	12	5290	1
		Type5	2	11	12	5290	1
		Type5	3	20	12	5290	1
		Type5	4	17	12	5290	1
		Type5	5	14	12	5290	1
		Type5	6	15	12	5290	1
		Type5	7	12	12	5290	1
		Type5	8	14	12	5290	1
		Type5	9	8	12	5290	1
		Type5	10	17	12	5257.2375	1
		Type5	11	19	12	5258.4375	1
		Type5	12	15	12	5256.0375	1
		Type5	13	12	12	5254.8375	1
		Type5	14	19	12	5258.0375	1
		Type5	15	14	12	5255.6375	1
		Type5	16	20	12	5258.8375	1
		Type5	17	12	12	5254.8375	1
		Type5	18	14	12	5255.6375	1
		Type5	19	12	12	5254.8375	1
		Type5	20	16	12	5323.1625	1
		Type5	21	12	12	5325.5625	1
		Type5	22	20	12	5321.1625	1
		Type5	23	14	12	5324.3625	1
		Type5	24	13	12	5324.7625	1
		Type5	25	8	12	5327.1625	1
		Type5	26	17	12	5322.7625	1
		Type5	27	19	12	5321.5625	1
		Type5	28	12	12	5325.1625	1
		Type5	29	18	12	5322.3625	1
	5530	Type5	0	15	12	5530	1
		Type5	1	8	12	5530	1
		Type5	2	11	12	5530	1
		Type5	3	20	12	5530	1
		Type5	4	17	12	5530	0
		Type5	5	14	12	5530	1
		Type5	6	15	12	5530	0
		Type5	7	12	12	5530	1
		Type5	8	14	12	5530	1
		Type5	9	8	12	5530	1
		Type5	10	17	12	5497.2375	1
		Type5	11	19	12	5498.4375	1
		Type5	12	15	12	5496.0375	1
		Type5	13	12	12	5494.8375	1
		Type5	14	19	12	5498.0375	1
		Type5	15	14	12	5495.6375	1
		Type5	16	20	12	5498.8375	1
		Type5	17	12	12	5494.8375	1
		Type5	18	14	12	5495.6375	1
		Type5	19	12	12	5494.8375	1

11AX160MI MO		Type5	20	16	12	5563.1625	1
		Type5	21	12	12	5565.5625	1
		Type5	22	20	12	5561.1625	1
		Type5	23	14	12	5564.3625	1
		Type5	24	13	12	5564.7625	1
		Type5	25	8	12	5567.1625	1
		Type5	26	17	12	5562.7625	1
		Type5	27	19	12	5561.5625	1
		Type5	28	12	12	5565.1625	1
		Type5	29	18	12	5562.3625	1
	5250	Type5	0	15	12	5260	1
		Type5	1	8	12	5260	1
		Type5	2	11	12	5260	1
		Type5	3	20	12	5260	1
		Type5	4	17	12	5260	1
		Type5	5	14	12	5260	1
		Type5	6	15	12	5260	1
		Type5	7	12	12	5260	1
		Type5	8	14	12	5260	1
		Type5	9	8	12	5260	1
		Type5	10	17	12	5228.8375	1
		Type5	11	19	12	5230.0375	1
		Type5	12	15	12	5227.6375	1
		Type5	13	12	12	5226.4375	1
		Type5	14	19	12	5229.6375	1
		Type5	15	14	12	5227.2375	1
		Type5	16	20	12	5230.4375	1
		Type5	17	12	12	5226.4375	1
		Type5	18	14	12	5227.2375	1
		Type5	19	12	12	5226.4375	1
		Type5	20	16	12	5291.5625	1
		Type5	21	12	12	5293.9625	1
		Type5	22	20	12	5289.5625	1
		Type5	23	14	12	5292.7625	1
		Type5	24	13	12	5293.1625	1
		Type5	25	8	12	5295.5625	1
		Type5	26	17	12	5291.1625	1
		Type5	27	19	12	5289.9625	1
		Type5	28	12	12	5293.5625	1
		Type5	29	18	12	5290.7625	1
	5570	Type5	0	15	12	5570	1
		Type5	1	8	12	5570	1
		Type5	2	11	12	5570	1
		Type5	3	20	12	5570	1
		Type5	4	17	12	5570	1
		Type5	5	14	12	5570	1
		Type5	6	15	12	5570	1
		Type5	7	12	12	5570	1
		Type5	8	14	12	5570	1
		Type5	9	8	12	5570	1
		Type5	10	17	12	5538.8375	1
		Type5	11	19	12	5540.0375	1
		Type5	12	15	12	5537.6375	1
		Type5	13	12	12	5536.4375	1
		Type5	14	19	12	5539.6375	1
		Type5	15	14	12	5537.2375	1
		Type5	16	20	12	5540.4375	1
		Type5	17	12	12	5536.4375	1

	Type5	18	14	12	5537.2375	1
	Type5	19	12	12	5536.4375	1
	Type5	20	16	12	5601.5625	1
	Type5	21	12	12	5603.9625	1
	Type5	22	20	12	5599.5625	1
	Type5	23	14	12	5602.7625	1
	Type5	24	13	12	5603.1625	1
	Type5	25	8	12	5605.5625	1
	Type5	26	17	12	5601.1625	1
	Type5	27	19	12	5599.9625	1
	Type5	28	12	12	5603.5625	1
	Type5	29	18	12	5600.7625	1

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
	5500	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AX40MI MO	5270	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
	5510	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---

		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11AX80MI MO	5290	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
	5530	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
11AX160MI MO	5250	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
	5570	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---

	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
	5500	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
11AX40MI MO	5270	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
	5510	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AX80MI MO	5290	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
	5530	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AX160MI MO	5250	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0

	5570	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
	5500	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AX40MI MO	5270	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
	5510	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AX80MI MO	5290	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---

	5530	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11AX160MI MO	5250	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
	5570	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
	5500	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AX40MI MO	5270	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---

11AX80MI MO	5510	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
	5510	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
	5290	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
	5530	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0

		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AX160MI MO		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
	5250	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
	5570	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
	5500	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AX40MI MO	5270	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
	5510	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---

		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AX80MI MO	5290	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
	5530	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AX160MI MO	5250	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---

		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
	5570	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
	5500	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AX40MI MO	5270	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
	5510	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---

11AX80MI MO	5290	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
	5530	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11AX160MI MO	5250	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
	5570	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
	5500	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11AX40MI MO	5270	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
	5510	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0

		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AX80MI MO	5290	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
	5530	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11AX160MI MO	5250	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
	5570	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0

	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
	5500	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AX40MI MO	5270	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
	5510	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AX80MI MO	5290	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---

		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
	5530	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
	5250	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
	5570	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
	5500	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AX40MI MO	5270	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
	5510	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0

11AX80MI MO	5290	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
	5530	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AX160MI MO	5250	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
	5570	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
	5500	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
11AX40MI MO	5270	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
	5510	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AX80MI MO	5290	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
	5530	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11AX160MI MO	5250	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0

	5570	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
	5500	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11AX40MI MO	5270	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
	5510	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---

		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AX80MI MO	5290	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
	5530	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11AX160MI MO	5250	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---

		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
	5570	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
	5500	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AX40MI MO	5270	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---

	5510	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11AX80MI MO	5290	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
	5530	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---

11AX160MI MO	5250	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
	5570	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
	5500	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AX40MI MO	5270	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
	5510	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---

		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AX80MI MO	5290	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
	5530	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
11AX160MI MO	5250	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
	5570	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---

	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
	5500	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AX40MI MO	5270	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
	5510	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AX80MI MO	5290	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0

		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
	5530	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AX160MI MO	5250	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
	5570	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
	5500	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11AX40MI MO	5270	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---

		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
	5510	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
11AX80MI MO	5290	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
	5530	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---

11AX160MI MO	5250	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
	5570	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
	5500	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AX40MI MO	5270	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
	5510	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---

11AX80MI MO	5290	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
	5530	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AX160MI MO	5250	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
	5570	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
	5500	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AX40MI MO	5270	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---

11AX80MI MO	5510	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
	5290	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
	5530	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---

		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11AX160MI MO	5250	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
	5570	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
	5500	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AX40MI MO	5270	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
	5510	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11AX80MI MO	5290	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0

		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
	5530	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AX160MI MO	5250	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
	5570	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
	5500	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11AX40MI MO	5270	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
	5510	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---

11AX80MI MO	5290	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
	5530	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AX160MI MO	5250	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
	5570	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
	5500	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
11AX40MI MO	5270	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
	5510	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AX80MI MO	5290	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0

		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
	5530	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AX160MI MO	5250	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
	5570	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
	5500	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
11AX40MI MO	5270	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
	5510	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---

		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AX80MI MO	5290	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
	5530	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11AX160MI MO	5250	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---

	5570	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
	5500	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AX40MI MO	5270	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
	5510	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AX80MI MO	5290	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---

		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
	5530	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
	11AX160M IMO	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
	5570	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
	5500	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AX40MI MO	5270	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---

11AX80MI MO	5510	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
	5290	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
	5530	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0

		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AX160MI MO	5250	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
	5570	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
	5500	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AX40MI MO	5270	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
	5510	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0

11AX80MI MO	5290	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
	5530	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11AX160M IMO	5250	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
	5570	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
	5500	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
11AX40MI MO	5270	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
	5510	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11AX80MI MO	5290	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0

		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
	5530	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
	11AX160MI MO	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
	5570	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
	5500	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AX40MI MO	5270	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
	5510	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AX80MI MO	5290	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
	5530	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AX160MI MO	5250	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---

	5570	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
	5500	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AX40MI MO	5270	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
	5510	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0

		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11AX80MI MO	5290	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
	5530	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11AX160MI MO	5250	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0

		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
	5570	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
	5500	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11AX40MI MO	5270	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---

	5510	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11AX80MI MO	5290	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
	5530	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---

11AX160MI MO	5250	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
	5570	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
	5500	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
11AX40MI MO	5270	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
	5510	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AX80MI MO	5290	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---

		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
	5530	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AX160MI MO	5250	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
	5570	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
	5500	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AX40MI MO	5270	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0

	5510	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AX80MI MO	5290	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
	5530	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AX160MI MO	5250	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---

		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
	5570	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---

Test Mode	Frequency [MHz]	Radar Type	Trial ID	Pulse width (μs)	PRI (μs)	Pulses per Hop	Detection (1: Yes; 0: No)
11AX20MI MO	5260	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5500	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1

11AX40MI MO		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5270	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5510	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	0
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1

		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
11AX80MI MO	5290	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5530	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1

11AX160MI MO		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	0
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5250	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	0
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5570	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1

	Type6	19	1	333.3	9	1
	Type6	20	1	333.3	9	1
	Type6	21	1	333.3	9	1
	Type6	22	1	333.3	9	1
	Type6	23	1	333.3	9	1
	Type6	24	1	333.3	9	1
	Type6	25	1	333.3	9	1
	Type6	26	1	333.3	9	1
	Type6	27	1	333.3	9	1
	Type6	28	1	333.3	9	1
	Type6	29	1	333.3	9	1


Bridge Mode:


Test Mode	Frequency [MHz]	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AX160MI MO	5570	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	0
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	0
		Type1	14	1.0	558.0	95	0
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1


Appendix G: Channel Loading**Test Result**


Test Mode	Frequency[MHz]	Result[%]	Limit [%]	Verdict
11AX20SISO	5260	23.24	17	PASS
	5500	21.15	17	PASS
11AX40SISO	5270	17.26	17	PASS
	5510	38.78	17	PASS
11AX80SISO	5290	35.06	17	PASS
	5530	18.5	17	PASS
11AX160SISO	5250	30.65	17	PASS
	5570	22.84	17	PASS

Test Graphs

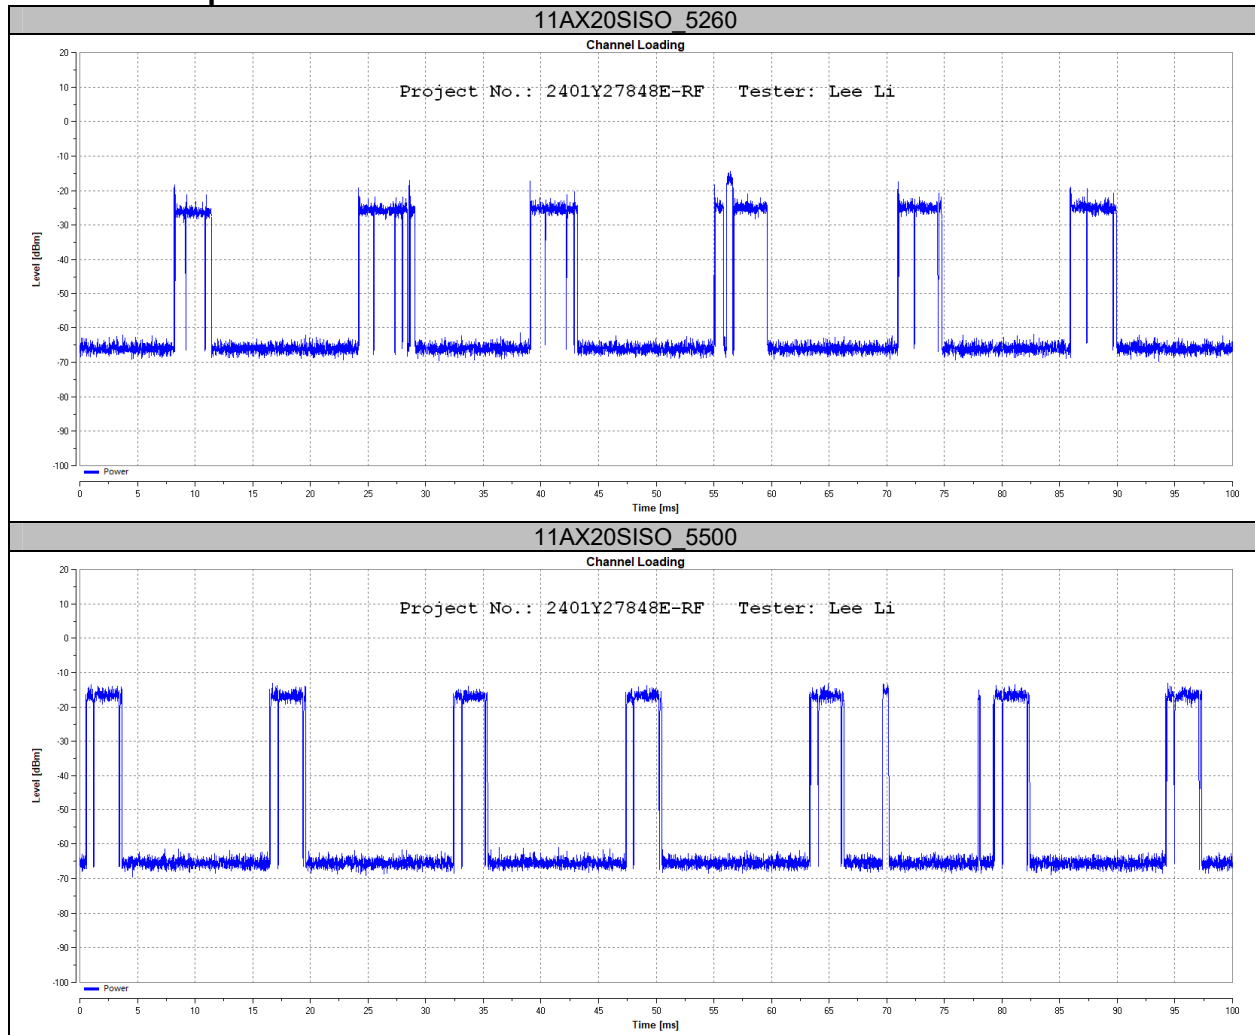

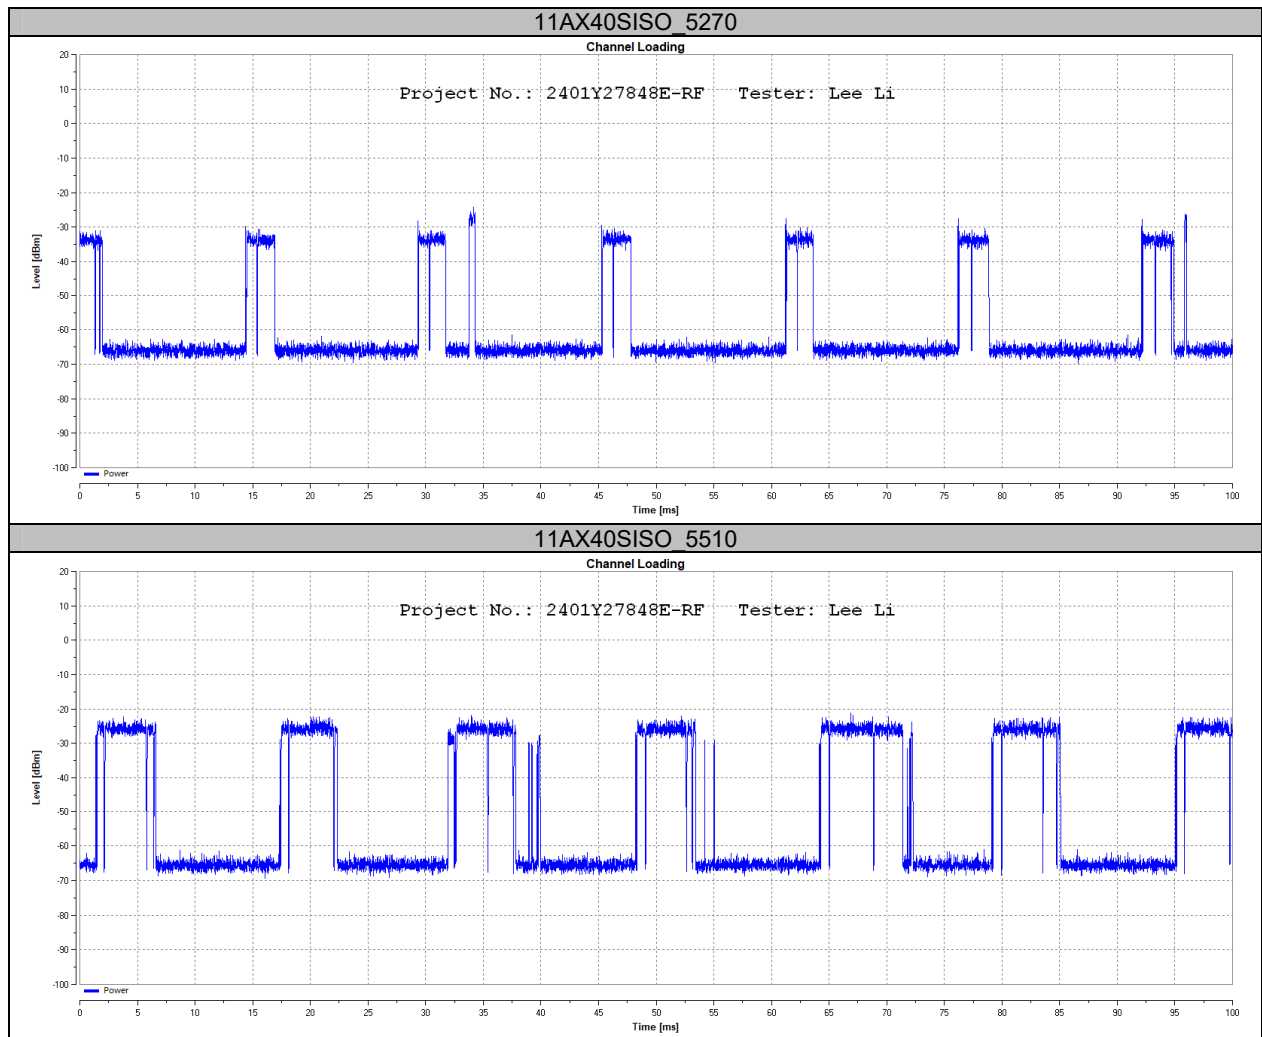

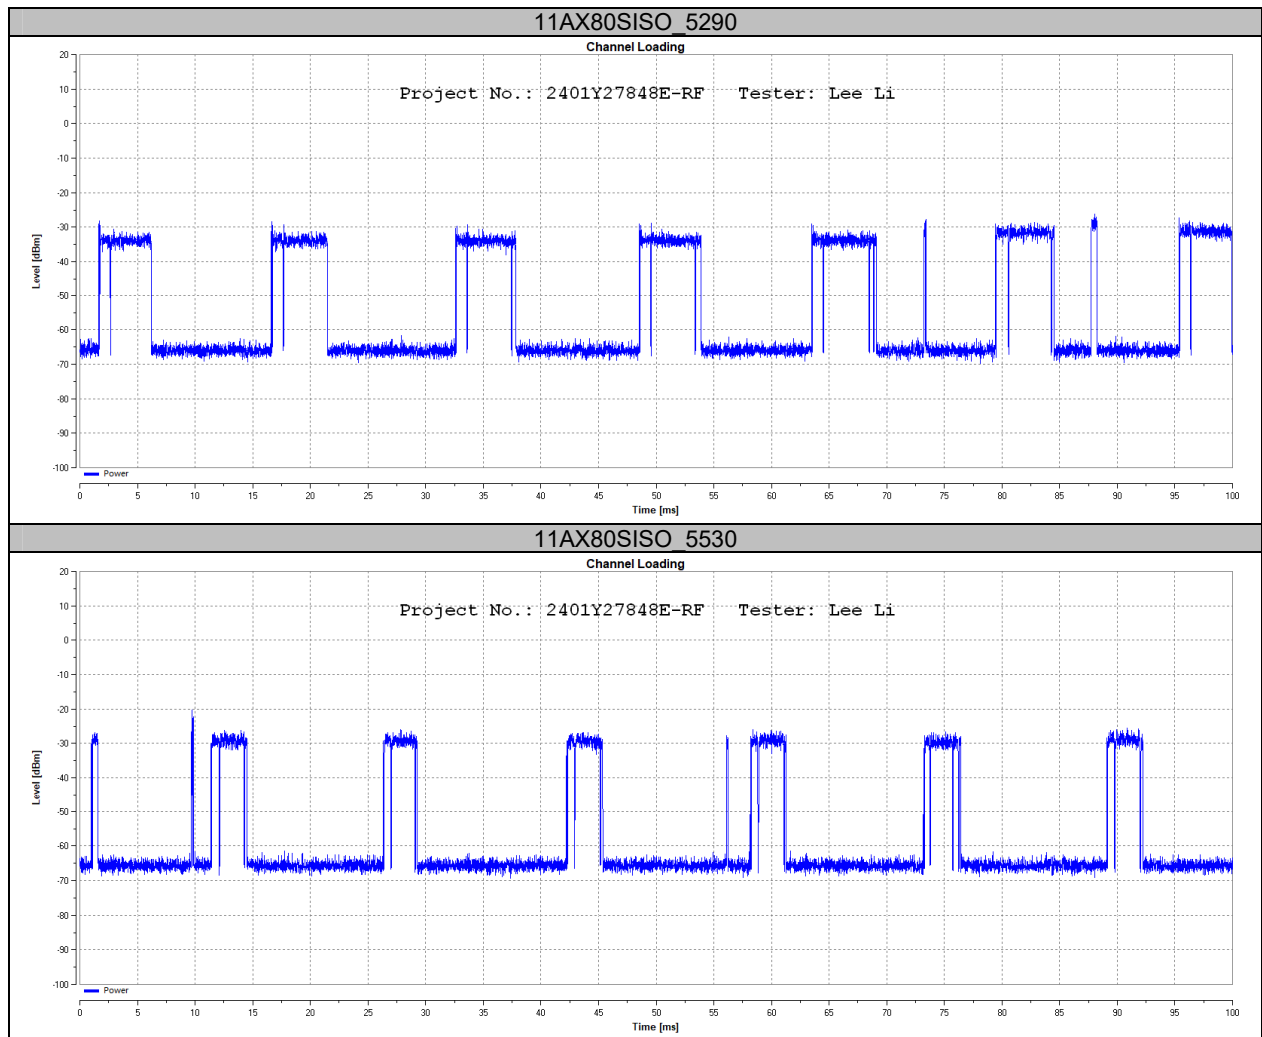

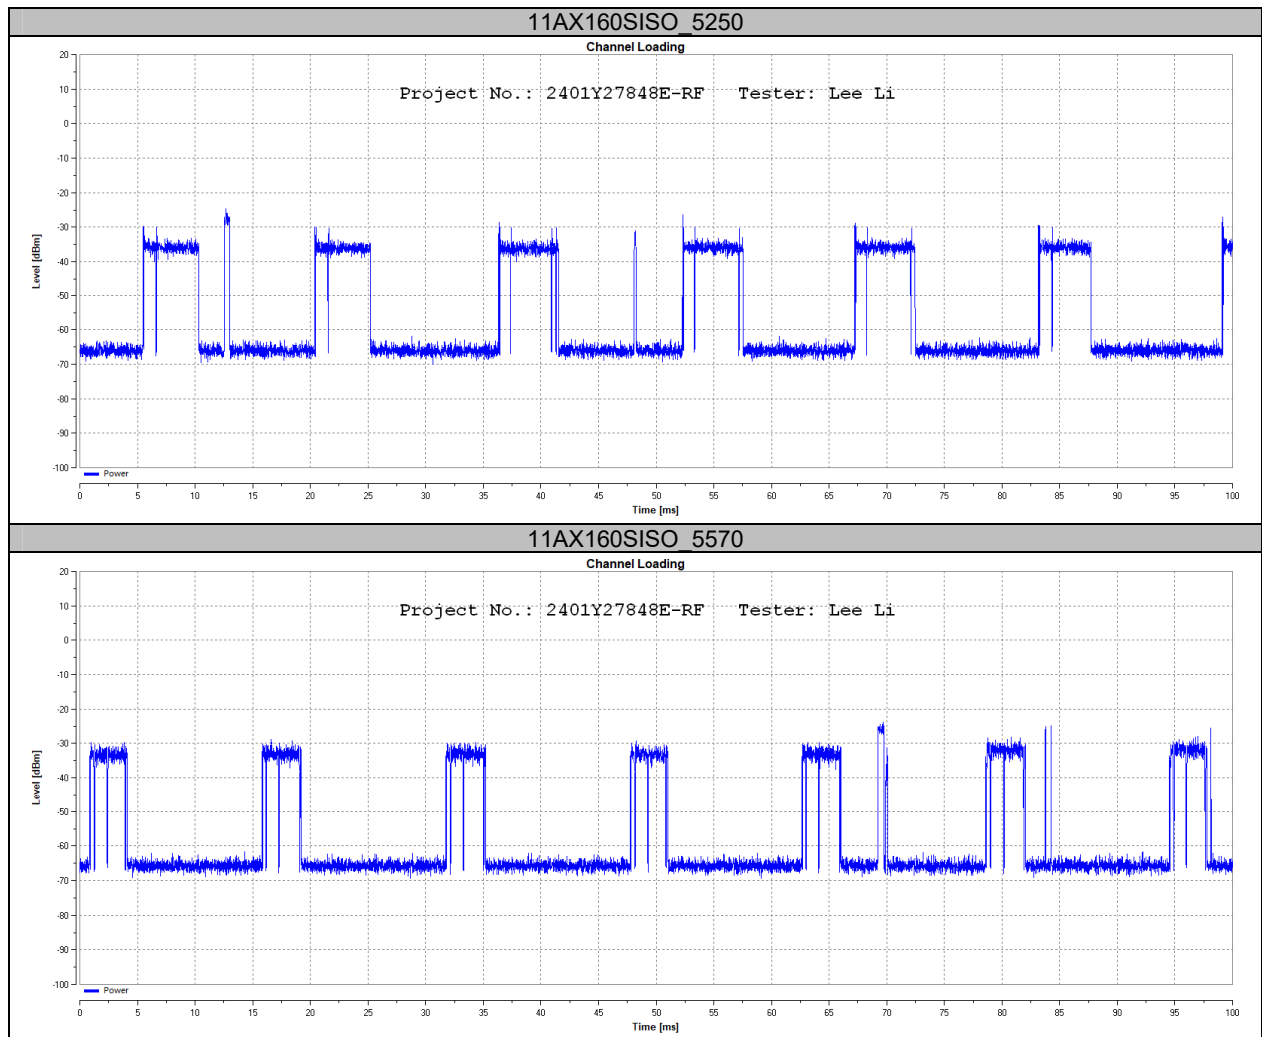

******* END OF REPORT *******