



Certificate #4312.01

FCC & ISSED TEST REPORT

Product Name: 24-Port Unmanaged Gigabit Switch
Trade Mark: GRANDSTREAM
Model No. / HVIN: GWN7703
Add. Model No. / HVIN: N/A
Report Number: 2305045032EMC-1
Test Standards: FCC 47 CFR Part 15 Subpart B
ICES-003 Issue 7
FCC ID: YZZGWN7703
Test Result: PASS
Date of Issue: June 26, 2023

Prepared for:

Grandstream Networks, Inc.
126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888**FAX: +86-755-2823 0886**

Prepared by:

Dylan Zhang
Senior Project Engineer

Reviewed by:

Henry Lu
Team Leader

Approved by:

Kevin Liang
Assistant Manager

Date:

June 26, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Version

Version No.	Date	Description
V1.0	June 26, 2023	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

CONTENTS

1. GENERAL INFORMATION.....	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION.....	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 DESCRIPTION OF SUPPORT UNITS.....	4
1.4 TEST LOCATION	5
1.5 TEST FACILITY	5
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	5
1.9 MEASUREMENT UNCERTAINTY.....	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST.....	8
4. TEST CONFIGURATION.....	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE.....	9
4.2 TEST MODES	9
4.3 TEST SETUP	10
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4 SYSTEM TEST CONFIGURATION	11
5. REFERENCE DOCUMENTS FOR TESTING.....	11
6. EMC REQUIREMENTS SPECIFICATION.....	12
6.1 RADIATED EMISSION.....	12
6.2 CONDUCTED EMISSION	26
APPENDIX 1 PHOTOS OF TEST SETUP	33
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....	33

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Grandstream Networks, Inc.
Address of Applicant:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Manufacturer:	Grandstream Networks, Inc.
Address of Manufacturer:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	24-Port Unmanaged Gigabit Switch
Model No. / HVIN:	GWN7703
Add. Model No. / HVIN:	N/A
Trade Mark:	GRANDSTREAM
DUT Stage:	Production Unit
Rated Voltage:	100-240V~ 50/60Hz 1.5A
Classification of digital devices:	Class A
Highest Internal Frequency:	500 MHz
Software Version:	N/A (Provided by the customer)
Hardware Version:	V1.0 (Provided by the customer)
Sample Received Date:	April 13, 2023
Sample Tested Date:	May 12, 2023 to May 18, 2023
Note: This product can configure with three different power modules: Build-in Power 1: GQ18-120150-OP; Build-in Power 2: R0099 Build-in Power 3: B18P1200150A	
Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.	

1.2.2 Description of Accessories

Cable	
Description:	AC Power Cable
Cable Type:	Unshielded without ferrite
Length:	1.2 Meter

1.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	LENOVO	E450	PF-0EQBE3 15/11	UnionTrust
Notebook	LENOVO	E450	PF-09ELQF 15/06	UnionTrust
Mouse	Lenovo	N/A	SZDH-OP303-305-P-800D PI-200701	UnionTrust
Mouse	DELL	MS111-T	CN-0KW2YH-71616-5AH-0 SV7	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1~22	Ethernet Cable	RJ45	1 meter Unshielded without ferrite	UnionTrust
23~24	Ethernet Cable	RJ45	3.0 Unshielded without ferrite	UnionTrust

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart B Test Cases			
Test Item	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15.107 ICES-003 Issue 7 Section 3.2.1	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109 ICES-003 Issue 7 Section 3.2.2	ANSI C63.4-2014	PASS



3. EQUIPMENT LIST

Radiated Emission Test - 3M Chamber						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m Chamber & Accessory Equipment	ETS-Lindgren	3m	Euroshiedpn-CT 001270-1317	22-Jan-2021	21-Jan-2024
☒	Broadband Antenna	ETS-Lindgren	3142E	00201566	13-Dec-2022	12-Dec-2023
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	13-Dec-2022	12-Dec-2023
☒	Pre-amplifier	HP	8447F	2805A02960	1-Nov-2022	31-Oct-2023
☒	Receiver	ROHDE & SCHWARZ	ESIB26	100114	3-Nov-2022	2-Nov-2023
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	16- Apr-2022	15- Apr-2024
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	1-Nov-2022	31-Oct-2023
☒	Multi device Controller	ETS-Lindgren	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	LISN	R&S	ESH2-Z5	860014/024	1-Nov-2022	31-Oct-2023
☒	LISN	ETS-Lindgren	3816/2SH	00201088	1-Nov-2022	31-Oct-2023
☒	Receiver	R&S	ESR7	101181	1-Nov-2022	31-Oct-2023
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	1-Nov-2022	31-Oct-2023
☒	Shielding room	ETS-Lindgren	843	Euroshiedpn-CT001270-1246	5-Nov-2021	4-Nov-2024
☒	Test Software	Audix	e3	Software Version: 9 20151119i		

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	1: AC 120V/60Hz 2: AC 240V/50Hz	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)	Sample No.	Tested by
Conducted Emission	25.2	64.0	100.0	S202304131 351-ZJA01/2	Lucas Ouyang
Radiated Emission	22.5	56.2	99.2		Yana Zeng

4.2 TEST MODES

Test Item	EMI Test Modes
Radiated Emission	Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission Test Mode 2: AC240V/50Hz (Build-in Power 1) + LAN Port Loop transmission Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission Test Mode 4: AC240V/50Hz (Build-in Power 2) + LAN Port Loop transmission Test Mode 5: AC120V/60Hz (Build-in Power 3) + LAN Port Loop transmission Test Mode 6: AC240V/50Hz (Build-in Power 3) + LAN Port Loop transmission
Conducted Emission	Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission Test Mode 2: AC240V/50Hz (Build-in Power 1) + LAN Port Loop transmission Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission Test Mode 4: AC240V/50Hz (Build-in Power 2) + LAN Port Loop transmission Test Mode 5: AC120V/60Hz (Build-in Power 3) + LAN Port Loop transmission Test Mode 6: AC240V/50Hz (Build-in Power 3) + LAN Port Loop transmission

4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

Figure 1. 30MHz to 1GHz



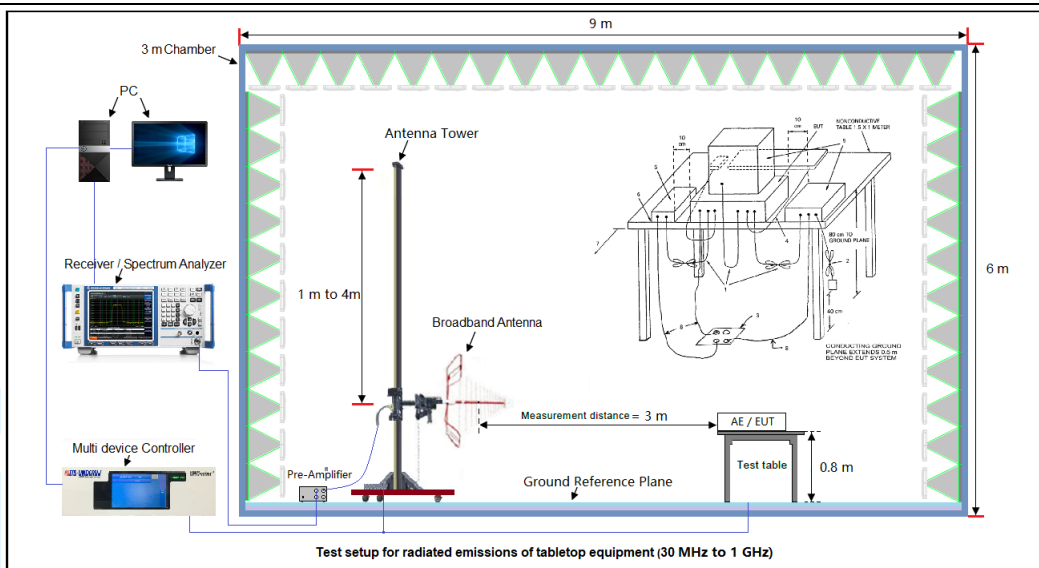


Figure 2. Above 1GHz

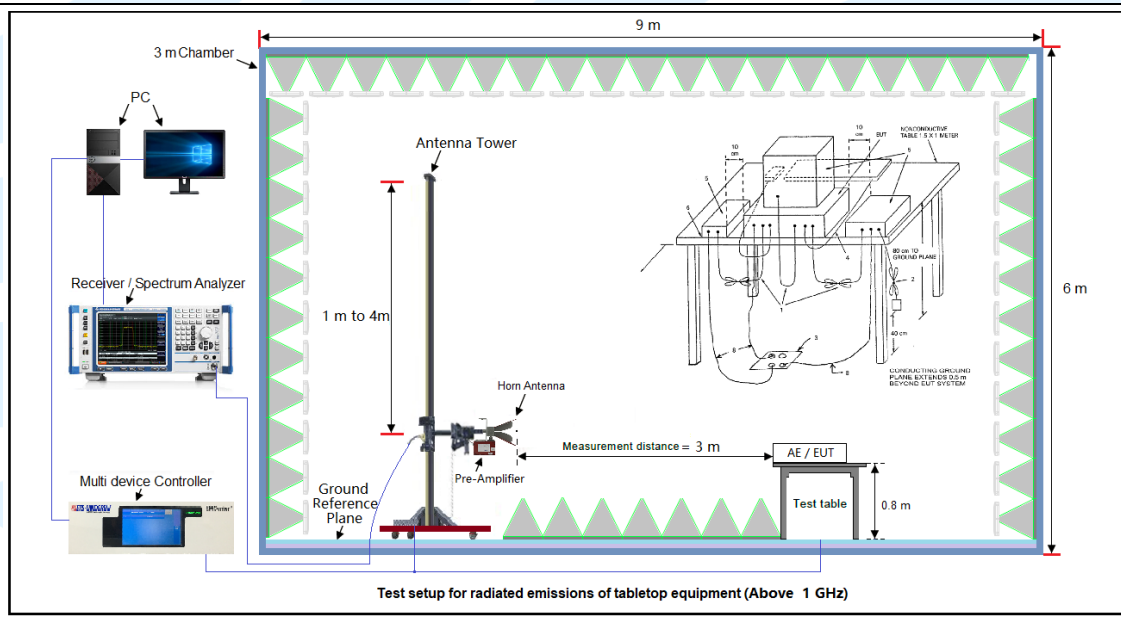

4.3.2 For Conducted Emissions test setup

Figure 3. Conducted Emissions setup

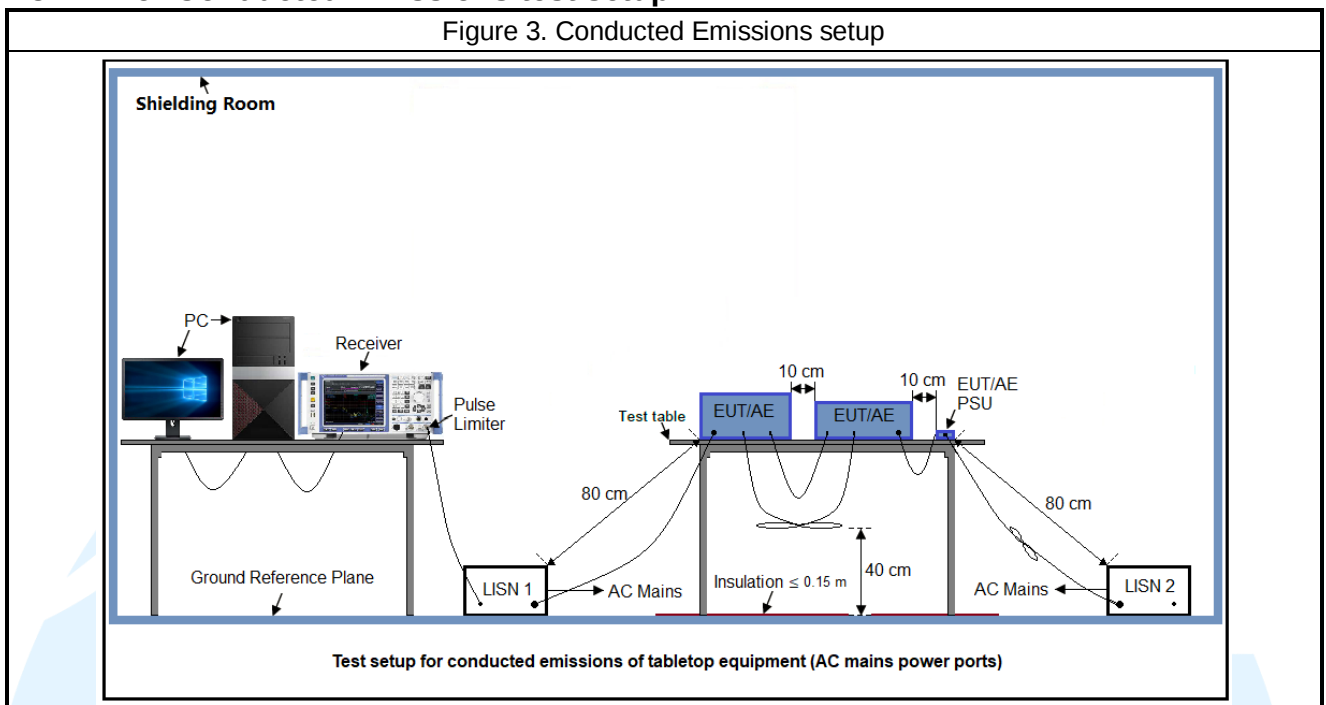

4.4 SYSTEM TEST CONFIGURATION

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic (according to KDB 896810 D02 SDoC FAQ v01r01) of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ICES-003 Issue 7	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
4	KDB 174176 D01 Line Conducted FAQ v01r01	AC power-line conducted emission frequency asked questions
5	KDB 896810 D02 SDoC FAQ v01r02	Supplier's Declaration of Conformity frequency asked questions

6. EMC REQUIREMENTS SPECIFICATION

6.1 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15.109
ICES-003 Issue 7 Clause 3.2.2

Test Method: ANSI C63.4-2014

Receiver Setup:

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

Measured frequency range

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Limits:

Limits for Class A devices

FCC 47 CFR Part 15 Subpart B

Frequency (MHz)	limits at 3 m (dBμV/m)		
	QP Detector	PK Detector	AV Detector
30-88	49.5	--	--
88-216	54.0	--	--
216-960	56.9	--	--
960 to 1000	60.0	--	--
Above 1000	--	80.0	60.0

ICES-003 Issue 7

Frequency (MHz)	limits at 3 m (dBμV/m)		
	QP Detector	PK Detector	AV Detector
30 – 88	50.0	--	--
88 – 216	54.0	--	--
216 – 230	56.9	--	--
230 – 960	57.0	--	--
960 – 1000	60.0	--	--
Above 1000	--	80	60

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBμV/m) = 20 log Emission level (μV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.3.1 for details.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Test Procedures:**1. From 30 MHz to 1GHz test procedure as below:**

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

2. Above 1GHz test procedure as below:

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Equipment Used: Refer to section 3 for details.

Test Result: Pass


The measurement data as follows:

The measurement data for FCC 47 CFR Part 15 Subpart B as follows:


Below 1GHz (Quasi Peak):

Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission

Horizontal

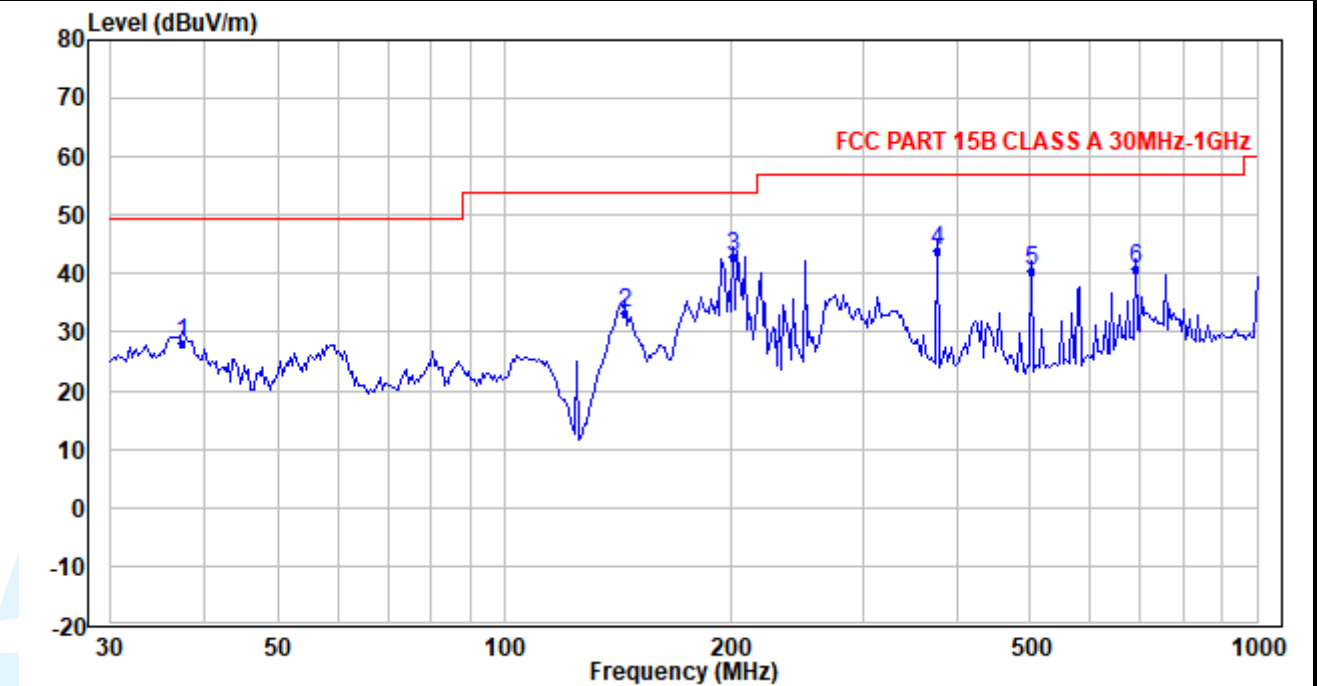


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	37.302	34.51	-6.28	28.23	49.50	-21.27	QP
2	144.790	48.52	-15.26	33.26	54.00	-20.74	QP
3	201.454	53.23	-10.45	42.78	54.00	-11.22	QP
4	376.523	49.24	-5.16	44.08	56.90	-12.82	QP
5	502.247	42.69	-2.35	40.34	56.90	-16.56	QP
6	689.051	39.27	1.43	40.70	56.90	-16.20	QP

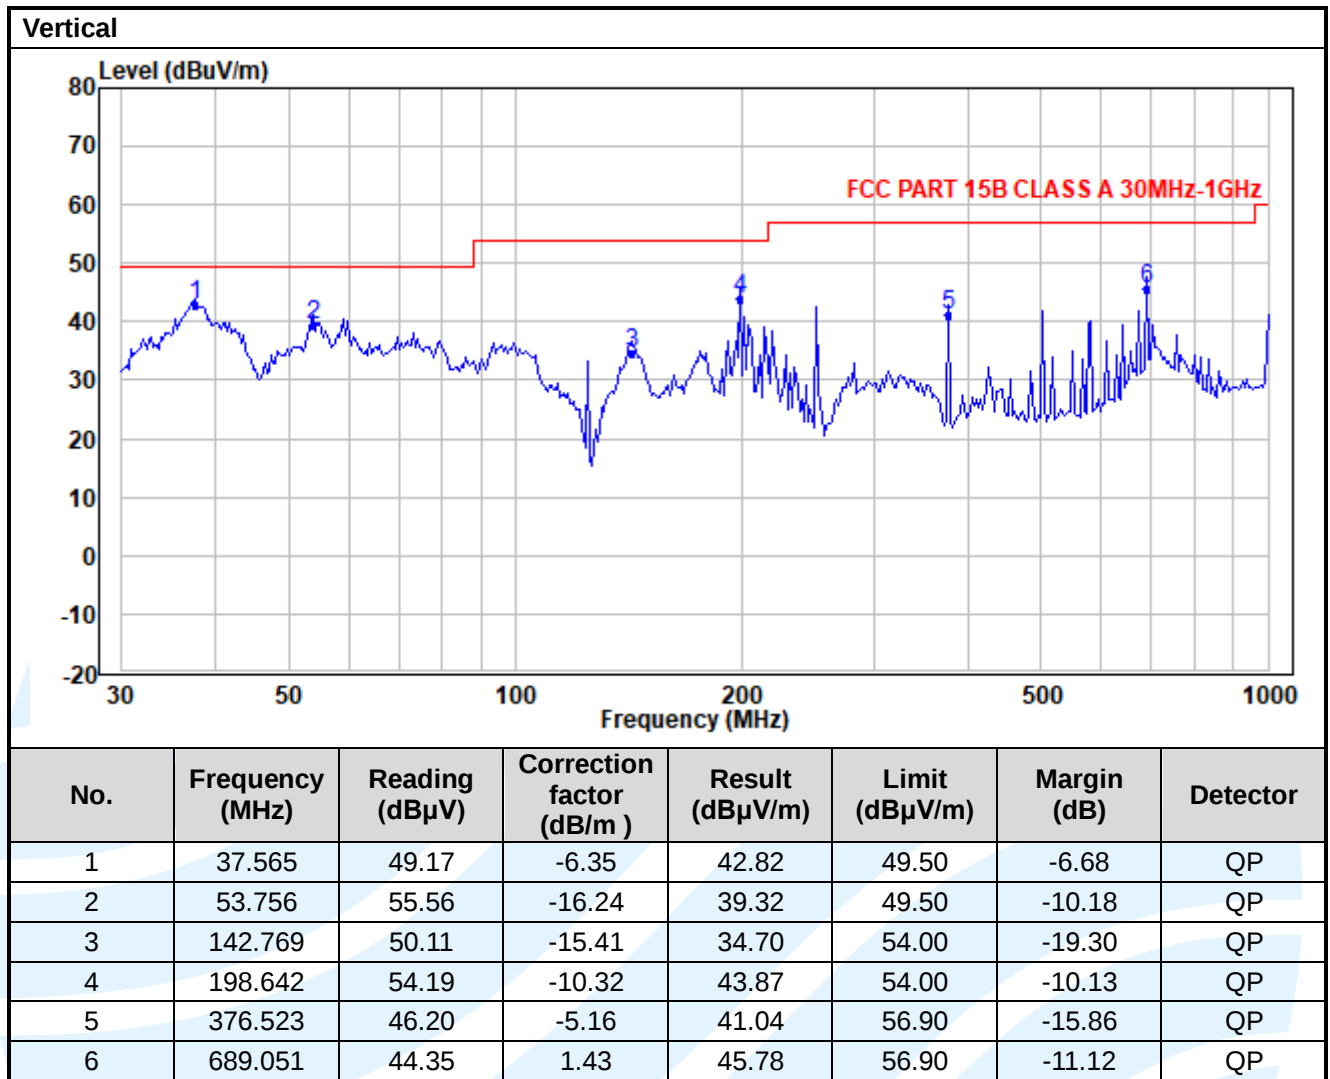

Below 1GHz (Quasi Peak):


Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission

Horizontal

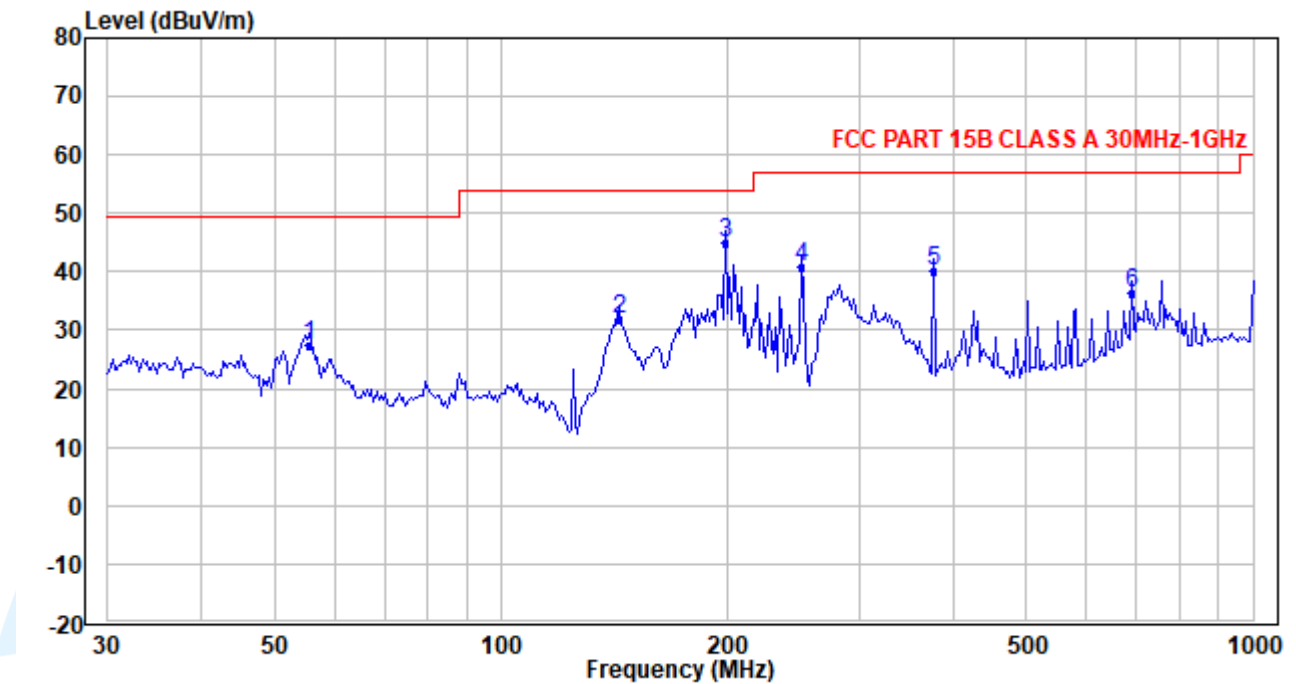

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	55.678	44.51	-16.95	27.56	49.50	-21.94	QP
2	143.776	47.25	-15.35	31.90	54.00	-22.10	QP
3	198.642	55.33	-10.32	45.01	54.00	-8.99	QP
4	250.486	49.53	-8.82	40.71	56.90	-16.19	QP
5	376.523	45.44	-5.16	40.28	56.90	-16.62	QP
6	689.051	34.99	1.43	36.42	56.90	-20.48	QP

Vertical

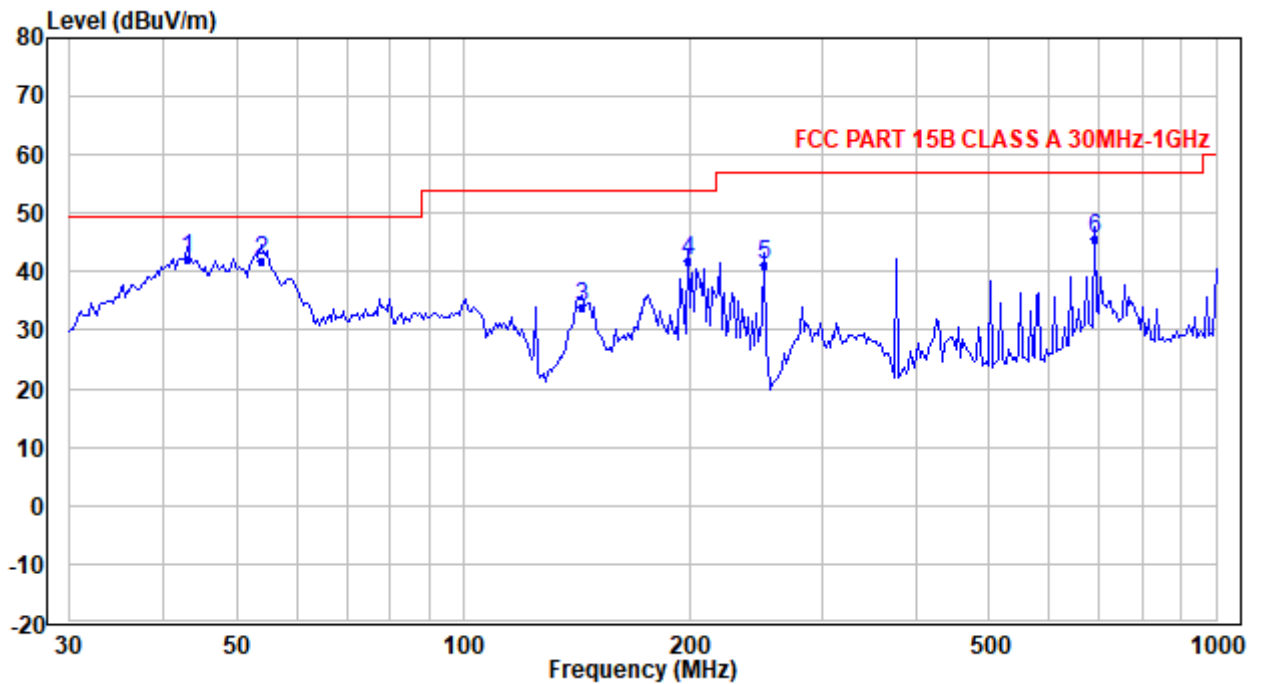

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	42.931	51.55	-9.40	42.15	49.50	-7.35	QP
2	53.756	57.94	-16.24	41.70	49.50	-7.80	QP
3	143.776	49.42	-15.35	34.07	54.00	-19.93	QP
4	198.642	52.20	-10.32	41.88	54.00	-12.12	QP
5	250.486	50.04	-8.82	41.22	56.90	-15.68	QP
6	689.051	44.38	1.43	45.81	56.90	-11.09	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Below 1GHz (Quasi Peak):


Test Mode 5: AC120V/60Hz (Build-in Power 3) + LAN Port Loop transmission

Horizontal

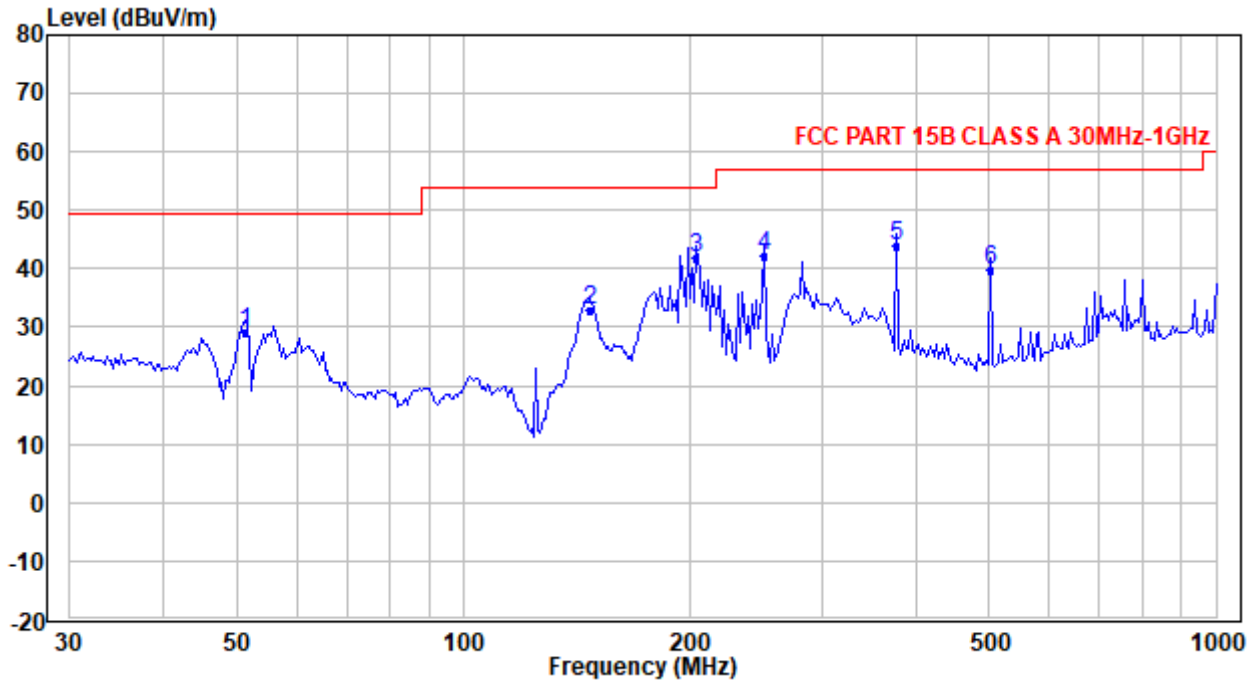

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	51.176	44.19	-15.04	29.15	49.50	-20.35	QP
2	146.839	47.81	-14.94	32.87	54.00	-21.13	QP
3	204.305	52.36	-10.54	41.82	54.00	-12.18	QP
4	250.486	51.14	-8.82	42.32	56.90	-14.58	QP
5	376.523	49.23	-5.16	44.07	56.90	-12.83	QP
6	502.247	42.04	-2.35	39.69	56.90	-17.21	QP

Vertical

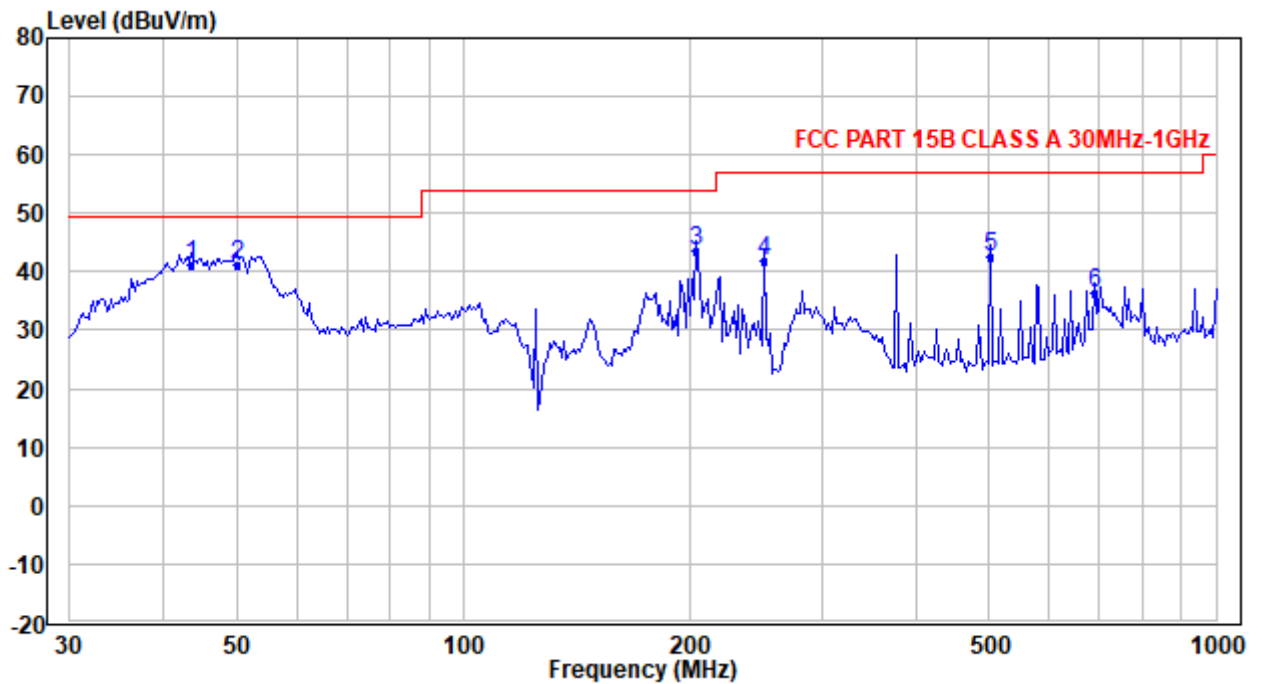

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	43.538	51.37	-10.14	41.23	49.50	-8.27	QP
2	50.108	56.09	-14.89	41.20	49.50	-8.30	QP
3	204.305	53.97	-10.54	43.43	54.00	-10.57	QP
4	250.486	50.79	-8.82	41.97	56.90	-14.93	QP
5	502.247	44.79	-2.35	42.44	56.90	-14.46	QP
6	689.051	34.78	1.43	36.21	56.90	-20.69	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Above 1GHz (Peak & Average)

Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission
Horizontal

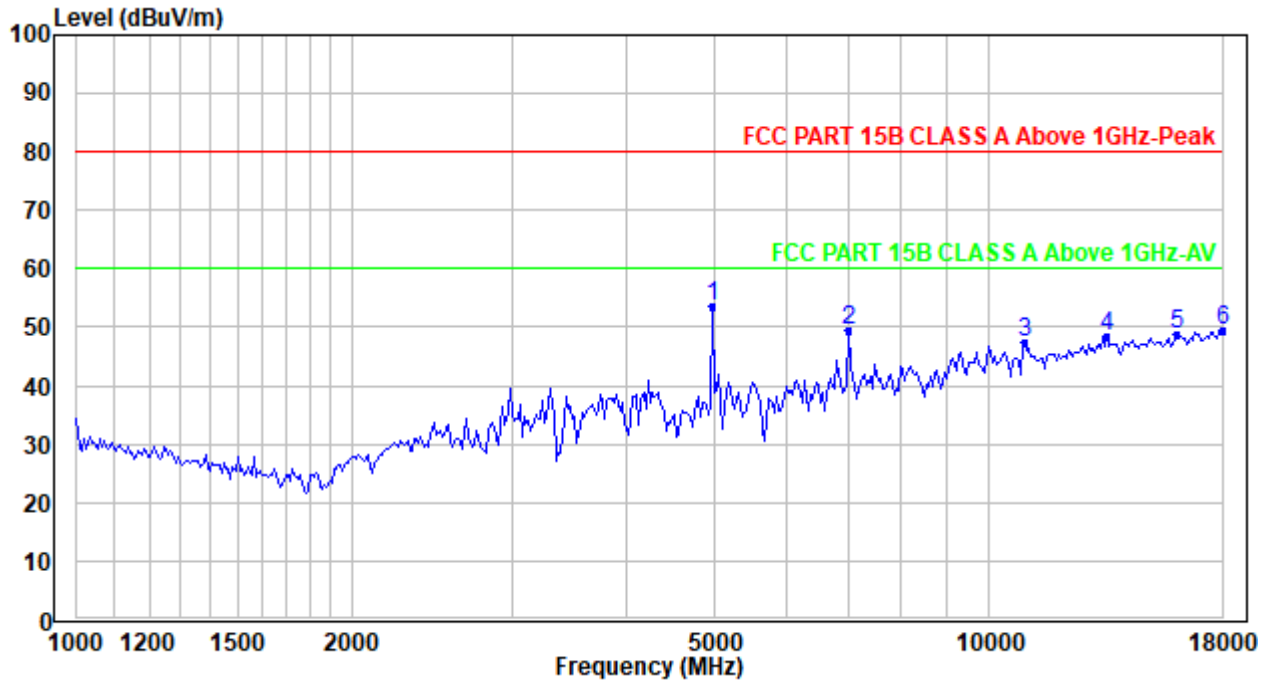

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4975.247	55.79	-2.26	53.53	80.00	-26.47	Peak
2	7002.185	47.83	1.49	49.32	80.00	-30.68	Peak
3	10937.880	40.11	7.38	47.49	80.00	-32.51	Peak
4	13473.910	36.51	11.93	48.44	80.00	-31.56	Peak
5	16031.010	37.08	11.85	48.93	80.00	-31.07	Peak
6	18000.000	34.08	15.41	49.49	80.00	-30.51	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Vertical

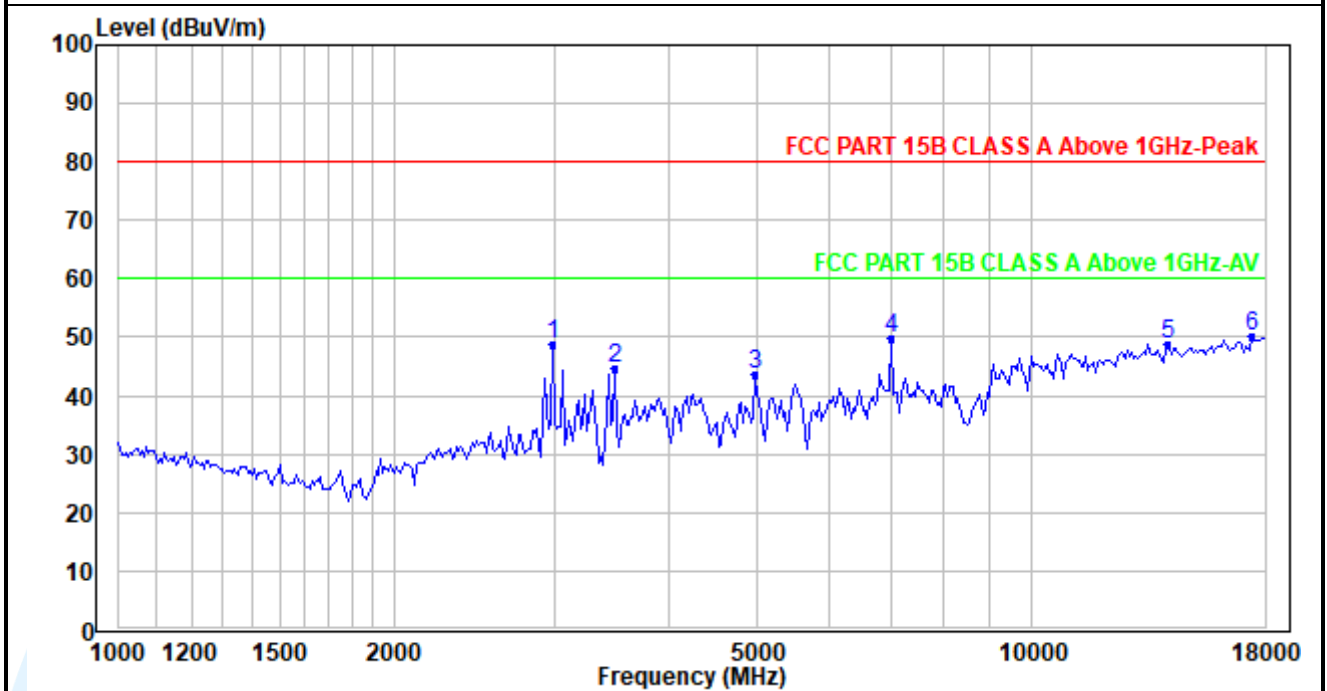

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2988.436	55.62	-6.85	48.77	80.00	-31.23	Peak
2	3494.334	49.51	-4.72	44.79	80.00	-35.21	Peak
3	4975.247	45.82	-2.26	43.56	80.00	-36.44	Peak
4	7002.185	48.47	1.49	49.96	80.00	-30.04	Peak
5	14112.970	36.76	11.95	48.71	80.00	-31.29	Peak
6	17385.170	36.57	13.46	50.03	80.00	-29.97	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2


Below 1GHz (Quasi Peak):

Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission

Horizontal

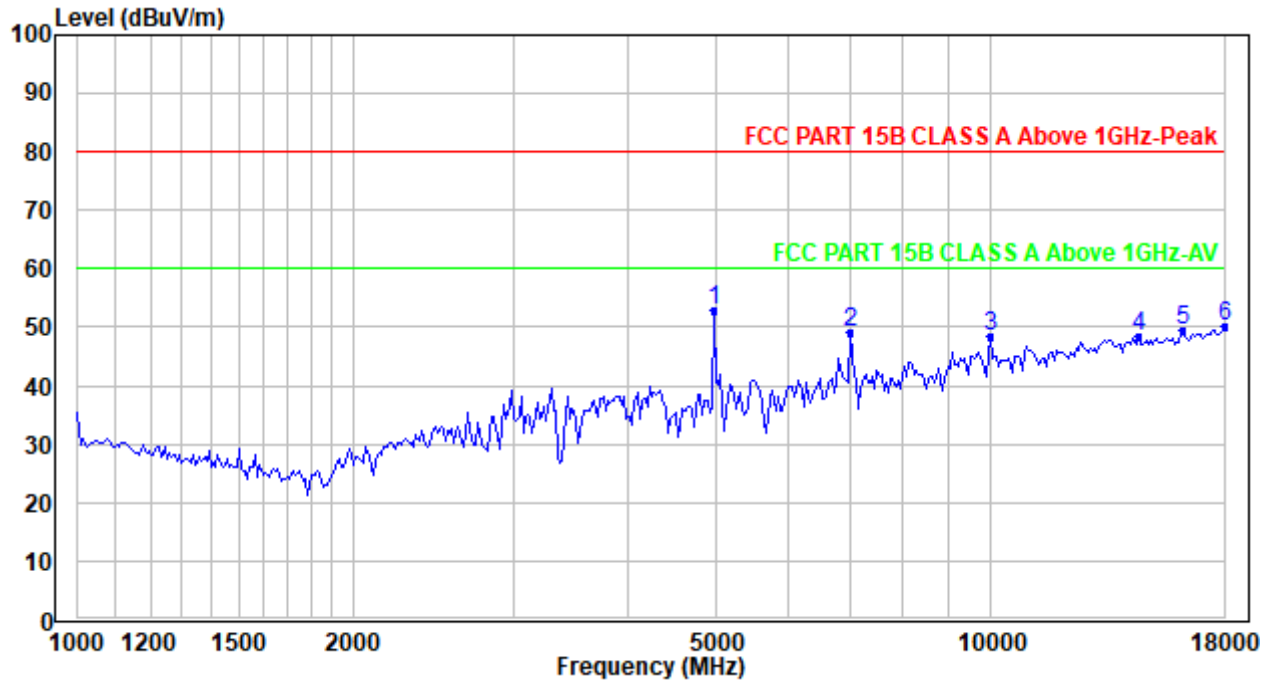


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4975.247	55.12	-2.26	52.86	80.00	-27.14	Peak
2	7002.185	47.53	1.49	49.02	80.00	-30.98	Peak
3	9969.738	42.92	5.66	48.58	80.00	-31.42	Peak
4	14527.680	36.12	12.17	48.29	80.00	-31.71	Peak
5	16217.810	37.39	12.02	49.41	80.00	-30.59	Peak
6	18000.000	34.66	15.41	50.07	80.00	-29.93	Peak

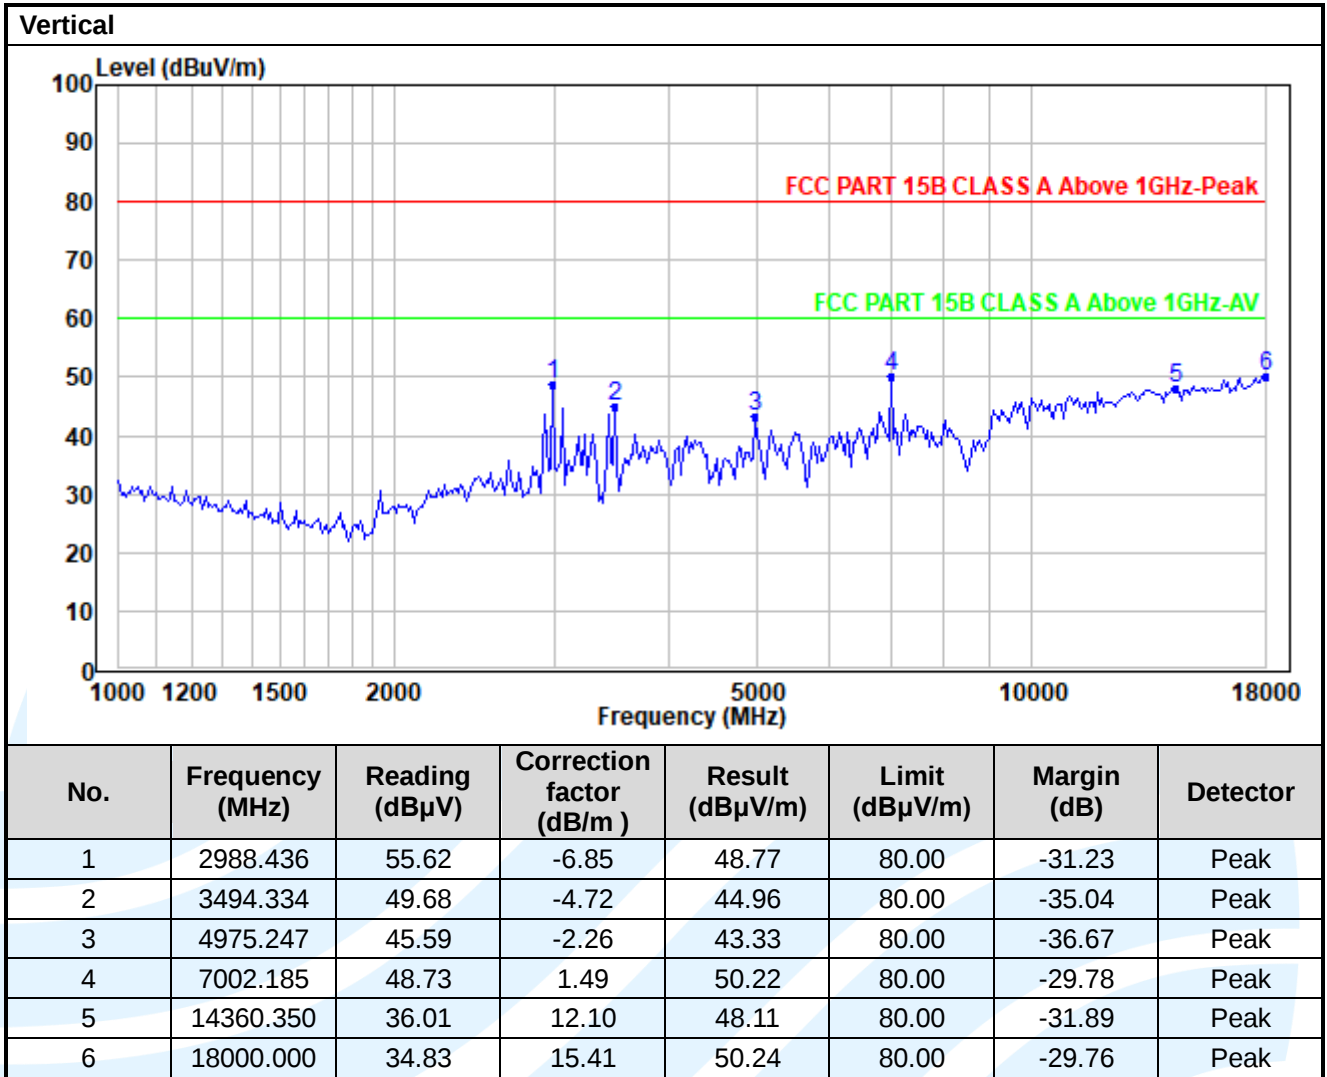

Above 1GHz (Peak & Average)

Test Mode 5: AC120V/60Hz (Build-in Power 3) + LAN Port Loop transmission
Horizontal

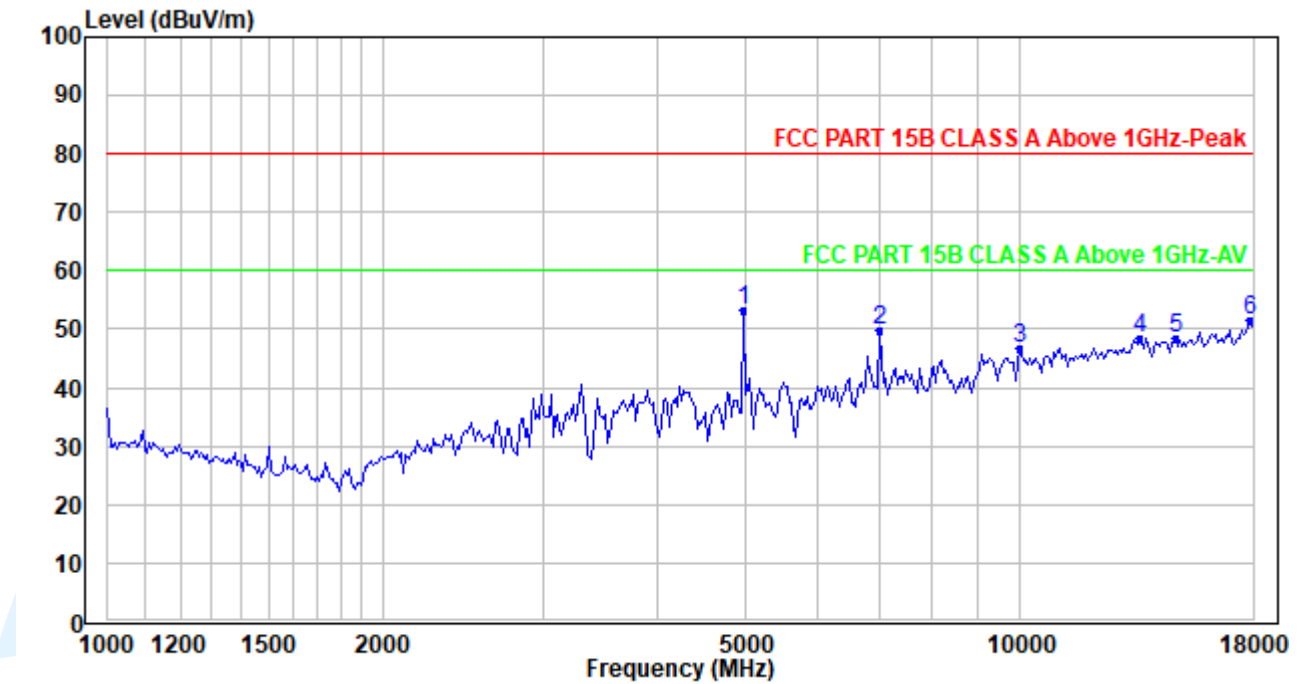

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4975.247	55.51	-2.26	53.25	80.00	-26.75	Peak
2	7002.185	48.35	1.49	49.84	80.00	-30.16	Peak
3	9969.738	41.19	5.66	46.85	80.00	-33.15	Peak
4	13552.180	36.32	12.00	48.32	80.00	-31.68	Peak
5	14782.330	36.57	12.02	48.59	80.00	-31.41	Peak
6	17896.040	36.55	15.05	51.60	80.00	-28.40	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Vertical

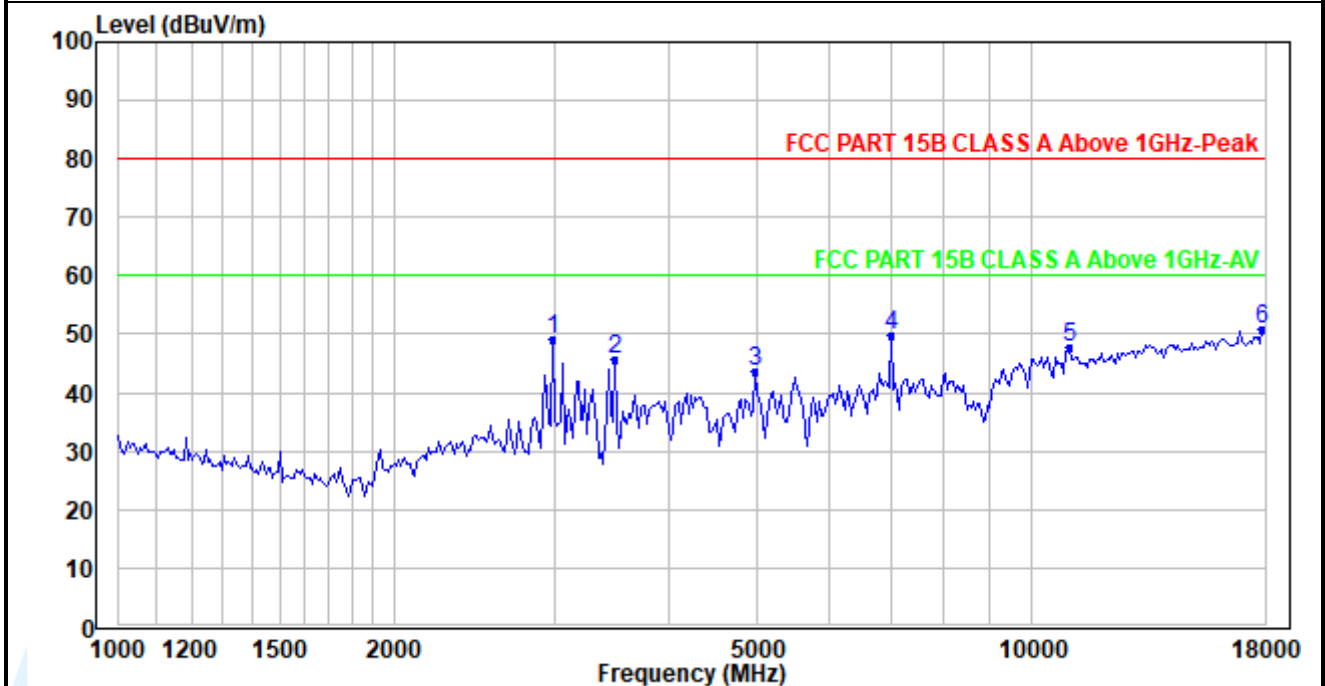

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2988.436	56.12	-6.85	49.27	80.00	-30.73	Peak
2	3494.334	50.34	-4.72	45.62	80.00	-34.38	Peak
3	4975.247	45.89	-2.26	43.63	80.00	-36.37	Peak
4	7002.185	48.50	1.49	49.99	80.00	-30.01	Peak
5	11001.420	40.15	7.52	47.67	80.00	-32.33	Peak
6	17896.040	35.70	15.05	50.75	80.00	-29.25	Peak

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. All possible modes of operation were investigated, and testing at two nominal voltages of 240VAC/50Hz and 120VAC/60Hz, only the worst case emissions reported.
5. The limit of ICES-003 in the 230MHz to 960MHz band is higher than that of FCC Part 15B, so the radiation emission test data conform to the limit of ICES-003.

6.2 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15.107
ICES-003 Issue 7 Section 3.2.1

Test Method: ANSI C63.4-2014

Limits:

Limits for Class A devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.3.2 for details.

Test Procedures:

- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:


Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission

Live Line

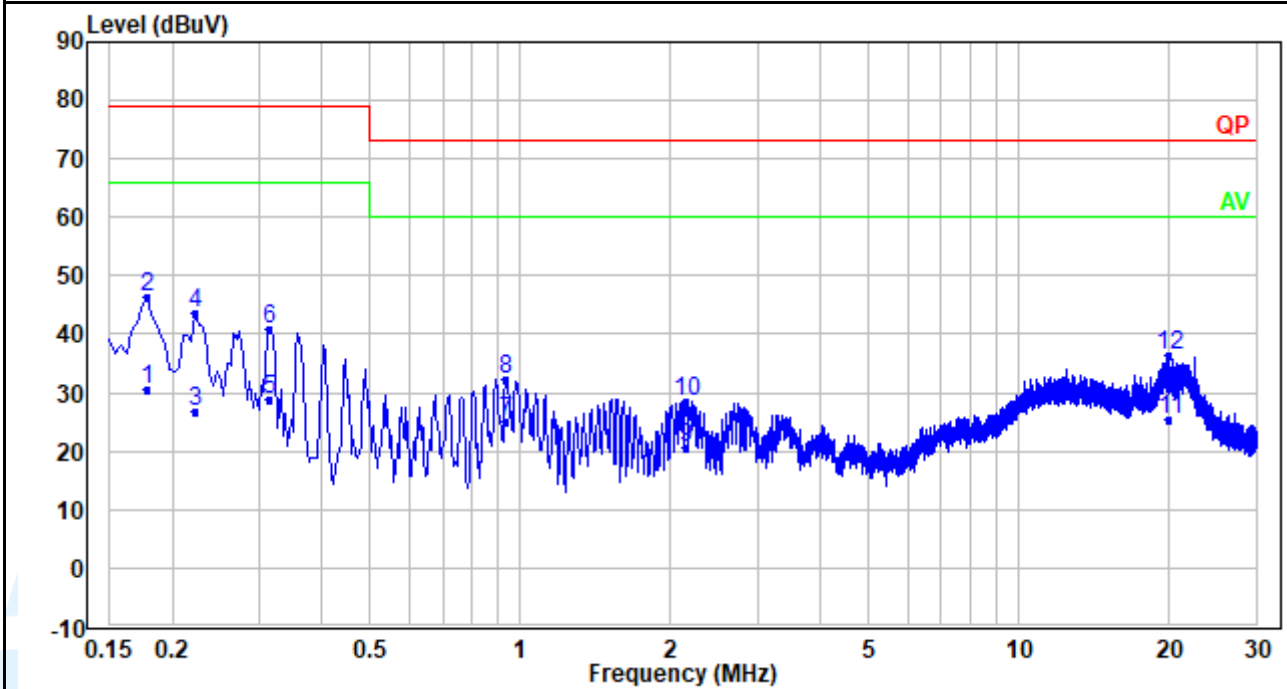

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.178	20.50	10.02	30.52	66.00	-35.48	Average
2	0.178	36.50	10.02	46.52	79.00	-32.48	QP
3	0.222	16.75	10.02	26.77	66.00	-39.23	Average
4	0.222	33.75	10.02	43.77	79.00	-35.23	QP
5	0.314	18.68	10.03	28.71	66.00	-37.29	Average
6	0.314	30.68	10.03	40.71	79.00	-38.29	QP
7	0.938	15.16	10.06	25.22	60.00	-34.78	Average
8	0.938	22.16	10.06	32.22	73.00	-40.78	QP
9	2.146	10.40	10.14	20.54	60.00	-39.46	Average
10	2.146	18.40	10.14	28.54	73.00	-44.46	QP
11	20.101	14.07	11.29	25.36	60.00	-34.64	Average
12	20.101	25.07	11.29	36.36	73.00	-36.64	QP

Neutral Line

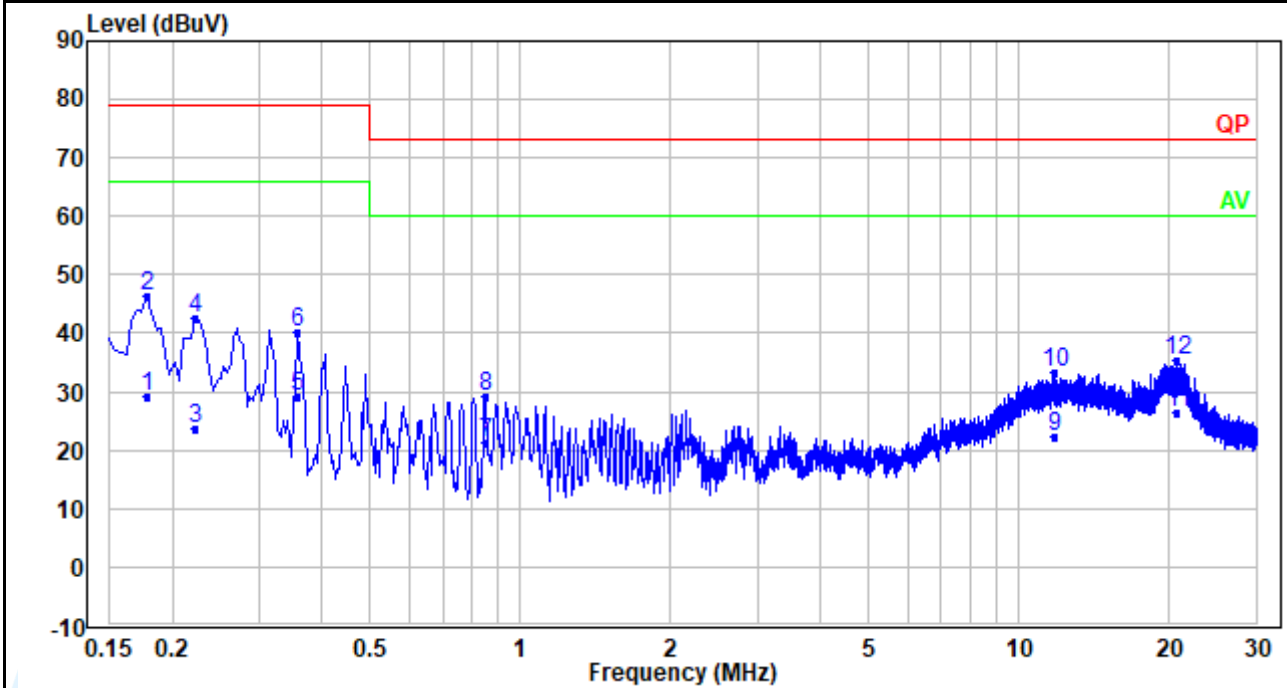


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.178	19.28	10.00	29.28	66.00	-36.72	Average
2	0.178	36.28	10.00	46.28	79.00	-32.72	QP
3	0.222	13.69	10.00	23.69	66.00	-42.31	Average
4	0.222	32.69	10.00	42.69	79.00	-36.31	QP
5	0.358	19.06	10.02	29.08	66.00	-36.92	Average
6	0.358	30.06	10.02	40.08	79.00	-38.92	QP
7	0.850	11.12	10.04	21.16	60.00	-38.84	Average
8	0.850	19.12	10.04	29.16	73.00	-43.84	QP
9	11.793	11.69	10.62	22.31	60.00	-37.69	Average
10	11.793	22.69	10.62	33.31	73.00	-39.69	QP
11	20.853	15.09	11.19	26.28	60.00	-33.72	Average
12	20.853	24.09	11.19	35.28	73.00	-37.72	QP

Quasi Peak and Average:

Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission

Live Line

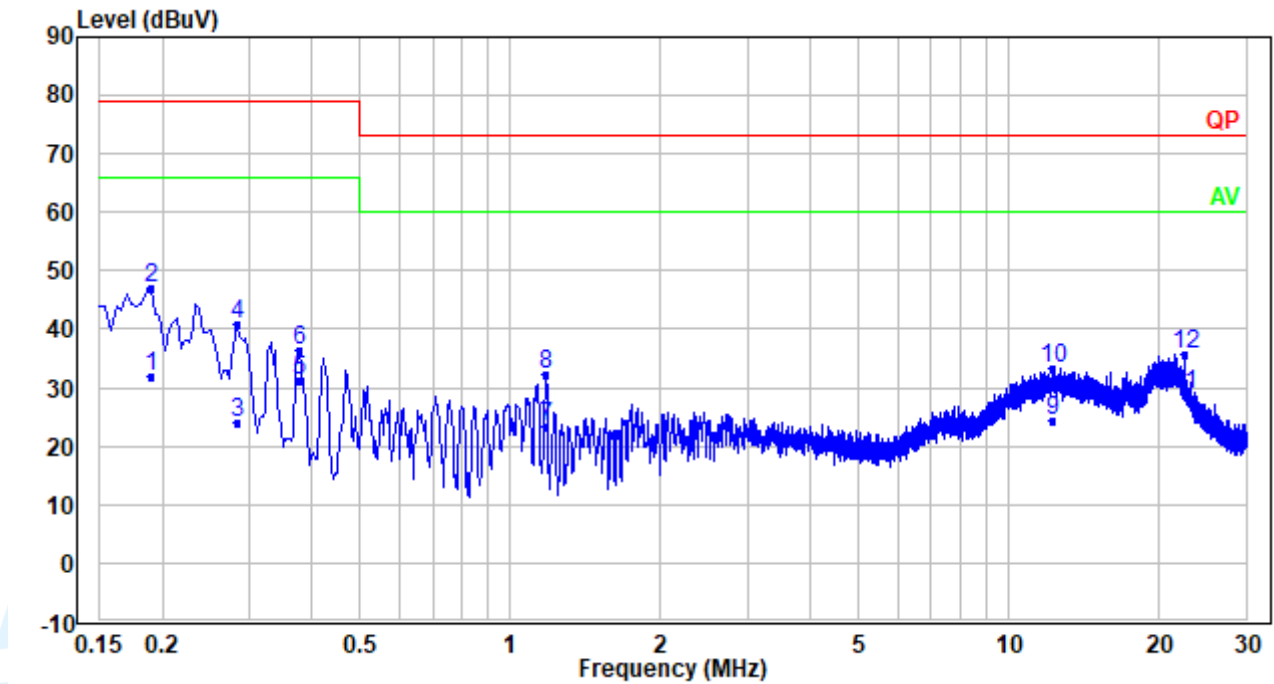

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.190	21.87	10.02	31.89	66.00	-34.11	Average
2	0.190	36.87	10.02	46.89	79.00	-32.11	QP
3	0.282	13.87	10.03	23.90	66.00	-42.10	Average
4	0.282	30.87	10.03	40.90	79.00	-38.10	QP
5	0.378	21.34	10.04	31.38	66.00	-34.62	Average
6	0.378	26.34	10.04	36.38	79.00	-42.62	QP
7	1.182	13.35	10.08	23.43	60.00	-36.57	Average
8	1.182	22.35	10.08	32.43	73.00	-40.57	QP
9	12.269	13.68	10.67	24.35	60.00	-35.65	Average
10	12.269	22.68	10.67	33.35	73.00	-39.65	QP
11	22.528	17.49	11.37	28.86	60.00	-31.14	Average
12	22.529	24.49	11.37	35.86	73.00	-37.14	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Neutral Line

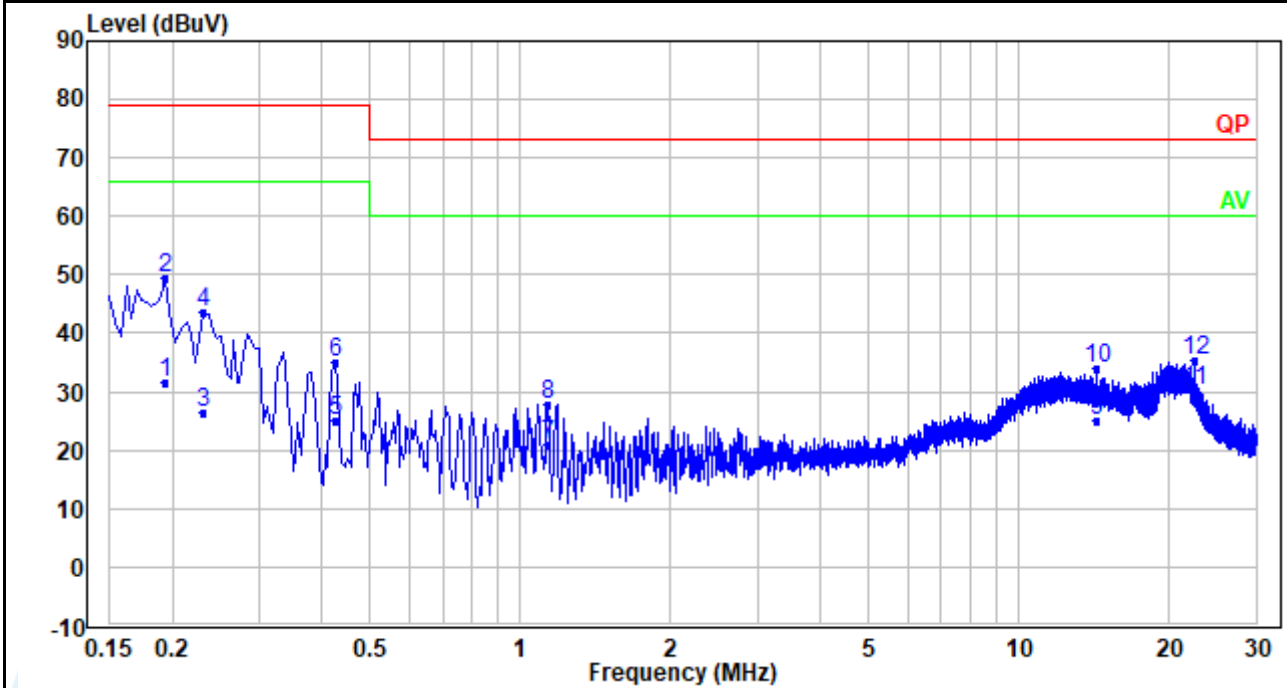

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.194	21.48	10.00	31.48	66.00	-34.52	Average
2	0.194	39.48	10.00	49.48	79.00	-29.52	QP
3	0.230	16.54	10.00	26.54	66.00	-39.46	Average
4	0.230	33.54	10.00	43.54	79.00	-35.46	QP
5	0.426	15.06	10.02	25.08	66.00	-40.92	Average
6	0.426	25.06	10.02	35.08	79.00	-43.92	QP
7	1.134	10.82	10.05	20.87	60.00	-39.13	Average
8	1.134	17.82	10.05	27.87	73.00	-45.13	QP
9	14.337	14.22	10.80	25.02	60.00	-34.98	Average
10	14.337	23.22	10.80	34.02	73.00	-38.98	QP
11	22.524	18.94	11.26	30.20	60.00	-29.80	Average
12	22.525	23.94	11.26	35.20	73.00	-37.80	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Quasi Peak and Average:

Test Mode 5: AC120V/60Hz (Build-in Power 3) + LAN Port Loop transmission

Live Line

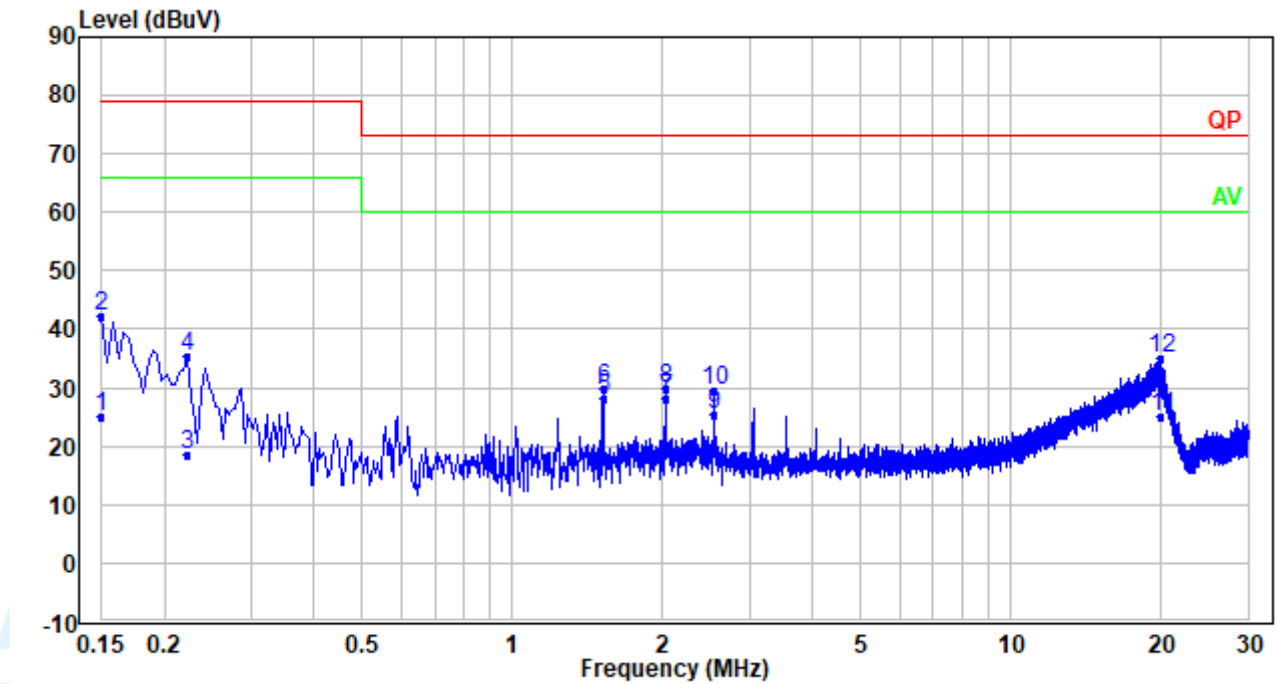

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	15.06	10.03	25.09	66.00	-40.91	Average
2	0.150	32.06	10.03	42.09	79.00	-36.91	QP
3	0.222	8.33	10.02	18.35	66.00	-47.65	Average
4	0.222	25.33	10.02	35.35	79.00	-43.65	QP
5	1.522	17.89	10.09	27.98	60.00	-32.02	Average
6	1.522	19.89	10.09	29.98	73.00	-43.02	QP
7	2.030	17.89	10.13	28.02	60.00	-31.98	Average
8	2.030	19.89	10.13	30.02	73.00	-42.98	QP
9	2.538	15.21	10.17	25.38	60.00	-34.62	Average
10	2.538	19.21	10.17	29.38	73.00	-43.62	QP
11	20.109	13.77	11.29	25.06	60.00	-34.94	Average
12	20.109	23.77	11.29	35.06	73.00	-37.94	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Neutral Line

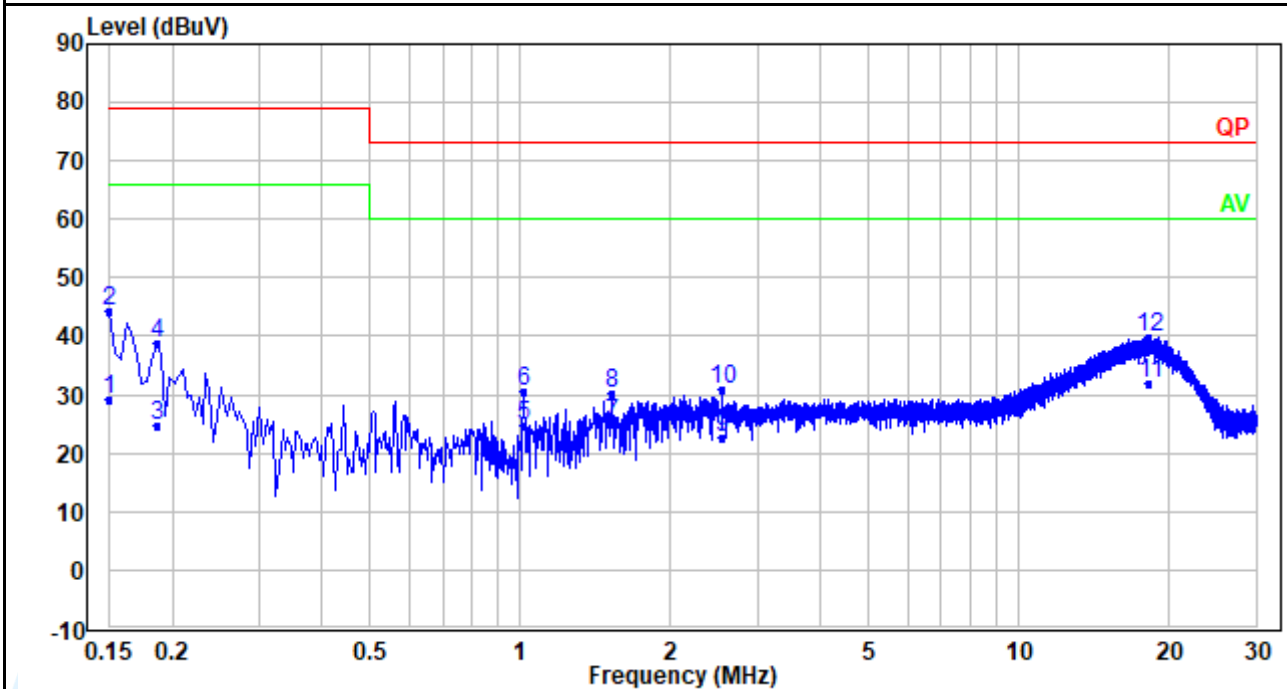

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	19.28	10.02	29.30	66.00	-36.70	Average
2	0.150	34.28	10.02	44.30	79.00	-34.70	QP
3	0.186	14.71	10.00	24.71	66.00	-41.29	Average
4	0.186	28.71	10.00	38.71	79.00	-40.29	QP
5	1.014	14.59	10.05	24.64	60.00	-35.36	Average
6	1.014	20.59	10.05	30.64	73.00	-42.36	QP
7	1.526	14.97	10.07	25.04	60.00	-34.96	Average
8	1.526	19.97	10.07	30.04	73.00	-42.96	QP
9	2.538	12.67	10.14	22.81	60.00	-37.19	Average
10	2.538	20.67	10.14	30.81	73.00	-42.19	QP
11	18.337	20.75	11.04	31.79	60.00	-28.21	Average
12	18.337	28.75	11.04	39.79	73.00	-33.21	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240VAC/50Hz and 120VAC/60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
