

SAR Plots

Plot: 1#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.04

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.714$ S/m; $\epsilon_r = 39.24$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 802.11b Low/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.62 W/kg


Head Left Cheek/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.16 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.566 W/kg

Maximum value of SAR (measured) = 1.84 W/kg

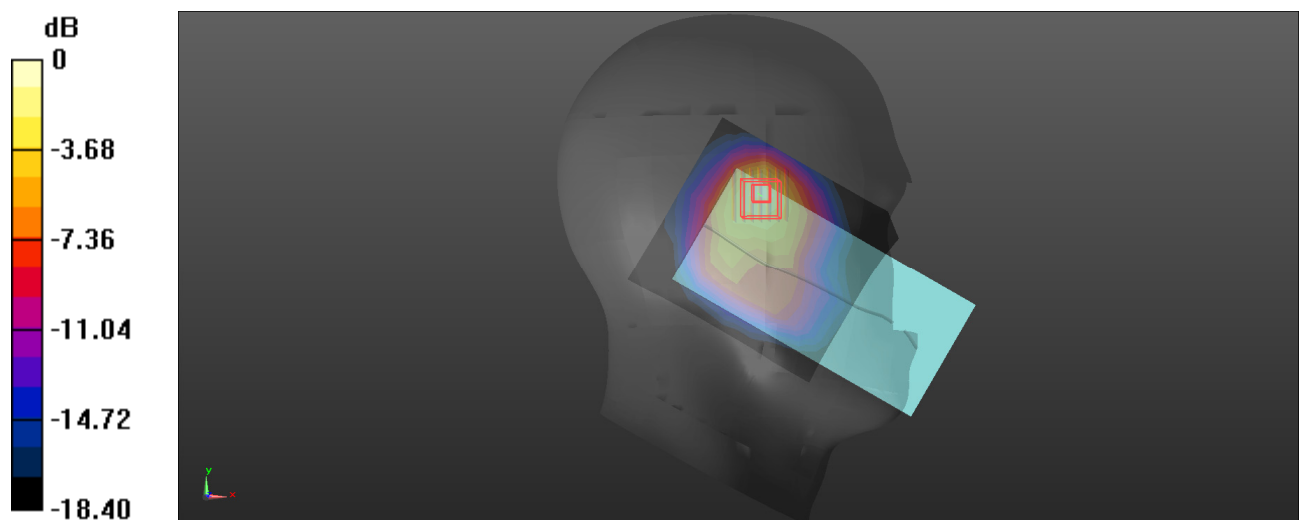

0 dB = 1.84 W/kg = 2.65 dBW/kg

Plot: 2#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 802.11b Mid/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.62 W/kg


Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.03 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.582 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

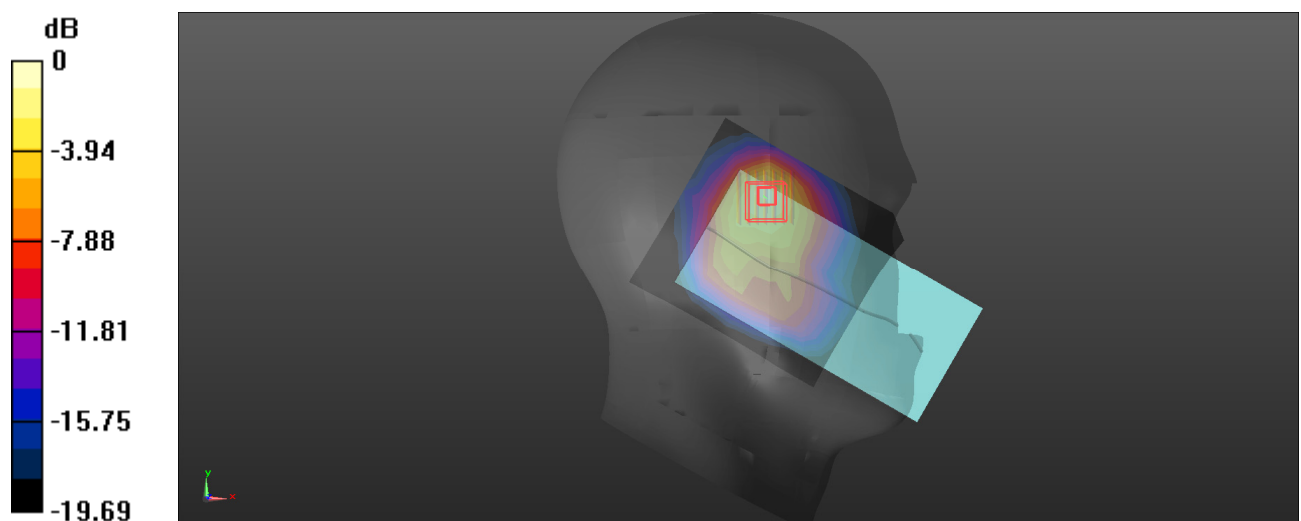

0 dB = 1.92 W/kg = 2.83 dBW/kg

Plot: 3#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.049$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2462 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 802.11b High/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.70 W/kg


Head Left Cheek/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.28 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.590 W/kg

Maximum value of SAR (measured) = 1.95 W/kg

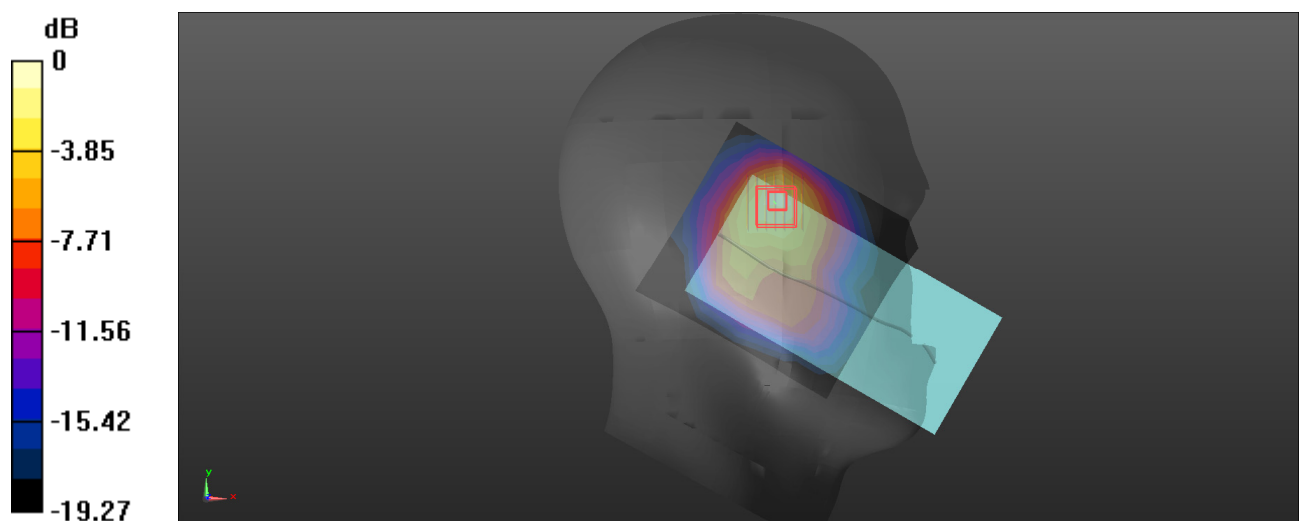

0 dB = 1.95 W/kg = 2.90 dBW/kg

Plot: 4#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 802.11b Mid/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.03 W/kg


Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.01 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

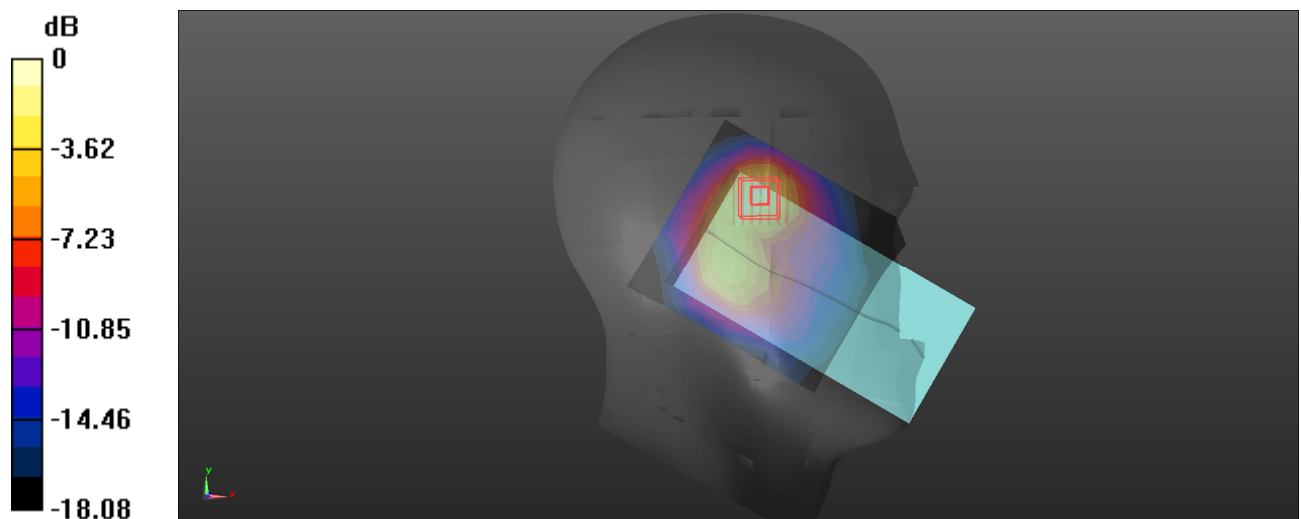

0 dB = 1.07 W/kg = 0.29 dBW/kg

Plot: 5#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 802.11b Mid/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.09 W/kg


Head Right Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.46 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

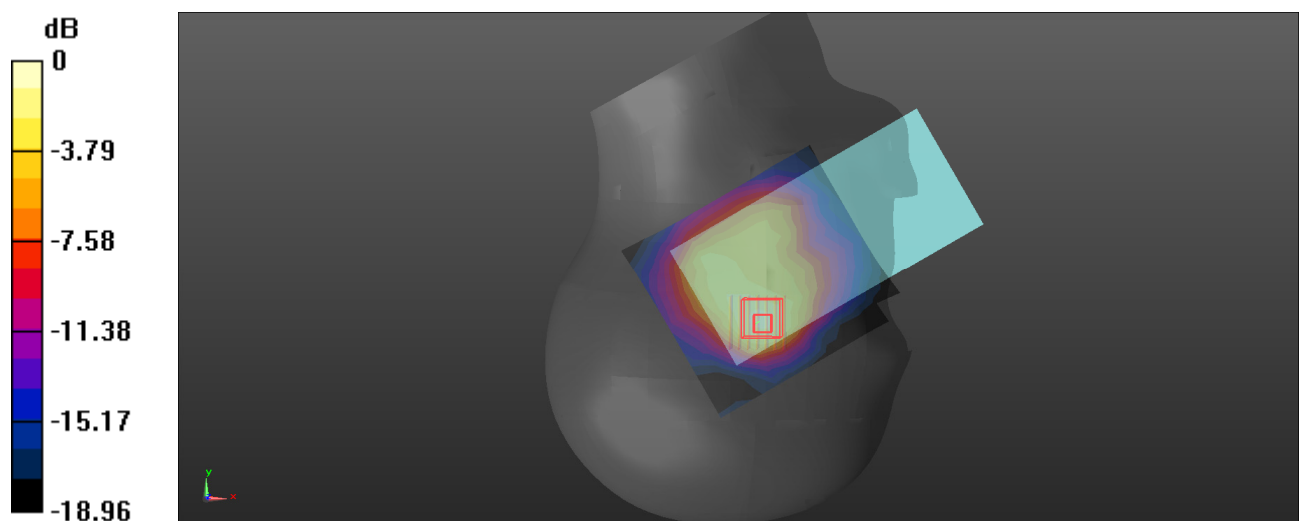

0 dB = 1.14 W/kg = 0.57 dBW/kg

Plot: 6#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 802.11b Mid/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.766 W/kg


Head Right Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.36 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 0.875 W/kg

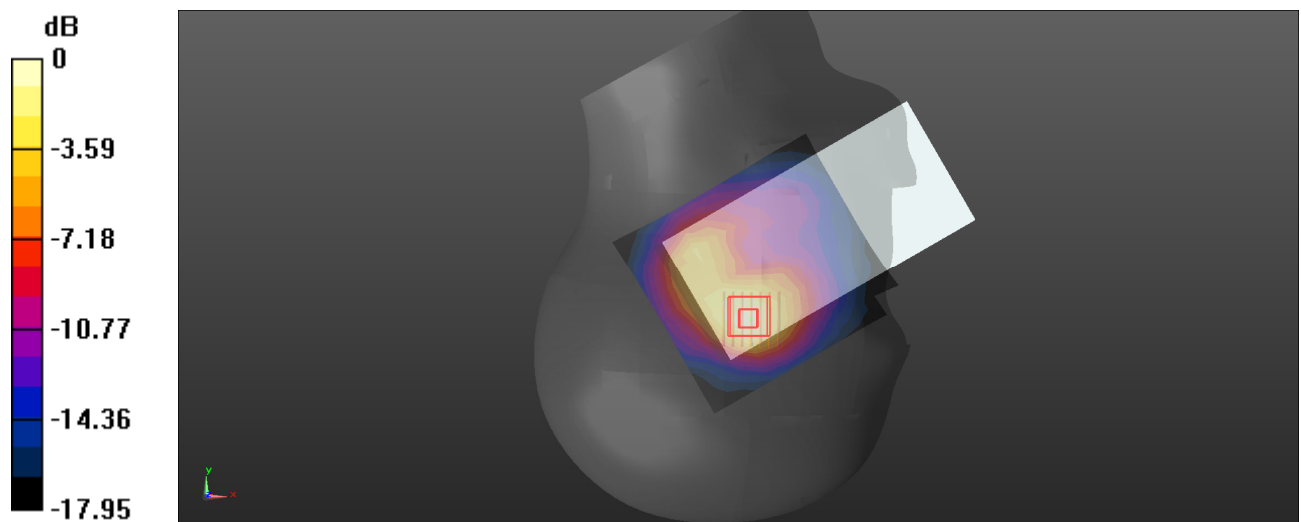

0 dB = 0.875 W/kg = -0.58 dBW/kg

Plot: 7#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 802.11b Mid/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.403 W/kg


Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.792 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

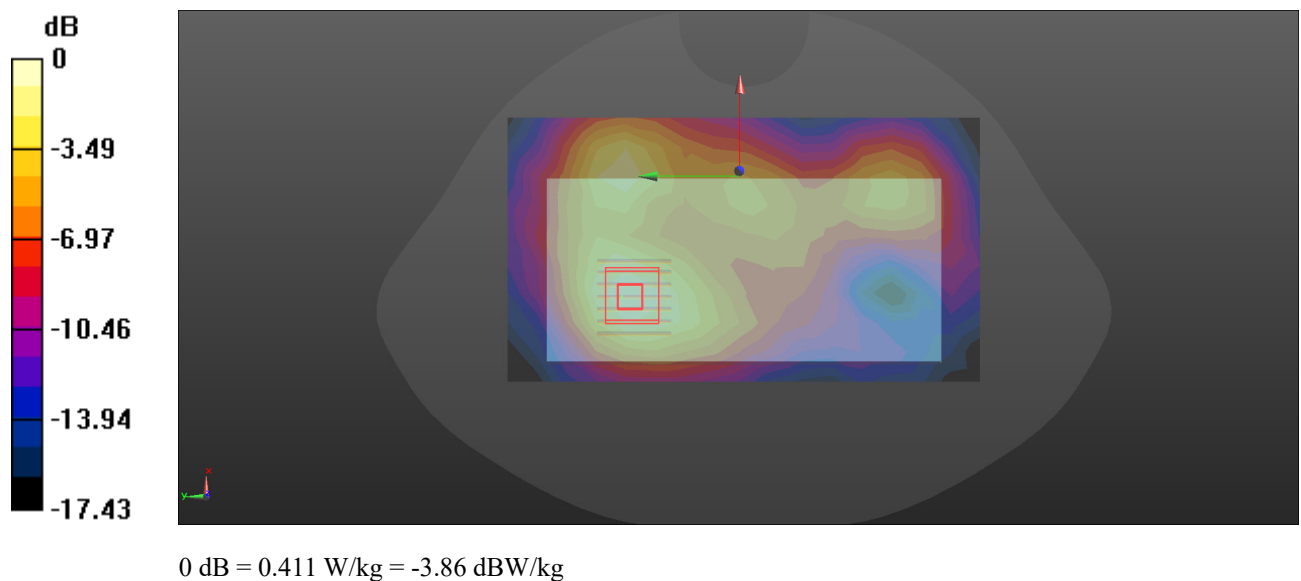

Plot: 8#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.04

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.714$ S/m; $\epsilon_r = 39.24$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b Low/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.472 W/kg


Body Back/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.626 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

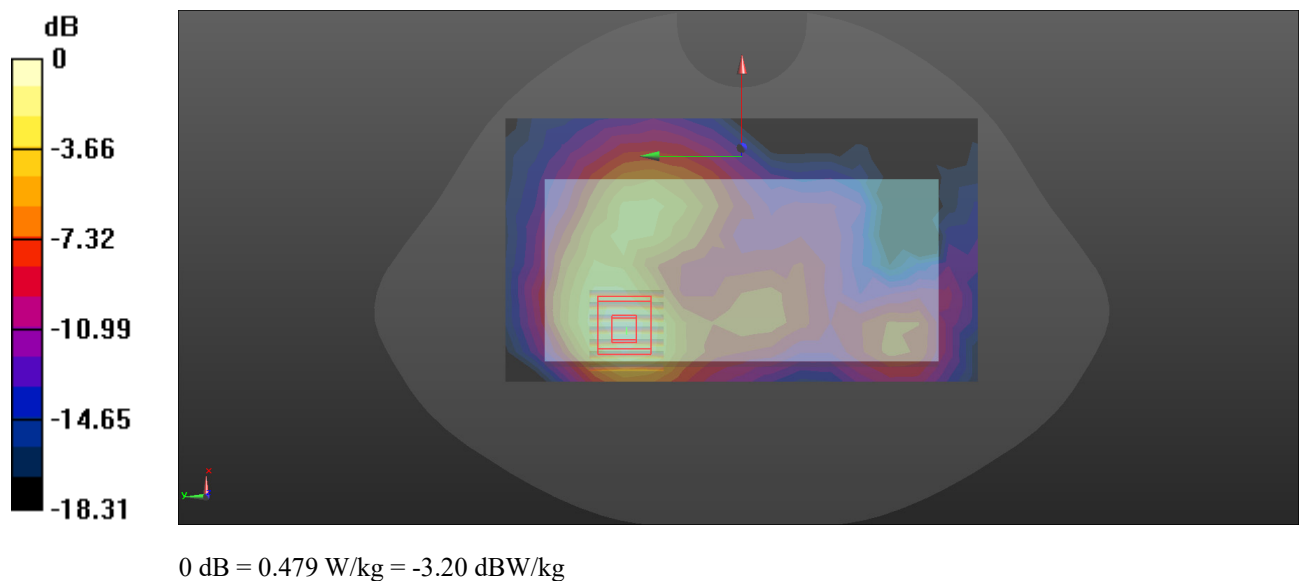

Plot: 9#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b Mid/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.578 W/kg


Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.755 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

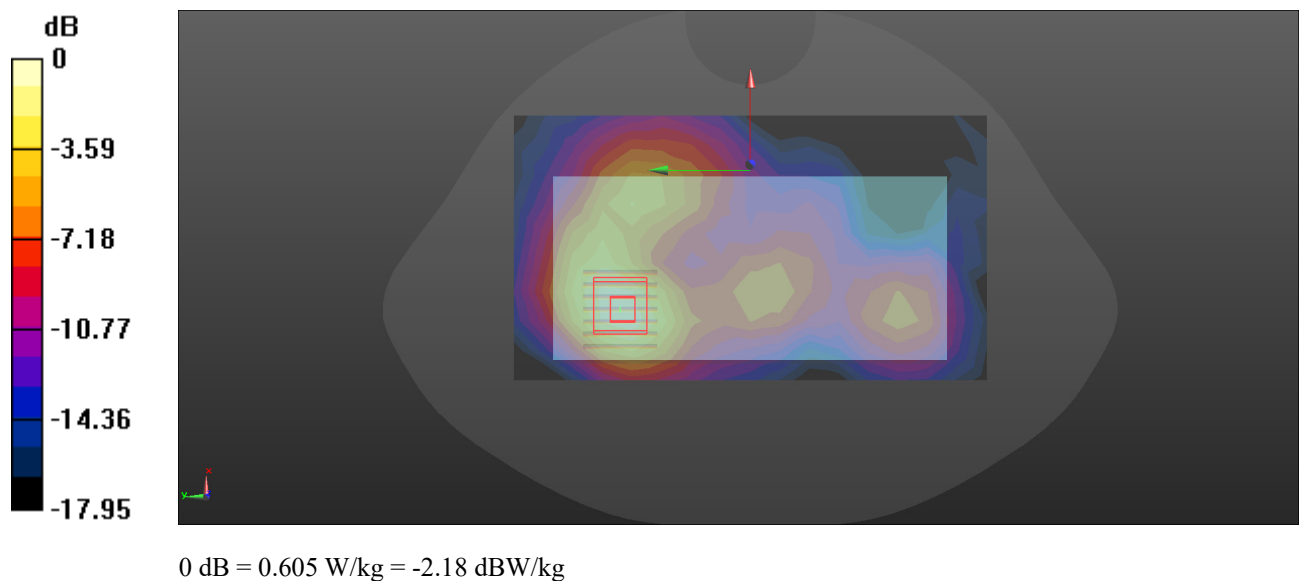

Plot: 10#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.79 \text{ S/m}$; $\epsilon_r = 39.049$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2462 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b High/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.562 W/kg


Body Back/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.658 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.589 W/kg

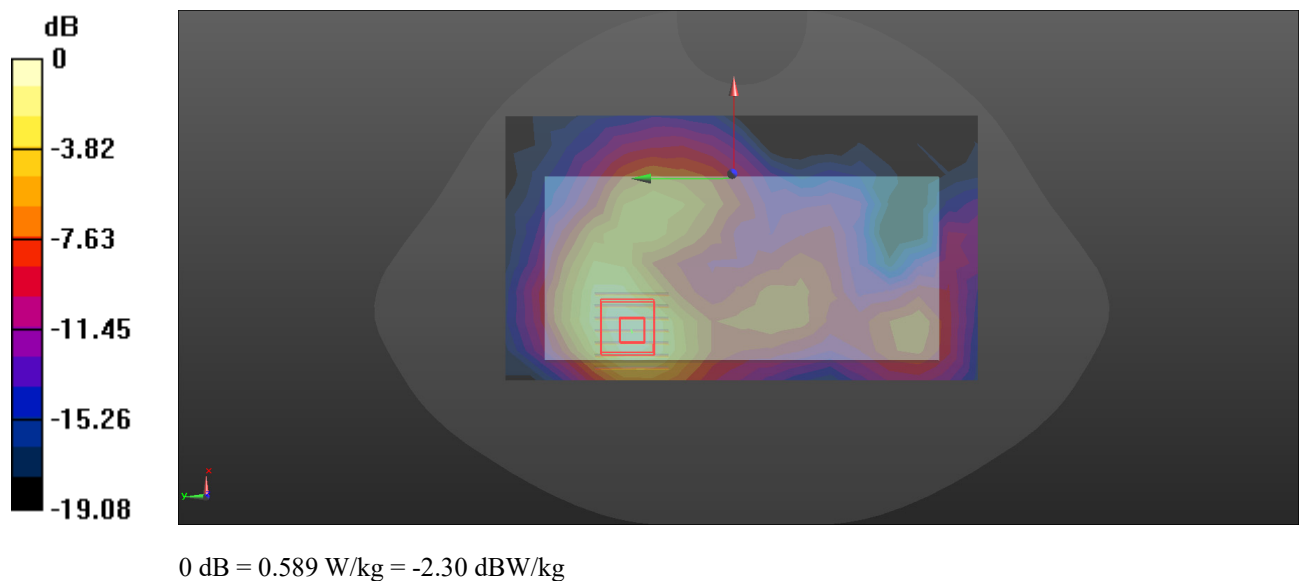

Plot: 11#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 802.11b Mid/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.479 W/kg


Body Right/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.01 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.494 W/kg

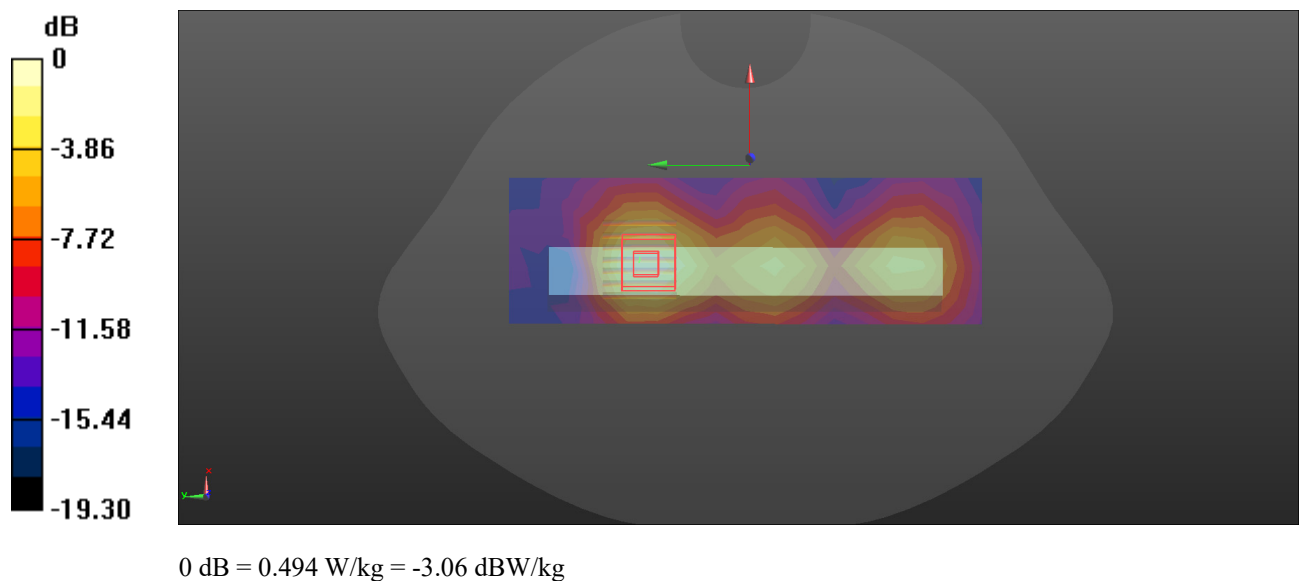

Plot: 12#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 802.11b Mid/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.372 W/kg


Body Top/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.73 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

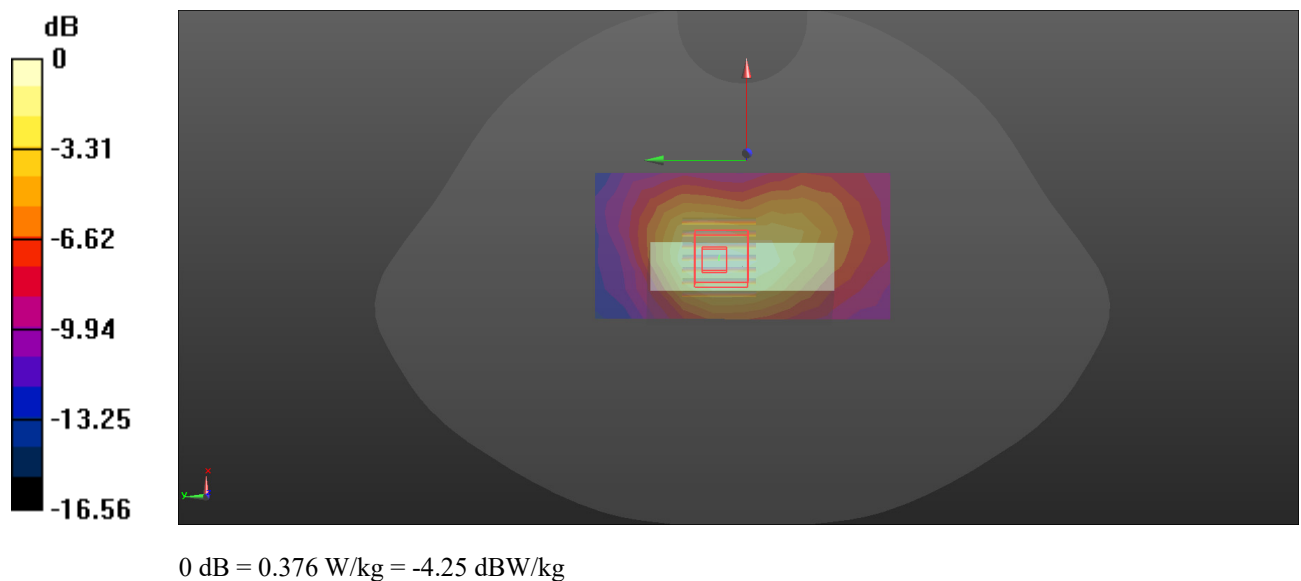

Plot: 13#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.633 \text{ S/m}$; $\epsilon_r = 34.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.2G 802.11ac20 Low/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.58 W/kg


Head Left Cheek/WLAN 5.2G 802.11ac20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.012 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 1.93 W/kg

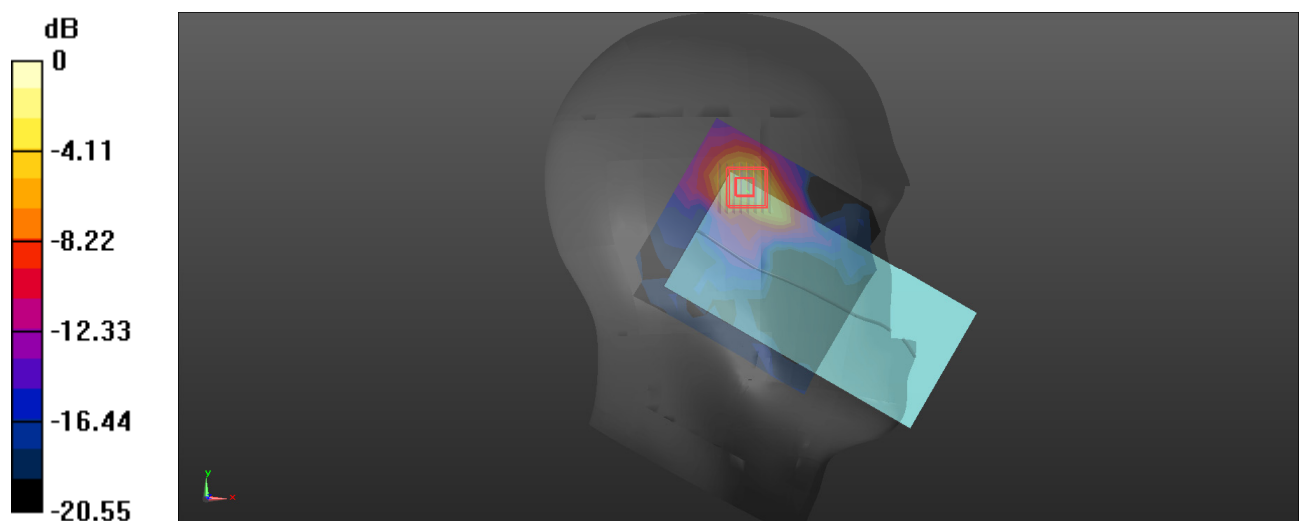

0 dB = 1.93 W/kg = 2.86 dBW/kg

Plot: 14#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.656$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.50 W/kg


Head Left Cheek/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.904 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

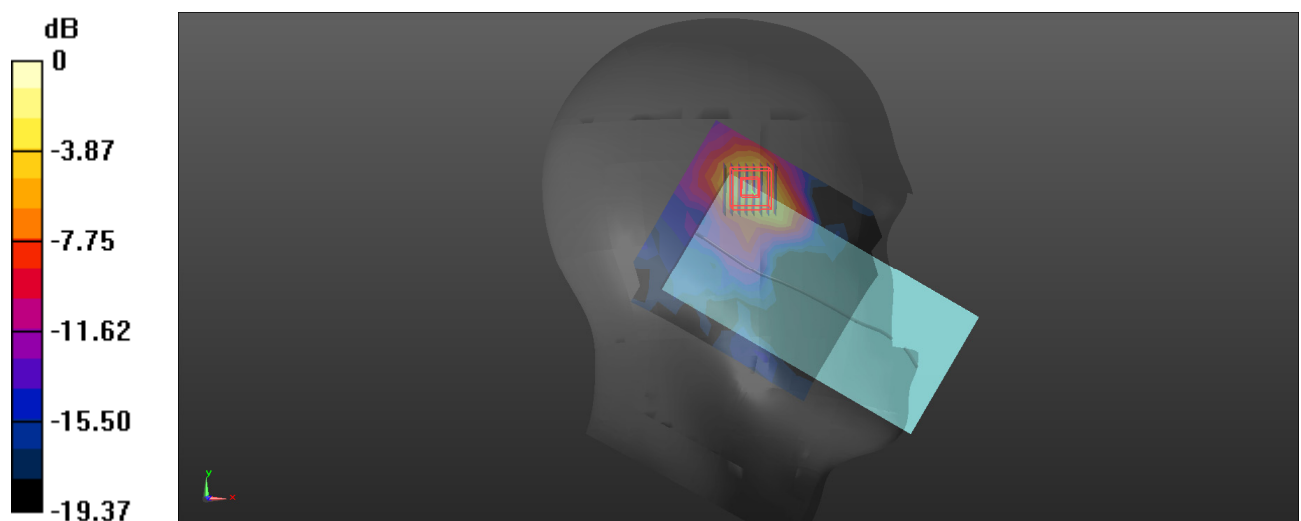

0 dB = 1.83 W/kg = 2.62 dBW/kg

Plot: 15#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.703$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.2G 802.11ac20 High/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.66 W/kg


Head Left Cheek/WLAN 5.2G 802.11ac20 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.578 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.98 W/kg

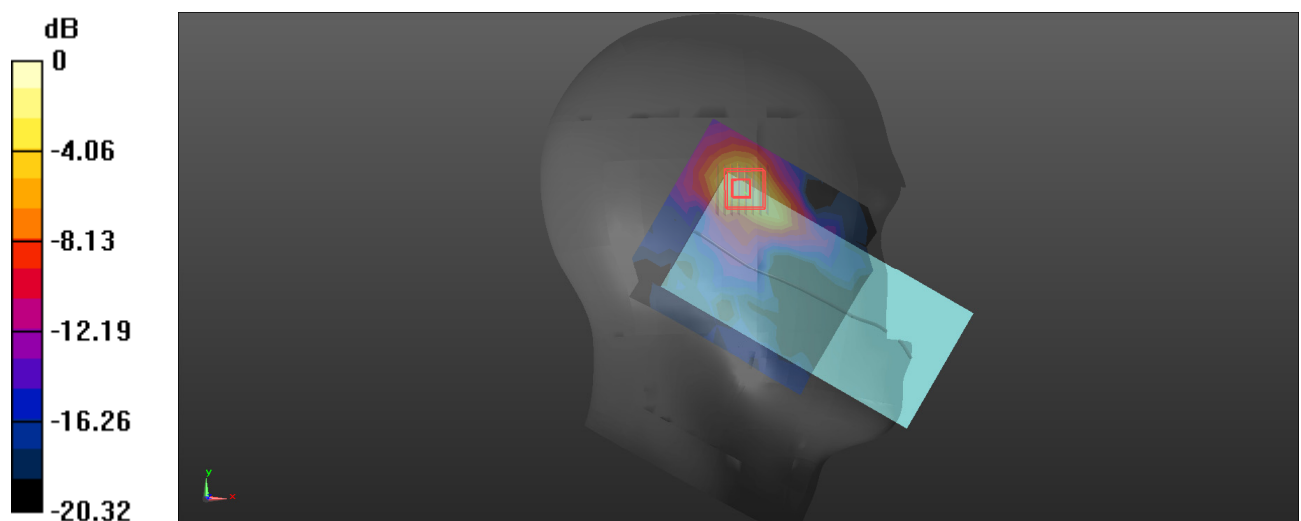

0 dB = 1.98 W/kg = 2.97 dBW/kg

Plot: 16#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.633 \text{ S/m}$; $\epsilon_r = 34.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.2G 802.11ac20 Low/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.63 W/kg


Head Left Tilt/WLAN 5.2G 802.11ac20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.808 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

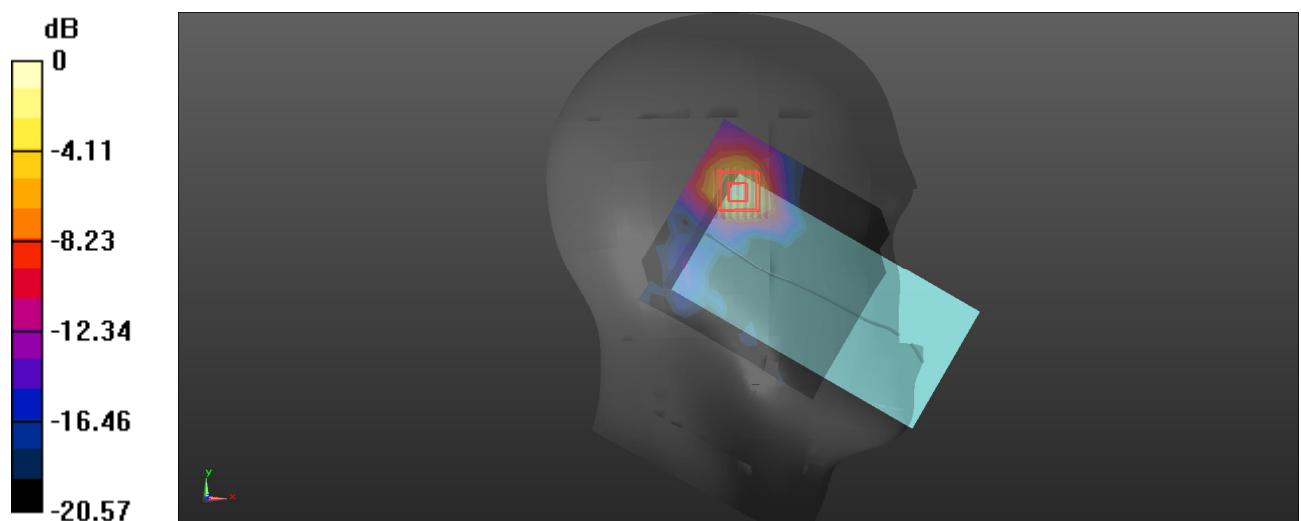

0 dB = 1.80 W/kg = 2.55 dBW/kg

Plot: 17#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.656$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.51 W/kg


Head Left Tilt/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.135 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 1.59 W/kg

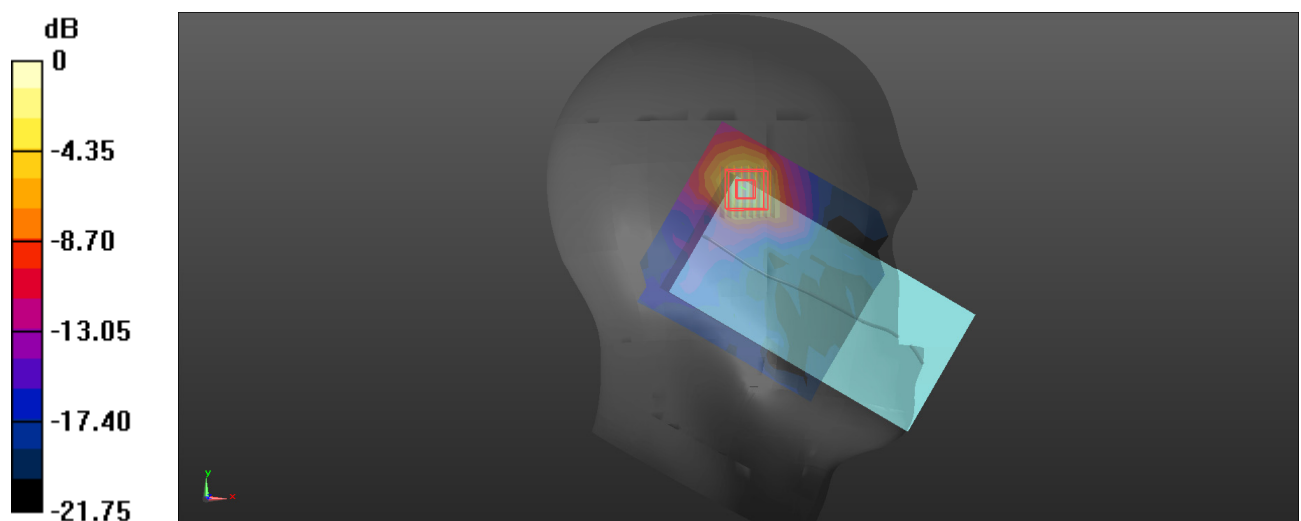

0 dB = 1.59 W/kg = 2.01 dBW/kg

Plot: 18#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.031

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.703$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.2G 802.11ac20 High/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.56 W/kg


Head Left Tilt/WLAN 5.2G 802.11ac20 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.932 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 1.62 W/kg

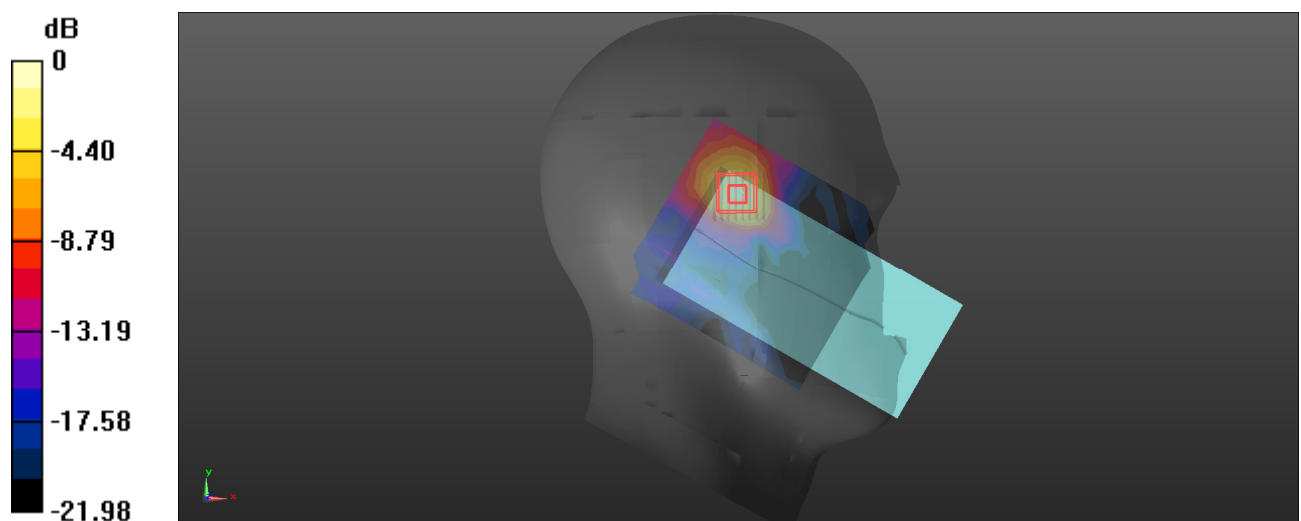

0 dB = 1.62 W/kg = 2.10 dBW/kg

Plot: 19#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.656$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.14 W/kg


Head Right Cheek/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.478 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

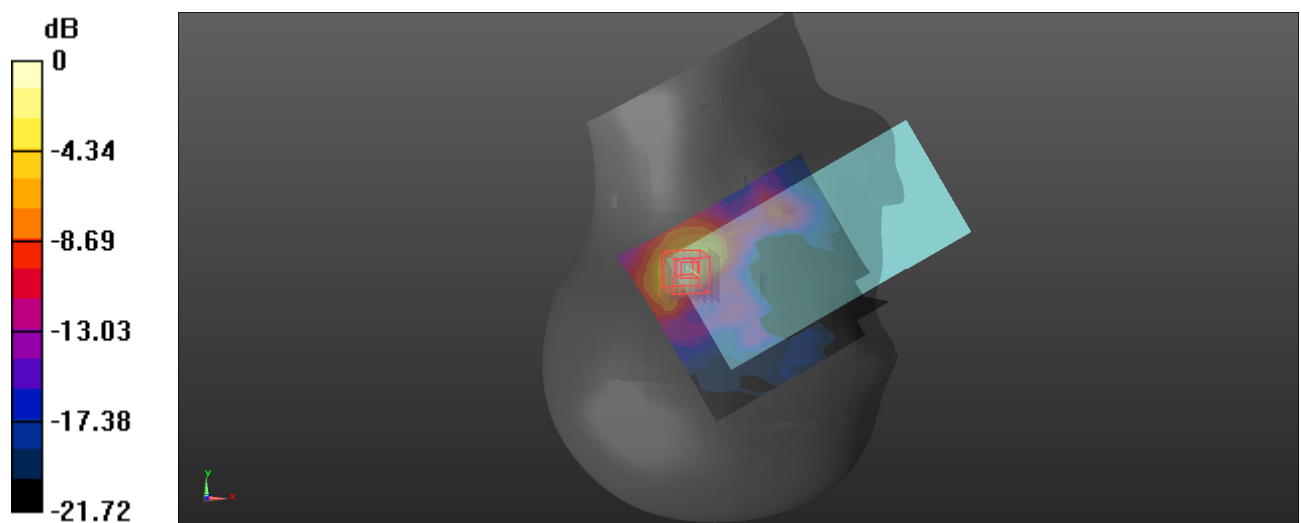

0 dB = 1.44 W/kg = 1.58 dBW/kg

Plot: 20#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.656$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.906 W/kg


Head Right Tilt/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.973 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.983 W/kg

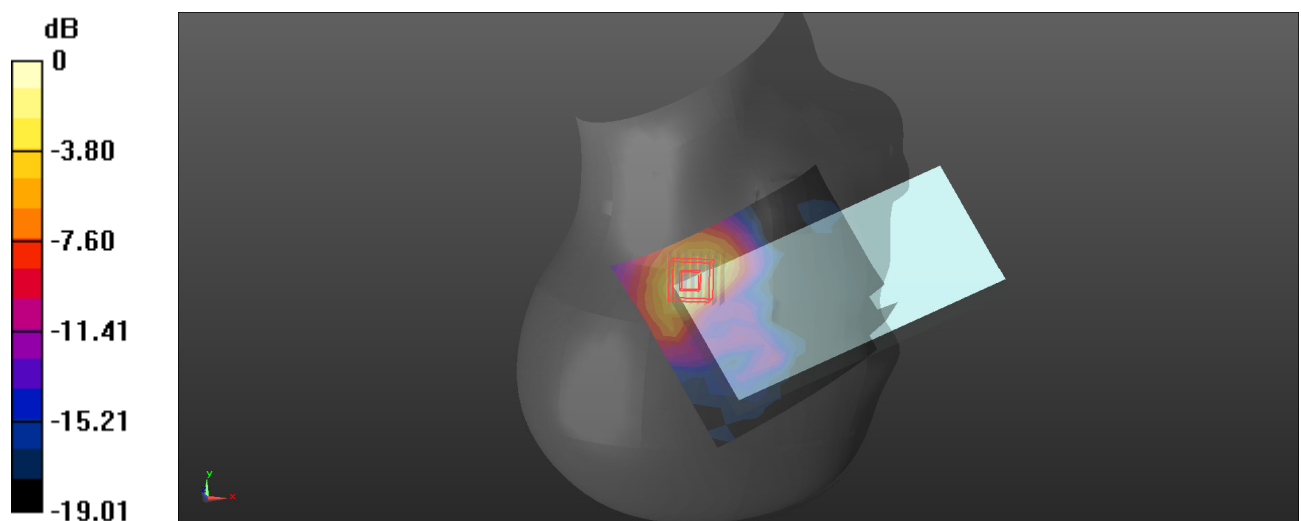

Plot: 21#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.656 \text{ S/m}$; $\epsilon_r = 34.638$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.2G 802.11ac20 Mid/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.646 W/kg


Body Front/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.5660 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.681 W/kg

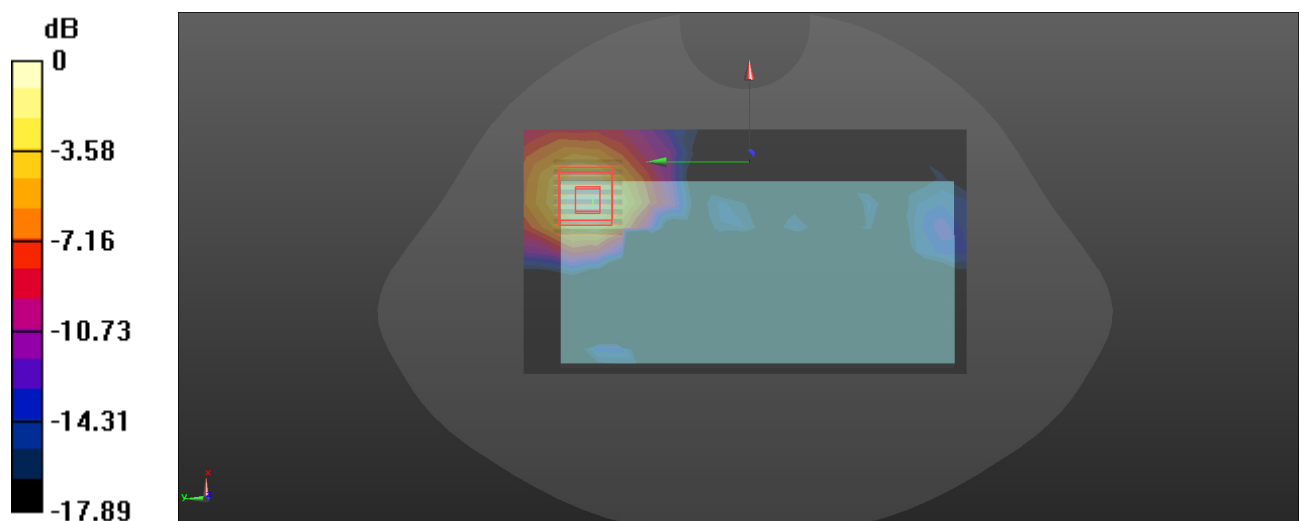

0 dB = 0.681 W/kg = -1.67 dBW/kg

Plot: 22#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.633 \text{ S/m}$; $\epsilon_r = 34.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.2G 802.11ac20 Low/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.01 W/kg


Body Back/WLAN 5.2G 802.11ac20 Low /Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.638 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

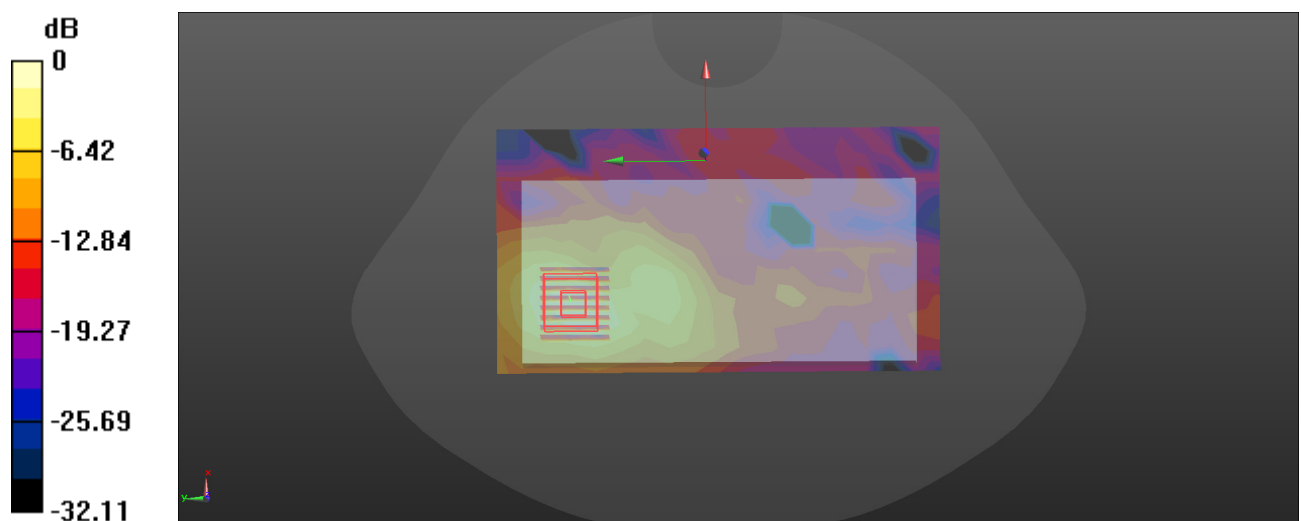

0 dB = 1.03 W/kg = 0.13 dBW/kg

Plot: 23#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.656$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.2G 802.11ac20 Mid/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg


Body Back/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.150 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

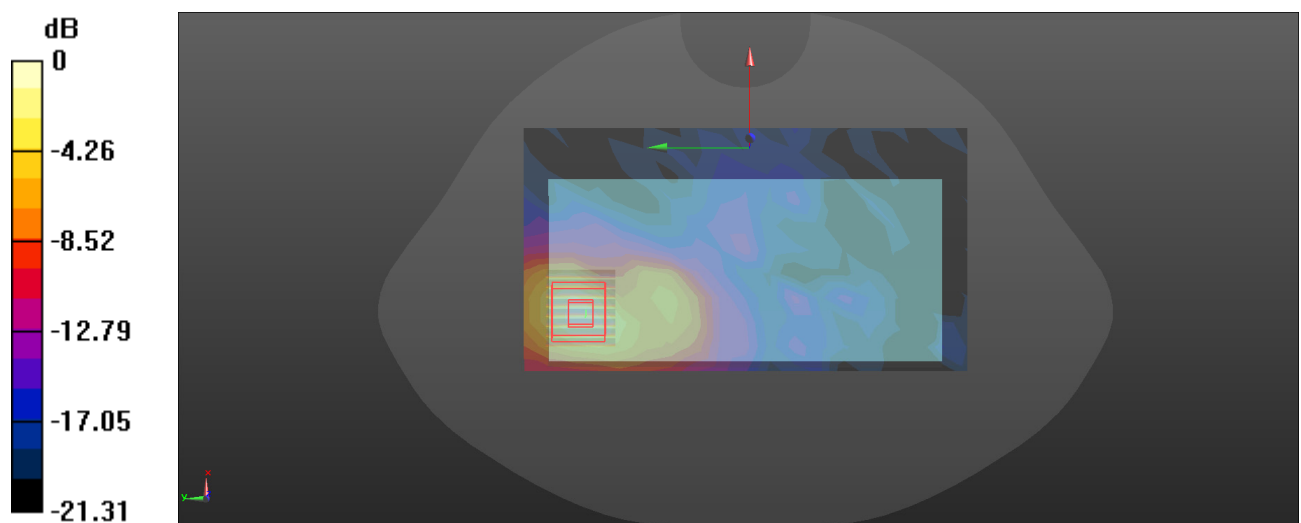

0 dB = 1.20 W/kg = 0.79 dBW/kg

Plot: 24#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.703$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.2G 802.11ac20 High/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.01 W/kg


Body Back/WLAN 5.2G 802.11ac20 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.381 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

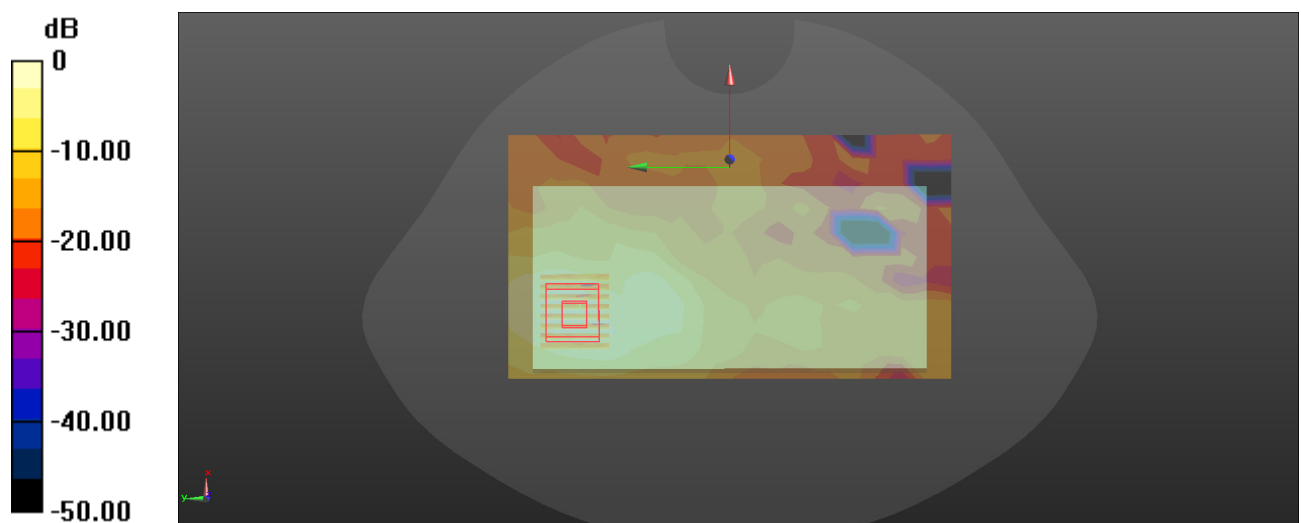

Plot: 25#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.656$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 5.2G 802.11ac20 Mid/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.497 W/kg


Body Right/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.789 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

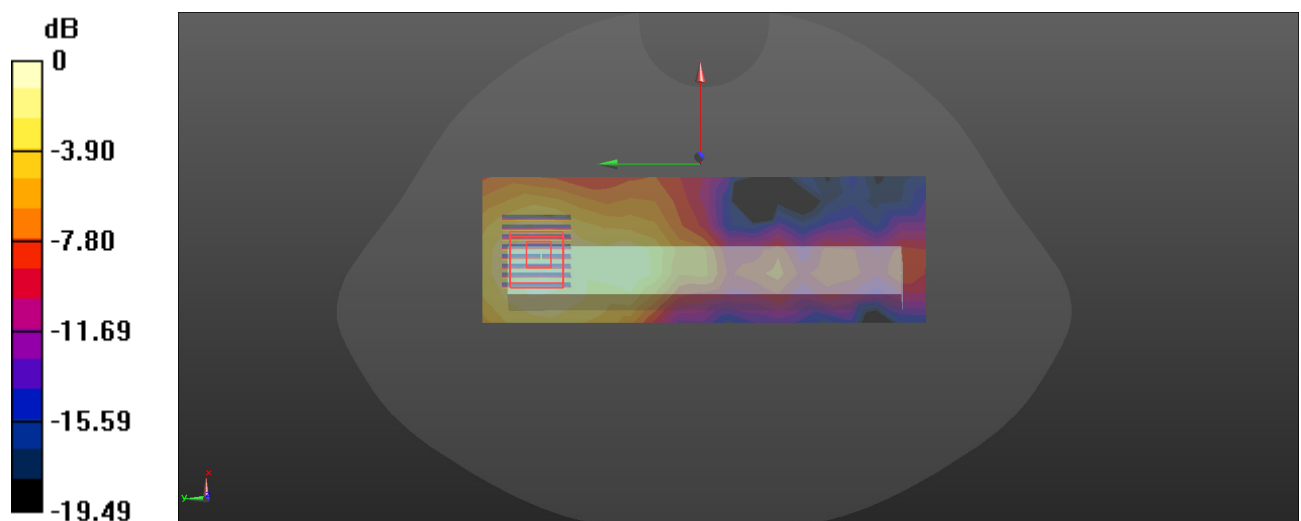

0 dB = 0.501 W/kg = -3.00 dBW/kg

Plot: 26#**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.656$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.2G 802.11ac20 Mid/Area Scan (7x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.784 W/kg


Body Top/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.702 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.808 W/kg

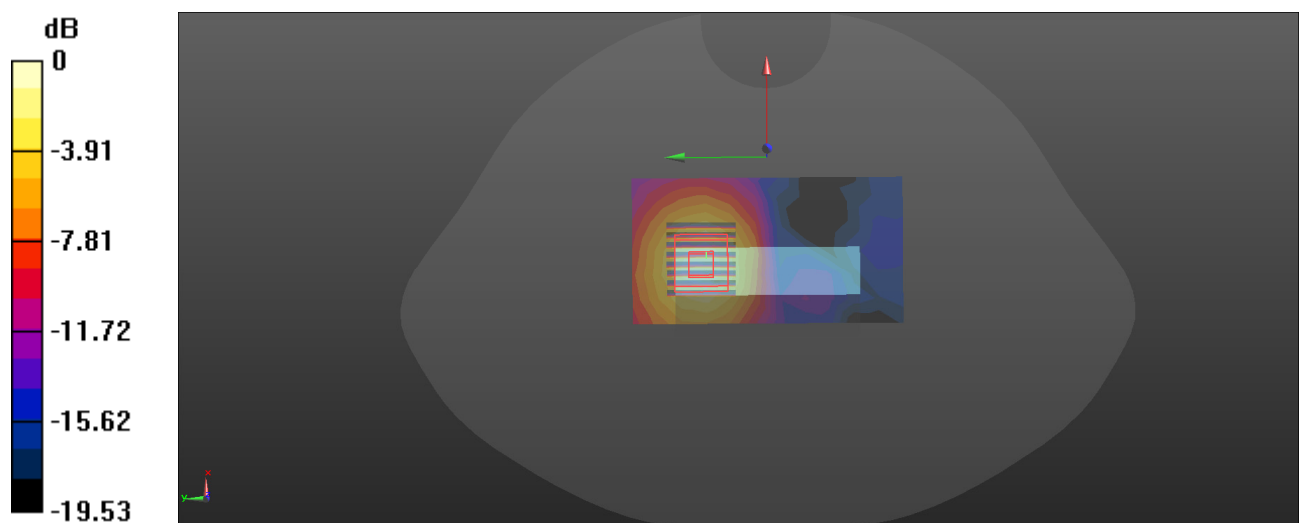

0 dB = 0.808 W/kg = -0.93 dBW/kg

Plot: 27#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5260 MHz; Duty Cycle: 1:1.157

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.727 \text{ S/m}$; $\epsilon_r = 34.581$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5260 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.3G 802.11ax20 Low/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.89 W/kg


Head Left Cheek/WLAN 5.3G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.802 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 1.95 W/kg

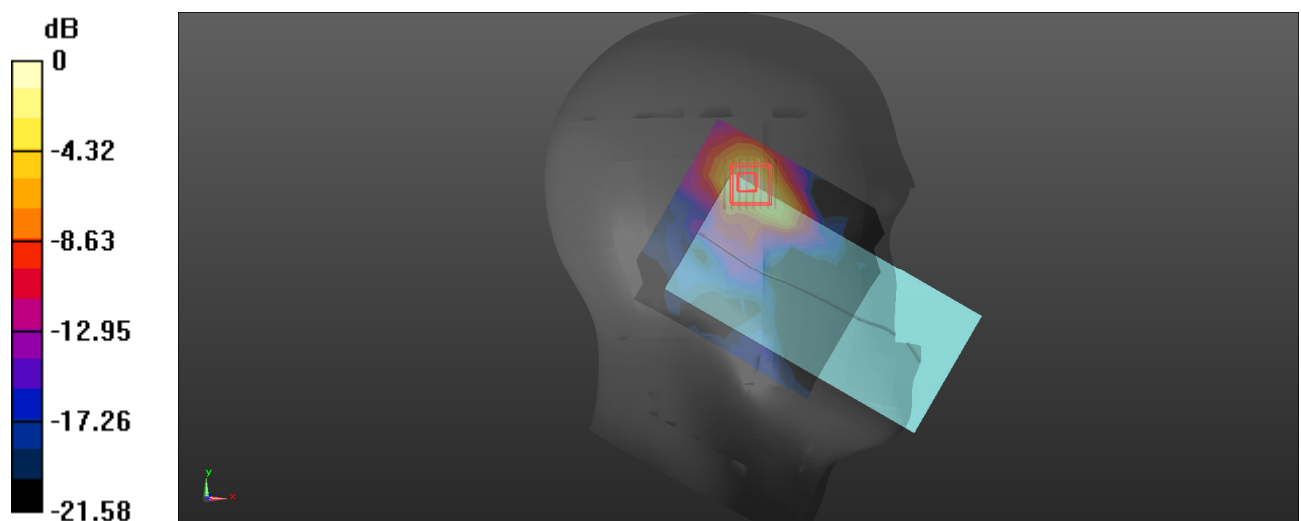

0 dB = 1.95 W/kg = 2.90 dBW/kg

Plot: 28#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 34.562$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.13 W/kg


Head Left Cheek/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.638 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 2.25 W/kg

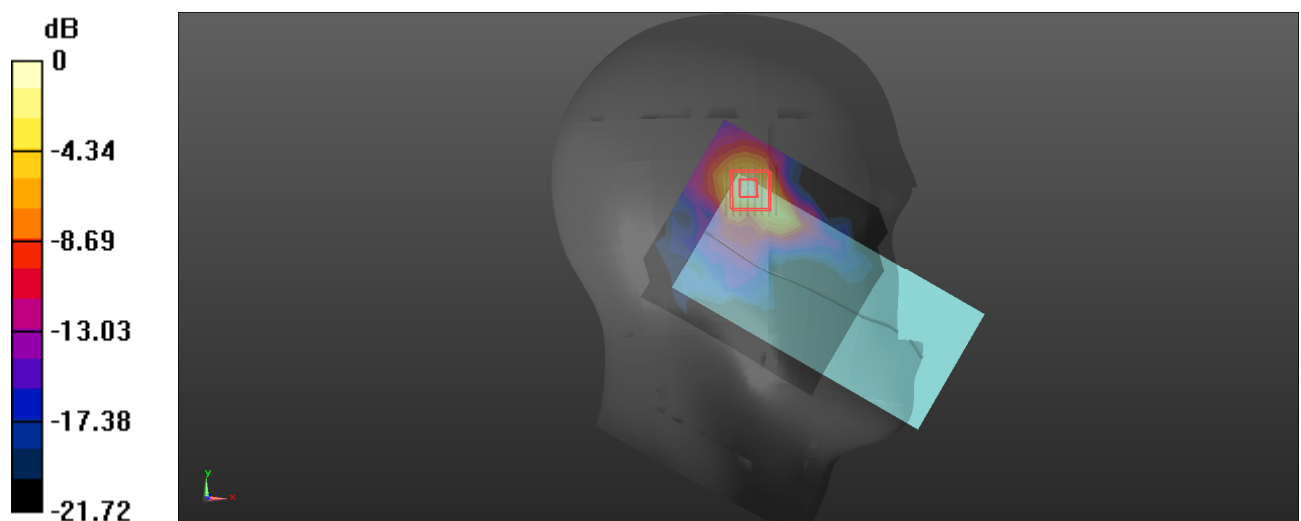

0 dB = 2.25 W/kg = 3.52 dBW/kg

Plot: 29#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.797 \text{ S/m}$; $\epsilon_r = 34.524$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5320 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.3G 802.11ax20 High/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.30 W/kg


Head Left Cheek/WLAN 5.3G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.192 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.445 W/kg

Maximum value of SAR (measured) = 2.48 W/kg

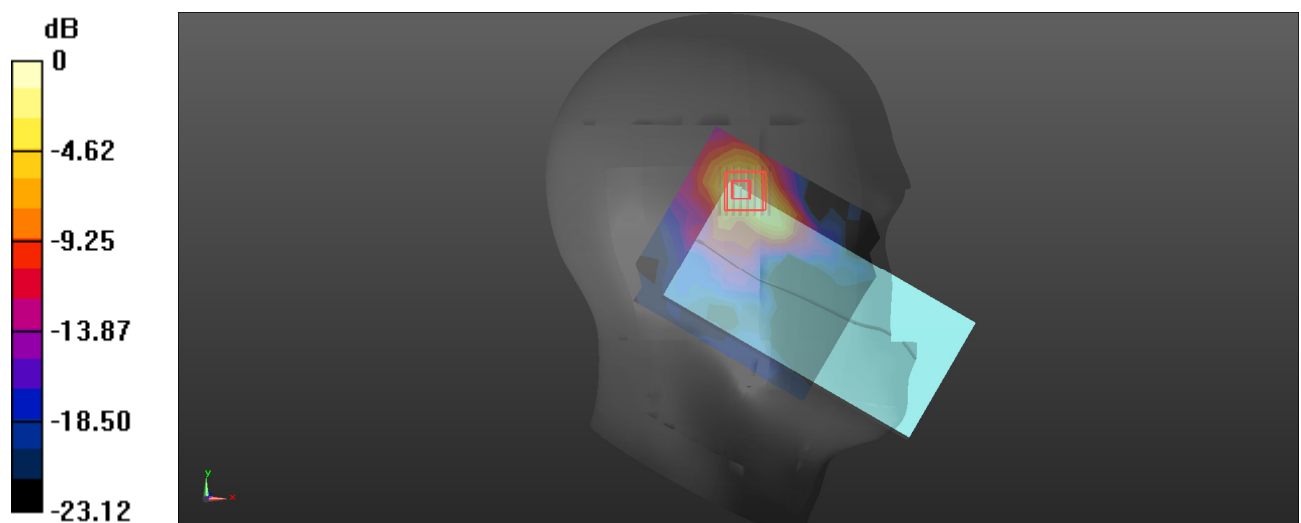

0 dB = 2.48 W/kg = 3.94 dBW/kg

Plot: 30#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5260 MHz; Duty Cycle: 1:1.157

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 34.581$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5260 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.3G 802.11ax20 Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.50 W/kg


Head Left Tilt/WLAN 5.3G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.952 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

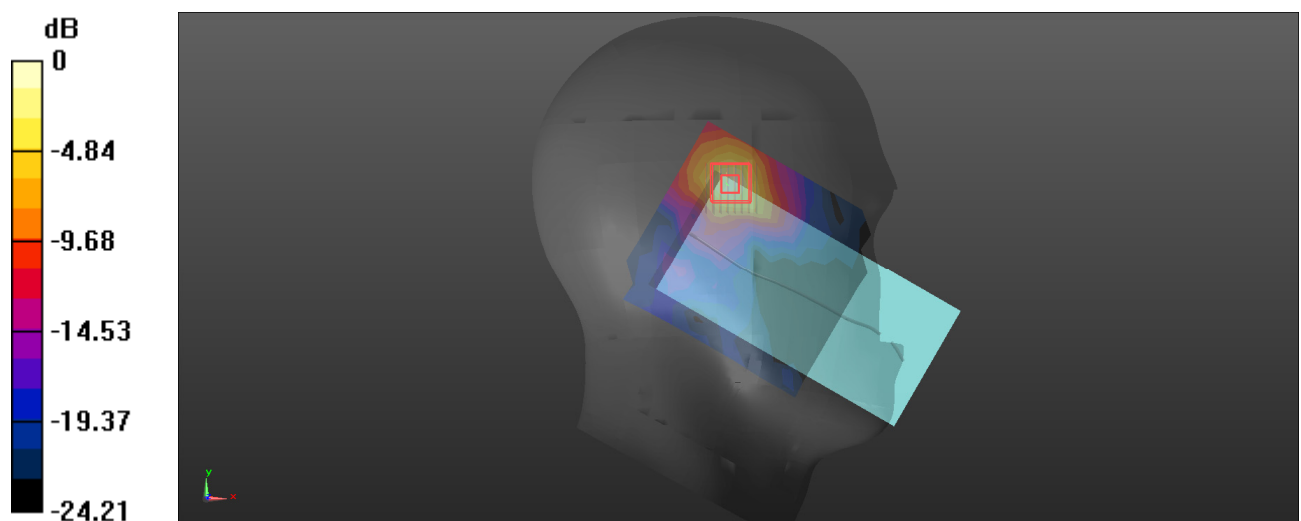

0 dB = 1.82 W/kg = 2.60 dBW/kg

Plot: 31#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.75 \text{ S/m}$; $\epsilon_r = 34.562$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.48 W/kg


Head Left Tilt/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.273 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

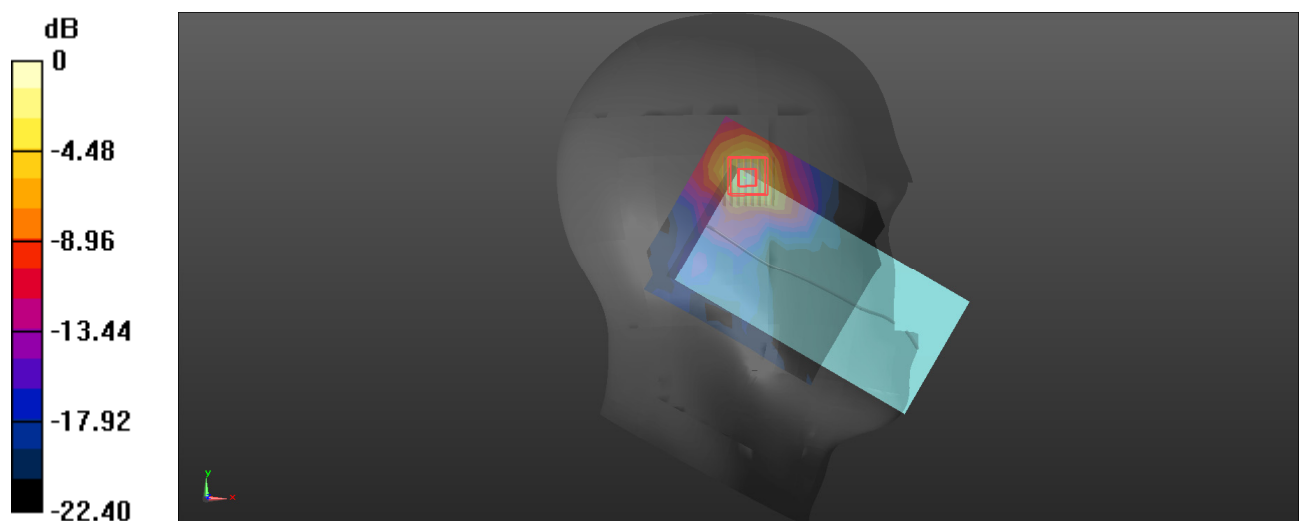

0 dB = 1.79 W/kg = 2.53 dBW/kg

Plot: 32#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.797 \text{ S/m}$; $\epsilon_r = 34.524$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5320 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.3G 802.11ax20 High/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.72 W/kg


Head Left Tilt/WLAN 5.3G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.834 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

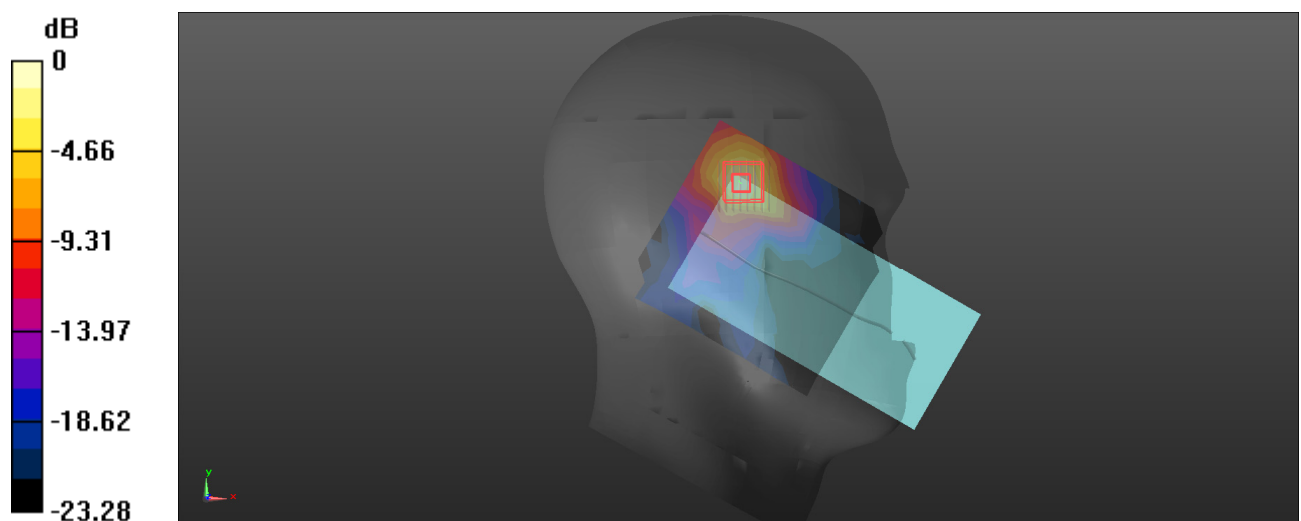

0 dB = 1.96 W/kg = 2.92 dBW/kg

Plot: 33#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 34.562$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.14 W/kg


Head Right Cheek/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.086 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

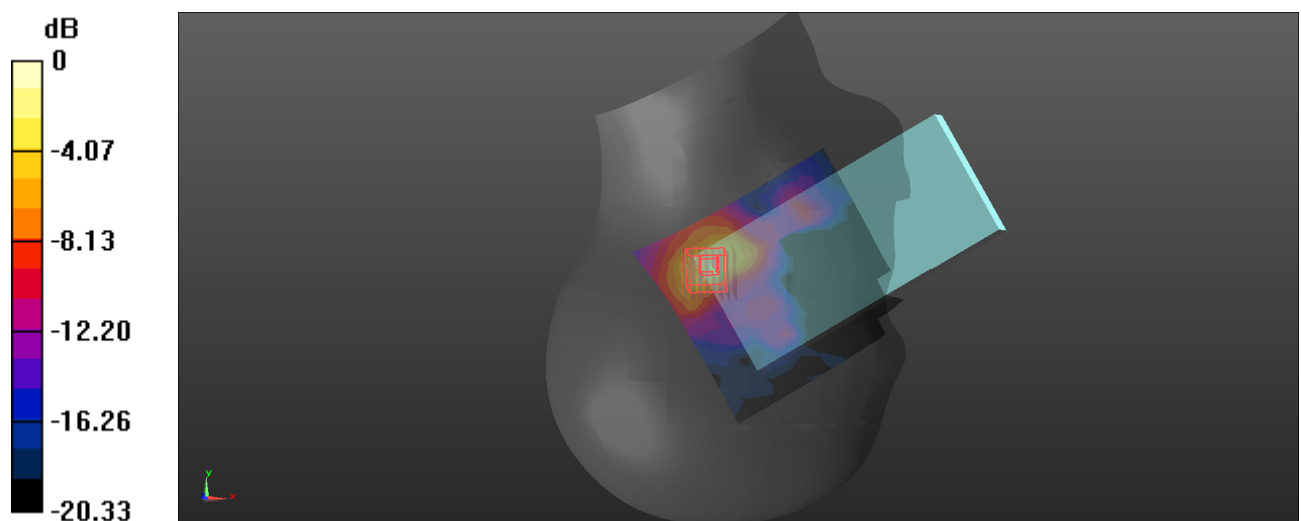

0 dB = 1.60 W/kg = 2.04 dBW/kg

Plot: 34#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.75 \text{ S/m}$; $\epsilon_r = 34.562$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.3G 802.11ax20 Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.52 W/kg


Head Right Tilt/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.651 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

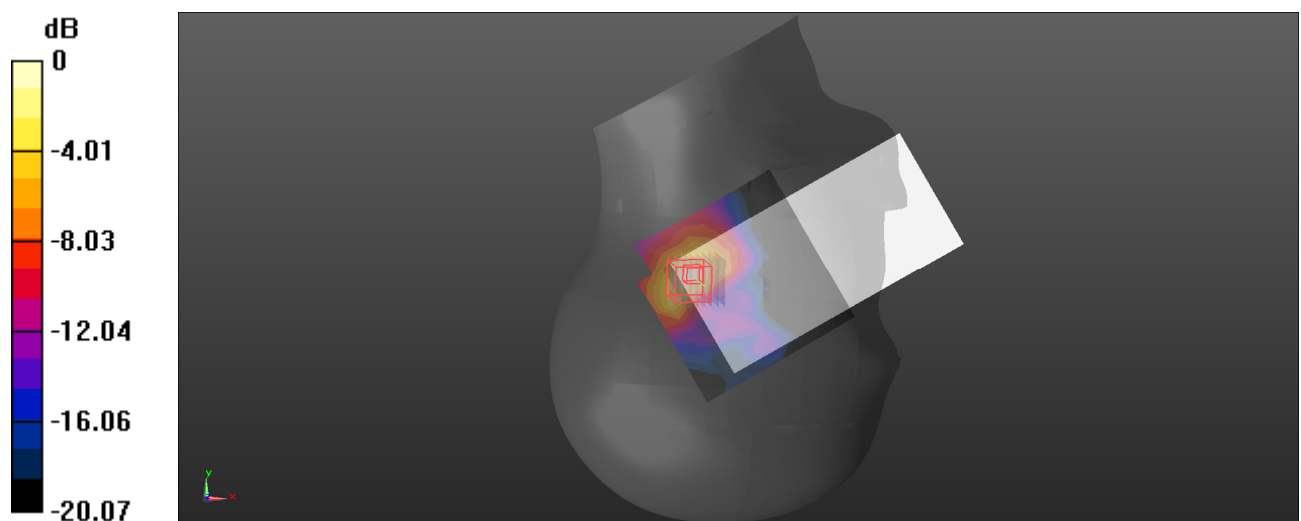

0 dB = 1.43 W/kg = 1.55 dBW/kg

Plot: 35#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.157

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.75 \text{ S/m}$; $\epsilon_r = 34.562$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.3G 802.11ax20 Mid/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.889 W/kg


Body Front/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.551 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.427 W/kg ; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.855 W/kg

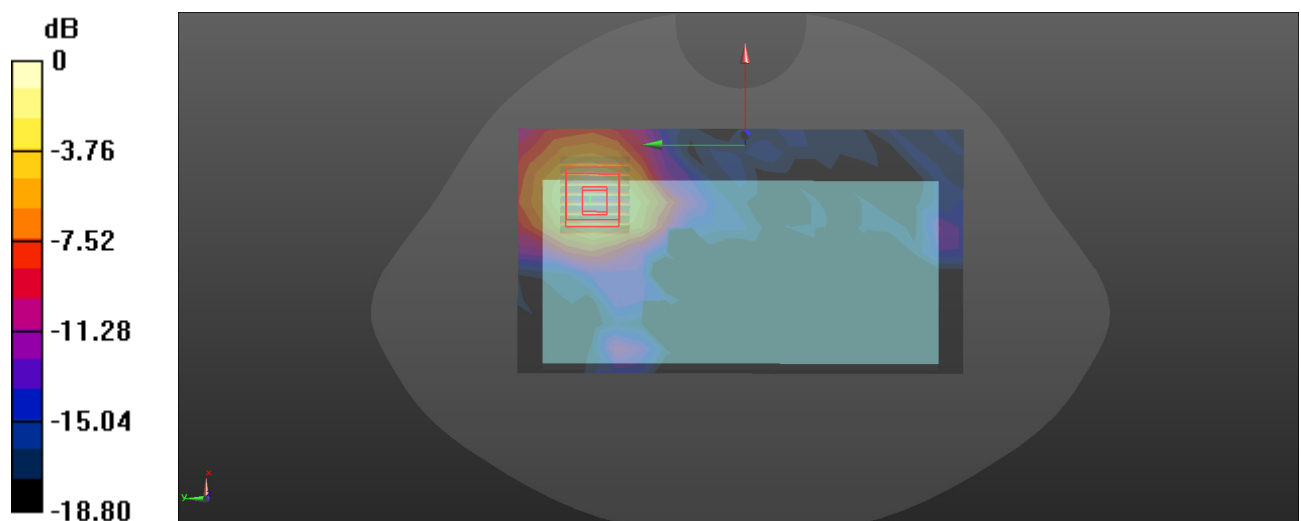

0 dB = 0.855 W/kg = -0.68 dBW/kg

Plot: 36#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5260 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 34.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5260 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.3G 802.11ax20 Low/Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.27 W/kg


Body Back/WLAN 5.3G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.558 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

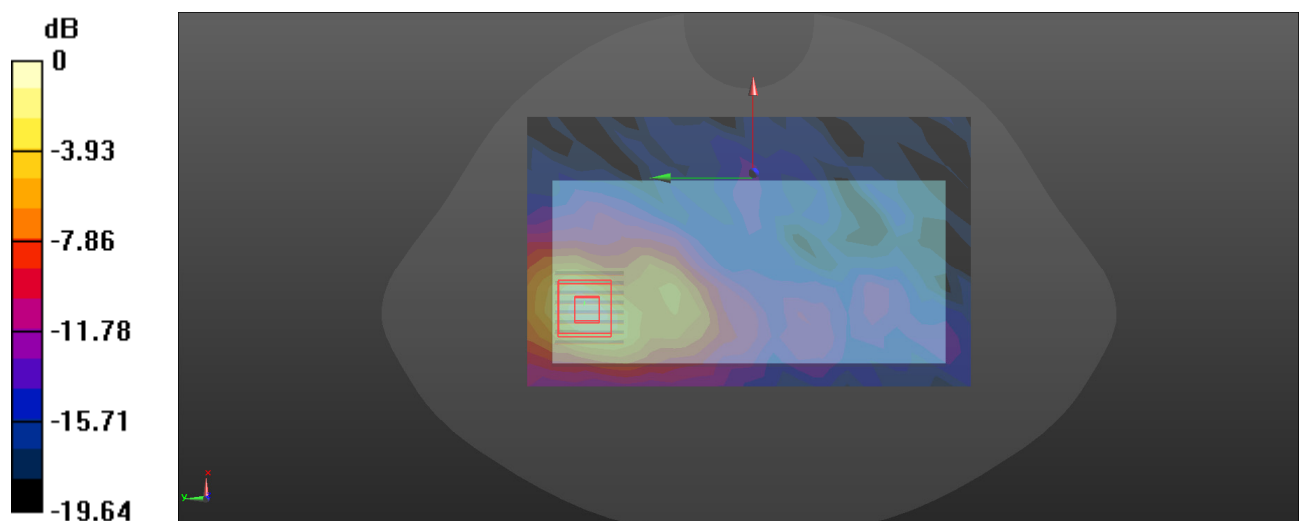

0 dB = 1.38 W/kg = 1.40 dBW/kg

Plot: 37#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.75 \text{ S/m}$; $\epsilon_r = 34.562$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.26 W/kg


Body Back/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.271 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

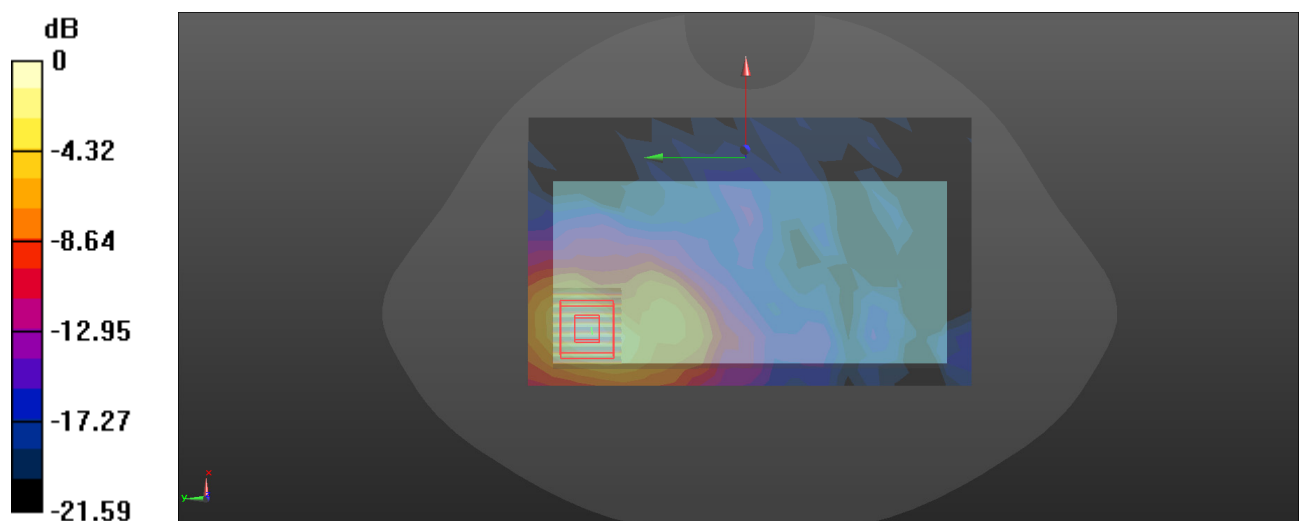

0 dB = 1.43 W/kg = 1.55 dBW/kg

Plot: 38#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.797 \text{ S/m}$; $\epsilon_r = 34.524$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5320 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.3G 802.11ax20 High/Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.52 W/kg


Body Back/WLAN 5.3G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.275 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

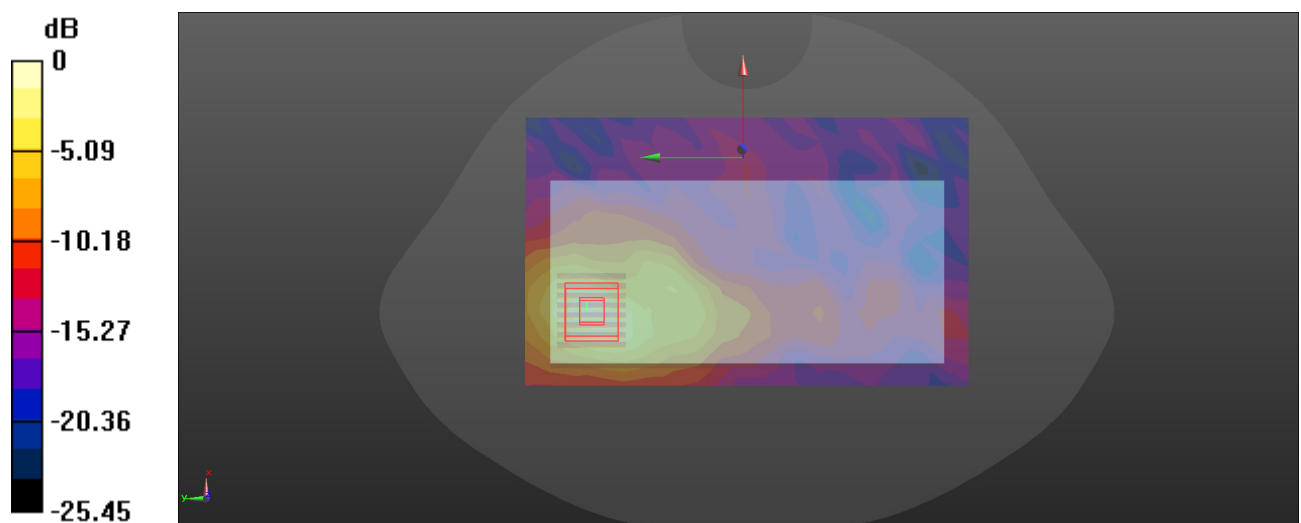

0 dB = 1.52 W/kg = 1.82 dBW/kg

Plot: 39#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 34.562$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 5.3G 802.11ax20 Mid/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.606 W/kg


Body Right/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.195 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

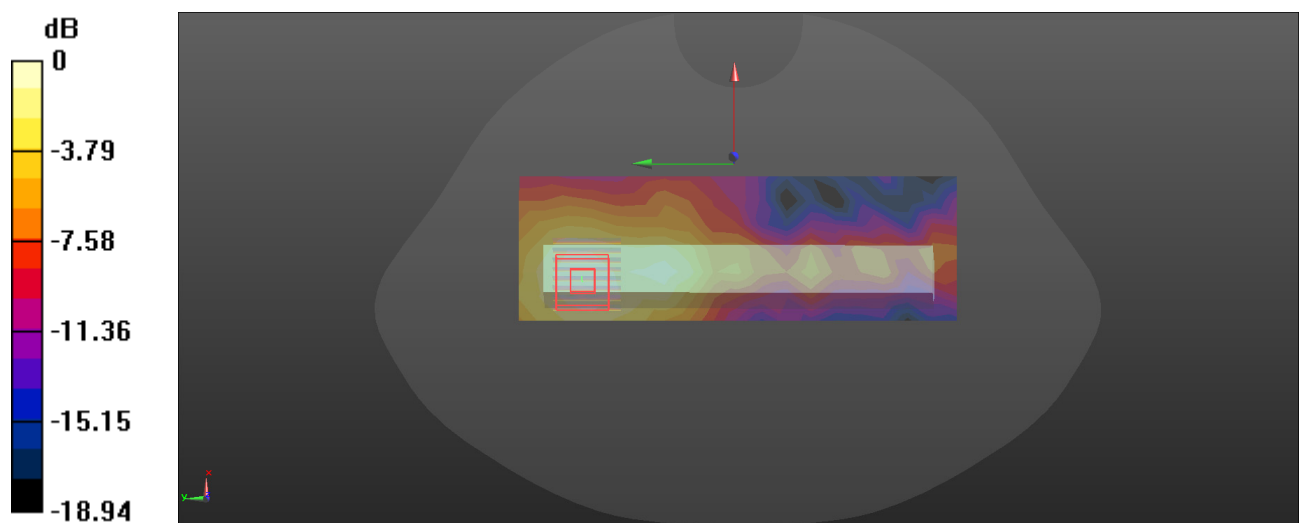

0 dB = 0.584 W/kg = -2.34 dBW/kg

Plot: 40#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 34.562$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.3G 802.11ax20 Mid/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg


Body Top/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.511 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.983 W/kg

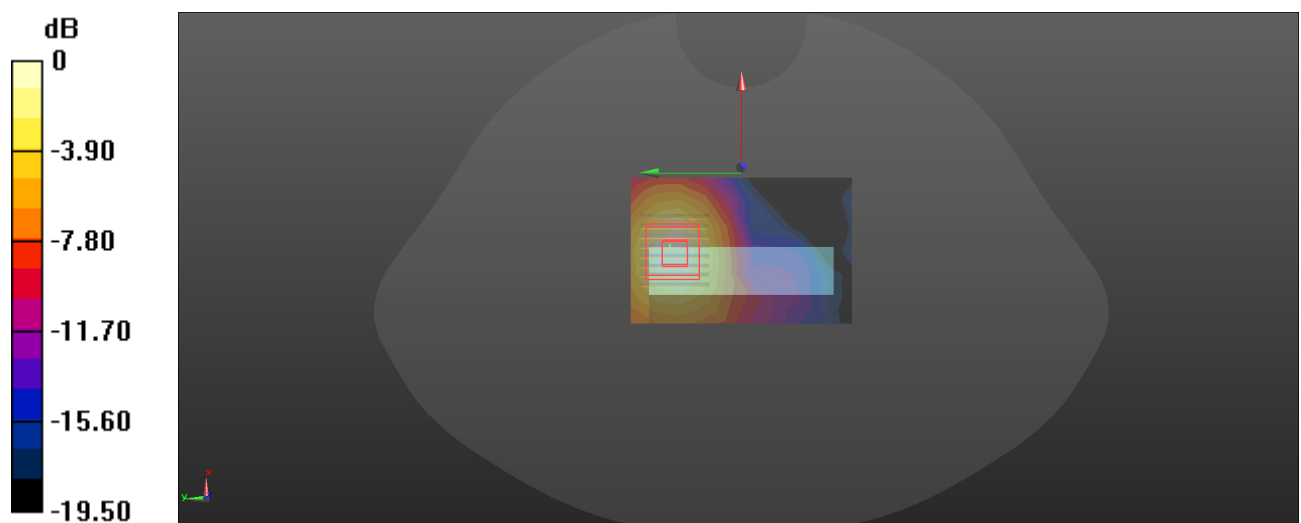

Plot: 41#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz; Duty Cycle: 1:1.022

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.896$ S/m; $\epsilon_r = 34.84$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.6G 802.11a Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.05 W/kg


Head Left Cheek/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.266 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.467 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

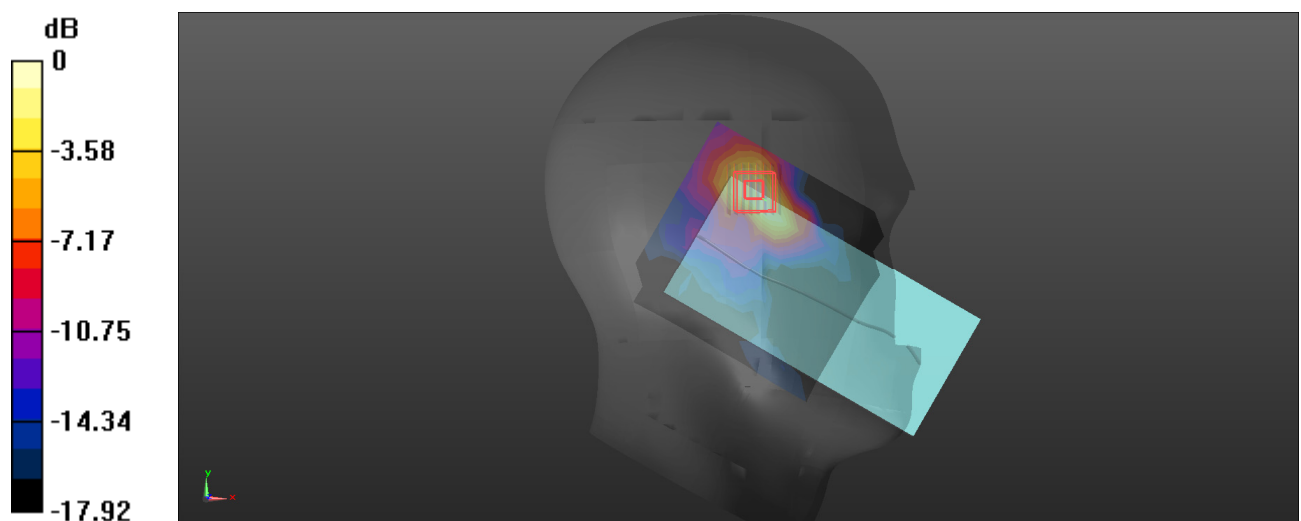

0 dB = 2.37 W/kg = 3.75 dBW/kg

Plot: 42#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.50 W/kg


Head Left Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.224 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 4.63 W/kg

SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 3.08 W/kg

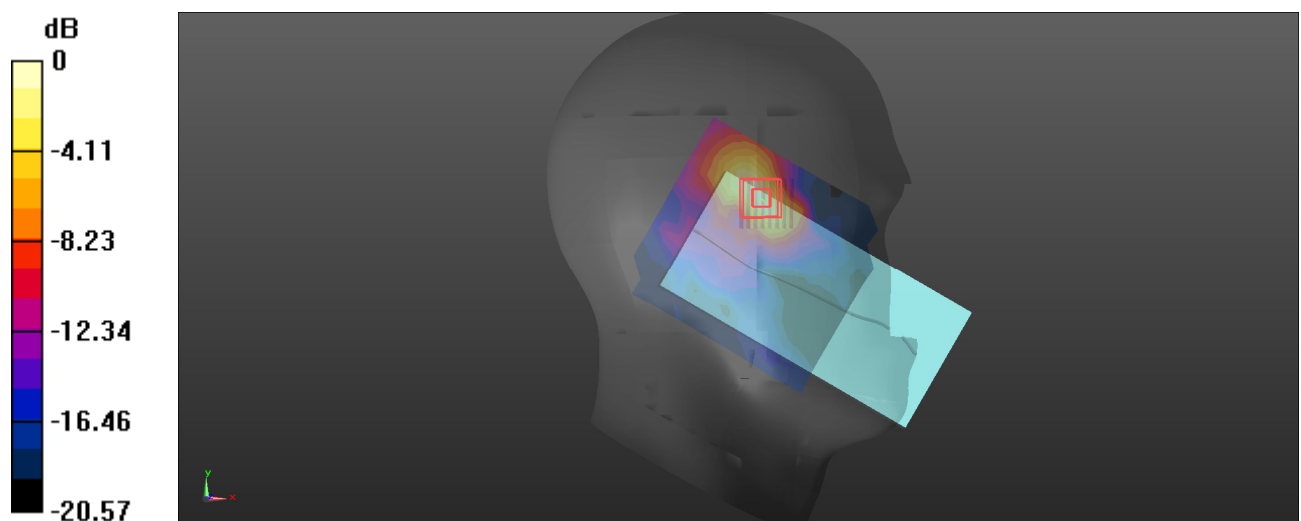

0 dB = 3.08 W/kg = 4.89 dBW/kg

Plot: 43#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5720$ MHz; $\sigma = 5.067$ S/m; $\epsilon_r = 35.438$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/ WLAN 5.6G 802.11a High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.11 W/kg


Head Left Cheek/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.616 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 2.48 W/kg

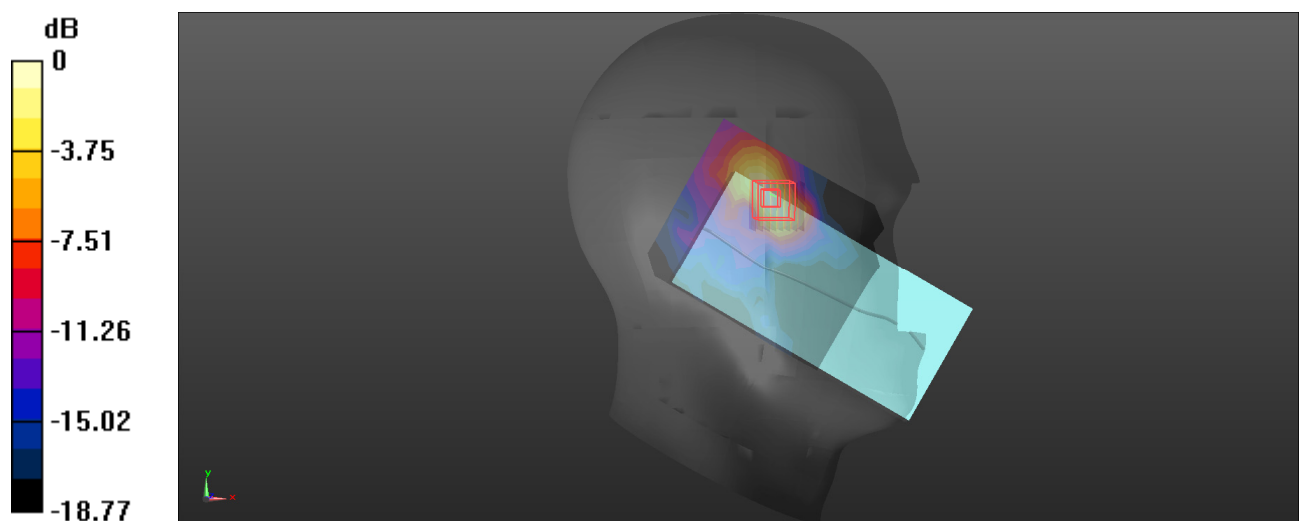

0 dB = 2.48 W/kg = 3.94 dBW/kg

Plot: 44#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.896$ S/m; $\epsilon_r = 34.84$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.6G 802.11a Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.10 W/kg


Head Left Tilt/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.006 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.424 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

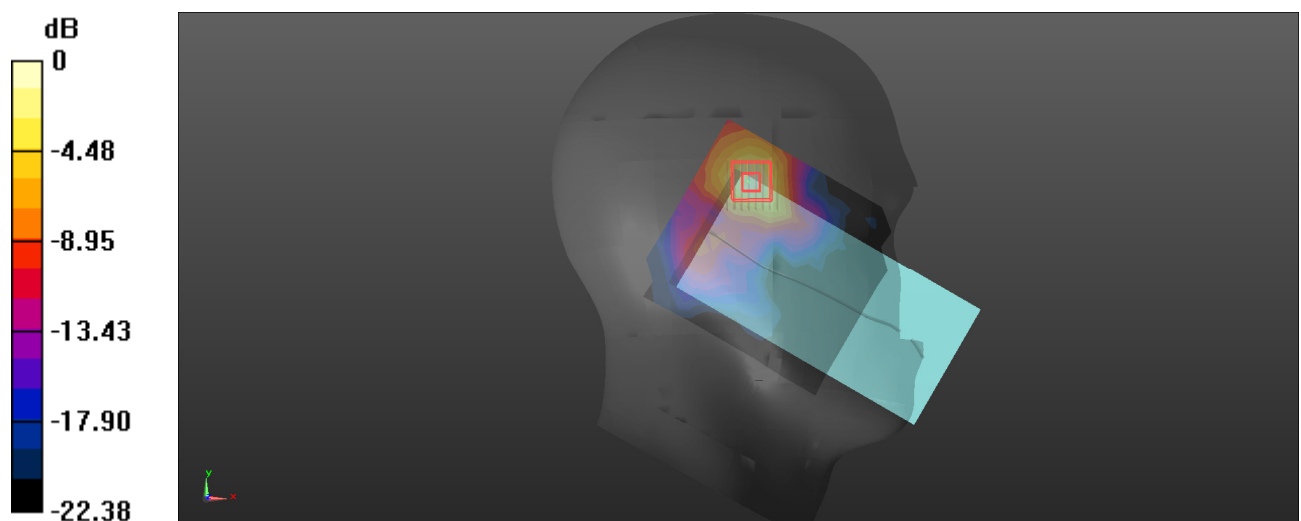

0 dB = 2.41 W/kg = 3.82 dBW/kg

Plot: 45#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.66 W/kg


Head Left Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.984 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

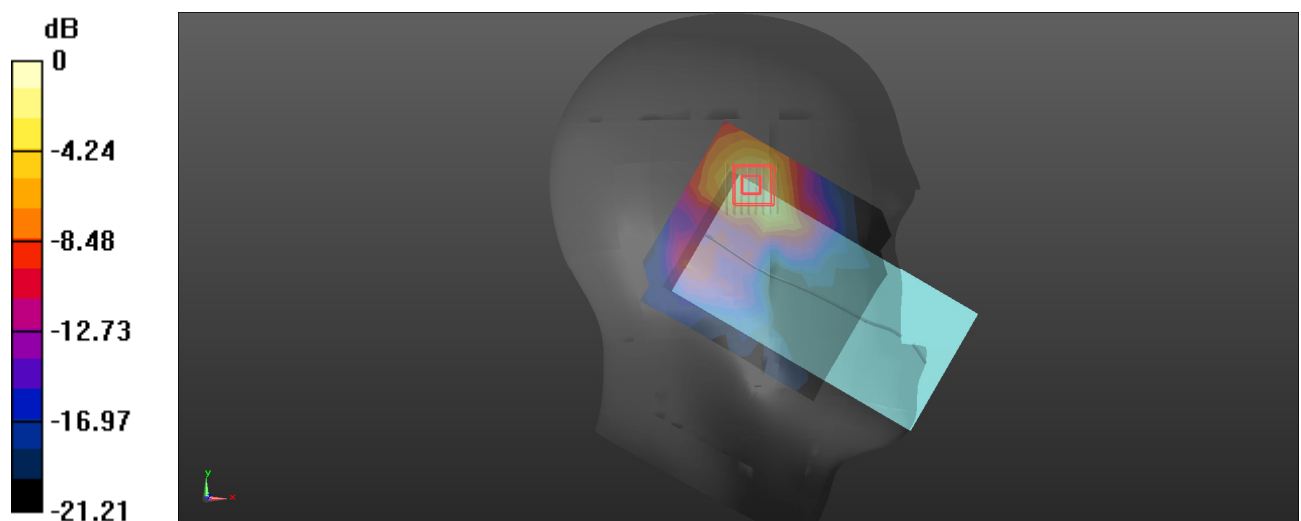

0 dB = 1.81 W/kg = 2.58 dBW/kg

Plot: 46#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5720$ MHz; $\sigma = 5.067$ S/m; $\epsilon_r = 35.438$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/ WLAN 5.6G 802.11a High/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.29 W/kg


Head Left Tilt/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.348 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

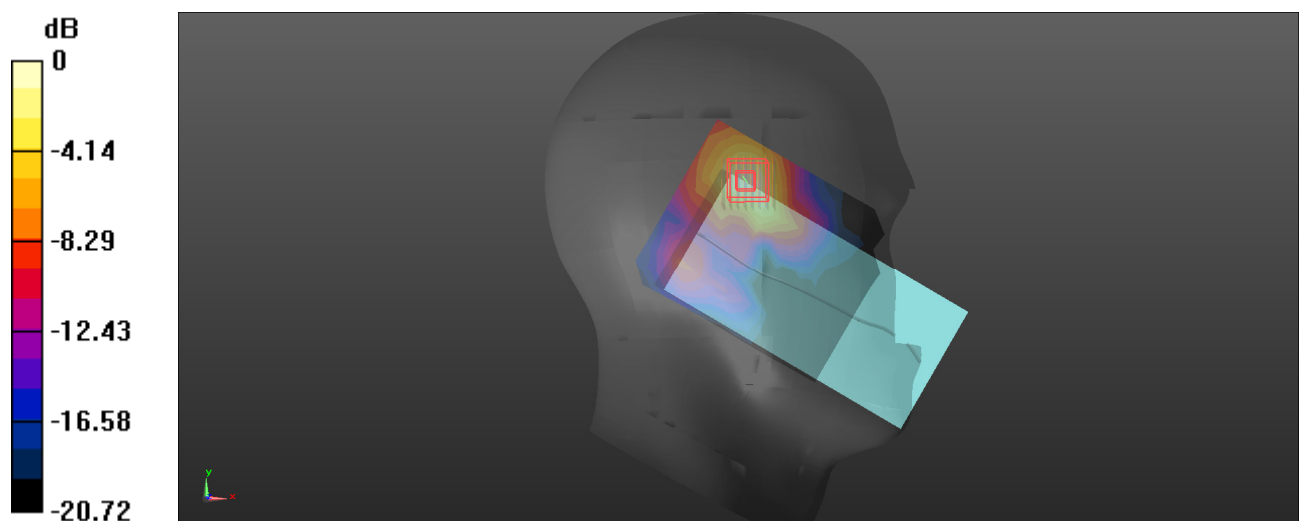

0 dB = 1.29 W/kg = 1.11 dBW/kg

Plot: 47#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz; Duty Cycle: 1:1.022

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.896$ S/m; $\epsilon_r = 34.84$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.6G 802.11a Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.17 W/kg


Head Right Cheek/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.777 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.93 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.451 W/kg

Maximum value of SAR (measured) = 2.05 W/kg

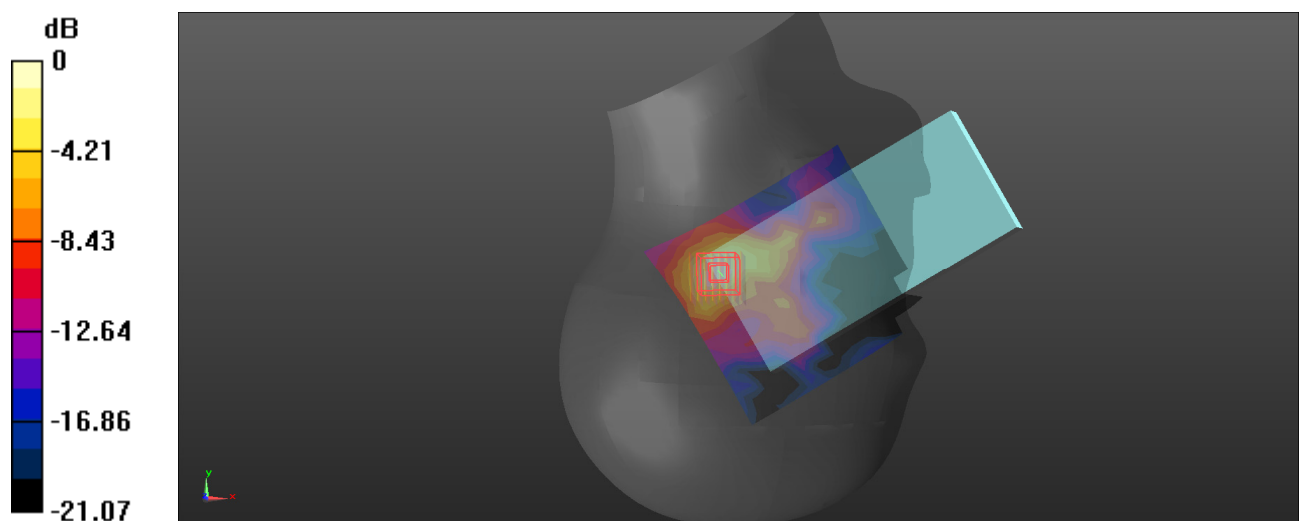

0 dB = 2.05 W/kg = 3.12 dBW/kg

Plot: 48#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.94 W/kg


Head Right Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.803 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

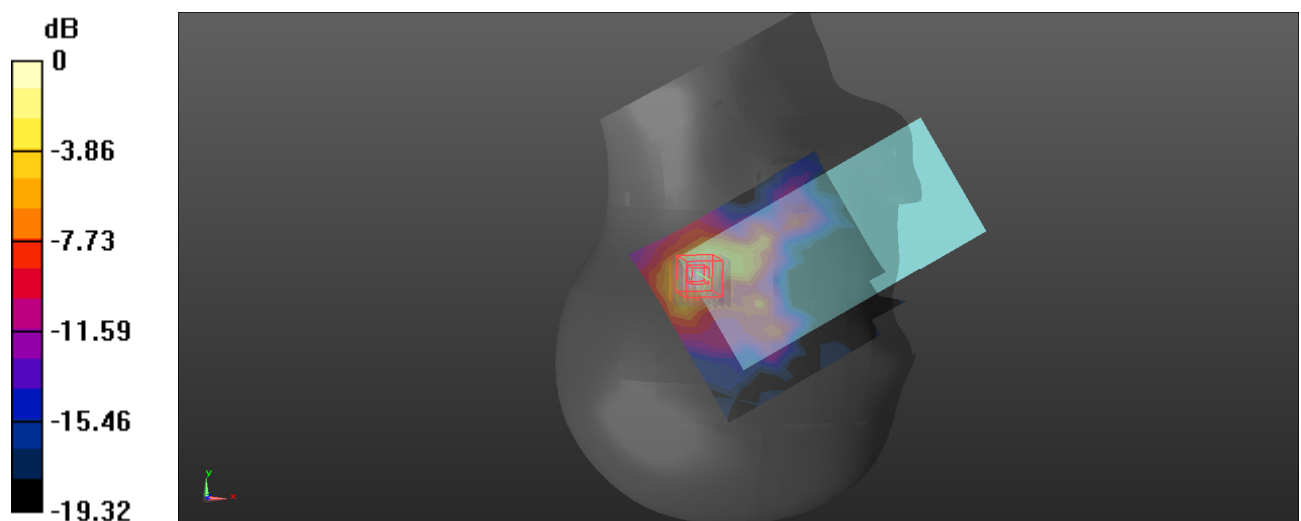

0 dB = 1.82 W/kg = 2.60 dBW/kg

Plot: 49#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5720$ MHz; $\sigma = 5.067$ S/m; $\epsilon_r = 35.438$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/ WLAN 5.6G 802.11a High/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.45 W/kg


Head Right Cheek/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.178 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

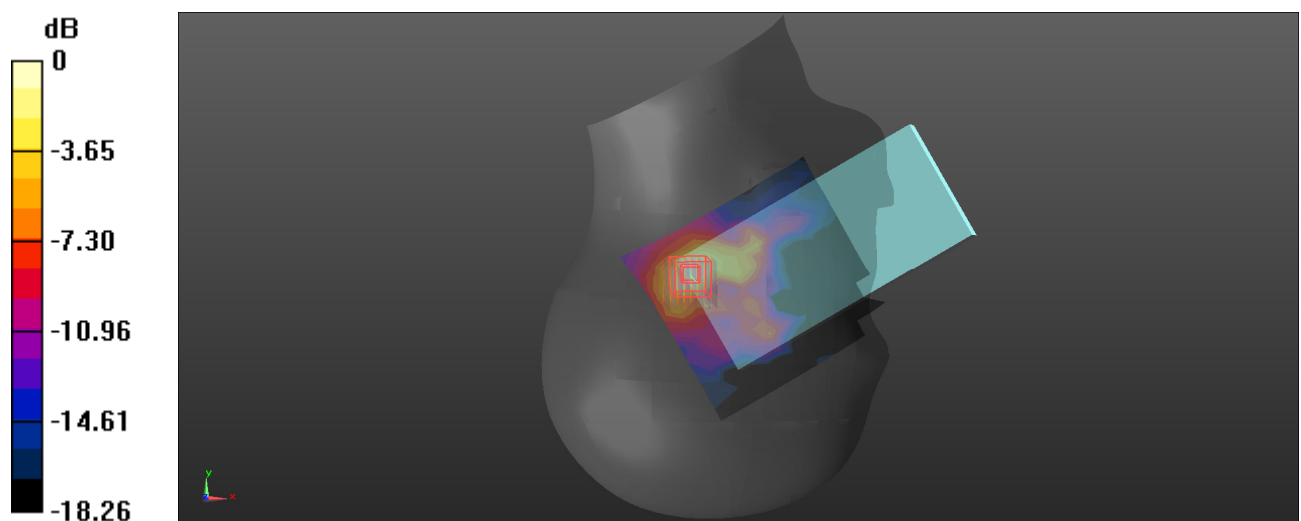

0 dB = 1.33 W/kg = 1.24 dBW/kg

Plot: 50#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.37 W/kg


Head Right Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.580 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

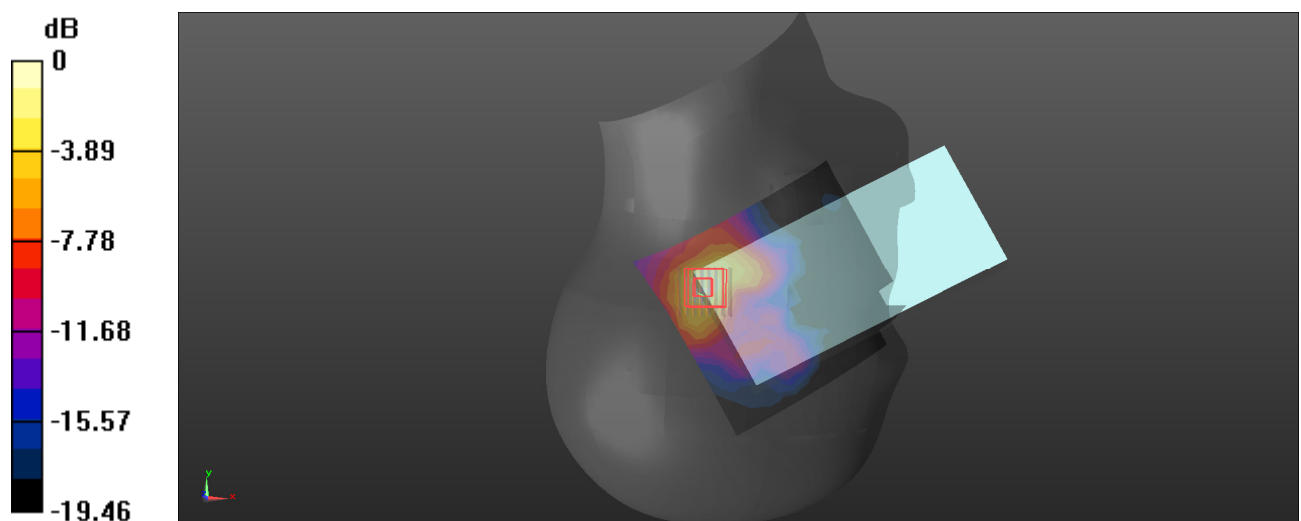

0 dB = 1.39 W/kg = 1.43 dBW/kg

Plot: 51#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.6G 802.11a Mid/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.900 W/kg


Body Front/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.256 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.942 W/kg

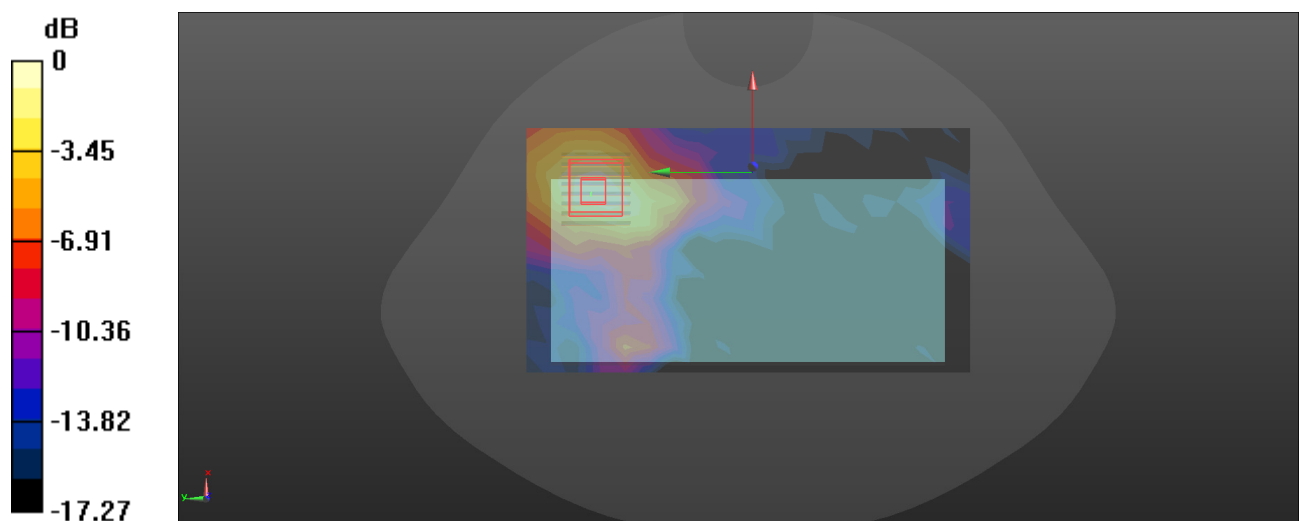

0 dB = 0.942 W/kg = -0.26 dBW/kg

Plot: 52#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.896$ S/m; $\epsilon_r = 34.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.6G 802.11a Low/Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.19 W/kg


Body Back/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.492 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.440 W/kg

Maximum value of SAR (measured) = 2.17 W/kg

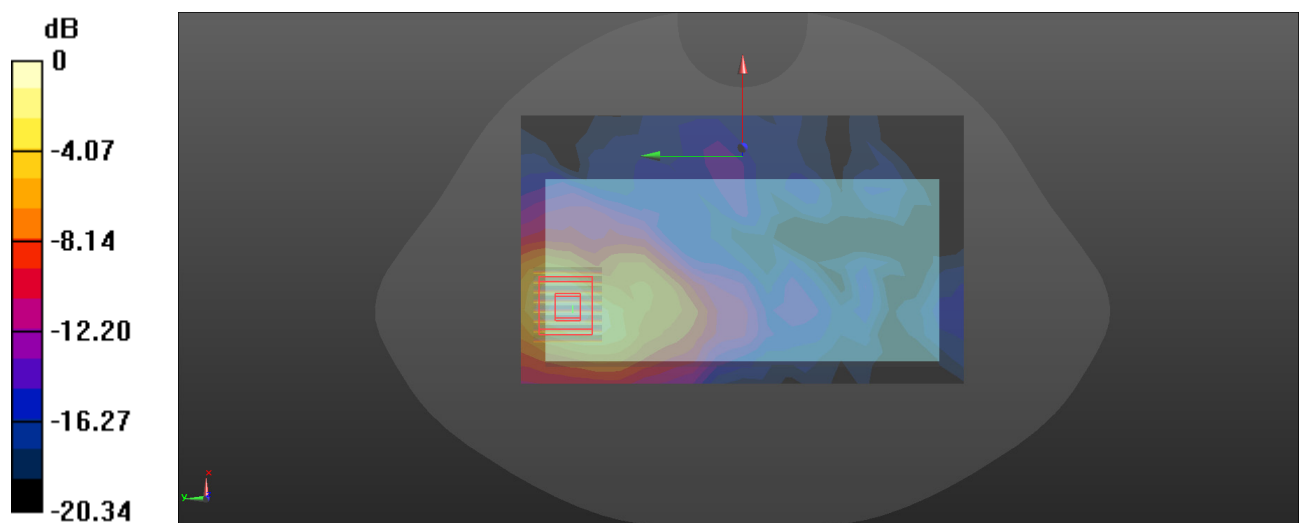

0 dB = 2.17 W/kg = 3.36 dBW/kg

Plot: 53#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.6G 802.11a Mid/Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.71 W/kg


Body Back/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.073 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

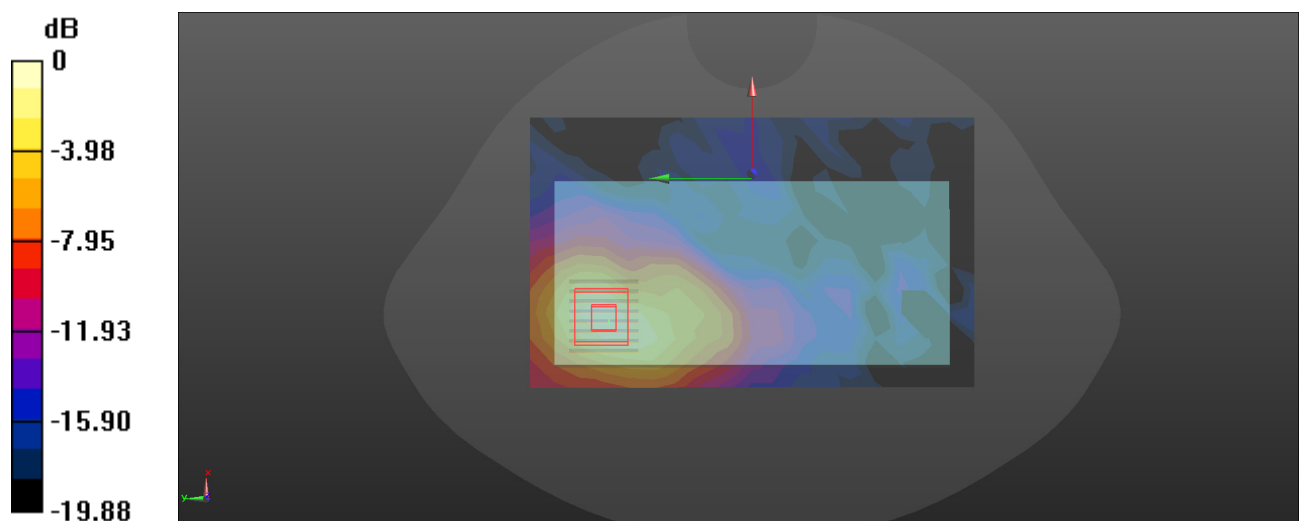

0 dB = 1.66 W/kg = 2.20 dBW/kg

Plot: 54#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used: $f = 5720$ MHz; $\sigma = 5.067$ S/m; $\epsilon_r = 35.438$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/ WLAN 5.6G 802.11a High/Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.24 W/kg


Body Back/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.527 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

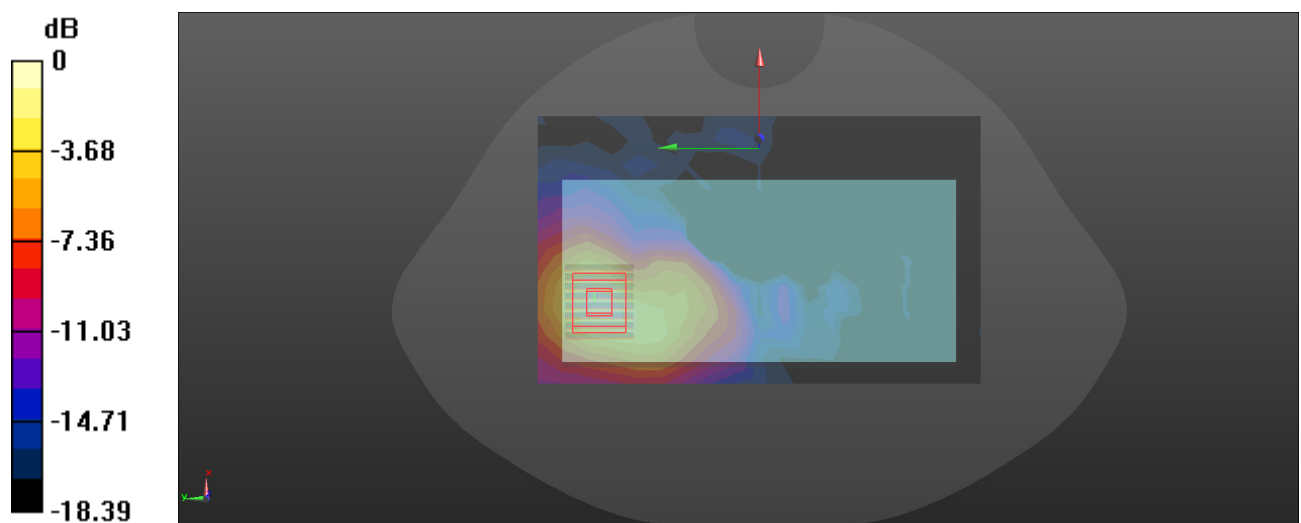

0 dB = 1.31 W/kg = 1.17 dBW/kg

Plot: 55#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 5.6G 802.11a Mid/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.999 W/kg


Body Right/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.180 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

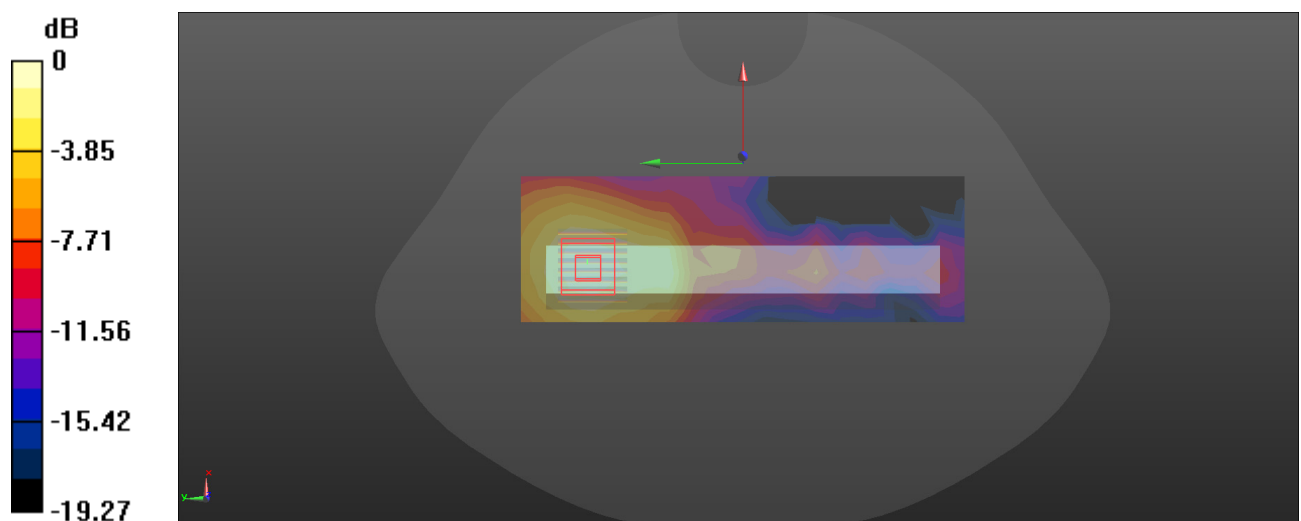

0 dB = 1.00 W/kg = 0.00 dBW/kg

Plot: 56#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.022

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.946$ S/m; $\epsilon_r = 34.736$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.6G 802.11a Mid/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.16 W/kg


Body Top/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.764 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

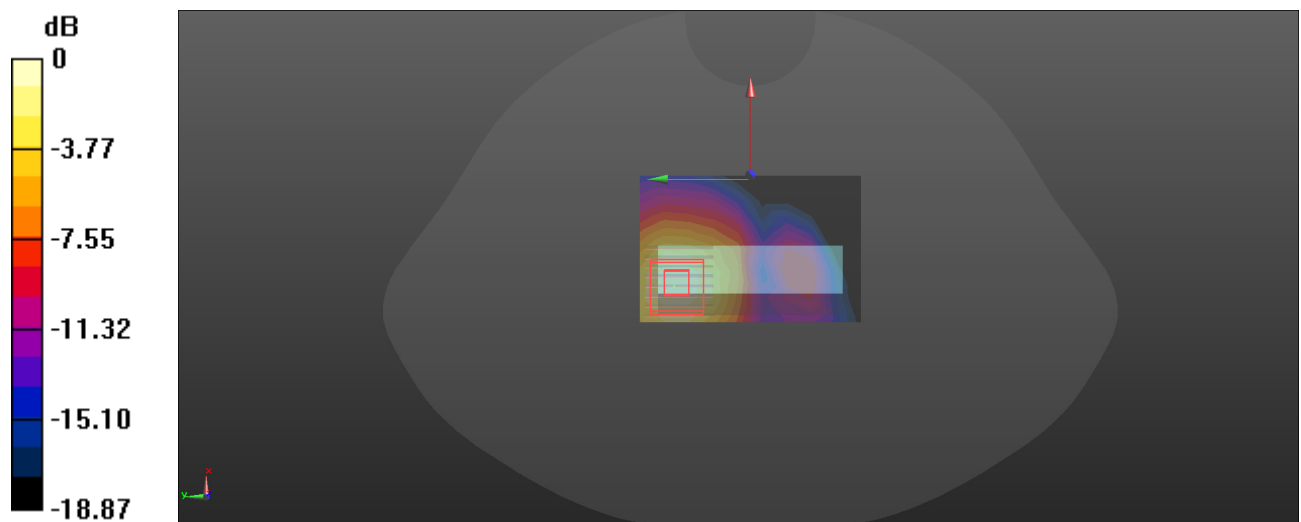

0 dB = 1.28 W/kg = 1.07 dBW/kg

Plot: 57#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.72 W/kg


Head Left Cheek/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.183 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.81 W/kg

SAR(1 g) = 1.37 W/kg; SAR(10 g) = 0.499 W/kg

Maximum value of SAR (measured) = 3.13 W/kg

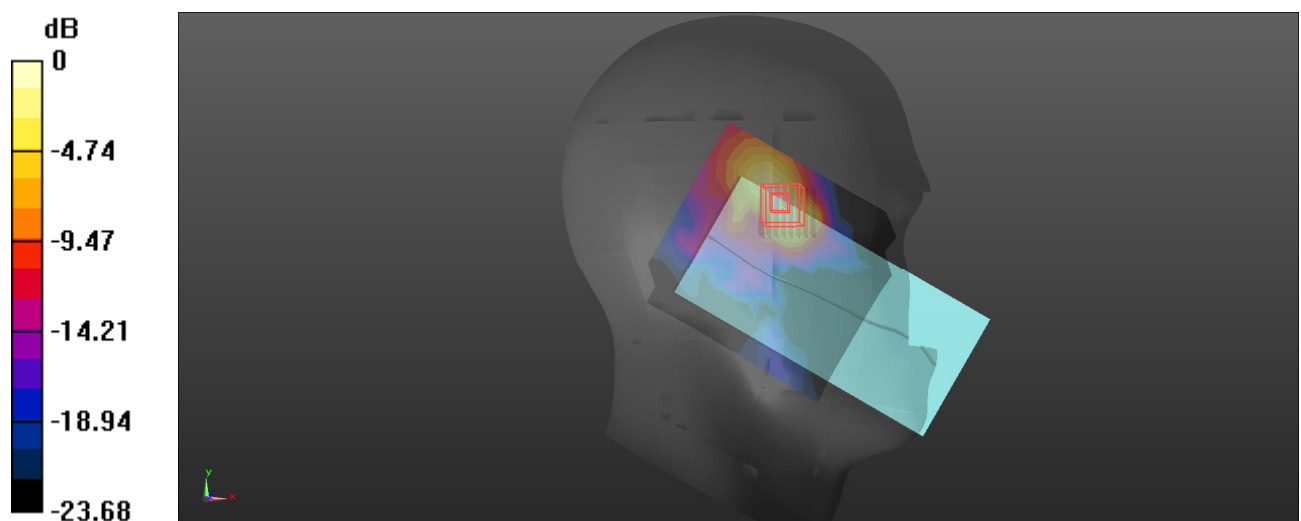

0 dB = 3.13 W/kg = 4.96 dBW/kg

Plot: 58#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.212$ S/m; $\epsilon_r = 35.32$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.8G 802.11ax40 High/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.54 W/kg


Head Left Cheek/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.233 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.51 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.470 W/kg

Maximum value of SAR (measured) = 2.94 W/kg

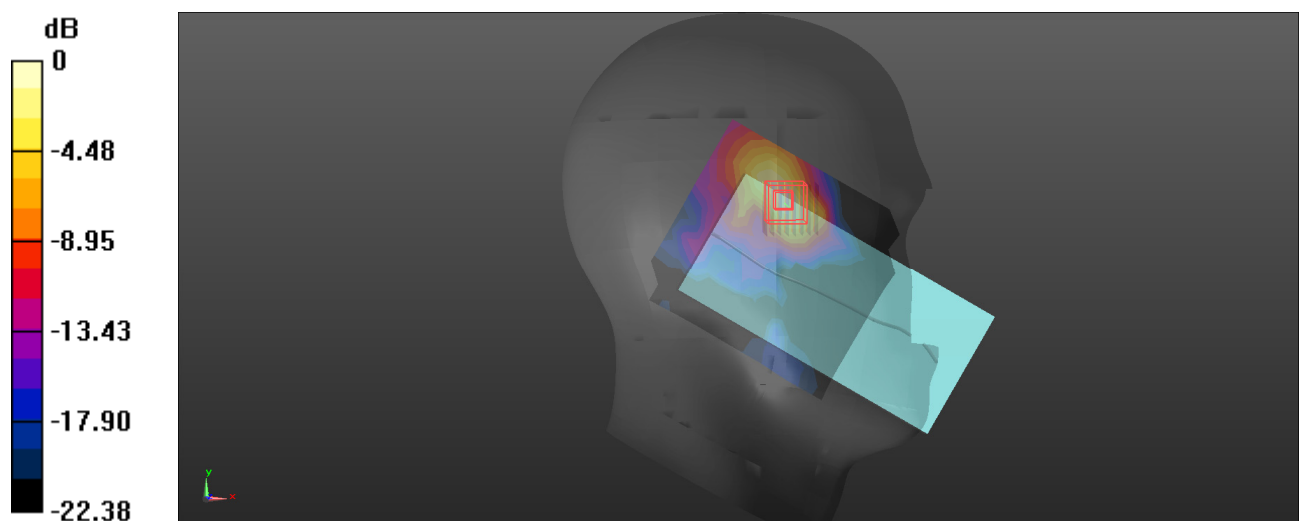

0 dB = 2.94 W/kg = 4.68 dBW/kg

Plot: 59#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.46 W/kg


Head Left Tilt/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.554 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

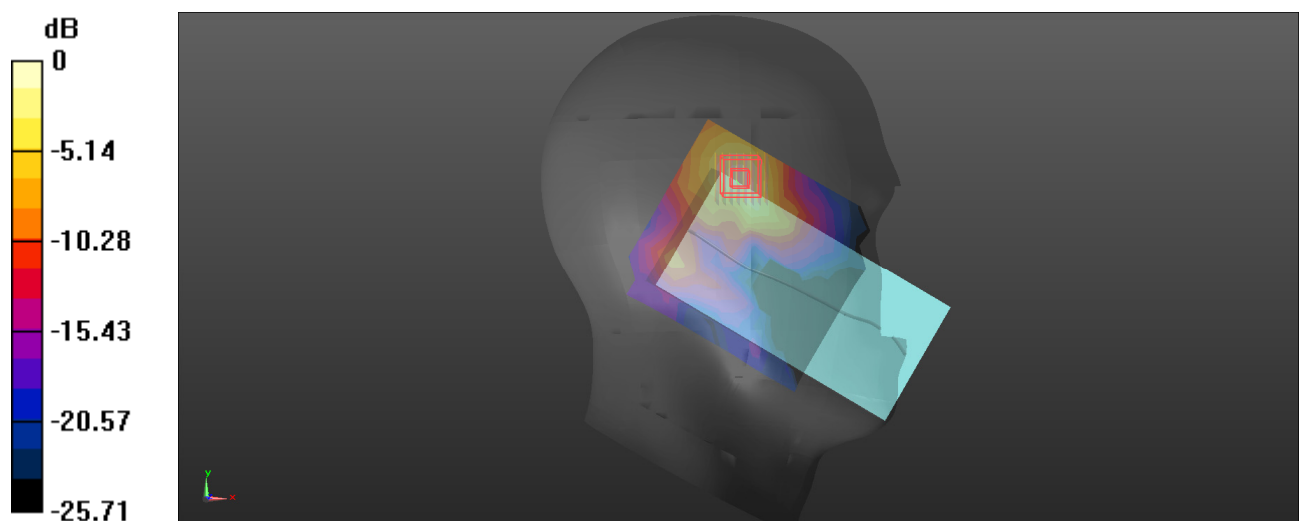

0 dB = 1.53 W/kg = 1.85 dBW/kg

Plot: 60#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 W/kg


Head Right Cheek/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.014 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

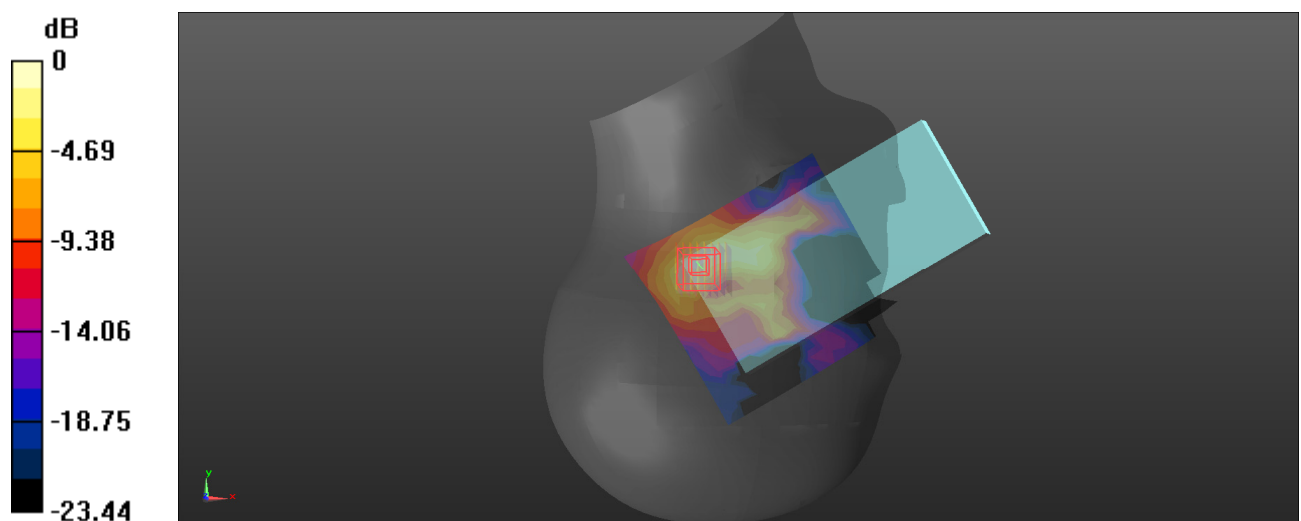

0 dB = 1.31 W/kg = 1.17 dBW/kg

Plot: 61#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.04 W/kg


Head Right Tilt/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.911 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

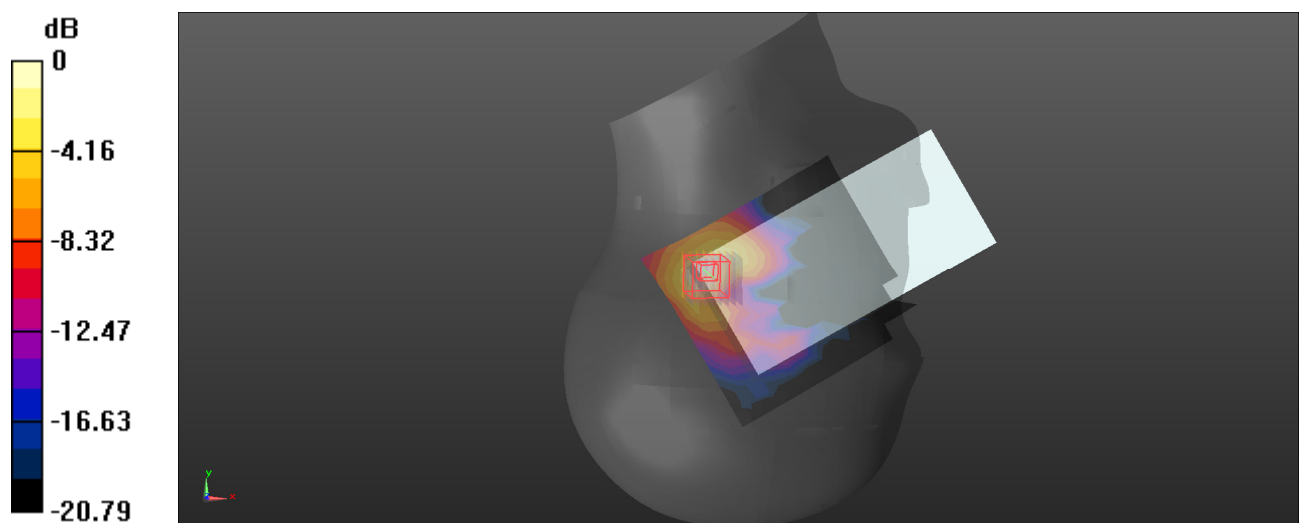

0 dB = 1.05 W/kg = 0.21 dBW/kg

Plot: 62#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.8G 802.11ax40 Low/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.697 W/kg


Body Front/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.011 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

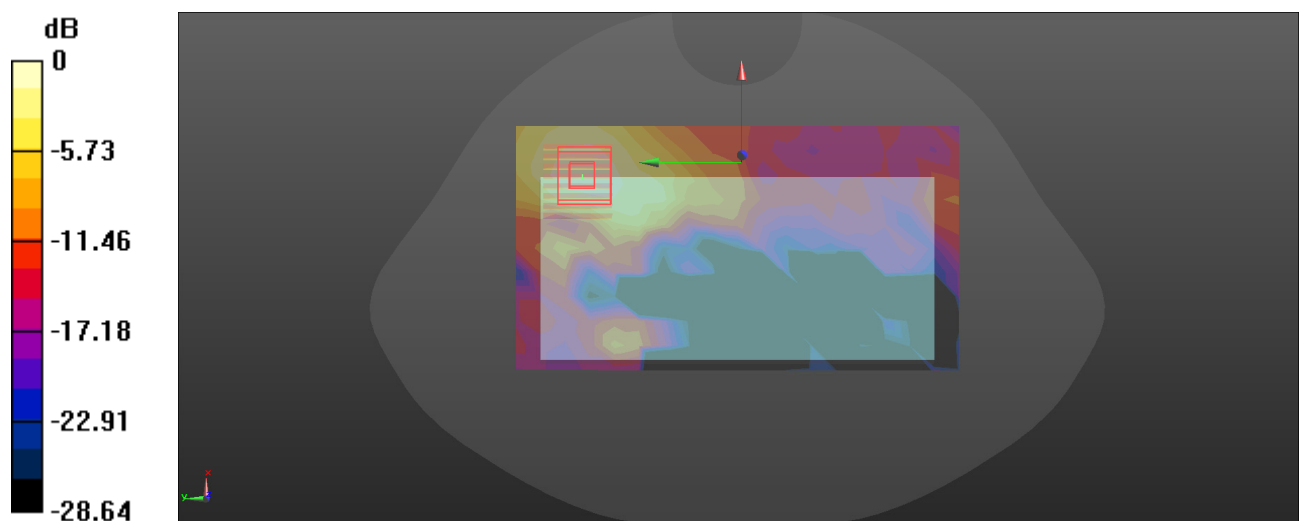

0 dB = 0.692 W/kg = -1.60 dBW/kg

Plot: 63#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.8G 802.11ax40 Low/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.37 W/kg


Body Back/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9200 V/m; Power Drift =0.12 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

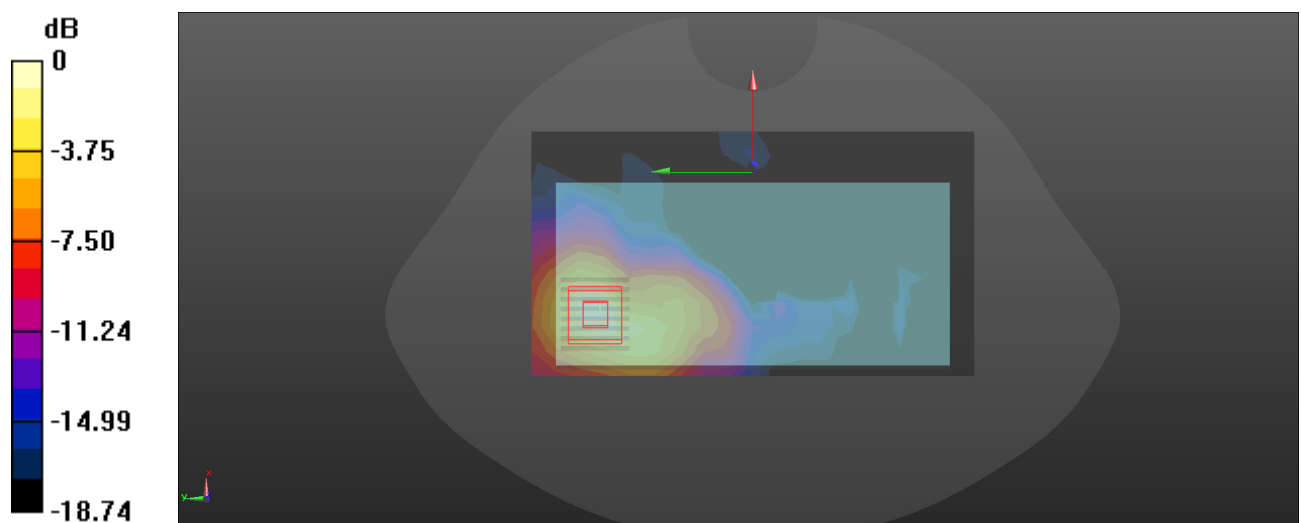

0 dB = 1.49 W/kg = 1.73 dBW/kg

Plot: 64#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.212$ S/m; $\epsilon_r = 35.32$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.8G 802.11ax40 High/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.16 W/kg


Body Back/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

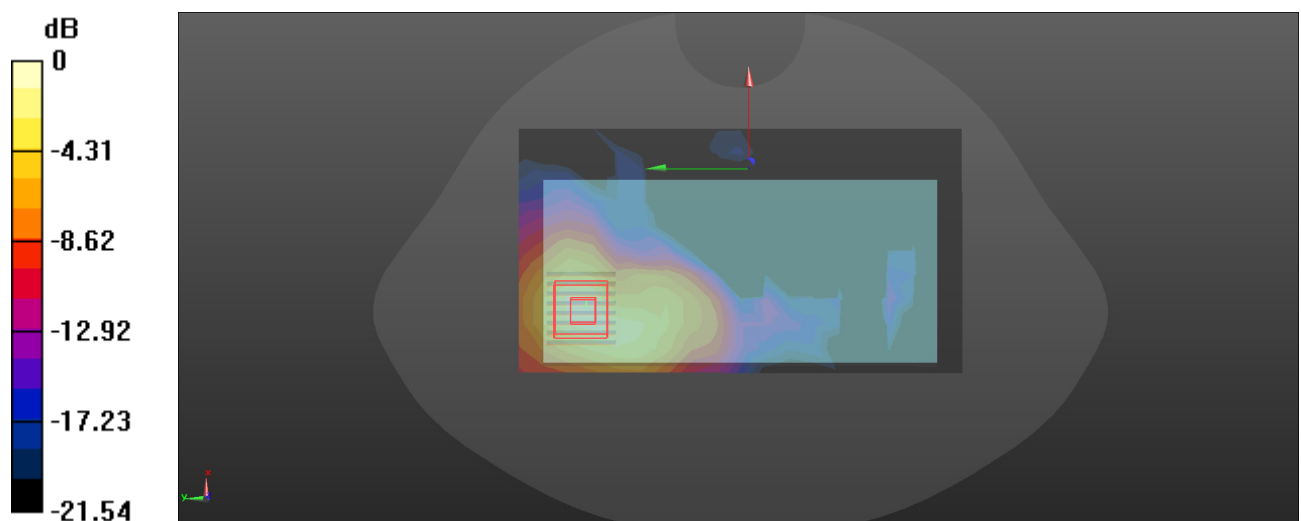

0 dB = 1.32 W/kg = 1.21 dBW/kg

Plot: 65#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 5.8G 802.11ax40 Low/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.21 W/kg


Body Right/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.592 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.255 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

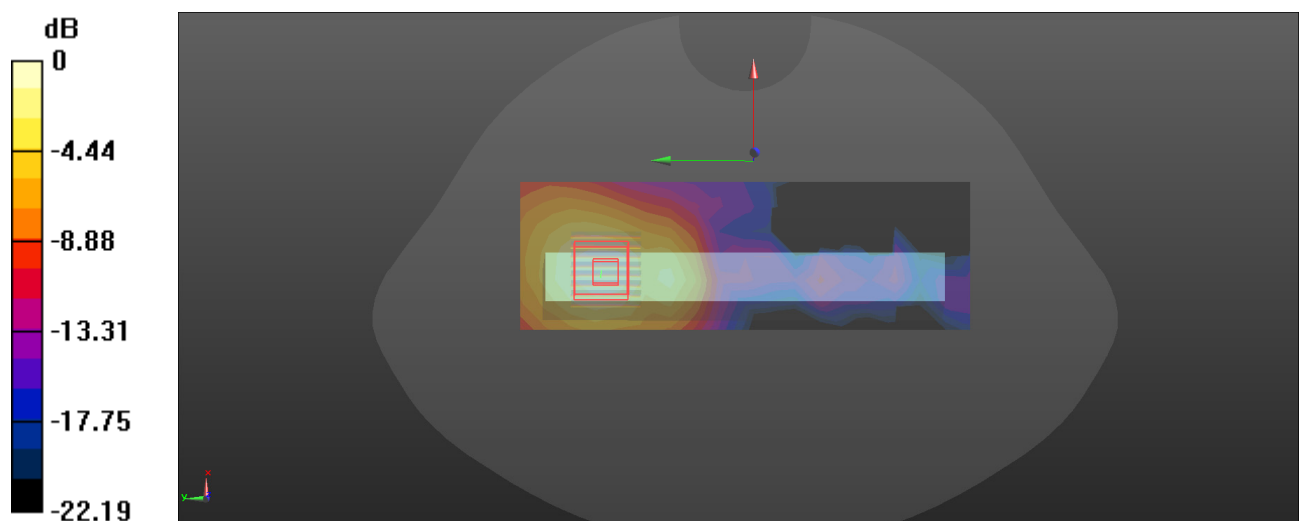

0 dB = 1.22 W/kg = 0.86 dBW/kg

Plot: 66#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.135$ S/m; $\epsilon_r = 35.383$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.8G 802.11ax40 Low/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg


Body Top/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.754 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

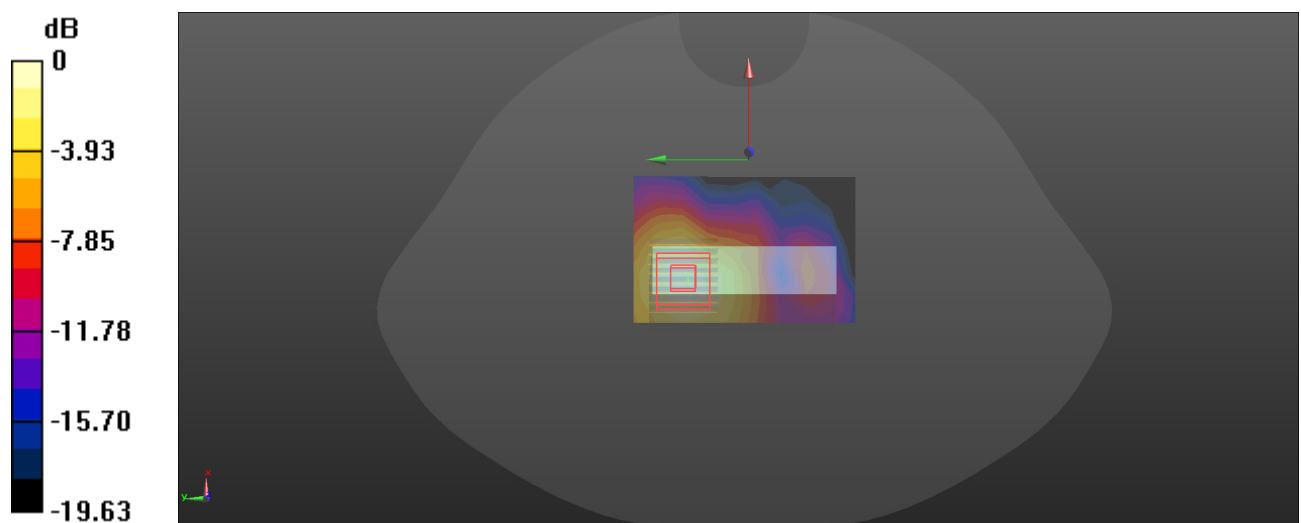

0 dB = 1.06 W/kg = 0.25 dBW/kg

Plot: 67#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.289$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.46 W/kg


Head Left Cheek/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.340 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 2.88 W/kg

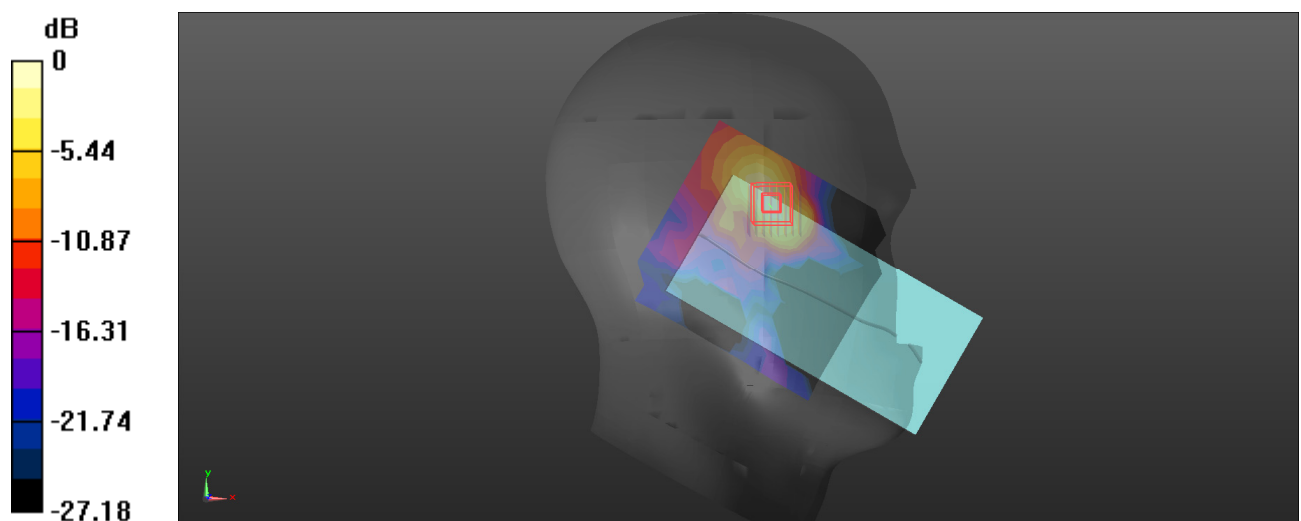

0 dB = 2.88 W/kg = 4.59 dBW/kg

Plot: 68#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.289$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.19 W/kg


Head Left Tilt/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.077 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

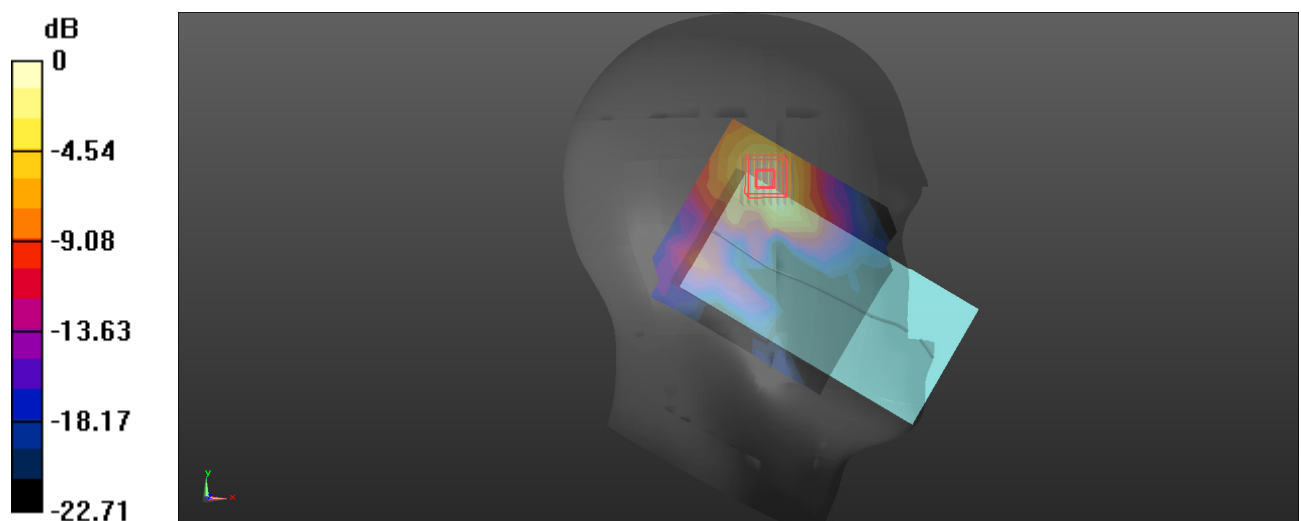

0 dB = 1.21 W/kg = 0.83 dBW/kg

Plot: 69#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.289$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.984 W/kg


Head Right Cheek/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.696 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

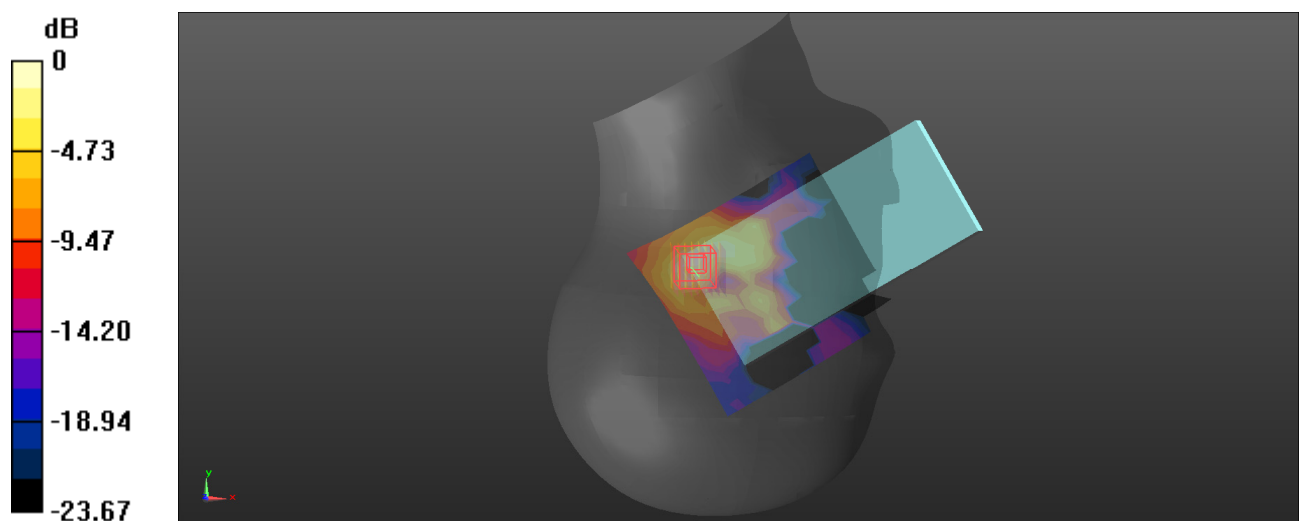

0 dB = 1.04 W/kg = 0.17 dBW/kg

Plot: 70#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815$ MHz; $\sigma = 5.251$ S/m; $\epsilon_r = 35.289$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.07 W/kg


Head Right Tilt/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.024 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

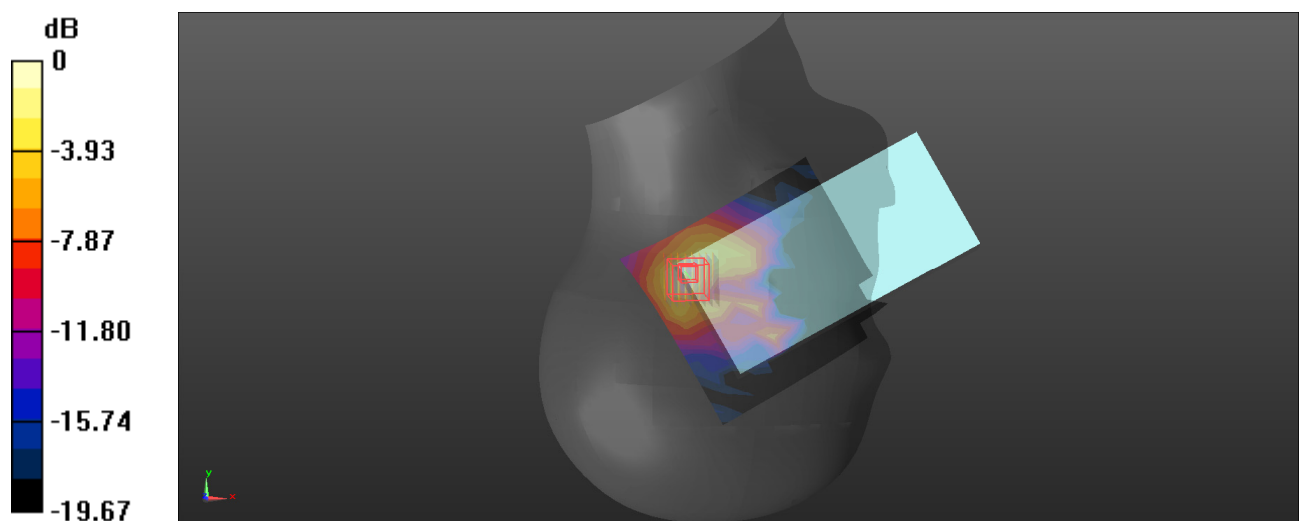

0 dB = 1.11 W/kg = 0.45 dBW/kg

Plot: 71#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.289$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.9G 802.11ac160 Mid/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.552 W/kg


Body Front/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.9380 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.530 W/kg

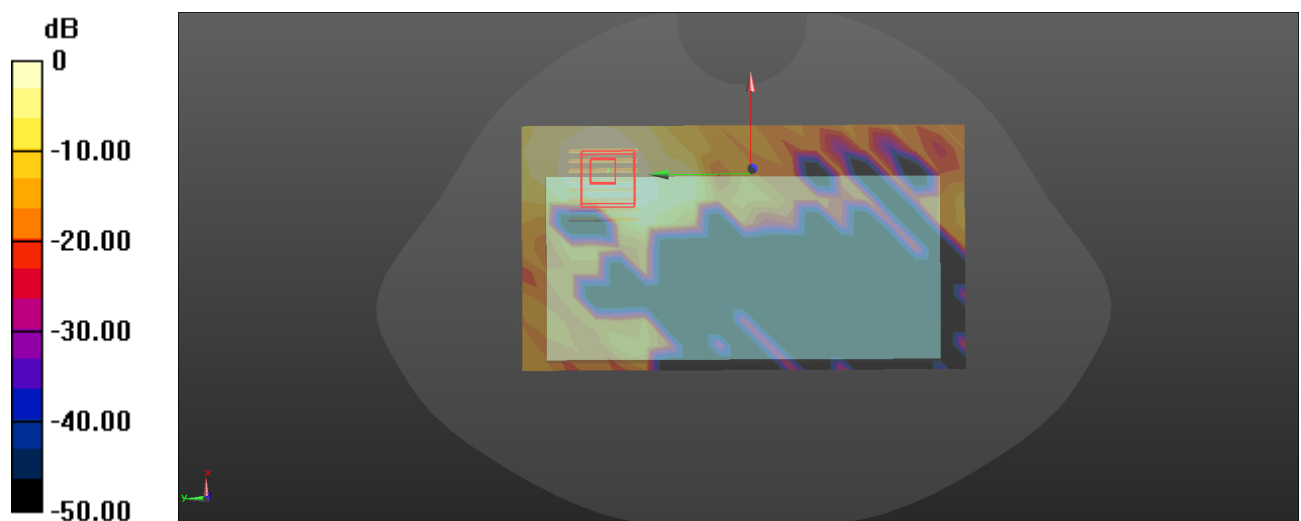

0 dB = 0.530 W/kg = -2.76 dBW/kg

Plot: 72#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.289$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.9G 802.11ac160 Mid/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.06 W/kg


Body Back/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.519 V/m; Power Drift = -0.12dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

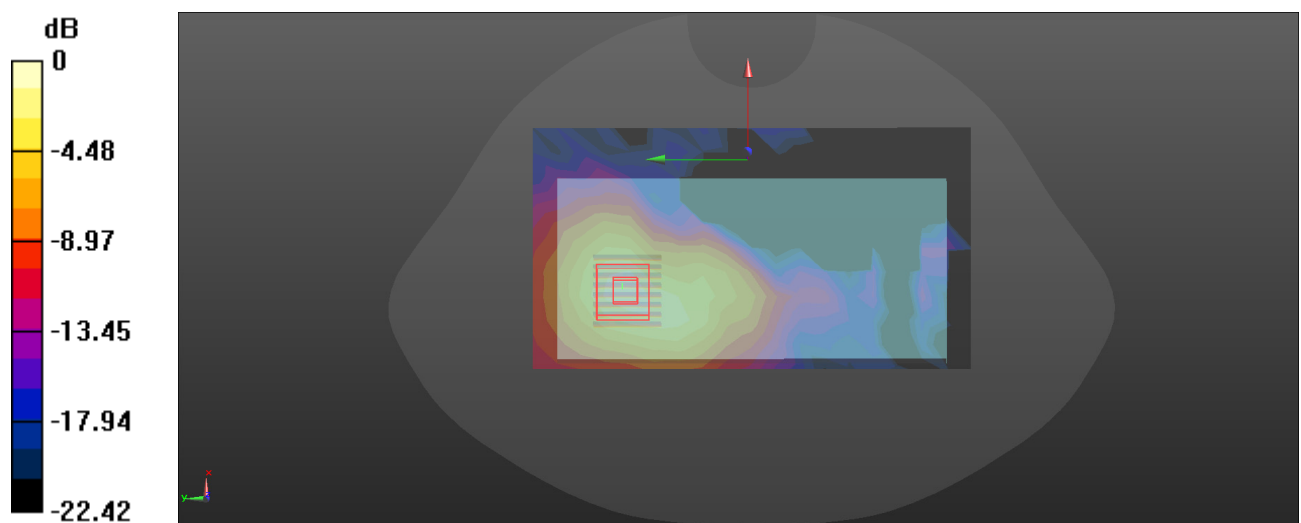

0 dB = 1.03 W/kg = 0.13 dBW/kg

Plot: 73#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815$ MHz; $\sigma = 5.251$ S/m; $\epsilon_r = 35.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 5.9G 802.11ac160 Mid/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.850 W/kg


Body Right/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.110 V/m; Power Drift = -0.12dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.863 W/kg

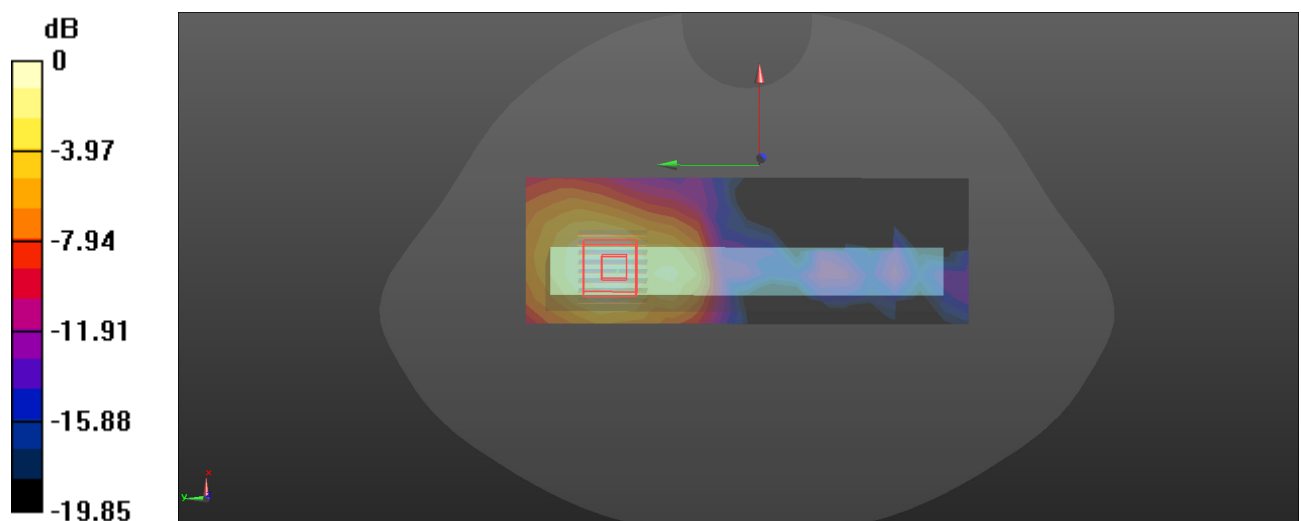

0 dB = 0.863 W/kg = -0.64 dBW/kg

Plot: 74#

DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used: $f = 5815$ MHz; $\sigma = 5.251$ S/m; $\epsilon_r = 35.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 5.9G 802.11ac160 Mid/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.865 W/kg


Body Top/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.953 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

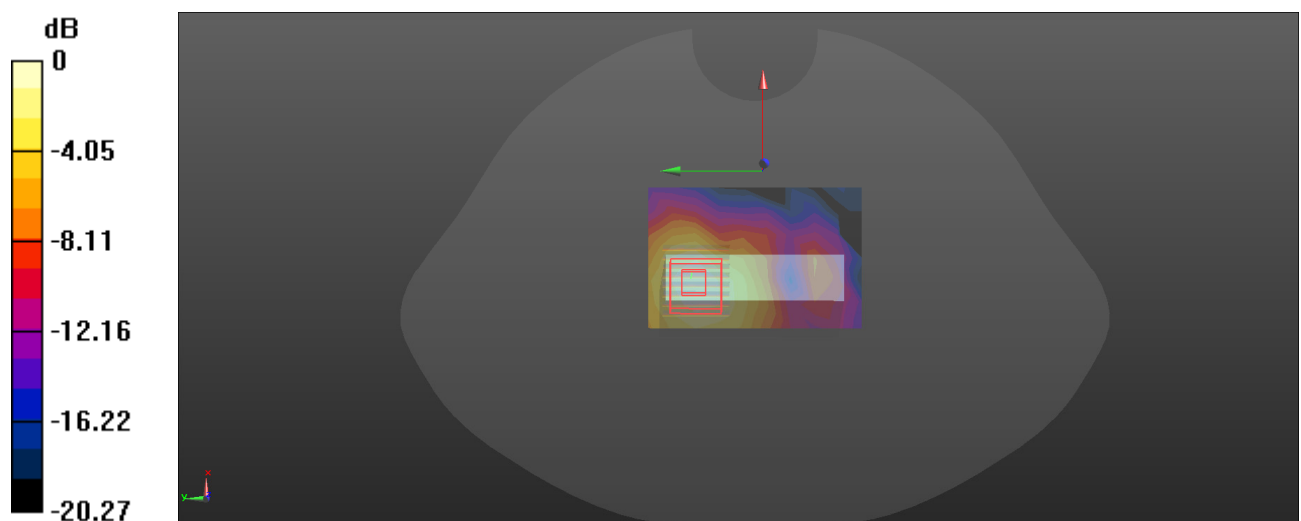

0 dB = 0.825 W/kg = -0.84 dBW/kg