

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2401U56759E-EM-00
FCC ID: YZZWP856

Test Standard (s)

FCC Part 15, Subpart B (Class B)

Sample Description

Product Type: Wi-Fi Smartphone
Model No.: WP856
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2024/06/18
Issue Date: 2024/09/14

Test Result:	Pass [▲]
--------------	-------------------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Joson Xiao

Joson Xiao
EMC Engineer

Approved By:

Moon Liu

Moon Liu
EMC Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §15.107 - AC LINE CONDUCTED EMISSIONS.....	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	14
LEVEL & OVER LIMIT CALCULATION	14
TEST DATA	14
FCC §15.109 - RADIATED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
LEVEL & OVER LIMIT CALCULATION	20
TEST DATA	20
EUT PHOTOGRAPHS.....	27
TEST SETUP PHOTOGRAPHS	28

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401U56759E-EM-00	Original Report	2024/09/14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wi-Fi Smartphone
Tested Model	WP856
Multiple Model(s)	N/A
Voltage Range	DC 3.85V from battery or DC 5V/9V from adapter
Highest operating frequency [#]	5895MHz (Provided by the applicant)
Equipment Class	Class B
Sample number	2N43-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: QC18W-G Input: AC 100-240V, 50/60Hz, 0.5A, Max. Output: DC 5V, 3.0A or DC 9V, 2.0A or DC 12V, 1.5A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~200MHz	Horizontal	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz	Vertical	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Horizontal	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Vertical	5.05dB(k=2, 95% level of confidence)
	1GHz~6GHz	/	5.35dB(k=2, 95% level of confidence)
	6GHz~18GHz	/	5.44dB(k=2, 95% level of confidence)
	18GHz~40GHz	/	5.16dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in worst case condition.

Test Mode 1: Charging by adapter+ scanning QR code with scan module

Test Mode 2: Charging by adapter+ scanning QR code with rear camera

Test Mode 3: Charging by adapter+ recording video with front camera

Test Mode 4: Charging by adapter+ playing video

Test Mode 5: Charging by charger+ scanning QR code with scan module

Test Mode 6: Charging by charger + scanning QR code with rear camera

Test Mode 7: Charging by charger + recording video with front camera

Test Mode 8: Charging by charger + playing video

Test Mode 9: Downloading

Note: All of the above test modes were evaluated, but for EMI test item, only the worst-case data was shown in the test report.

EUT exercise software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Perceive world	Charger	DCR8	MF237170002000
DELL	PC	Latitude E5430	JG3NLV1
DELL	Adapter1	DA130PE1-00	CN-0JU012-68219-18B-JEYY-A04


External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded un-detachable AC cable	1.0	Socket	Mains/LISN
Unshielded detachable DC cable	1.0	Adapter	EUT/Charger
Shielded detachable USB cable	1.0	PC	EUT
Unshielded detachable RJ45 cable	8.0	PC	Internet
Unshielded detachable AC cable	1.0	Adapter1	LISN
Unshielded un-detachable DC cable	1.2	Adapter1	PC


Block Diagram of Test Setup

For Conducted Emissions


Test Mode 1~4

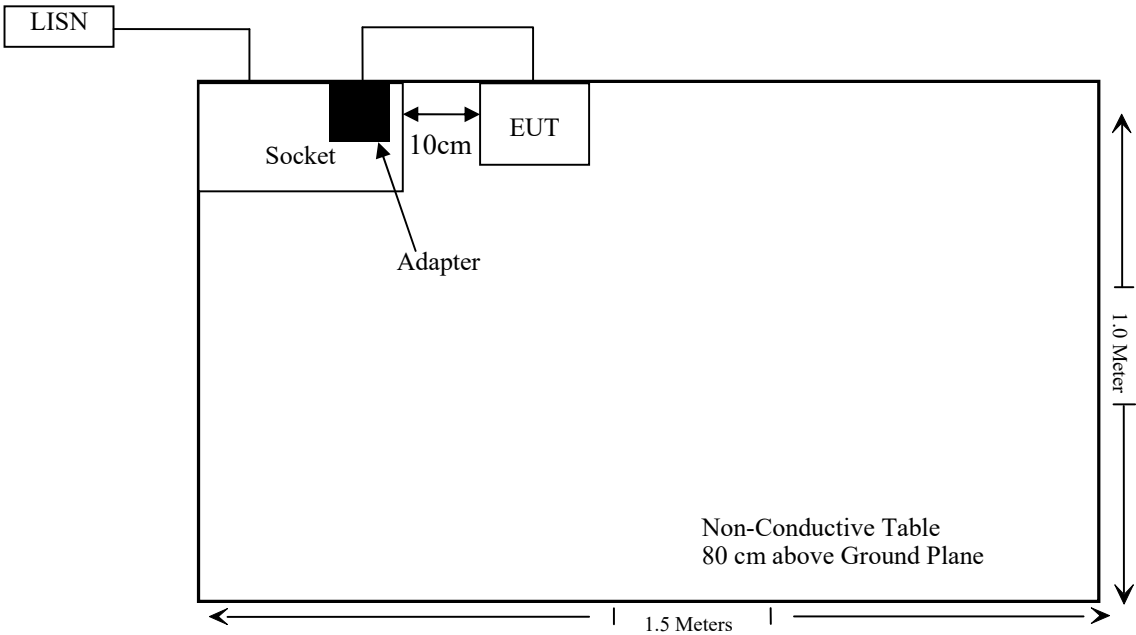


Test Mode 5~8

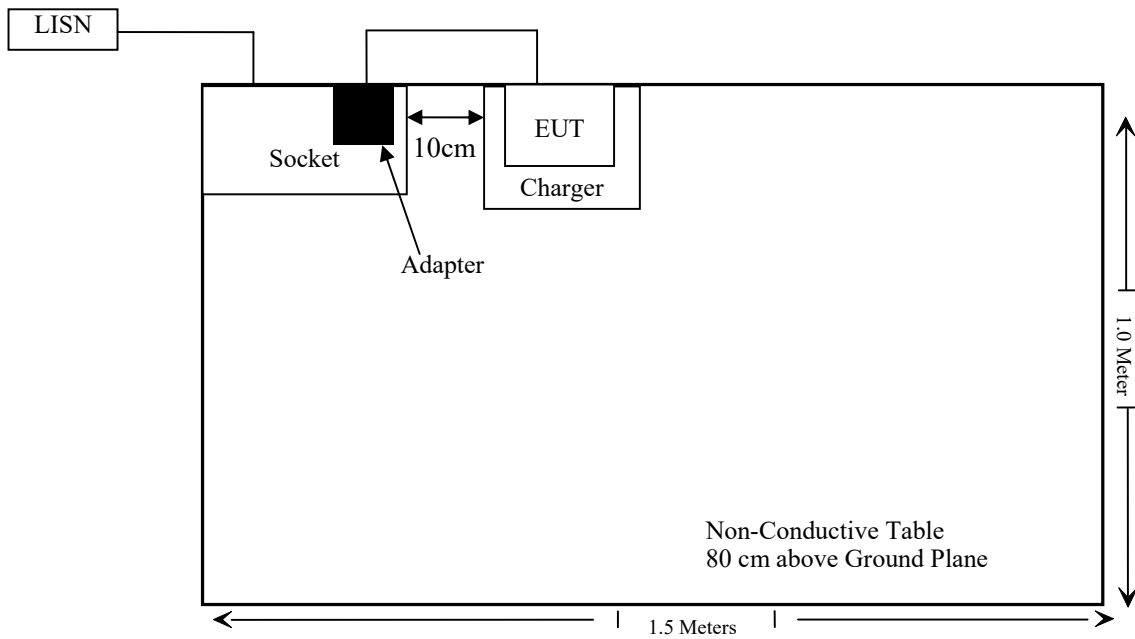


Test Mode 9

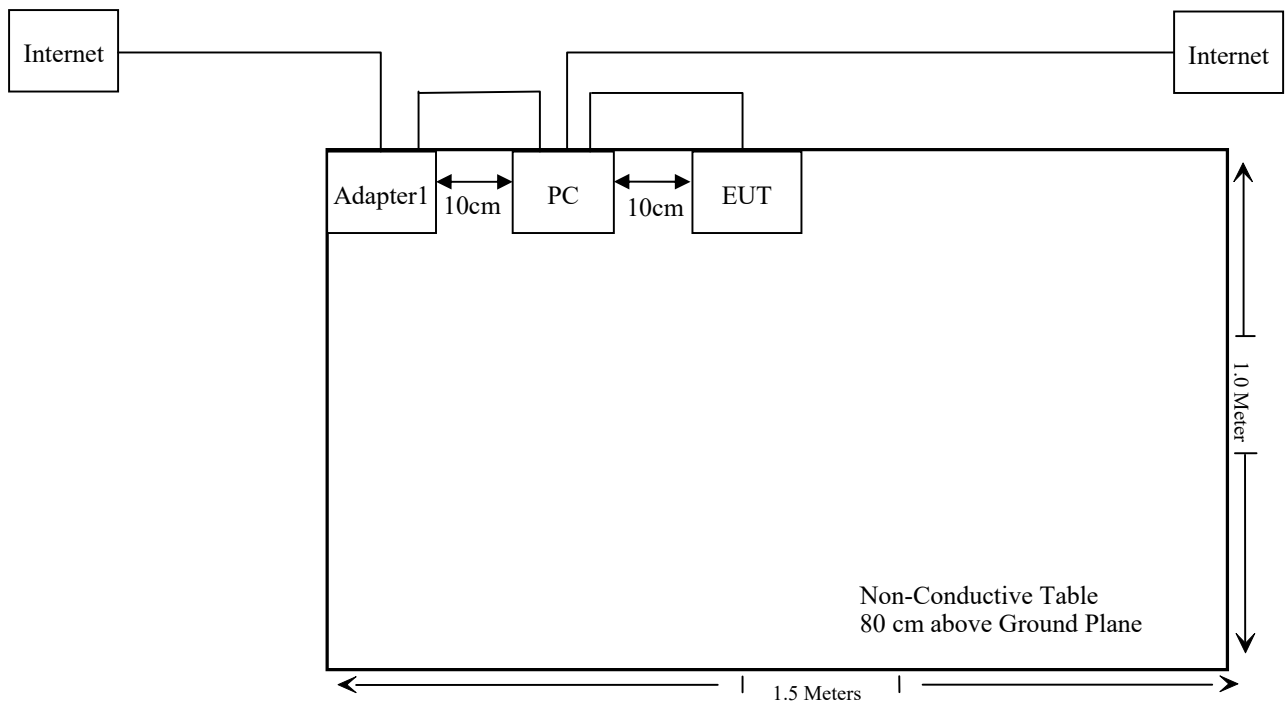


For Radiated Emissions
Test Mode 1~4

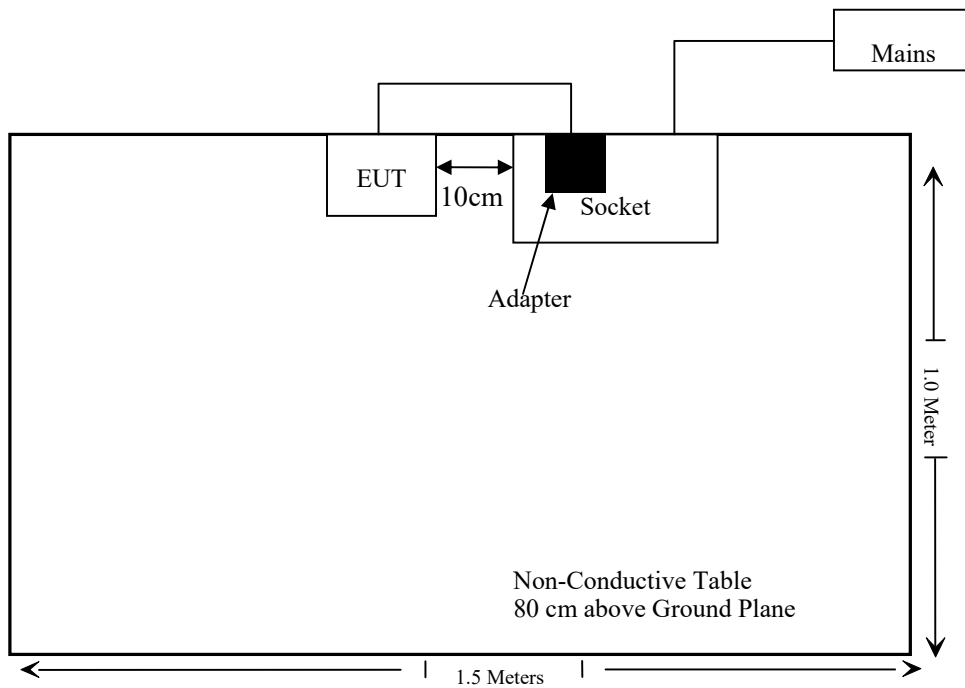

Test Mode 5~8

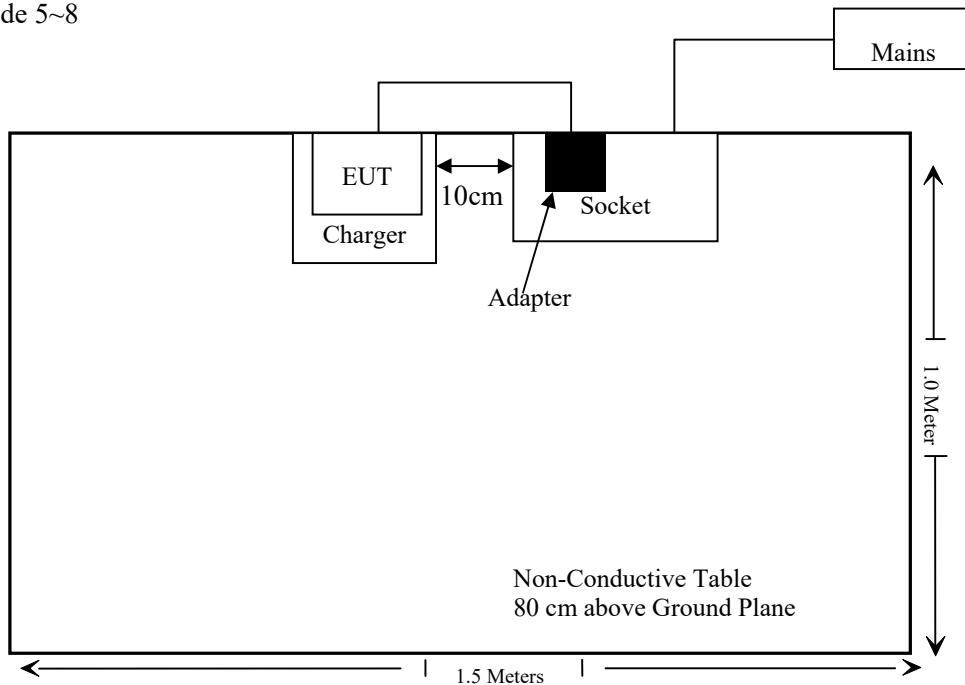

Test Mode 9

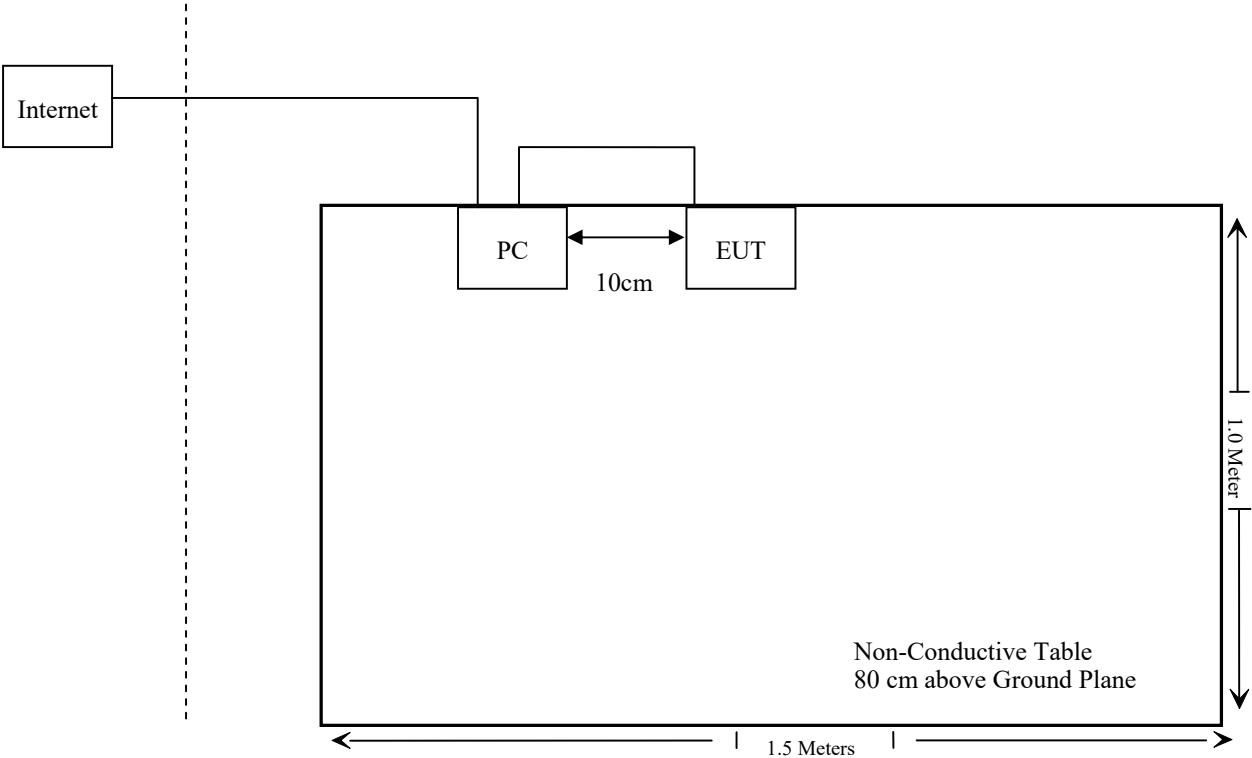

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107

EUT Setup

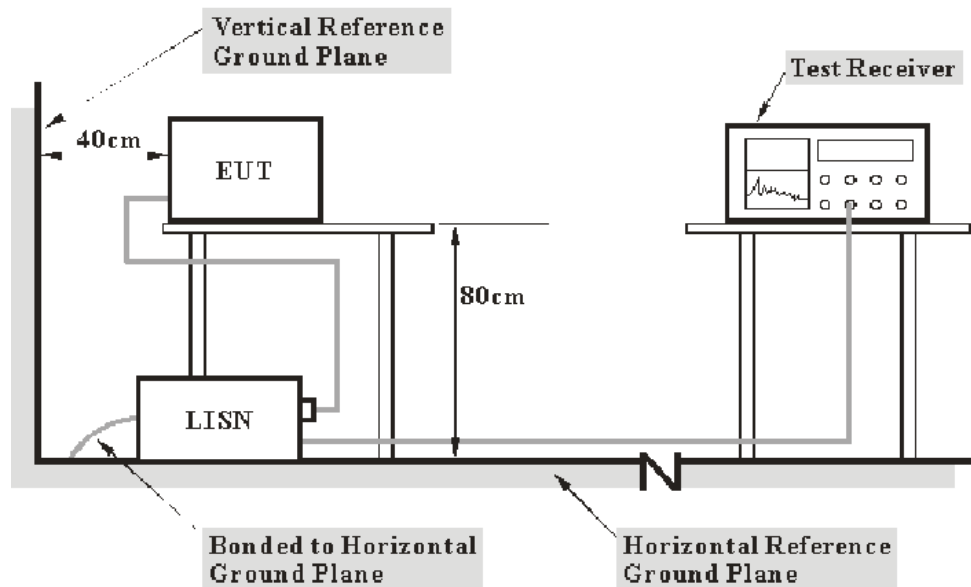

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

$$\text{Level (dBuV)} = \text{Read Level (dBuV)} + \text{LISN Factor} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit.

$$\text{Over Limit (dB)} = \text{Level (dBuV)} - \text{Limit Line (dBuV)}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	62 %
ATM Pressure:	101 kPa

The testing was performed by Macy Shi on 2024-07-03.

Test Mode 1

AC 120V/60 Hz, Line

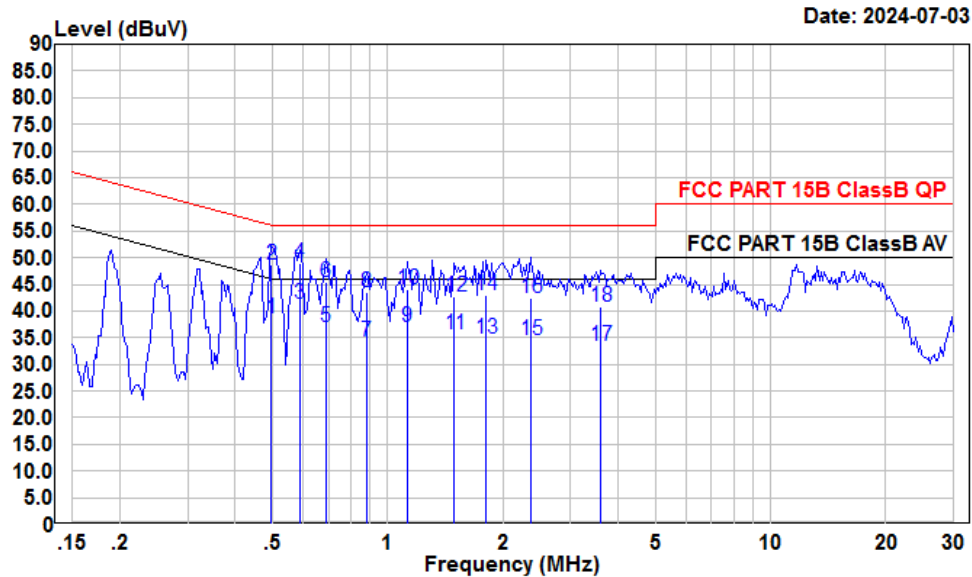

Condition: Line

Project : 2401U56759E-EM


test Mode: Charging by adapter+ scanning QR code with scan module

tester : Macy.shi

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.50	18.09	38.73	10.50	10.14	46.05	-7.32	Average
2	0.50	28.01	48.65	10.50	10.14	56.05	-7.40	QP
3	0.59	20.60	41.22	10.50	10.12	46.00	-4.78	Average
4	0.59	28.20	48.82	10.50	10.12	56.00	-7.18	QP
5	0.69	16.30	36.95	10.50	10.15	46.00	-9.05	Average
6	0.69	24.80	45.45	10.50	10.15	56.00	-10.55	QP
7	0.88	13.60	34.14	10.44	10.10	46.00	-11.86	Average
8	0.88	23.10	43.64	10.44	10.10	56.00	-12.36	QP
9	1.12	16.40	36.96	10.43	10.13	46.00	-9.04	Average
10	1.12	23.50	44.06	10.43	10.13	56.00	-11.94	QP
11	1.50	15.00	35.68	10.52	10.16	46.00	-10.32	Average
12	1.50	21.90	42.58	10.52	10.16	56.00	-13.42	QP
13	1.81	14.10	34.85	10.57	10.18	46.00	-11.15	Average
14	1.81	22.20	42.95	10.57	10.18	56.00	-13.05	QP
15	2.36	13.92	34.63	10.53	10.18	46.00	-11.37	Average
16	2.36	21.77	42.48	10.53	10.18	56.00	-13.52	QP

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
17	3.60	12.89	33.44	10.35	10.20	46.00	-12.56	Average
18	3.60	20.19	40.74	10.35	10.20	56.00	-15.26	QP

AC 120V/60 Hz, Neutral

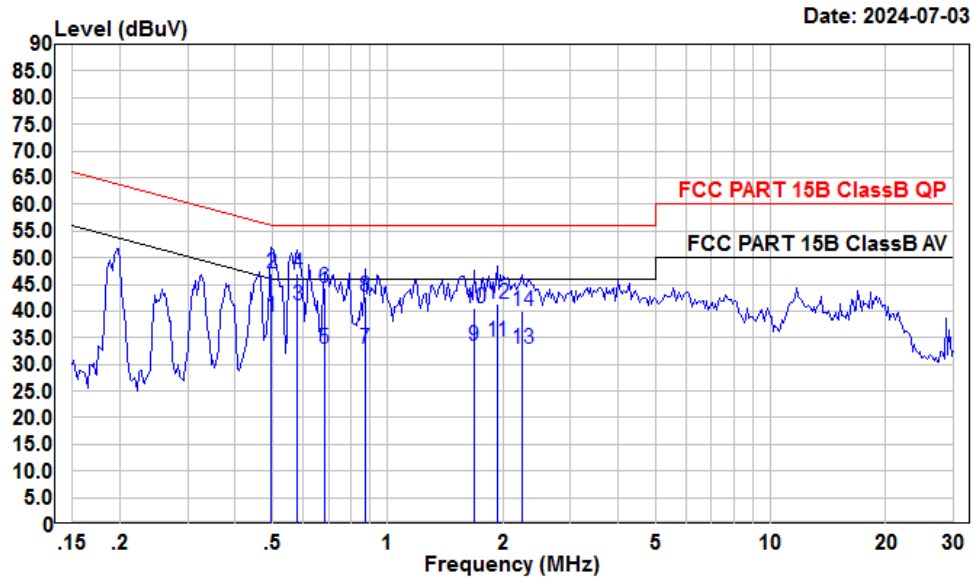

Condition: Neutral

Project : 2401U56759E-EM

test Mode: Charging by adapter+ scanning QR code with scan module

tester : Macy.shi

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.50	17.96	38.80	10.70	10.14	46.05	-7.25	Average
2	0.50	26.31	47.15	10.70	10.14	56.05	-8.90	QP
3	0.58	20.22	41.04	10.70	10.12	46.00	-4.96	Average
4	0.58	26.15	46.97	10.70	10.12	56.00	-9.03	QP
5	0.68	12.10	32.94	10.70	10.14	46.00	-13.06	Average
6	0.68	23.40	44.24	10.70	10.14	56.00	-11.76	QP
7	0.87	12.10	33.03	10.82	10.11	46.00	-12.97	Average
8	0.87	21.70	42.63	10.82	10.11	56.00	-13.37	QP
9	1.68	12.80	33.50	10.53	10.17	46.00	-12.50	Average
10	1.68	19.80	40.50	10.53	10.17	56.00	-15.50	QP
11	1.93	13.59	34.21	10.43	10.19	46.00	-11.79	Average
12	1.93	20.69	41.31	10.43	10.19	56.00	-14.69	QP
13	2.24	12.45	33.03	10.40	10.18	46.00	-12.97	Average
14	2.24	19.53	40.11	10.40	10.18	56.00	-15.89	QP


FCC §15.109 - RADIATED EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup


Below 1GHz for Radiated Emissions

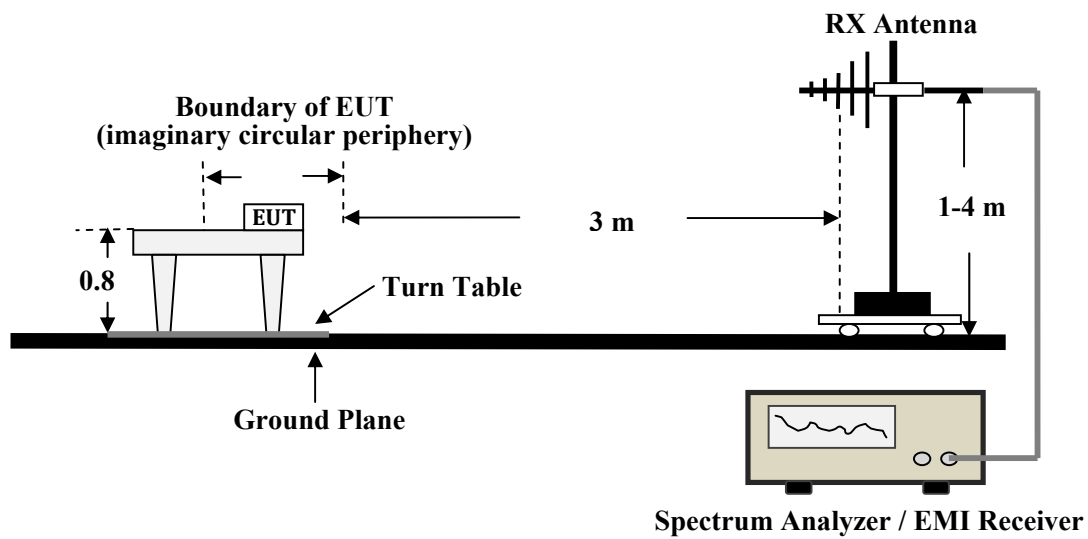

Above 1GHz for Radiated Emissions

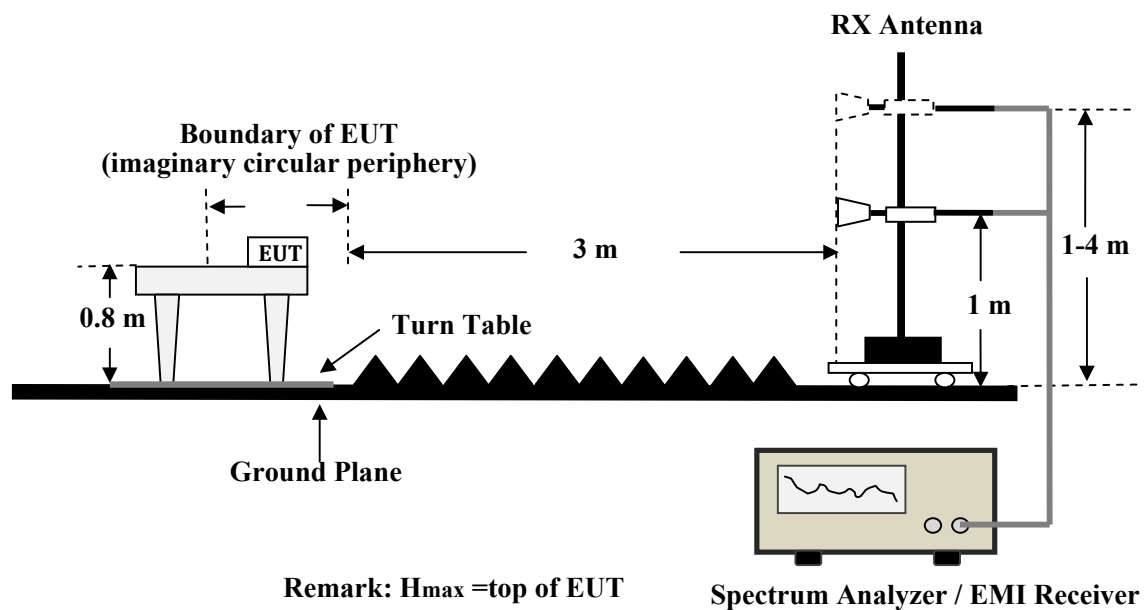

Radiated Emissions Setup Configuration

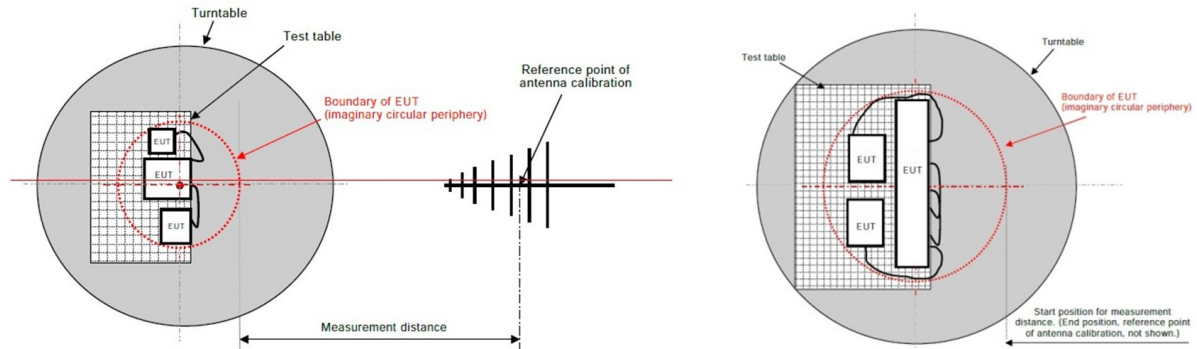

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If emission level of the EUT in Peak measurement mode is 20dB lower than peak limit line (that means the emission level in Peak measurement mode complies with both Peak and average limit lines) then only Peak measurement result is reported .Otherwise, Emission in average measurement mode shall be measured, and reported for frequency range above 1GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class B. The equation for Over Limit calculation is as follows:

$$\text{Over limit} = \text{Level} - \text{Limit}$$

Test Data

Environmental Conditions


Temperature:	24~26 °C
Relative Humidity:	51~54 %
ATM Pressure:	101~101.2 kPa

The testing was performed by Anson Su on 2024-07-08 for below 1GHz and Sadow Tan on 2024-07-08 for above 1GHz.

Test Mode 3

30 MHz~1 GHz


Horizontal

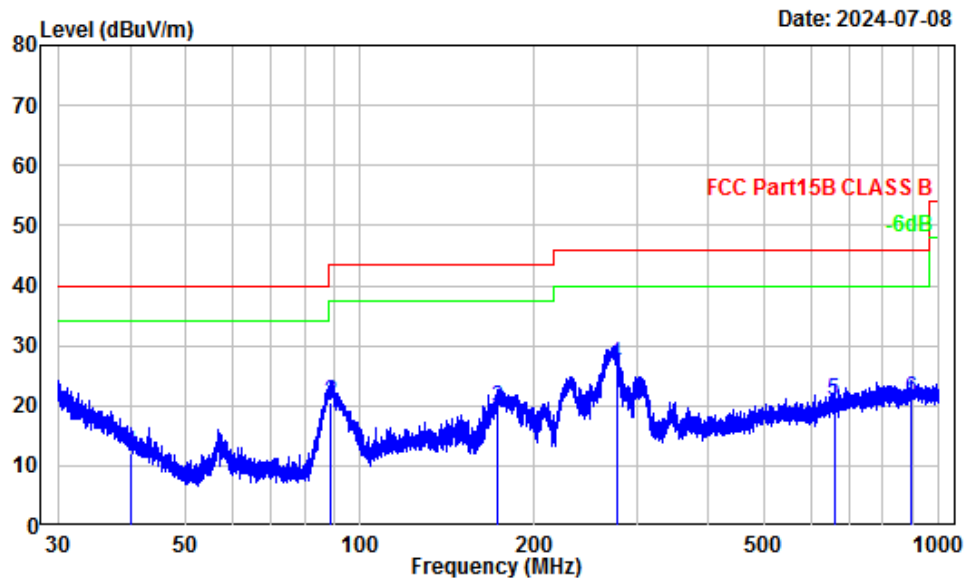

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401U56759E-EM
Test Mode : Charging by adapter+recording video with front camera
Tester : Anson Su

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	40.01	-11.53	23.74	12.21	40.00	-27.79 QP
2	88.57	-18.12	38.68	20.56	43.50	-22.94 QP
3	173.13	-14.44	34.06	19.62	43.50	-23.88 QP
4	276.97	-13.58	40.34	26.76	46.00	-19.24 QP
5	658.84	-6.63	27.33	20.70	46.00	-25.30 QP
6	894.25	-4.48	25.52	21.04	46.00	-24.96 QP

Vertical

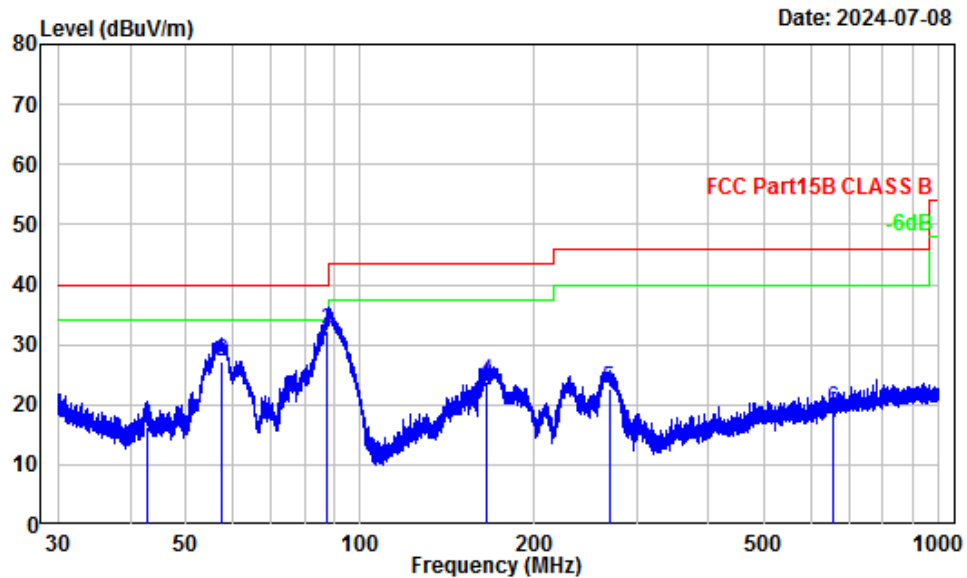


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401U56759E-EM
Test Mode : Charging by adapter+recording video with front camera
Tester : Anson Su

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.82	-14.62	30.98	16.36	40.00	-23.64	QP
2	57.72	-18.80	46.10	27.30	40.00	-12.70	QP
3	87.26	-18.85	51.10	32.25	40.00	-7.75	QP
4	165.27	-14.39	38.13	23.74	43.50	-19.76	QP
5	269.07	-14.26	36.79	22.53	46.00	-23.47	QP
6	654.81	-7.07	26.37	19.30	46.00	-26.70	QP

1 ~18 GHz


Horizontal

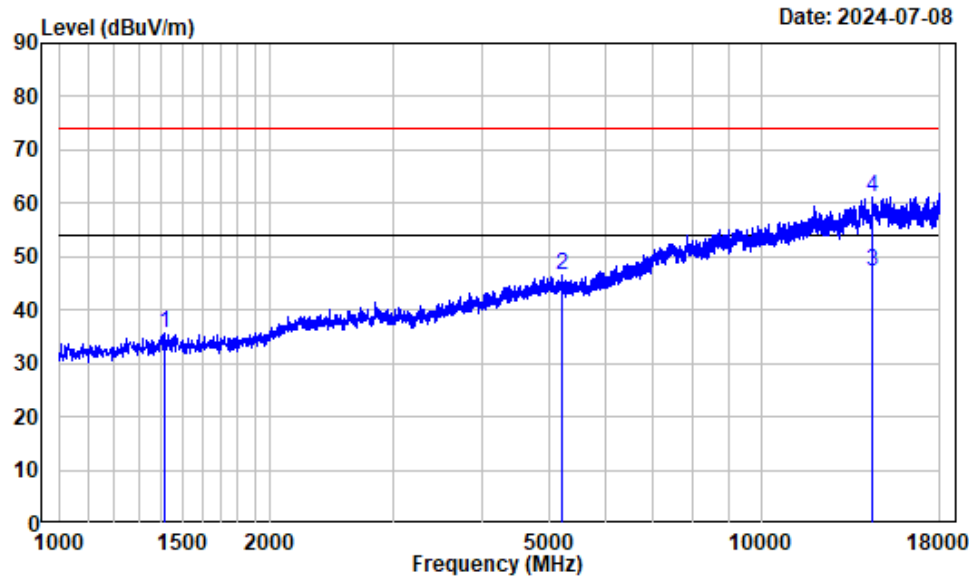

Site : chamber B
Condition : Horizontal
Project No.: 2401U56759E-EM
Tester : Sadow Tan
Test Mode : Mode 3

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1418.625	-6.98	42.59	35.61	74.00	-38.39	Peak
2	5199.000	3.07	43.38	46.45	74.00	-27.55	Peak
3	14408.750	17.26	29.98	47.24	54.00	-6.76	Average
4	14408.750	17.26	44.01	61.27	74.00	-12.73	Peak

Vertical

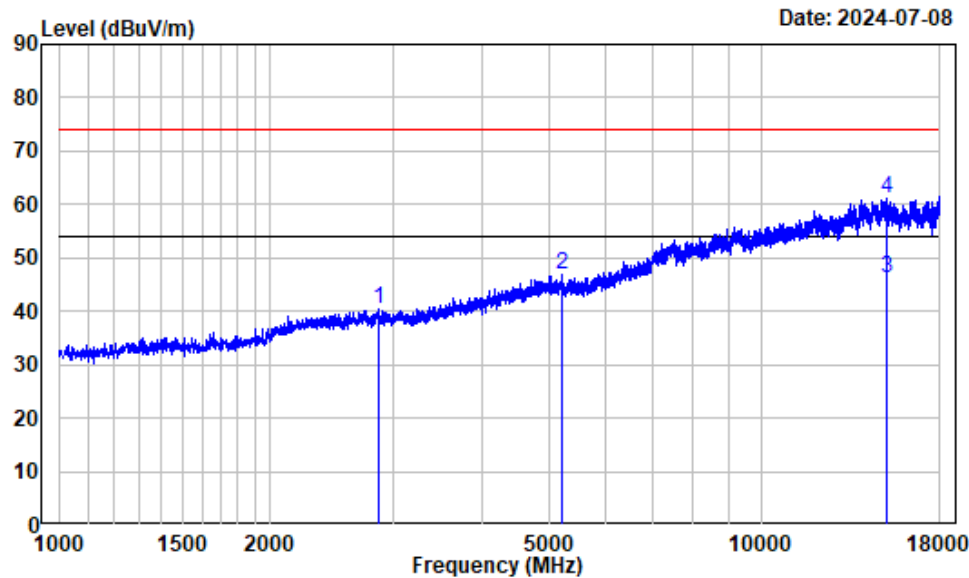


Site : chamber B
Condition : Vertical
Project No.: 2401U56759E-EM
Tester : Sadow Tan
Test Mode : Mode 3

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2853.000	-2.54	42.83	40.29	74.00	-33.71	Peak
2	5209.625	3.05	43.69	46.74	74.00	-27.26	Peak
3	15084.500	15.93	30.23	46.16	54.00	-7.84	Average
4	15084.500	15.93	45.34	61.27	74.00	-12.73	Peak

18~30 GHz


Horizontal

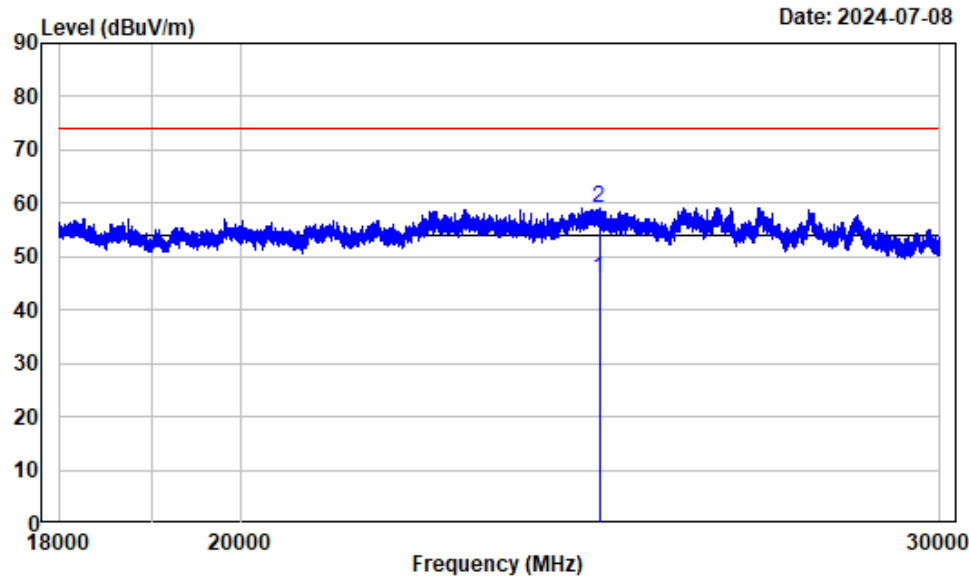

Site : chamber B
Condition : Horizontal
Project No.: 2401U56759E-EM
Tester : Sadow Tan
Test Mode : Mode 3

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	24622.500	18.85	27.12	45.97	54.00	-8.03 Average
2	24622.500	18.85	40.26	59.11	74.00	-14.89 peak

Vertical

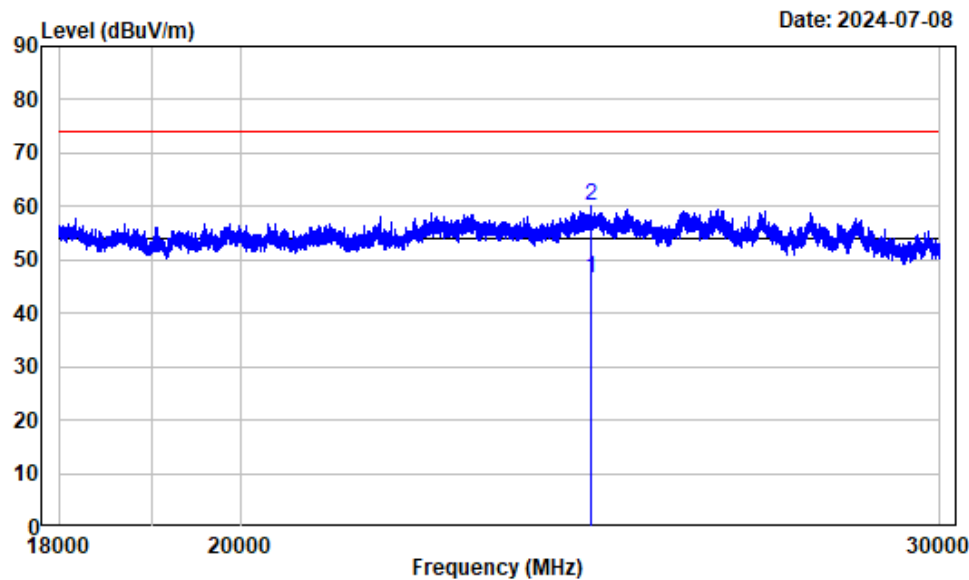

Site : chamber B
Condition : Vertical
Project No.: 2401U56759E-EM
Tester : Sadow Tan
Test Mode : Mode 3

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	24499.500	19.00	27.43	46.43	54.00	-7.57	Average
2	24499.500	19.00	41.06	60.06	74.00	-13.94	peak

EUT PHOTOGRAPHS

Please refer to the attachment 2401U56759E-RF External photo and 2401U56759E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401U56759E-EM Test Setup photo.

******* END OF REPORT *******