



EMC TEST REPORT

Product Name: MC 02

Model Name: MC 02

FCC ID: Z3PMC02

Issued For : Punkt Tronics AG

Via Losanna 4, 6900 Lugano, Switzerland

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT23K110EM01

Sample Received Date: Nov. 29, 2023

Date of Test: Nov. 29, 2023 – Jan. 25, 2024

Date of Issue: Jan. 25, 2024

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Punkt Tronics AG

Address: Via Losanna 4, 6900 Lugano, Switzerland

Manufacturer: UWIN INNOVATION(HONG KONG)LIMITED

Address: ROOM D 10/F TOWER A BILLION CENTRE 1 WANG KWONG RD
KOWLOON BAY KL

Product Name: MC 02

Trademark: Punkt.

Model Name: MC 02

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

Terry Zhao

Terry Zhao
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

1. TEST SUMMARY	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.5 MEASUREMENT INSTRUMENTS LIST	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	14
APPENDIX I - TEST SETUP	21



Revision History

Rev.	Issue Date	Revisions
00	Jan. 25, 2024	Initial Issue



1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	PASS	
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 1 Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.40
Radiated Emissions	1000 ~ 18000	5.49
Note: 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. 2. The measurement uncertainty is not included in the test result.		



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	MC 02
Trademark:	Punkt.
Model Name:	MC 02
Series Model:	N/A
Model Difference:	N/A
Battery:	Capacity: 5500mAh, 21.175Wh Rated Voltage: 3.85V
Test Voltage:	AC: 120V/60Hz Battery: 3.85V
Hardware Version:	N903B_MB_V1
Software Version:	MC02.20231230.U0

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone
Mode 2	Charging+WCDMA link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone
Mode 3	Charging+LTE link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone
Mode 4	USB Data Transmission

Note: Only the data of worst-case mode 1 was recorded in this report.

2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
USB-C to USB-C Cable	N/A	N/A	N/A	0.8m

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	Lenovo	HW-200450CP0	N/A	Input: 100-240V ~ 50/60Hz 1.6A Output: 5V3A or 9V3A or 12V3A or 15V5A or 20V4.5A
Earphone	VESAFE	39630078	N/A	N/A
Laptop	Lenovo	HKF-16	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
LISN	COM-POWER	LI-115	02032	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8122	00160	2023.04.07	2024.04.06
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2023.04.07	2024.04.06
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
Active loop Antenna	ETS	6502	00049544	2022.06.02	2025.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Bilog Antenna	SCHAFFNER	CBL6112B	2705	2022.06.05	2025.06.04
Horn Antenna	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Pre-amplifier(9kHz-1GHz)	EMtrace	RP01A	02017	2023.04.07	2024.04.06
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2023.04.07	2024.04.06
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.




3.1.3 TEST SETUP

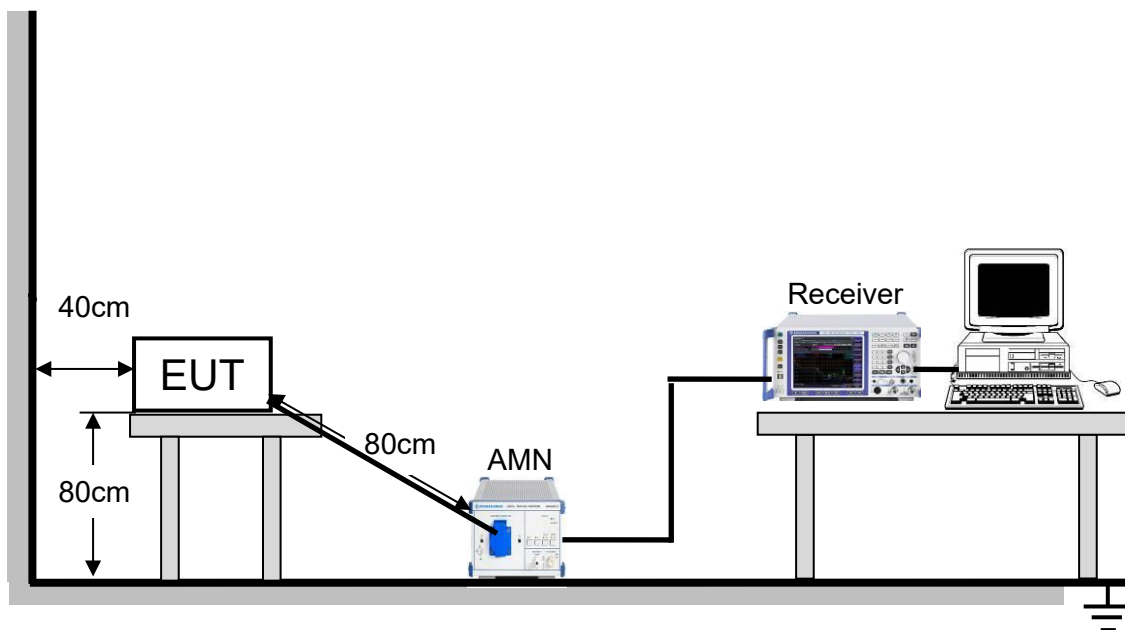




3.1.4 TEST RESULTS

Project: LGT23K110	Test Engineer: LiuH
EUT: MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone	
Note:	

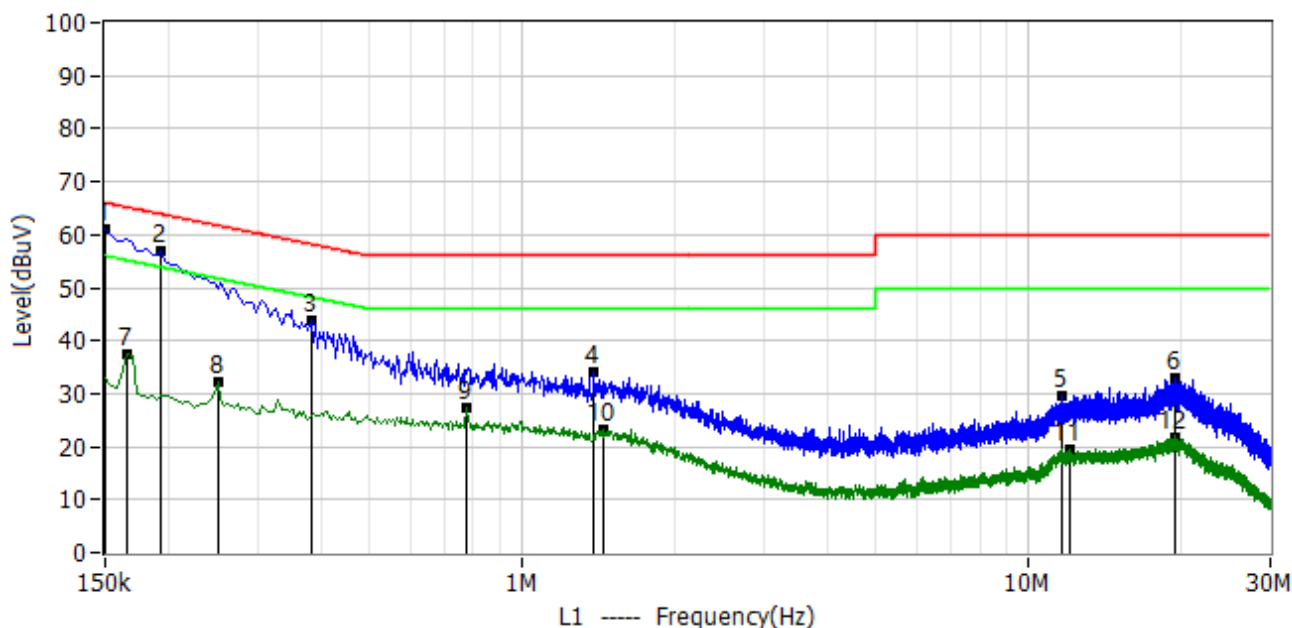

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.150	50.45	10.49	60.94	66.00	-5.06	QP	L1
2*	0.194	46.44	10.49	56.93	63.86	-6.94	QP	L1
3*	0.382	33.38	10.49	43.87	58.24	-14.37	QP	L1
4*	1.386	23.60	10.60	34.20	56.00	-21.80	QP	L1
5*	11.594	18.60	10.96	29.56	60.00	-30.44	QP	L1
6*	19.382	21.99	11.11	33.10	60.00	-26.90	QP	L1
7*	0.166	27.12	10.49	37.61	55.16	-17.55	AV	L1
8*	0.250	21.71	10.49	32.20	51.76	-19.56	AV	L1
9*	0.778	17.01	10.51	27.52	46.00	-18.48	AV	L1
10*	1.450	12.52	10.61	23.13	46.00	-22.87	AV	L1
11*	12.042	8.43	10.97	19.40	50.00	-30.60	AV	L1
12*	19.490	10.80	11.11	21.91	50.00	-28.09	AV	L1

Project: LGT23K110	Test Engineer: LiuH
EUT: MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone	
Note:	

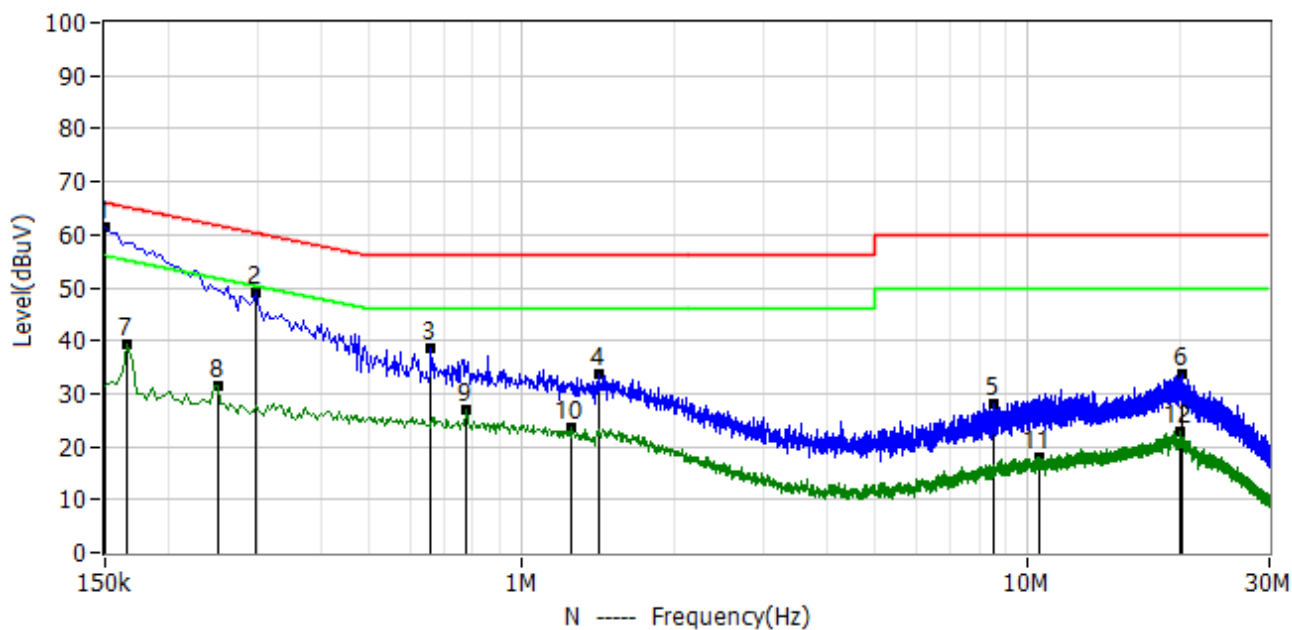

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.150	50.85	10.49	61.34	66.00	-4.66	QP	N
2*	0.298	38.75	10.49	49.24	60.30	-11.06	QP	N
3*	0.662	28.13	10.50	38.63	56.00	-17.37	QP	N
4*	1.414	23.08	10.60	33.68	56.00	-22.32	QP	N
5*	8.530	17.22	10.94	28.16	60.00	-31.84	QP	N
6*	20.094	22.62	11.19	33.81	60.00	-26.19	QP	N
7*	0.166	29.01	10.49	39.50	55.16	-15.66	AV	N
8*	0.250	21.14	10.49	31.63	51.76	-20.13	AV	N
9*	0.778	16.35	10.51	26.86	46.00	-19.14	AV	N
10*	1.250	13.01	10.57	23.58	46.00	-22.42	AV	N
11*	10.490	7.15	10.98	18.13	50.00	-31.87	AV	N
12*	20.018	11.56	11.19	22.75	50.00	-27.25	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS

Below 1 GHz

Frequency (MHz)	Class A	Class B
	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),
Margin Level = Measurement Value - Limit Value.


3.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

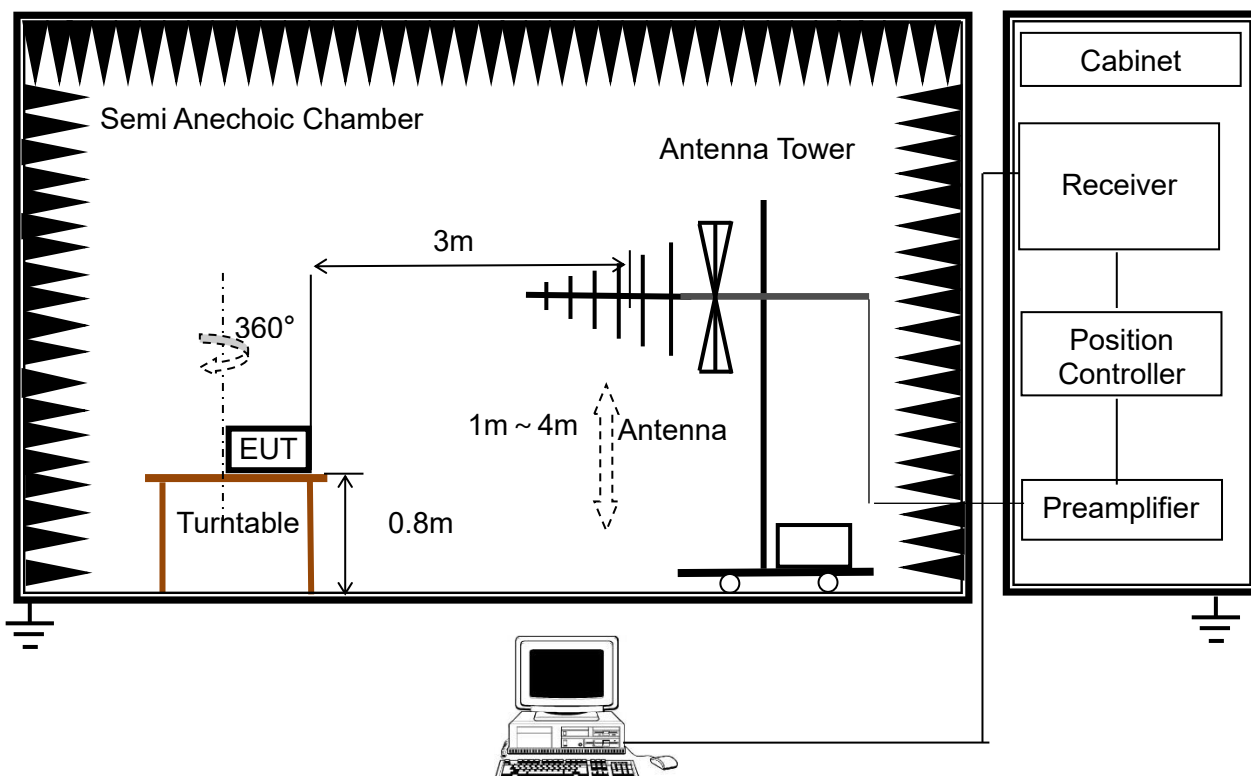

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

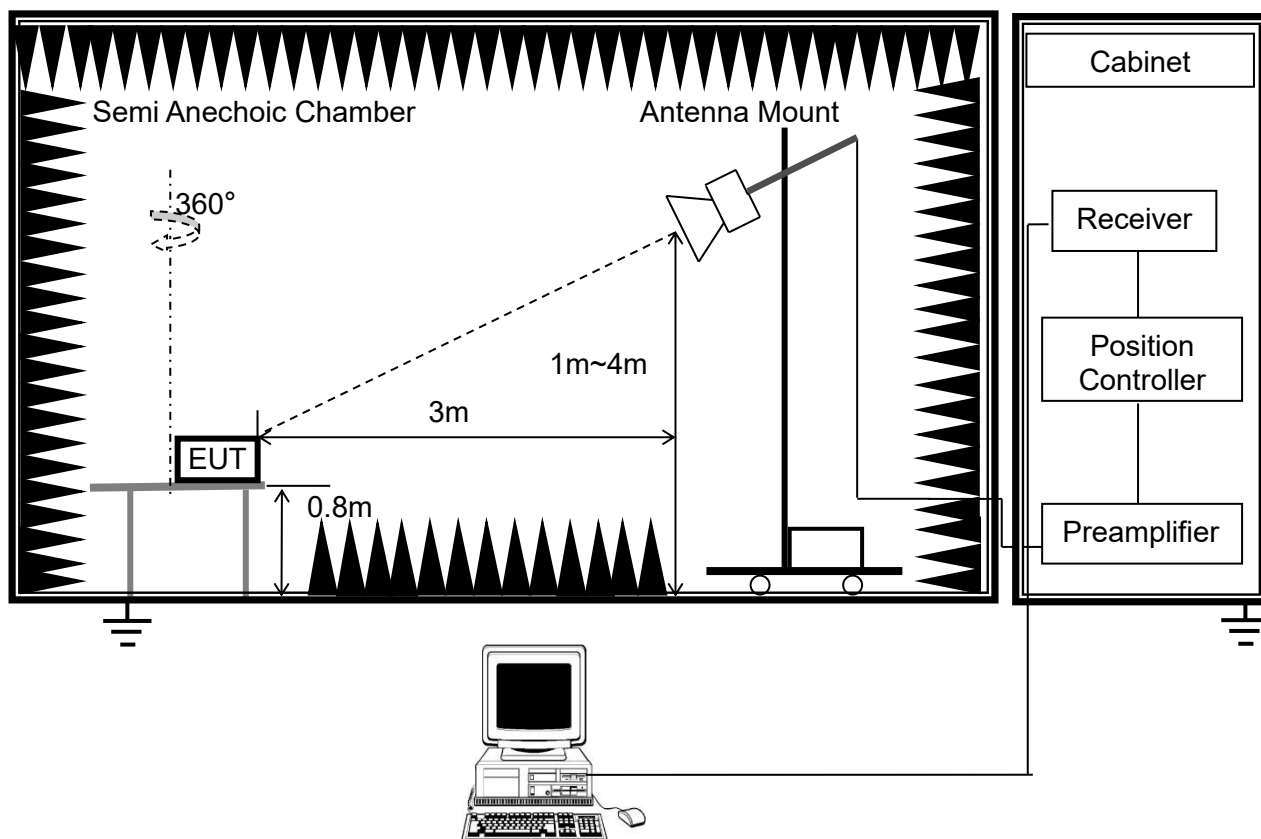




3.2.4 TEST RESULTS


BELOW 1GHZ

Project: LGT23K110	Test Engineer: LiuH
EUT:MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: USB Data Transmission	
Note:	

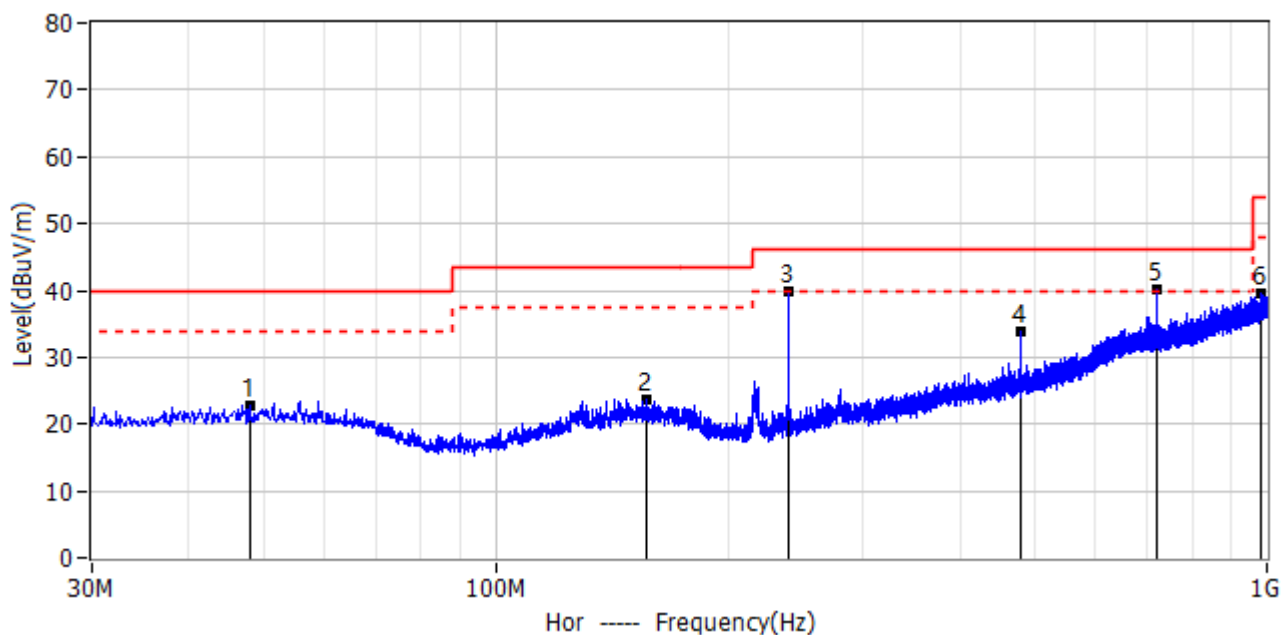


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	48.066MHz	3.45	19.31	22.76	40.00	-17.20	QP	Hor
2*	156.949MHz	3.81	19.88	23.69	43.50	-19.80	QP	Hor
3*	240.005MHz	22.25	17.68	39.93	46.00	-6.10	QP	Hor
4*	479.959MHz	9.35	24.55	33.90	46.00	-12.10	QP	Hor
5*	720.034MHz	10.18	30.02	40.20	46.00	-5.80	QP	Hor
6*	981.085MHz	4.95	34.48	39.43	54.00	-14.60	QP	Hor

Project: LGT23K110	Test Engineer: LiuH
EUT:MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: USB Data Transmission	
Note:	

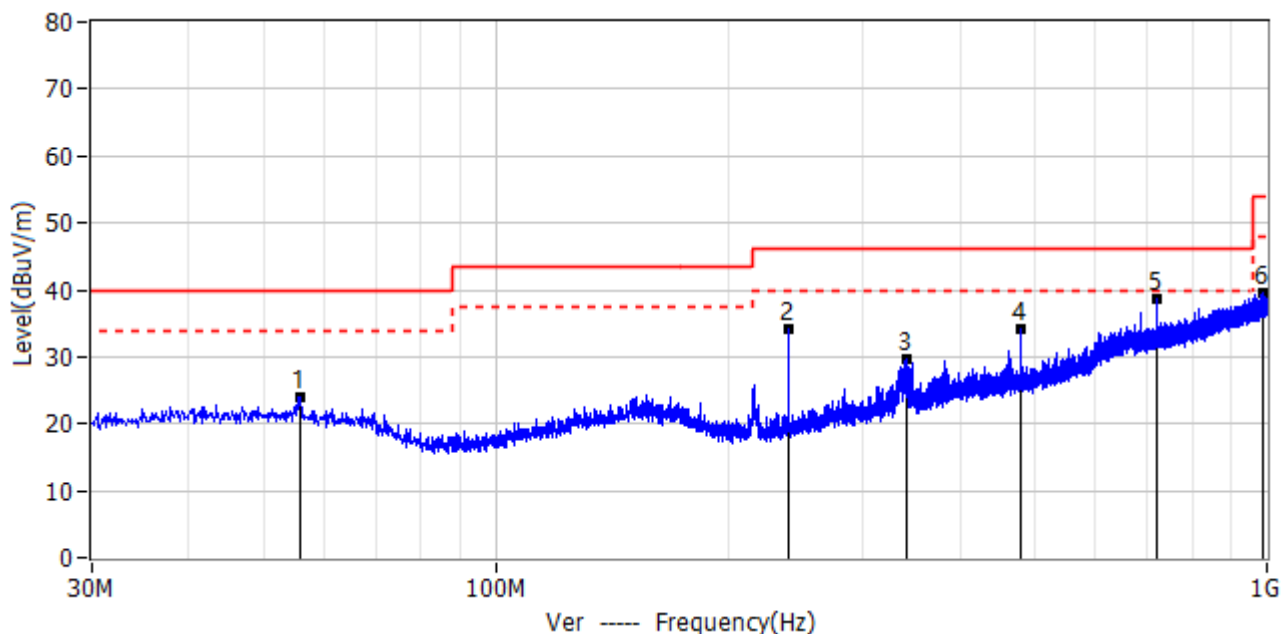

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	55.948MHz	5.05	18.93	23.98	40.00	-16.00	QP	Ver
2*	240.005MHz	16.39	17.68	34.07	46.00	-11.90	QP	Ver
3*	341.370MHz	8.73	21.02	29.75	46.00	-16.20	QP	Ver
4*	479.959MHz	9.75	24.55	34.30	46.00	-11.70	QP	Ver
5*	720.034MHz	8.64	30.02	38.66	46.00	-7.30	QP	Ver
6*	990.058MHz	4.88	34.53	39.41	54.00	-14.60	QP	Ver

Project: LGT23K110	Test Engineer: LiuH
EUT:MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone	
Note:	

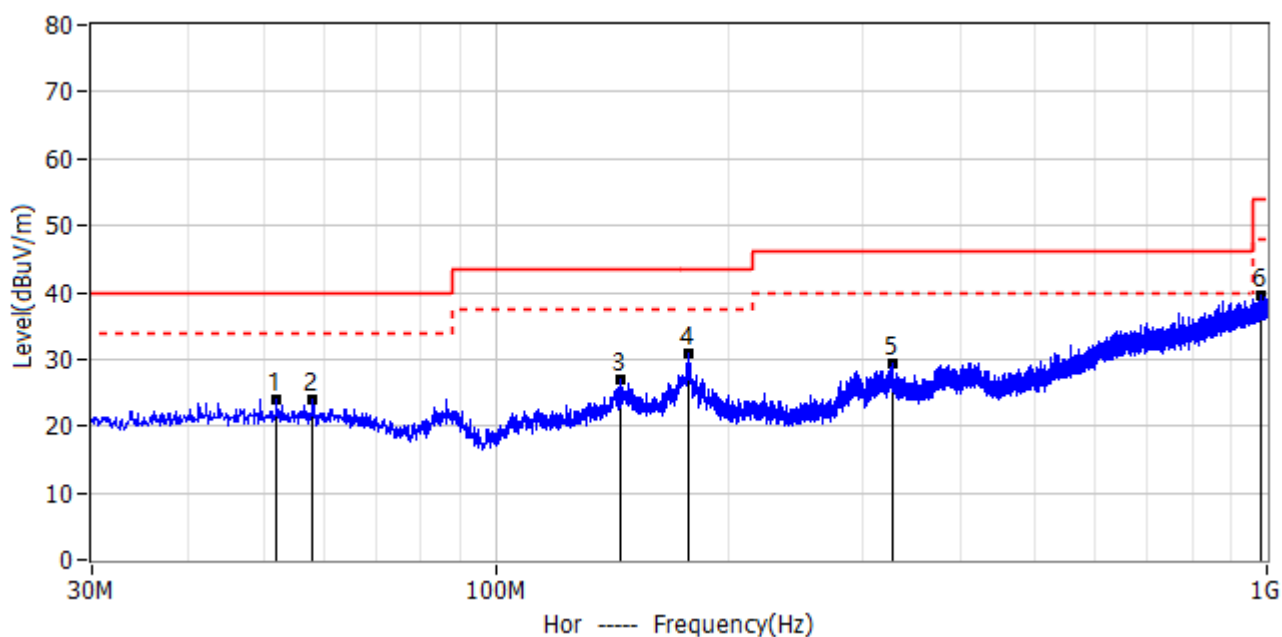


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	52.068MHz	4.69	19.21	23.90	40.00	-16.10	QP	Hor



No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
2*	58.009MHz	5.17	18.78	23.95	40.00	-16.05	QP	Hor
3*	144.824MHz	7.56	19.50	27.06	43.50	-16.44	QP	Hor
4*	177.925MHz	11.94	19.03	30.97	43.50	-12.53	QP	Hor
5*	326.578MHz	8.59	20.73	29.32	46.00	-16.68	QP	Hor
6*	980.721MHz	5.07	34.48	39.55	54.00	-14.45	QP	Hor

Project: LGT23K110	Test Engineer: LiuH
EUT:MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone	
Note:	

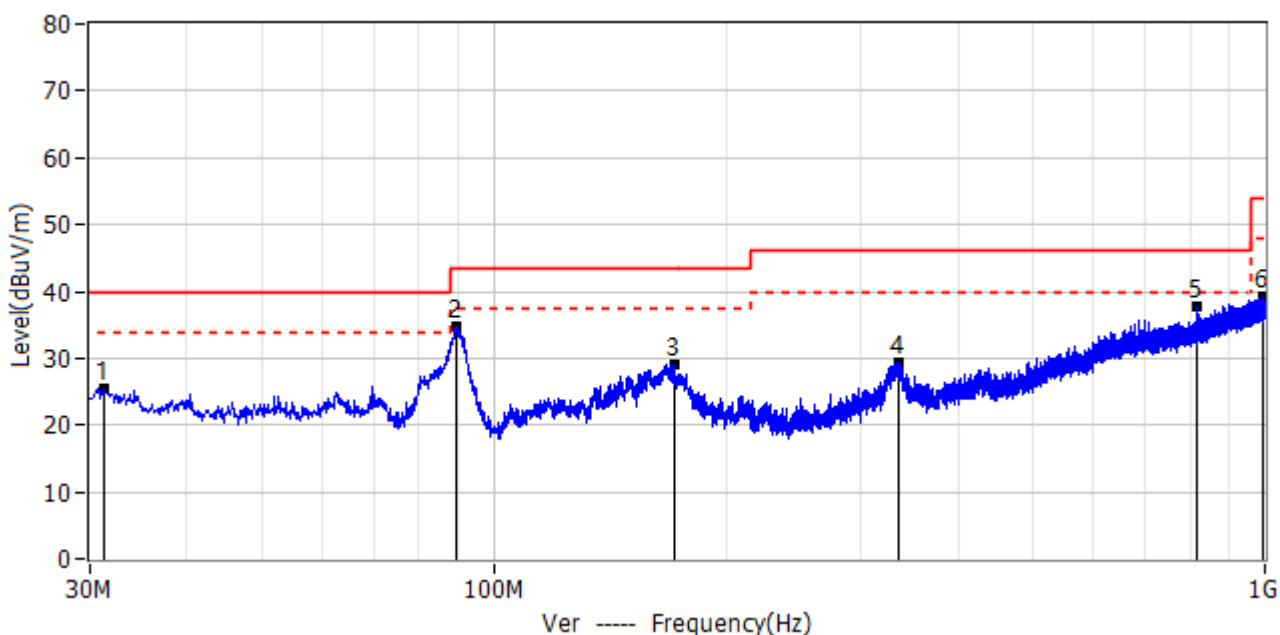


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	31.213MHz	7.22	18.28	25.50	40.00	-14.50	QP	Ver
2*	89.655MHz	19.59	15.06	34.65	43.50	-8.85	QP	Ver
3*	171.499MHz	9.50	19.64	29.14	43.50	-14.36	QP	Ver
4*	335.308MHz	8.59	20.90	29.49	46.00	-16.51	QP	Ver
5*	817.276MHz	6.13	31.56	37.69	46.00	-8.31	QP	Ver
6*	995.514MHz	4.76	34.55	39.31	54.00	-14.69	QP	Ver




ABOVE 1GHZ

Project: LGT23K110	Test Engineer: LiuH
EUT:MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone	
Note:	

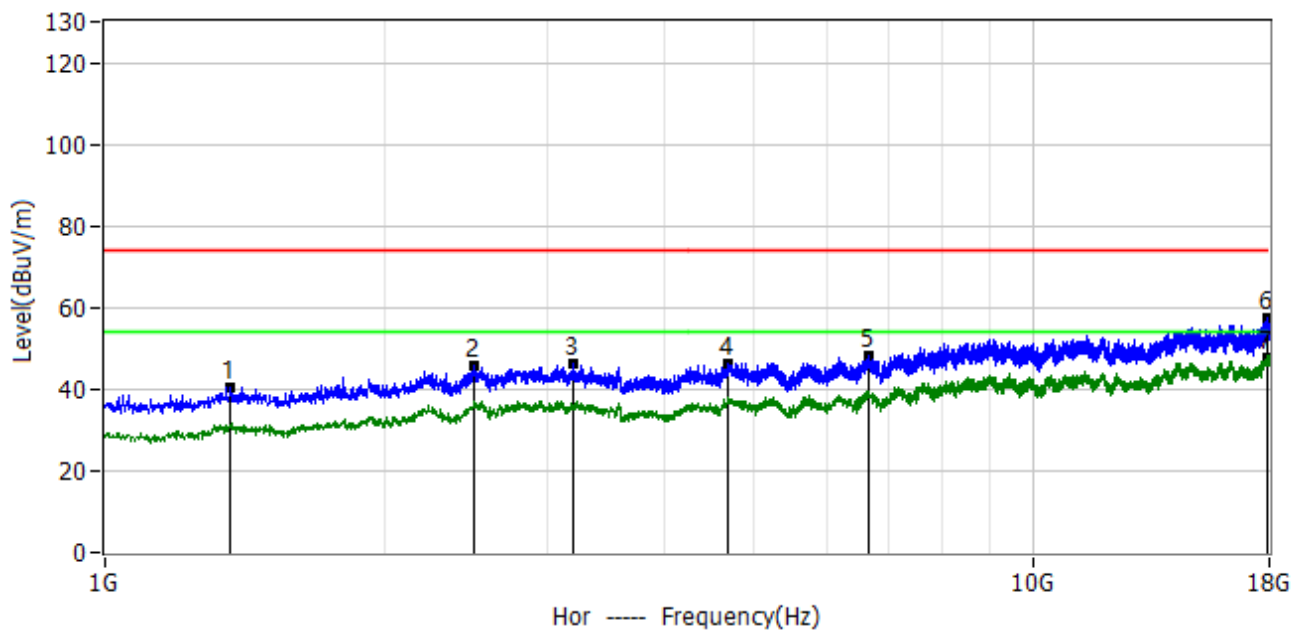

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.366GHz	62.03	-21.66	40.37	74.00	-33.63	PK	Hor
2*	2.496GHz	56.99	-11.03	45.96	74.00	-28.04	PK	Hor
3*	3.199GHz	54.61	-8.41	46.20	74.00	-27.80	PK	Hor
4*	4.695GHz	52.10	-5.91	46.19	74.00	-27.81	PK	Hor
5*	6.650GHz	54.72	-6.30	48.42	74.00	-25.58	PK	Hor
6*	17.951GHz	48.92	8.49	57.41	74.00	-16.59	PK	Hor
7*	17.951GHz	39.11	8.49	47.60	54.00	-6.40	AV	Hor

Project: LGT23K110	Test Engineer: LiuH
EUT:MC 02	Temperature: 24.9°C
M/N: MC 02	Humidity: 52%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-12-09
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording+Earphone	
Note:	

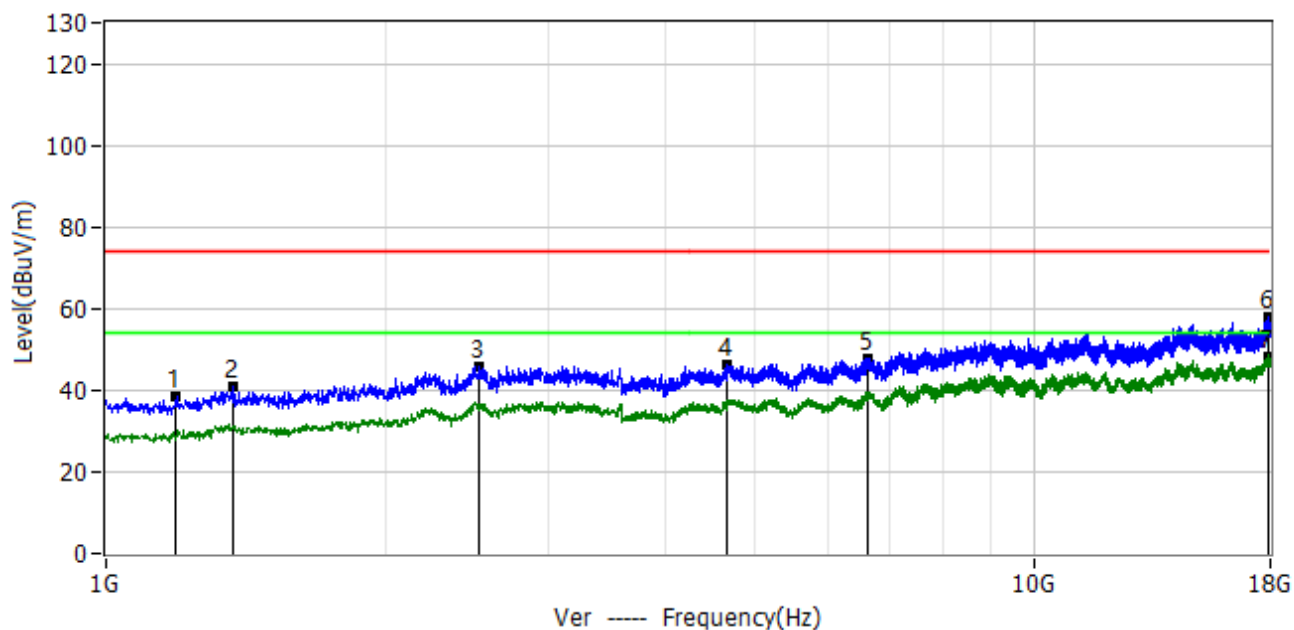


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.191GHz	61.47	-23.04	38.43	74.00	-35.57	PK	Ver
2*	1.368GHz	62.40	-21.64	40.76	74.00	-33.24	PK	Ver
3*	2.526GHz	56.83	-10.85	45.98	74.00	-28.02	PK	Ver
4*	4.670GHz	52.33	-5.89	46.44	74.00	-27.56	PK	Ver
5*	6.638GHz	54.26	-6.32	47.94	74.00	-26.06	PK	Ver
6*	17.938GHz	49.65	8.48	58.13	74.00	-15.87	PK	Ver
7*	17.938GHz	39.82	8.48	48.30	54.00	-5.70	AV	Ver




APPENDIX I - TEST SETUP

Set-up for Conducted Emission on AC Mains (CE)

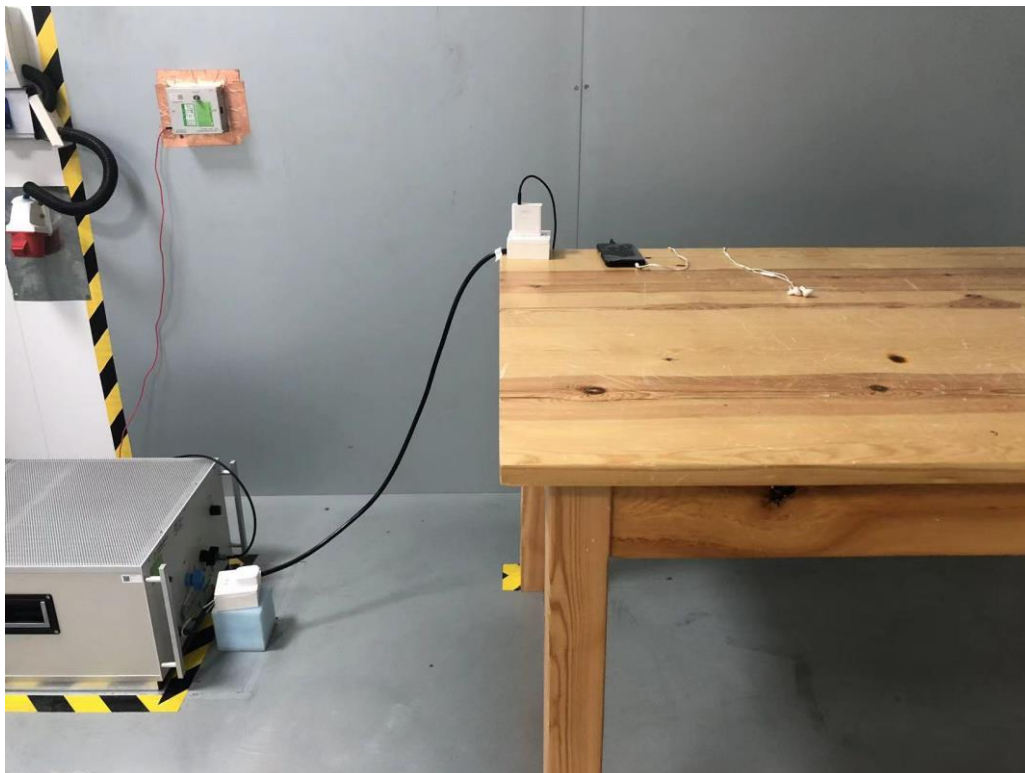

Set-up for Radiated Emission (RE), Below 1GHz

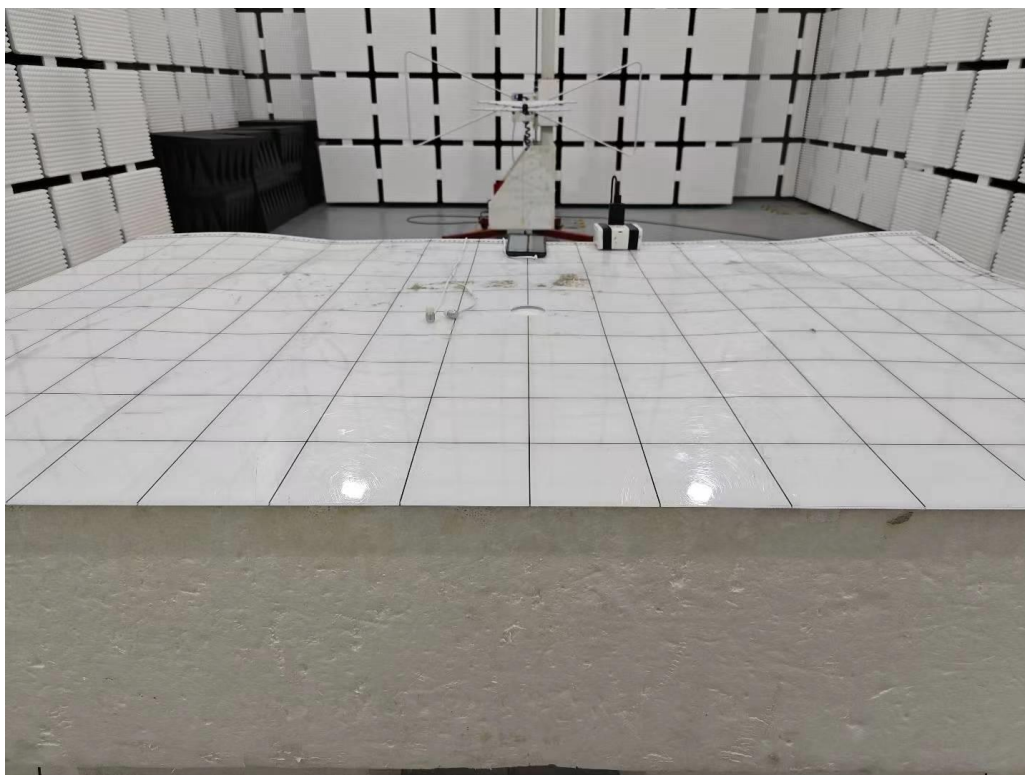



Set-up for Radiated Emission (RE), Above 1GHz



*****END OF THE REPORT*****