



中国认可
国际互认
检测
TESTING
CNAS L6791

TEST REPORT

Applicant: Seeed Technology Co., Ltd.
Address: 9F, Building G3, TCL International E city, Shuguang Community, Xili street, Nanshan, Shenzhen, Guangdong Province, P.R.C
Equipment Type: Seeed Studio Wio-LR2021 Wireless module
Model Name: Seeed Studio Wio-LR2021 Wireless module
Brand Name: N/A
FCC ID: Z4T-WIO-LR2021
Test Standard: 47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date: May 18, 2026
Test Date: May 20, 2026 - Jul. 13, 2026
Date of Issue: Aug. 21, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Yang Wenxuan

Checked by: Li Ganming

Approved by: Tolan Tu
(Testing Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Aug. 21, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Measurement Uncertainty	11
4.4	Description of Test Setup	12
4.5	Measurement Results Explanation Example	15
5	TEST ITEMS	16
5.1	Antenna Requirements	16
5.2	Number of Hopping Frequencies	17
5.3	Peak Output Power	18
5.4	Occupied Bandwidth	19
5.5	Carrier Frequency Separation	20
5.6	Time of Occupancy (Dwell time)	21

5.7	Conducted Spurious Emission & Authorized-band band-edge.....	22
5.8	Conducted Emission.....	23
5.9	Radiated Spurious Emission.....	24
5.10	Band Edge (Restricted-band band-edge).....	26
ANNEX A	TEST RESULT	27
A.1	Number of Hopping Frequency.....	27
A.2	Peak Output Power	29
A.3	20 dB and 99% bandwidth	31
A.4	Hopping Frequency Separation	35
A.5	Average Time of Occupancy.....	37
A.6	Conducted Spurious Emissions & Authorized-band band-edge	39
A.7	Conducted Emissions	47
A.8	Radiated Spurious Emission.....	58
A.9	Band Edge (Restricted-band band-edge).....	179
ANNEX B	TEST SETUP PHOTOS	210
ANNEX C	EUT EXTERNAL PHOTOS.....	210
ANNEX D	EUT INTERNAL PHOTOS.....	210

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☐ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Seeed Technology Co., Ltd.
Address	9F, Building G3, TCL International E city, Shuguang Community, Xili street, Nanshan, Shenzhen, Guangdong Province, P.R.C

2.2 Manufacturer Information

Manufacturer	Seeed Technology Co., Ltd.
Address	9F, Building G3, TCL International E city, Shuguang Community, Xili street, Nanshan, Shenzhen, Guangdong Province, P.R.C

2.3 General Description for Equipment under Test (EUT)

EUT Name	Seeed Studio Wio-LR2021 Wireless module
Model Name Under Test	Seeed Studio Wio-LR2021 Wireless module
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V1.0
Software Version	V1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	LoRa, 2.4G ISM Band
-----------------------------------	---------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	Frequency hopping system	
Modulation Type	LoRa	
Product Type	☒ Mobile ☐ Portable ☐ Fix Location	
Frequency Range	The frequency range used is 902 MHz to 928 MHz.	
Frequency	FSK	100K
Bandwidth	LoRa	125K
Number of channel	100K: 129 125K: 64	
Tested Channel	100K: 1 (902.2 MHz), 64 (914.8 MHz), 129 (927.8 MHz) 125K: 0 (902.3 MHz), 31 (908.5 MHz), 63 (914.9 MHz)	
Antenna System(MIMO Smart Antenna)	N/A	

Type	MPN	Band	Antenna Gain	Antenna Type	Number of pages of test data
LoRa	M02-0400190R0A	868-915MHz	2 dBi	Dipole Antenna	pages 48 to 49, pages 59 to 70, pages 119 to 130, pages 180 to 185
	V1194-145-A-01	902-928MHz	5.85 dBi	Fiberglass Omni-directional Antenna	pages 50 to 51, pages 71 to 82, pages 131 to 142, pages 186 to 191
	M04-0101870R0A	868-915MHz	1.61 dBi	Helical Antenna	pages 52 to 53, pages 83 to 94, pages 143 to 154, pages 192 to 197
	M01-0401030R0A	902-928MHz	1.11 dBi	FPC Antenna	pages 54 to 55, pages 95 to 106, pages 155 to 166, pages 198 to 203
	M01-0401670R0A	860-930MHz	-2.19 dBi	FPC Antenna	pages 56 to 57, pages 107 to 118, pages 167 to 178, pages 204 to 209

All channel was listed on the following table:

100K

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
1	902.2	34	908.8	67	915.4	100	922
2	902.4	35	909	68	915.6	101	922.2
3	902.6	36	909.2	69	915.8	102	922.4
4	902.8	37	909.4	70	916	103	922.6
5	903	38	909.6	71	916.2	104	922.8
6	903.2	39	909.8	72	916.4	105	923
7	903.4	40	910	73	916.6	106	923.2
8	903.6	41	910.2	74	916.8	107	923.4
9	903.8	42	910.4	75	917	108	923.6
10	904	43	910.6	76	917.2	109	923.8
11	904.2	44	910.8	77	917.4	110	924
12	904.4	45	911	78	917.6	111	924.2
13	904.6	46	911.2	79	917.8	112	924.4
14	904.8	47	911.4	80	918	113	924.6
15	905	48	911.6	81	918.2	114	924.8
16	905.2	49	911.8	82	918.4	115	925
17	905.4	50	912	83	918.6	116	925.2
18	905.6	51	912.2	84	918.8	117	925.4
19	905.8	52	912.4	85	919	118	925.6
20	906	53	912.6	86	919.2	119	925.8
21	906.2	54	912.8	87	919.4	120	926
22	906.4	55	913	88	919.6	121	926.2
23	906.6	56	913.2	89	919.8	122	926.4
24	906.8	57	913.4	90	920	123	926.6
25	907	58	913.6	91	920.2	124	926.8
26	907.2	59	913.8	92	920.4	125	927
27	907.4	60	914	93	920.6	126	927.2
28	907.6	61	914.2	94	920.8	127	927.4
29	907.8	62	914.4	95	921	128	927.6
30	908	63	914.6	96	921.2	129	927.8
31	908.2	64	914.8	97	921.4	/	/
32	908.4	65	915	98	921.6	/	/
33	908.6	66	915.2	99	921.8	/	/

125K

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
0	902.3	16	905.5	32	908.7	48	911.9
1	902.5	17	905.7	33	908.9	49	912.1
2	902.7	18	905.9	34	909.1	50	912.3
3	902.9	19	906.1	35	909.3	51	912.5
4	903.1	20	906.3	36	909.5	52	912.7
5	903.3	21	906.5	37	909.7	53	912.9
6	903.5	22	906.7	38	909.9	54	913.1
7	903.7	23	906.9	39	910.1	55	913.3
8	903.9	24	907.1	40	910.3	56	913.5
9	904.1	25	907.3	41	910.5	57	913.7
10	904.3	26	907.5	42	910.7	58	913.9
11	904.5	27	907.7	43	910.9	59	914.1
12	904.7	28	907.9	44	911.1	60	914.3
13	904.9	29	908.1	45	911.3	61	914.5
14	905.1	30	908.3	46	911.5	62	914.7
15	905.3	31	908.5	47	911.7	63	914.9

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	KDB Publication 558074 D01v05r02☆	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024☆	American National Standard for Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Test Verdict

No.	Description	FCC Part No.	Modulation Technology	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	N/A	--	Pass ^{Note}
2	Number of Hopping Frequencies	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	Frequency hopping system	Low/Middle/High	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	Frequency hopping system	Low/Middle/High	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.5	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.6	Pass
8	Conducted Emission	15.207	Frequency hopping system	Low/Middle/High	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.8	Pass
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.9	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	46% to 69%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.2℃ to +25.8℃
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2025.06.16	2026.06.15
				2026.06.01	2027.05.31
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2025.06.16	2026.06.15
				2026.06.01	2027.05.31
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2025.10.30	2026.10.29
Spectrum Analyzer	KEYSIGHT	N9020A	MY54432240	2026.03.24	2027.03.23
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	00884	2025.03.01	2028.02.29
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2025.02.22	2028.02.21
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	EMC Electronic Co, Ltd	9m*6m*6m	213	2026.03.03	2028.03.02
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2026.05.20	2027.05.19
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2026.05.20	2027.05.19
Amplifier	COM-MV	KA LNA18 40G-01	10248150	2025.12.04	2026.12.03
EMI Receiver	ROHDE&SCHWARZ	ESR7	103027	2025.10.30	2026.10.29
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2018054558	2025.11.26	2026.11.25
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	883	2025.03.23	2028.03.22
Anechoic Chamber(10m#2)	YiHeng	21m*11m*8m	101-1	2025.10.16	2028.10.15
EMI Receiver	Keysight	N9038A	MY55330120	2025.06.17	2026.06.16
				2026.06.02	2027.06.01
Amplifier(30MHz-1GHz)	COM-MV	ZT30-1000M	B2017119081	2025.11.26	2026.11.25
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-00867	2025.03.23	2028.03.22
Anechoic Chamber	YiHeng	9m*6m*6m	106-1	2026.01.20	2029.01.19

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2025.09.25	2026.09.24
LISN	SCHWARZBECK	NSLK 8127	8127-687	2026.03.25	2027.03.24
ISN	TESEQ	ISN T800	34449	2025.10.20	2026.10.19
ISN	TESEQ	ISN T8-Cat6	53561	2025.06.01	2026.05.31
				2026.05.29	2027.05.28
Shielded Room	Chang Chuang	4m*4m*3m	662	2025.10.12	2028.10.11

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

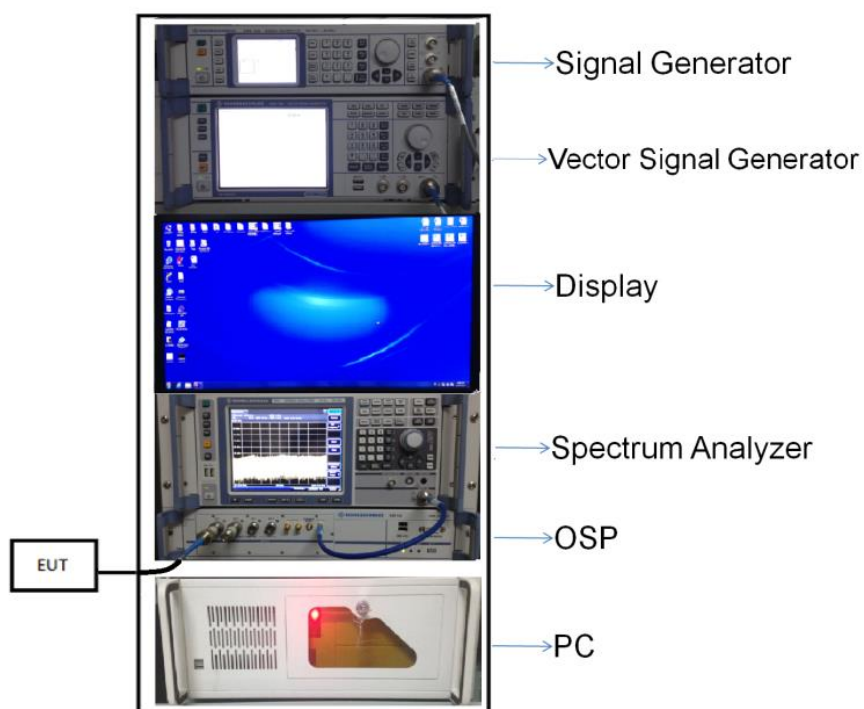


(Diagram 1)

4.4.2 For AC Power Supply Port Test

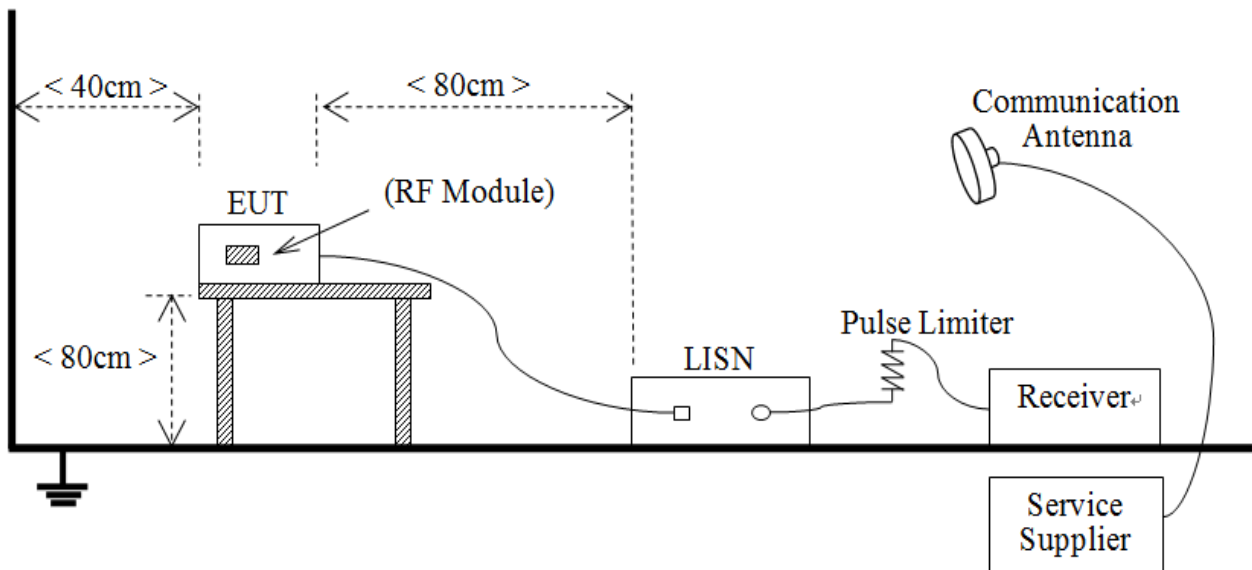


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

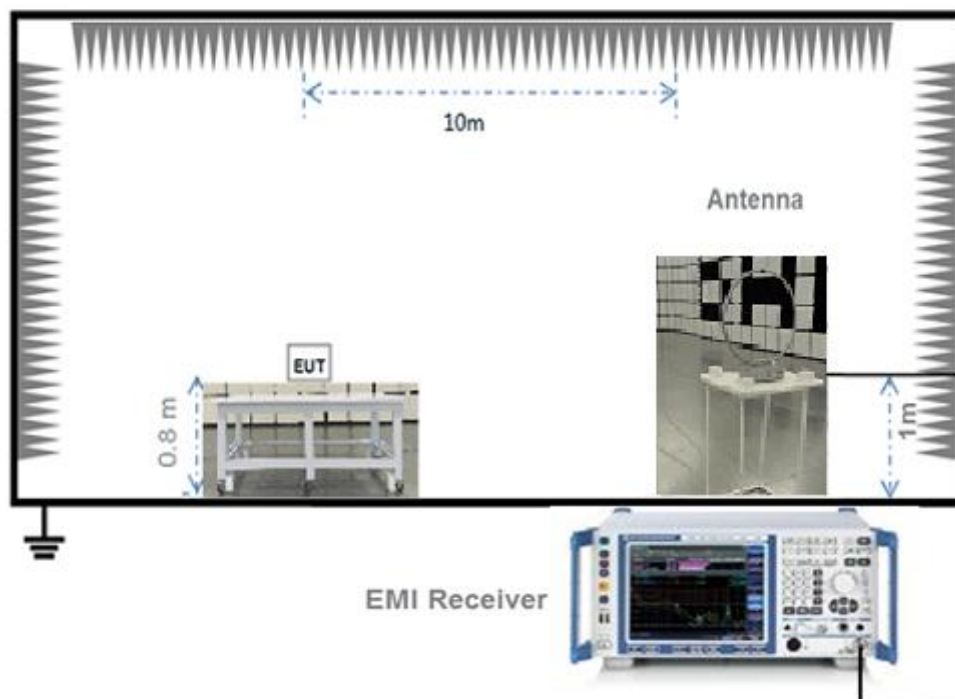


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

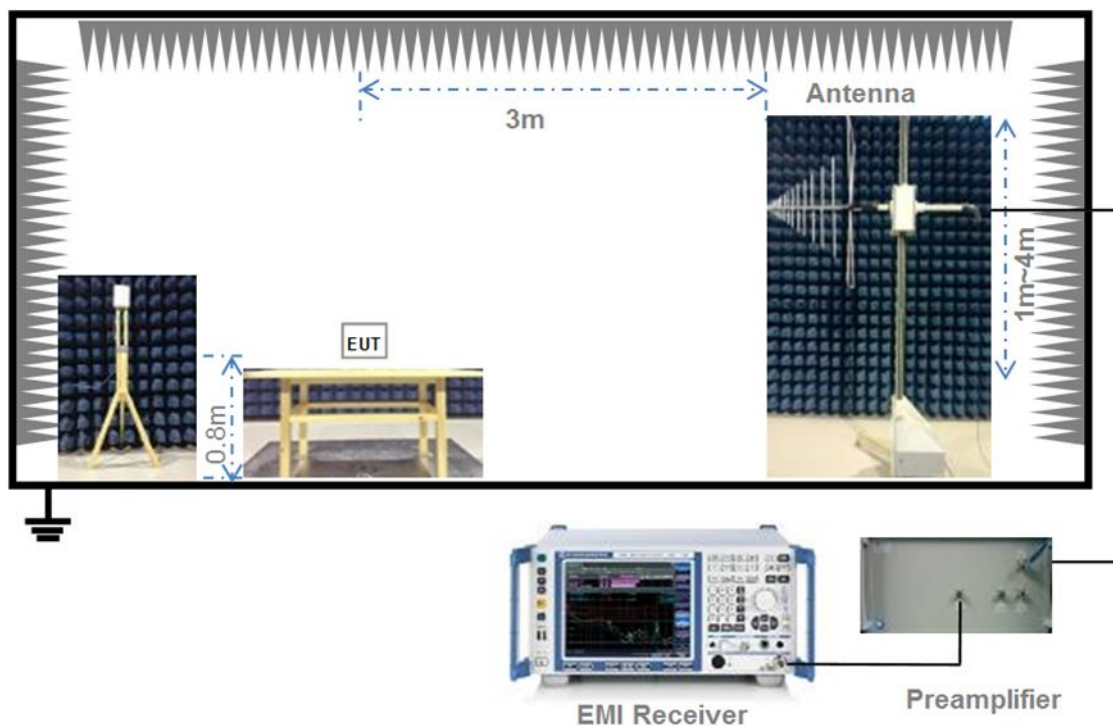

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

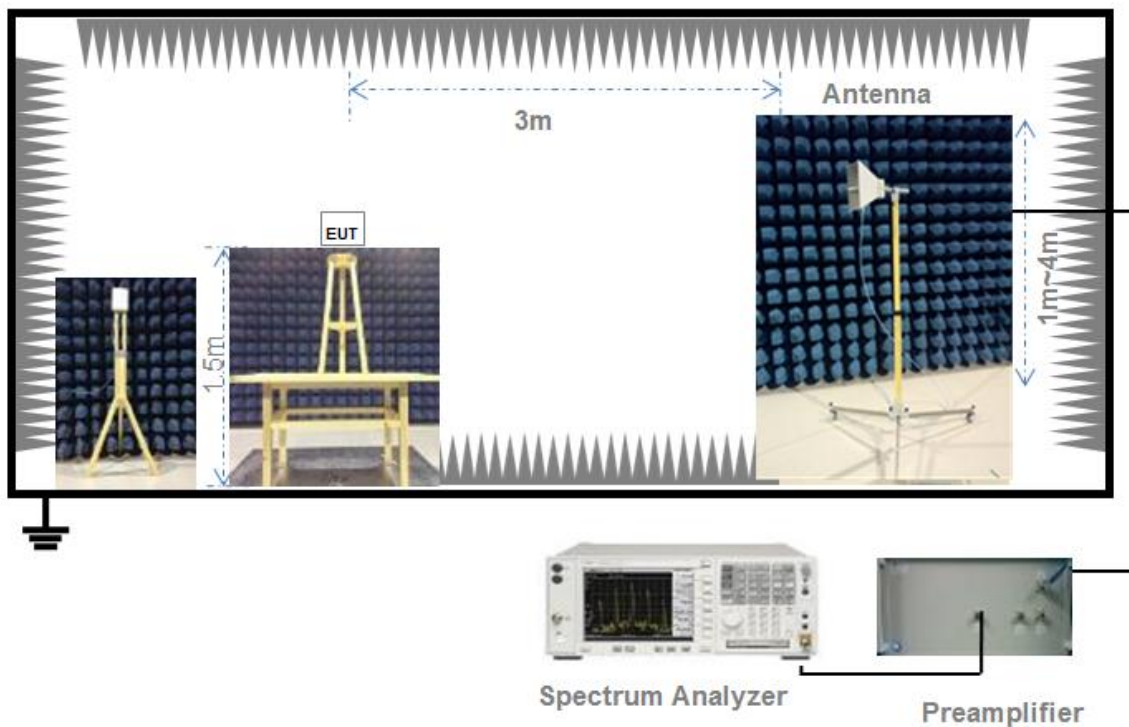

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203;

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a)

For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	902/F(kHz)	300
0.490 - 1.705	9020/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = $20 \times \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test

condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT

A.1 Number of Hopping Frequency


100K

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
LoRa	902-928	129	50	Pass


Test Plots

LoRa

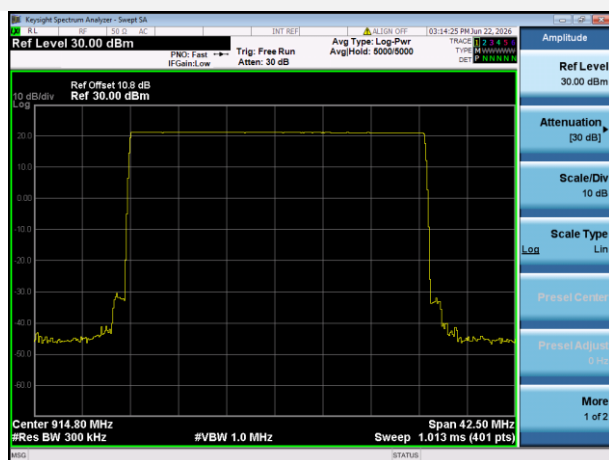

125KTest Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
LoRa	902-928	64	50	Pass

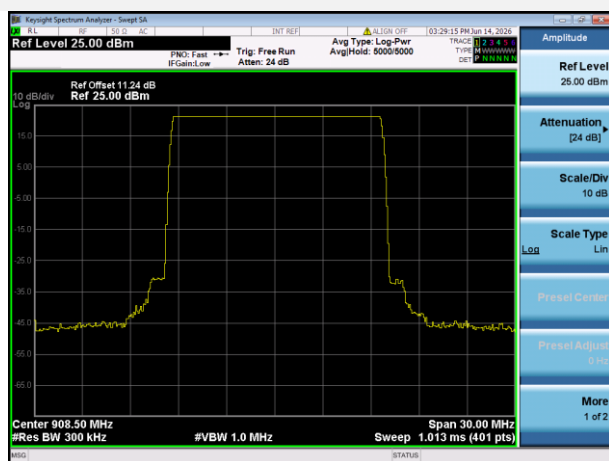Test PlotsLoRa

A.2 Peak Output Power


100K

Peak Power Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	20.86	121.96	30	1000	Pass
Middle	20.92	123.48			Pass
High	20.78	119.54			Pass

Test Plots


LOW CHANNEL

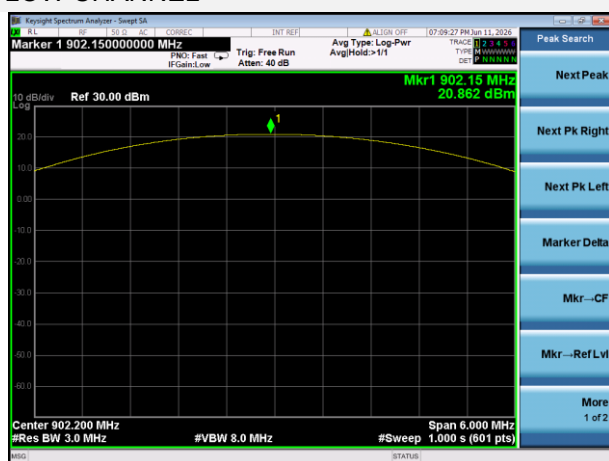

MIDDLE CHANNEL

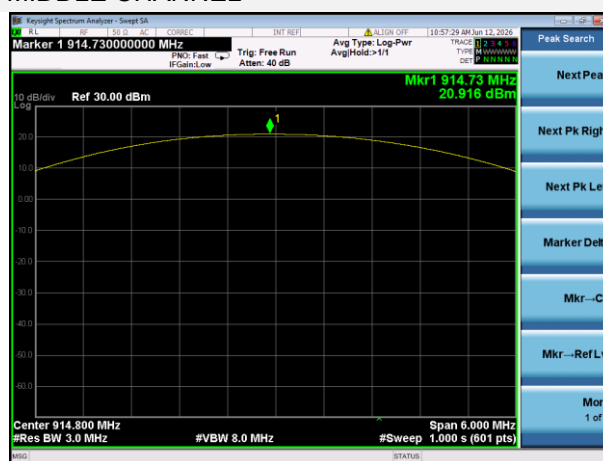

HIGH CHANNEL

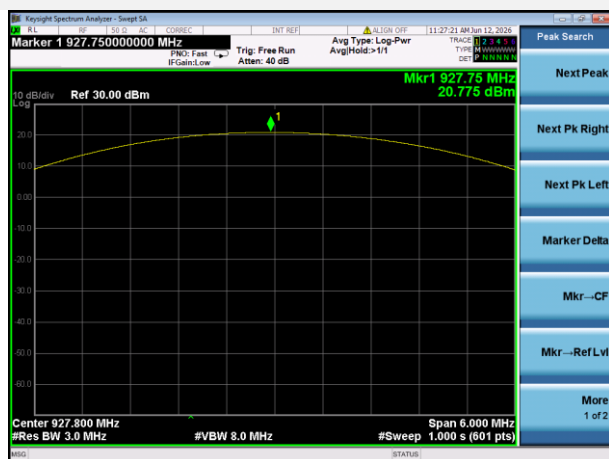


125K

Peak Power Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	20.94	124.25	30	1000	Pass
Middle	20.90	122.94			Pass
High	20.85	121.62			Pass

Test Plots


LOW CHANNEL

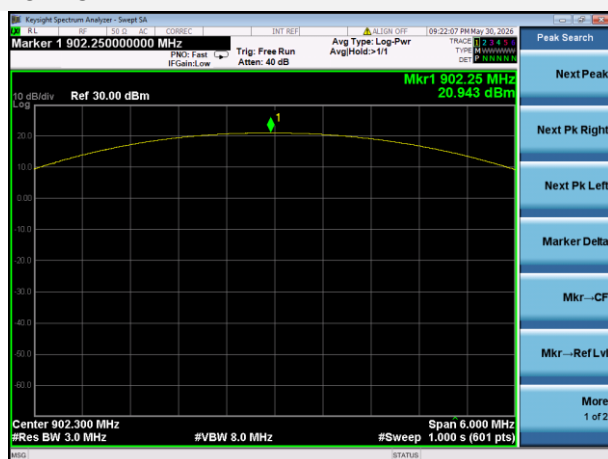

MIDDLE CHANNEL

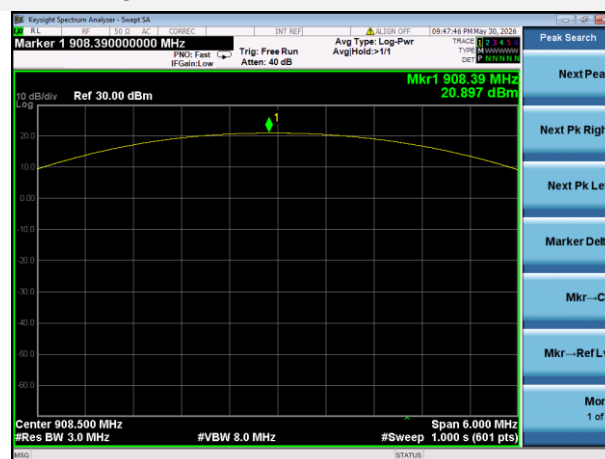

HIGH CHANNEL

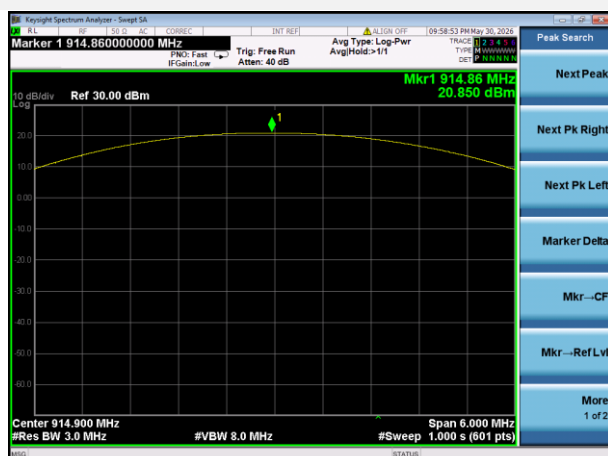

A.3 20 dB and 99% bandwidth

100K


Test Data

LoRa				
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
Low	0.148100	0.110630	0.25	Pass
Middle	0.148100	0.110960	0.25	Pass
High	0.148100	0.110990	0.25	Pass


Test Plots

20 dB Bandwidth


LOW CHANNEL

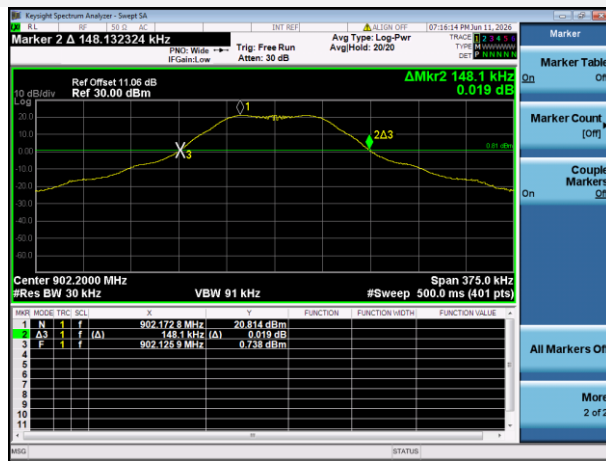

MIDDLE CHANNEL

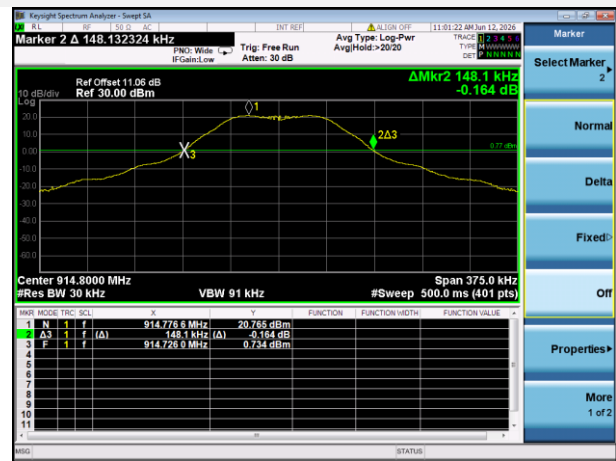

HIGH CHANNEL

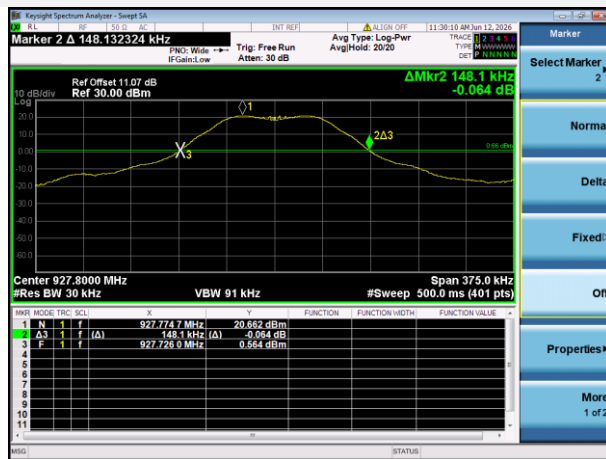

99% Bandwidth


LOW CHANNEL



MIDDLE CHANNEL



HIGH CHANNEL

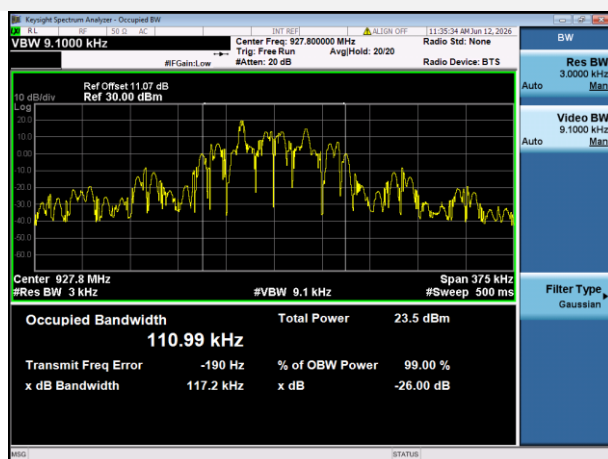

125K

Test Data

LoRa				
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
Low	0.211900	0.128050	0.25	Pass
Middle	0.209000	0.127630	0.25	Pass
High	0.207200	0.127850	0.25	Pass

Test Plots

20 dB Bandwidth


LOW CHANNEL



MIDDLE CHANNEL




HIGH CHANNEL

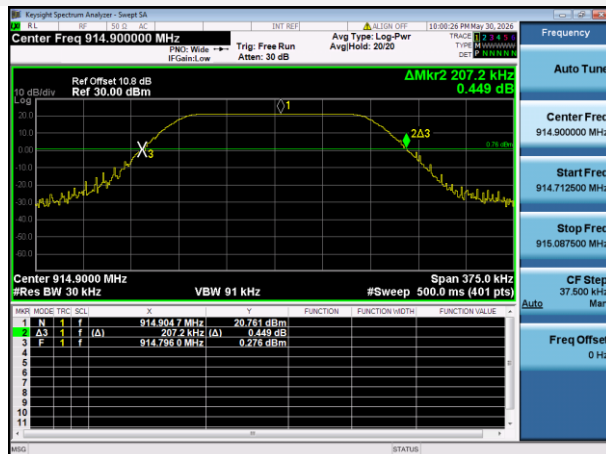


99% Bandwidth


LOW CHANNEL

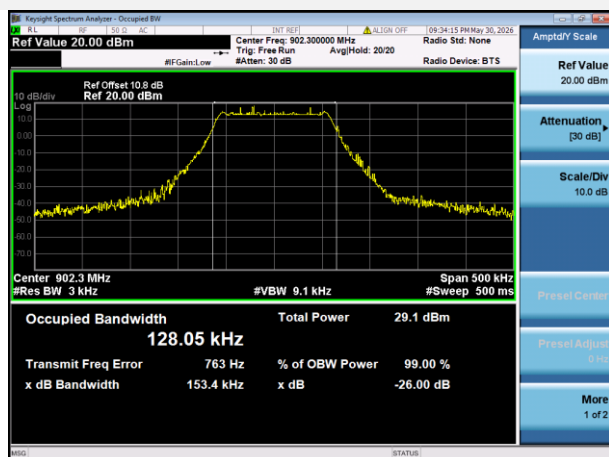

MIDDLE CHANNEL

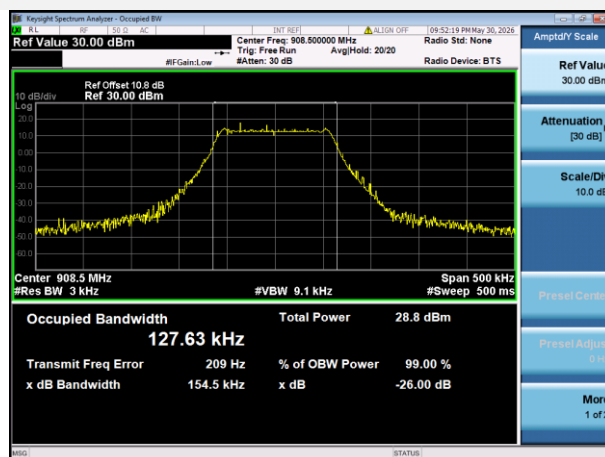

HIGH CHANNEL

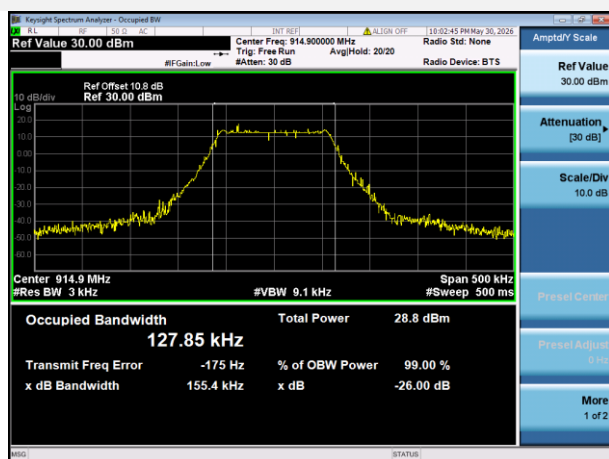

A.4 Hopping Frequency Separation


100K

Test Data

Mode	Frequency separation (MHz)	20 dB Bandwidth (MHz)	Verdict
LoRa	0.200	0.099	Pass

Test Plots

LoRa

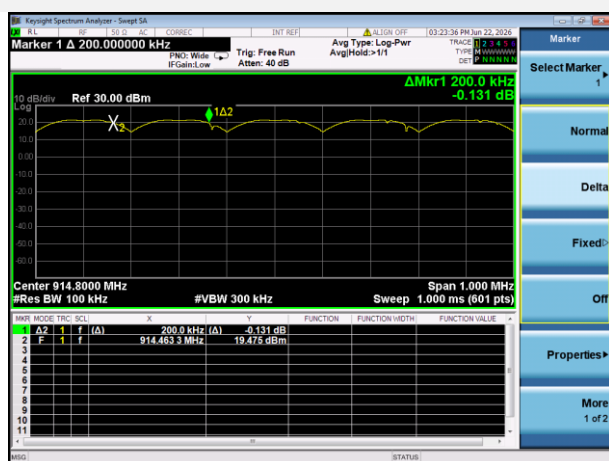


125K

Test Data

Mode	Frequency separation (MHz)	20 dB Bandwidth (MHz)	Verdict
LoRa	0.205	0.141	Pass

Test Plots

LoRa

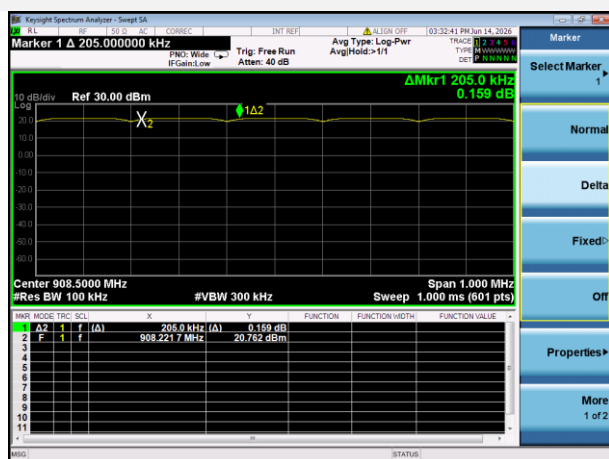

A.5 Average Time of Occupancy


100K

Test Data


Total of Dwell (ms)	Limit (sec)	Verdict
87.500	0.4	Pass

Test Plots

Pulse Width

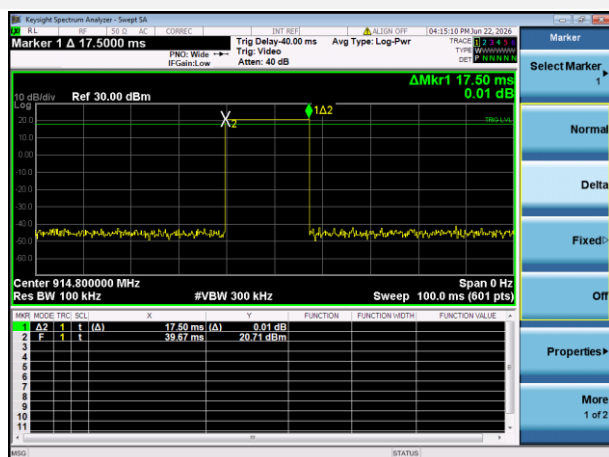

Total of Dwell

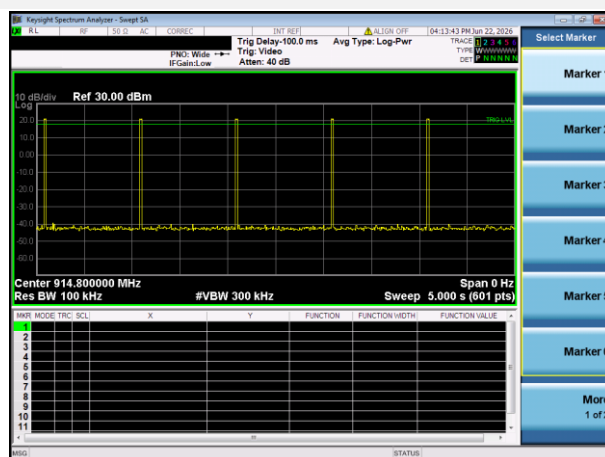

125KTest Data

Total of Dwell (ms)	Limit (sec)	Verdict
31.000	0.4	Pass

Test Plots

DW

