


Prüfbericht-Nr.: Test Report No.:	17039425 001	Auftrags-Nr.: Order No.:	164011550	Seite 1 von 23 Page 1 of 23
Kunden-Referenz-Nr.: Client Reference No.:	429028	Auftragsdatum: Order date:	25.03.2014	
Auftraggeber: Client:	Compupal (Group) Corporation No.1555 Jiashan Avenue, Jiashan, Zhejiang 314113, China			
Prüfgegenstand: Test item:	2.4GHz Digital Wireless Stereo Headphones			
Bezeichnung / Typ-Nr.: Identification / Type No.:	NS-WHP314			
Auftrags-Inhalt: Order content:	FCC Certification IC Certification			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.249 FCC CFR47 Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 FCC CFR47 Part 15: Subpart B Section 15.107 FCC CFR47 Part 15: Subpart B Section 15.109 FCC KDB publication 447498 D01 v05r01 RSS-210 Issue 8 December 2010 RSS-102 Issue 4 March 2010 RSS-Gen Issue 3 December 2010 ICES-003 Issue 5 August 2012			
Wareneingangsdatum: Date of receipt:	25.03.2014			
Prüfmuster-Nr.: Test sample No.:	A000041694-001 A000041694-003			
Prüfzeitraum: Testing period:	13.04.2014			
Ort der Prüfung: Place of testing:	Accurate Technology Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
12.05.2014  Tom Wang / Assistant Project Manager		12.05.2014  Winnie Hou / Technical Certifier		
Datum Date	Name / Stellung Name / Position	Unterschrift Signature	Datum Date	Name / Stellung Name / Position
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 99% BANDWIDTH

RESULT: Passed

5.1.3 FUNDAMENTAL & HARMONICS RADIATED EMISSION

RESULT: Pass

5.1.4 RADIATED SPURIOUS EMISSIONS OUTSIDE BAND

RESULT: Pass

5.1.5 RADIATED EMISSIONS

RESULT: Pass

5.1.6 CONDUCTED EMISSIONS

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5	SUBMITTED DOCUMENTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SETUP DIAGRAM	10
5.	TEST RESULTS	11
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	11
5.1.1	<i>Antenna Requirement</i>	<i>11</i>
5.1.2	<i>99% Bandwidth</i>	<i>12</i>
5.1.3	<i>Fundamental & Harmonics Radiated Emission</i>	<i>13</i>
5.1.4	<i>Radiated spurious emissions outside band</i>	<i>14</i>
5.1.5	<i>Radiated emissions</i>	<i>15</i>
5.1.6	<i>Conducted emissions</i>	<i>16</i>
6.	SAFETY HUMAN EXPOSURE	17
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	17
6.1.1	<i>Electromagnetic Fields</i>	<i>17</i>
7.	PHOTOGRAPHS OF THE TEST SET-UP	18
8.	LIST OF TABLES	23
9.	LIST OF PHOTOGRAPHS	23

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix 1: Test Results

(Only the worst case test graphs were shown in the Appendix)

2. Test Sites

2.1 Test Facilities

Accurate Technology Co., Ltd.

F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan
Shenzhen, P.R. China.

FCC Registration No.: 752051

IC OATS Registration No.: 5077A-2

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions				
Spectrum Analyzer	Agilent	E7405A	MY45115511	2015-01-11
Test Receiver	Rohde & Schwarz	ESCS30	100307	2015-01-11
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2015-01-11
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2015-01-11
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2015-01-11
50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	2015-01-11
Pre-Amplifier	Rohde & Schwarz	CBLU118354 0-01	3791	2015-01-11
Temp. & Humid. Chamber	Gongwen	HSD-500	0109	2015-01-11
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	100307	2015-01-11
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	2015-01-11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	2015-01-11
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	2015-01-11
Radiated Emission				
Spectrum Analyzer	Agilent	E7405A	MY45115511	2015-01-11
Test Receiver	Rohde & Schwarz	ESCS30	100307	2015-01-11
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2015-01-11
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2015-01-11
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2015-01-11
50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	2015-01-11
Pre-Amplifier	Rohde & Schwarz	CBLU118354 0-01	3791	2015-01-11

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radiated emission (below 30MHz)	$< \pm 3.08 \text{ dB}$
Radiated emission (30MHz-1GHz)	$< \pm 4.42 \text{ dB}$
Radiated emission (above 1GHz)	$< \pm 4.06 \text{ dB}$
Conducted Emission	$< \pm 2.23 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

Accurate Technology Co., Ltd. Test facility located at F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan, Shenzhen, P.R. China and is listed on the US Federal Communications Commission list of facilities and Industry Canada OATS list approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is digital wireless stereo headphones composed of one headphone and one docking. It operates at 2.4GHz ISM frequency band.
 For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of Docking

Technical Specification	Value
Type Designation	NS-WHP314
FCC ID	Z5YNS-WHP314
IC	10828A-WHP314
Operating Frequency band	2406 – 2475MHz
Channel separation	3MHz
Channel number	24
Maximum Output Power(mW)	4.7656
Operation Voltage	DC 5V via AC/DC adapter
Modulation	GFSK
Antenna type	Internal antenna
Antenna Gain	1.7dBi
Channel frequency(MHz)	2406/2409/2412/2415/2418/2421/2424/2427/2430/243/2436/2439 /2442/2445/2448/2451/2454/2457/2460/2463/2466/2469/2472/2475

Table 4: Technical Specification of Headphone

Technical Specification	Value
Type Designation	NS-WHP314
FCC ID	Z5YNS-WHP314H
IC	10828A-WHP314
Operating Frequency band	2406 – 2475MHz
Channel separation	3MHz
Channel number	24
Maximum Output Power(mW)	0.6920
Operation Voltage	DC 3.7V via battery
Battery Type	Polymer Li-ion Rechargeable Cell
Battery Capacity	450mA/3.7V
Modulation	GFSK
Antenna type	Internal antenna
Antenna Gain	1.79dBi
Channel frequency(MHz)	2406/2409/2412/2415/2418/2421/2424/2427/2430/243/2436/2439 /2442/2445/2448/2451/2454/2457/2460/2463/2466/2469/2472/2475

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless mode
 - 1. Docking transmitting
 - 2. Docking receiving
 - 3. Headphone transmitting
 - 4. Headphone receiving
- B. On, Audio input and output
- C. Charging
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|---------------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - PCB Layout | - Instruction Manual |
| - Photo Document | - Rating Label |
| - Operational Description | |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2003.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories.

Table 5: Accesspries and Auxiliary Equipment

Description	Manufacturer	Part No.	S/N
iPod	Apple	A1238	8K039T1Y9ZU
Speaker	Franklin	EVS-2000	N/A

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test


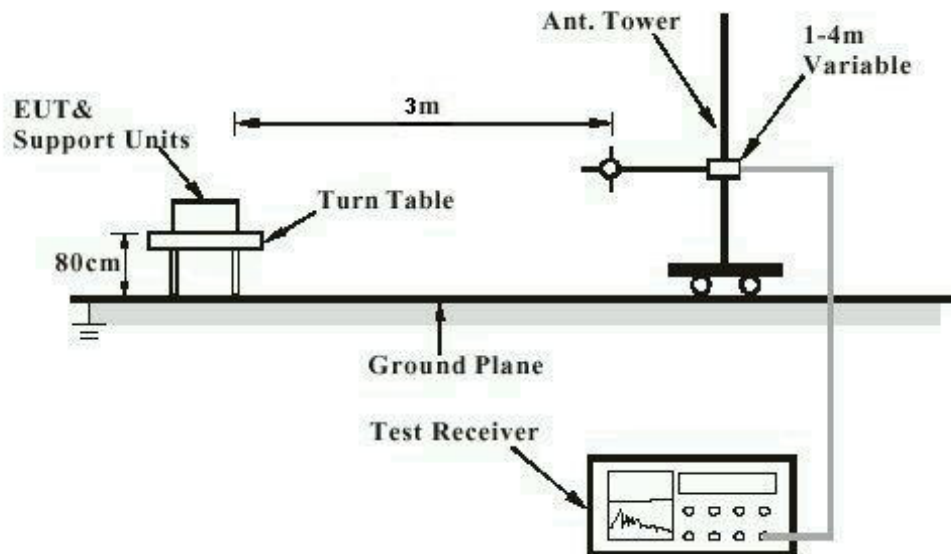


Diagram of Measurement Equipment Configuration for Conduction Measurement

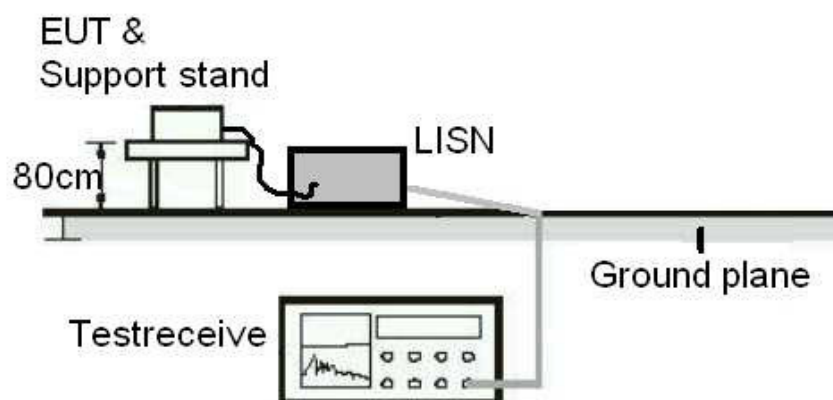

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	FCC Part 15.203 Clause 7.1.4 of RSS-Gen
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the maximum directional gain of antenna is 1.7dBi for docking and 1.79 dBi for headphone, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT photos for details.

5.1.2 99% Bandwidth**RESULT:****Passed**

Date of testing : 2014-04-13
Test standard : RSS-Gen clause 4.6.1
Basic standard : ANSI C63.4: 2003
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A.1, A.3
Ambient temperature : 22°C
Relative humidity : 52%
Atmospheric pressure : 101 kPa

Table 6: Test result of 99% Bandwidth of Docking

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2406	2940	/	Pass
Mid Channel	2439	2580	/	Pass
High Channel	2475	2560	/	Pass

Table 7: Test result of 99% Bandwidth of Headphone

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2406	2640	/	Pass
Mid Channel	2439	2540	/	Pass
High Channel	2475	2520	/	Pass

5.1.3 Fundamental & Harmonics Radiated Emission**RESULT:****Pass**

Date of testing : 2014-04-13
Test standard : FCC part 15.249(a)
Clause A2.9(a) of RSS-210
Basic standard : ANSI C63.4: 2003
Limits : FCC part 15.249(a)
Clause A2.9(a) of RSS-210
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test channel : Low/ Middle/ High
Input voltage : DC 5V for docking via AC/DC adapter
DC 3.7V for headphone via battery
Operation mode : A.1, A.3
Ambient temperature : 25°C
Relative humidity : 52%
Atmospheric pressure : 101kPa

For details refer to test plots in Appendix 1.

Prüfbericht - Nr.: 17039425 001

Test Report No.

Seite 14 von 23

Page 14 of 23

5.1.4 Radiated spurious emissions outside band**RESULT:****Pass**

Date of testing	:	2014-04-13
Test standard	:	FCC Part 15.209(a) FCC Part 15.249(d) Clause 2.2 of RSS-210
Basic standard	:	ANSI C63.4: 2003
Frequency range	:	0.009 – 25000MHz*
Limits	:	FCC Part 15.209(a) FCC Part 15.249(d) Clause 7.2.5 of RSS-Gen
Kind of test site	:	3m Semi-Anechoic Chamber

Test Setup

Test channel	:	Low/ Middle/ High
Input voltage	:	DC 5V for docking via AC/DC adapter DC 3.7V for headphone via battery
Operation mode	:	A.1, A.3
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa

*- The EUT's highest frequency generated and used is 2475MHz; hence the highest scan frequency is up to 25GHz.

5.1.5 Radiated emissions**RESULT:****Pass**

Date of testing	:	2014-04-13
Test standard	:	FCC Part 15.109
	:	ICES-003 Issue 5 August 2012
Basic standard	:	ANSI C63.4: 2003
Frequency range	:	30 – 1000MHz
Limits	:	FCC Part 15.109(a)
	:	Table 2 of ICES-003 Issue 5 August 2012
Kind of test site	:	3m Semi-Anechoic Chamber

Test Setup

Input voltage	:	DC 5V for docking via AC/DC adapter
	:	DC 3.7V for headphone
Operation mode	:	B,C
Earthing	:	Not connected
Ambient temperature	:	23°C
Relative humidity	:	48%
Atmospheric pressure	:	101kPa

For details refer to test plots in Appendix 1.

5.1.6 Conducted emissions

RESULT:**Pass**

Date of testing	:	2014-04-13
Test standard	:	FCC Part 15.107 FCC Part 15.207 RSS-Gen Clause 7.2.4
Basic standard	:	ANSI C63.4: 2003
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.107 FCC Part 15.207 Table 4 of RSS-Gen
Kind of test site	:	Shield room

Test setup

Input voltage	:	DC 5V for docking via AC/DC adapter DC 3.7V for headphone
Operation mode	:	A,B,C
Earthing	:	Not connected
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa

For details refer to test plots in Appendix 1.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass**

Test standard : RSS-102 Issue 4 March 2010
FCC KDB Publication 447498 D01 v05r01

The separation distance of the docking should be 40mm. The measured maximum peak output power of the docking is 4.7656mW, which is far below the SAR exclusion threshold level 77 mW (Appendix A, SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≥ 50 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile and Portable RF Exposure. Guidance v05r01.

The separation distance of the docking should be 5mm. The maximum peak output power of the headphone is 0.6920mW, which is far below the SAR exclusion threshold level 10mW (Appendix A, SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile and Portable RF Exposure. Guidance v05r01.


And the EUT is exempted from routine evaluation limits (SAR Evaluation) according to clause 2.5.1 of RSS-102 Issue 4 as well.

7. Photographs of the Test Set-Up


Photograph 1: Set-up for Conducted Emissions




Photograph 2: Set-up for Radiated Emissions

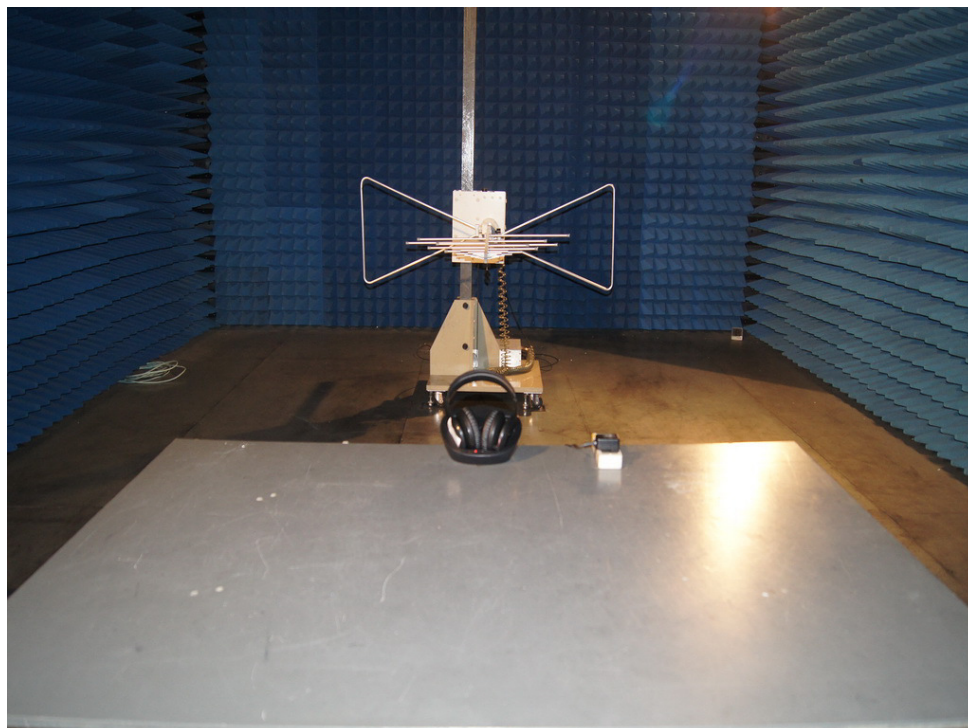


Photograph 3: Set-up for Spurious Emissions of headphone, below 30MHz

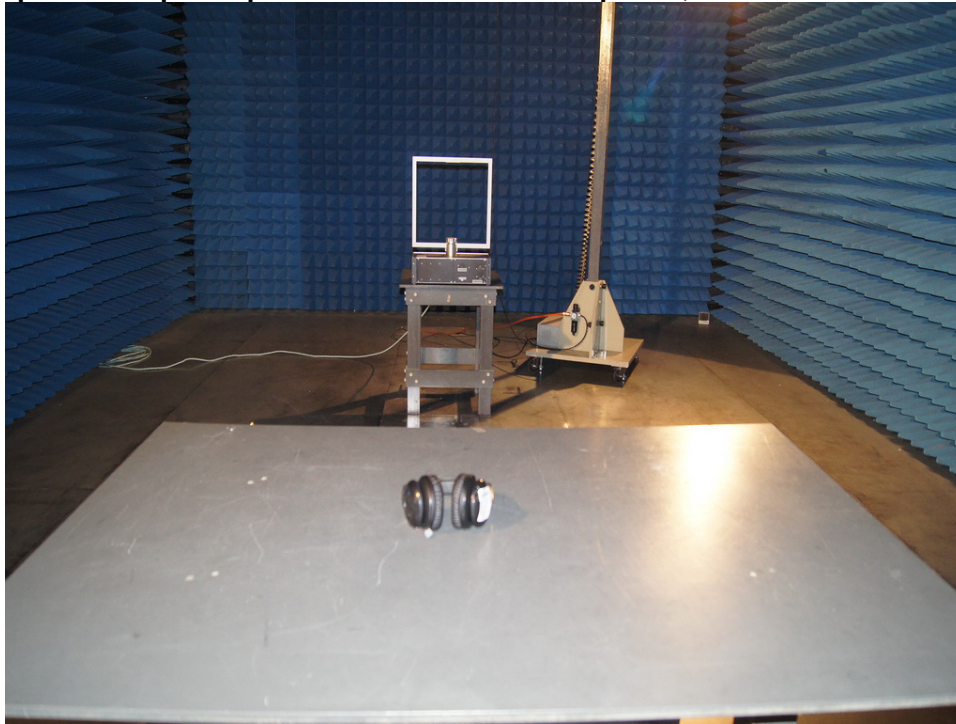


Photograph 4: Set-up for Spurious Emissions of docking, below 30MHz

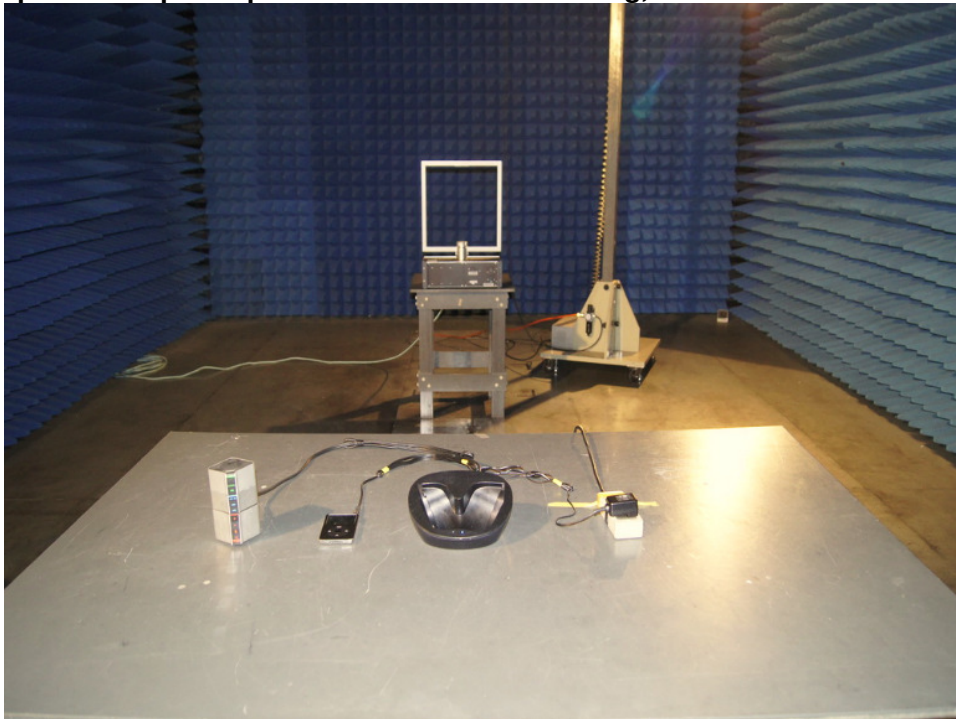


Photograph 5: Set-up for Spurious Emissions of headphone, 30MHz - 1GHz

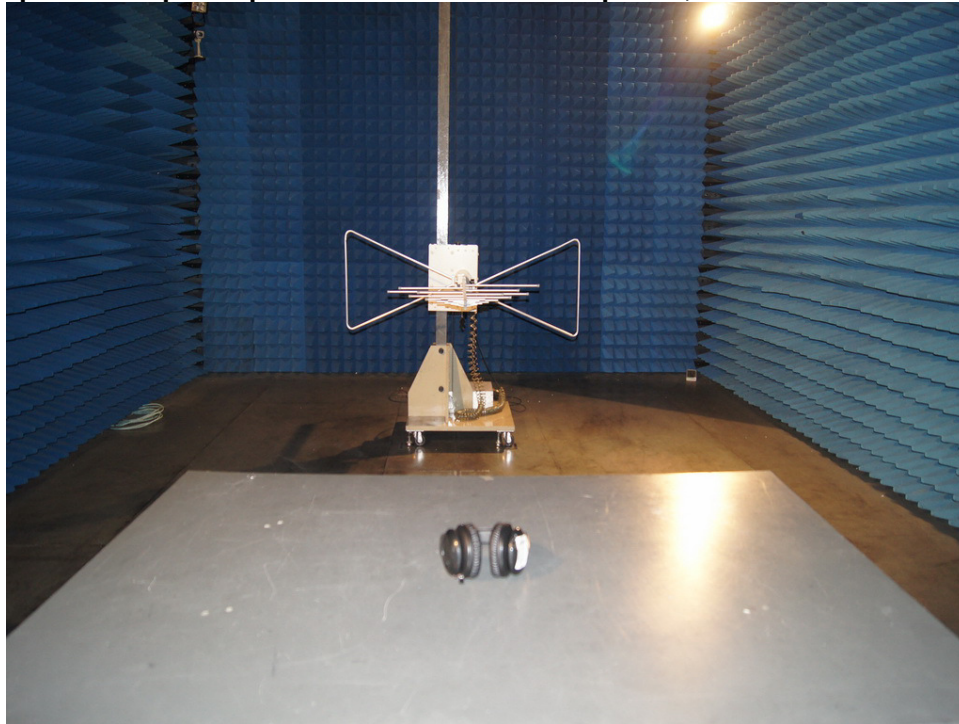


Photograph 6: Set-up for Spurious Emissions of docking, 30MHz - 1GHz

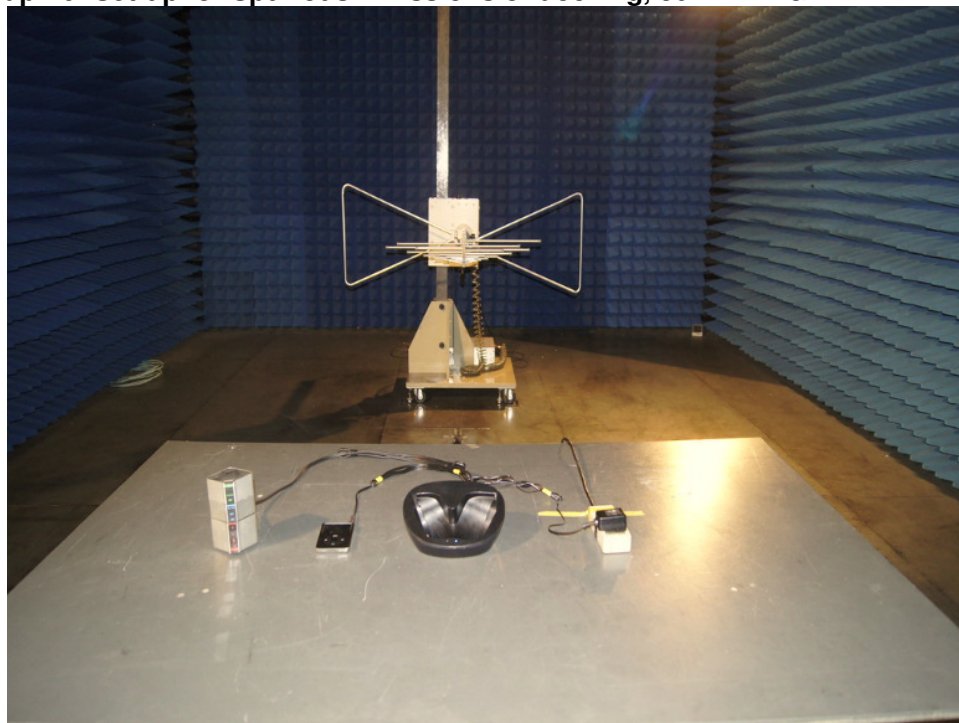


Photograph 7: Set-up for Spurious Emissions of headphone, 1GHz – 18GHz

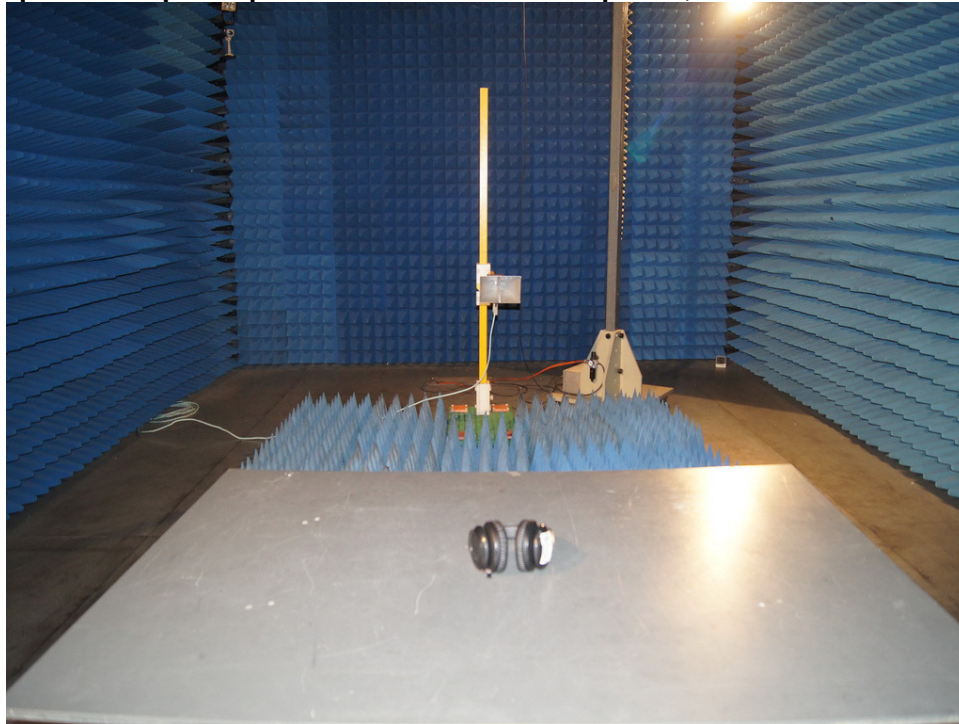


Photograph 8: Set-up for Spurious Emissions of docking, 1GHz – 18GHz

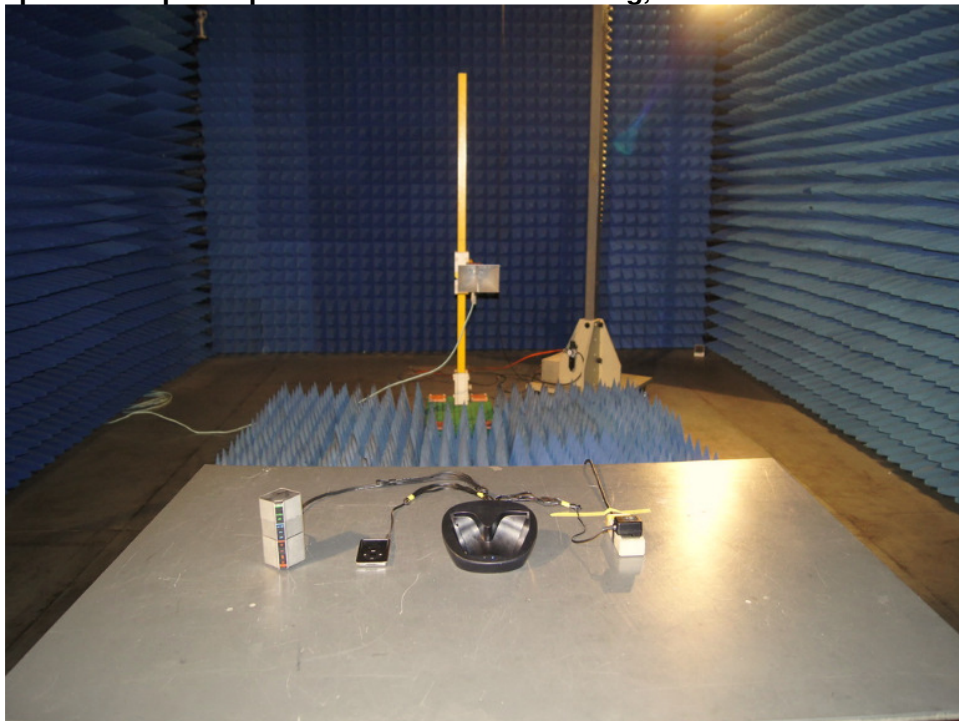

Photograph 9: Set-up for Spurious Emissions of headphone, 18GHz – 25GHz

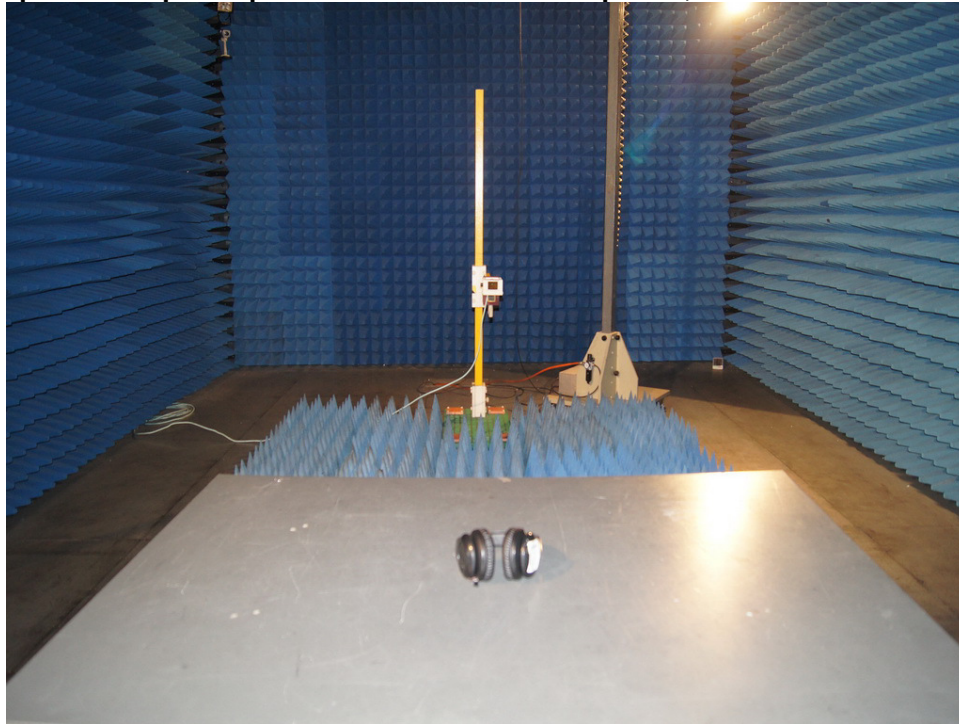

Photograph 10: Set-up for Spurious Emissions of docking, 18GHz – 25GHz

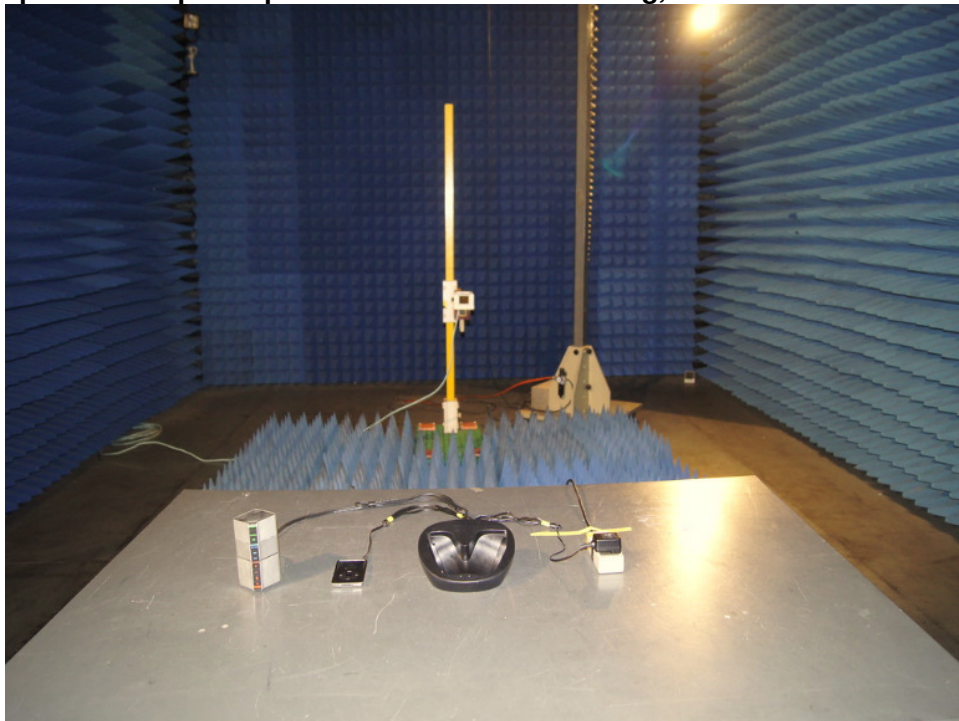

8. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of Docking.....	7
Table 4: Technical Specification of Headphone	7
Table 5: Accesspries and Auxiliary Equipment	9
Table 6: Test result of 99% Bandwidth of Docking	12
Table 7: Test result of 99% Bandwidth of Headphone.....	12

9. List of Photographs

Photograph 1: Set-up for Conducted Emissions	18
Photograph 2: Set-up for Radiated Emissions	18
Photograph 3: Set-up for Spurious Emissions of headphone, below 30MHz	19
Photograph 4: Set-up for Spurious Emissions of docking, below 30MHz	19
Photograph 5: Set-up for Spurious Emissions of headphone, 30MHz - 1GHz	20
Photograph 6: Set-up for Spurious Emissions of docking, 30MHz - 1GHz	20
Photograph 7: Set-up for Spurious Emissions of headphone, 1GHz – 18GHz.....	21
Photograph 8: Set-up for Spurious Emissions of docking, 1GHz – 18GHz	21
Photograph 9: Set-up for Spurious Emissions of headphone, 18GHz – 25GHz.....	22
Photograph 10: Set-up for Spurious Emissions of docking, 18GHz – 25GHz	22

Figure 1: Test figure of radiated spurious emission outside band of docking, low channel, 9 KHz-30MHz, X Axis



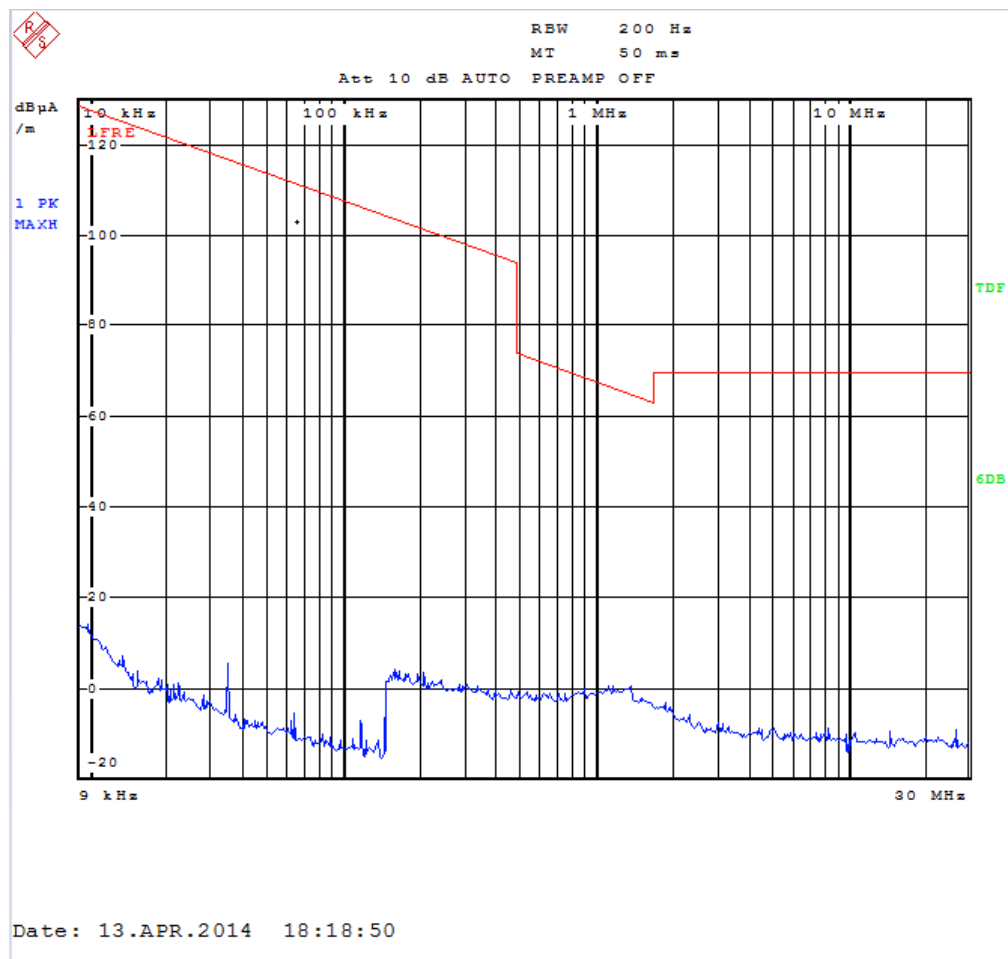


Figure 2: Test figure of radiated spurious emission outside band of docking, low channel, 9 KHz-30MHz, Y Axis

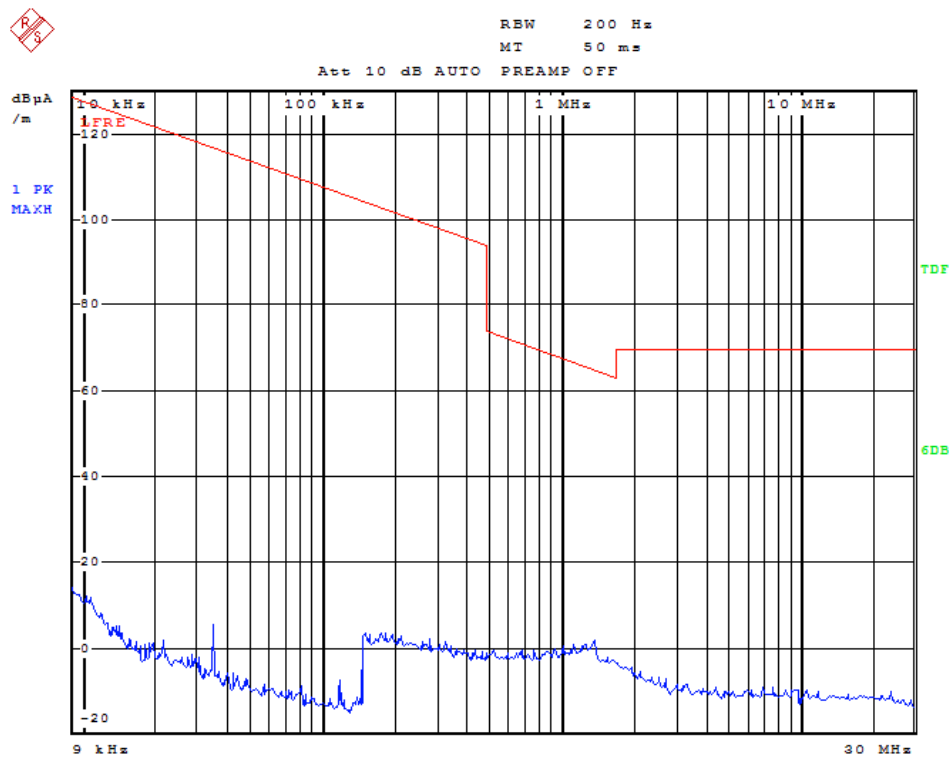


Date: 13.APR.2014 18:20:56

Figure 3: Test figure of radiated spurious emission outside band of docking, low channel, 9 KHz-30MHz, Z Axis

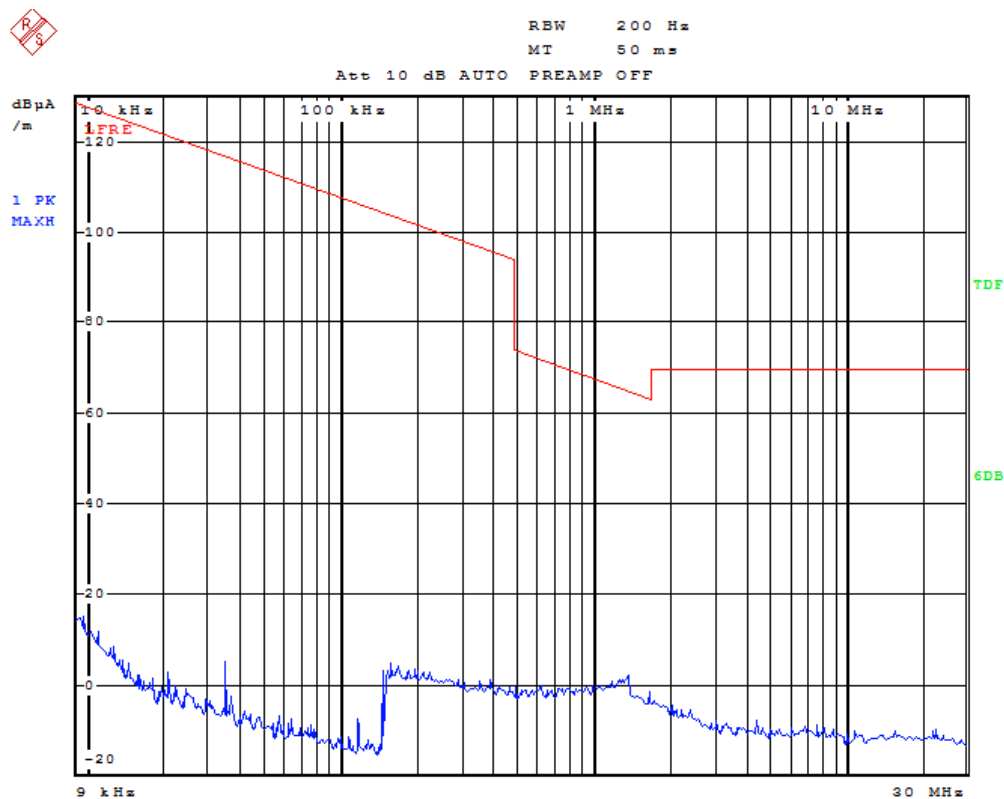


Date: 13.APR.2014 18:22:55

Figure 4: Test figure of radiated spurious emission outside band of docking, middle channel, 9 KHz-30MHz, X Axis

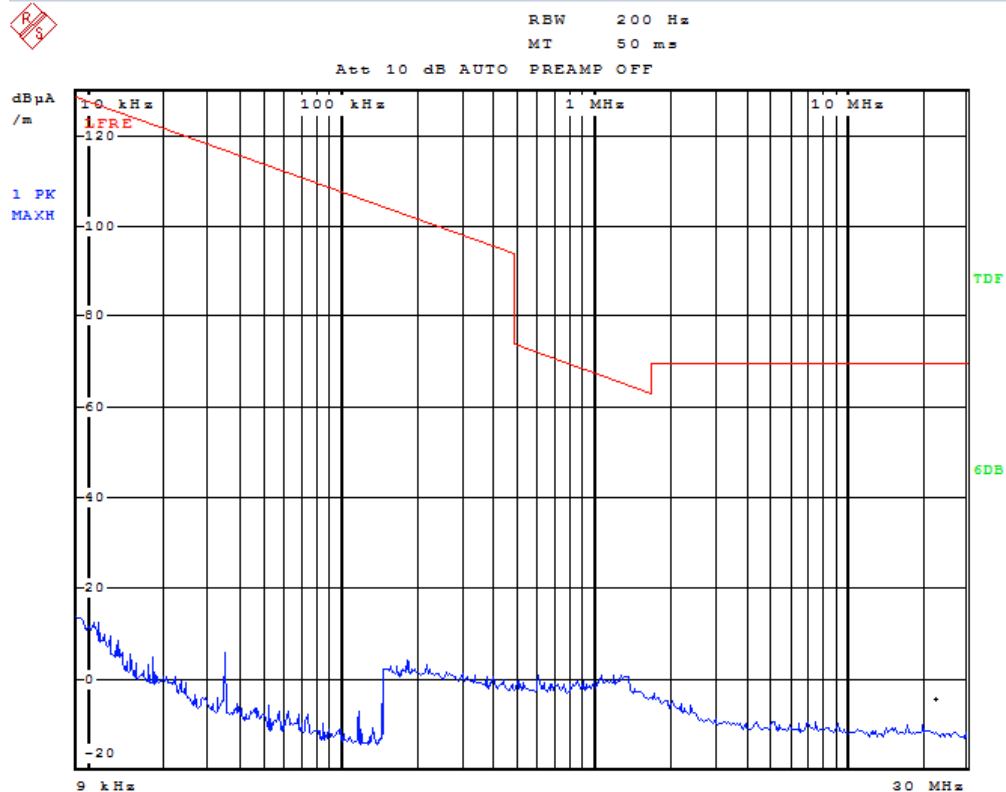


Date: 13.APR.2014 18:25:14

Figure 5: Test figure of radiated spurious emission outside band of docking, middle channel, 9 KHz-30MHz, Y Axis

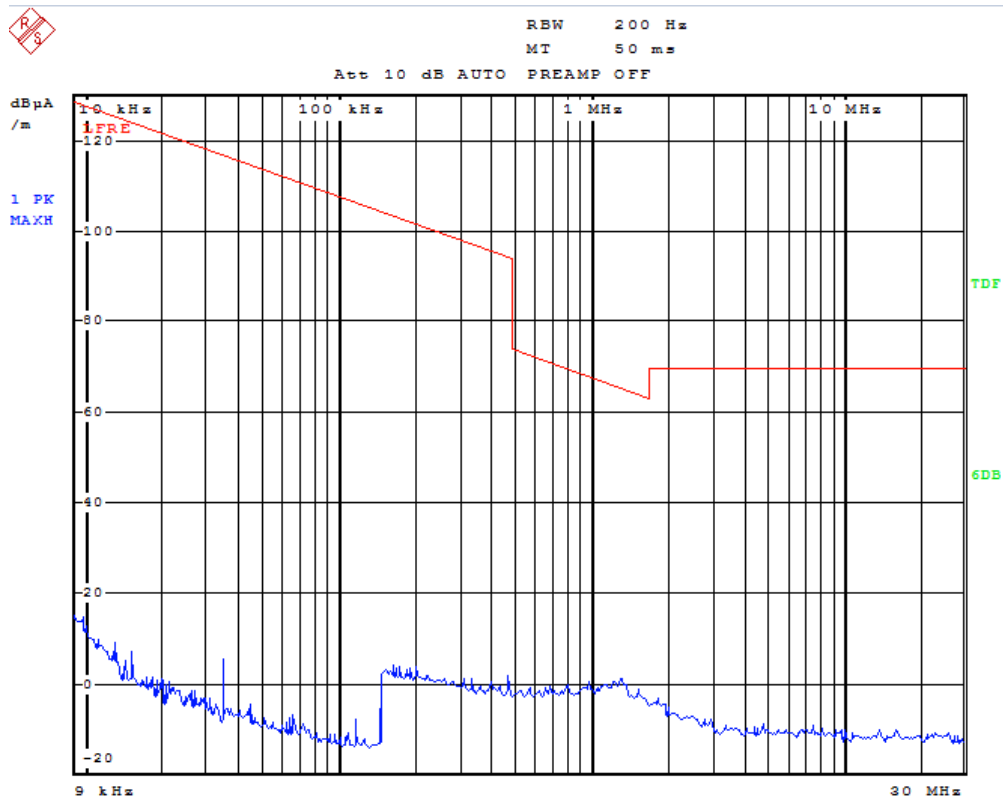


Date: 13.APR.2014 18:27:18

Figure 6: Test figure of radiated spurious emission outside band of docking, low channel, 9 KHz-30MHz, Z Axis

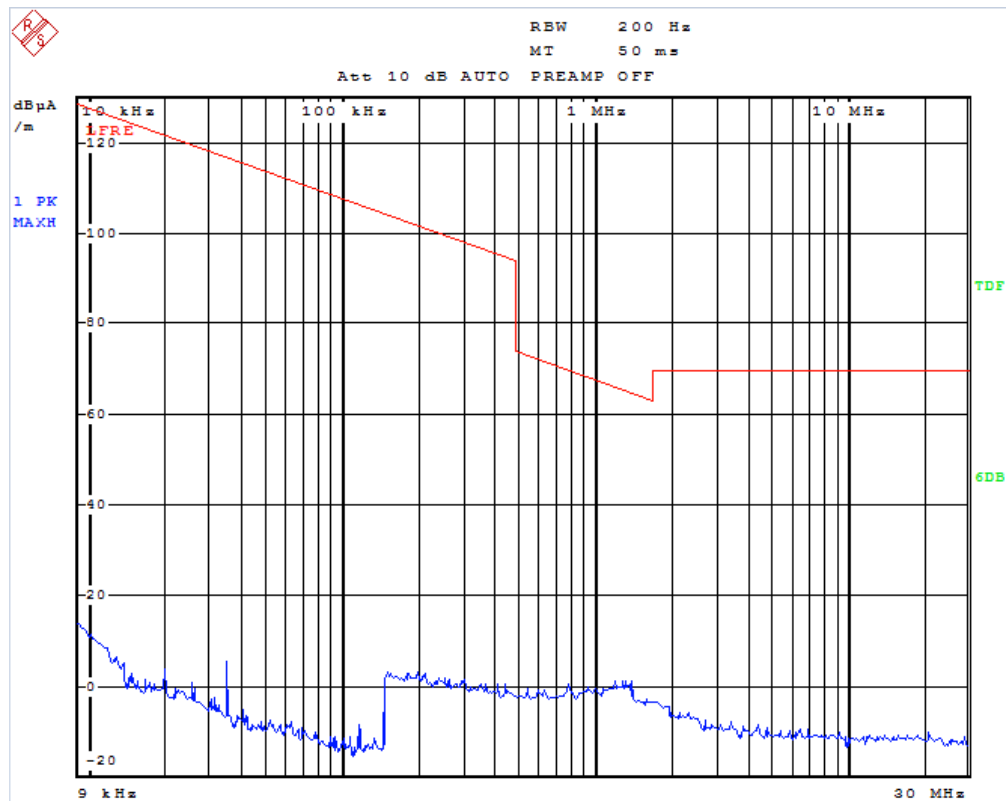


Date: 13.APR.2014 18:29:32

Figure 7: Test figure of radiated spurious emission outside band of docking, high channel, 9 KHz-30MHz, X Axis

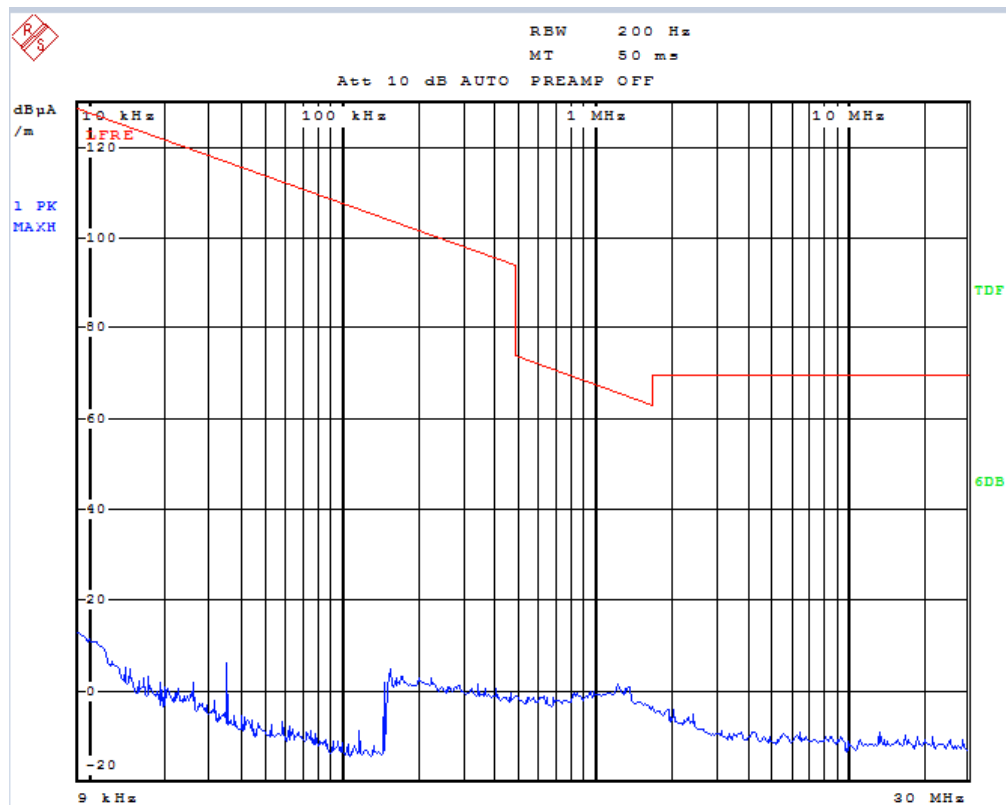


Date: 13.APR.2014 18:31:40

Figure 8: Test figure of radiated spurious emission outside band of docking, high channel, 9 KHz-30MHz, Y Axis

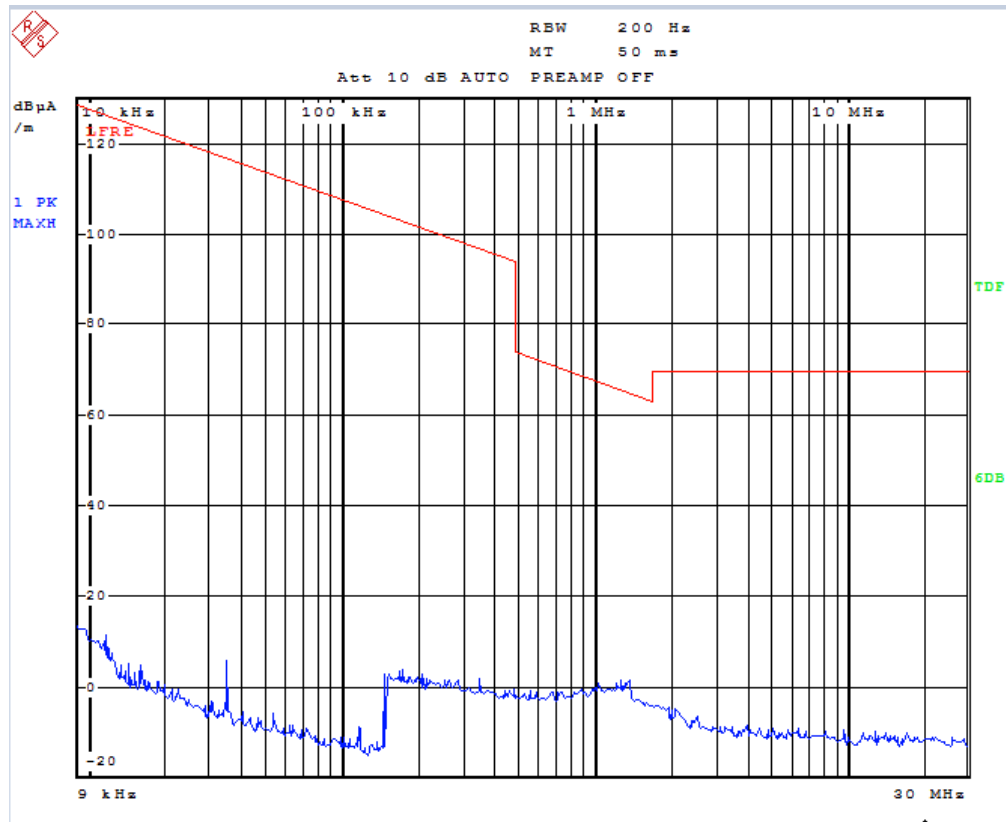

Date: 13.APR.2014 18:33:44

Figure 9: Test figure of radiated spurious emission outside band of docking, high channel, 9 KHz-30MHz, Z Axis

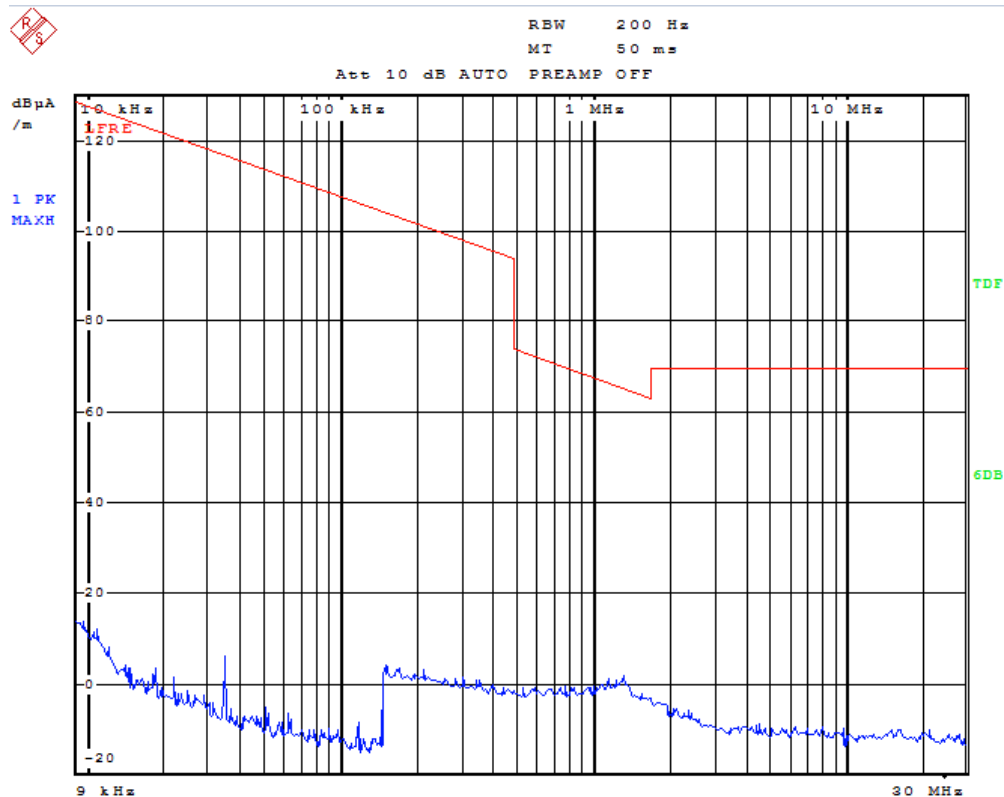

Date: 13.APR.2014 18:35:44

Figure 10: Test figure of radiated spurious emission outside band of docking, low channel, 30MHz-1000MHz, Horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1263	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2406 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

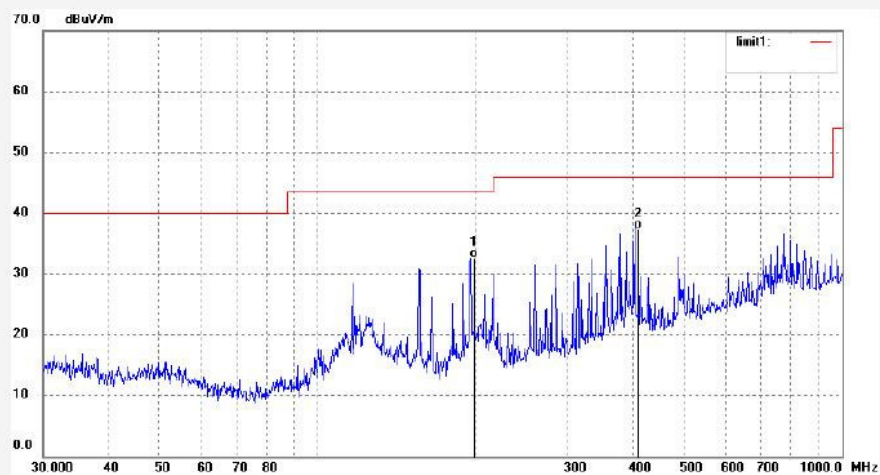

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	198.0372	45.14	-12.45	32.69	43.50	-10.81	QP			
2	408.0043	44.00	-6.63	37.37	46.00	-8.63	QP			

Figure 11: Test figure of radiated spurious emission outside band of docking, low channel, 30MHz-1000MHz, vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1264	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2406 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

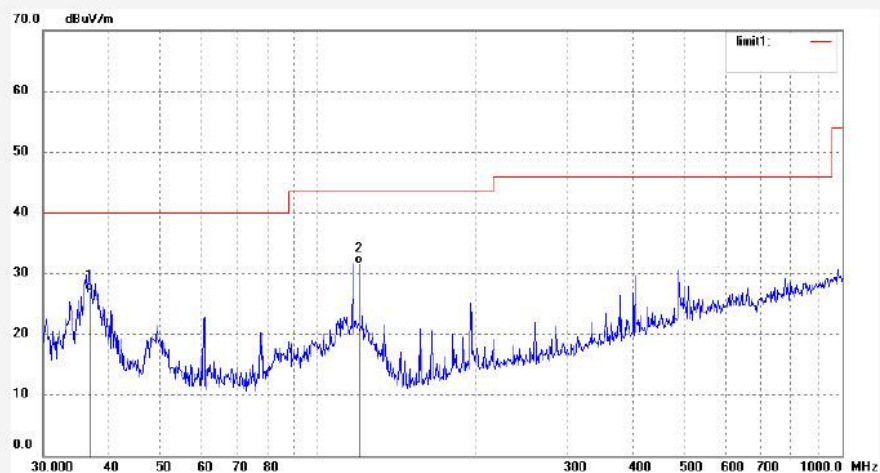

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.8470	37.92	-10.83	27.09	40.00	-12.91	QP			
2	119.0429	44.69	-13.15	31.54	43.50	-11.96	QP			

Figure 12: Test figure of radiated spurious emission outside band of docking, middle channel, 30MHz-1000MHz, Vertical



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1265
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: 2.4GHz Digital Wireless Stereo Hea
Mode: TX 2439 MHz
Model: NS-WHP314
Manufacturer: Compupal (Group) Corporation

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 14/04/13/
Time:
Engineer Signature: PEI
Distance: 3m

Note: Docking

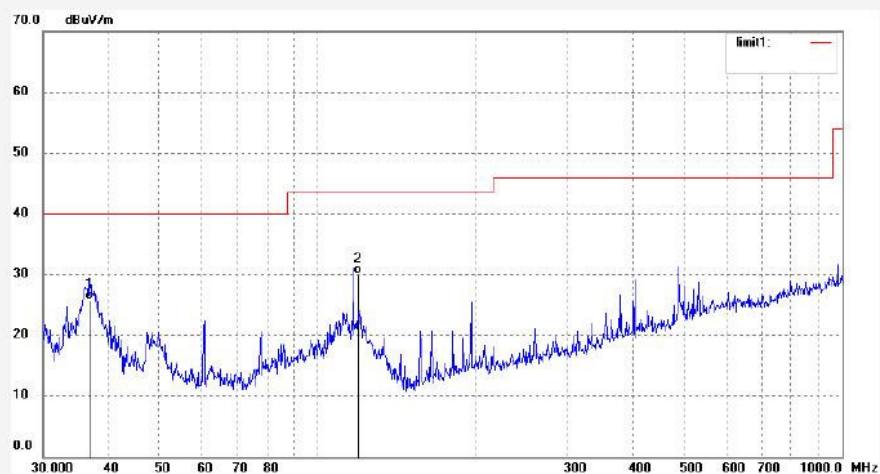

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.7811	36.70	-10.82	25.88	40.00	-14.12	QP			
2	119.1965	43.21	-13.15	30.06	43.50	-13.44	QP			

Figure 13: Test figure of radiated spurious emission outside band of docking, middle channel, 30MHz-1000MHz, horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1266

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: 2.4GHz Digital Wireless Stereo Hea

Mode: TX 2439 MHz

Model: NS-WHP314

Manufacturer: Compupal (Group) Corporation

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/04/13/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Docking

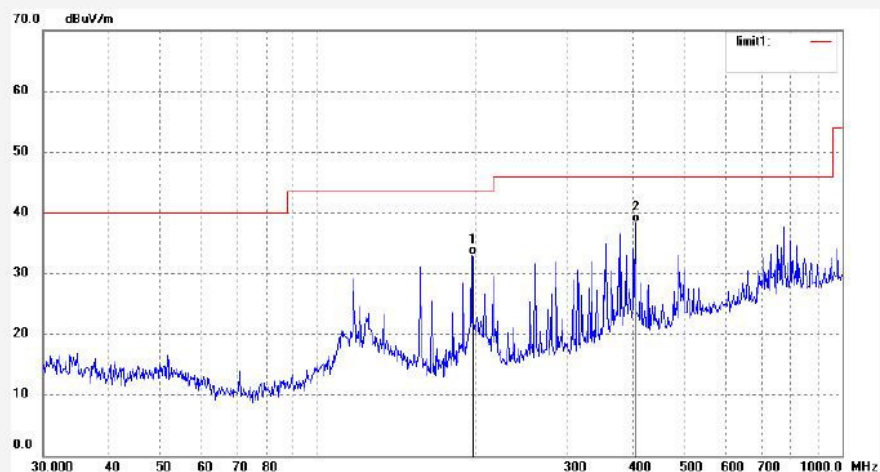

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	198.8211	45.36	-12.45	32.91	43.50	-10.59	QP			
2	408.0005	44.98	-6.63	38.35	46.00	-7.65	QP			

Figure 14: Test figure of radiated spurious emission outside band of docking, high channel, 30MHz-1000MHz, horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1267	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2475 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

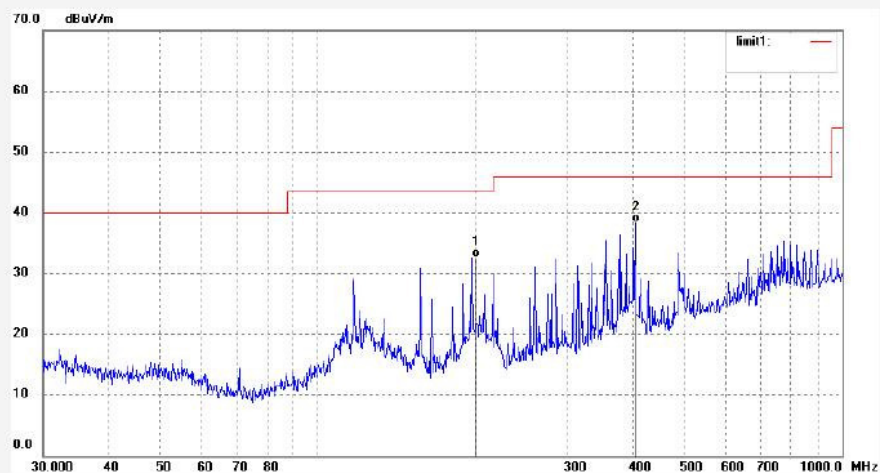

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	198.9341	45.06	-12.45	32.61	43.50	-10.89	QP			
2	408.0025	45.06	-6.63	38.43	46.00	-7.57	QP			

Figure 15: Test figure of radiated spurious emission outside band of docking, high channel, 30MHz-1000MHz, vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1268	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2475 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

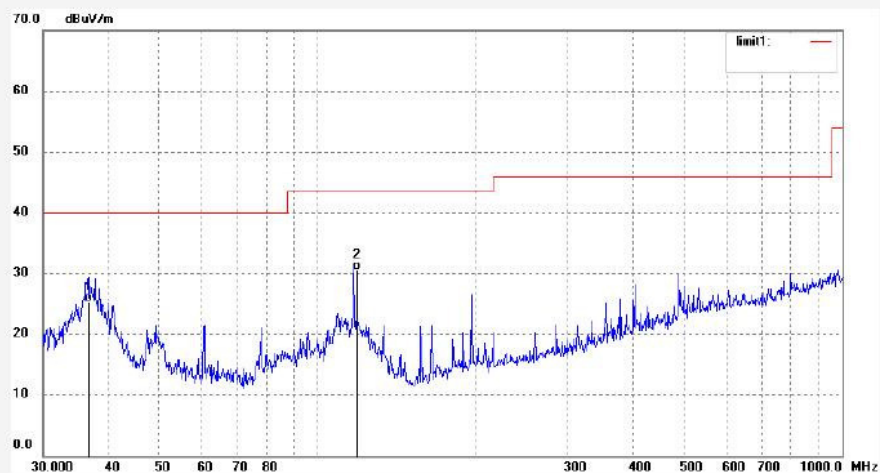

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.5236	35.99	-10.75	25.24	40.00	-14.76	QP			
2	119.4255	43.73	-13.15	30.58	43.50	-12.92	QP			

Figure 16: Test figure of radiated spurious emission outside band of docking, low channel, 1GHz-18GHz, horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1235	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2406 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

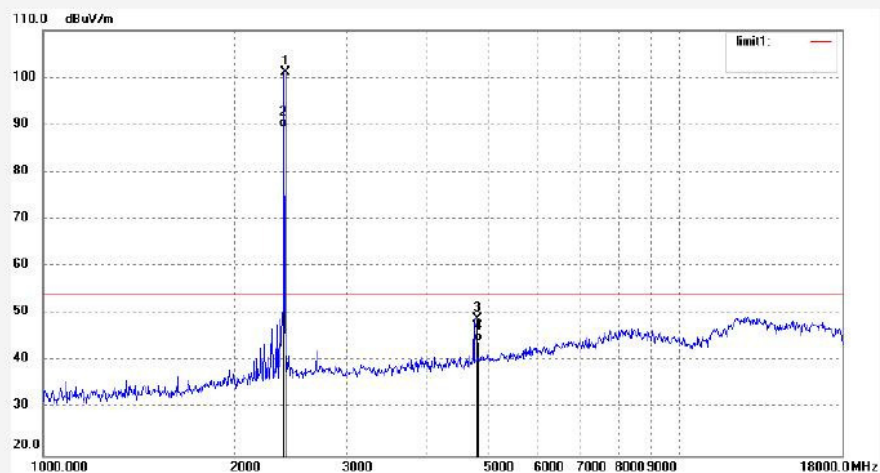

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.041	108.60	-7.44	101.16	4.00	.	peak			
2	2406.041	96.78	-7.44	89.34	4.00	.	AVG			
3	4812.082	49.23	-0.25	48.98	4.00	- 5.02	peak			
4	4812.082	44.45	-0.25	44.20	54.00	-9.80	AVG			

Figure 17: Test figure of radiated spurious emission outside band of docking, low channel, 1GHz-18GHz, Vertical



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1236
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: 2.4GHz Digital Wireless Stereo Hea
Mode: TX 2406 MHz
Model: NS-WHP314
Manufacturer: Compupal (Group) Corporation

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 14/04/13/
Time:
Engineer Signature: PEI
Distance: 3m

Note: Docking

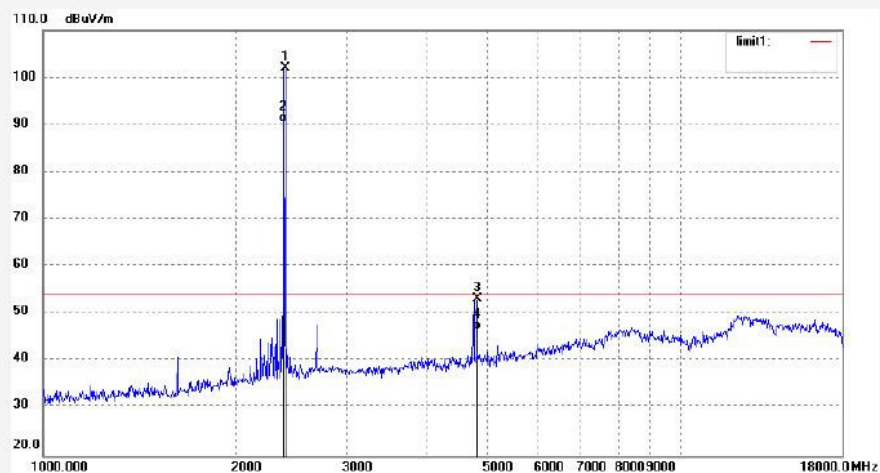

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.017	109.45	-7.44	102.01	4.00	.	peak			
2	2406.017	97.96	-7.44	90.52	4.00	.	AVG			
3	4812.035	53.36	-0.25	53.11	4.00	- 0.89	peak			
4	4812.035	46.88	-0.25	46.63	54.00	-7.37	AVG			

Figure 18: Test figure of radiated spurious emission outside band of docking, middle channel, 1GHz-18GHz, horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1239	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2439 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

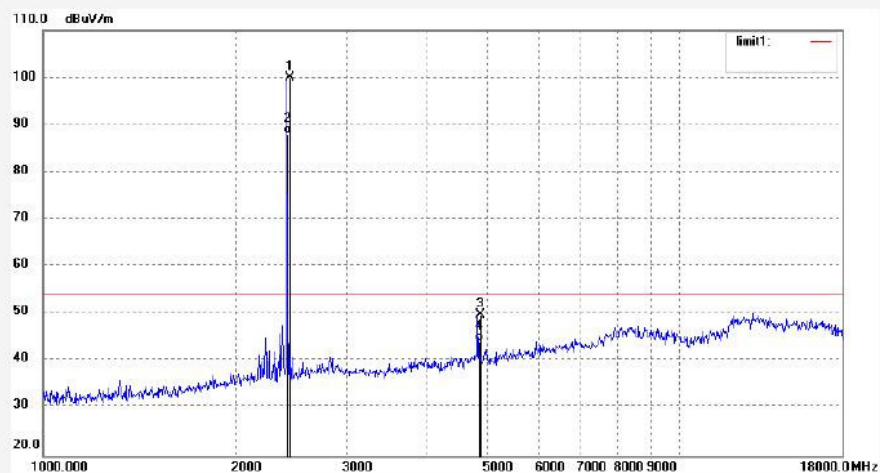

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2439.018	107.39	-7.36	100.03	4.00	.	peak			
2	2439.018	95.47	-7.36	88.11	4.00	.	AVG			
3	4878.034	49.68	0.11	49.79	4.00	- 4.21	peak			
4	4878.034	44.07	0.11	44.18	54.00	-9.82	AVG			

Figure 19: Test figure of radiated spurious emission outside band of docking, middle channel, 1GHz-18GHz, vertical



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1240	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2439 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

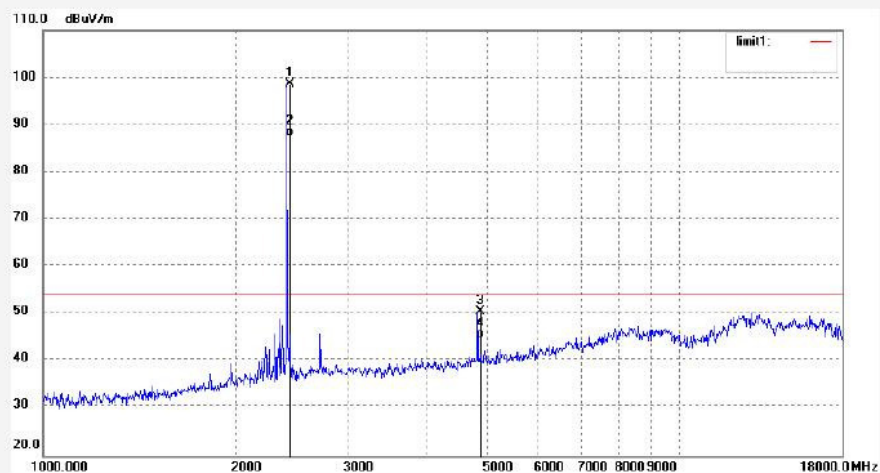

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2439.022	105.93	-7.36	98.57	4.00		peak			
2	2439.022	94.87	-7.36	87.51	4.00		AVG			
3	4878.042	50.32	0.11	50.43	4.00	- 3.57	peak			
4	4878.042	44.84	0.11	44.95	54.00	-9.05	AVG			

Figure 20: Test figure of radiated spurious emission outside band of docking, high channel, 1GHz-18GHz, vertical



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1241
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: 2.4GHz Digital Wireless Stereo Hea
Mode: TX 2475 MHz
Model: NS-WHP314
Manufacturer: Compupal (Group) Corporation

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 14/04/13/
Time:
Engineer Signature: PEI
Distance: 3m

Note: Docking

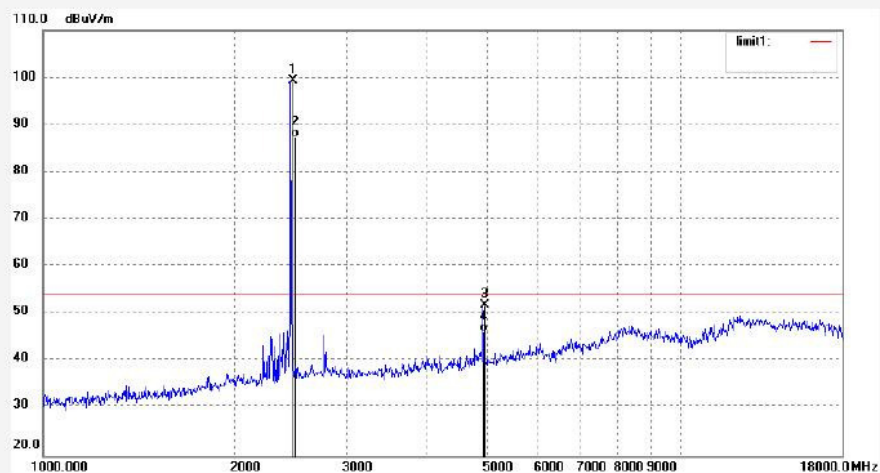

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2475.011	106.72	-7.36	99.36	4.00	.	peak			
2	2475.011	94.85	-7.36	87.49	4.00	.	AVG			
3	4950.023	51.46	0.47	51.93	4.00	- 2.07	peak			
4	4950.023	45.79	0.47	46.26	54.00	-7.74	AVG			

Figure 21: Test figure of radiated spurious emission outside band of docking, high channel, 1GHz-18GHz, horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1242	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2475 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

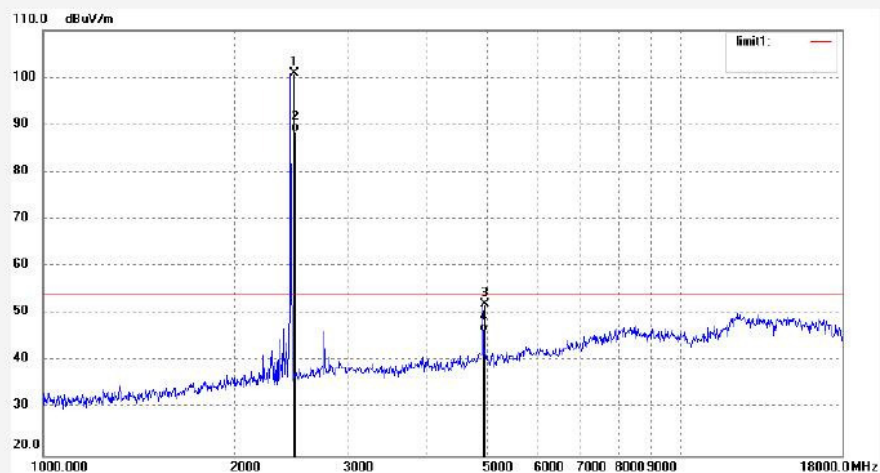

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2475.020	108.24	-7.36	100.88	4.00	.	peak			
2	2475.020	95.96	-7.36	88.60	4.00	. 0	AVG			
3	4950.033	51.56	0.47	52.03	4.00	- 1.97	peak			
4	4950.033	45.83	0.47	46.30	54.00	-7.70	AVG			

Figure 22: Test figure of radiated spurious emission outside band of docking, low channel, 18GHz-25GHz, horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1222	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2406 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

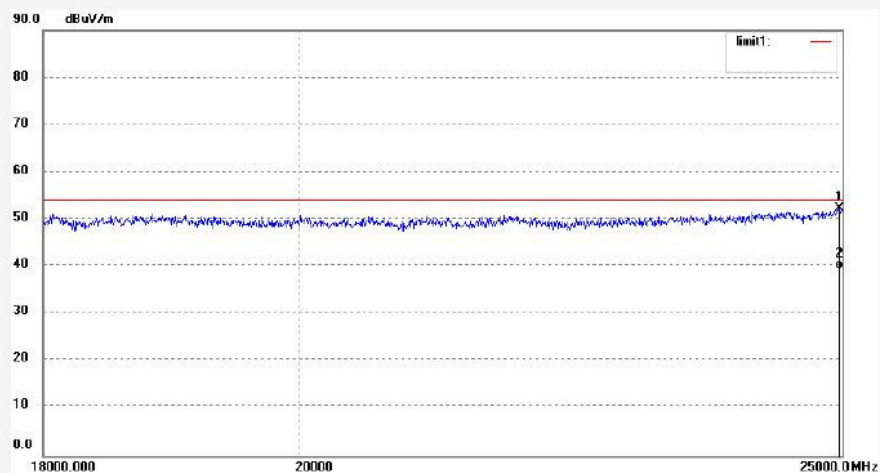

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24975.325	33.36	18.87	52.23	4.00	- 1.77	peak			
2	24975.325	20.57	18.87	39.44	54.00	-14.56	AVG			

Figure 23: Test figure of radiated spurious emission outside band of docking, low channel, 18GHz-25GHz, vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1223	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2406 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

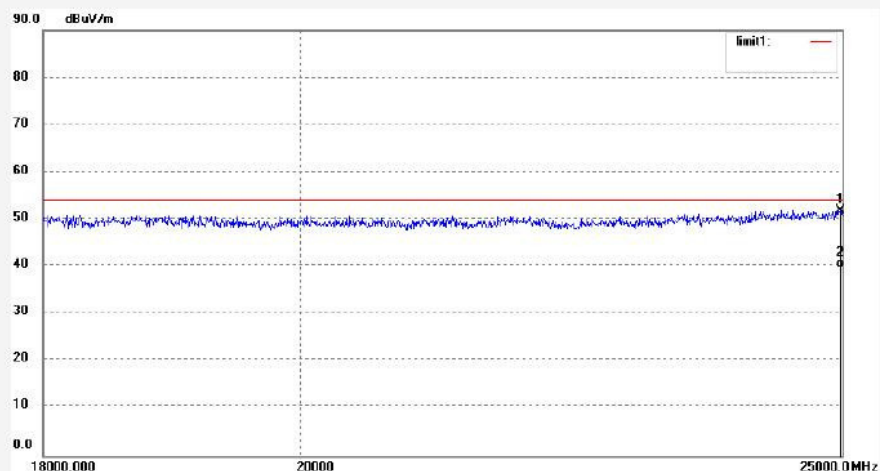

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24983.547	32.93	18.88	51.81	4.00	- 2.19	peak			
2	24983.547	20.77	18.88	39.65	54.00	-14.35	AVG			

Figure 24: Test figure of radiated spurious emission outside band of docking, middle channel, 18GHz-25GHz, vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1224	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2439 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

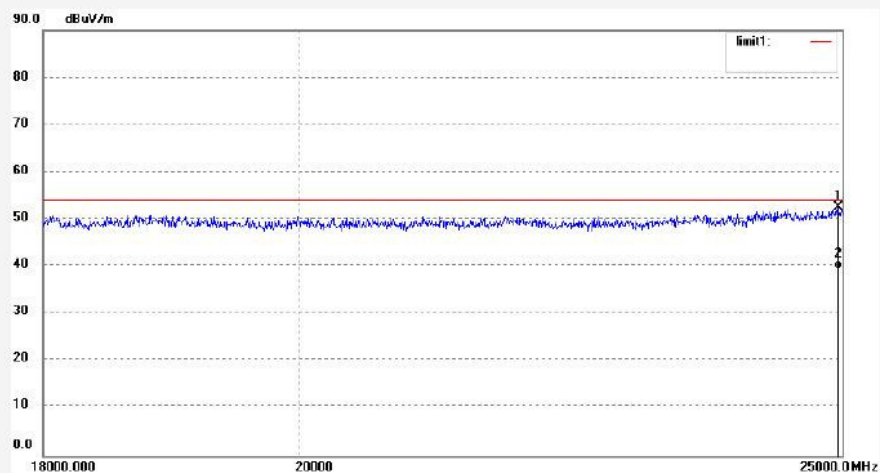

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24958.889	33.80	18.84	52.64	4.00	- 1.36	peak			
2	24958.889	20.63	18.84	39.47	54.00	-14.53	AVG			

Figure 25: Test figure of radiated spurious emission outside band of docking, middle channel, 18GHz-25GHz, horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1225	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2439 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

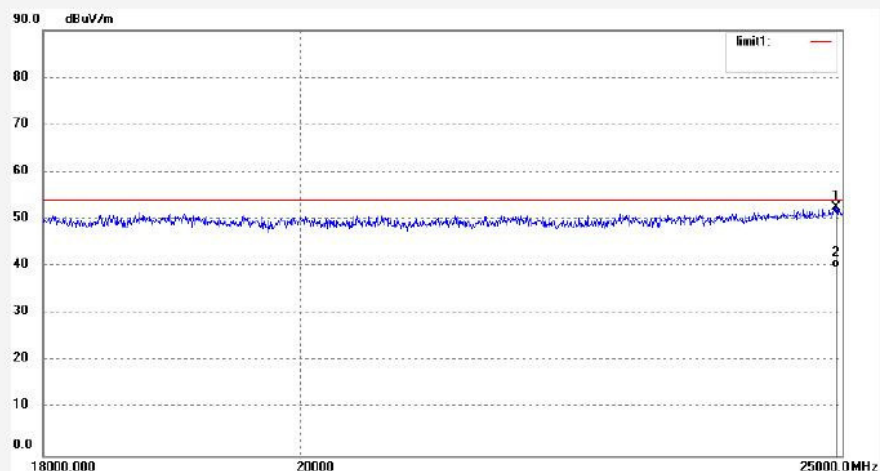

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24942.463	33.72	18.82	52.54	4.00	- 1.46	peak			
2	24942.463	20.97	18.82	39.79	54.00	-14.21	AVG			

Figure 26: Test figure of radiated spurious emission outside band of docking, high channel, 18GHz-25GHz, horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1226	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2475 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

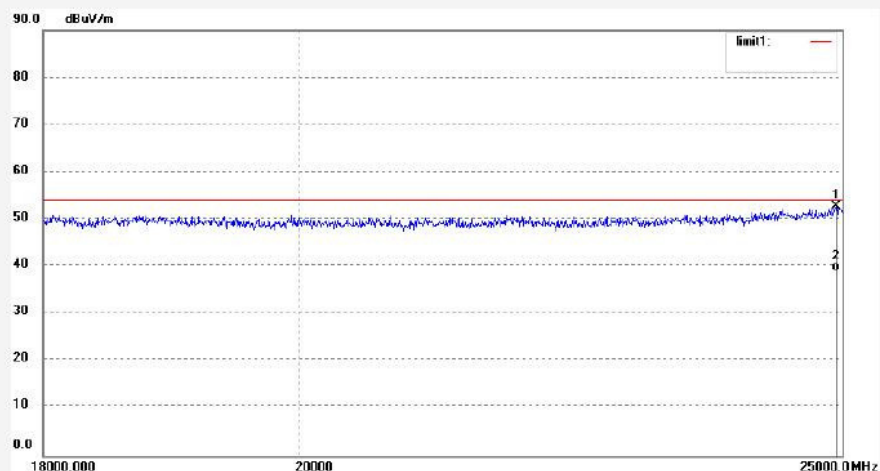

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24942.463	33.94	18.82	52.76	4.00	- 1.24	peak			
2	24942.463	20.24	18.82	39.06	54.00	-14.94	AVG			

Figure 27: Test figure of radiated spurious emission outside band of docking, high channel, 18GHz-25GHz, vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396


Job No.: PHY #1227	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2475 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Docking

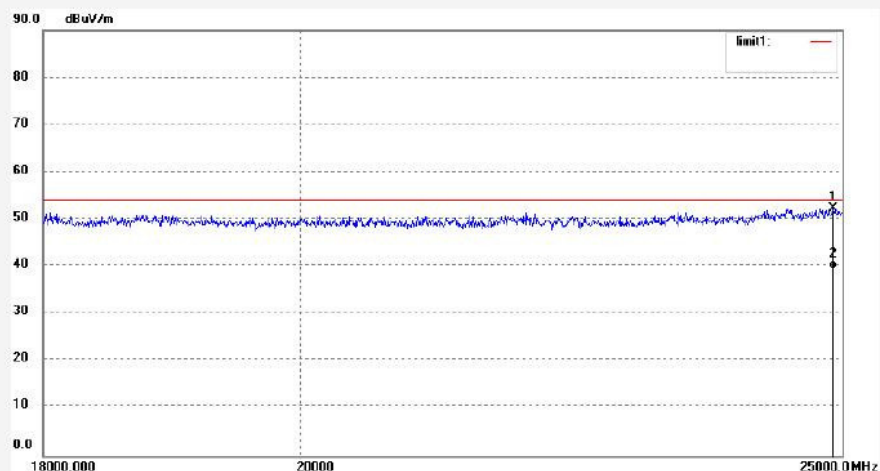


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24909.644	33.55	18.77	52.32	4.00	- 1.68	peak			
2	24909.644	20.64	18.77	39.41	54.00	-14.59	AVG			

Figure 28: Test figure of radiated spurious emission outside band of headphone, low channel, 9 KHz-30MHz, X Axis

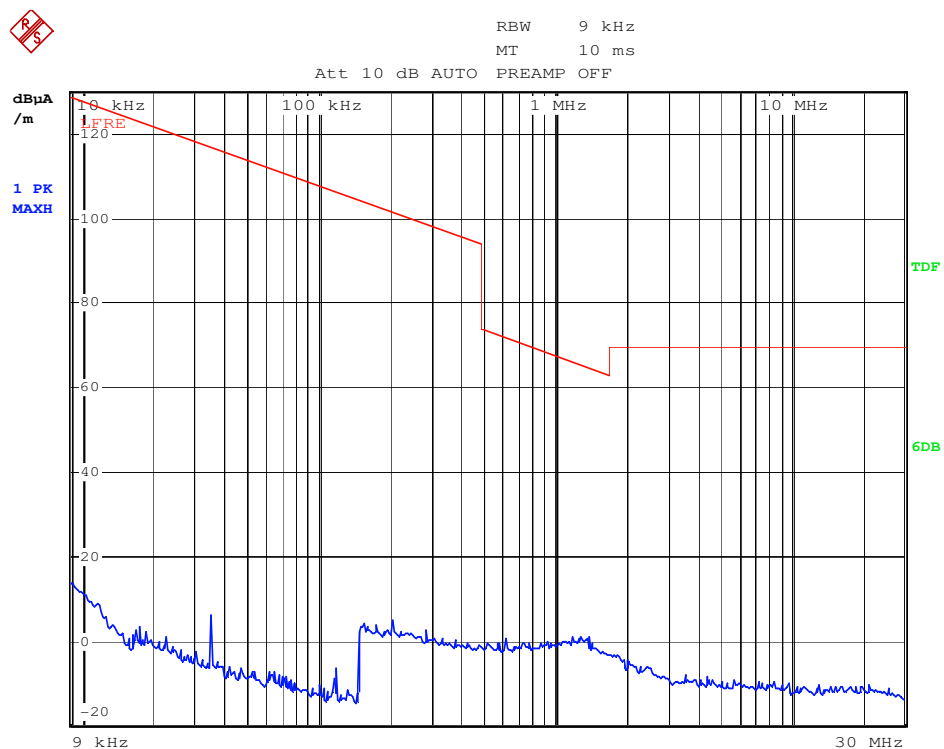


Date: 13.APR.2014 17:50:03

Figure 29: Test figure of radiated spurious emission outside band of headphone, low channel, 9 KHz-30MHz, Y Axis

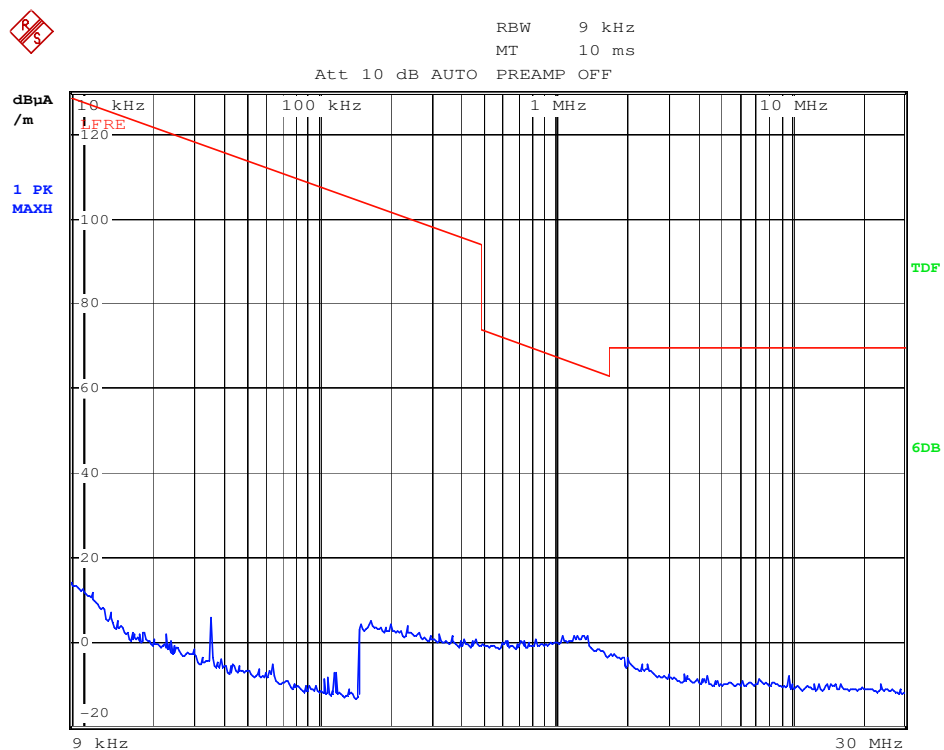


Date: 13.APR.2014 18:01:59

Figure 30: Test figure of radiated spurious emission outside band of headphone, low channel, 9 KHz-30MHz, Z Axis

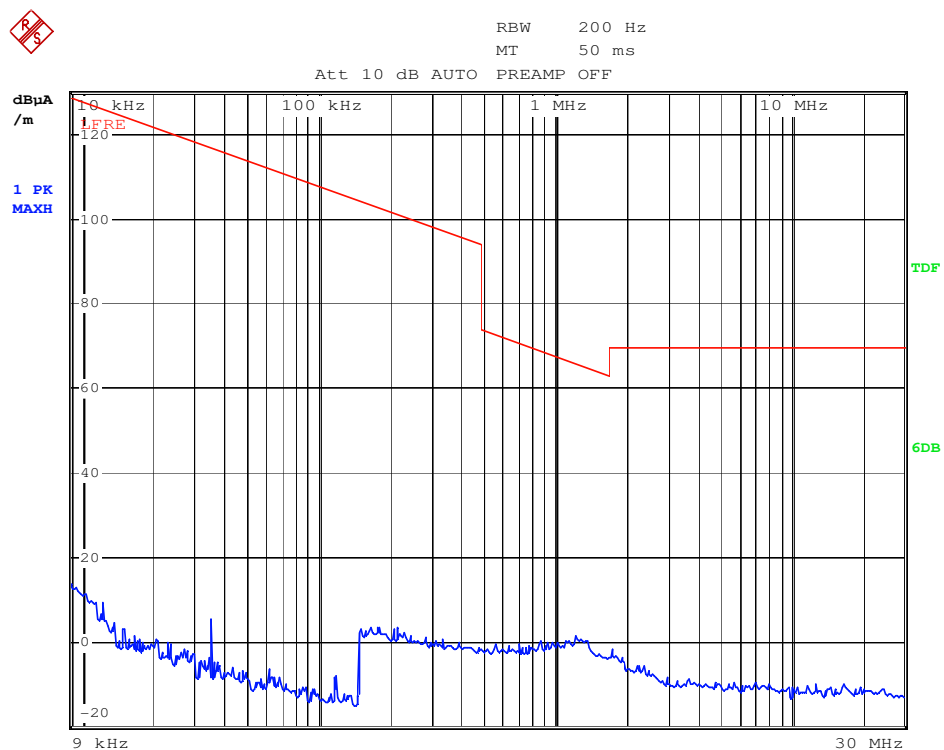


Date: 13.APR.2014 18:04:00

Figure 31: Test figure of radiated spurious emission outside band of headphone, middle channel, 9 KHz-30MHz, X Axis

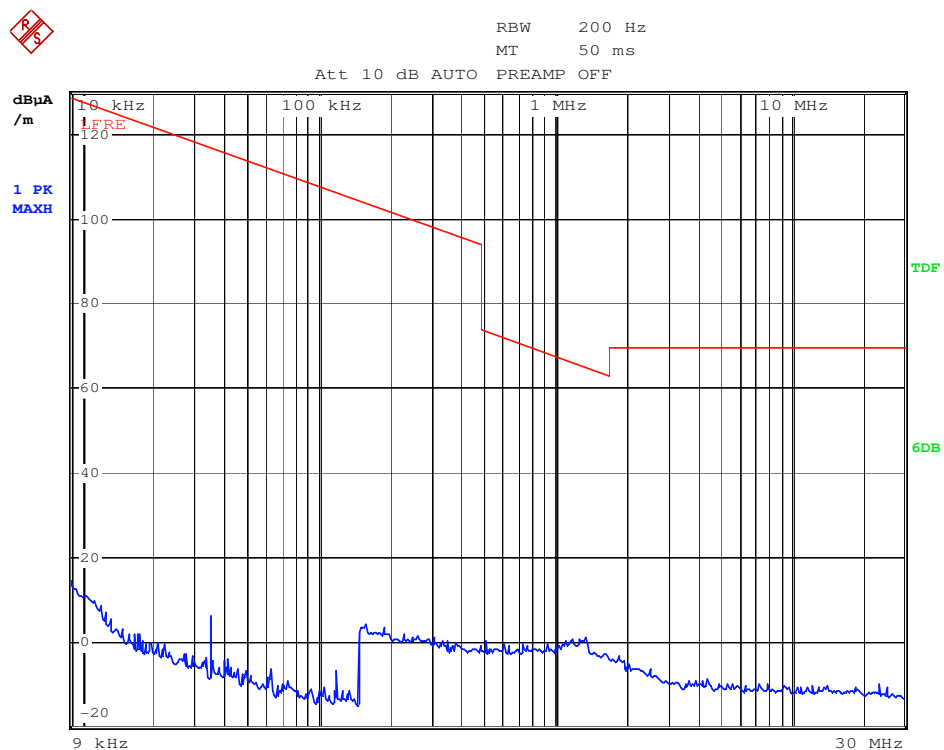


Date: 13.APR.2014 18:06:00

Figure 32: Test figure of radiated spurious emission outside band of headphone, low channel, 9 KHz-30MHz, Y Axis

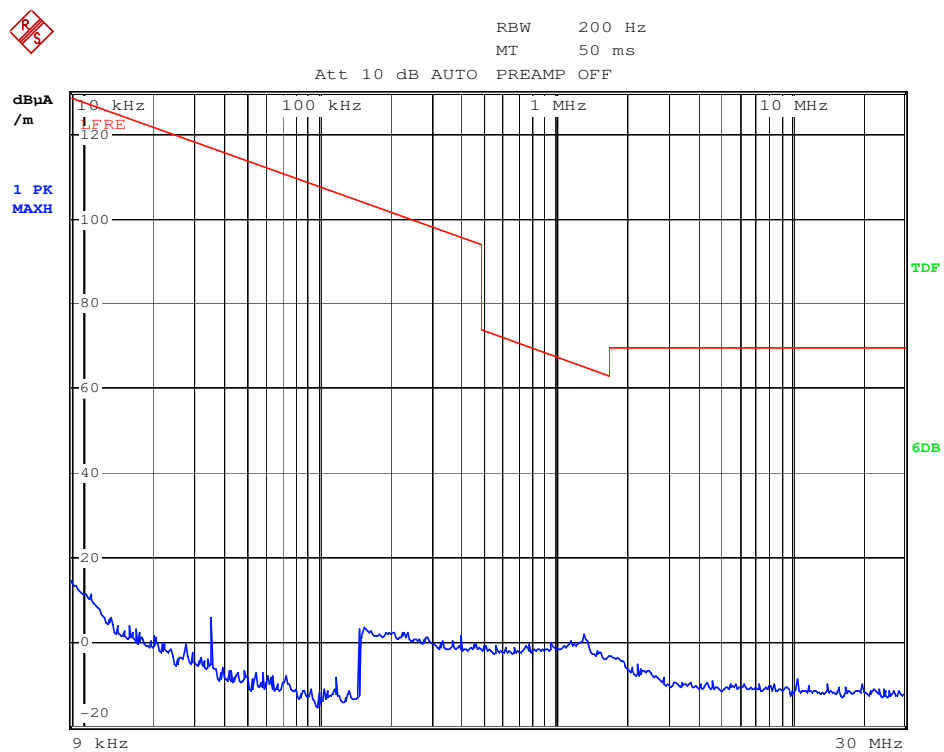


Date: 13.APR.2014 18:08:16

Figure 33: Test figure of radiated spurious emission outside band of headphone, low channel, 9 KHz-30MHz, Z Axis

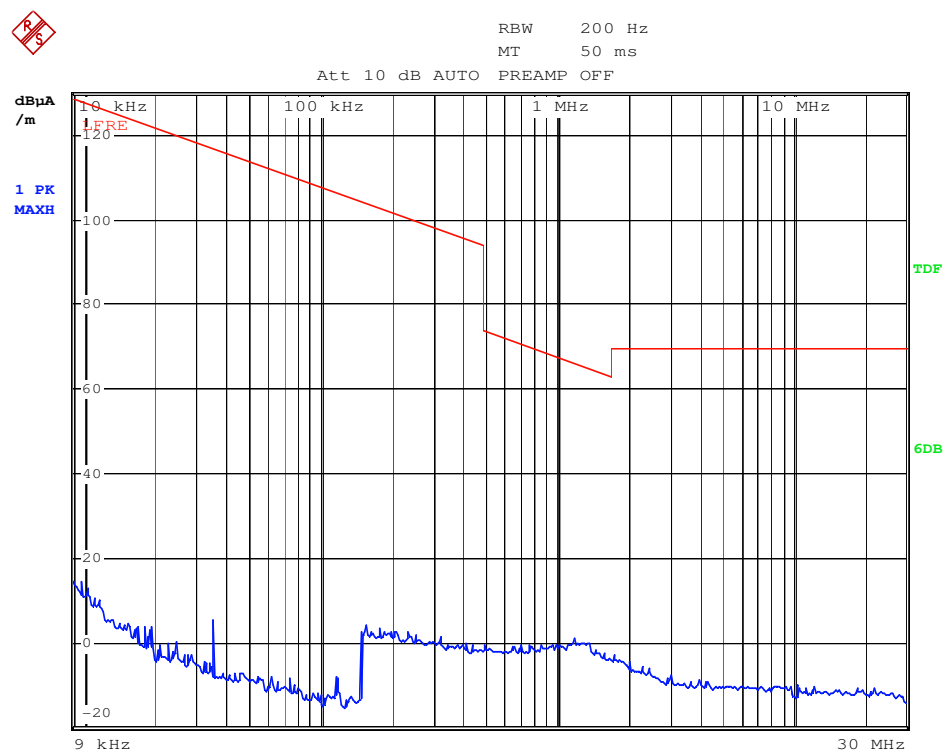


Date: 13.APR.2014 18:10:21

Figure 34: Test figure of radiated spurious emission outside band of headphone, high channel, 9 KHz-30MHz, X Axis

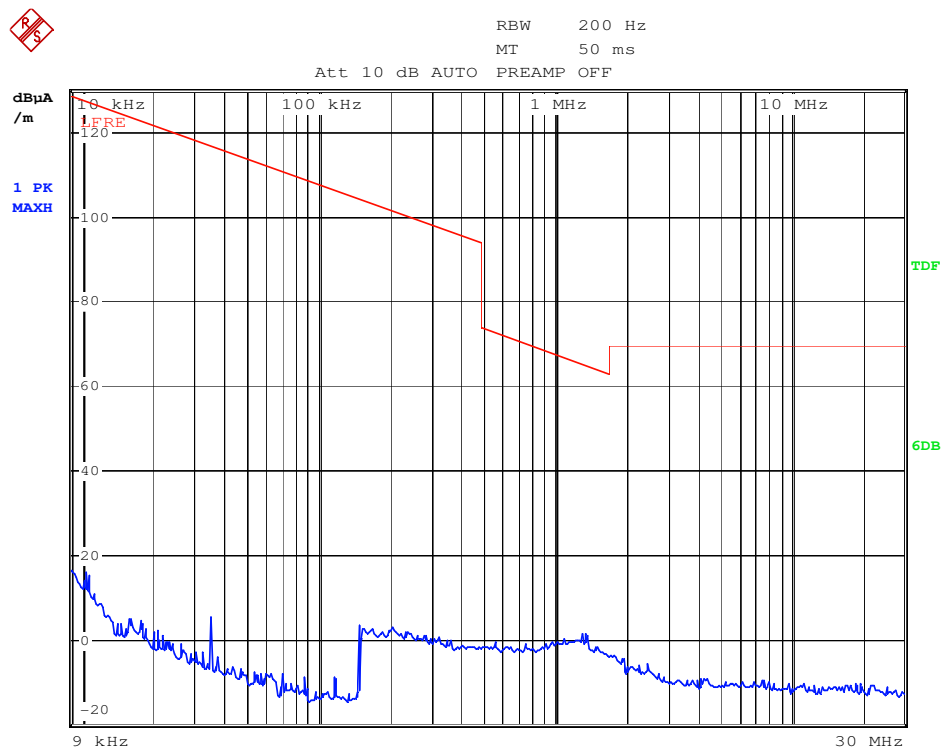


Date: 13.APR.2014 18:12:26

Figure 35: Test figure of radiated spurious emission outside band of headphone, high channel, 9 KHz-30MHz, Y Axis

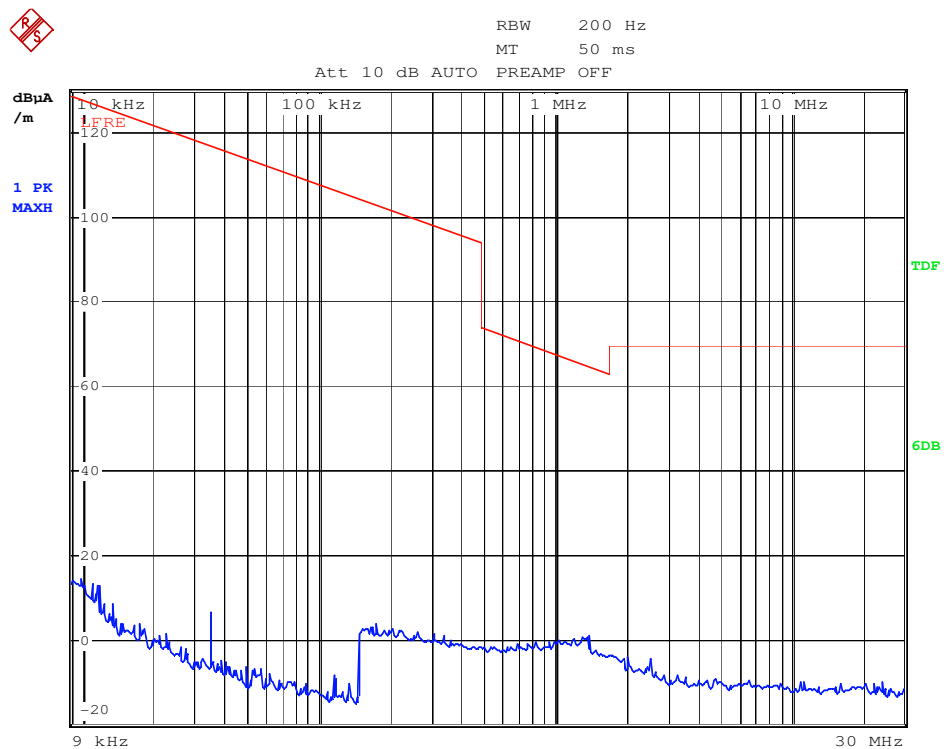

Date: 13.APR.2014 18:14:40

Figure 36: Test figure of radiated spurious emission outside band of headphone, high channel, 9 KHz-30MHz, Z Axis

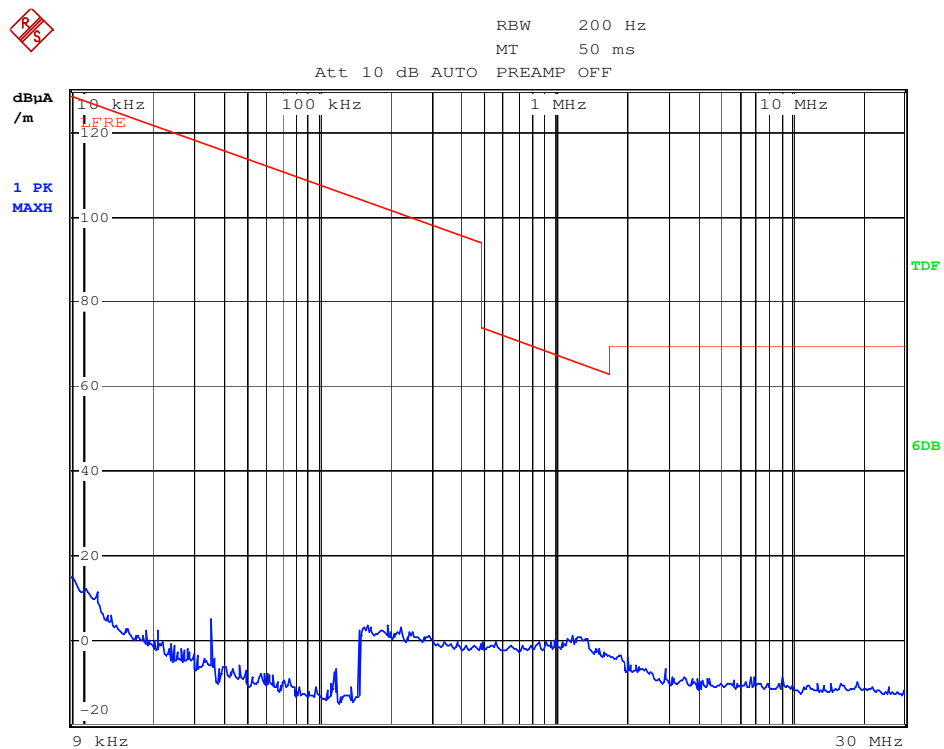

Date: 13.APR.2014 18:16:46

Figure 37: Test figure of radiated spurious emission outside band of headphone, low channel, 30MHz-1000MHz, horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1251	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2406 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Headphones

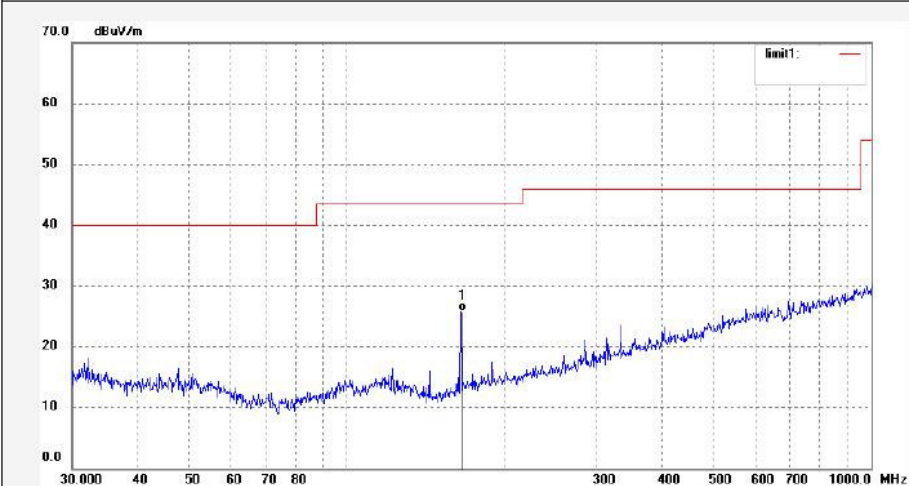

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	168.0064	39.88	-13.99	25.89	43.50	-17.61	QP			

Figure 38: Test figure of radiated spurious emission outside band of headphone, low channel, 30MHz-1000MHz, vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #1252	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 14/04/13/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: 2.4GHz Digital Wireless Stereo Hea	Engineer Signature: PEI
Mode: TX 2406 MHz	Distance: 3m
Model: NS-WHP314	
Manufacturer: Compupal (Group) Corporation	

Note: Headphones

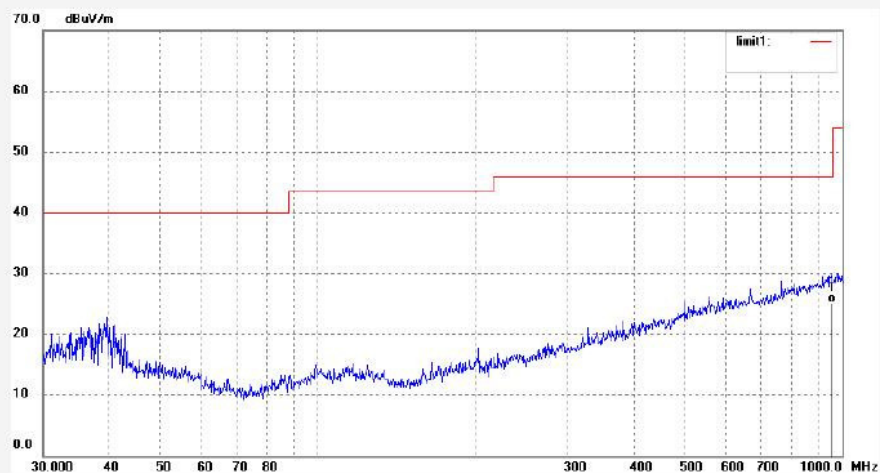

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	960.0000	22.68	2.37	25.05	46.00	-20.95	QP			