

**Figure 41: Test figure of radiated spurious emission outside band of headphone, high channel, 30MHz-1000MHz, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                          |
|--------------------------------------------|--------------------------|
| Job No.: PHY #1255                         | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V    |
| Test item: Radiation Test                  | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI  |
| Mode: TX 2475 MHz                          | Distance: 3m             |
| Model: NS-WHP314                           |                          |
| Manufacturer: Compupal (Group) Corporation |                          |

Note: Headphones

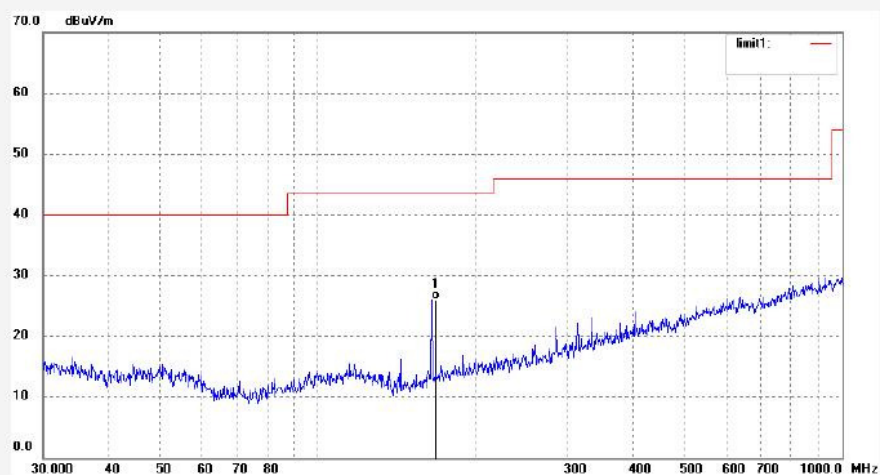

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 168.0033    | 39.91            | -13.99      | 25.92           | 43.50          | -17.58      | QP       |             |               |        |

**Figure 42: Test figure of radiated spurious emission outside band of headphone, high channel, 30MHz-1000MHz, vertical**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                         |
|--------------------------------------------|-------------------------|
| Job No.: PHY #1256                         | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V   |
| Test item: Radiation Test                  | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI |
| Mode: TX 2475 MHz                          | Distance: 3m            |
| Model: NS-WHP314                           |                         |
| Manufacturer: Compupal (Group) Corporation |                         |

Note: Headphones

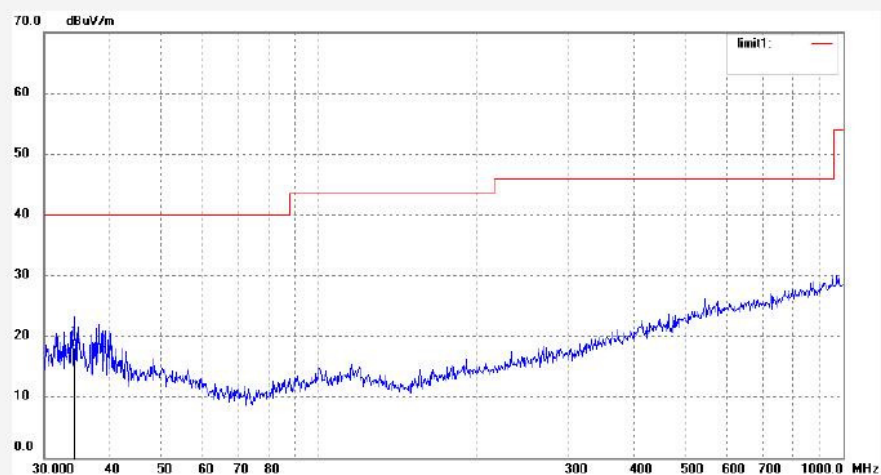

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 34.2852        | 28.46               | -10.35         | 18.11              | 40.00             | -21.89         | QP       |                |                  |        |

**Figure 43: Test figure of radiated spurious emission outside band of headphone, low channel, 1GHz-18GHz, vertical**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                         |
|--------------------------------------------|-------------------------|
| Job No.: PHY #1192                         | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V   |
| Test item: Radiation Test                  | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI |
| Mode: TX 2406 MHz                          | Distance: 3m            |
| Model: NS-WHP314                           |                         |
| Manufacturer: Compupal (Group) Corporation |                         |

Note: Headphones

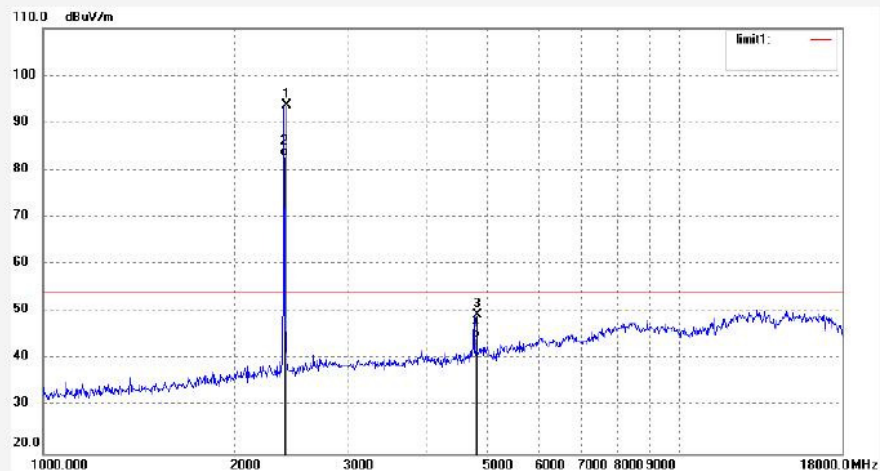

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2406.028       | 101.07              | -7.44          | 93.63              | 4.00              | .              | peak     |                |                  |        |
| 2   | 2406.028       | 90.44               | -7.44          | 83.00              | 4.00              | .00            | AVG      |                |                  |        |
| 3   | 4812.049       | 49.67               | -0.25          | 49.42              | 4.00              | - 4.58         | peak     |                |                  |        |
| 4   | 4812.049       | 44.58               | -0.25          | 44.33              | 54.00             | -9.67          | AVG      |                |                  |        |

**Figure 44: Test figure of radiated spurious emission outside band of headphone, low channel, 1GHz-18GHz, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                          |
|--------------------------------------------|--------------------------|
| Job No.: PHY #1193                         | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V    |
| Test item: Radiation Test                  | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI  |
| Mode: TX 2406 MHz                          | Distance: 3m             |
| Model: NS-WHP314                           |                          |
| Manufacturer: Compupal (Group) Corporation |                          |

Note: Headphones

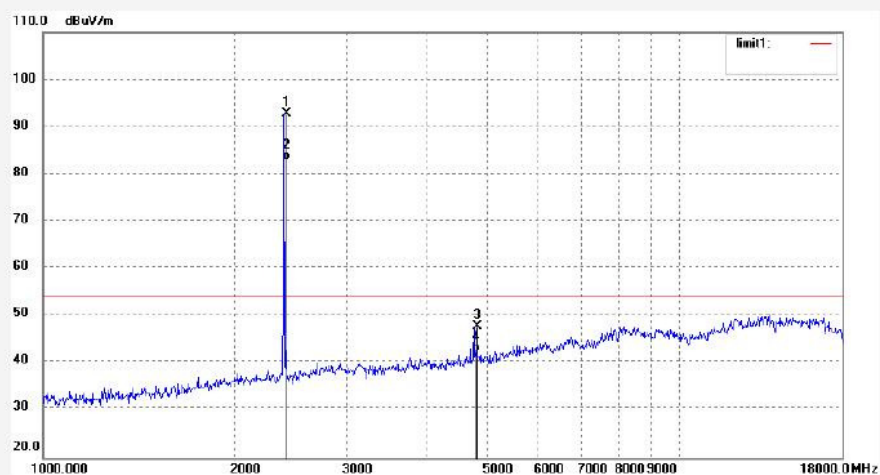

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2406.026    | 100.27           | -7.44       | 92.83           | 4.00           | .           | peak     |             |               |        |
| 2   | 2406.026    | 90.34            | -7.44       | 82.90           | 4.00           | . 0         | AVG      |             |               |        |
| 3   | 4812.053    | 48.01            | -0.25       | 47.76           | 4.00           | - 6.24      | peak     |             |               |        |
| 4   | 4812.053    | 42.62            | -0.25       | 42.37           | 54.00          | -11.63      | AVG      |             |               |        |

**Figure 45: Test figure of radiated spurious emission outside band of headphone, middle channel, 1GHz-18GHz, vertical**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                         |
|--------------------------------------------|-------------------------|
| Job No.: PHY #1196                         | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V   |
| Test item: Radiation Test                  | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI |
| Mode: TX 2439 MHz                          | Distance: 3m            |
| Model: NS-WHP314                           |                         |
| Manufacturer: Compupal (Group) Corporation |                         |

Note: Headphones

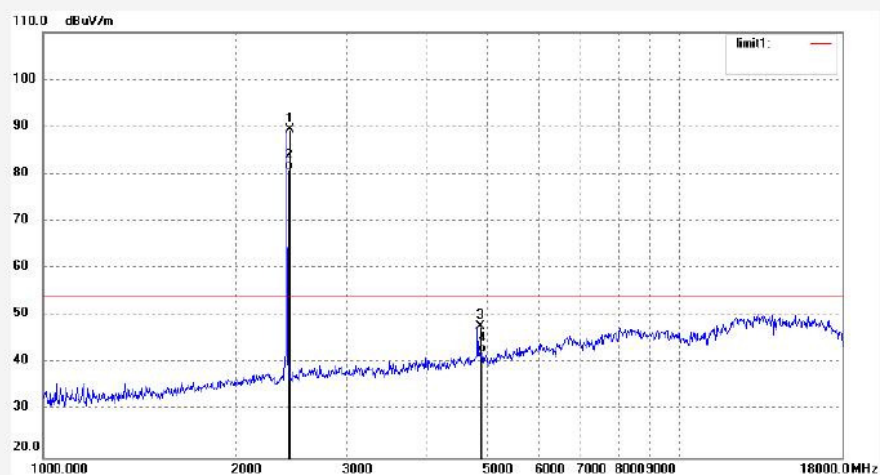

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2439.020    | 96.69            | -7.36       | 89.33           | .00            | .           | peak     |             |               |        |
| 2   | 2439.020    | 88.26            | -7.36       | 80.90           | 4.00           | . 0         | AVG      |             |               |        |
| 3   | 4878.038    | 47.61            | 0.11        | 47.72           | 4.00           | - 6.28      | peak     |             |               |        |
| 4   | 4878.038    | 42.15            | 0.11        | 42.26           | 54.00          | -11.74      | AVG      |             |               |        |

**Figure 46: Test figure of radiated spurious emission outside band of headphone, middle channel, 1GHz-18GHz, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

|                                            |                          |
|--------------------------------------------|--------------------------|
| Job No.: PHY #1197                         | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V    |
| Test item: Radiation Test                  | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI  |
| Mode: TX 2439 MHz                          | Distance: 3m             |
| Model: NS-WHP314                           |                          |
| Manufacturer: Compupal (Group) Corporation |                          |

Note: Headphones

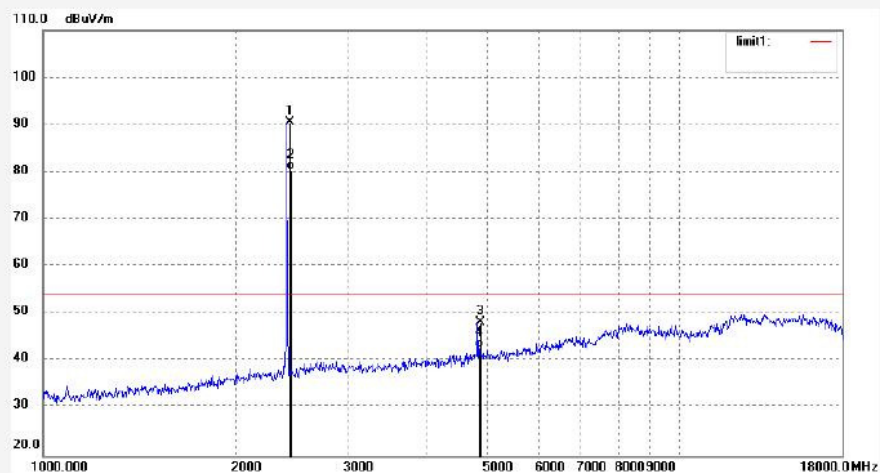

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2439.023       | 97.95               | -7.36          | 90.59              | 4.00              |                | peak     |                |                  |        |
| 2   | 2439.023       | 87.86               | -7.36          | 80.50              | 4.00              | .50            | AVG      |                |                  |        |
| 3   | 4878.048       | 48.22               | 0.11           | 48.33              | 4.00              | - 5.67         | peak     |                |                  |        |
| 4   | 4878.048       | 42.69               | 0.11           | 42.80              | 54.00             | -11.20         | AVG      |                |                  |        |

**Figure 47: Test figure of radiated spurious emission outside band of headphone, high channel, 1GHz-18GHz, horizontal**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                          |
|--------------------------------------------|--------------------------|
| Job No.: PHY #1199                         | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V    |
| Test item: Radiation Test                  | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI  |
| Mode: TX 2475 MHz                          | Distance: 3m             |
| Model: NS-WHP314                           |                          |
| Manufacturer: Compupal (Group) Corporation |                          |

Note: Headphones

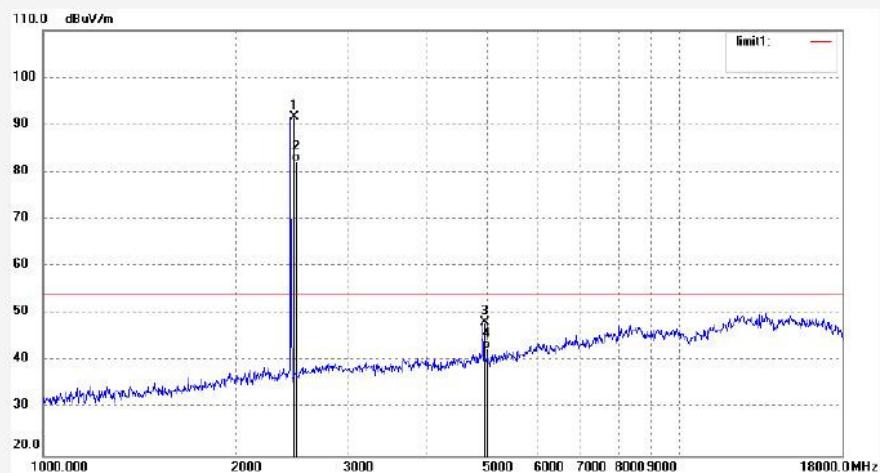

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2475.027    | 99.00            | -7.36       | 91.64           | 4.00           | . 6         | peak     |             |               |        |
| 2   | 2475.027    | 89.56            | -7.36       | 82.20           | 4.00           | . 0         | AVG      |             |               |        |
| 3   | 4950.051    | 47.68            | 0.47        | 48.15           | 4.00           | - 5.85      | peak     |             |               |        |
| 4   | 4950.051    | 42.17            | 0.47        | 42.64           | 54.00          | -11.36      | AVG      |             |               |        |

**Figure 48: Test figure of radiated spurious emission outside band of headphone, high channel, 1GHz-18GHz, vertical**



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

|                                            |                         |
|--------------------------------------------|-------------------------|
| Job No.: PHY #1200                         | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V   |
| Test item: Radiation Test                  | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI |
| Mode: TX 2475 MHz                          | Distance: 3m            |
| Model: NS-WHP314                           |                         |
| Manufacturer: Compupal (Group) Corporation |                         |

Note: Headphones

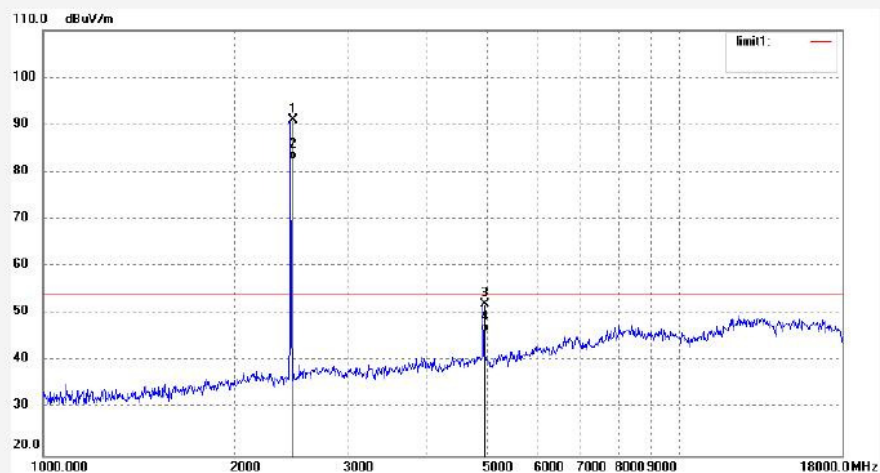

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2475.025       | 98.34               | -7.36          | 90.98              | 4.00              | 3.             | peak     |                |                  |        |
| 2   | 2475.025       | 89.96               | -7.36          | 82.60              | 4.00              | . 0            | AVG      |                |                  |        |
| 3   | 4950.050       | 51.67               | 0.47           | 52.14              | 4.00              | - 1.86         | peak     |                |                  |        |
| 4   | 4950.050       | 45.83               | 0.47           | 46.30              | 54.00             | -7.70          | AVG      |                |                  |        |

**Figure 49: Test figure of radiated spurious emission outside band of headphone, low channel, 18GHz-25GHz, vertical**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                         |
|--------------------------------------------|-------------------------|
| Job No.: PHY #1215                         | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V   |
| Test item: Radiation Test                  | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI |
| Mode: TX 2406 MHz                          | Distance: 3m            |
| Model: NS-WHP314                           |                         |
| Manufacturer: Compupal (Group) Corporation |                         |

Note: Headphones

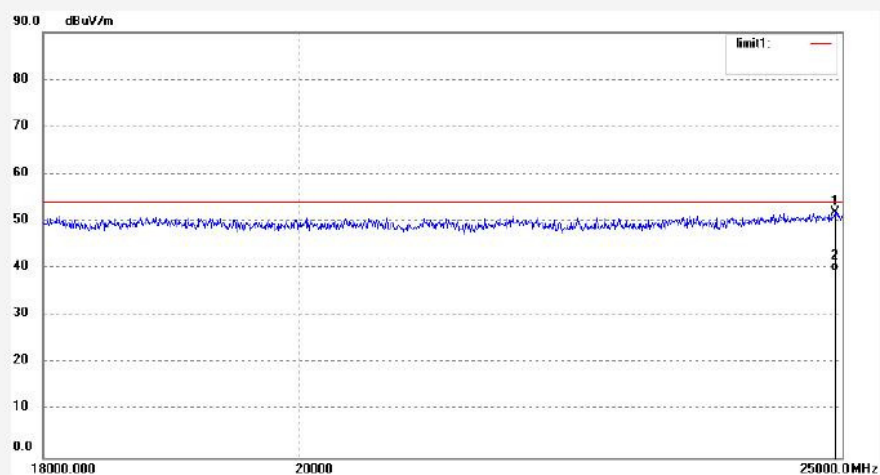

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 24926.048   | 33.06            | 18.80       | 51.86           | 4.00           | - 2.14      | peak     |             |               |        |
| 2   | 24926.048   | 20.60            | 18.80       | 39.40           | 54.00          | -14.60      | AVG      |             |               |        |

**Figure 50: Test figure of radiated spurious emission outside band of headphone, low channel, 18GHz-25GHz, horizontal**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                          |
|--------------------------------------------|--------------------------|
| Job No.: PHY #1216                         | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V    |
| Test item: Radiation Test                  | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI  |
| Mode: TX 2406 MHz                          | Distance: 3m             |
| Model: NS-WHP314                           |                          |
| Manufacturer: Compupal (Group) Corporation |                          |

Note: Headphones

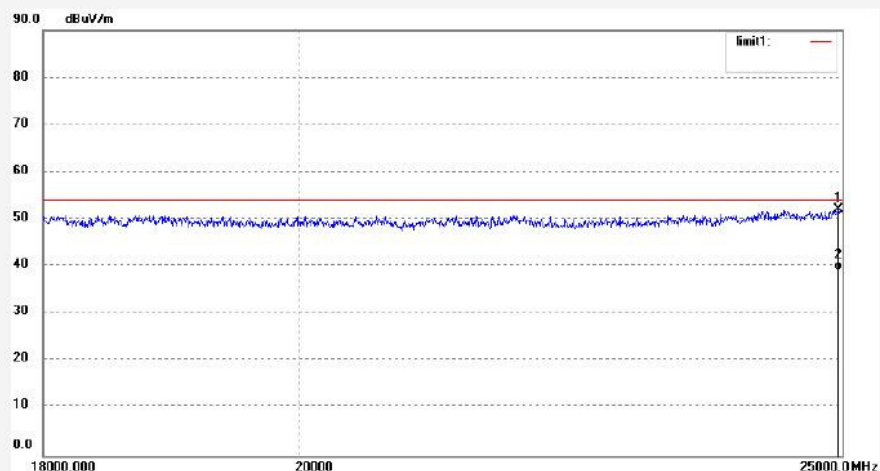

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 24967.105   | 33.18            | 18.85       | 52.03           | 4.00           | - 1.97      | peak     |             |               |        |
| 2   | 24967.105   | 20.39            | 18.85       | 39.24           | 54.00          | -14.76      | AVG      |             |               |        |

**Figure 51: Test figure of radiated spurious emission outside band of headphone, middle channel, 18GHz-25GHz, horizontal**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                          |
|--------------------------------------------|--------------------------|
| Job No.: PHY #1218                         | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V    |
| Test item: Radiation Test                  | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI  |
| Mode: TX 2439 MHz                          | Distance: 3m             |
| Model: NS-WHP314                           |                          |
| Manufacturer: Compupal (Group) Corporation |                          |

Note: Headphones

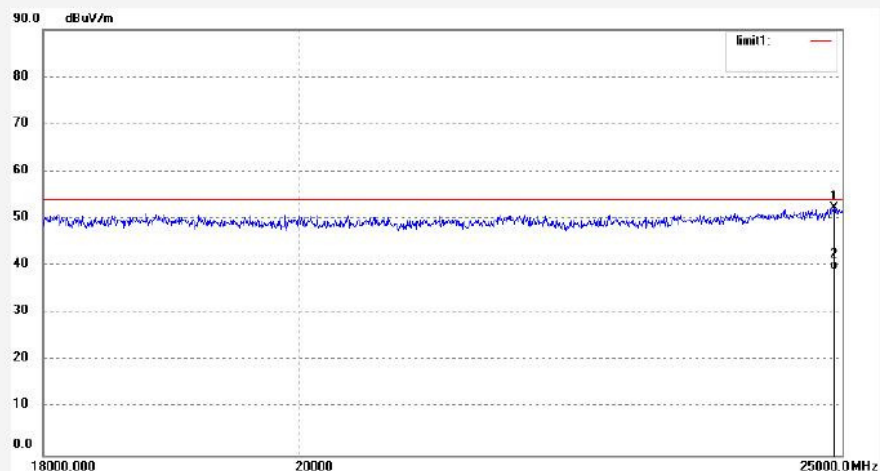

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 24917.845      | 33.55               | 18.78          | 52.33              | 54.00             | - 1.67         | peak     |                |                  |        |
| 2   | 24917.845      | 20.58               | 18.78          | 39.36              | 54.00             | -14.64         | AVG      |                |                  |        |

**Figure 52: Test figure of radiated spurious emission outside band of headphone, middle channel, 18GHz-25GHz, vertical**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                         |
|--------------------------------------------|-------------------------|
| Job No.: PHY #1219                         | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V   |
| Test item: Radiation Test                  | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI |
| Mode: TX 2439 MHz                          | Distance: 3m            |
| Model: NS-WHP314                           |                         |
| Manufacturer: Compupal (Group) Corporation |                         |

Note: Headphones

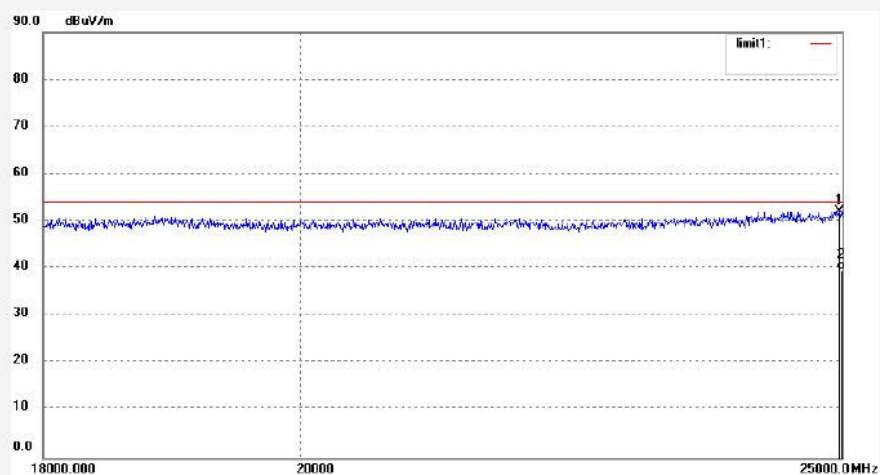

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 24975.325   | 33.25            | 18.87       | 52.12           | 4.00           | - 1.88      | peak     |             |               |        |
| 2   | 24975.325   | 20.85            | 18.87       | 39.72           | 54.00          | -14.28      | AVG      |             |               |        |

**Figure 53: Test figure of radiated spurious emission outside band of headphone, high channel, 18GHz-25GHz, vertical**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                         |
|--------------------------------------------|-------------------------|
| Job No.: PHY #1220                         | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V   |
| Test item: Radiation Test                  | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI |
| Mode: TX 2475 MHz                          | Distance: 3m            |
| Model: NS-WHP314                           |                         |
| Manufacturer: Compupal (Group) Corporation |                         |

Note: Headphones

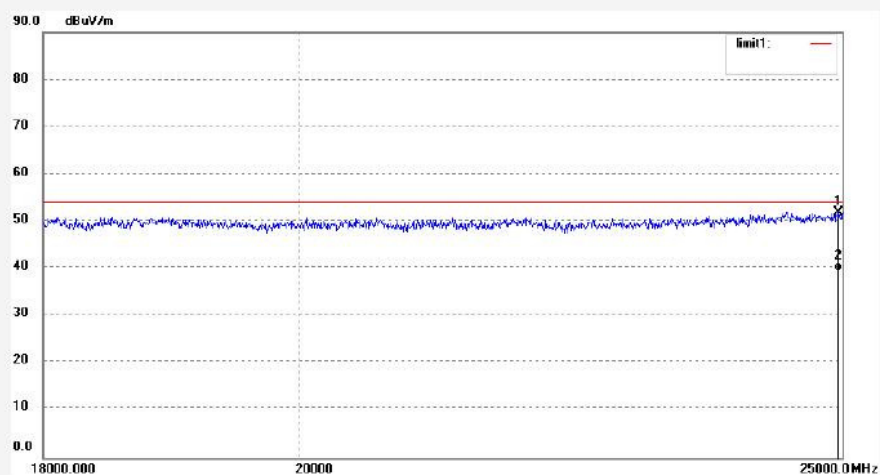

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 24967.105   | 32.91            | 18.85       | 51.76           | 4.00           | - 2.24      | peak     |             |               |        |
| 2   | 24967.105   | 20.63            | 18.85       | 39.48           | 54.00          | -14.52      | AVG      |             |               |        |

**Figure 54: Test figure of radiated spurious emission outside band of headphone, high channel, 18GHz-25GHz, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                            |                          |
|--------------------------------------------|--------------------------|
| Job No.: PHY #1221                         | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated          | Power Source: DC 3.7V    |
| Test item: Radiation Test                  | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI  |
| Mode: TX 2475 MHz                          | Distance: 3m             |
| Model: NS-WHP314                           |                          |
| Manufacturer: Compupal (Group) Corporation |                          |

Note: Headphones

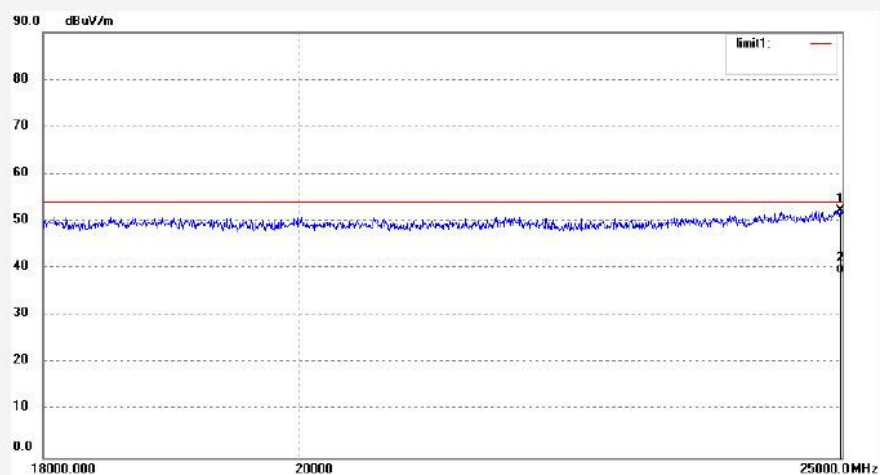

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 24983.547   | 33.39            | 18.88       | 52.27           | 4.00           | - 1.73      | peak     |             |               |        |
| 2   | 24983.547   | 20.27            | 18.88       | 39.15           | 54.00          | -14.85      | AVG      |             |               |        |

Figure 55: Test figure of conducted emission, wireless mode, line N

**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15 B**


EUT: 2.4GHz Digital Wireless Stereo Headphones M/N:NS-WHP314  
 Manufacturer: Compupal (Group) Corporation  
 Operating Condition: Transmitting  
 Test Site: 1#Shielding Room  
 Operator: PEI  
 Test Specification: N 120V/60Hz  
 Comment: Mains port  
 Start of Test: 4/13/2014 / 8:5 :39PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70  

| Start     | Stop     | Step    | Detector  | Meas. Time | IF Bandw. | Transducer    |
|-----------|----------|---------|-----------|------------|-----------|---------------|
| 150.0 kHz | 30.0 MHz | 4.5 kHz | QuasiPeak | 1.0 s      | 9 kHz     | NSLK8126 2008 |

 Average

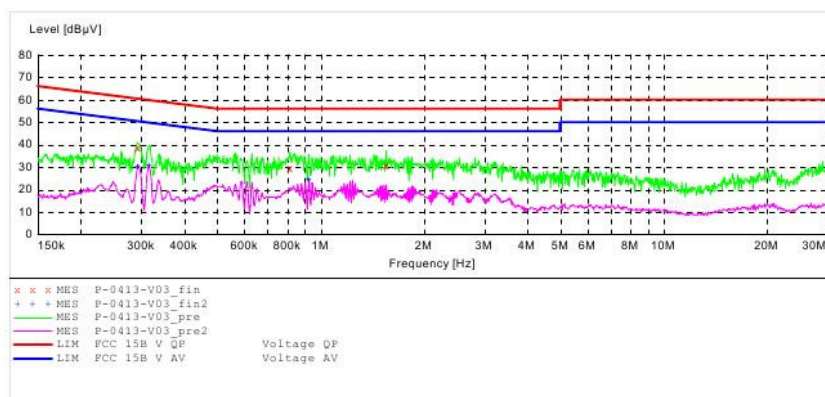

**MEASUREMENT RESULT: "P-0413-V03\_fin"**

| 4/13/2014     | PM         |           |            |           |          |      |     |  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|--|
| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |  |
| 0.293329      | 38.80      | 10.6      | 60         | 21.6      | QP       | N    | GND |  |
| 0.815052      | 29.60      | 10.8      | 56         | 26.4      | QP       | N    | GND |  |
| 1.556134      | 30.50      | 10.9      | 56         | 25.5      | QP       | N    | GND |  |

**MEASUREMENT RESULT: "P-0413-V03\_fin2"**

| 4/13/2014     | PM         |           |            |           |          |      |     |  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|--|
| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |  |
| 0.293329      | 29.80      | 10.6      | 50         | 20.6      | AV       | N    | GND |  |
| 0.316443      | 30.70      | 10.6      | 50         | 19.1      | AV       | N    | GND |  |
| 0.926114      | 24.40      | 10.8      | 46         | 21.6      | AV       | N    | GND |  |

Figure 56: Test figure of conducted emission, wireless mode, line L

**ACCURATE TECHNOLOGY CO., LTD**


**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: 2.4GHz Digital Wireless Stereo Headphones M/N:NS-WHP314  
 Manufacturer: Compupal (Group) Corporation  
 Operating Condition: Transmitting  
 Test Site: 1#Shielding Room  
 Operator: PEI  
 Test Specification: L 120V/60Hz  
 Comment: Mains port  
 Start of Test: 4/13/2014 / : :21PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70

| Start     | Stop     | Step    | Detector  | Meas. Time | IF Bandw. | Transducer    |
|-----------|----------|---------|-----------|------------|-----------|---------------|
| 150.0 kHz | 30.0 MHz | 4.5 kHz | QuasiPeak | 1.0 s      | 9 kHz     | NSLK8126 2008 |
| Average   |          |         |           |            |           |               |

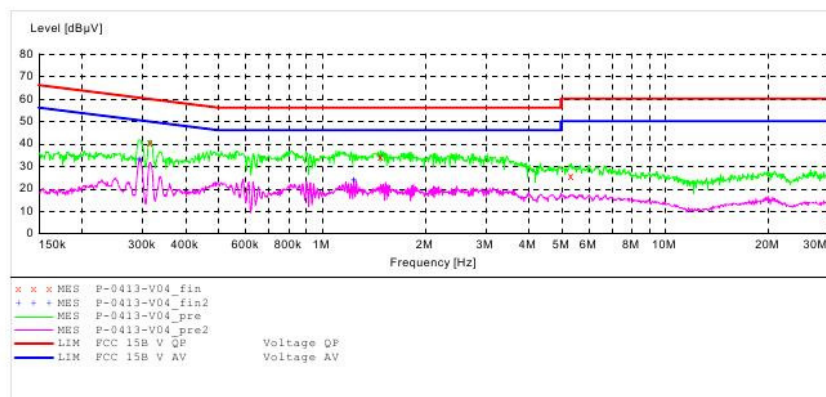

**MEASUREMENT RESULT: "P-0413-V04\_fin"**

4/13/2014 : 5PM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 0.316443      | 40.00      | 10.6      | 60         | 19.8      | QP       | L1   | GND |
| 1.489279      | 33.80      | 10.9      | 56         | 22.2      | QP       | L1   | GND |
| 5.342742      | 25.50      | 11.2      | 60         | 34.5      | QP       | L1   | GND |

**MEASUREMENT RESULT: "P-0413-V04\_fin2"**

4/13/2014 : 5PM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 0.295680      | 32.70      | 10.6      | 50         | 17.7      | AV       | L1   | GND |
| 1.244397      | 23.80      | 10.9      | 46         | 22.2      | AV       | L1   | GND |

Figure 57: Test figure of conducted emission, Audio input and output, line L

**ACCURATE TECHNOLOGY CO., LTD**


**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: 2.4GHz Digital Wireless Stereo Headphones M/N:NS-WHP314  
 Manufacturer: Compupal (Group) Corporation  
 Operating Condition: Audio input & output  
 Test Site: 1#Shielding Room  
 Operator: PEI  
 Test Specification: L 120V/60Hz  
 Comment: Mains port  
 Start of Test: 4/13/2014 / :1 :41PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70

| Start     | Stop     | Step    | Detector  | Meas. Time | IF Bandw. | Transducer    |
|-----------|----------|---------|-----------|------------|-----------|---------------|
| 150.0 kHz | 30.0 MHz | 4.5 kHz | QuasiPeak | 1.0 s      | 9 kHz     | NSLK8126 2008 |
| Average   |          |         |           |            |           |               |

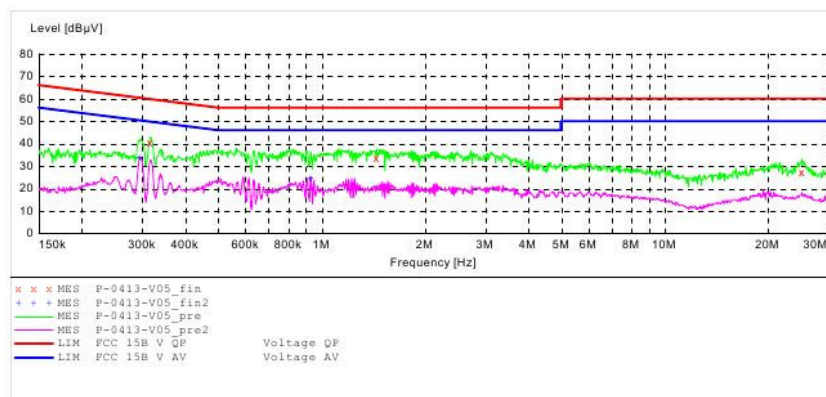

**MEASUREMENT RESULT: "P-0413-V05\_fin"**

4/13/2014 : 5PM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 0.316443      | 40.50      | 10.6      | 60         | 19.3      | QP       | L1   | GND |
| 1.448239      | 33.60      | 10.9      | 56         | 22.4      | QP       | L1   | GND |
| 25.144604     | 27.40      | 11.5      | 60         | 32.6      | QP       | L1   | GND |

**MEASUREMENT RESULT: "P-0413-V05\_fin2"**

4/13/2014 : 5PM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 0.295680      | 33.40      | 10.6      | 50         | 17.0      | AV       | L1   | GND |
| 0.929818      | 24.50      | 10.8      | 46         | 21.5      | AV       | L1   | GND |

Figure 58: Test figure of conducted emission, Audio input and output, line N

**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15 B**


EUT: 2.4GHz Digital Wireless Stereo Headphones M/N:NS-WHP314  
 Manufacturer: Compupal (Group) Corporation  
 Operating Condition: Audio input & output  
 Test Site: 1#Shielding Room  
 Operator: PEI  
 Test Specification: N 120V/60Hz  
 Comment: Mains port  
 Start of Test: 4/13/2014 / : :09PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70  

| Start Frequency | Stop Frequency | Step Width | Detector  | Meas. Time | IF Bandw. | Transducer    |
|-----------------|----------------|------------|-----------|------------|-----------|---------------|
| 150.0 kHz       | 30.0 MHz       | 4.5 kHz    | QuasiPeak | 1.0 s      | 9 kHz     | NSLK8126 2008 |

 Average

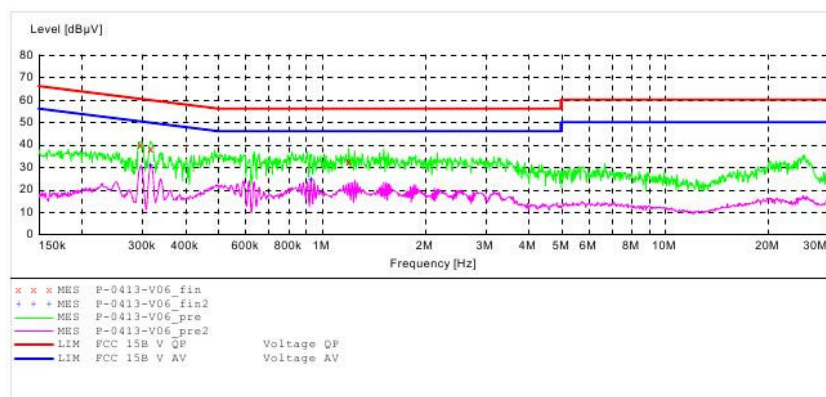

**MEASUREMENT RESULT: "P-0413-V06\_fin"**

| 4/13/2014        | PM            |              |               |              |          |      |     |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
| 0.296863         | 39.60         | 10.6         | 60            | 20.7         | QP       | N    | GND |
| 0.317709         | 37.90         | 10.6         | 60            | 21.9         | QP       | N    | GND |
| 1.200482         | 32.10         | 10.9         | 56            | 23.9         | QP       | N    | GND |

**MEASUREMENT RESULT: "P-0413-V06\_fin2"**

|           |       |        |       |        |          |      |     |  |
|-----------|-------|--------|-------|--------|----------|------|-----|--|
| 4/13/2014 |       | PM     |       |        |          |      |     |  |
| Frequency | Level | Transd | Limit | Margin | Detector | Line | PE  |  |
| MHz       | dBuV  | dB     | dBuV  | dB     |          |      |     |  |
| 0.317709  | 30.80 | 10.6   | 50    | 19.0   | AV       | N    | GND |  |
| 0.933537  | 24.40 | 10.8   | 46    | 21.6   | AV       | N    | GND |  |

Figure 59: Test figure of conducted emission, charging, line N


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: 2.4GHz Digital Wireless Stereo Headphones M/N:NS-WHP314  
 Manufacturer: Compupal (Group) Corporation  
 Operating Condition: Charging  
 Test Site: 1#Shielding Room  
 Operator: PEI  
 Test Specification: N 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 4/29/2014 / 8:32:14AM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

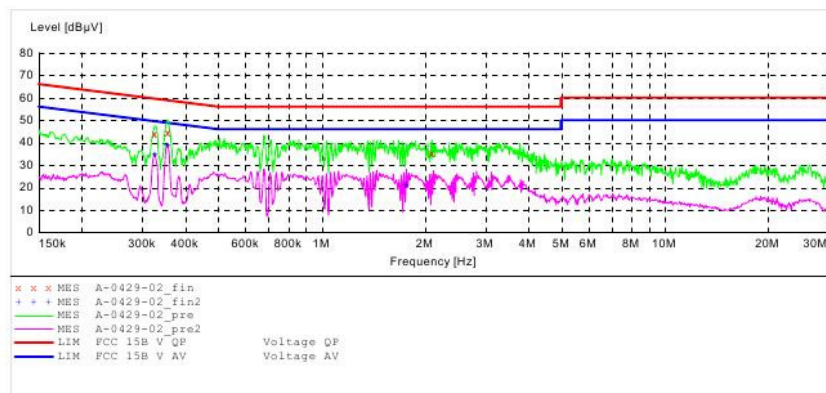

**MEASUREMENT RESULT: "A-0429-02\_fin"**

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.326712         | 43.70         | 10.6         | 60            | 15.8         | QP       | N    | GND |
| 0.356703         | 44.30         | 10.6         | 59            | 14.5         | QP       | N    | GND |
| 2.099304         | 34.90         | 11.0         | 56            | 21.1         | QP       | N    | GND |

**MEASUREMENT RESULT: "A-0429-02\_fin2"**

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.326712         | 34.80         | 10.6         | 50            | 14.7         | AV       | N    | GND |
| 0.356703         | 38.70         | 10.6         | 49            | 10.1         | AV       | N    | GND |
| 1.768177         | 21.00         | 11.0         | 46            | 25.0         | AV       | N    | GND |

Figure 60: Test figure of conducted emission, charging, line L

**ACCURATE TECHNOLOGY CO., LTD**


**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: 2.4GHz Digital Wireless Stereo Headphones M/N:NS-WHP314  
 Manufacturer: Compupal (Group) Corporation  
 Operating Condition: Charging  
 Test Site: 1#Shielding Room  
 Operator: PEI  
 Test Specification: L 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 4/29/2014 / 8:42:38AM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70

| Start     | Stop     | Step    | Detector  | Meas. Time | IF Bandw. | Transducer    |
|-----------|----------|---------|-----------|------------|-----------|---------------|
| 150.0 kHz | 30.0 MHz | 4.5 kHz | QuasiPeak | 1.0 s      | 9 kHz     | NSLK8126 2008 |
| Average   |          |         |           |            |           |               |

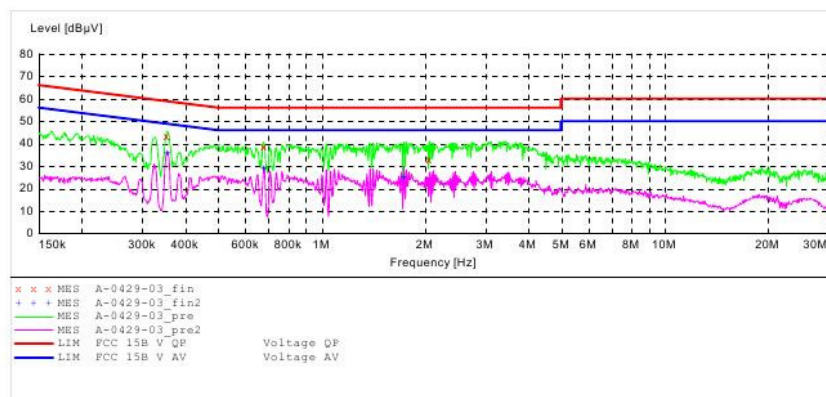

**MEASUREMENT RESULT: "A-0429-03\_fin"**

4/29/2014 8:53AM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 0.353867      | 43.20      | 10.6      | 59         | 15.7      | QP       | L1   | GND |
| 0.678320      | 38.70      | 10.8      | 56         | 17.3      | QP       | L1   | GND |
| 2.057818      | 32.60      | 11.0      | 56         | 23.4      | QP       | L1   | GND |

**MEASUREMENT RESULT: "A-0429-03\_fin2"**

4/29/2014 8:53AM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 0.356703      | 35.50      | 10.6      | 49         | 13.3      | AV       | L1   | GND |
| 0.681033      | 29.10      | 10.8      | 46         | 16.9      | AV       | L1   | GND |
| 1.740167      | 24.60      | 11.0      | 46         | 21.4      | AV       | L1   | GND |

Figure 61: Test figure of radiated emission, charging, 30Mz-1000MHz, vertical



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                                |                            |
|------------------------------------------------|----------------------------|
| Job No.: Ian #2815                             | Polarization: Vertical     |
| Standard: FCC Class B 3M Radiated              | Power Source: AC 120V/60Hz |
| Test item: Radiation Test                      | Date: 2014/04/28           |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time: 18:22:39             |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI    |
| Mode: Charging                                 | Distance: 3m               |
| Model: NS-WHP314                               |                            |
| Manufacturer: Compupal (Group) Corporation     |                            |

Note: Docking

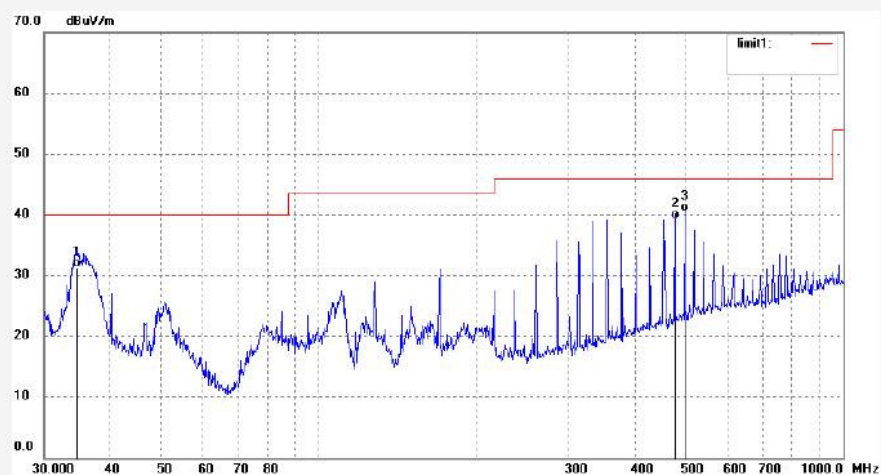

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 34.6485        | 41.65               | -10.39         | 31.26              | 40.00             | -8.74          | QP       |                |                  |        |
| 2   | 479.9910       | 44.58               | -5.35          | 39.23              | 46.00             | -6.77          | QP       |                |                  |        |
| 3   | 504.0075       | 45.24               | -4.71          | 40.53              | 46.00             | -5.47          | QP       |                |                  |        |

Figure 62: Test figure of radiated emission, charging, 30MHz-1000MHz, horizontal



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

|                                                |                            |
|------------------------------------------------|----------------------------|
| Job No.: Ian #2816                             | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated              | Power Source: AC 120V/60Hz |
| Test item: Radiation Test                      | Date: 2014/04/28           |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time: 18:34:18             |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI    |
| Mode: Charging                                 | Distance: 3m               |
| Model: NS-WHP314                               |                            |
| Manufacturer: Compupal (Group) Corporation     |                            |

Note: Docking

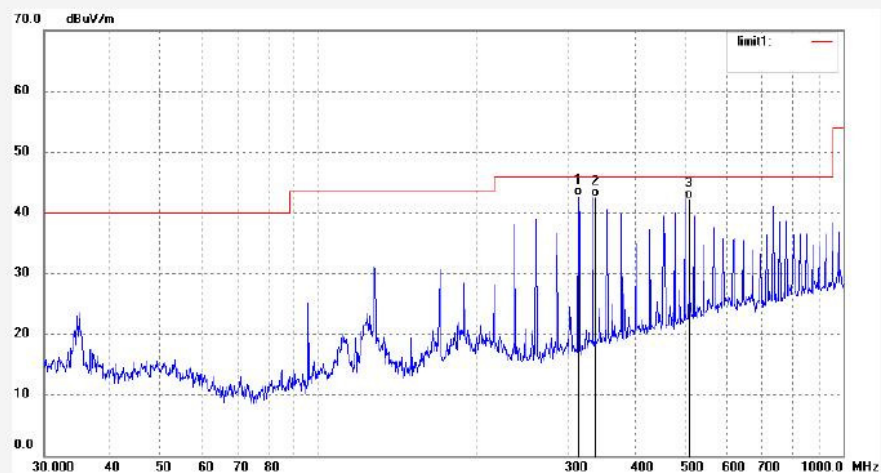

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 312.5482    | 51.75            | -8.94       | 42.81           | 46.00          | -3.19       | QP       |             |               |        |
| 2   | 335.9536    | 50.88            | -8.23       | 42.65           | 46.00          | -3.35       | QP       |             |               |        |
| 3   | 504.2303    | 47.00            | -4.70       | 42.30           | 46.00          | -3.70       | QP       |             |               |        |

**Figure 63: Test figure of radiated emission, Audio input & output, 30MHz-1000MHz, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

|                                            |                            |
|--------------------------------------------|----------------------------|
| Job No.: PHY #1275                         | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated          | Power Source: AC 120V/60Hz |
| Test item: Radiation Test                  | Date: 2014/04/13           |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                      |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI    |
| Mode: Audio input & output                 | Distance: 3m               |
| Model: NS-WHP314                           |                            |
| Manufacturer: Compupal (Group) Corporation |                            |
| Note: Docking                              |                            |

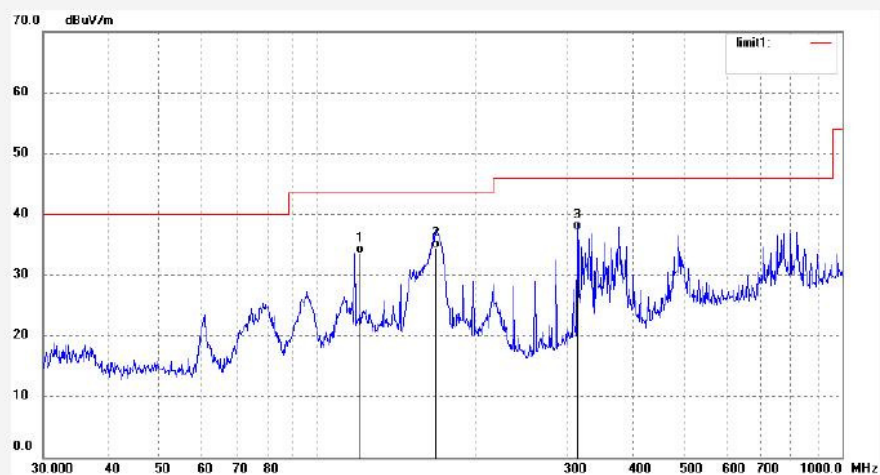

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 120.0155    | 46.58            | -13.14      | 33.44           | 43.50          | -10.06      | QP       |             |               |        |
| 2   | 168.0000    | 48.33            | -13.99      | 34.34           | 43.50          | -9.16       | QP       |             |               |        |
| 3   | 311.9909    | 46.30            | -8.97       | 37.33           | 46.00          | -8.67       | QP       |             |               |        |

**Figure 64: Test figure of radiated emission, Audio input & output, 30MHz-1000MHz, vertical**



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

|                                            |                            |
|--------------------------------------------|----------------------------|
| Job No.: PHY #1276                         | Polarization: Vertical     |
| Standard: FCC Class B 3M Radiated          | Power Source: AC 120V/60Hz |
| Test item: Radiation Test                  | Date: 2014/04/13           |
| Temp.( C)/Hum.(%) 23 C / 48 %              | Time:                      |
| EUT: 2.4GHz Digital Wireless Stereo Hea    | Engineer Signature: PEI    |
| Mode: Audio input & output                 | Distance: 3m               |
| Model: NS-WHP314                           |                            |
| Manufacturer: Compupal (Group) Corporation |                            |

Note: Docking

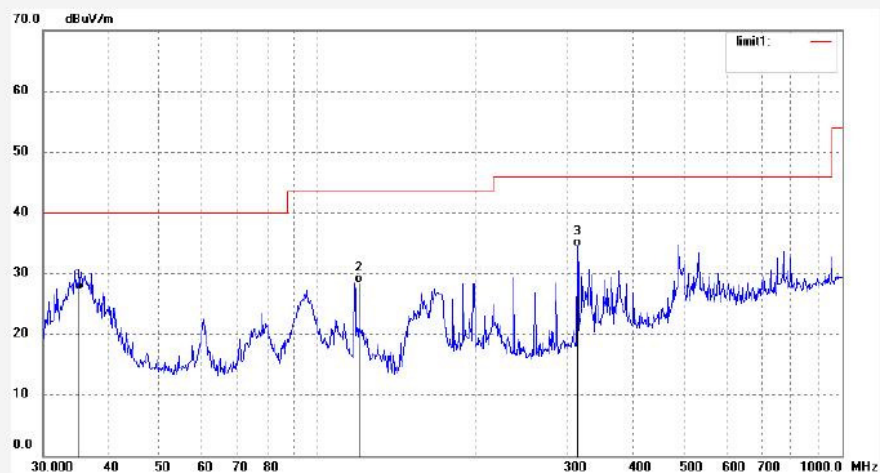

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 35.1389     | 37.74            | -10.45      | 27.29           | 40.00          | -12.71      | QP       |             |               |        |
| 2   | 120.1340    | 41.68            | -13.16      | 28.52           | 43.50          | -14.98      | QP       |             |               |        |
| 3   | 311.9958    | 43.31            | -8.97       | 34.34           | 46.00          | -11.66      | QP       |             |               |        |

**Figure 65: Test figure of radiated spurious emission of docking at band edge, low channel, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

|                                                |                          |
|------------------------------------------------|--------------------------|
| Job No.: PHY #1194                             | Polarization: Horizontal |
| Standard: FCC (Band Edge)                      | Power Source: DC 3.7V    |
| Test item: Radiation Test                      | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI  |
| Mode: TX 2406 MHz                              | Distance: 3m             |
| Model: NS-WHP314                               |                          |
| Manufacturer: Compupal (Group) Corporation     |                          |

Note: Headphones

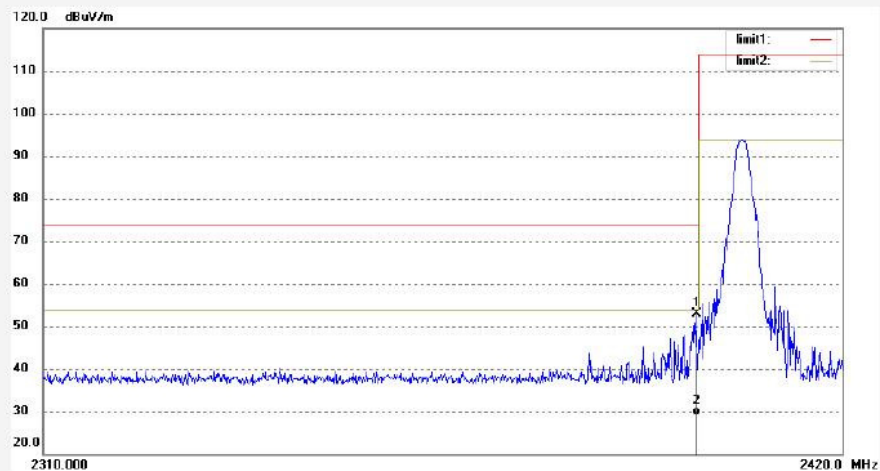

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2399.557    | 60.37            | -7.46       | 52.91           | 74.00          | -21.09      | peak     |             |               |        |
| 2   | 2399.557    | 36.38            | -7.46       | 28.92           | 54.00          | -25.08      | AVG      |             |               |        |

**Figure 66: Test figure of radiated spurious emission of docking at band edge, low channel, vertical**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                                |                         |
|------------------------------------------------|-------------------------|
| Job No.: PHY #1195                             | Polarization: Vertical  |
| Standard: FCC (Band Edge)                      | Power Source: DC 3.7V   |
| Test item: Radiation Test                      | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI |
| Mode: TX 2406 MHz                              | Distance: 3m            |
| Model: NS-WHP314                               |                         |
| Manufacturer: Compupal (Group) Corporation     |                         |

Note: Headphones

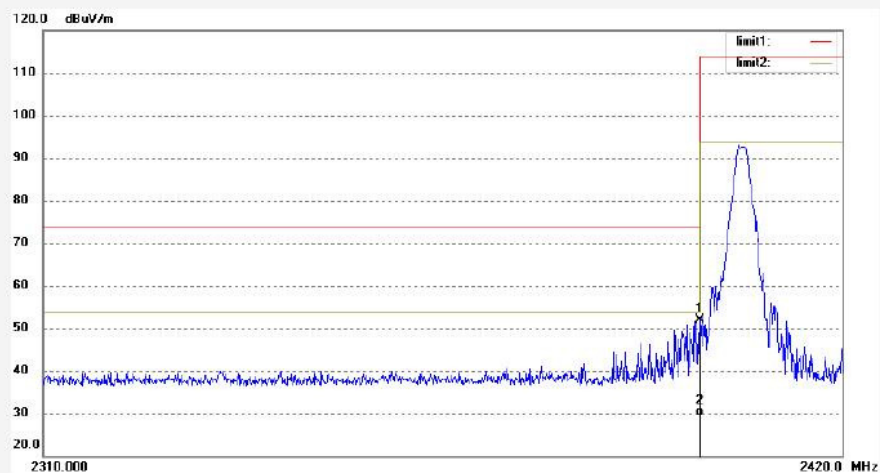

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2400.000    | 59.29            | -7.46       | 51.83           | 74.00          | -22.17      | peak     |             |               |        |
| 2   | 2400.000    | 36.86            | -7.46       | 29.40           | 54.00          | -24.60      | AVG      |             |               |        |

**Figure 67: Test figure of radiated spurious emission of docking at band edge, high channel, vertical**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                                |                         |
|------------------------------------------------|-------------------------|
| Job No.: PHY #1201                             | Polarization: Vertical  |
| Standard: FCC (Band Edge)                      | Power Source: DC 3.7V   |
| Test item: Radiation Test                      | Date: 14/04/13/         |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time:                   |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI |
| Mode: TX 2475 MHz                              | Distance: 3m            |
| Model: NS-WHP314                               |                         |
| Manufacturer: Compupal (Group) Corporation     |                         |

Note: Headphones

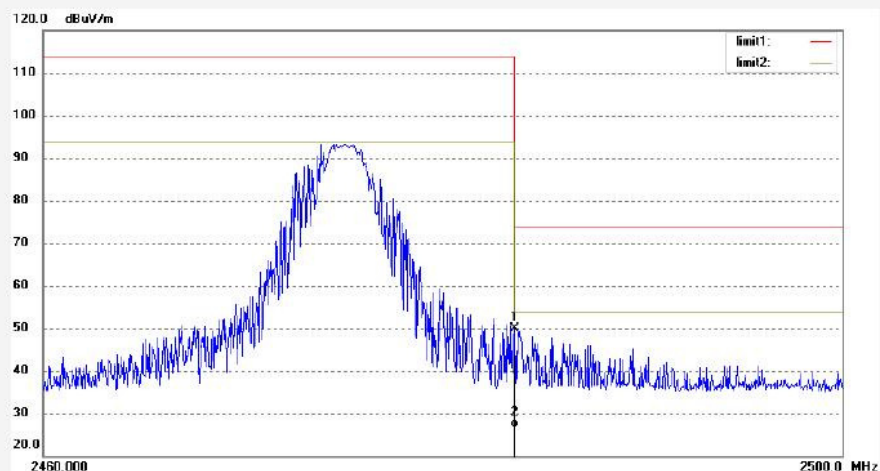

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2483.500    | 57.26            | -7.37       | 49.89           | 74.00          | -24.11      | peak     |             |               |        |
| 2   | 2483.500    | 33.97            | -7.37       | 26.60           | 54.00          | -27.40      | AVG      |             |               |        |

**Figure 68: Test figure of radiated spurious emission of docking at band edge, high channel, horizontal**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                                |                          |
|------------------------------------------------|--------------------------|
| Job No.: PHY #1202                             | Polarization: Horizontal |
| Standard: FCC (Band Edge)                      | Power Source: DC 3.7V    |
| Test item: Radiation Test                      | Date: 14/04/13/          |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time:                    |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI  |
| Mode: TX 2475 MHz                              | Distance: 3m             |
| Model: NS-WHP314                               |                          |
| Manufacturer: Compupal (Group) Corporation     |                          |

Note: Headphones

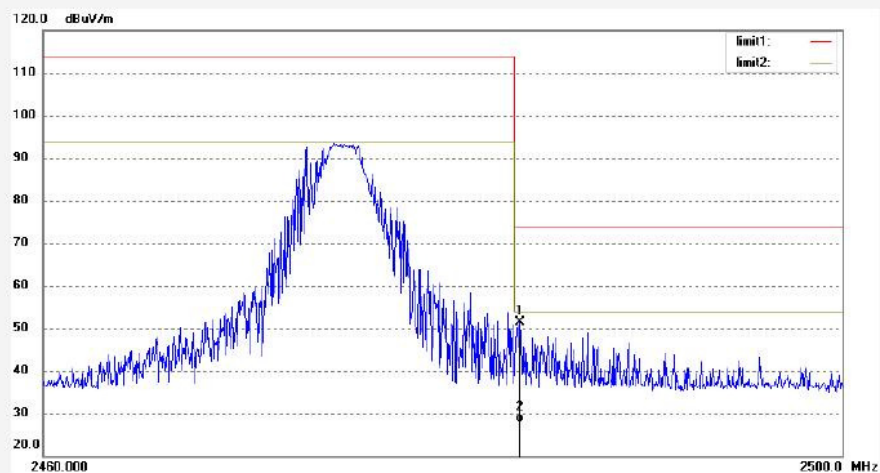

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2483.810    | 58.65            | -7.38       | 51.27           | 74.00          | -22.73      | peak     |             |               |        |
| 2   | 2483.810    | 35.38            | -7.38       | 28.00           | 54.00          | -26.00      | AVG      |             |               |        |

**Figure 69: Test figure of radiated spurious emission of headphone at band edge, low channel, vertical**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                                |                            |
|------------------------------------------------|----------------------------|
| Job No.: PHY #1237                             | Polarization: Vertical     |
| Standard: FCC (Band Edge)                      | Power Source: AC 120V/60Hz |
| Test item: Radiation Test                      | Date: 14/04/13/            |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time:                      |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI    |
| Mode: TX 2406 MHz                              | Distance: 3m               |
| Model: NS-WHP314                               |                            |
| Manufacturer: Compupal (Group) Corporation     |                            |

Note: Docking

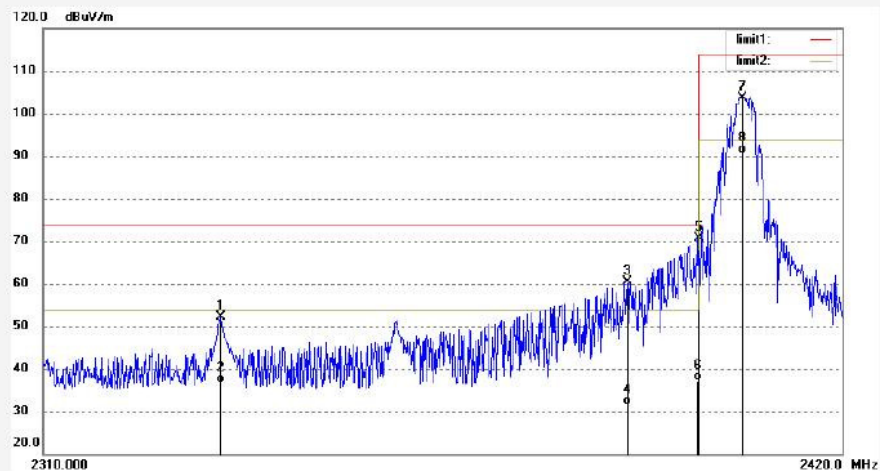

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2334.074    | 59.92            | -7.80       | 52.12           | 74.00          | -21.88      | peak     |             |               |        |
| 2   | 2334.074    | 44.50            | -7.80       | 36.70           | 54.00          | -17.30      | AVG      |             |               |        |
| 3   | 2390.000    | 67.87            | -7.53       | 60.34           | 74.00          | -13.66      | peak     |             |               |        |
| 4   | 2390.000    | 38.83            | -7.53       | 31.30           | 54.00          | -22.70      | AVG      |             |               |        |
| 5   | 2400.000    | 78.04            | -7.46       | 70.58           | 74.00          | -3.42       | peak     |             |               |        |
| 6   | 2400.000    | 44.56            | -7.46       | 37.10           | 54.00          | -16.90      | AVG      |             |               |        |
| 7   | 2406.035    | 111.15           | -7.44       | 103.71          | 114.00         | -10.29      | peak     |             |               |        |
| 8   | 2406.035    | 97.99            | -7.44       | 90.55           | 94.00          | -3.45       | AVG      |             |               |        |

**Figure 70: Test figure of radiated spurious emission of headphone at band edge, low channel, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

|                                                |                            |
|------------------------------------------------|----------------------------|
| Job No.: PHY #1238                             | Polarization: Horizontal   |
| Standard: FCC (Band Edge)                      | Power Source: AC 120V/60Hz |
| Test item: Radiation Test                      | Date: 14/04/13/            |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time:                      |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI    |
| Mode: TX 2406 MHz                              | Distance: 3m               |
| Model: NS-WHP314                               |                            |
| Manufacturer: Compupal (Group) Corporation     |                            |
| Note: Docking                                  |                            |

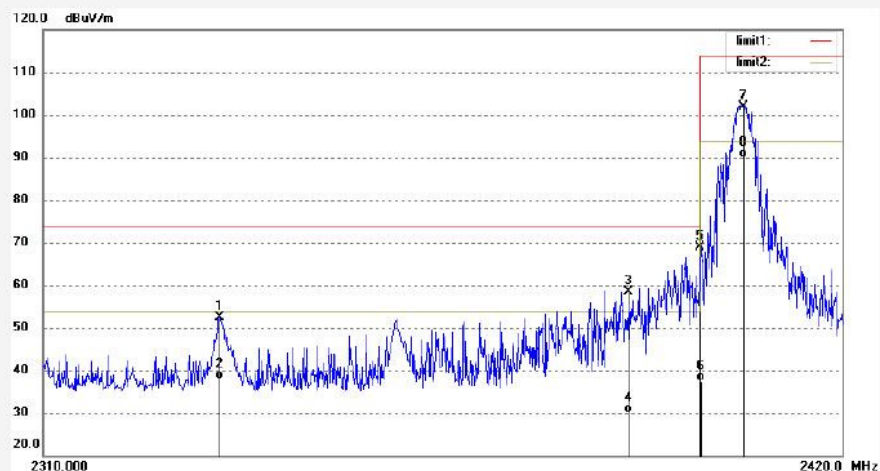

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2333.811    | 60.30            | -7.80       | 52.50           | 74.00          | -21.50      | peak     |             |               |        |
| 2   | 2333.992    | 45.80            | -7.80       | 38.00           | 54.00          | -16.00      | AVG      |             |               |        |
| 3   | 2390.000    | 65.80            | -7.53       | 58.27           | 74.00          | -15.73      | peak     |             |               |        |
| 4   | 2390.000    | 37.33            | -7.53       | 29.80           | 54.00          | -24.20      | AVG      |             |               |        |
| 5   | 2400.000    | 76.25            | -7.46       | 68.79           | 74.00          | -5.21       | peak     |             |               |        |
| 6   | 2400.000    | 44.96            | -7.46       | 37.50           | 54.00          | -16.50      | AVG      |             |               |        |
| 7   | 2406.070    | 109.34           | -7.44       | 101.90          | 114.00         | -12.10      | peak     |             |               |        |
| 8   | 2406.070    | 97.24            | -7.44       | 89.80           | 94.00          | -4.20       | AVG      |             |               |        |

**Figure 71: Test figure of radiated spurious emission of headphone at band edge, high channel, horizontal**



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #1243  
Standard: FCC (Band Edge)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: 2.4GHz Digital Wireless Stereo Headphones  
Mode: TX 2475 MHz  
Model: NS-WHP314  
Manufacturer: Compupal (Group) Corporation

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 14/04/13/  
Time:  
Engineer Signature: PEI  
Distance: 3m

Note: Docking

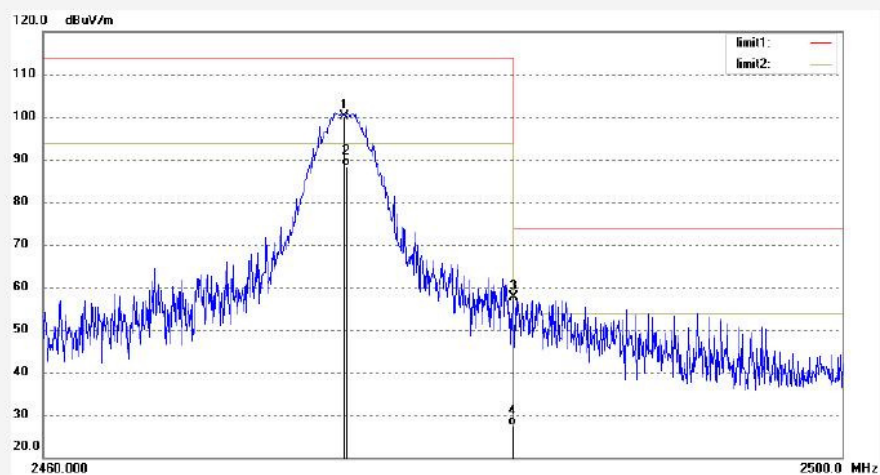

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2475.034    | 107.61           | -7.36       | 100.25          | 114.00         | -13.75      | peak     |             |               |        |
| 2   | 2475.034    | 95.83            | -7.36       | 88.47           | 94.00          | -5.53       | AVG      |             |               |        |
| 3   | 2483.500    | 65.07            | -7.37       | 57.70           | 74.00          | -16.30      | peak     |             |               |        |
| 4   | 2483.500    | 34.72            | -7.37       | 27.35           | 54.00          | -26.65      | AVG      |             |               |        |

**Figure 72: Test figure of radiated spurious emission of headphone at band edge, high channel, vertical**




**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                                |                            |
|------------------------------------------------|----------------------------|
| Job No.: PHY #1244                             | Polarization: Vertical     |
| Standard: FCC (Band Edge)                      | Power Source: AC 120V/60Hz |
| Test item: Radiation Test                      | Date: 14/04/13/            |
| Temp.( C)/Hum.(%) 23 C / 48 %                  | Time:                      |
| EUT: 2.4GHz Digital Wireless Stereo Headphones | Engineer Signature: PEI    |
| Mode: TX 2475 MHz                              | Distance: 3m               |
| Model: NS-WHP314                               |                            |
| Manufacturer: Compupal (Group) Corporation     |                            |

Note: Docking

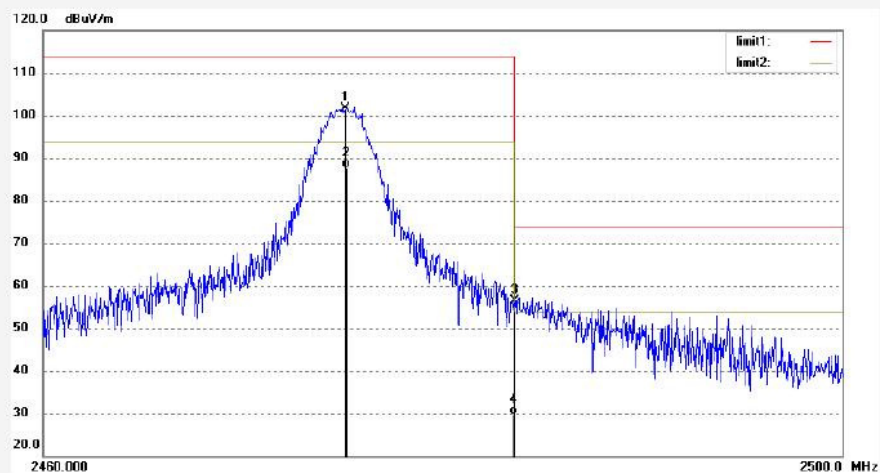

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2475.017    | 108.97           | -7.36       | 101.61          | 114.00         | -12.39      | peak     |             |               |        |
| 2   | 2475.017    | 94.95            | -7.36       | 87.59           | 94.00          | -6.41       | AVG      |             |               |        |
| 3   | 2483.500    | 63.66            | -7.37       | 56.29           | 74.00          | -17.71      | peak     |             |               |        |
| 4   | 2483.500    | 37.07            | -7.37       | 29.70           | 54.00          | -24.30      | AVG      |             |               |        |