

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Braven LC.

Braven 2200m Portable Bluetooth Speaker
Model No.: 2200m

FCC ID: Z7RB22

Prepared for : Braven LC.
Address : 6001 Oak Canyon, Irvine, CA, USA 92618

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan
Rd. Science & Industry Park, Nan Shan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290

Fax: (0755) 26503396

Report No. : ATE20151558
Date of Test : July 17-July 29, 2015
Date of Report : July 30, 2015

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Power Line Conducted Emission Measurement Results	12
6. 6DB BANDWIDTH MEASUREMENT	19
6.1. Block Diagram of Test Setup.....	19
6.2. The Requirement For Section 15.247(a)(2).....	19
6.3. EUT Configuration on Measurement	19
6.4. Operating Condition of EUT	19
6.5. Test Procedure	19
6.6. Test Result	20
7. MAXIMUM PEAK OUTPUT POWER	22
7.1. Block Diagram of Test Setup.....	22
7.2. The Requirement For Section 15.247(b)(3).....	22
7.3. EUT Configuration on Measurement	22
7.4. Operating Condition of EUT	22
7.5. Test Procedure	22
7.6. Test Result	23
8. POWER SPECTRAL DENSITY MEASUREMENT.....	25
8.1. Block Diagram of Test Setup.....	25
8.2. The Requirement For Section 15.247(e).....	25
8.3. EUT Configuration on Measurement	25
8.4. Operating Condition of EUT	25
8.5. Test Procedure	26
8.6. Test Result	27
9. BAND EDGE COMPLIANCE TEST	29
9.1. Block Diagram of Test Setup.....	29
9.2. The Requirement For Section 15.247(d)	29
9.3. EUT Configuration on Measurement	29
9.4. Operating Condition of EUT	30

9.5.	Test Procedure	30
9.6.	Test Result	30
10.	RADIATED SPURIOUS EMISSION TEST	37
10.1.	Block Diagram of Test Setup.....	37
10.2.	The Limit For Section 15.247(d)	38
10.3.	Restricted bands of operation	38
10.4.	Configuration of EUT on Measurement	39
10.5.	Operating Condition of EUT	39
10.6.	Test Procedure	39
10.7.	The Field Strength of Radiation Emission Measurement Results	40
11.	CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	53
11.1.	Block Diagram of Test Setup.....	53
11.2.	The Requirement For Section 15.247(d)	53
11.3.	EUT Configuration on Measurement	53
11.4.	Operating Condition of EUT	53
11.5.	Test Procedure	54
11.6.	Test Result	54
12.	ANTENNA REQUIREMENT.....	56
12.1.	The Requirement	56
12.2.	Antenna Construction	56

Test Report Certification

Applicant : Braven LC
Manufacturer : Braven LC
Factory : Zhao Yang Electronic(Shenzhen) Co., Ltd
EUT Description : Braven 2200m Portable Bluetooth Speaker
(A) MODEL NO.: 2200m
(B) TRADE NAME.: Braven
(C) POWER SUPPLY: AC 120V/60Hz

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of Jun 05, 2014 KDB558074 D01 DTS Meas Guidance v03r02 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : July 17, 2015-July 29, 2015
Date of Report: July 30, 2015

Prepared by : Tim Zhang
(Tim.zhang, Engineer)

Approved & Authorized Signer : Sean Liu
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Braven 2200m Portable Bluetooth Speaker
Model Number	:	2200m
Bluetooth version	:	BT V4.0 LE BT 2.1+EDR
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40 for BT V4.0 LE 79 for BT 2.1+EDR
Antenna Gain	:	0dBi
Antenna type	:	PCB Antenna
Trade Name	:	Braven
Power Supply	:	AC 120V/60Hz
Adapter	:	Model: DYS650-165270W-K Input: AC100-240V; 50/60Hz 1.3A MAX Output: DC 16.5V; 2.7A
Modulation mode	:	GFSK for BT V4.0 LE GFSK, $\pi/4$ DQPSK, 8DPSK for BT 2.1+EDR
Applicant	:	Braven LC
Address	:	6001 Oak Canyon, Irvine, CA, USA 92618.
Manufacturer	:	Braven LC
Address	:	6001 Oak Canyon, Irvine, CA, USA 92618.
Factory	:	Zhao Yang Electronic(Shenzhen) Co., Ltd.
Address	:	Section A, 4th Floor, Building 1 & Building 2, De Yong Jia Industrial Park, Guang Qiao Road, Yu Lv Community, Gong Ming Street, Guang Ming New District, ShenZhen, PRC
Date of sample received	:	July 17, 2015
Date of Test	:	July 17, 2015-July 29, 2015

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

PC

Manufacturer: LENOVO

M/N: 4290-RT8

S/N: R9-FW93G 11/08

1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2015	Jan. 10, 2016
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2015	Jan. 10, 2016
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2015	Jan. 10, 2016
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2015	Jan. 10, 2016
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2015	Jan. 14, 2016
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2015	Jan. 14, 2016
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2015	Jan. 14, 2016
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2015	Jan. 10, 2016
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2015	Jan. 10, 2016
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 11, 2015	Jan. 10, 2016
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 11, 2015	Jan. 10, 2016

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2.Configuration and peripherals

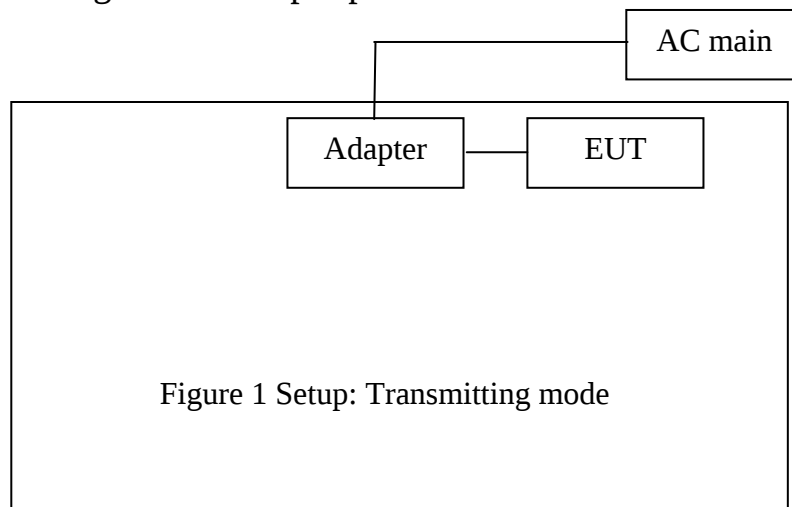


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. POWER LINE CONDUCTED MEASUREMENT

5.1. Block Diagram of Test Setup

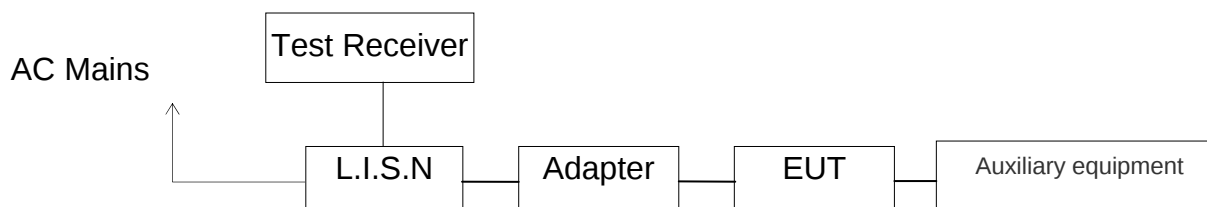

(EUT: Braven 2200m Portable Bluetooth Speaker)

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3. Let the EUT work in test mode and measure it.

5.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : BT communicating(AC 120V/60Hz)

MEASUREMENT RESULT: "ZY72111_fin"

2015-7-21 11:17

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.176000	46.20	10.5	65	18.5	QP	L1	GND
1.756000	33.70	11.7	56	22.3	QP	L1	GND
15.383000	30.80	11.9	60	29.2	QP	L1	GND

MEASUREMENT RESULT: "ZY72111_fin2"

2015-7-21 11:17

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.296000	36.30	11.0	50	14.1	AV	L1	GND
1.250000	23.30	11.6	46	22.7	AV	L1	GND
14.888000	25.20	11.9	50	24.8	AV	L1	GND

MEASUREMENT RESULT: "ZY72112_fin"

2015-7-21 11:20

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.170000	40.90	10.5	65	24.1	QP	N	GND
1.022000	37.00	11.6	56	19.0	QP	N	GND
15.077000	33.00	11.9	60	27.0	QP	N	GND

MEASUREMENT RESULT: "ZY72112_fin2"

2015-7-21 11:20

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.476000	32.60	11.4	46	13.8	AV	N	GND
1.192000	26.20	11.6	46	19.8	AV	N	GND
14.726000	26.20	11.9	50	23.8	AV	N	GND

Test mode : BT communicating(AC 240V/60Hz)

MEASUREMENT RESULT: "zy72107_fin"

2015-7-21 11:06

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	45.90	10.5	65	19.2	QP	L1	GND
0.399000	39.90	11.3	58	18.0	QP	L1	GND
0.471000	40.20	11.4	57	16.3	QP	L1	GND

MEASUREMENT RESULT: "zy72107_fin2"

2015-7-21 11:06

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.348000	37.60	11.1	49	11.4	AV	L1	GND
0.390000	37.90	11.3	48	10.2	AV	L1	GND
0.519000	35.10	11.5	46	10.9	AV	L1	GND

MEASUREMENT RESULT: "zy72108_fin"

2015-7-21 11:09

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.153000	35.10	10.4	66	30.7	QP	N	GND
0.177000	50.80	10.5	65	13.8	QP	N	GND
0.399000	41.80	11.3	58	16.1	QP	N	GND
0.510000	36.60	11.5	56	19.4	QP	N	GND

MEASUREMENT RESULT: "zy72108_fin2"

2015-7-21 11:09

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174000	44.50	10.5	55	10.3	AV	N	GND
0.390000	37.40	11.3	48	10.7	AV	N	GND
0.522000	34.70	11.5	46	11.3	AV	N	GND

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Braven 2200m Portable Bluetooth Speaker M/N:2200m
 Manufacturer: Braven LC
 Operating Condition: BT
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20151558
 Start of Test: 2015-7-21 / 11:16:05

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

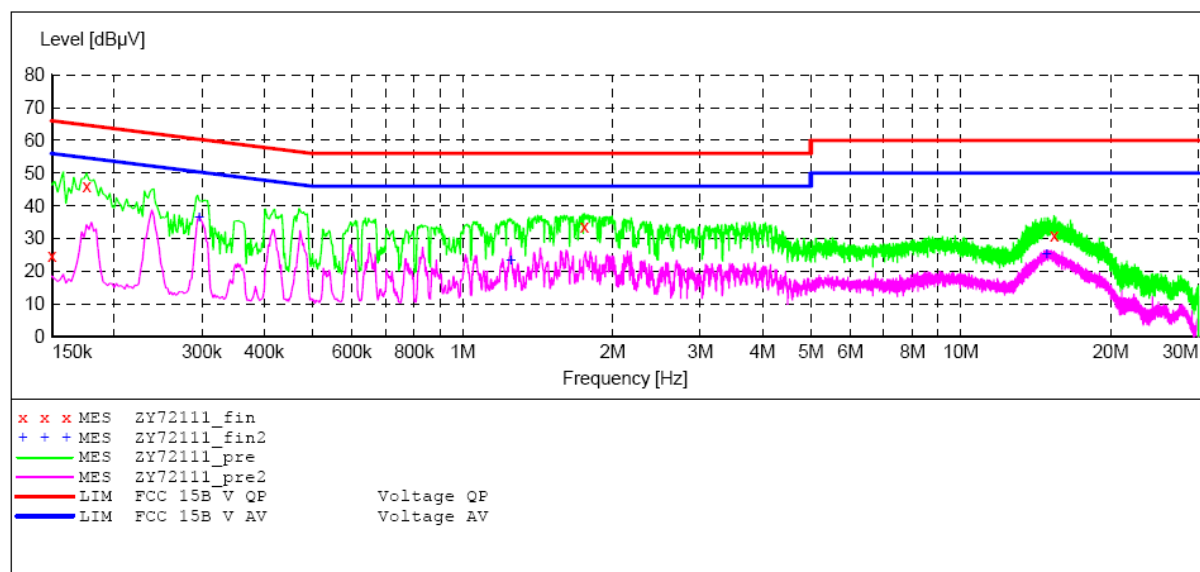

MEASUREMENT RESULT: "ZY72111_fin"

2015-7-21 11:17

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.176000	46.20	10.5	65	18.5	QP	L1	GND
1.756000	33.70	11.7	56	22.3	QP	L1	GND
15.383000	30.80	11.9	60	29.2	QP	L1	GND

MEASUREMENT RESULT: "ZY72111_fin2"

2015-7-21 11:17

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.296000	36.30	11.0	50	14.1	AV	L1	GND
1.250000	23.30	11.6	46	22.7	AV	L1	GND
14.888000	25.20	11.9	50	24.8	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Braven 2200m Portable Bluetooth Speaker M/N:2200m
 Manufacturer: Braven LC
 Operating Condition: BT
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20151558
 Start of Test: 2015-7-21 / 11:18:17

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

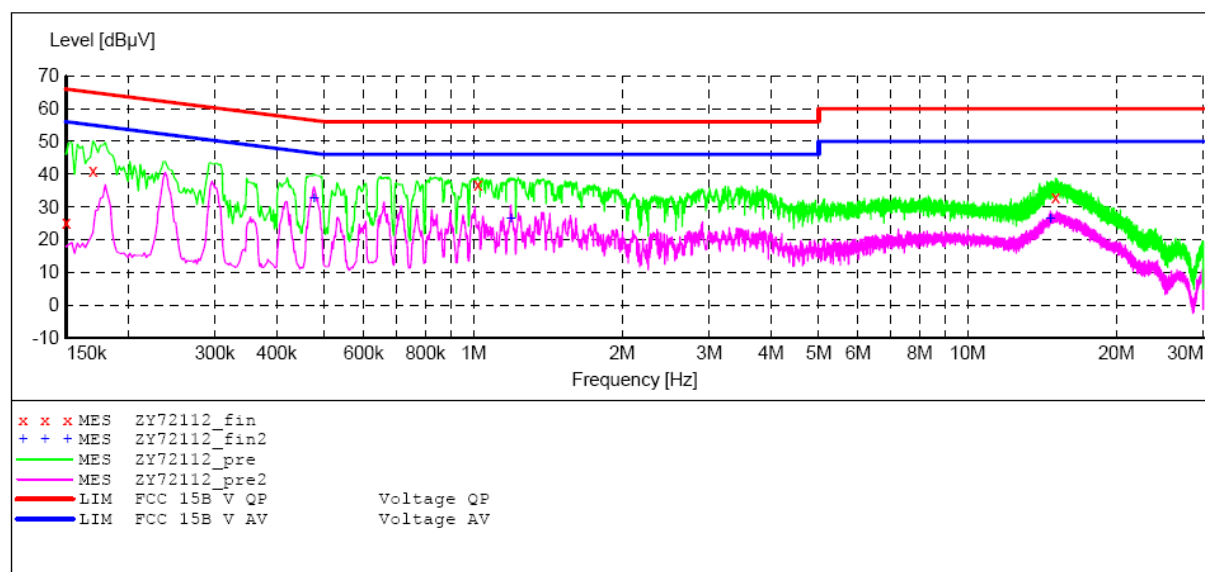

MEASUREMENT RESULT: "ZY72112_fin"

2015-7-21 11:20

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.170000	40.90	10.5	65	24.1	QP	N	GND
1.022000	37.00	11.6	56	19.0	QP	N	GND
15.077000	33.00	11.9	60	27.0	QP	N	GND

MEASUREMENT RESULT: "ZY72112_fin2"

2015-7-21 11:20

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.476000	32.60	11.4	46	13.8	AV	N	GND
1.192000	26.20	11.6	46	19.8	AV	N	GND
14.726000	26.20	11.9	50	23.8	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Braven 2200m Portable Bluetooth Speaker M/N:2200m
 Manufacturer: Braven LC
 Operating Condition: BT Operation
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: L 240V/60Hz
 Comment: Report No.:ATE20151558
 Start of Test: 2015-7-21 / 11:04:50

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

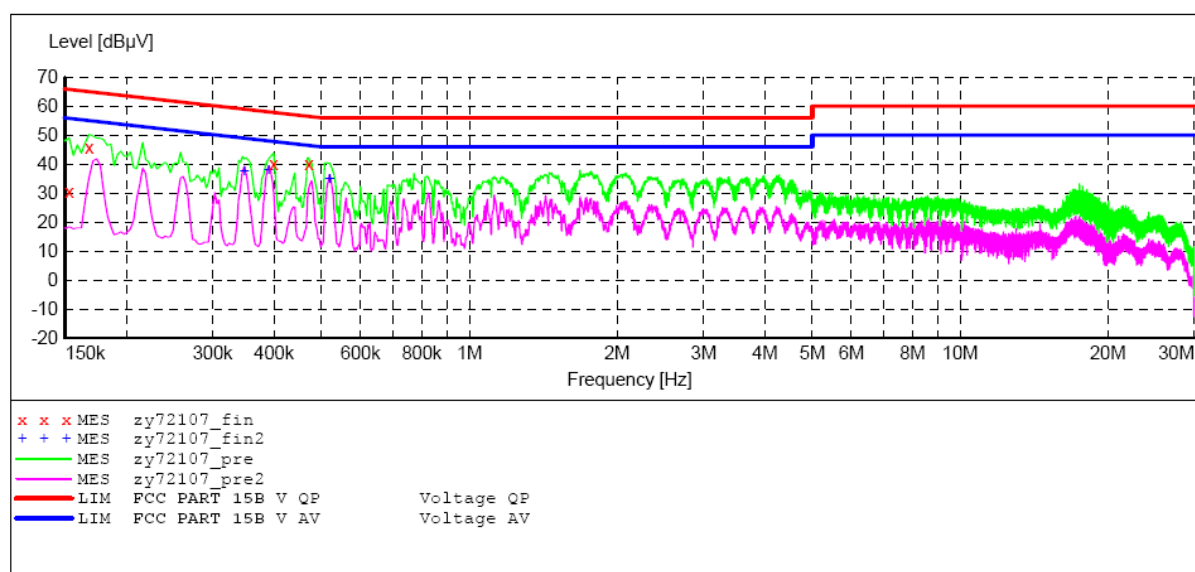

MEASUREMENT RESULT: "zy72107_fin"

2015-7-21 11:06

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	45.90	10.5	65	19.2	QP	L1	GND
0.399000	39.90	11.3	58	18.0	QP	L1	GND
0.471000	40.20	11.4	57	16.3	QP	L1	GND

MEASUREMENT RESULT: "zy72107_fin2"

2015-7-21 11:06

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.348000	37.60	11.1	49	11.4	AV	L1	GND
0.390000	37.90	11.3	48	10.2	AV	L1	GND
0.519000	35.10	11.5	46	10.9	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Braven 2200m Portable Bluetooth Speaker M/N:2200m
 Manufacturer: Braven LC
 Operating Condition: BT Operation
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: N 240V/60Hz
 Comment: Report No.:ATE20151558
 Start of Test: 2015-7-21 / 11:07:03

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

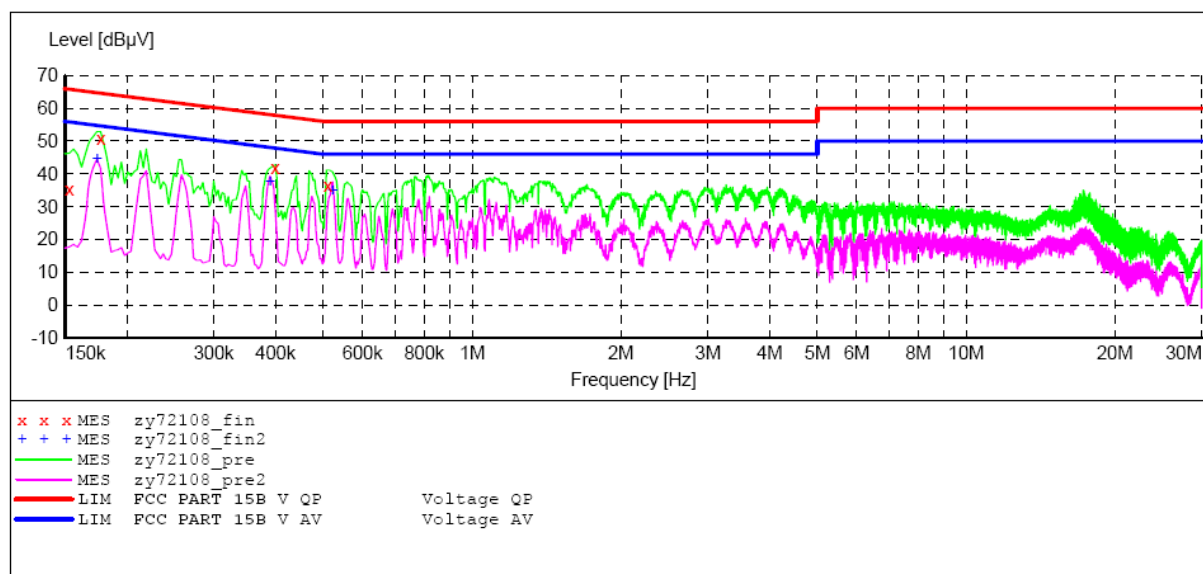

MEASUREMENT RESULT: "zy72108_fin"

2015-7-21 11:09

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.153000	35.10	10.4	66	30.7	QP	N	GND
0.177000	50.80	10.5	65	13.8	QP	N	GND
0.399000	41.80	11.3	58	16.1	QP	N	GND
0.510000	36.60	11.5	56	19.4	QP	N	GND

MEASUREMENT RESULT: "zy72108_fin2"

2015-7-21 11:09

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174000	44.50	10.5	55	10.3	AV	N	GND
0.390000	37.40	11.3	48	10.7	AV	N	GND
0.522000	34.70	11.5	46	11.3	AV	N	GND

6. 6DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: Braven 2200m Portable Bluetooth Speaker)

6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


6.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.6.Test Result

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.6975	0.5	PASS
19	2440	0.6918	0.5	PASS
39	2480	0.6946	0.5	PASS


The spectrum analyzer plots are attached as below.

channel 0

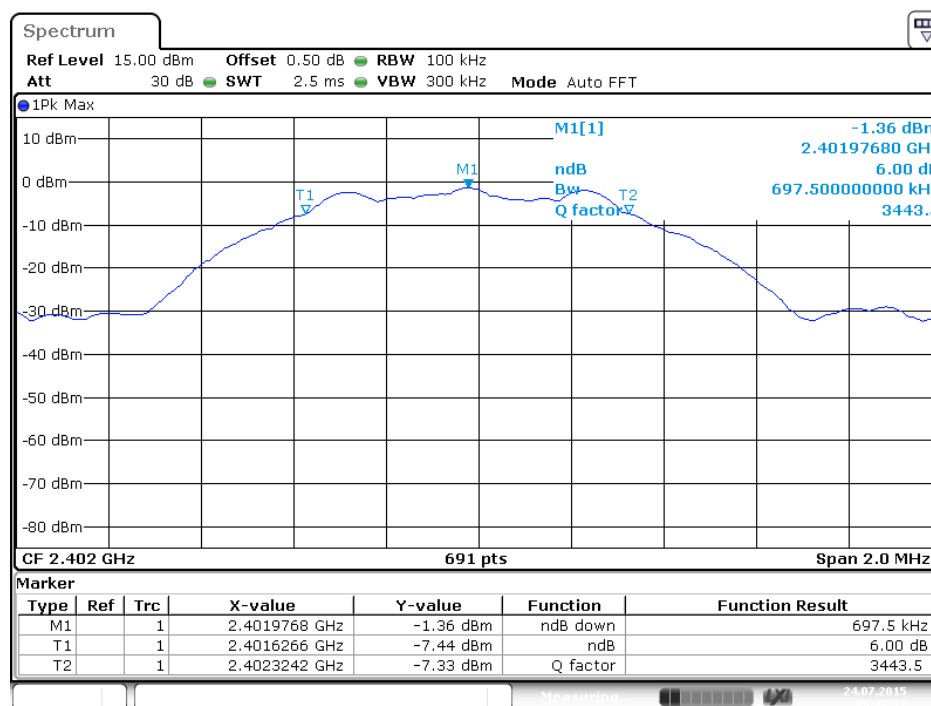


Date: 24.JUL.2015 09:37:18

channel 19

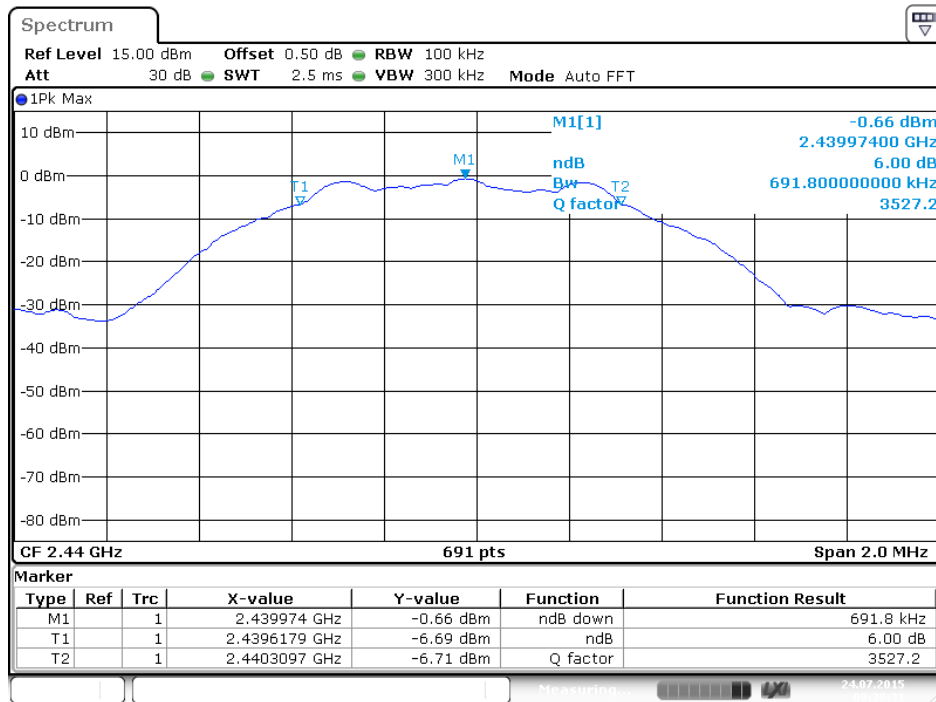

Date: 24.JUL.2015 09:38:31

channel 39

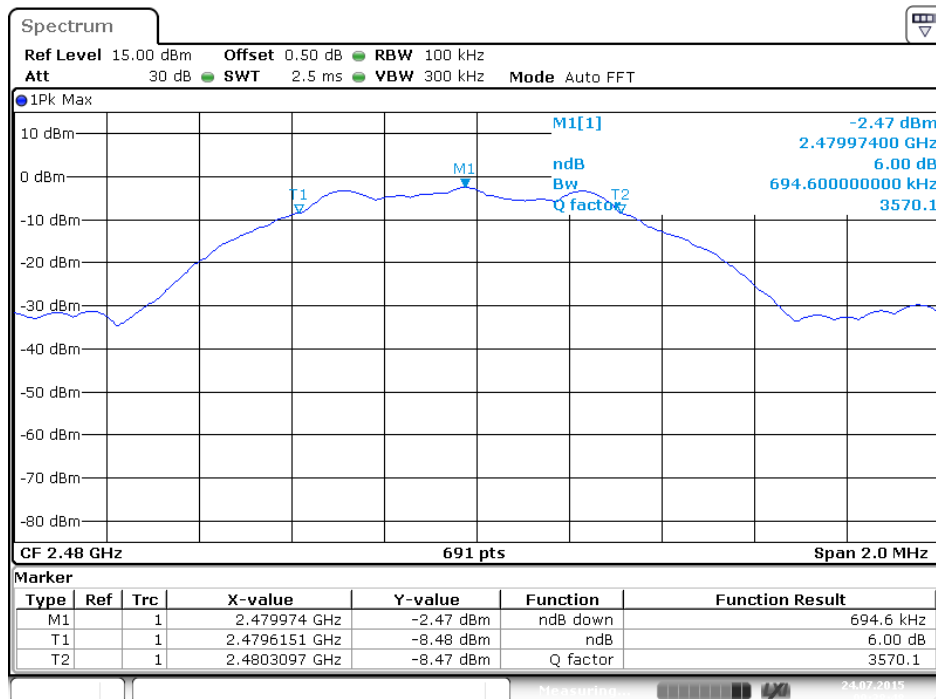

Date: 24.JUL.2015 09:38:49

7. MAXIMUM PEAK OUTPUT POWER

7.1. Block Diagram of Test Setup



(EUT: Braven 2200m Portable Bluetooth Speaker)

7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Test method is options 1 from KDB558074 D01 DTS Meas Guidance v03r02

7.5.3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.


7.5.4. Measurement the maximum peak output power.

7.6.Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-1.46	30	PASS
19	2440	-0.47	30	PASS
39	2480	-2.14	30	PASS


The spectrum analyzer plots are attached as below.

channel 0

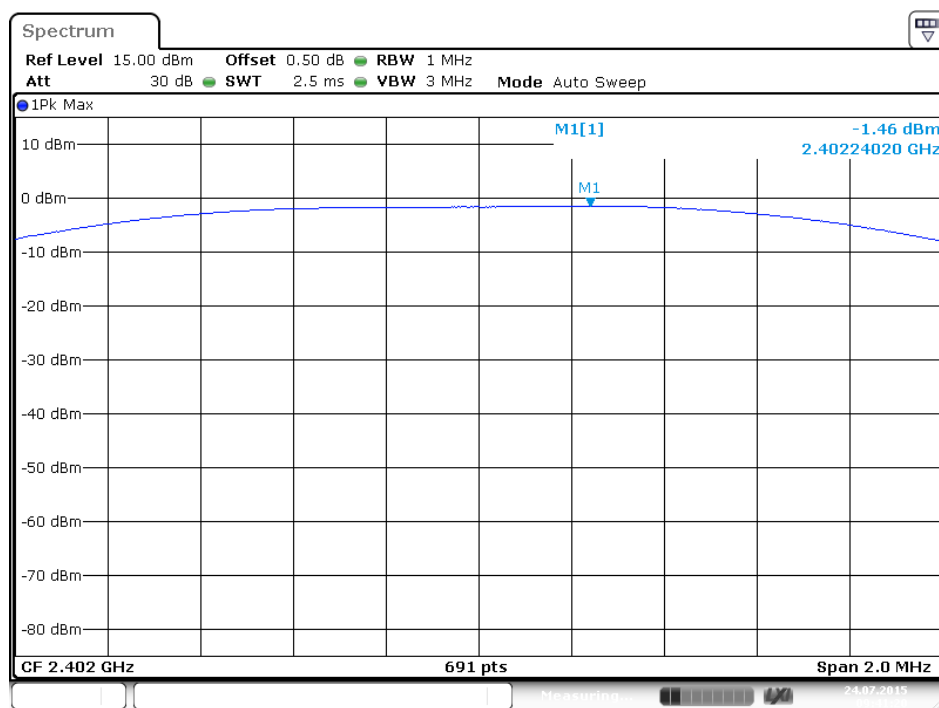


Date: 24.JUL.2015 09:41:20

channel 19

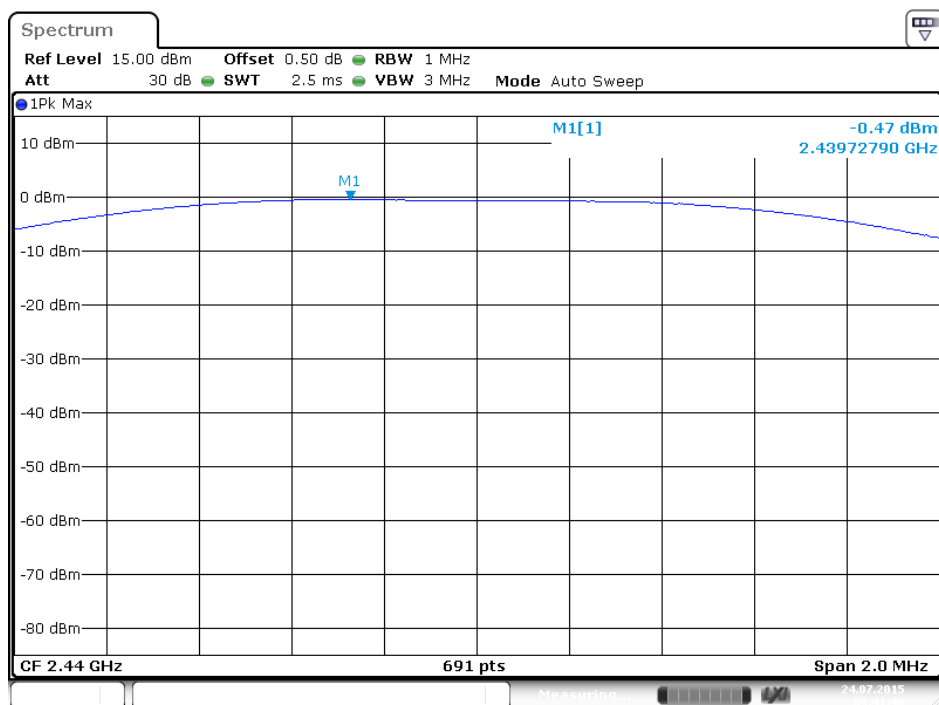

Date: 24.JUL.2015 09:41:46

channel 39

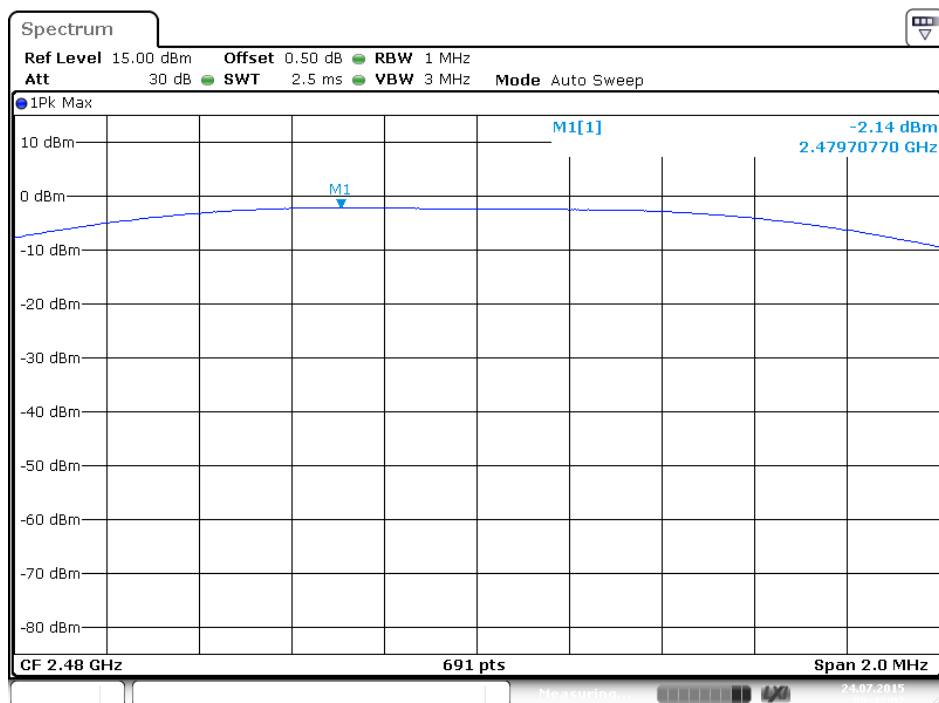

Date: 24.JUL.2015 09:42:03

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup



(EUT: Braven 2200m Portable Bluetooth Speaker)

8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The EUT was tested according to DTS test procedure of Jun 05, 2014 KDB558074 D01 DTS Meas Guidance v03r02 for compliance to FCC 47CFR 15.247 requirements.

8.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.3. Measurement Procedure PKPSD:

8.5.4. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.5.5. Measurement the maximum power spectral density.

8.6.Test Result

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-17.46	8	PASS
19	2440	-16.44	8	PASS
39	2480	-17.97	8	PASS


The spectrum analyzer plots are attached as below.

channel 0

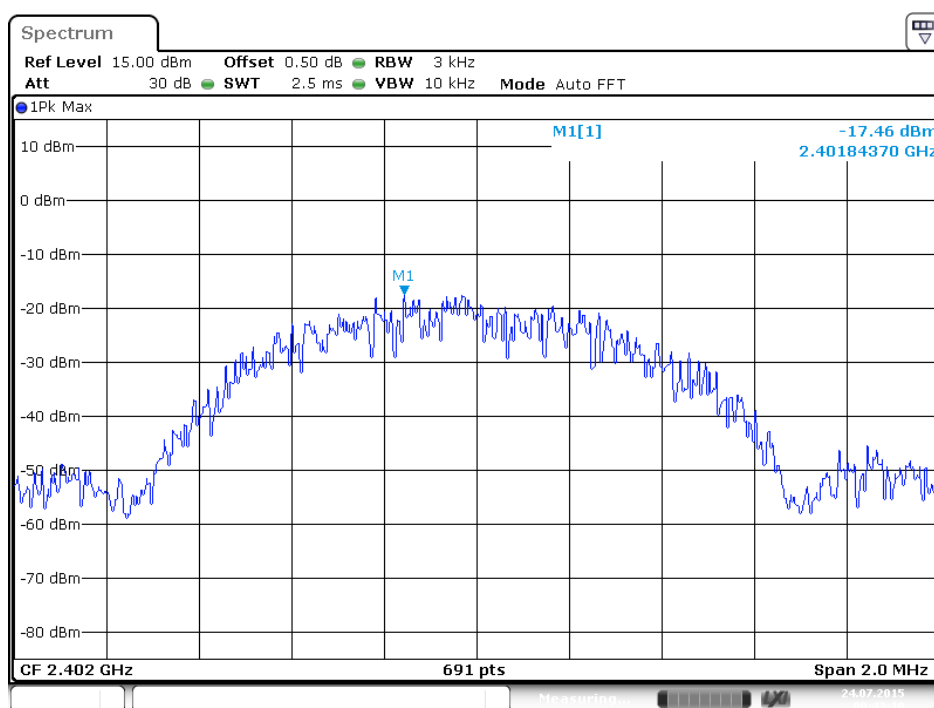


Date: 24.JUL.2015 09:43:11

channel 19

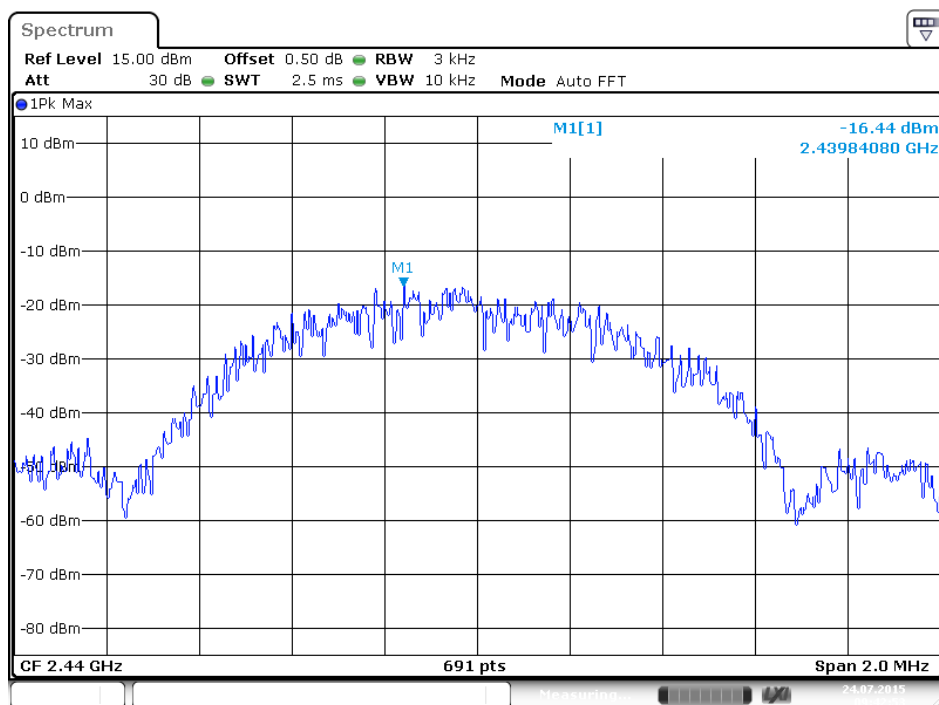

Date: 24.JUL.2015 09:42:54

channel 39

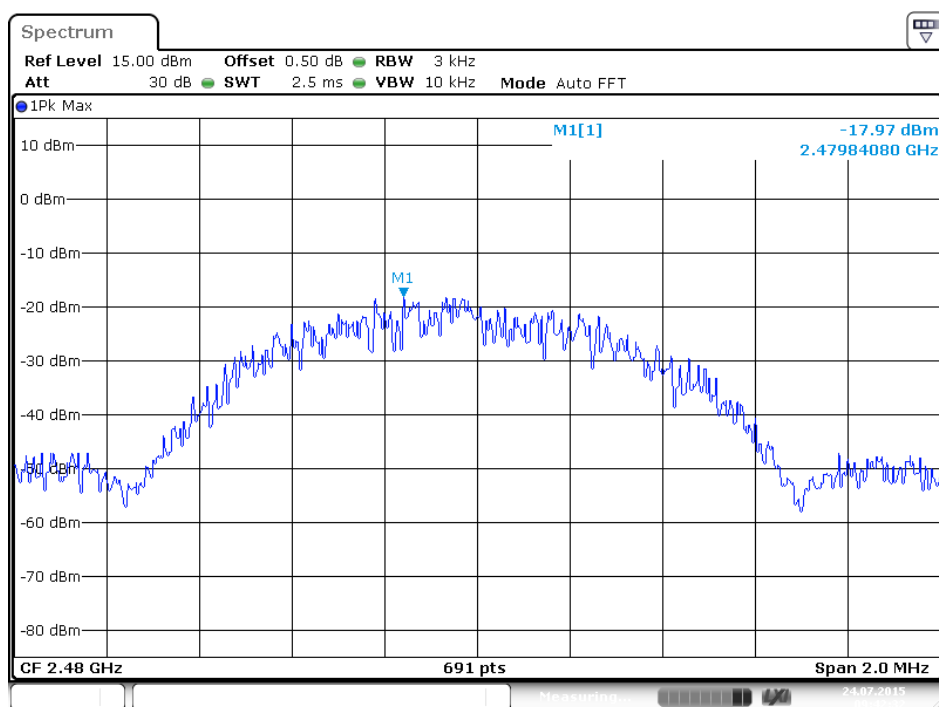

Date: 24.JUL.2015 09:42:33

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup



(EUT: Braven 2200m Portable Bluetooth Speaker)

9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.Operating Condition of EUT

9.4.1.Setup the EUT and simulator as shown as Section 9.1.

9.4.2.Turn on the power of all equipment.

9.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

9.5.Test Procedure

Conducted Band Edge:

9.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

9.5.3. Radiate Band Edge:

9.5.4.The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

9.5.5.The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.6.EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.7.Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.8.RBW=1MHz, VBW=1MHz


9.5.9.The band edges was measured and recorded.

9.6.Test Result

Pass


Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.4GHz	52.47	20
39	2.4835GHz	59.93	20

channel 0

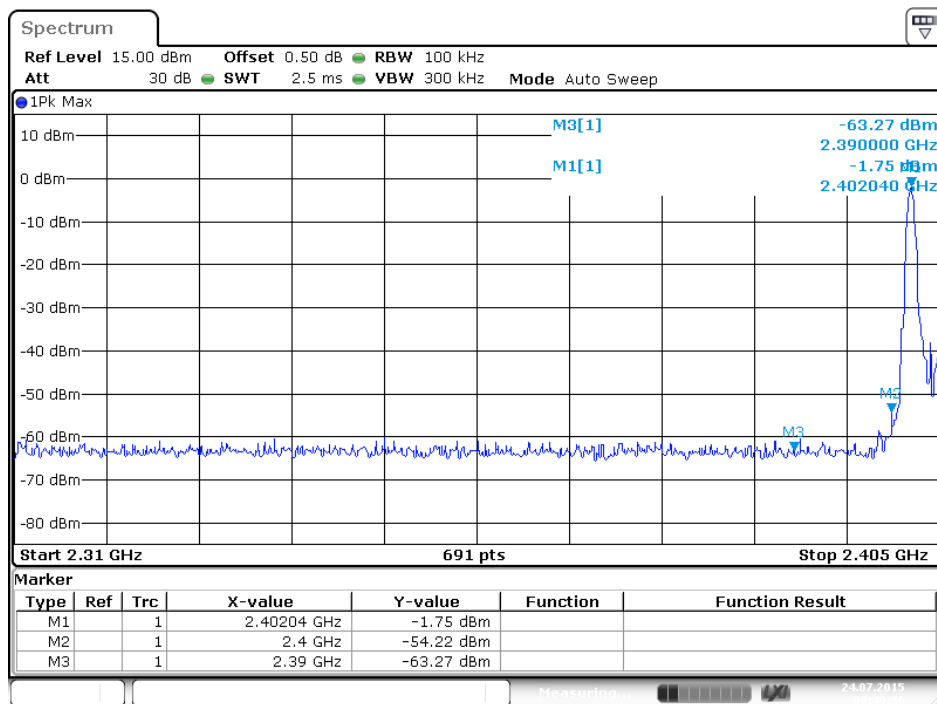

Date: 24.JUL.2015 09:40:46

channel 39

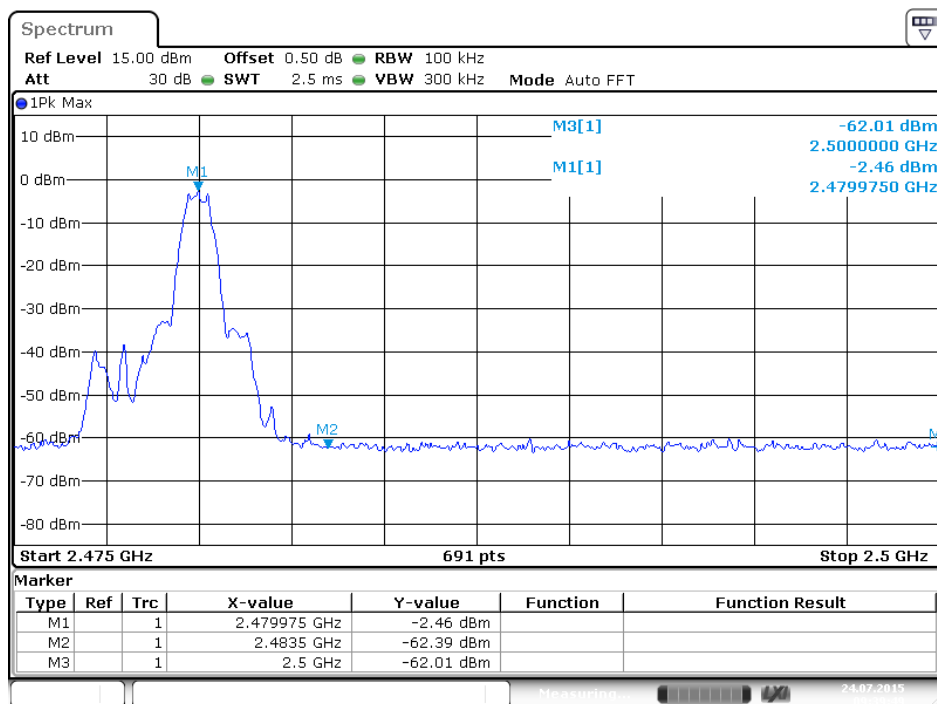

Date: 24.JUL.2015 09:39:49

Radiated Band Edge Result

Date of Test:	July 24, 2015	Temperature:	25°C
	Braven 2200m Portable		
EUT:	Bluetooth Speaker	Humidity:	50%
Model No.:	2200m	Power Supply:	AC 120V/60Hz
Test Mode:	TX (2402MHz) GFSK	Test Engineer:	Alen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2390.000	34.90	43.36	-7.53	27.37	35.83	54.00	74.00	-26.63	-38.17	Vertical
2400.000	45.03	54.56	-7.46	37.57	47.10	54.00	74.00	-16.43	-26.90	Vertical
2390.000	34.67	43.72	-7.53	27.14	36.19	54.00	74.00	-26.86	-37.81	Horizontal
2400.000	46.89	56.51	-7.46	39.43	49.05	54.00	74.00	-14.57	-24.95	Horizontal

Date of Test:	July 24, 2015	Temperature:	25°C
	Braven 2200m Portable		
EUT:	Bluetooth Speaker	Humidity:	50%
Model No.:	2200m	Power Supply:	AC 120V/60Hz
Test Mode:	TX (2480MHz) GFSK	Test Engineer:	Alen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	42.69	51.82	-7.37	35.32	44.45	54.00	74.00	-18.68	-29.55	Vertical
2500.000	34.28	44.38	-7.40	26.88	36.98	54.00	74.00	-27.12	-37.02	Vertical
2483.500	40.30	48.63	-7.37	32.93	41.26	54.00	74.00	-21.07	-32.74	Horizontal
2500.000	35.61	44.38	-7.40	28.21	36.98	54.00	74.00	-25.79	-37.02	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Job No.: STAR2015 #455

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2402MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 18/51/14

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

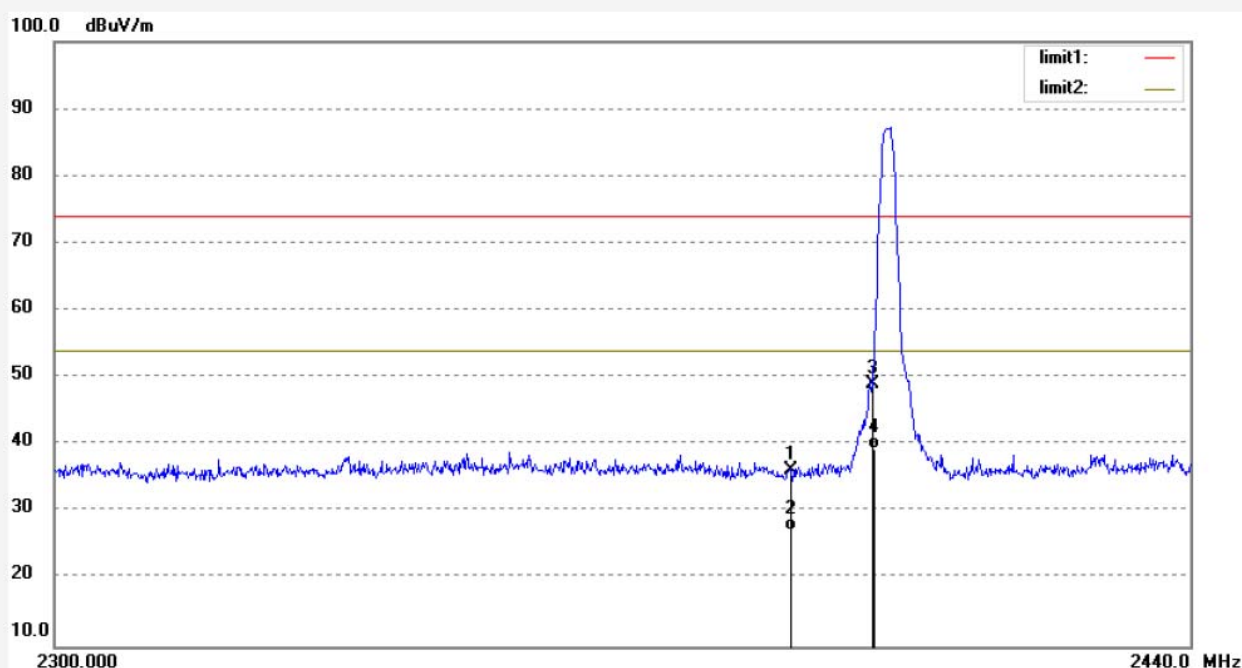

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.72	-7.53	36.19	74.00	-37.81	peak			
2	2390.000	34.67	-7.53	27.14	54.00	-26.86	AVG			
3	2400.000	56.51	-7.46	49.05	74.00	-24.95	peak			
4	2400.000	46.89	-7.46	39.43	54.00	-14.57	AVG			

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #456

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2402MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 18/52/16

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

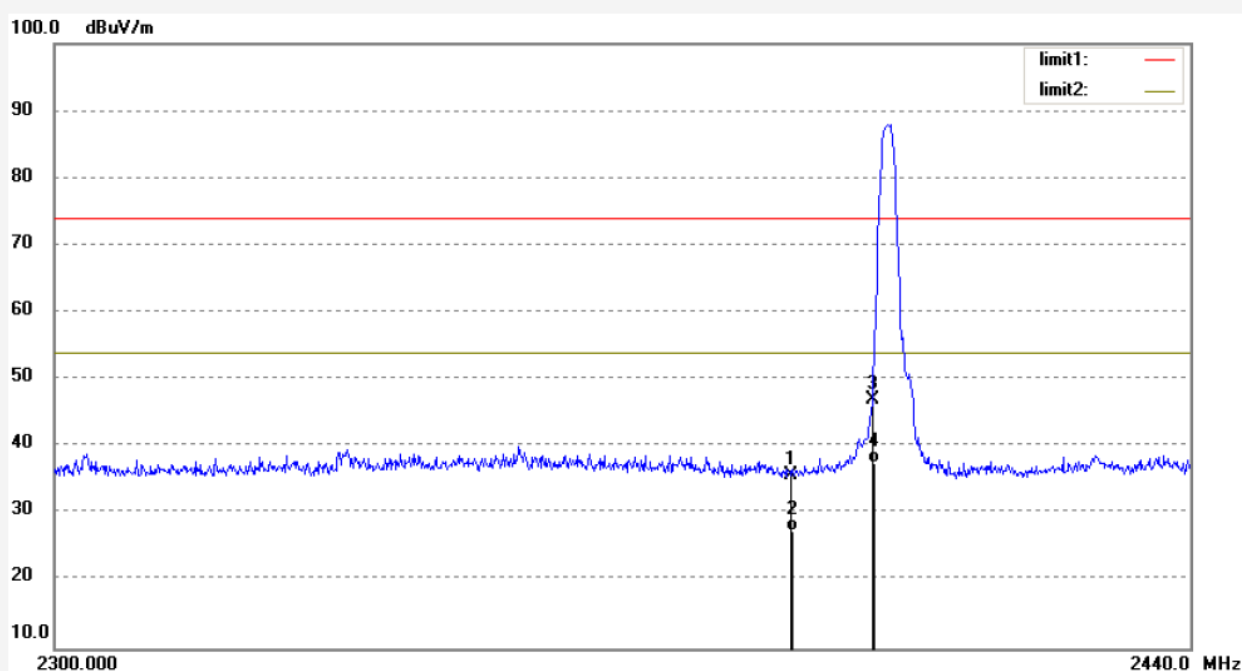

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.36	-7.53	35.83	74.00	-38.17	peak			
2	2390.000	34.90	-7.53	27.37	54.00	-26.63	AVG			
3	2400.000	54.56	-7.46	47.10	74.00	-26.90	peak			
4	2400.000	45.03	-7.46	37.57	54.00	-16.43	AVG			

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #458

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2480MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 18/54/31

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

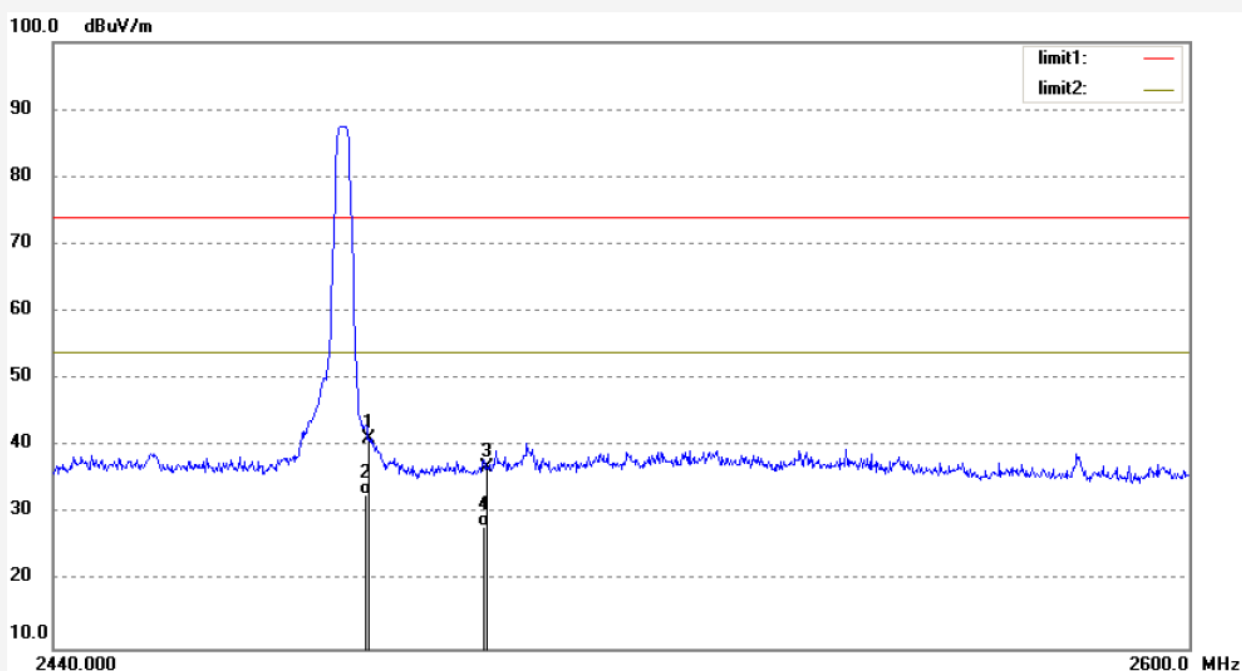

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.63	-7.37	41.26	74.00	-32.74	peak			
2	2483.500	40.30	-7.37	32.93	54.00	-21.07	AVG			
3	2500.000	44.38	-7.40	36.98	74.00	-37.02	peak			
4	2500.000	35.61	-7.40	28.21	54.00	-25.79	AVG			

Job No.: STAR2015 #457

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2480MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 18/53/40

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

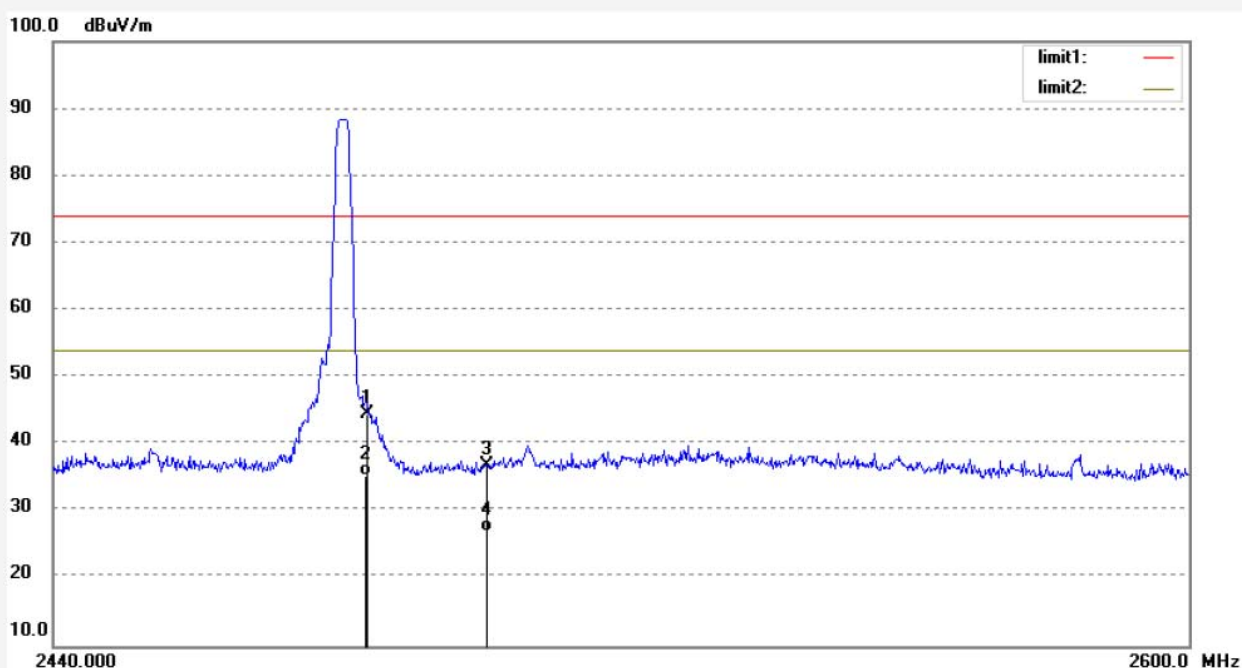

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.82	-7.37	44.45	74.00	-29.55	peak			
2	2483.500	42.69	-7.37	35.32	54.00	-18.68	AVG			
3	2500.000	44.38	-7.40	36.98	74.00	-37.02	peak			
4	2500.000	34.28	-7.40	26.88	54.00	-27.12	AVG			


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

10.RADIATED SPURIOUS EMISSION TEST

10.1.Block Diagram of Test Setup


10.1.1.Block diagram of connection between the EUT and peripherals

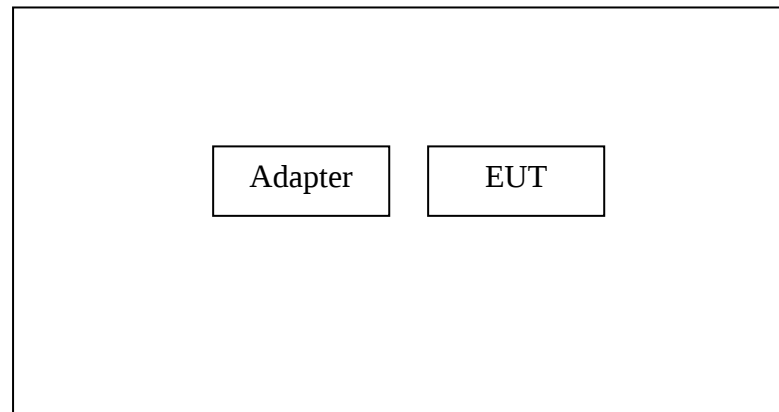

Setup: Transmitting mode

(EUT: Braven 2200m Portable Bluetooth Speaker)

10.1.2.Semi-Anechoic Chamber Test Setup Diagram

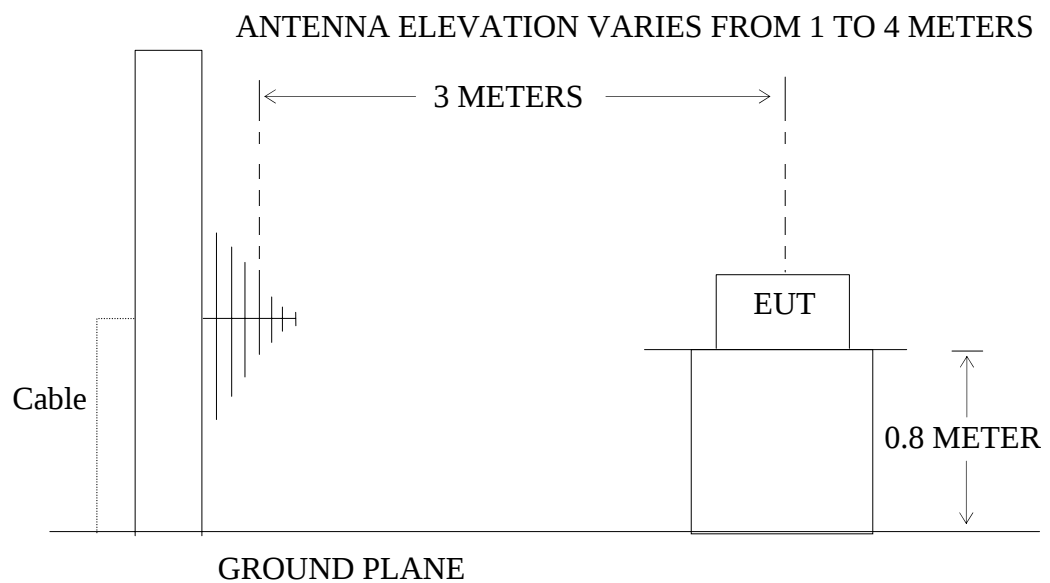

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5.Operating Condition of EUT

10.5.1.Setup the EUT and simulator as shown as Section 10.1.

10.5.2.Turn on the power of all equipment.

10.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

10.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3.The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #478

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2402MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/29/25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

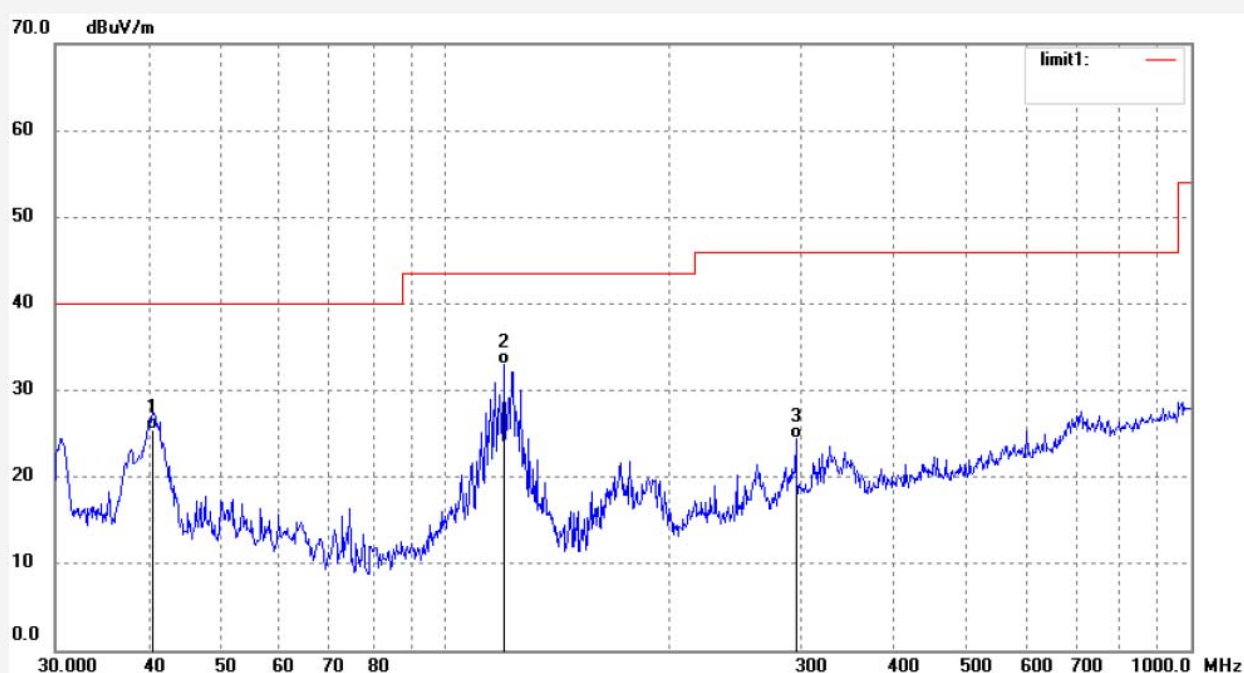

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	40.5591	37.13	-11.66	25.47	40.00	-14.53	QP			
2	119.8556	47.09	-14.15	32.94	43.50	-10.56	QP			
3	295.1469	34.71	-10.37	24.34	46.00	-21.66	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #479

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2402MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/30/08

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

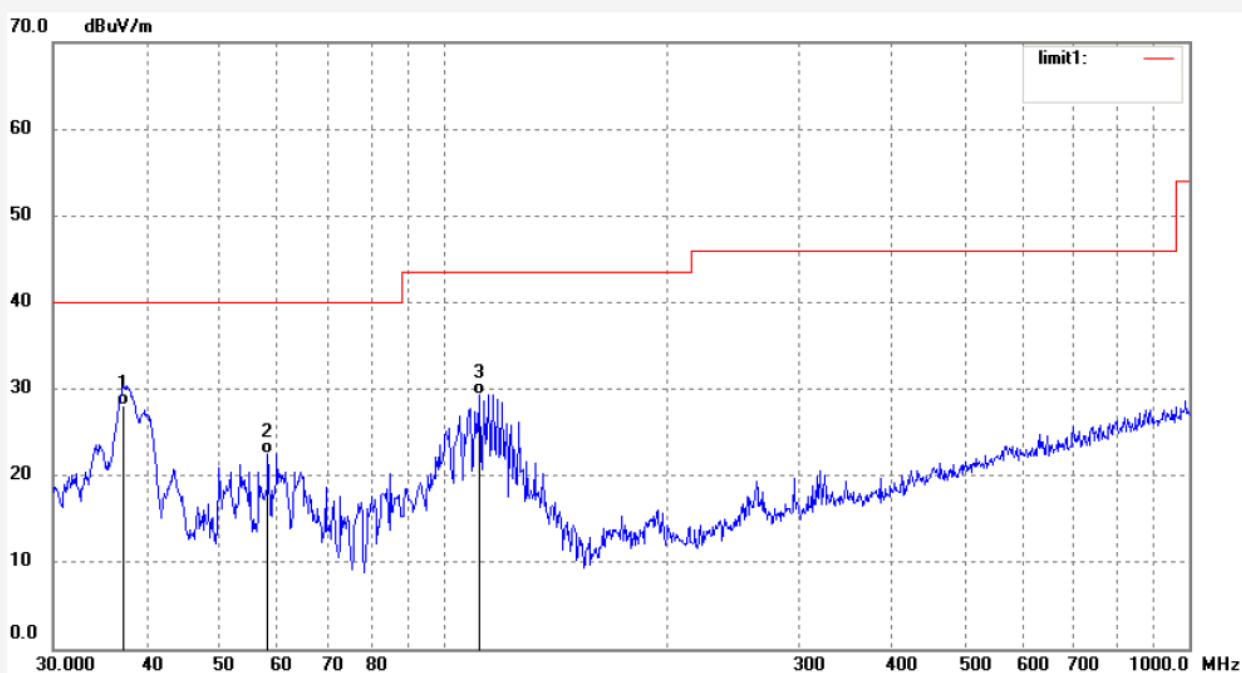

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.2855	39.10	-10.93	28.17	40.00	-11.83	QP			
2	58.2030	36.07	-13.59	22.48	40.00	-17.52	QP			
3	111.7380	44.04	-14.64	29.40	43.50	-14.10	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #481

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2440MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/32/31

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

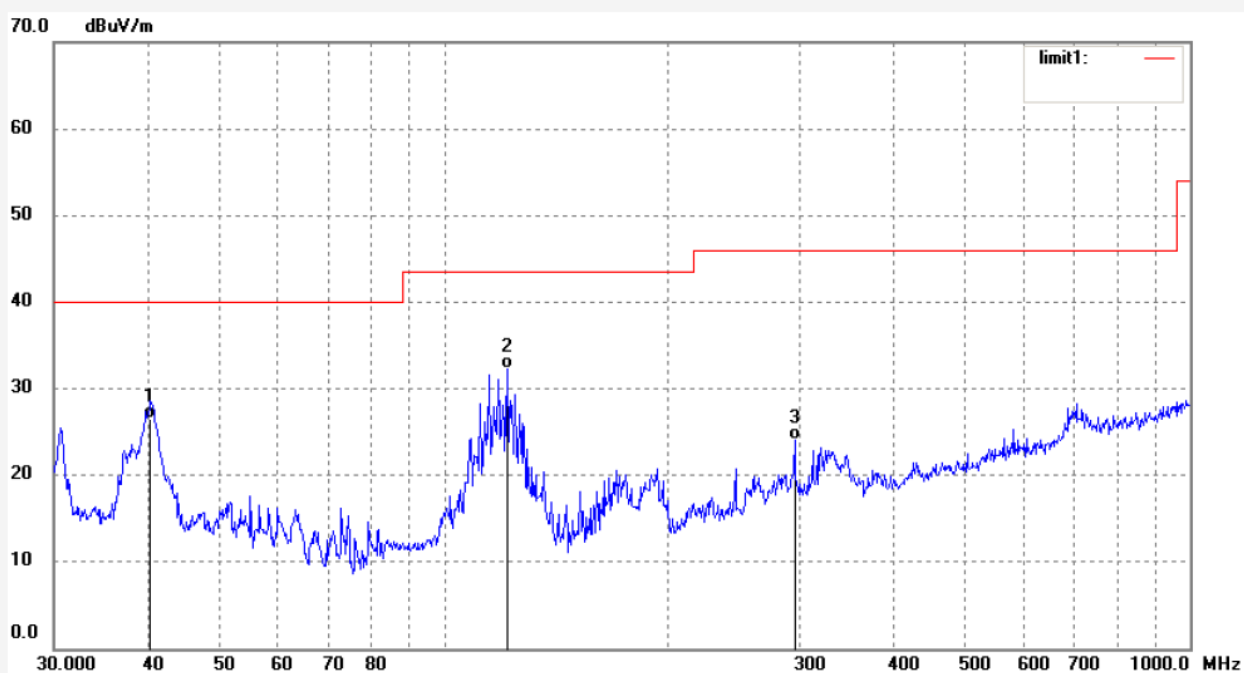

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	40.4172	38.13	-11.63	26.50	40.00	-13.50	QP			
2	121.5486	46.69	-14.32	32.37	43.50	-11.13	QP			
3	295.1469	34.41	-10.37	24.04	46.00	-21.96	QP			

Job No.: STAR2015 #480

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2440MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/30/50

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

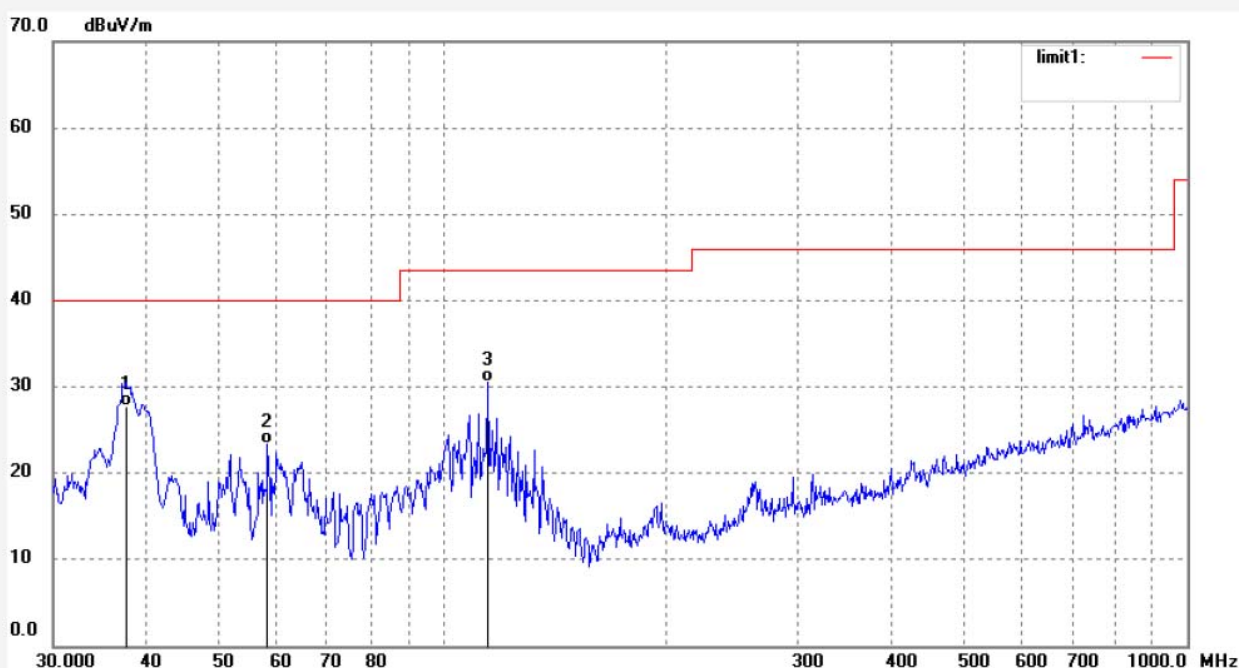

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.5479	38.76	-10.99	27.77	40.00	-12.23	QP			
2	58.2030	36.93	-13.59	23.34	40.00	-16.66	QP			
3	114.9169	44.71	-14.17	30.54	43.50	-12.96	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #482

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2480MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/33/58

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

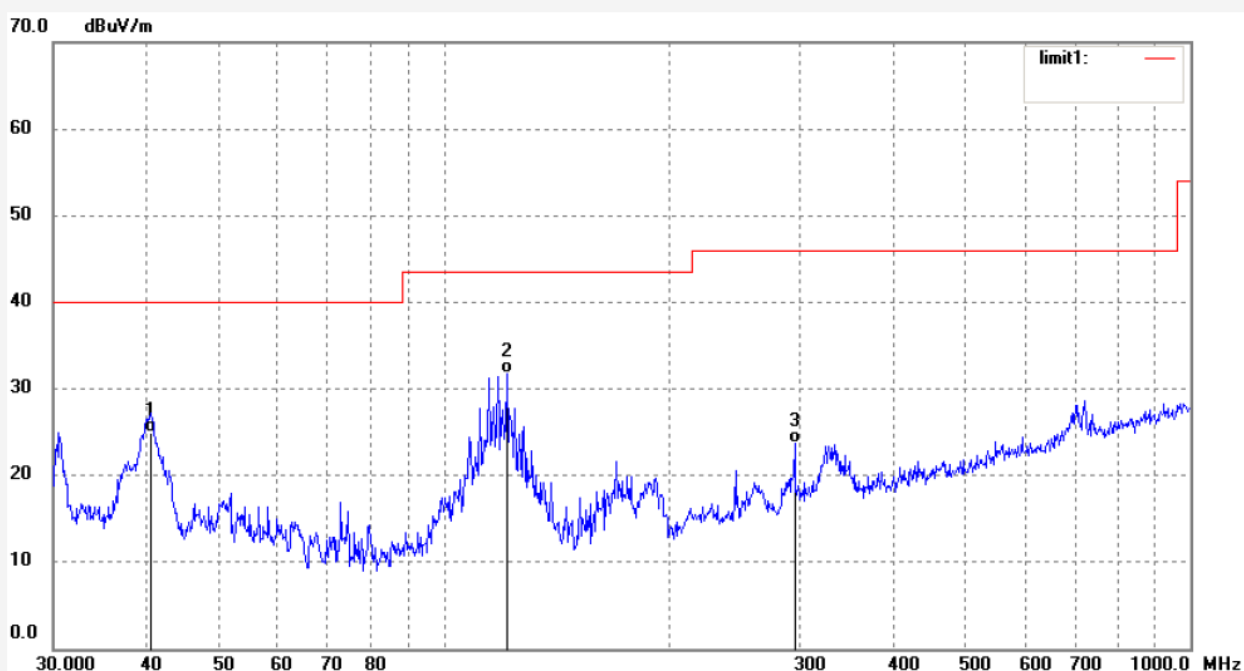

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	40.5591	36.54	-11.66	24.88	40.00	-15.12	QP			
2	121.5485	46.08	-14.32	31.76	43.50	-11.74	QP			
3	295.1469	34.03	-10.37	23.66	46.00	-22.34	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #483

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2480MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/34/58

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

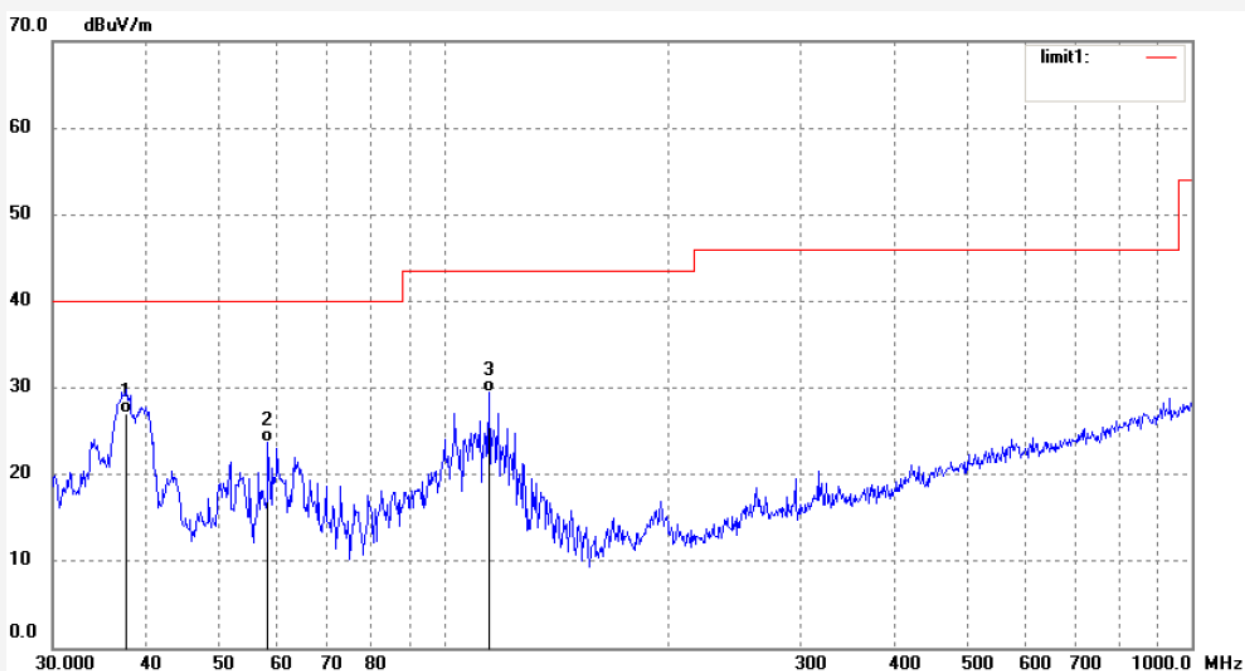

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.6798	38.13	-11.02	27.11	40.00	-12.89	QP			
2	58.2030	37.22	-13.59	23.63	40.00	-16.37	QP			
3	114.9169	43.58	-14.17	29.41	43.50	-14.09	QP			

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2015 #473

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2402MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/20/08

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

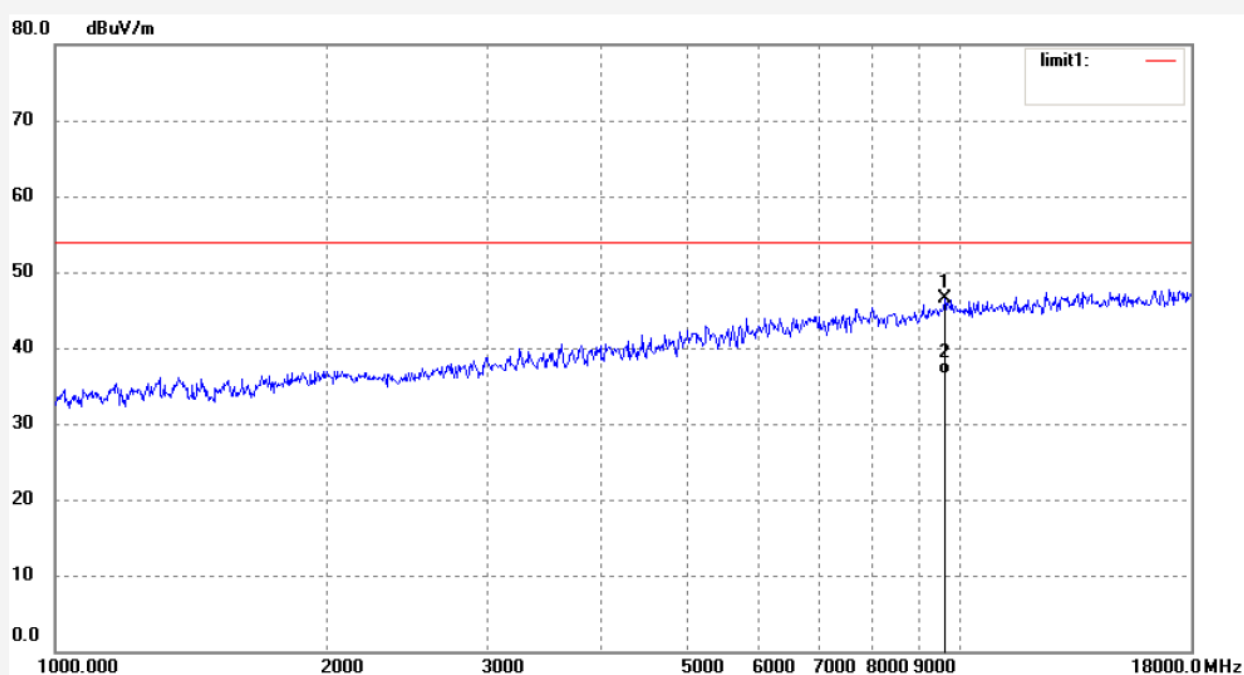

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	9613.430	37.04	9.44	46.48	74.00	-27.52	peak			
2	9613.430	26.97	9.44	36.41	54.00	-17.59	AVG			

Job No.: STAR2015 #472

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2402MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/18/35

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

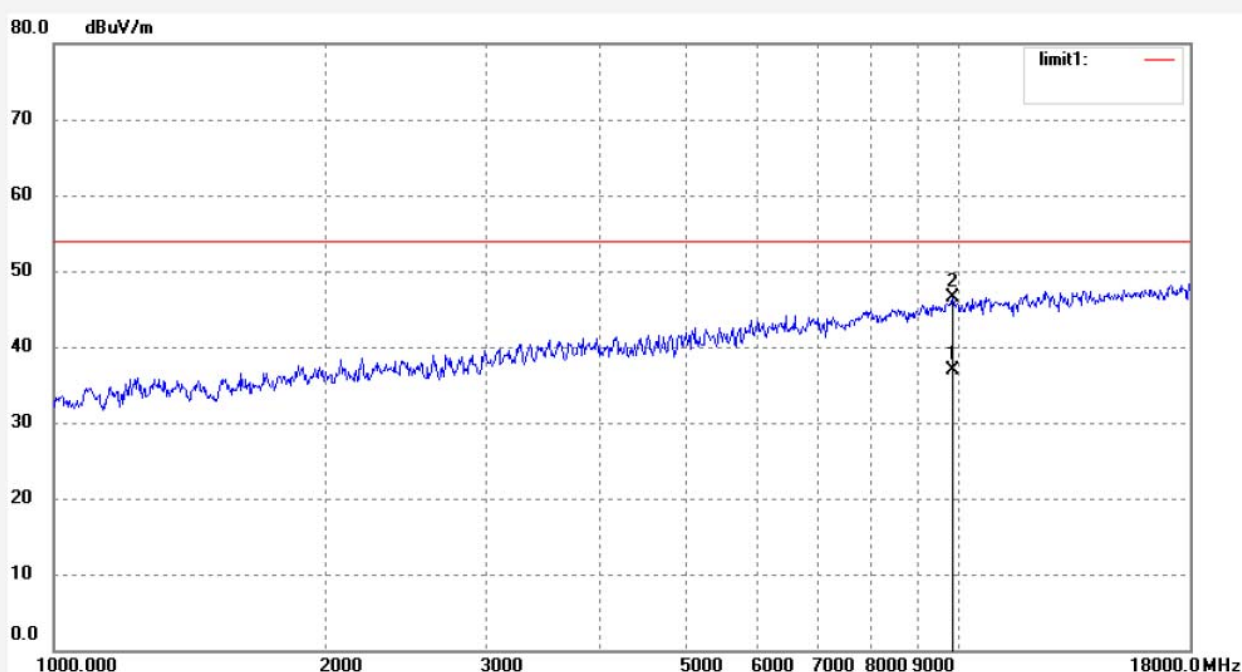


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	9838.311	27.30	9.65	36.95	54.00	-17.05	AVG			
2	9838.311	36.84	9.65	46.49	74.00	-27.51	peak			

Job No.: STAR2015 #474
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Braven 2200m Portable Bluetooth Speaker
Mode: TX 2440MHz
Model: 2200m
Manufacturer: Braven LC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 15/07/24/
Time: 19/21/21
Engineer Signature:
Distance: 3m

Note: Report NO.:ATE20151558

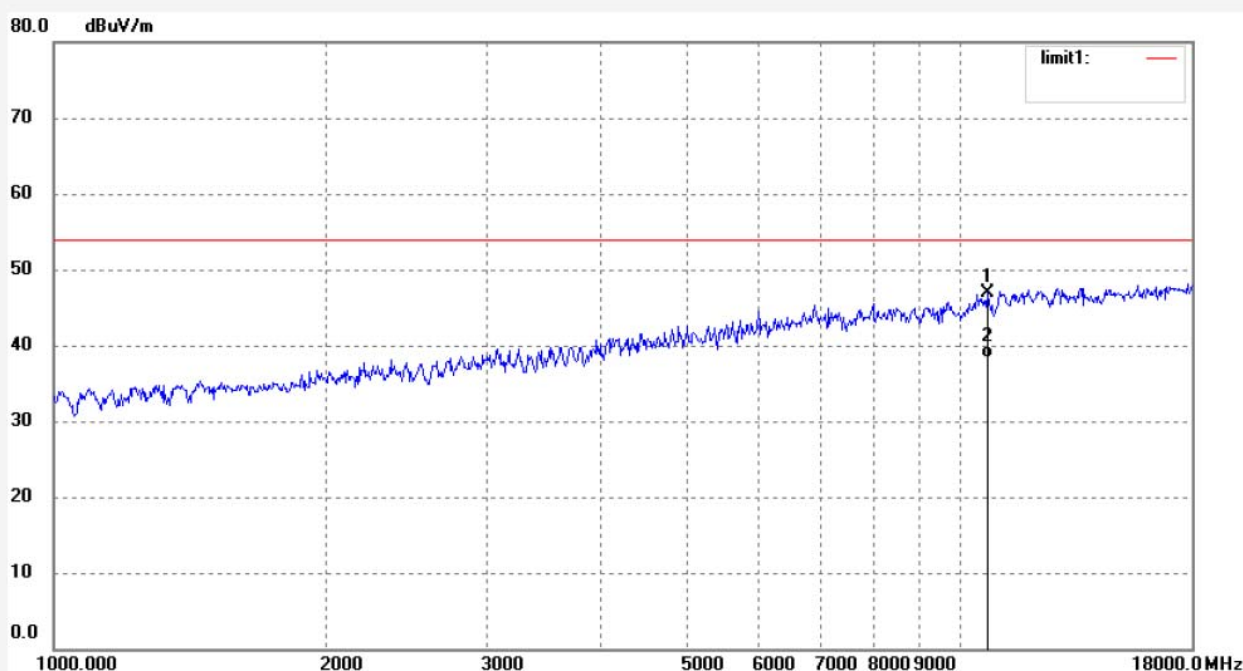

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	10698.514	38.26	8.64	46.90	74.00	-27.10	peak			
2	10698.514	29.73	8.64	38.37	54.00	-15.63	AVG			

Job No.: STAR2015 #475

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2440MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/23/54

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

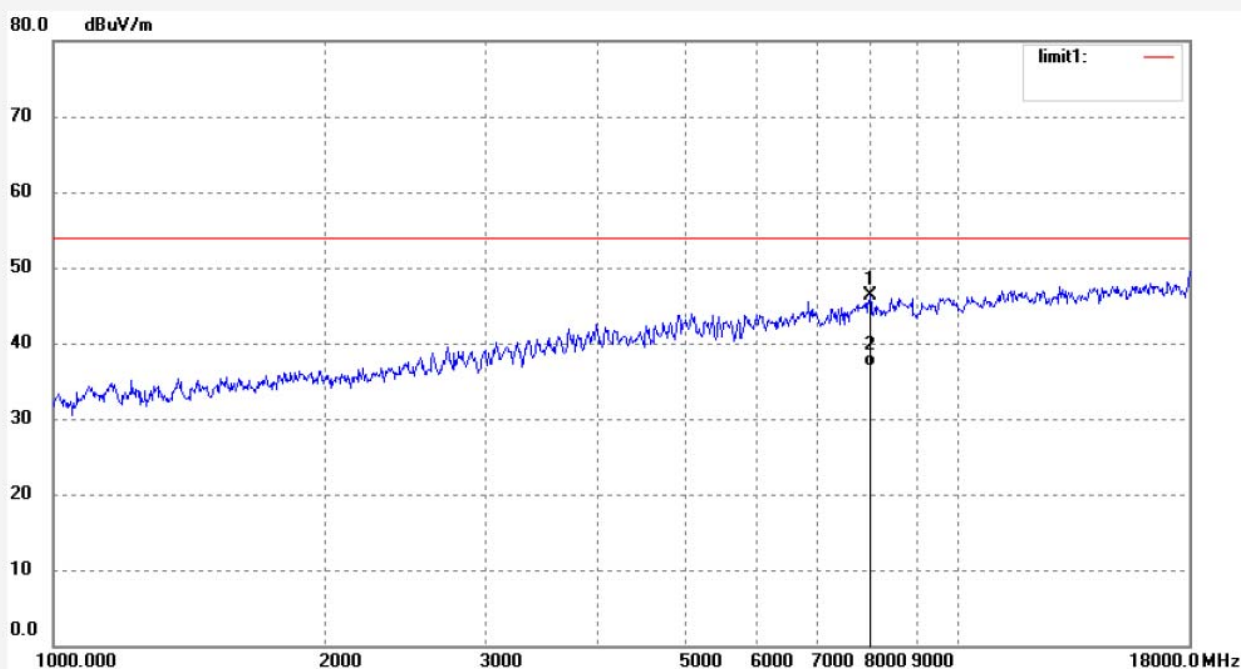

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	7989.892	39.43	6.84	46.27	74.00	-27.73	peak			
2	7989.892	29.97	6.84	36.81	54.00	-17.19	AVG			

Job No.: STAR2015 #477

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2480MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/25/48

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20151558

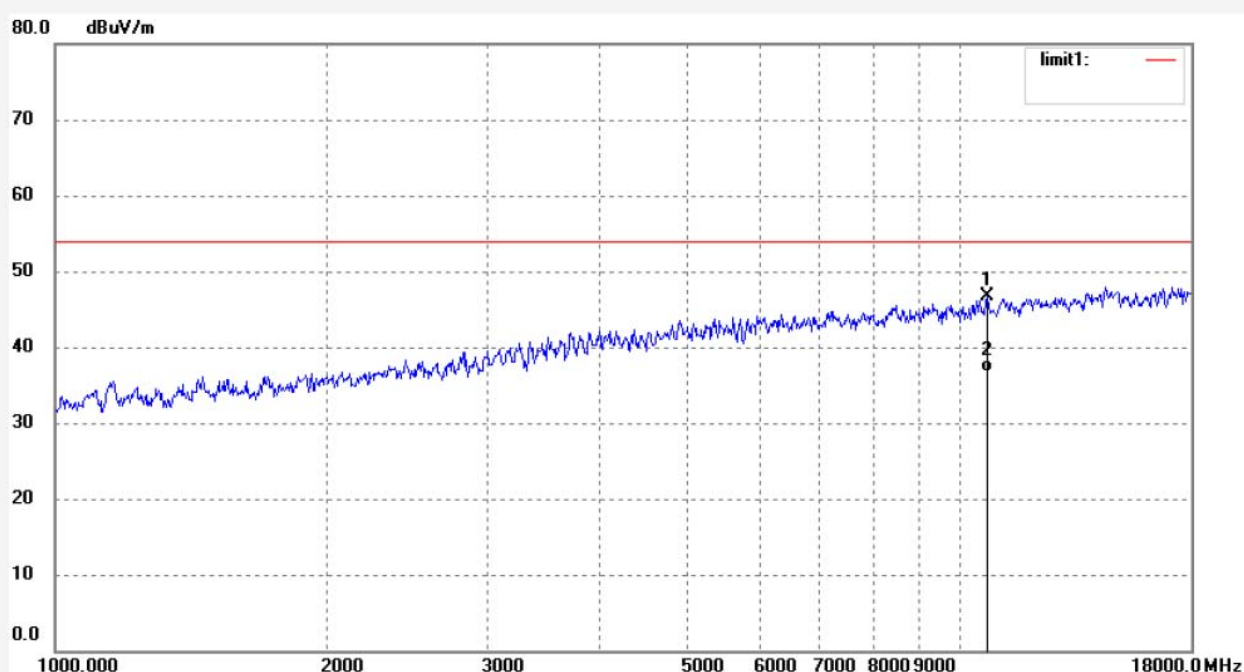

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	10698.514	38.06	8.64	46.70	74.00	-27.30	peak			
2	10698.514	27.98	8.64	36.62	54.00	-17.38	AVG			

Job No.: STAR2015 #476

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Braven 2200m Portable Bluetooth Speaker

Mode: TX 2480MHz

Model: 2200m

Manufacturer: Braven LC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/07/24/

Time: 19/24/54

Engineer Signature:

Distance: 3m


Note: Report NO.:ATE20151558

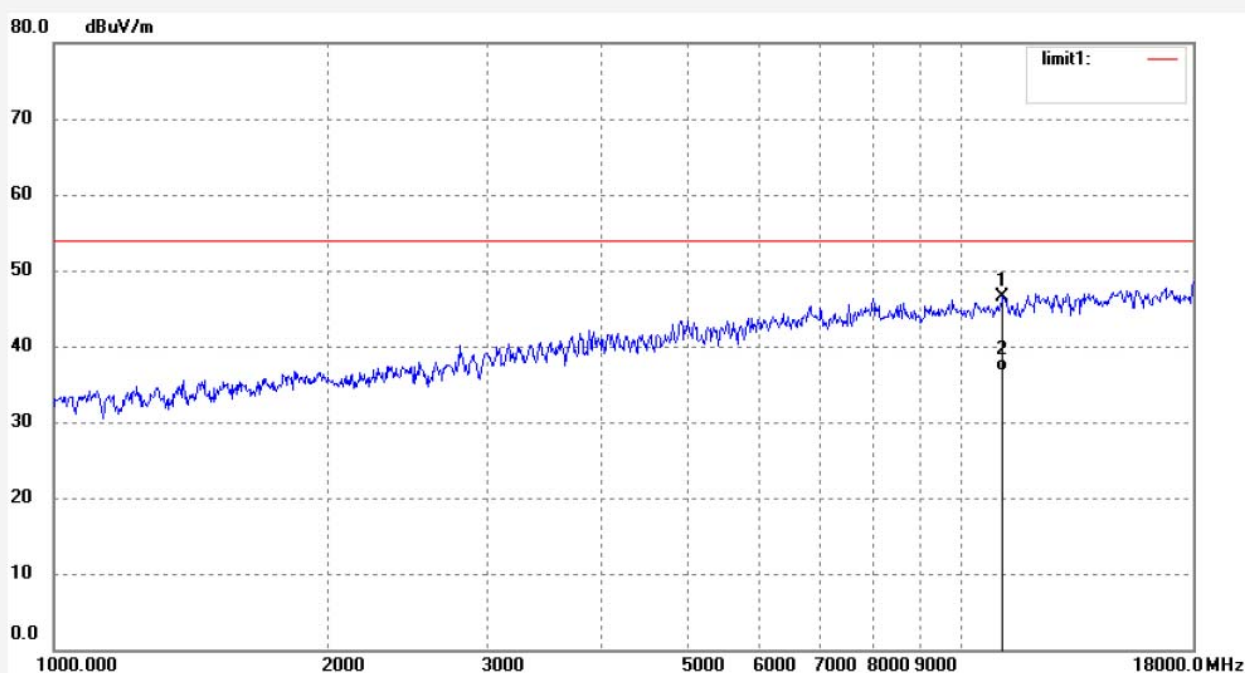

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	11108.157	36.98	9.60	46.58	74.00	-27.42	peak			
2	11108.157	27.13	9.60	36.73	54.00	-17.27	AVG			

11.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

11.1.Block Diagram of Test Setup



(EUT: Braven 2200m Portable Bluetooth Speaker)

11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

11.5. Test Procedure

11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz


11.5.3. The Conducted Spurious Emission was measured and recorded.

11.6. Test Result

Pass.


The spectrum analyzer plots are attached as below.

BLE Channel Low 2402MHz

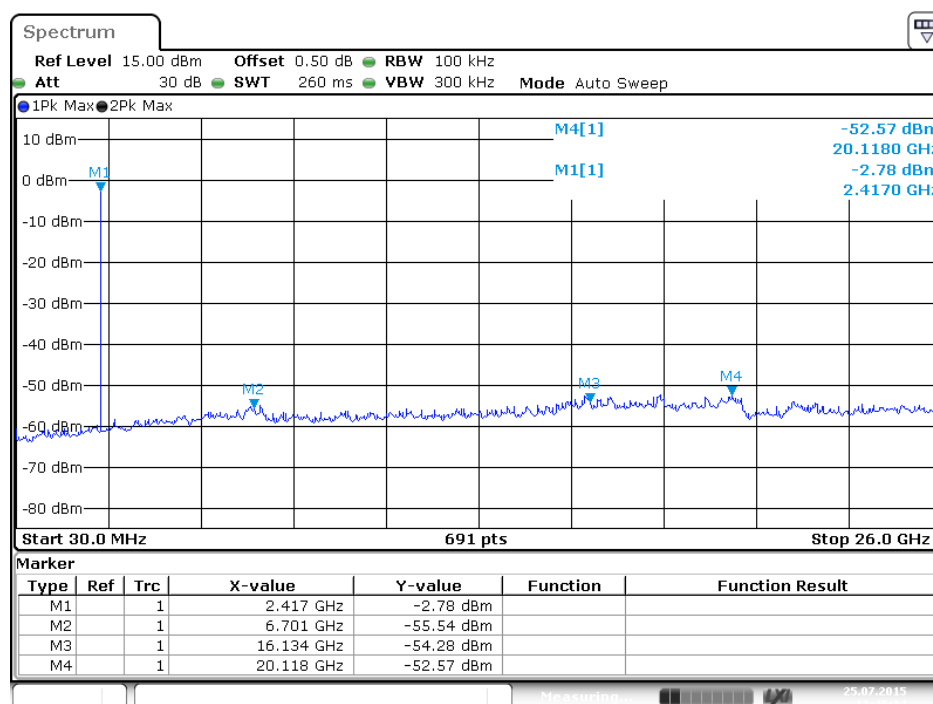


Date: 25.JUL.2015 11:48:14

BLE Channel Middle 2440MHz

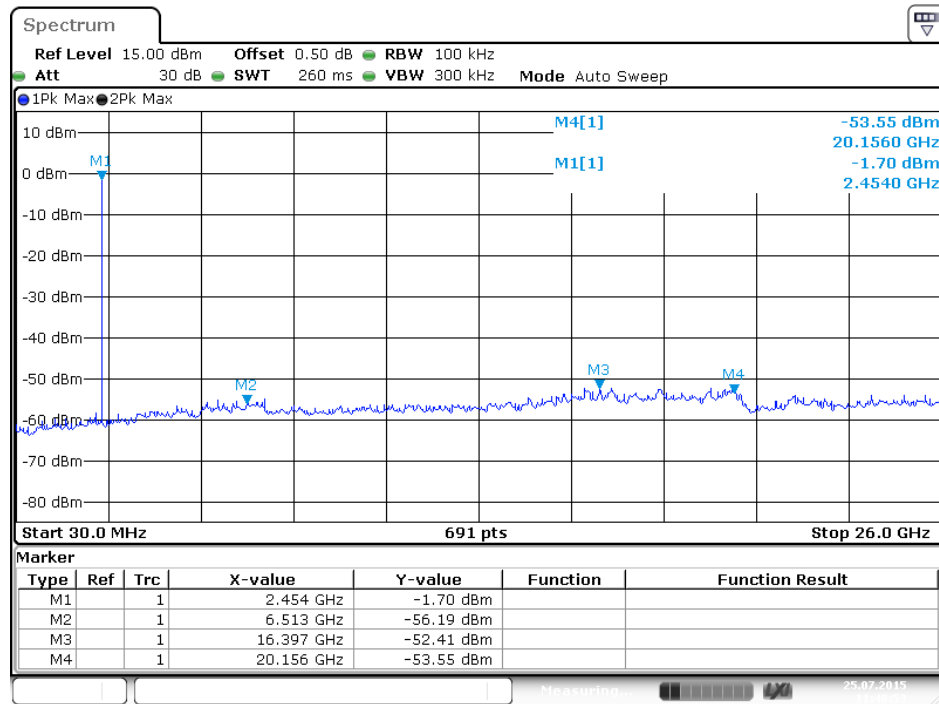

Date: 25.JUL.2015 11:48:54

BLE Channel High 2480MHz

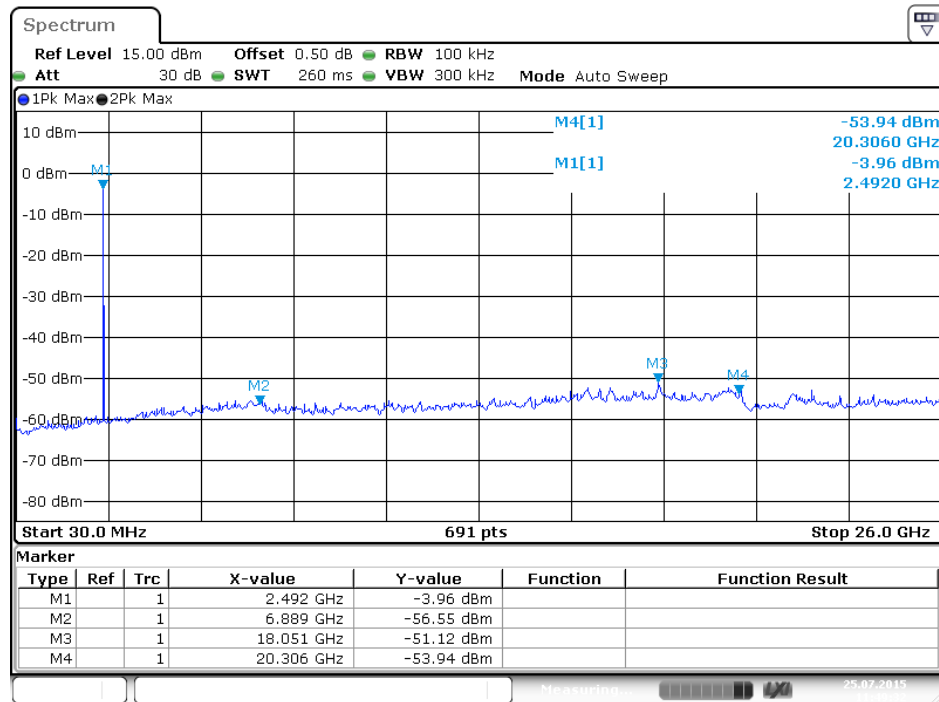

Date: 25.JUL.2015 11:49:32


12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

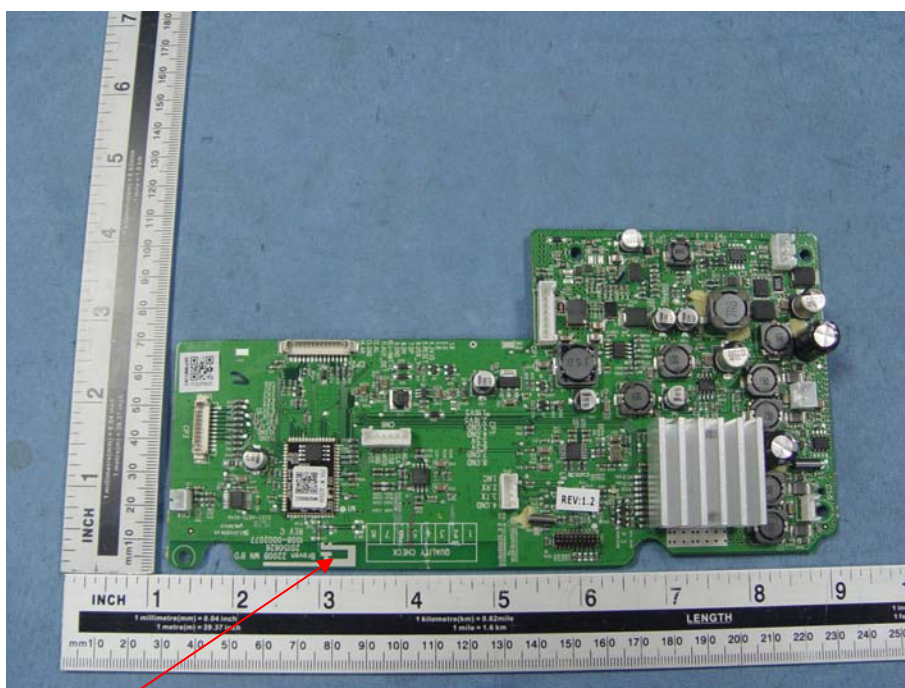

Antenna