

FCC PART 15.247
RSS-GEN, ISSUE 4, NOVEMBER 2014
RSS-247, ISSUE 2, FEBRUARY 2017
TEST REPORT

For

Braven LC

6001 Oak Canyon Irvine California United States 92618

FCC ID: Z7RBWS
IC: 10013A-BWS

Report Type: Original Report	Product Name: WIRELESS SPORT EARBUDS
Report Number: RDG171122005-00A	
Report Date: 2017-11-30	
Jerry Zhang	
EMC Manager	
Reviewed By:	<i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (I) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION	10
APPLICABLE STANDARD	10
FCC §15.203& RSS-GEN CLAUSE 8.3 - ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (A)& RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS.....	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	14
FCC §15.209, §15.205 & §15.247(D) & RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(A) (1)& RSS-247 CLAUSE 5.1 B) - CHANNEL SEPARATION.....	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	27
FCC §15.247(A) (1)& RSS-247 CLAUSE 5.1 B) ,RSS-GEN CLAUSE 6.6 –EMISSION BANDWIDTH.....	33

APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	34
FCC §15.247(A) (1) (III)& RSS-247 CLAUSE 5.1 D) - QUANTITY OF HOPPING CHANNEL	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	45
FCC §15.247(A) (1) (III)&RSS-247 CLAUSE 5.1 D) - TIME OF OCCUPANCY (DWELL TIME).....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	48
FCC §15.247(B) (1)& RSS-247 CLAUSE 5.4 B) - PEAK OUTPUT POWER MEASUREMENT.....	64
APPLICABLE STANDARD	64
TEST PROCEDURE	64
TEST EQUIPMENT LIST AND DETAILS.....	64
TEST DATA	64
FCC §15.247(D)& RSS-247 CLAUSE 5.5 - BAND EDGES TESTING	66
APPLICABLE STANDARD	66
TEST PROCEDURE	66
TEST EQUIPMENT LIST AND DETAILS.....	67
TEST DATA	67

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Braven LC*'s product, model number: *BRAVEN SPORT EARBUD(FCC ID:Z7RBWS, IC: 10013A-BWS)* (the "EUT") in this report was a *WIRELESS SPORT EARBUDS*, which was measured approximately: 66 mm (L) x 3 mm (W) x 2.5 mm (H), rated input voltage: DC 3.7V from battery DC 5V from USB port.

All measurement and test data in this report was gathered from production sample serial number: 171122005 (Assigned by BACL, Dongguan). The EUT was received on 2017-11-23.

Objective

This report is prepared on behalf of **Braven LC** in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209, 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: Z7RBWS.
ISED submissions with RSS-247 DTSS, IC: 10013A-BWS.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices". And RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L5662). And accredited to ISO/IEC 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacuter.

EUT Exercise Software

The software “Blue test3” was used for testing, which was provided by manufacturer. The maximum power level was configured as below table:

Test Software Version	Blue test3		
Test Frequency	2402MHz	2441MHz	2480MHz
GFSK	50	50	50
$\pi/4$ -QPSK	50	50	50
8-DPSK	50	50	50

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HUAWEI	Adapter	HW-050200C01	N/A

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	yes	No	1	Adapter	EUT

Block Diagram of Test Setup

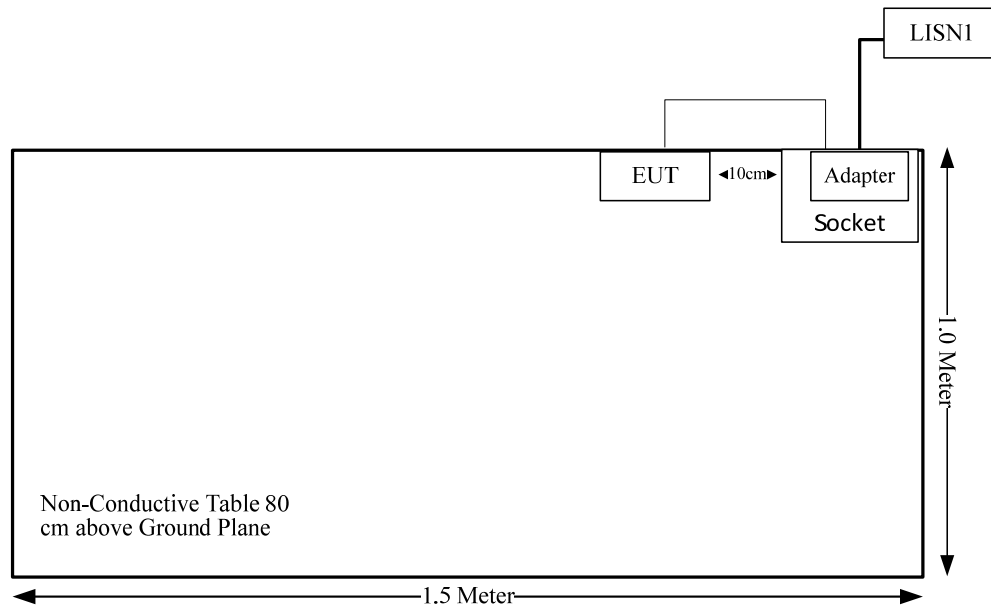

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
RSS-102 §2.5.1	Exemption Limits for Routine Evaluation - SAR Evaluation	Compliance
FCC§15.203 RSS-Gen Clause 8.3	Antenna Requirement	Compliance
FCC§15.207 (a) RSS-Gen Clause 8.8	Conducted Emissions	Compliance
FCC§15.205, §15.209, FCC §15.247(d) RSS-247 Clause 5.5, RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC§15.247 (a)(1) RSS-247 Clause 5.1 b) RSS-Gen Clause 6.6	Emission Bandwidth	Compliance
FCC§15.247(a)(1) RSS-247 Clause 5.1 b)	Channel Separation Test	Compliance
FCC§15.247(a)(1)(iii) RSS-247 Clause 5.1 d)	Time of Occupancy (Dwell Time)	Compliance
FCC§15.247(a)(1)(iii) RSS-247 Clause 5.1 d)	Quantity of hopping channel Test	Compliance
FCC§15.247(b)(1) RSS-247 Clause 5.4 b)	Peak Output Power Measurement	Compliance
FCC§15.247(d) RSS-247 Clause 5.5	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 5.5 dBm (3.55 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f}(\text{GHz})]$
 $= 3.55/5 \cdot (\sqrt{2.480}) = 1.1 < 3.0$

So the stand-alone SAR evaluation is not necessary.

RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION

Applicable Standard

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance⁴⁵

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤ 5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤ 300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥ 50 mm
≤ 300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Measurement Result:

The max tune-up conducted power is 5.5 dBm
Antenna Gain: 0 dBi, EIRP=5.5 dBm (3.55 mW)

The exemption power(P) limits for routine evaluation in 2402-2480MHz is:
 $(2480-2450)/(3500-2450)=(4-P)/(4-2)$
 $\Rightarrow P=3.94 \text{ mW}@2480 \text{ MHz}$

So the SAR evaluation can be exempted.

FCC §15.203& RSS-GEN CLAUSE 8.3 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §8.3, The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

Antenna Connector Construction

The EUT has one internal antenna arrangement, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a)& RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a) and RSS-GEN CLAUSE 8.8

EUT Setup

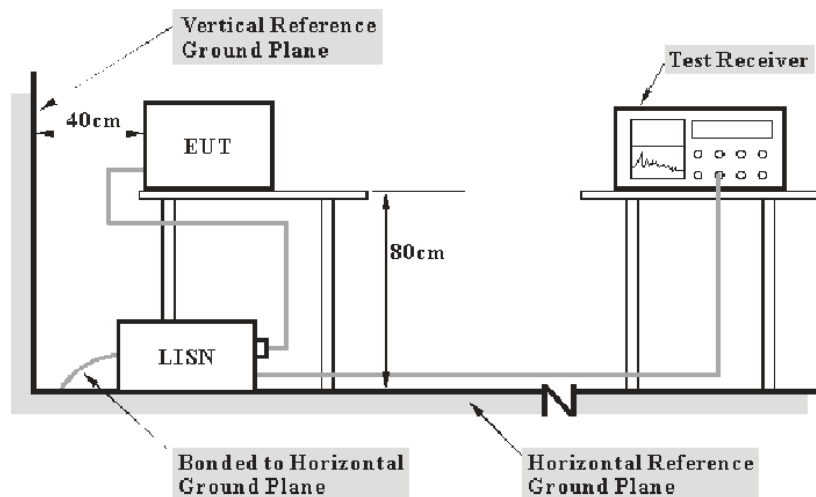

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen clause 8.8 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with 120 V/60 Hz AC power.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2016-12-08	2017-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-01	2018-09-01
R&S	Two-line V-network	ENV 216	3560.6550.12	2016-12-08	2017-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
Unknown	Coaxial Cable	2m	Con-1	2017-09-01	2018-09-01

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	34 %
ATM Pressure:	100.8 kPa

The testing was performed by Alex You on 2017-11-24.


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

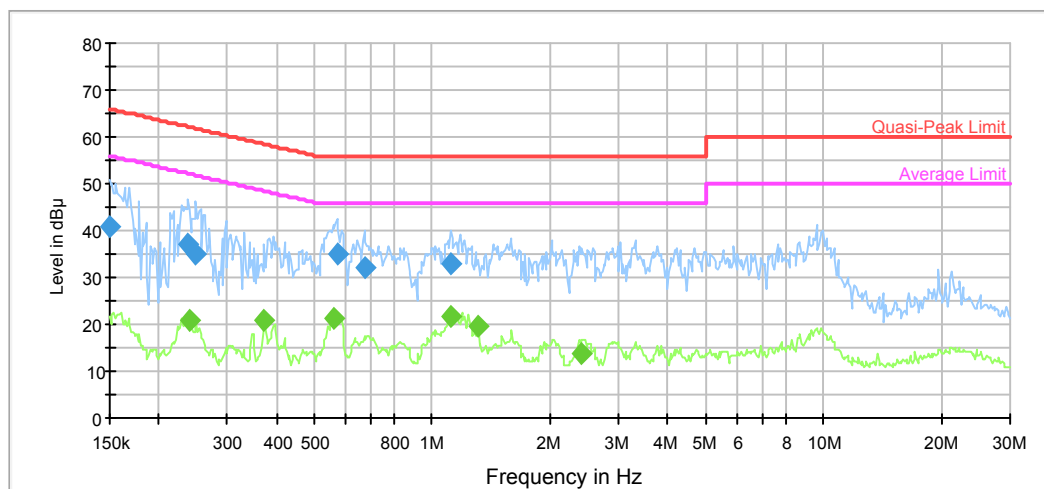

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	41.0	9.000	L1	11.2	25.0	66.0	Compliance
0.238124	37.1	9.000	L1	10.4	25.1	62.2	Compliance
0.249785	34.9	9.000	L1	10.3	26.9	61.8	Compliance
0.572086	35.1	9.000	L1	9.8	20.9	56.0	Compliance
0.670921	32.2	9.000	L1	9.8	23.8	56.0	Compliance
1.117238	32.7	9.000	L1	9.8	23.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.240029	21.0	9.000	L1	10.4	31.1	52.1	Compliance
0.372042	20.8	9.000	L1	10.0	27.7	48.5	Compliance
0.563041	21.3	9.000	L1	9.9	24.7	46.0	Compliance
1.117238	21.7	9.000	L1	9.8	24.3	46.0	Compliance
1.310256	19.7	9.000	L1	9.8	26.3	46.0	Compliance
2.420011	13.9	9.000	L1	9.8	32.1	46.0	Compliance

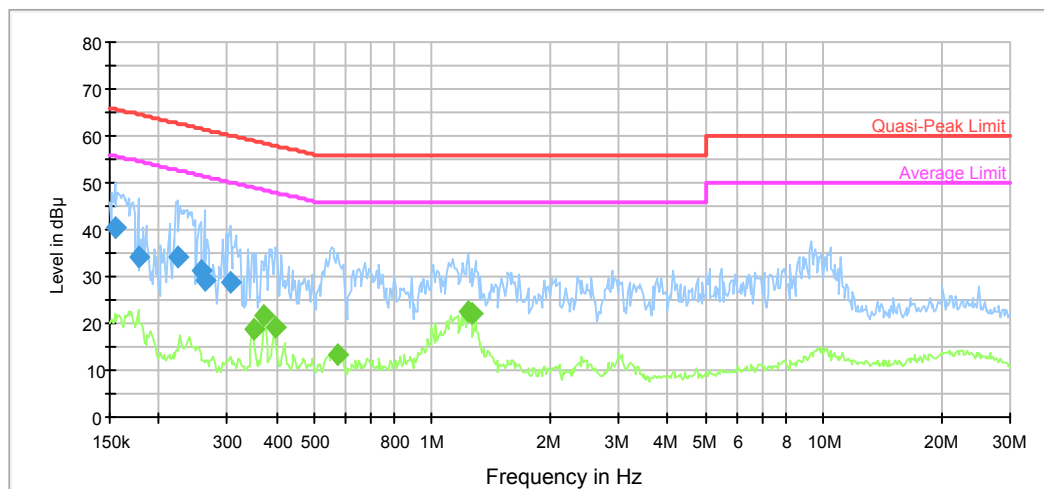AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.154858	40.2	9.000	N	11.1	25.5	65.7	Compliance
0.177322	34.1	9.000	N	10.8	30.5	64.6	Compliance
0.223418	34.3	9.000	N	10.5	28.4	62.7	Compliance
0.255827	31.5	9.000	N	10.3	30.1	61.6	Compliance
0.262017	29.2	9.000	N	10.3	32.2	61.4	Compliance
0.304845	28.6	9.000	N	10.1	31.5	60.1	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.349066	18.7	9.000	N	10.0	30.3	49.0	Compliance
0.372042	21.8	9.000	N	10.0	26.7	48.5	Compliance
0.396530	19.2	9.000	N	10.0	28.7	47.9	Compliance
0.572086	13.2	9.000	N	9.8	32.8	46.0	Compliance
1.239175	22.5	9.000	N	9.8	23.5	46.0	Compliance
1.259081	22.1	9.000	N	9.8	23.9	46.0	Compliance


FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10- SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 Clause 5.5, RSS-GEN Clause 8.10

EUT Setup

Below 1GHz:

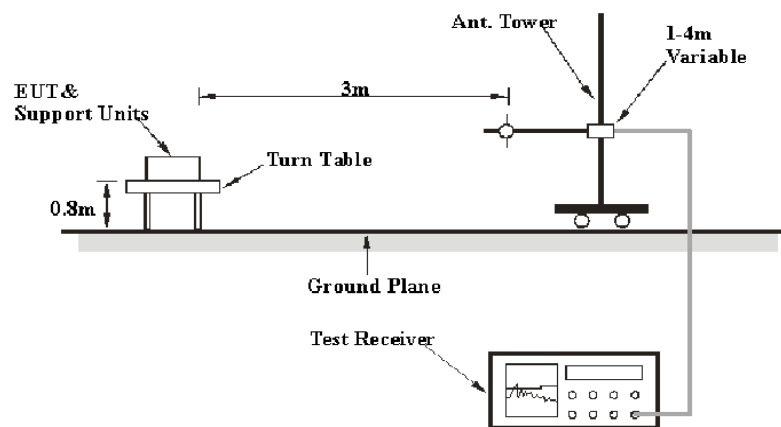

Above 1GHz:

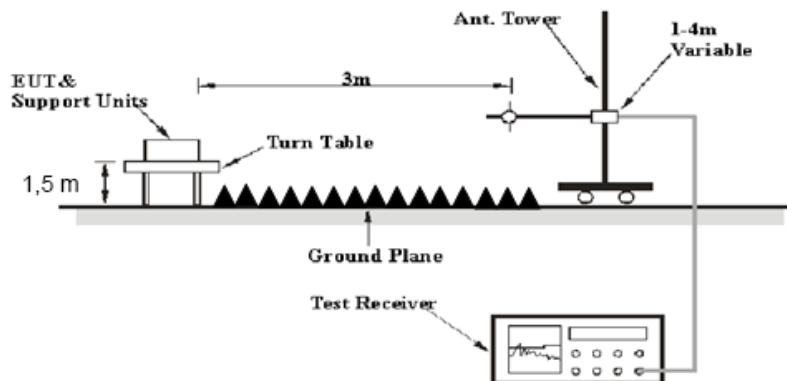

The radiated emission tests were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, 15.247 and RSS-247 Clause 5.5, RSS-GEN Clause 8.10 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Emissions under the limit more than 20 dB or below the noise floor have not be recorded.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2016-12-08	2017-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2017-06-16	2020-06-15
N/A	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Chengdu Ouli	Band Rejection Filter	2400-2483.5	002	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	21.9 °C
Relative Humidity:	41 %
ATM Pressure:	101.4 kPa

** The testing was performed by Kakaxi Chen on 2017-11-27.*


Test Mode: Transmitting

1) 30MHz-1GHz(GFSK Middle channel was the worst)

Horizontal:

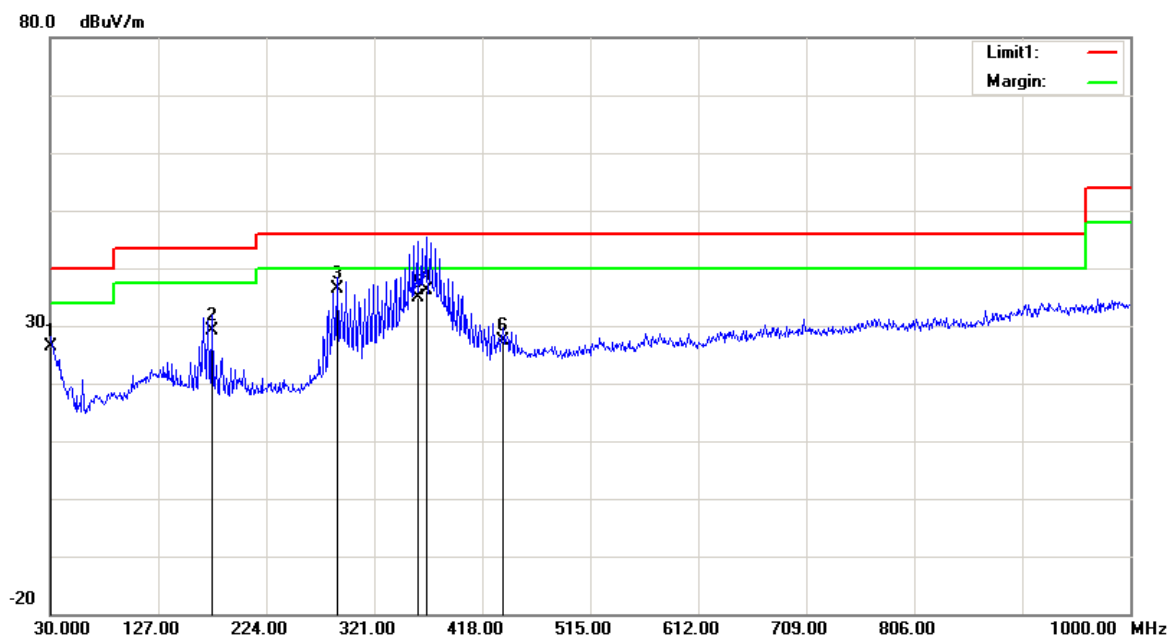

Frequency (MHz)	Receiver Reading (dBuV)	Measurement	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	25.22	QP	1.08	26.30	40.00	13.70
175.5000	36.81	QP	-7.71	29.10	43.50	14.40
288.0200	40.32	QP	-3.92	36.40	46.00	9.60
367.5600	39.05	QP	-2.85	36.20	46.00	9.80
359.8000	37.93	QP	-2.93	35.00	46.00	11.00
436.4300	29.22	QP	-1.72	27.50	46.00	18.50

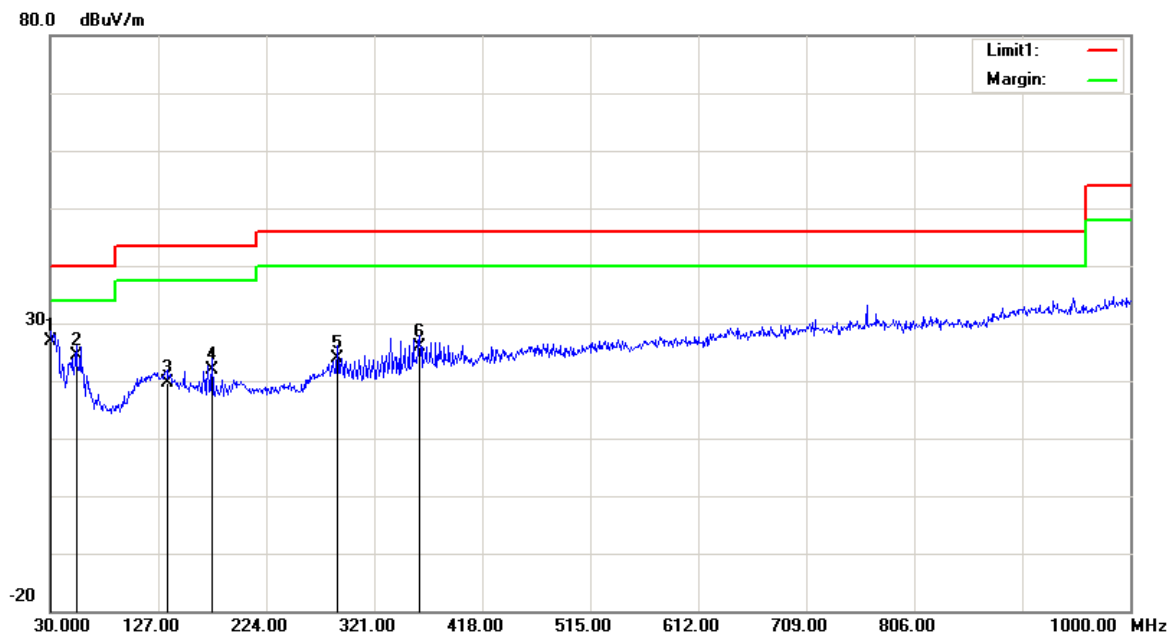Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Measurement	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	25.72	QP	1.08	26.80	40.00	13.20
53.2800	36.57	QP	-12.27	24.30	40.00	15.70
134.7600	25.20	QP	-5.50	19.70	43.50	23.80
175.5000	29.51	QP	-7.71	21.80	43.50	21.70
288.0200	27.92	QP	-3.92	24.00	46.00	22.00
361.7400	28.70	QP	-2.90	25.80	46.00	20.20

2)1GHz-25GHz:***BDR Mode (GFSK):***

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Measurement	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402.00	70.21	PK	H	28.10	1.80	0.00	100.11	N/A	N/A
2402.00	57.23	AV	H	28.10	1.80	0.00	87.13	N/A	N/A
2402.00	67.11	PK	V	28.10	1.80	0.00	97.01	N/A	N/A
2402.00	55.47	AV	V	28.10	1.80	0.00	85.37	N/A	N/A
2390.00	24.41	PK	H	28.08	1.80	0.00	54.29	74.00	19.71
2390.00	13.21	AV	H	28.08	1.80	0.00	43.09	54.00	10.91
4804.00	65.03	PK	H	32.91	3.17	37.20	63.91	74.00	10.09
4804.00	52.67	AV	H	32.91	3.17	37.20	51.55	54.00	2.45
7206.00	47.9	PK	H	35.74	4.82	37.23	51.23	74.00	22.77
7206.00	36.42	AV	H	35.74	4.82	37.23	39.75	54.00	14.25
Middle Channel: 2441 MHz									
2441.00	72.77	PK	H	28.18	1.82	0.00	102.77	N/A	N/A
2441.00	52.67	AV	H	28.18	1.82	0.00	82.67	N/A	N/A
2441.00	68.83	PK	V	28.18	1.82	0.00	98.83	N/A	N/A
2441.00	56.47	AV	V	28.18	1.82	0.00	86.47	N/A	N/A
4882.00	65.58	PK	H	33.06	3.27	37.21	64.7	74.00	9.3
4882.00	54.01	AV	H	33.06	3.27	37.21	52.13	54.00	1.87
7323.00	51.37	PK	H	36.04	4.62	37.38	54.65	74.00	19.35
7323.00	40.37	AV	H	36.04	4.62	37.38	43.65	54.00	10.35
5678.00	47.45	PK	H	34.17	3.66	37.40	47.88	74.00	26.12
5678.00	36.58	AV	H	34.17	3.66	37.40	37.01	54.00	16.99
6230.00	47.15	PK	H	34.25	4.25	37.21	48.44	74.00	25.56
6230.00	36.27	AV	H	34.25	4.25	37.21	37.56	54.00	16.44
High Channel: 2480 MHz									
2480.00	71.83	PK	H	28.26	1.84	0.00	101.93	N/A	N/A
2480.00	58.35	AV	H	28.26	1.84	0.00	88.45	N/A	N/A
2480.00	68.11	PK	V	28.26	1.84	0.00	98.21	N/A	N/A
2480.00	56.43	AV	V	28.26	1.84	0.00	86.53	N/A	N/A
2483.50	25.34	PK	H	28.27	1.84	0.00	55.45	74.00	18.55
2483.50	14.21	AV	H	28.27	1.84	0.00	44.32	54.00	9.68
4960.00	63.24	PK	H	33.22	3.23	37.25	62.44	74.00	11.56
4960.00	51.29	AV	H	33.22	3.23	37.25	50.49	54.00	3.51
7440.00	51.02	PK	H	36.34	4.41	37.52	54.25	74.00	19.75
7440.00	39.97	AV	H	36.34	4.41	37.52	43.2	54.00	10.8
5321.00	46.58	PK	H	33.81	3.45	37.34	46.5	74.00	27.5
5321.00	35.46	AV	H	33.81	3.45	37.34	35.38	54.00	18.62




EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Measurement	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402.00	67.15	PK	H	28.10	1.80	0.00	97.05	N/A	N/A
2402.00	57.61	AV	H	28.10	1.80	0.00	87.51	N/A	N/A
2402.00	64.44	PK	V	28.10	1.80	0.00	94.34	N/A	N/A
2402.00	52.11	AV	V	28.10	1.80	0.00	82.01	N/A	N/A
2390.00	24.68	PK	H	28.08	1.80	0.00	54.56	74.00	19.44
2390.00	13.24	AV	H	28.08	1.80	0.00	43.12	54.00	10.88
4804.00	59.41	PK	H	32.91	3.17	37.20	58.29	74.00	15.71
4804.00	48.11	AV	H	32.91	3.17	37.20	46.99	54.00	7.01
7206.00	47.16	PK	H	35.74	4.82	37.23	50.49	74.00	23.51
7206.00	36.39	AV	H	35.74	4.82	37.23	39.72	54.00	14.28
5871.00	45.36	PK	H	34.25	3.77	37.24	46.14	74.00	27.86
5871.00	35.14	AV	H	34.25	3.77	37.24	35.92	54.00	18.08
Middle Channel: 2441 MHz									
2441.00	69.46	PK	H	28.18	1.82	0.00	99.46	N/A	N/A
2441.00	58.64	AV	H	28.18	1.82	0.00	88.64	N/A	N/A
2441.00	67.13	PK	V	28.18	1.82	0.00	97.13	N/A	N/A
2441.00	56.14	AV	V	28.18	1.82	0.00	86.14	N/A	N/A
4882.00	61.49	PK	H	33.06	3.27	37.21	60.61	74.00	13.39
4882.00	49.36	AV	H	33.06	3.27	37.21	48.48	54.00	5.52
7323.00	49.44	PK	H	36.04	4.62	37.38	52.72	74.00	21.28
7323.00	38.32	AV	H	36.04	4.62	37.38	41.6	54.00	12.4
5477.00	45.68	PK	H	34.06	3.56	37.34	45.96	74.00	28.04
5477.00	45.26	AV	H	34.06	3.56	37.34	45.54	54.00	8.46
6102.00	45.37	PK	H	34.28	4.02	37.28	46.39	74.00	27.61
6102.00	35.28	AV	H	34.28	4.02	37.28	36.3	54.00	17.7
High Channel: 2480 MHz									
2480.00	69.66	PK	H	28.26	1.84	0.00	99.76	N/A	N/A
2480.00	56.58	AV	H	28.26	1.84	0.00	86.68	N/A	N/A
2480.00	66.5	PK	V	28.26	1.84	0.00	96.6	N/A	N/A
2480.00	54.23	AV	V	28.26	1.84	0.00	84.33	N/A	N/A
2483.50	27.33	PK	H	28.27	1.84	0.00	57.44	74.00	16.56
2483.50	14.37	AV	H	28.27	1.84	0.00	44.48	54.00	9.52
4960.00	59.46	PK	H	33.22	3.23	37.25	58.66	74.00	15.34
4960.00	48.21	AV	H	33.22	3.23	37.25	47.41	54.00	6.59
7440.00	47.35	PK	H	36.34	4.41	37.52	50.58	74.00	23.42
7440.00	36.27	AV	H	36.34	4.41	37.52	39.5	54.00	14.5
4658.00	45.23	PK	H	32.62	3.07	37.10	43.82	74.00	30.18
4658.00	35.4	AV	H	32.62	3.07	37.10	33.99	54.00	20.01


EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Measurement	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402.00	67.52	PK	H	28.10	1.80	0.00	97.42	N/A	N/A
2402.00	54.38	AV	H	28.10	1.80	0.00	84.28	N/A	N/A
2402.00	64.61	PK	V	28.10	1.80	0.00	94.51	N/A	N/A
2402.00	54.01	AV	V	28.10	1.80	0.00	83.91	N/A	N/A
2390.00	25.36	PK	H	28.08	1.80	0.00	55.24	74.00	18.76
2390.00	13.49	AV	H	28.08	1.80	0.00	43.37	54.00	10.63
4804.00	59.14	PK	H	32.91	3.17	37.20	58.02	74.00	15.98
4804.00	47.67	AV	H	32.91	3.17	37.20	46.55	54.00	7.45
7206.00	45.68	PK	H	35.74	4.82	37.23	49.01	74.00	24.99
7206.00	34.88	AV	H	35.74	4.82	37.23	38.21	54.00	15.79
5845.00	45.33	PK	H	34.24	3.75	37.25	46.07	74.00	27.93
5845.00	35.02	AV	H	34.24	3.75	37.25	35.76	54.00	18.24
Middle Channel: 2441 MHz									
2441.00	70.96	PK	H	28.18	1.82	0.00	100.96	N/A	N/A
2441.00	57.69	AV	H	28.18	1.82	0.00	87.69	N/A	N/A
2441.00	66.73	PK	V	28.18	1.82	0.00	96.73	N/A	N/A
2441.00	54.29	AV	V	28.18	1.82	0.00	84.29	N/A	N/A
4882.00	63.49	PK	H	33.06	3.27	37.21	62.61	74.00	11.39
4882.00	52.01	AV	H	33.06	3.27	37.21	51.13	54.00	2.87
7323.00	50.18	PK	H	36.04	4.62	37.38	53.46	74.00	20.54
7323.00	39.24	AV	H	36.04	4.62	37.38	42.52	54.00	11.48
5874.00	45.29	PK	H	34.25	3.77	37.24	46.07	74.00	27.93
5874.00	35.13	AV	H	34.25	3.77	37.24	35.91	54.00	18.09
4745.00	45.16	PK	H	32.79	3.09	37.13	43.91	74.00	30.09
4745.00	35.14	AV	H	32.79	3.09	37.13	33.89	54.00	20.11
High Channel: 2480 MHz									
2480.00	70.11	PK	H	28.26	1.84	0.00	100.21	N/A	N/A
2480.00	54.39	AV	H	28.26	1.84	0.00	84.49	N/A	N/A
2480.00	66.51	PK	V	28.26	1.84	0.00	96.61	N/A	N/A
2480.00	54.33	AV	V	28.26	1.84	0.00	84.43	N/A	N/A
2483.50	25.31	PK	H	28.27	1.84	0.00	55.42	74.00	18.58
2483.50	13.97	AV	H	28.27	1.84	0.00	44.08	54.00	9.92
4960.00	61.47	PK	H	33.22	3.23	37.25	60.67	74.00	13.33
4960.00	48.66	AV	H	33.22	3.23	37.25	47.86	54.00	6.14
7440.00	47.26	PK	H	36.34	4.41	37.52	50.49	74.00	23.51
7440.00	36.47	AV	H	36.34	4.41	37.52	39.7	54.00	14.3
5874.00	45.36	PK	H	34.25	3.77	37.24	46.14	74.00	27.86
5874.00	35.16	AV	H	34.25	3.77	37.24	35.94	54.00	18.06

Worst mode Plots(GFSK, middle channel)

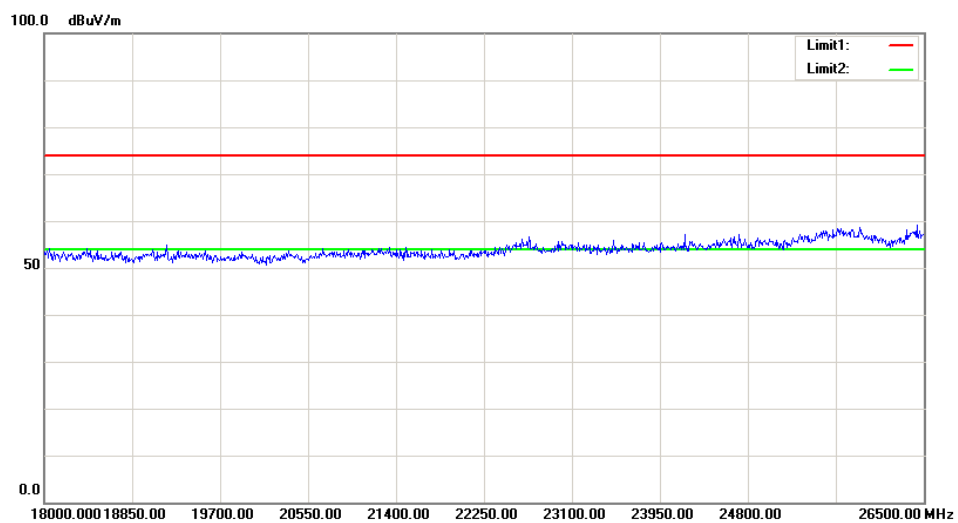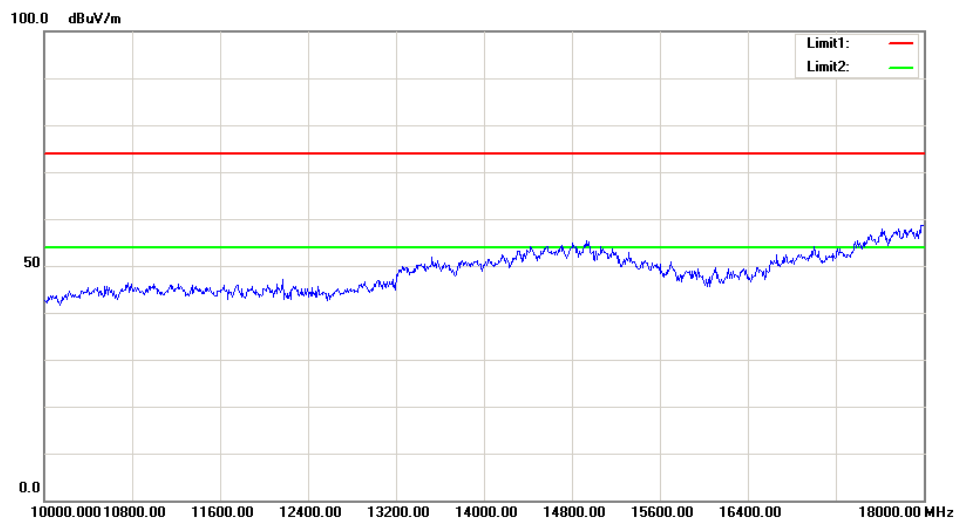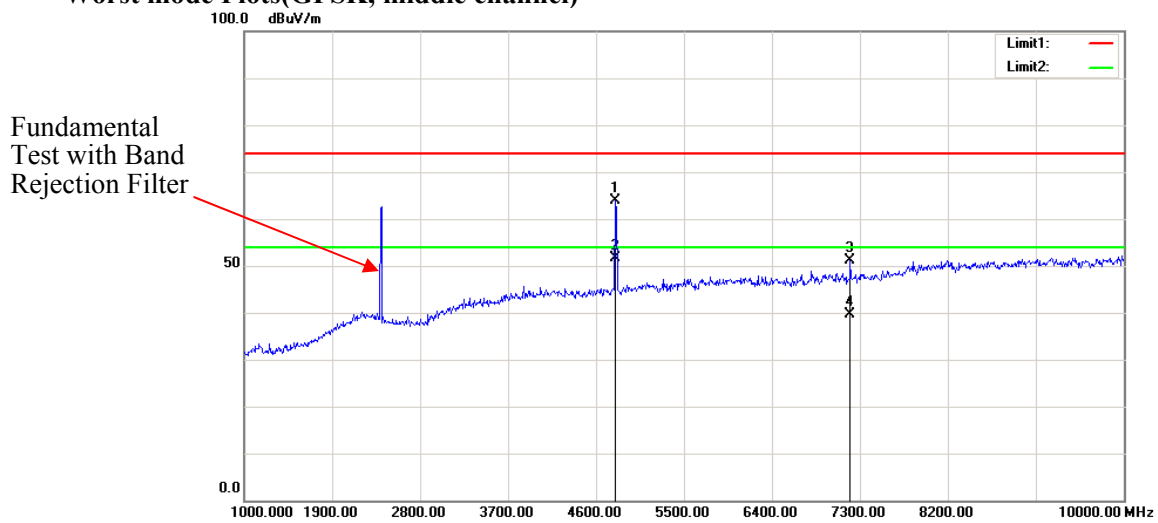

Vertical:

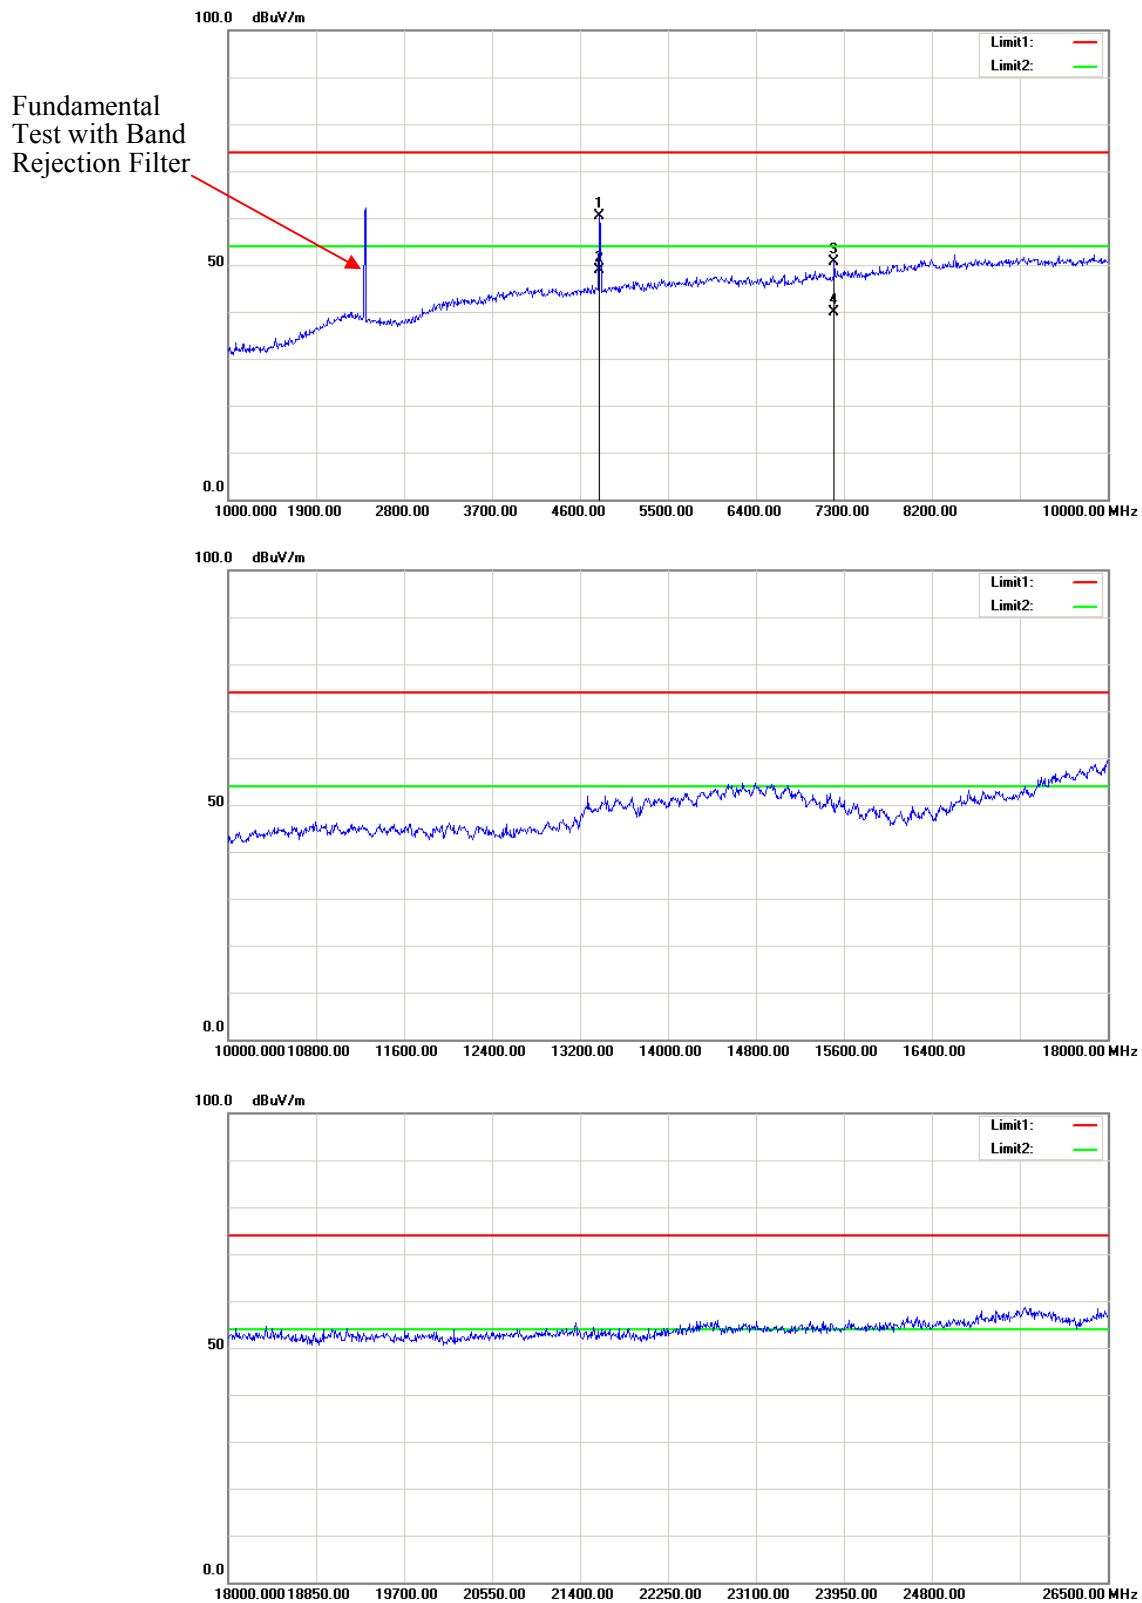

FCC §15.247(a) (1)& RSS-247 CLAUSE 5.1 b) - CHANNEL SEPARATION**Applicable Standard**

According to FCC §15.247(a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 Clause 5.1 b)

- b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	24.8°C
Relative Humidity:	40 %
ATM Pressure:	100.8 kPa

* The testing was performed by Swim Lv on 2017-11-24.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
<i>BDR</i> (<i>GFSK</i>)	Low	2402	1.004	0.61
	Middle	2441	1.004	0.59
	High	2480	1.004	0.59
EDR ($\pi/4$ -DQPSK)	Low	2402	1.000	0.82
	Middle	2441	1.004	0.81
	High	2480	1.004	0.82
<i>EDR</i> (<i>8-DPSK</i>)	Low	2402	1.000	0.81
	Middle	2441	1.004	0.81
	High	2480	0.996	0.81

Note: Limit = $(2/3) \times 20\text{dB bandwidth}$


BDR Mode (GFSK):

Low Channel

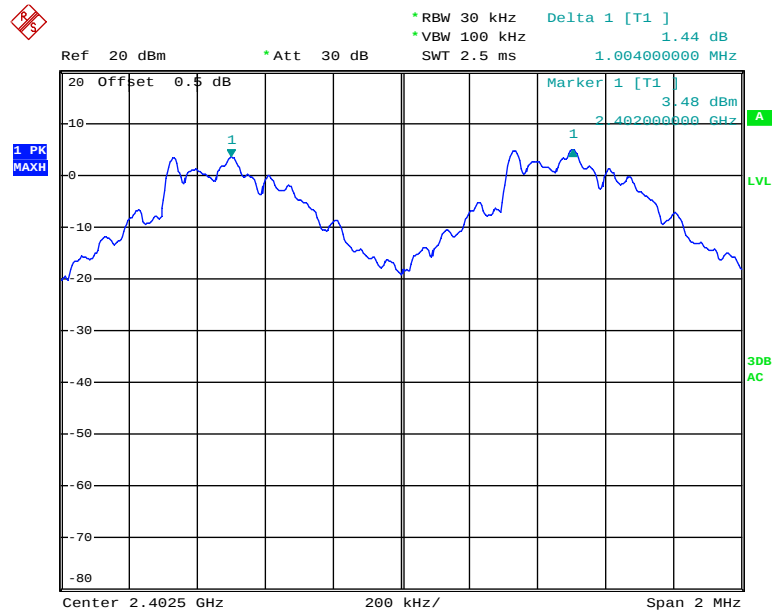


Date: 24.NOV.2017 15:31:15

Middle Channel

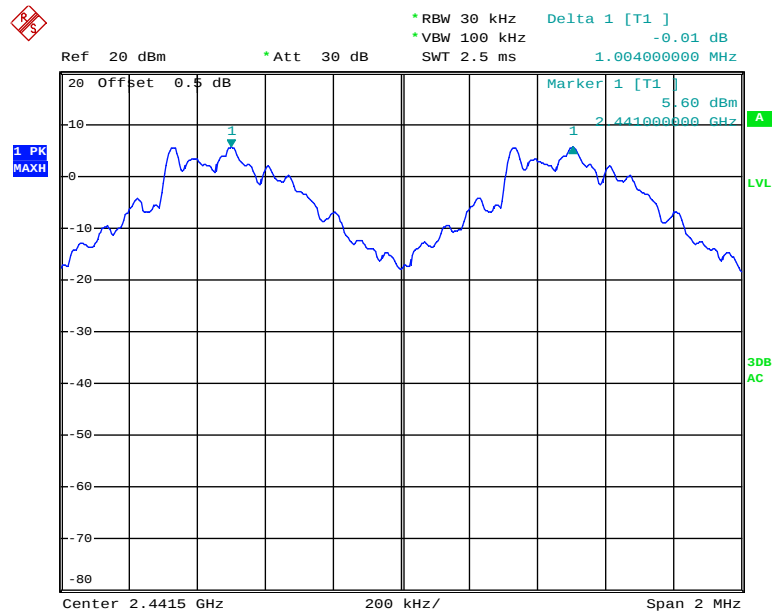

Date: 24.NOV.2017 15:32:20


High Channel

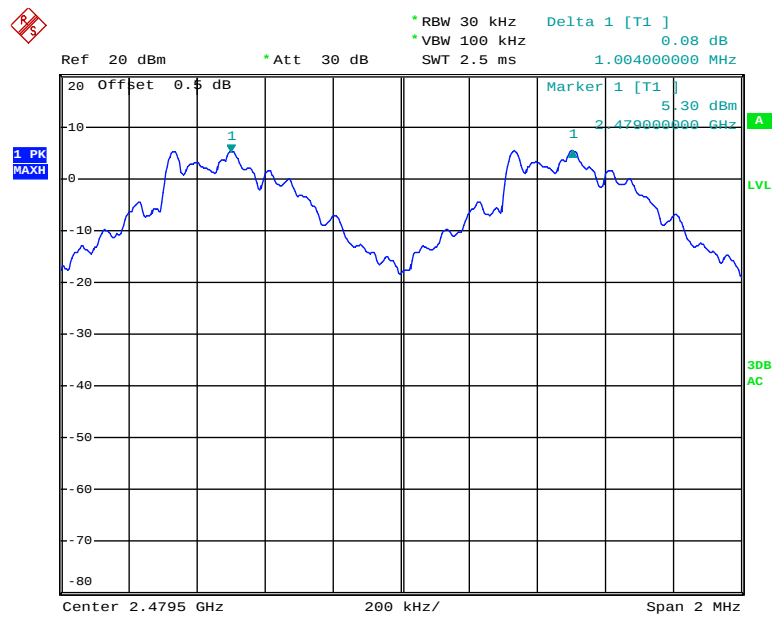

Date: 24.NOV.2017 15:32:59


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

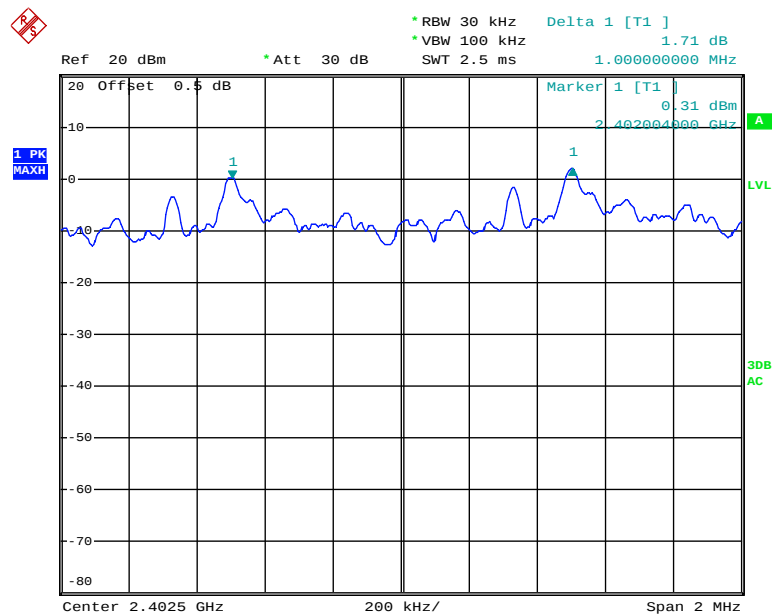


Date: 24.NOV.2017 15:35:00

Middle Channel

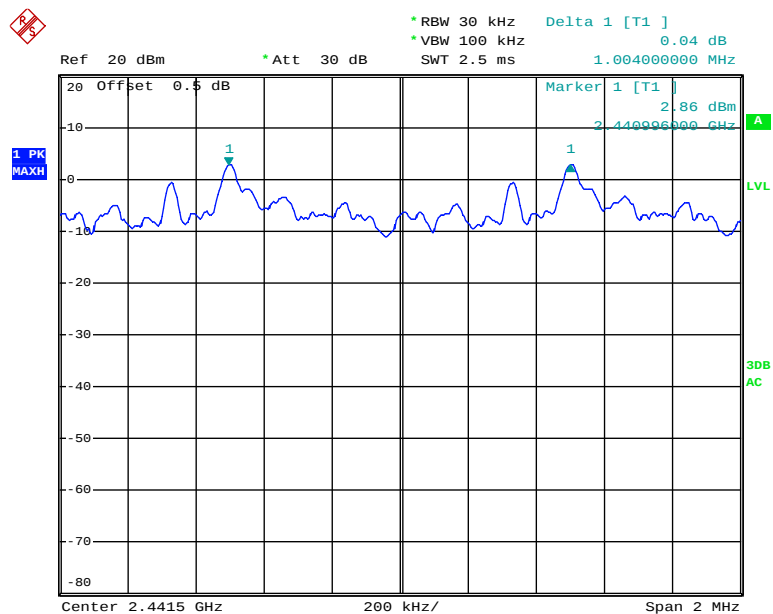

Date: 24.NOV.2017 15:34:21


High Channel

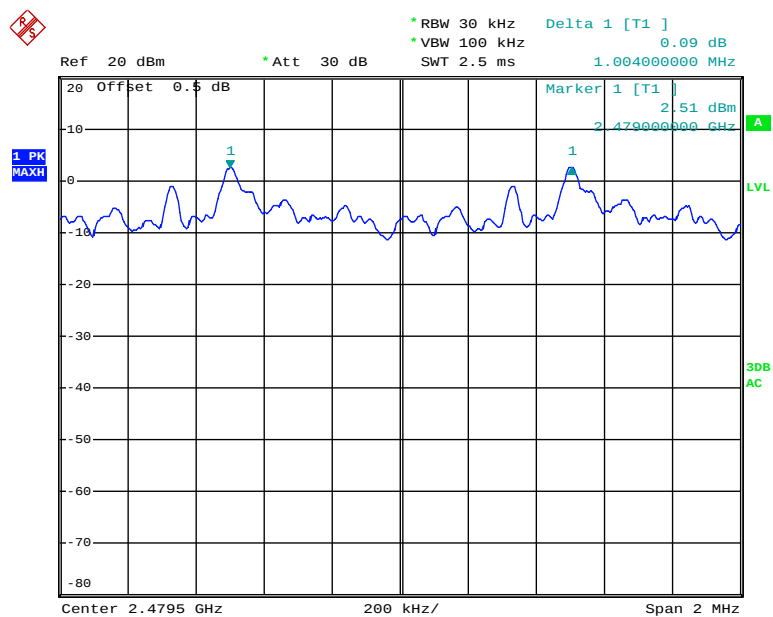

Date: 24.NOV.2017 15:33:48


EDR Mode (8-DPSK):

Low Channel

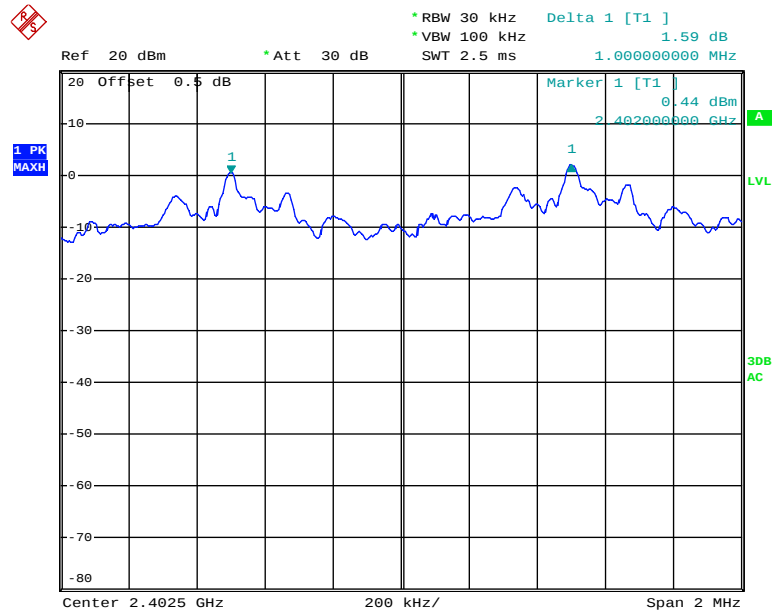


Date: 24.NOV.2017 15:35:48

Middle Channel

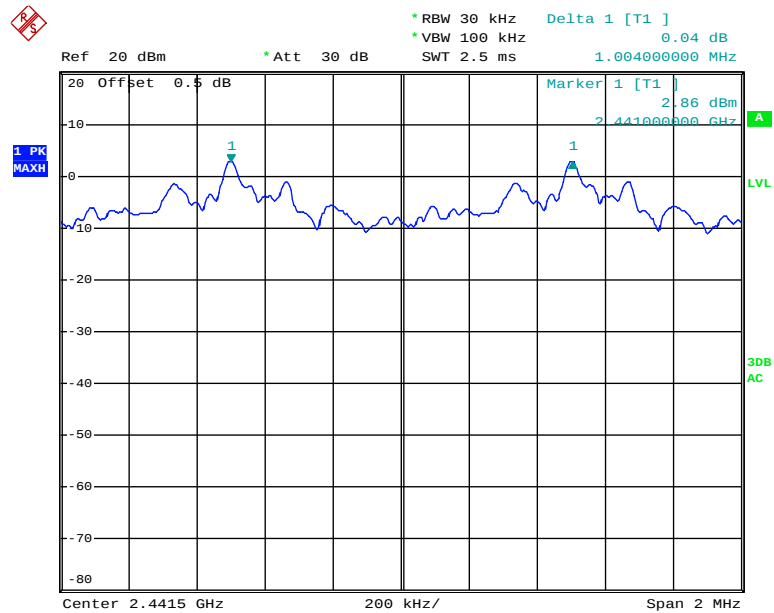

Date: 24.NOV.2017 15:36:21

High Channel

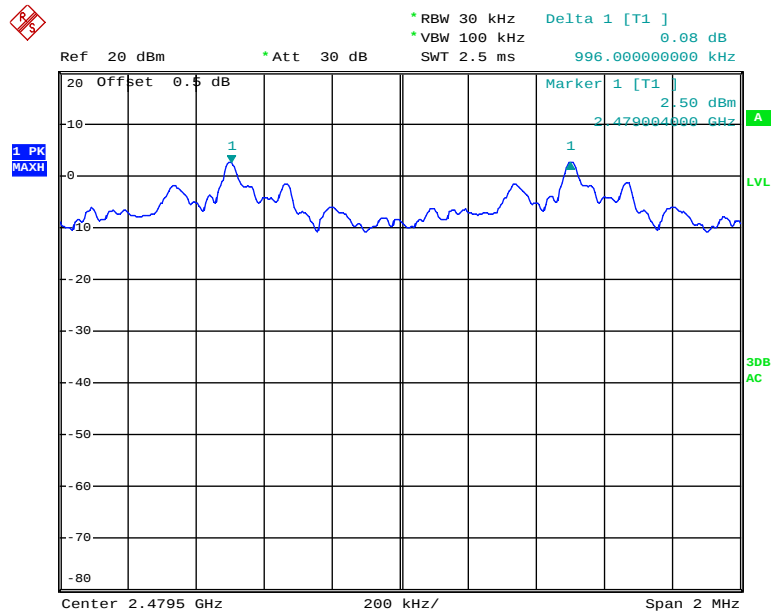

Date: 24.NOV.2017 15:36:56

**FCC §15.247(a) (1)& RSS-247 CLAUSE 5.1 b) ,RSS-GEN CLAUSE 6.6 –
EMISSION BANDWIDTH****Applicable Standard**

According to FCC §15.247(a) (1)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 Clause 5.1 b)

- b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.8°C
Relative Humidity:	40 %
ATM Pressure:	100.8 kPa


* The testing was performed by Swim Lv on 2017-11-24.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% occupied Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.908	0.836
	Middle	2441	0.888	0.836
	High	2480	0.892	0.848
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.224	1.152
	Middle	2441	1.218	1.158
	High	2480	1.224	1.158
EDR Mode (8-DPSK)	Low	2402	1.212	1.152
	Middle	2441	1.212	1.140
	High	2480	1.212	1.140

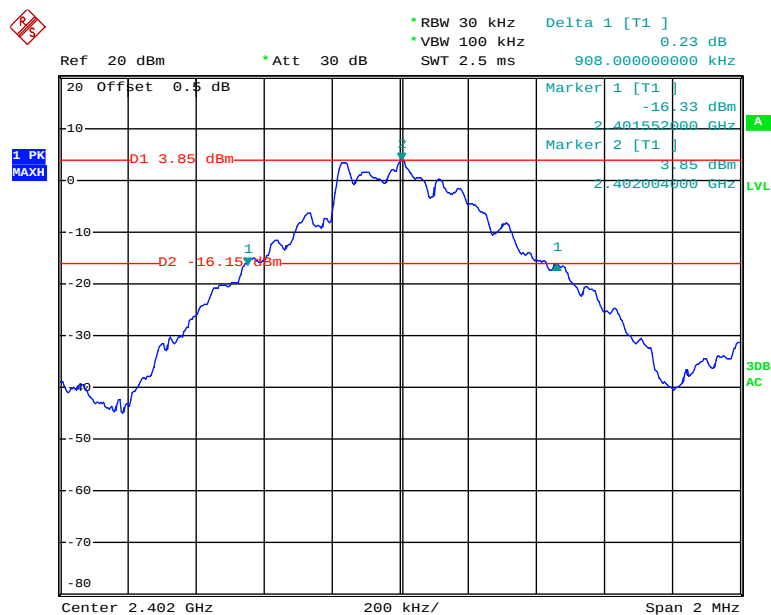
*BDR Mode (GFSK):***Low Channel**

Date: 24.NOV.2017 15:10:44

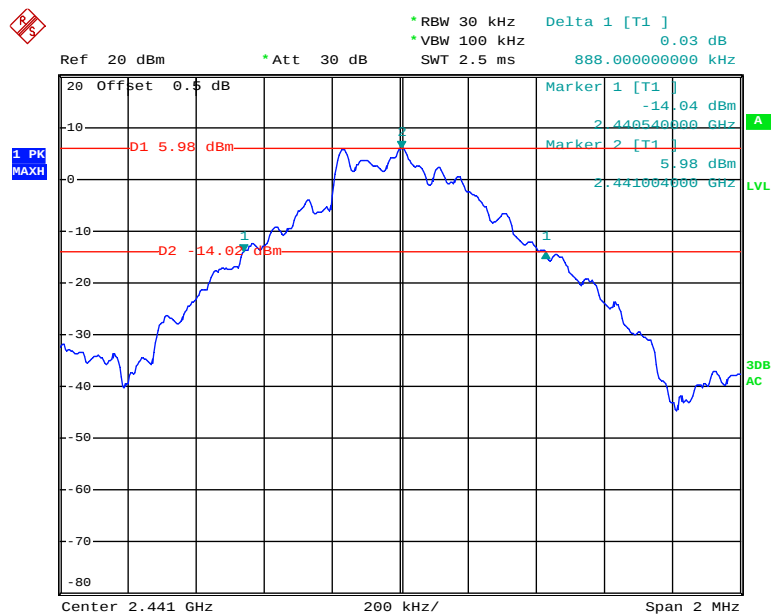Middle Channel

Date: 24.NOV.2017 15:12:01


High Channel

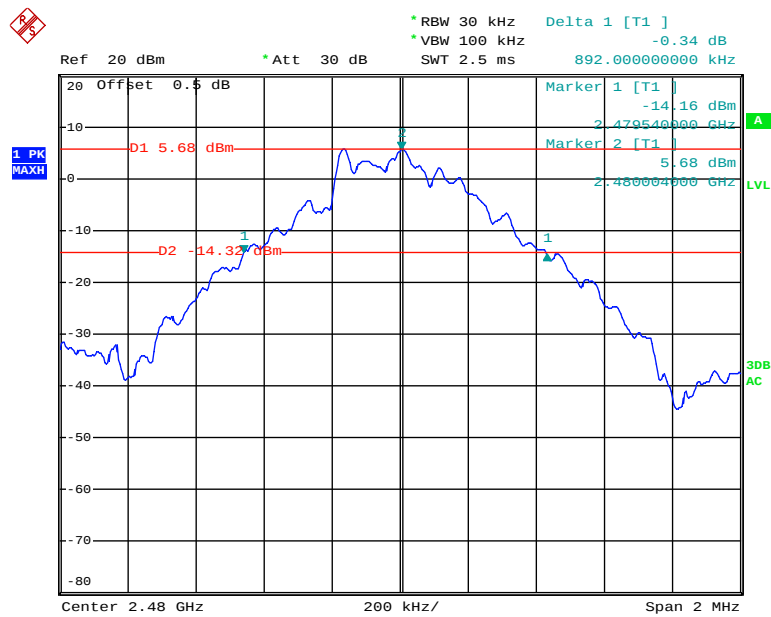

Date: 24.NOV.2017 15:13:45


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

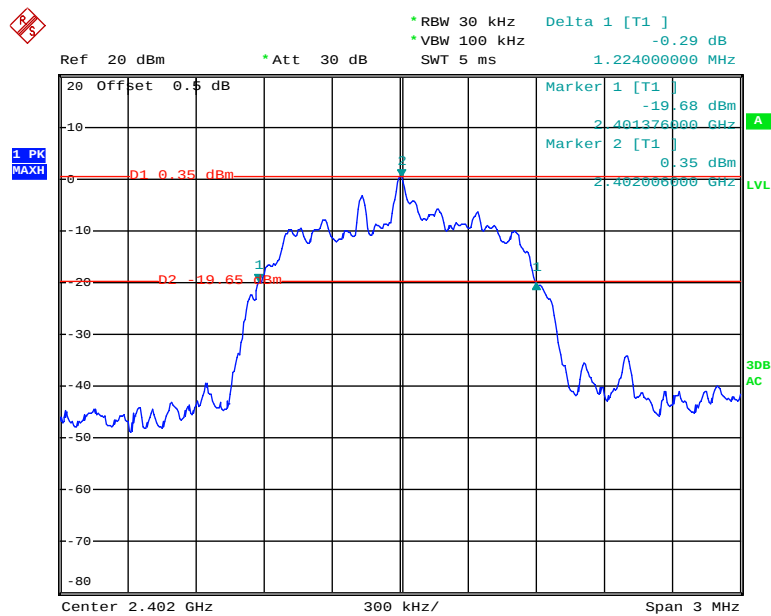


Date: 24.NOV.2017 15:47:45

Middle Channel

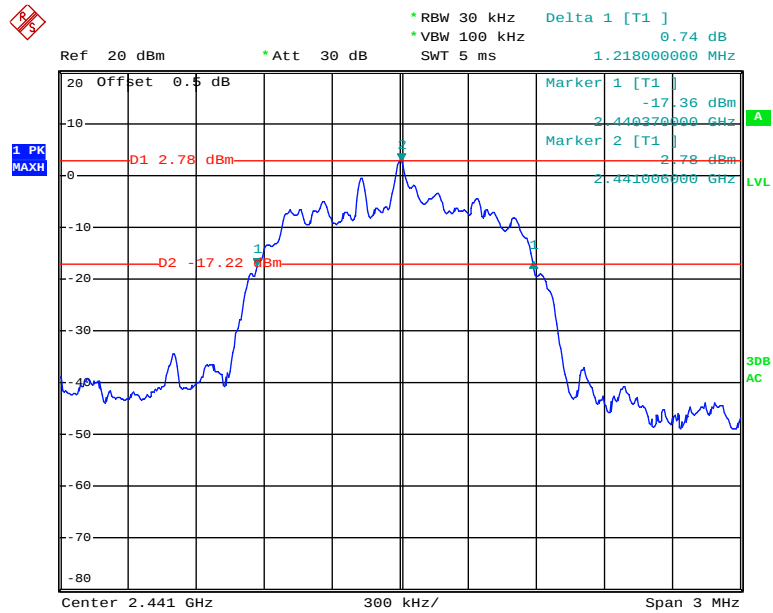

Date: 24.NOV.2017 15:48:47


High Channel

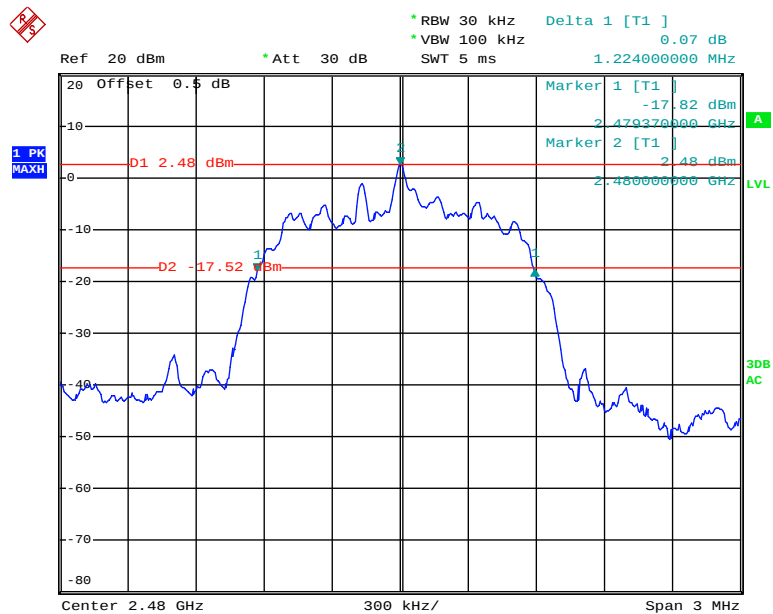

Date: 24.NOV.2017 15:49:33


EDR Mode (8-DPSK):

Low Channel

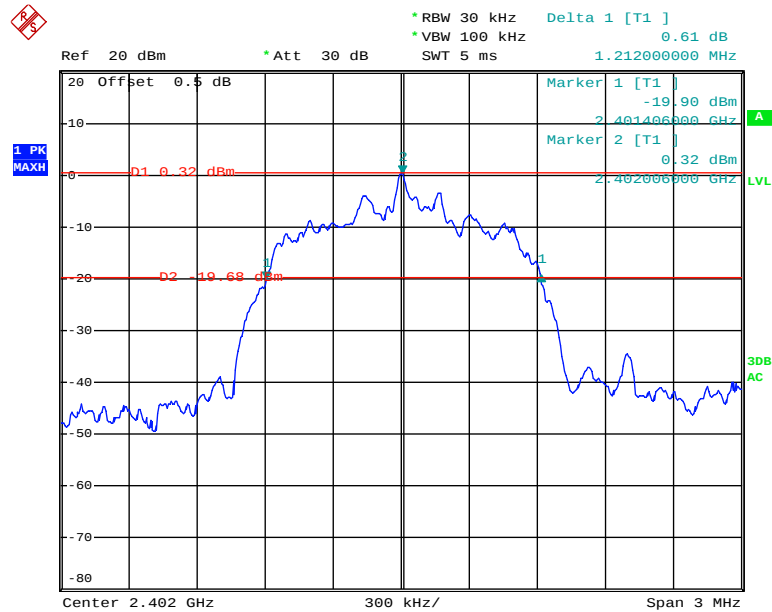


Date: 24.NOV.2017 15:53:02

Middle Channel

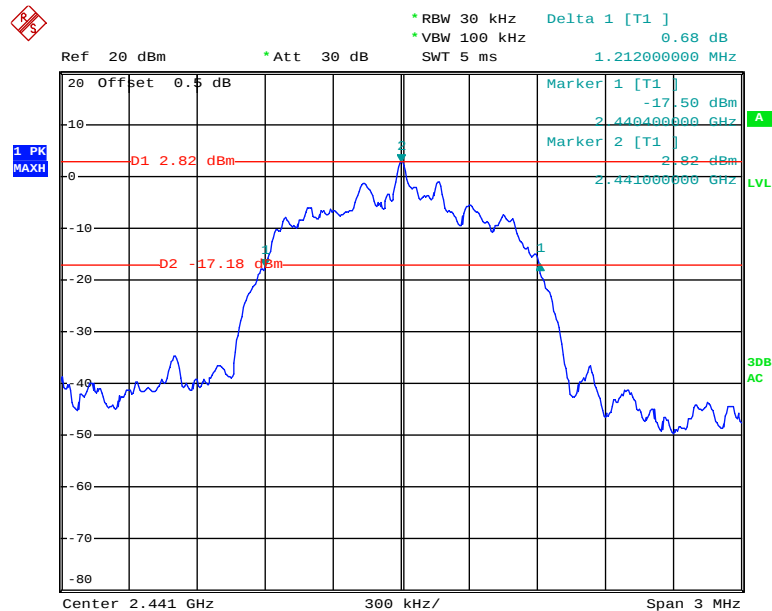

Date: 24.NOV.2017 15:52:14


High Channel

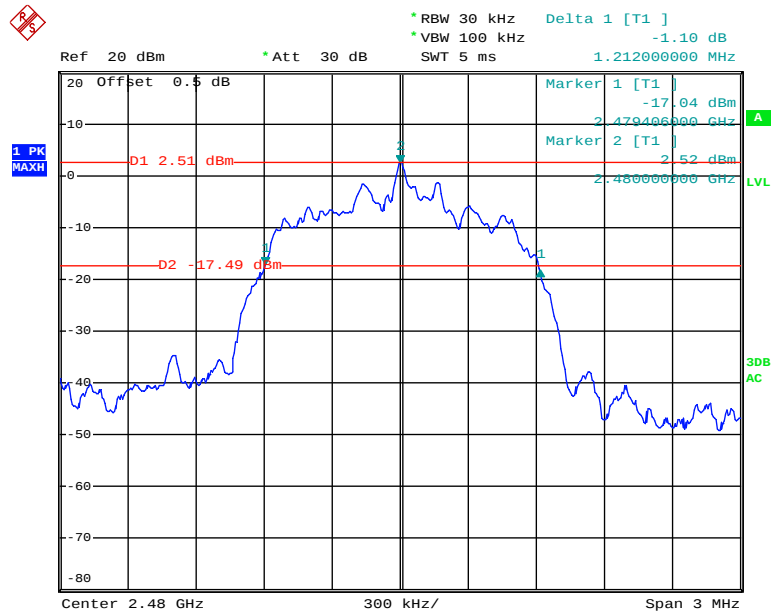

Date: 24.NOV.2017 15:51:06


99% Occupied Bandwidth:
BDR Mode (GFSK):

Low Channel

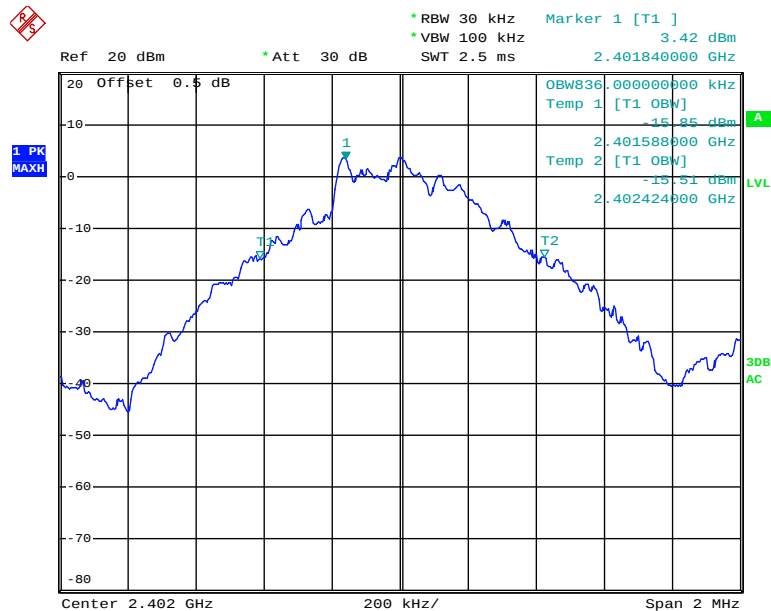


Date: 24.NOV.2017 15:10:56

Middle Channel

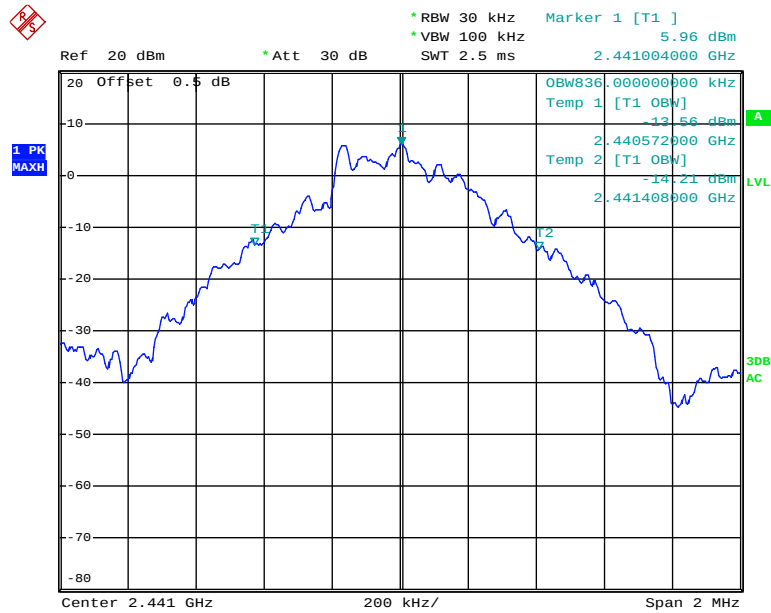

Date: 24.NOV.2017 15:12:12


High Channel

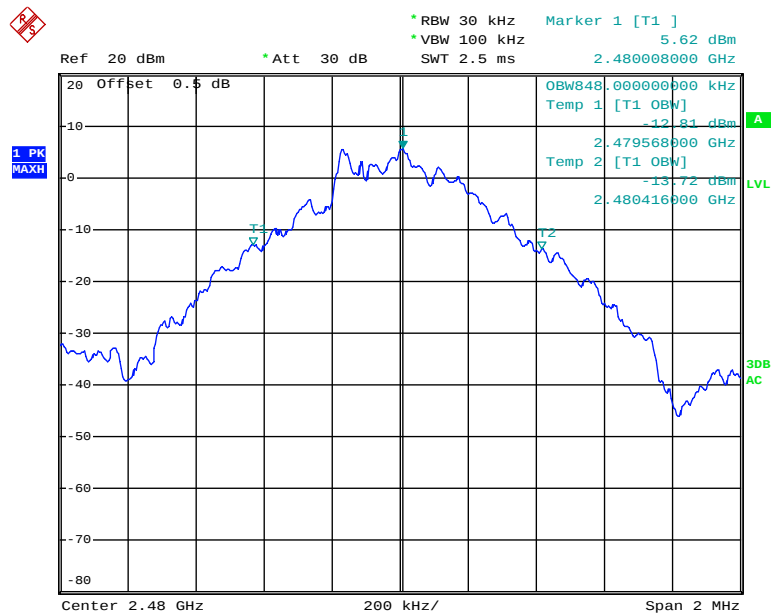

Date: 24.NOV.2017 15:13:55


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

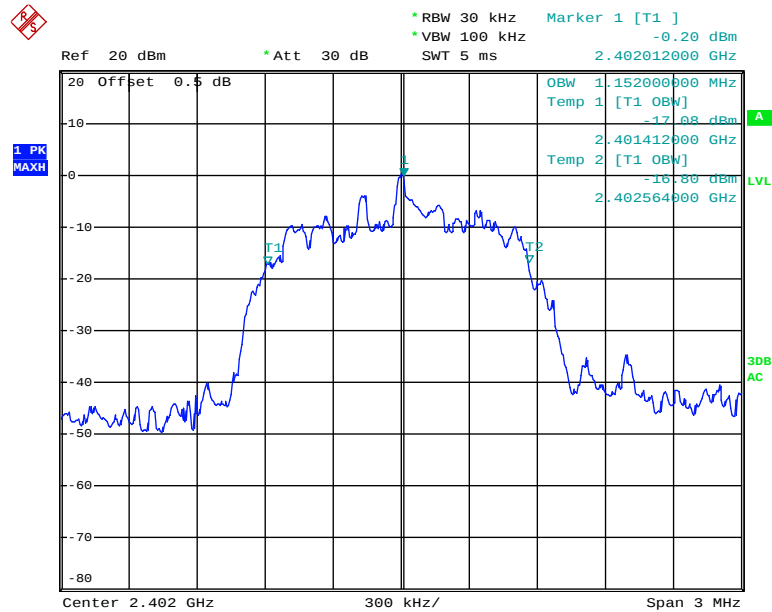


Date: 24.NOV.2017 15:47:55


Middle Channel

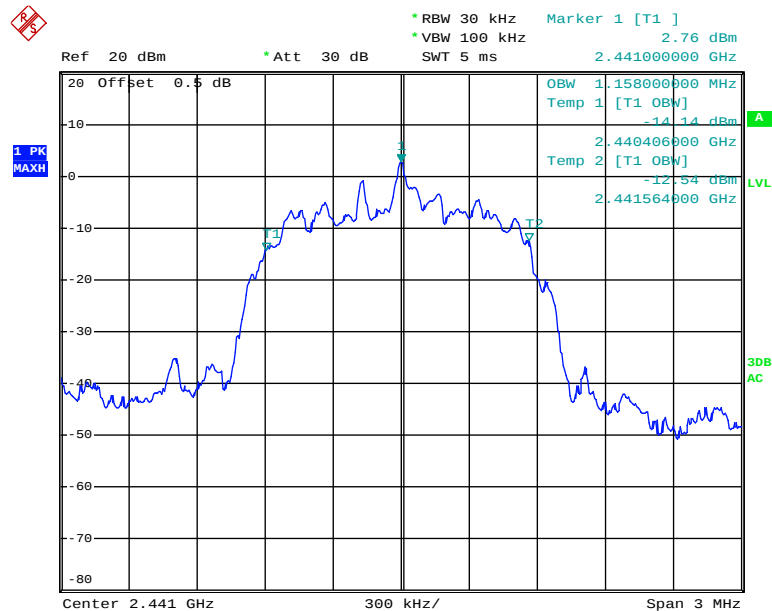

Date: 24.NOV.2017 15:48:57

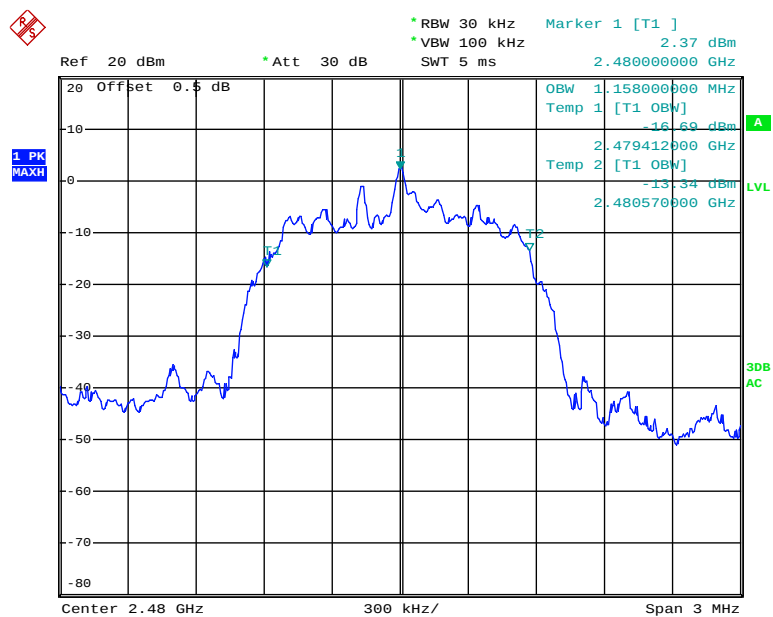
High Channel

Date: 24.NOV.2017 15:49:43

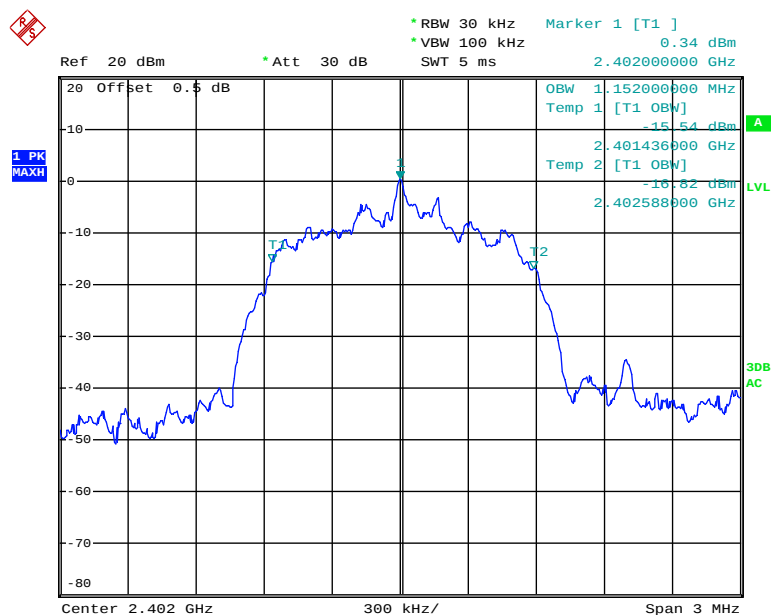*EDR Mode (8-DPSK):***Low Channel**


Date: 24.NOV.2017 15:53:13

Middle Channel

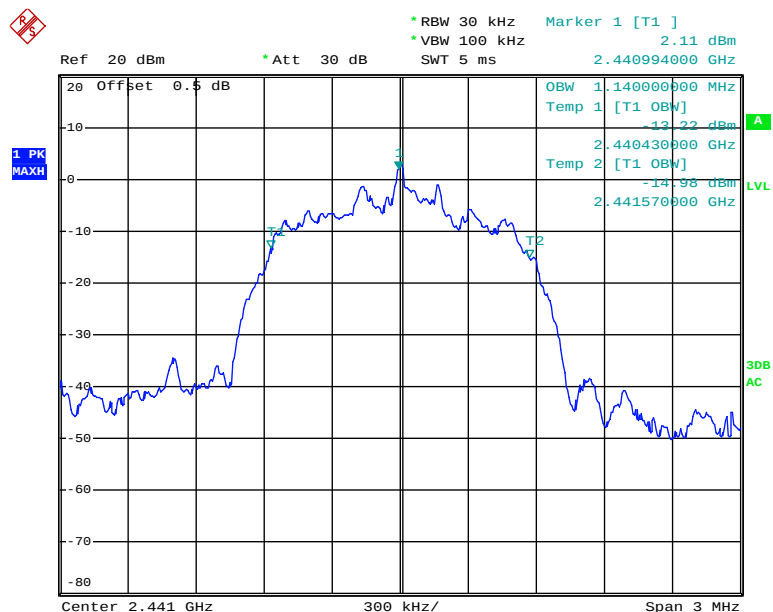

Date: 24.NOV.2017 15:52:25

High Channel

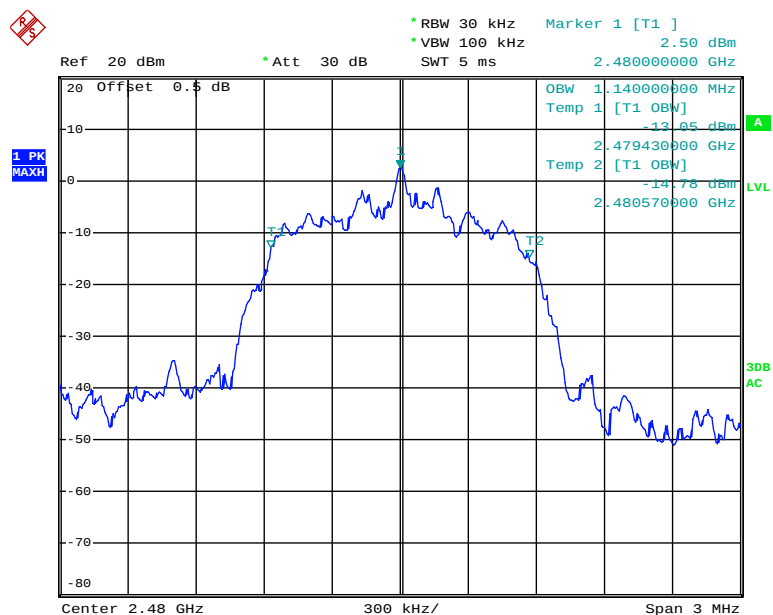

Date: 24.NOV.2017 15:51:16

FCC §15.247(a) (1) (iii)& RSS-247 CLAUSE 5.1 d) - QUANTITY OF HOPPING CHANNEL**Applicable Standard**

According to FCC §15.247(a) (1) (iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 Clause 5.1 d)

- d) FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.8°C
Relative Humidity:	40 %
ATM Pressure:	100.8 kPa

* The testing was performed by Swim Lv on 2017-11-24.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

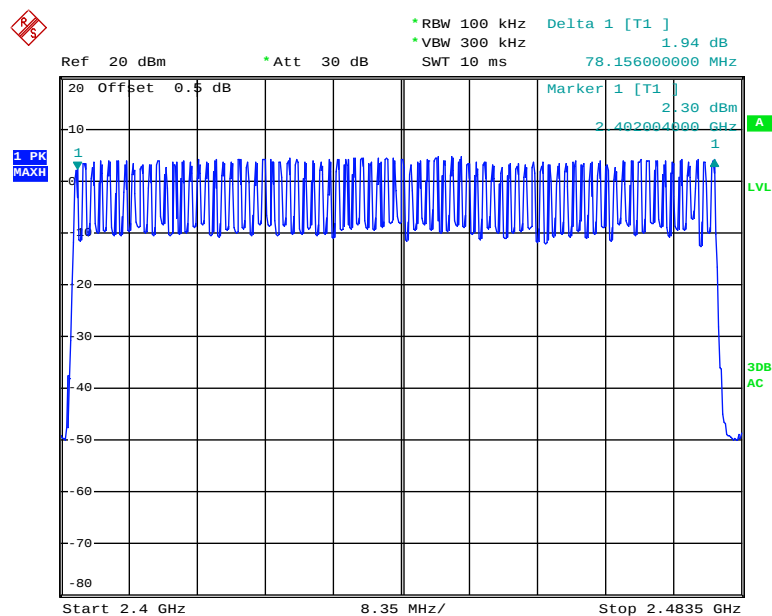Number of Hopping Channels

Date: 24.NOV.2017 15:46:23

EDR Mode ($\pi/4$ -DQPSK):


Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

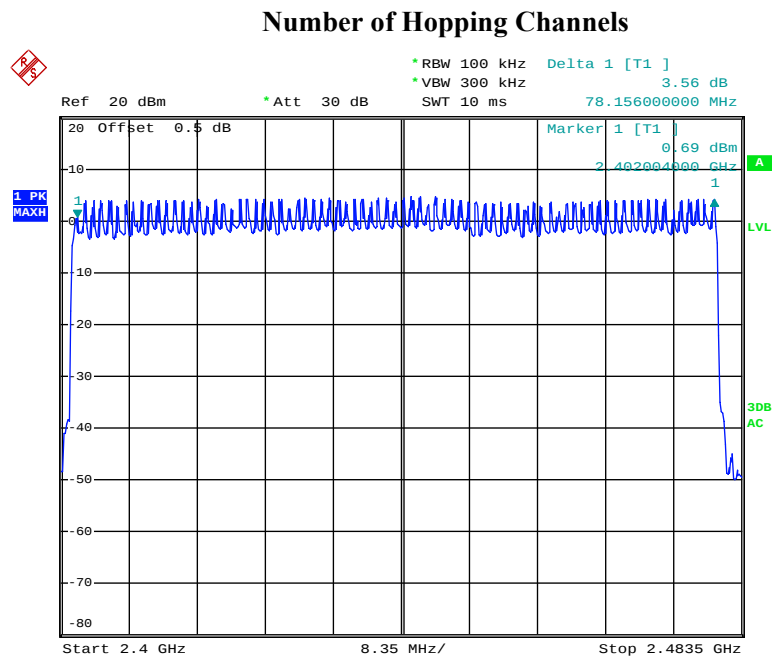

Date: 24.NOV.2017 15:44:11

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

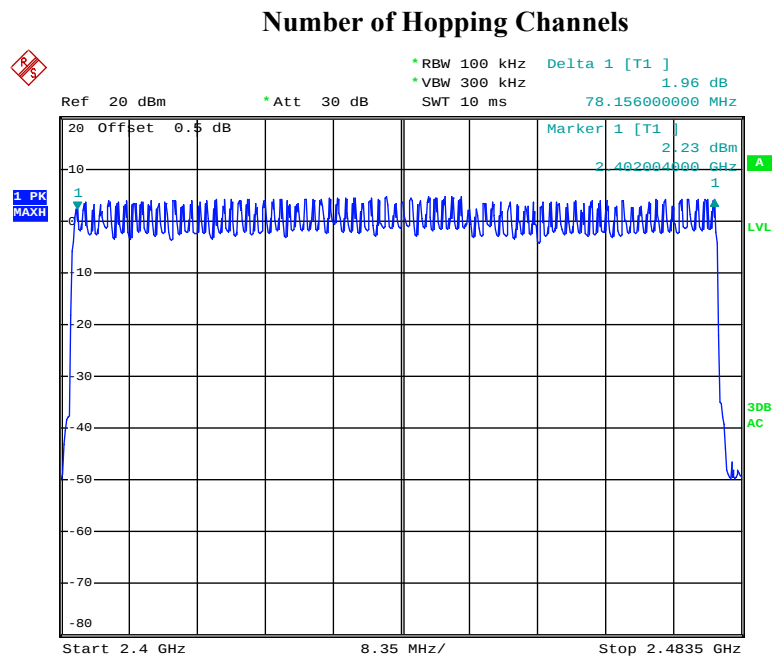

Date: 24.NOV.2017 15:40:58

FCC §15.247(a) (1) (iii)&RSS-247 CLAUSE 5.1 d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 Clause 5.1 d)

- d) FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. The time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.8°C
Relative Humidity:	40 %
ATM Pressure:	100.8 kPa

* The testing was performed by Swim Lv on 2017-11-24.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.432	0.138	0.4	Compliance
	Middle	0.432	0.138	0.4	Compliance
	High	0.432	0.138	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) × 31.6 s				
DH3	Low	1.698	0.272	0.4	Compliance
	Middle	1.698	0.272	0.4	Compliance
	High	1.698	0.272	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) × 31.6 s				
DH5	Low	2.950	0.315	0.4	Compliance
	Middle	2.960	0.316	0.4	Compliance
	High	2.950	0.315	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) × 31.6 s				

DH1: Low Channel

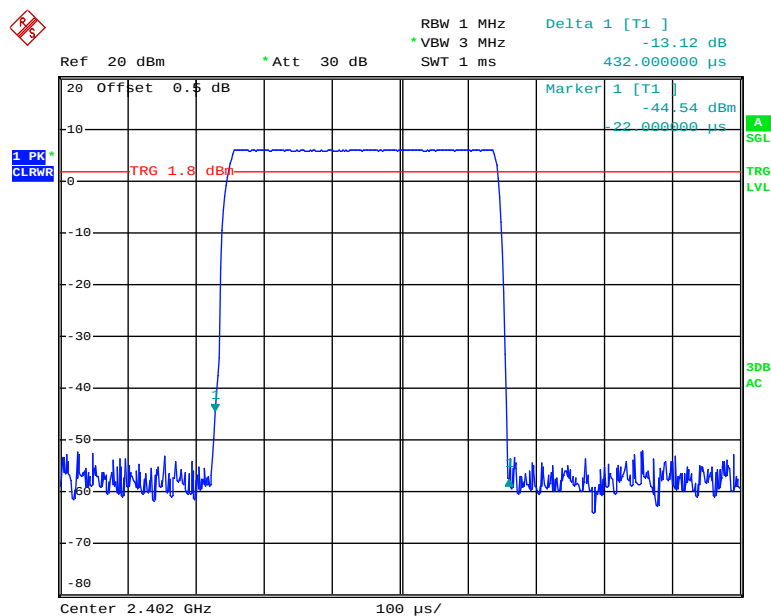


Date: 24.NOV.2017 15:15:29

DH1: Middle Channel

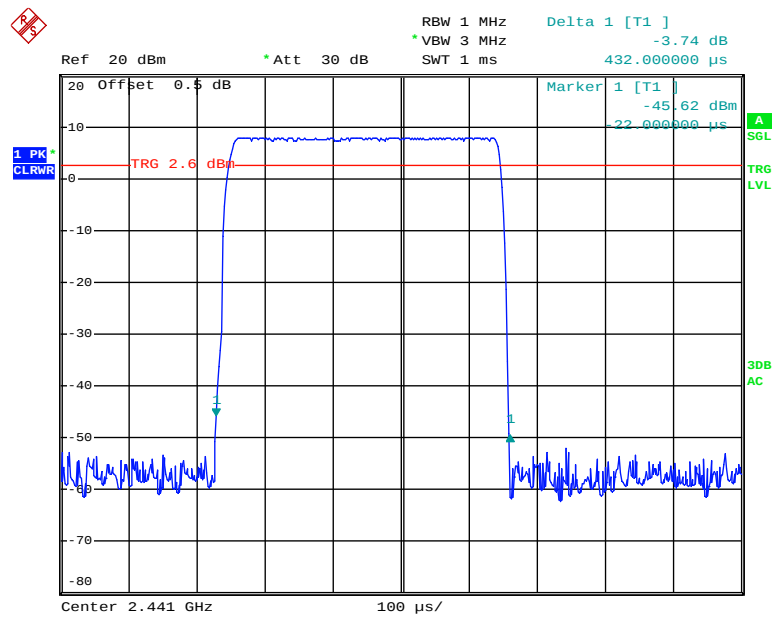


Date: 24.NOV.2017 15:15:37

DH1: High Channel

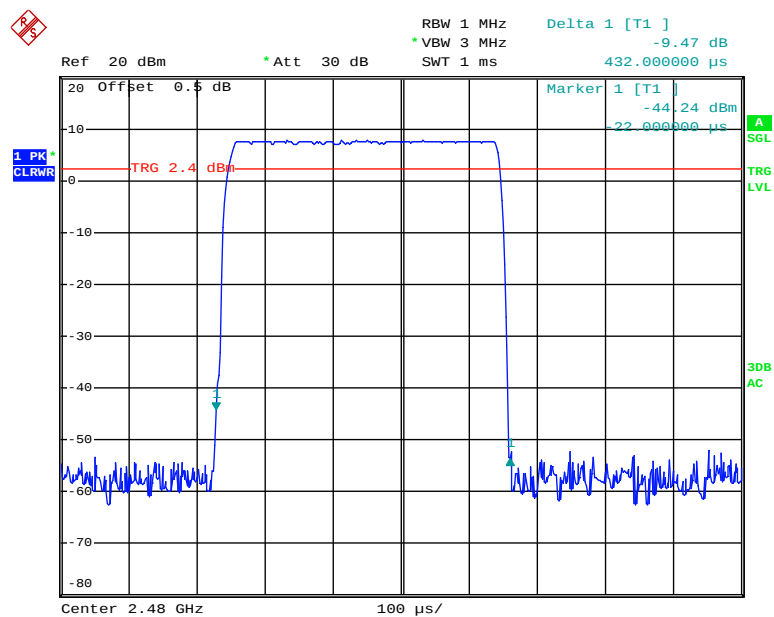


Date: 24.NOV.2017 15:15:45

DH3: Low Channel

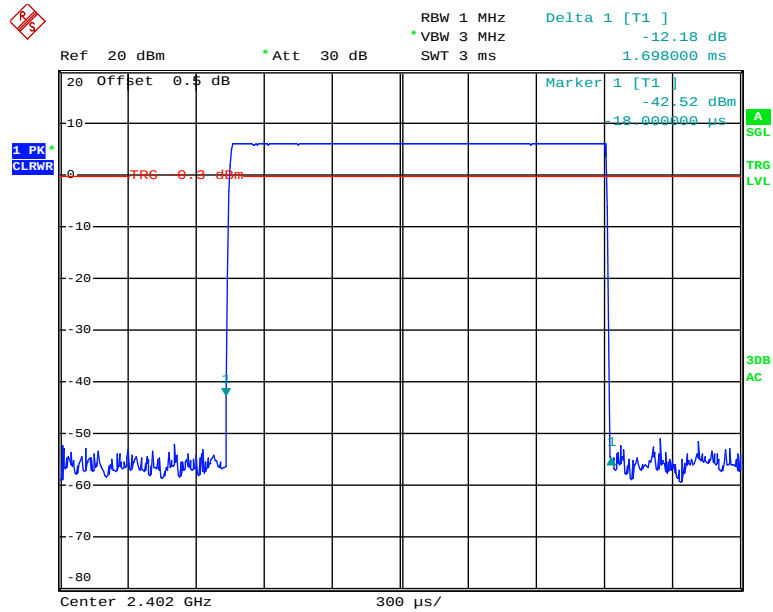


Date: 24.NOV.2017 15:17:07

DH3: Middle Channel

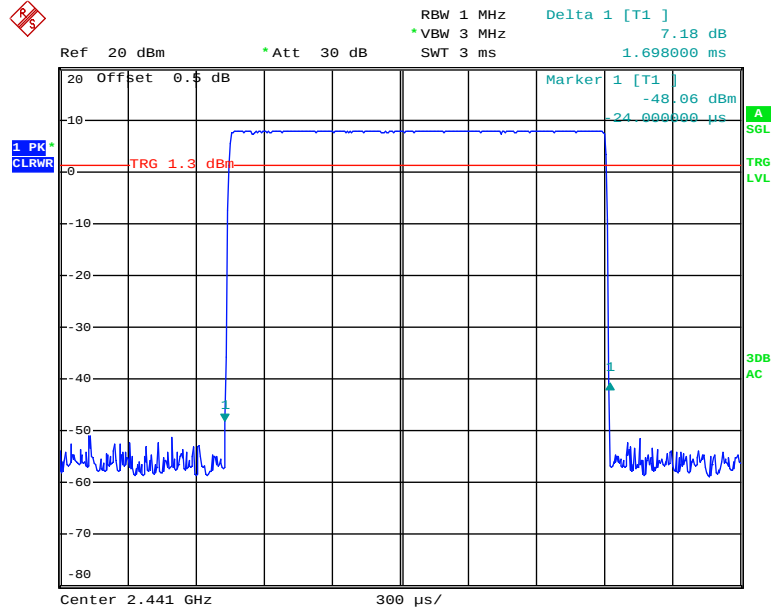


Date: 24.NOV.2017 15:17:15

DH3: High Channel

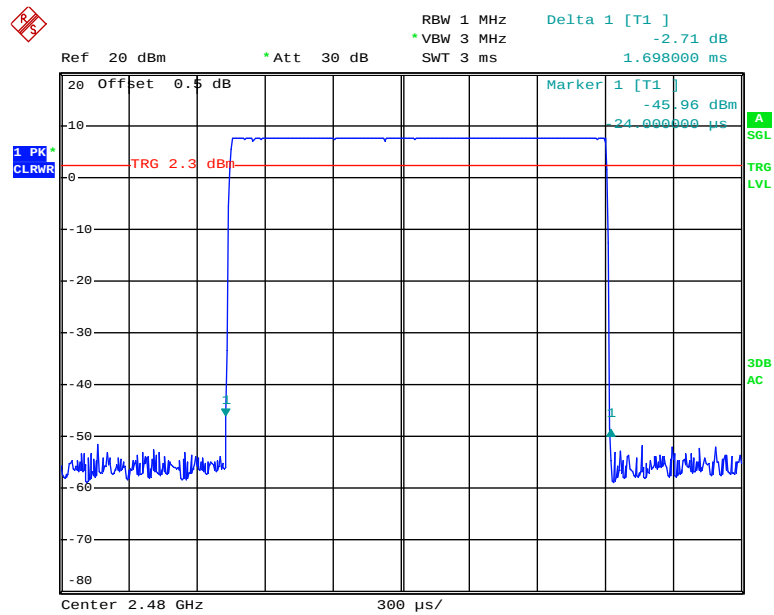


Date: 24.NOV.2017 15:17:23

DH5: Low Channel

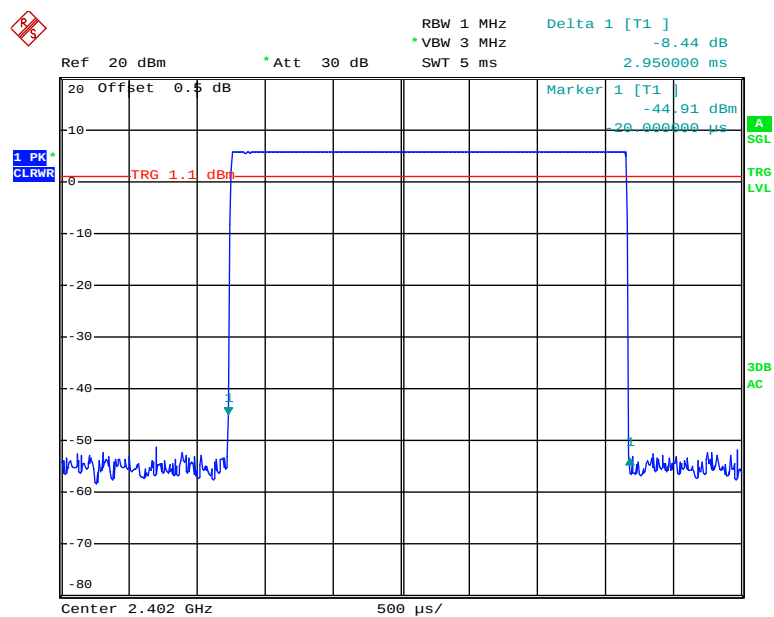


Date: 24.NOV.2017 15:19:40

DH5: Middle Channel

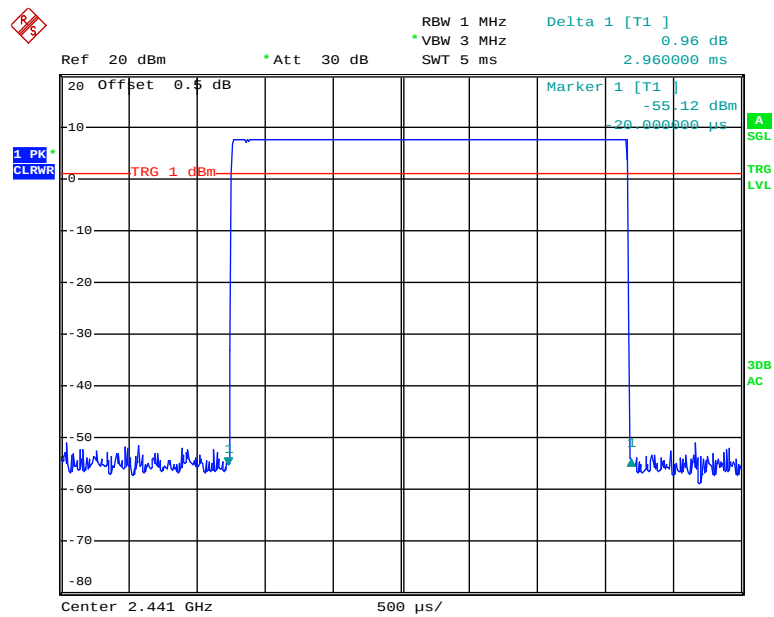

Date: 24.NOV.2017 15:19:48


DH5: High Channel

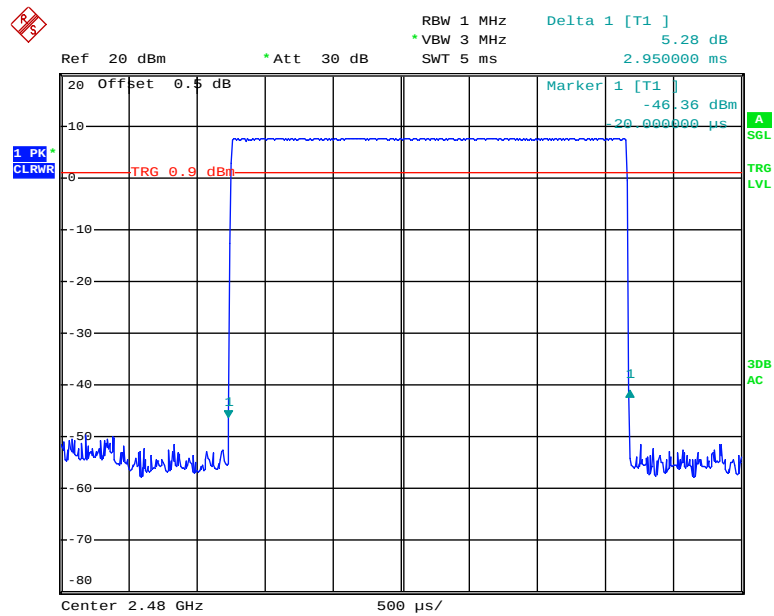

Date: 24.NOV.2017 15:20:00


EDR Mode ($\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.442	0.141	0.4	Compliance
	Middle	0.440	0.141	0.4	Compliance
	High	0.440	0.141	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.698	0.273	0.4	Compliance
	Middle	1.704	0.273	0.4	Compliance
	High	1.710	0.274	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.960	0.316	0.4	Compliance
	Middle	2.960	0.316	0.4	Compliance
	High	2.960	0.316	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

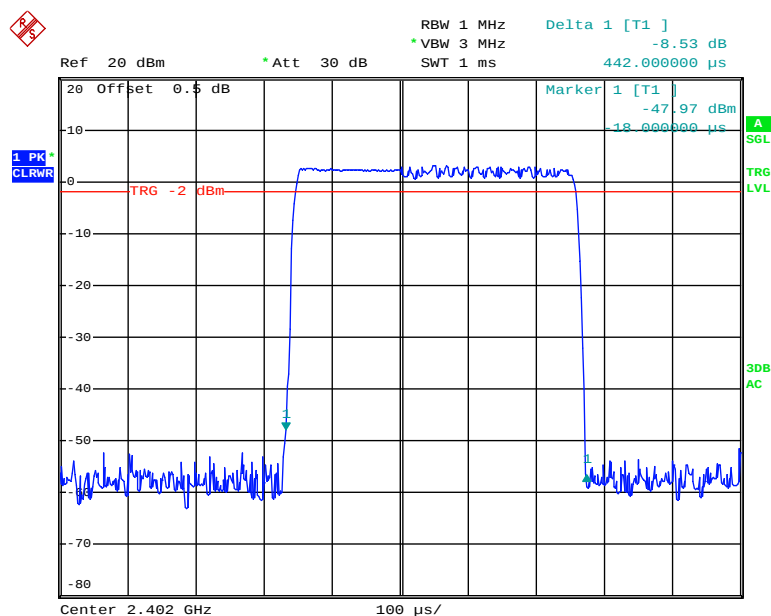2DH1: Low Channel


Date: 24.NOV.2017 15:23:07

2DH1: Middle Channel

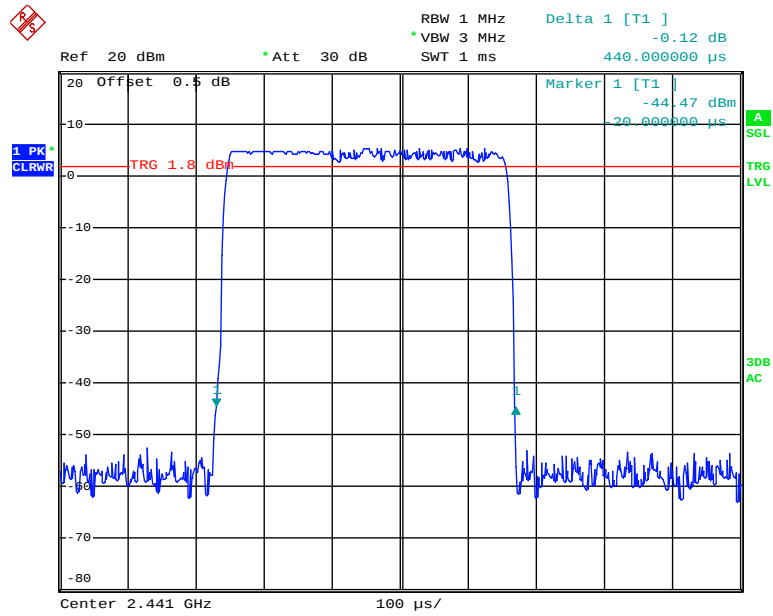


Date: 24.NOV.2017 15:23:15

2DH1: High Channel

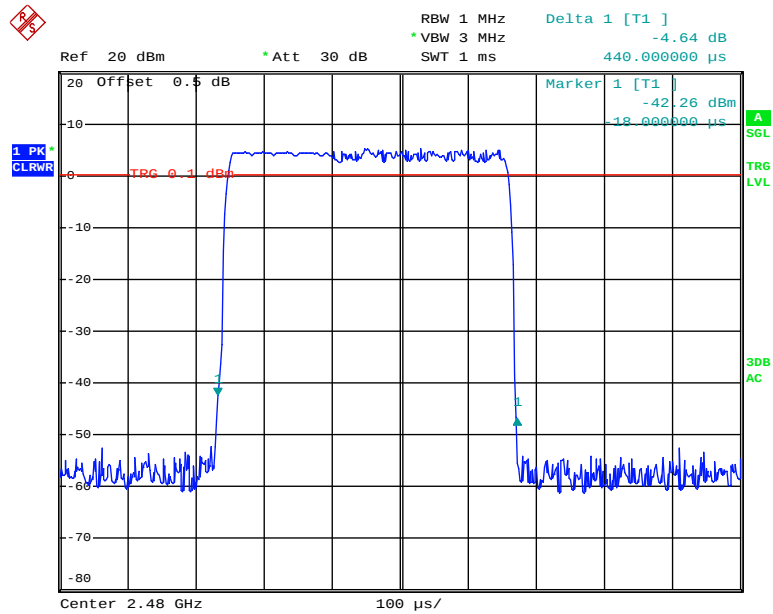


Date: 24.NOV.2017 15:23:23

2DH3: Low Channel

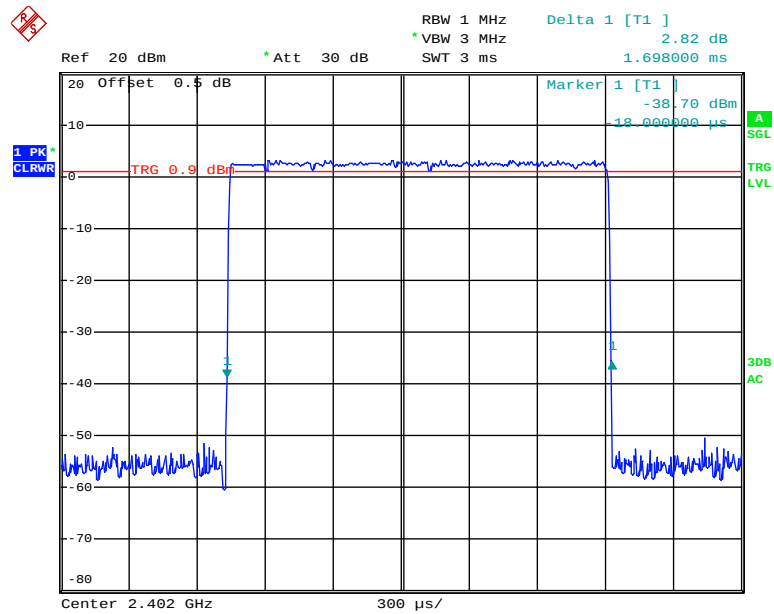


Date: 24.NOV.2017 15:24:50

2DH3: Middle Channel

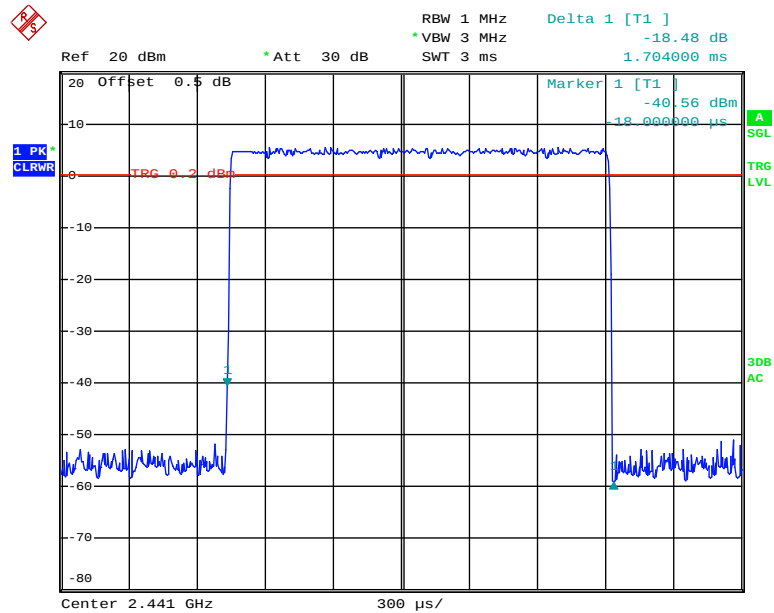


Date: 24.NOV.2017 15:24:58

2DH3: High Channel

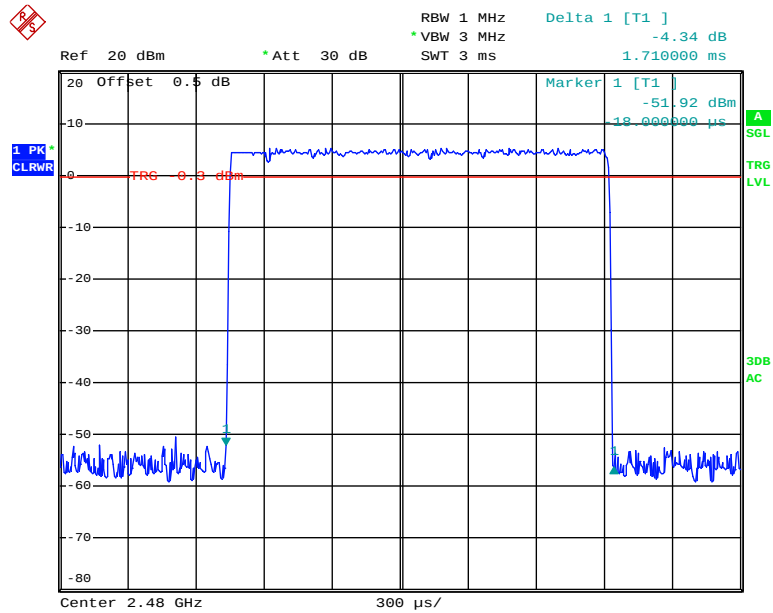


Date: 24.NOV.2017 15:25:07

2DH5: Low Channel

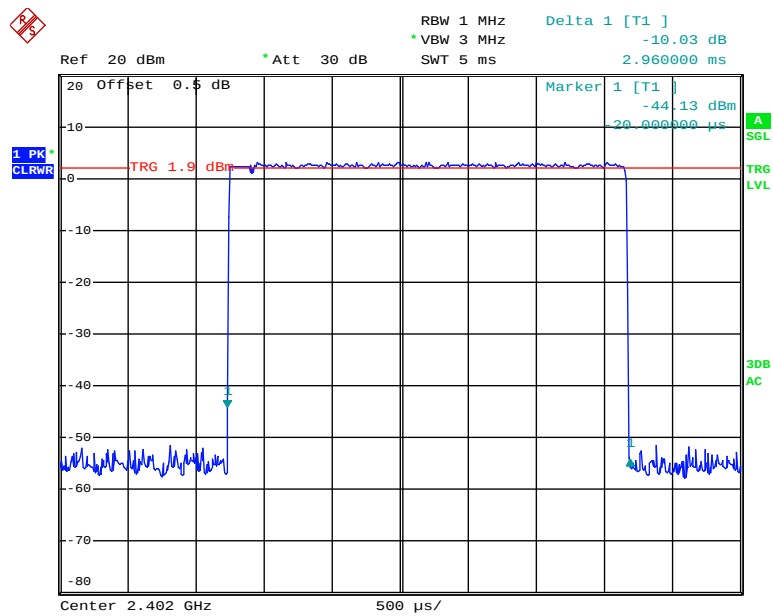


Date: 24.NOV.2017 15:25:36

2DH5: Middle Channel

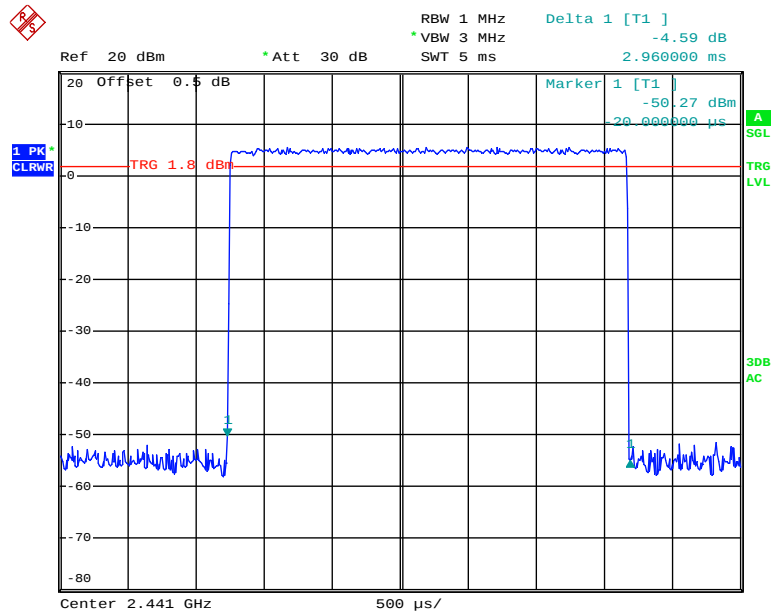

Date: 24.NOV.2017 15:25:44


2DH5: High Channel

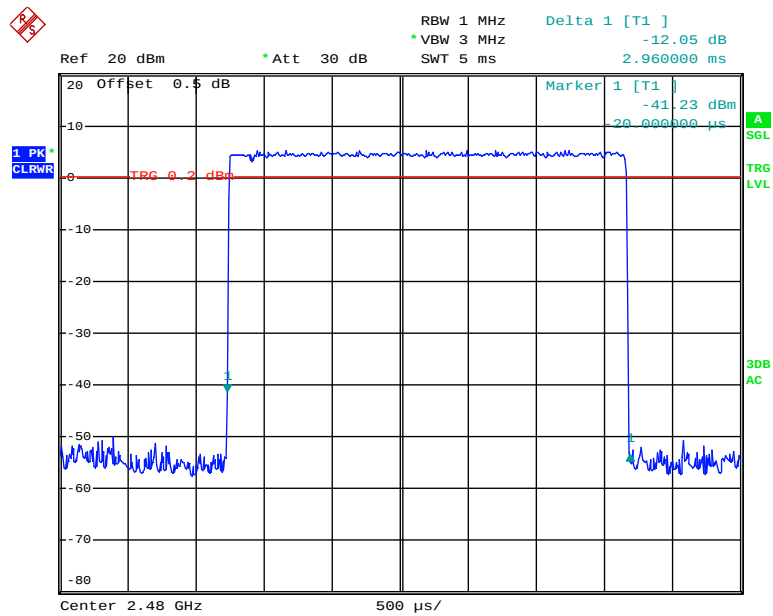

Date: 24.NOV.2017 15:25:52


EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.440	0.141	0.4	Compliance
	Middle	0.442	0.141	0.4	Compliance
	High	0.442	0.141	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
3DH3	Low	1.704	0.273	0.4	Compliance
	Middle	1.704	0.273	0.4	Compliance
	High	1.710	0.274	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
3DH5	Low	2.960	0.316	0.4	Compliance
	Middle	2.960	0.316	0.4	Compliance
	High	2.970	0.317	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

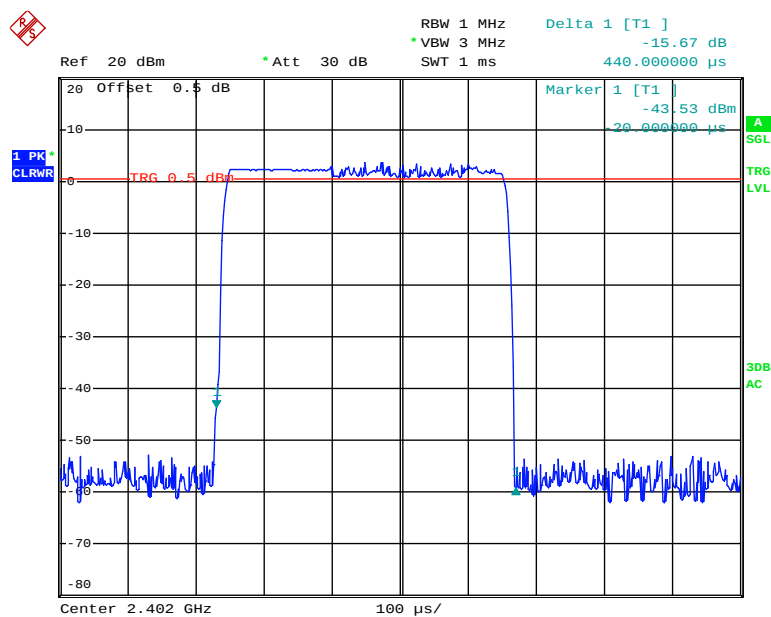3DH1: Low Channel


Date: 24.NOV.2017 15:27:57

3DH1: Middle Channel

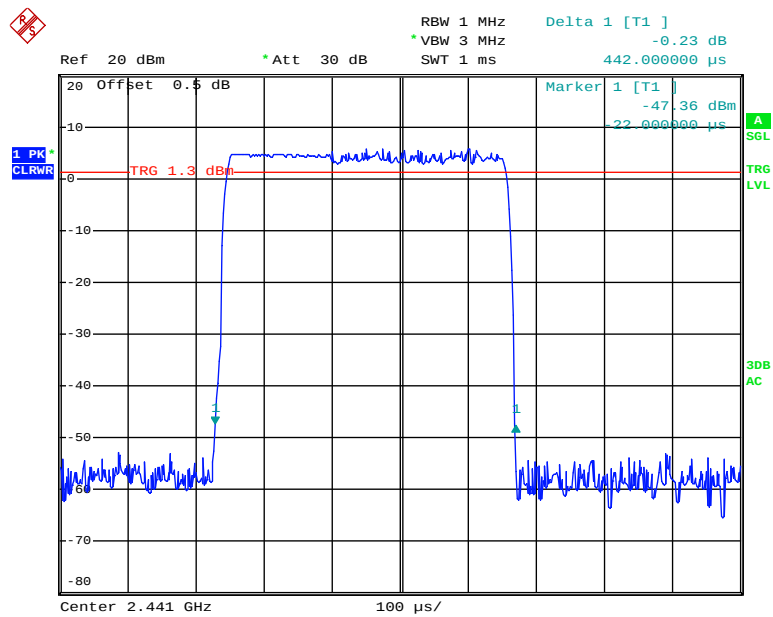


Date: 24.NOV.2017 15:28:05


3DH1: High Channel

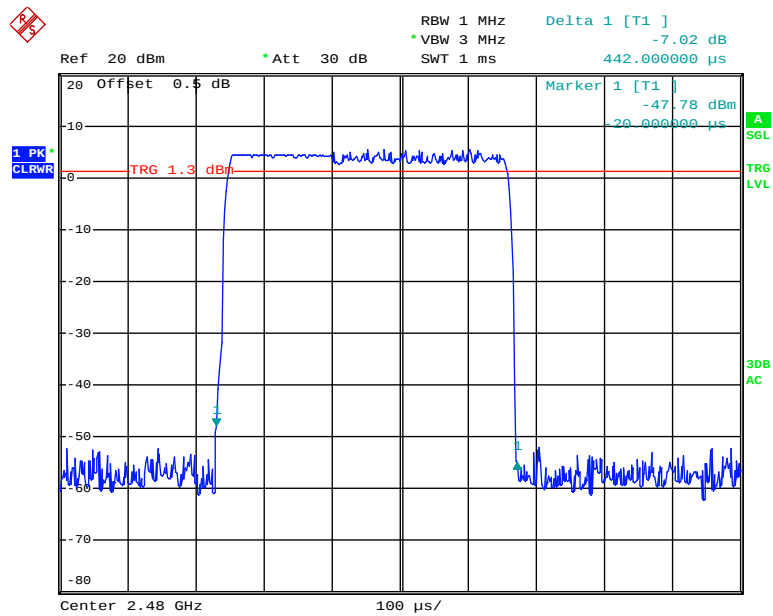

Date: 24.NOV.2017 15:28:13

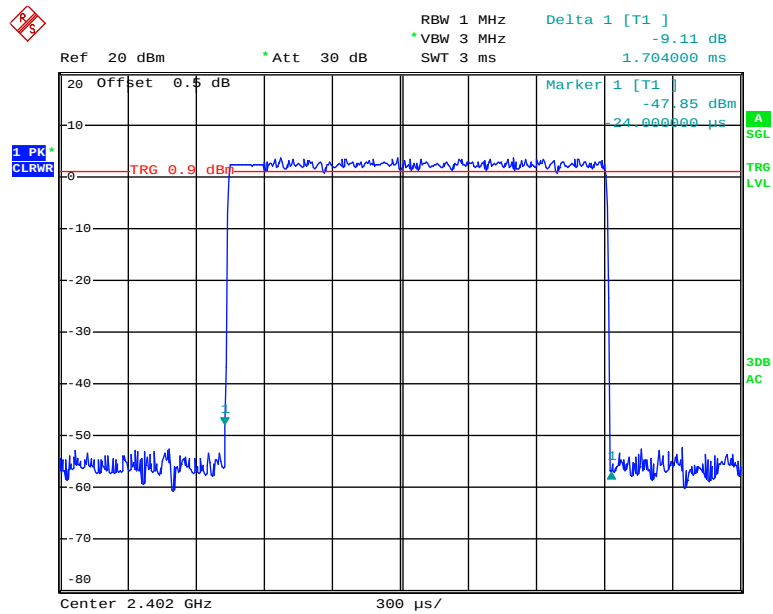
3DH3: Low Channel

Date: 24.NOV.2017 15:27:09

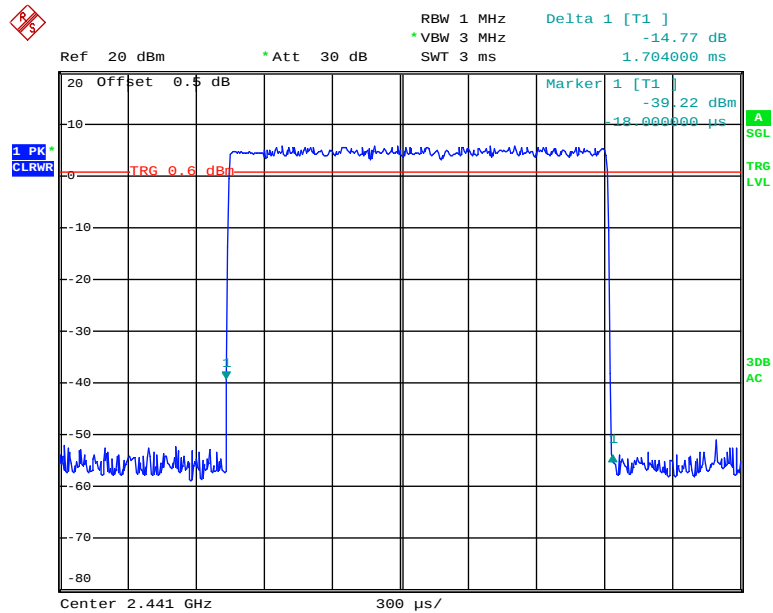3DH3: Middle Channel


Date: 24.NOV.2017 15:27:17

3DH3: High Channel

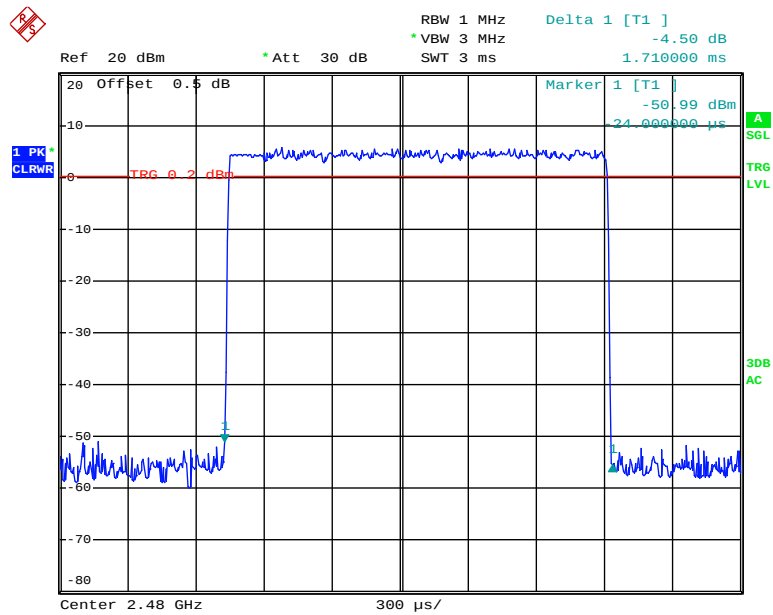


Date: 24.NOV.2017 15:27:25

3DH5: Low Channel

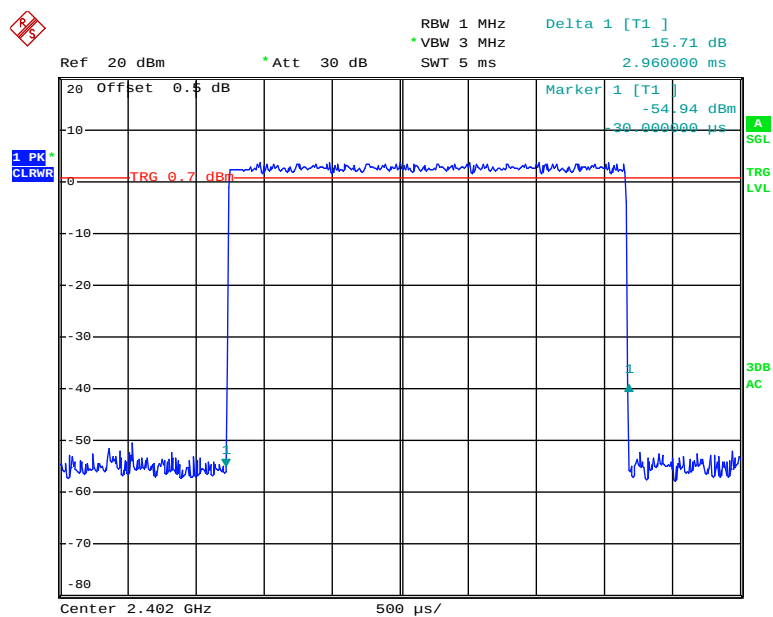


Date: 24.NOV.2017 15:26:25

3DH5: Middle Channel

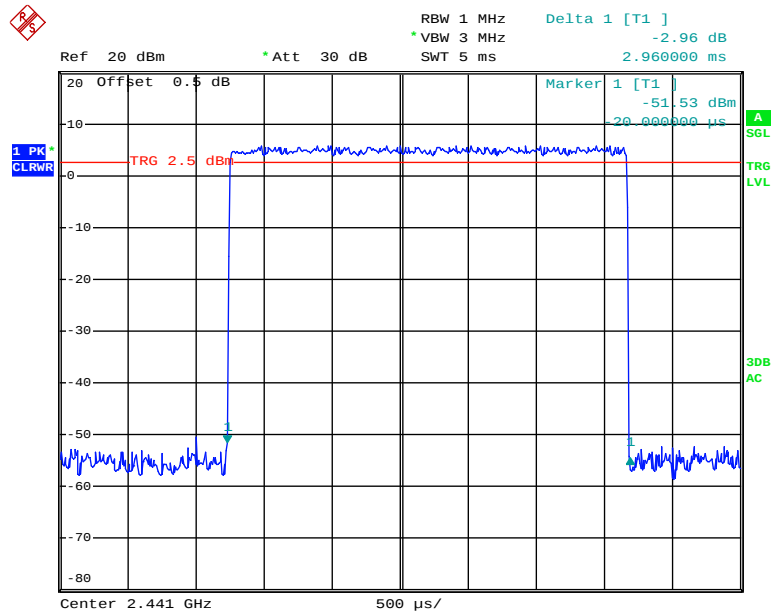

Date: 24.NOV.2017 15:26:33

3DH5: High Channel

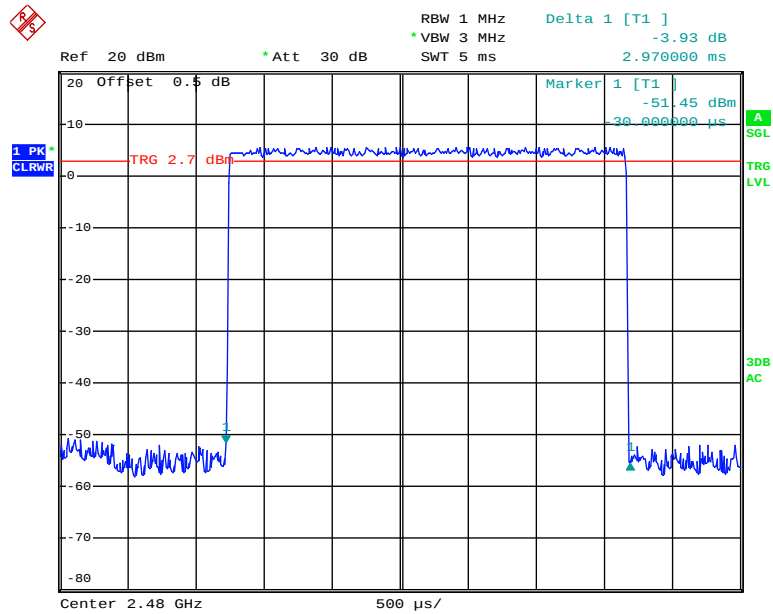

Date: 24.NOV.2017 15:26:42

FCC §15.247(b) (1)& RSS-247 CLAUSE 5.4 b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

According to RSS-247 Clause 5.4 b)

- b) For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	P-Series Power Meter	N1912A	MY5000448	2017-11-03	2018-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2017-11-03	2018-11-03
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.8°C
Relative Humidity:	40 %
ATM Pressure:	100.8 kPa

* The testing was performed by Swim Lv on 2017-11-24.

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	4.53	30
	2441	5.42	30
	2480	4.33	30
EDR Mode ($\pi/4$ -DQPSK)	2402	2.63	30
	2441	4.92	30
	2480	4.59	30
EDR Mode (8-DPSK)	2402	3.09	30
	2441	4.5	30
	2480	4.23	30

Note: The data above was tested in conducted mode.

FCC §15.247(d)& RSS-247 CLAUSE 5.5 - BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/VBW=100/300kHz of spectrum analyze with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/


*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24.8°C
Relative Humidity:	40 %
ATM Pressure:	100.8 kPa

** The testing was performed by Swim Lv on 2017-11-24.*

Test Result: Compliance

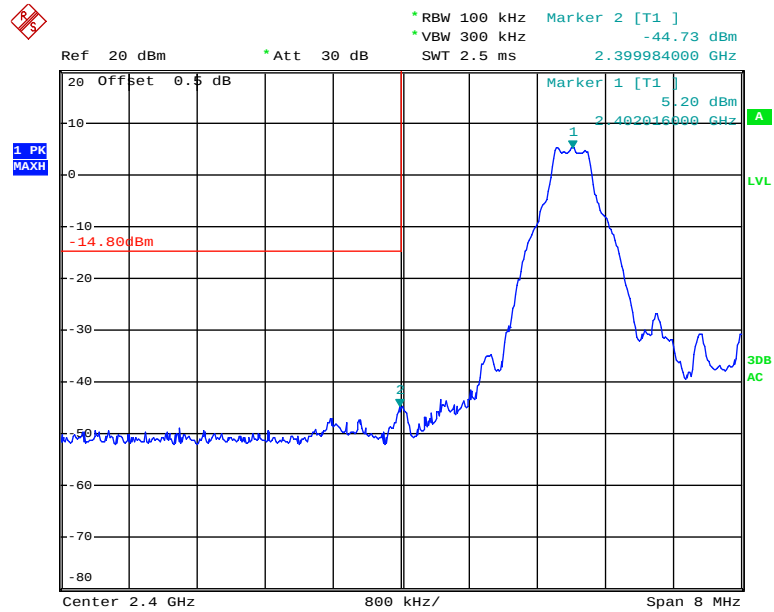*BDR Mode (GFSK):***Band Edge, Left Side**


Date: 24.NOV.2017 15:11:28

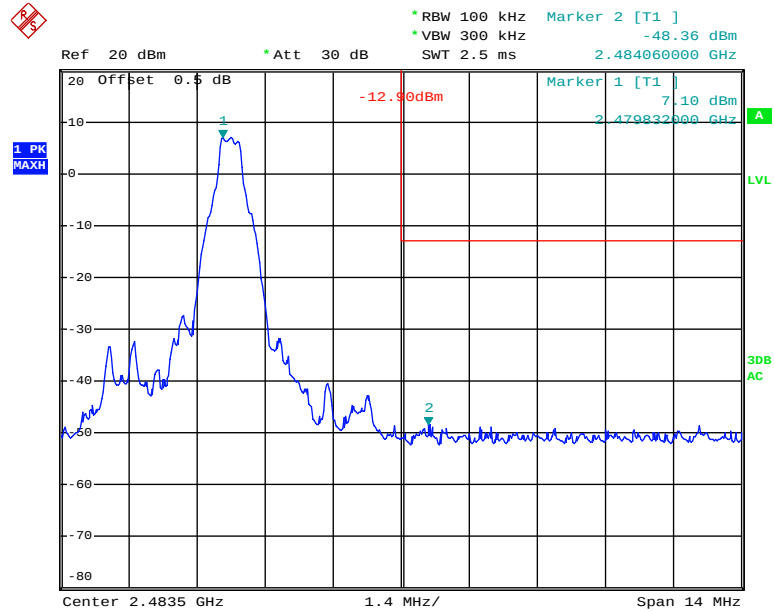Band Edge, Right Side

Date: 24.NOV.2017 15:14:24


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

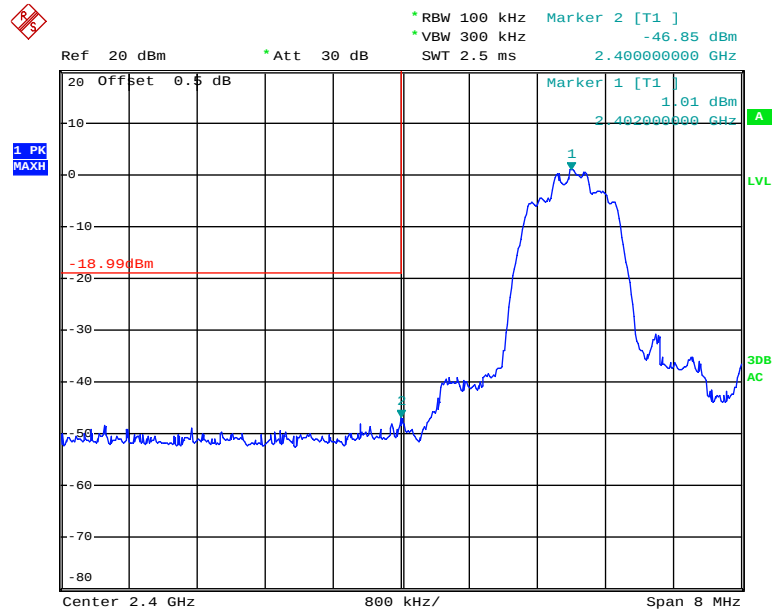

Date: 24.NOV.2017 15:48:20


Band Edge, Right Side

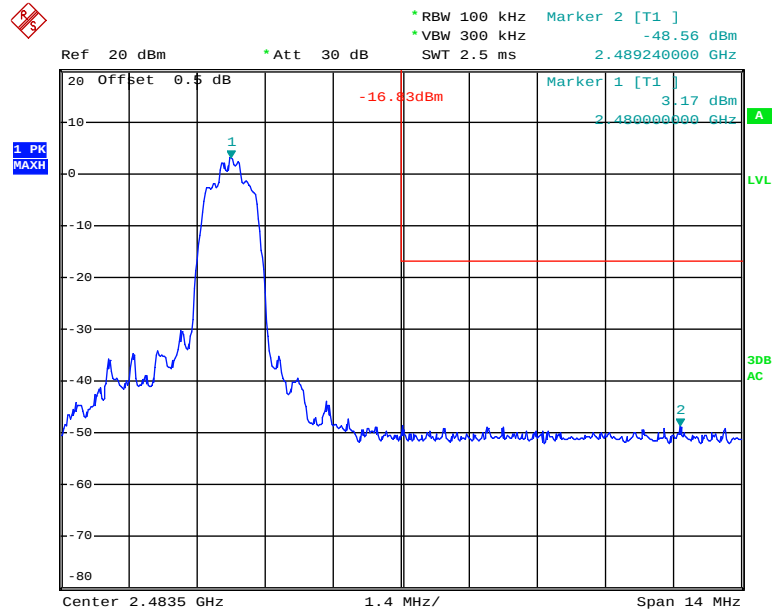

Date: 24.NOV.2017 15:50:14


EDR Mode (8-DPSK):

Band Edge, Left Side

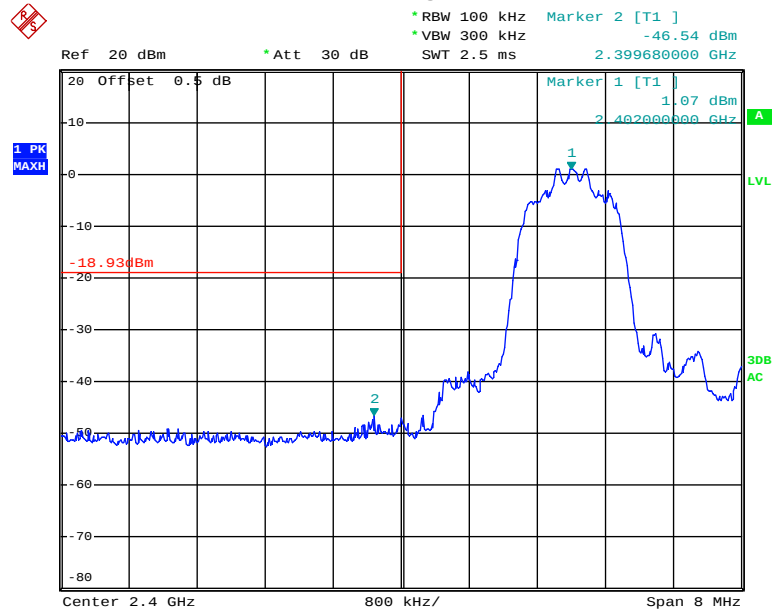

Date: 24.NOV.2017 15:53:39

Band Edge, Right Side

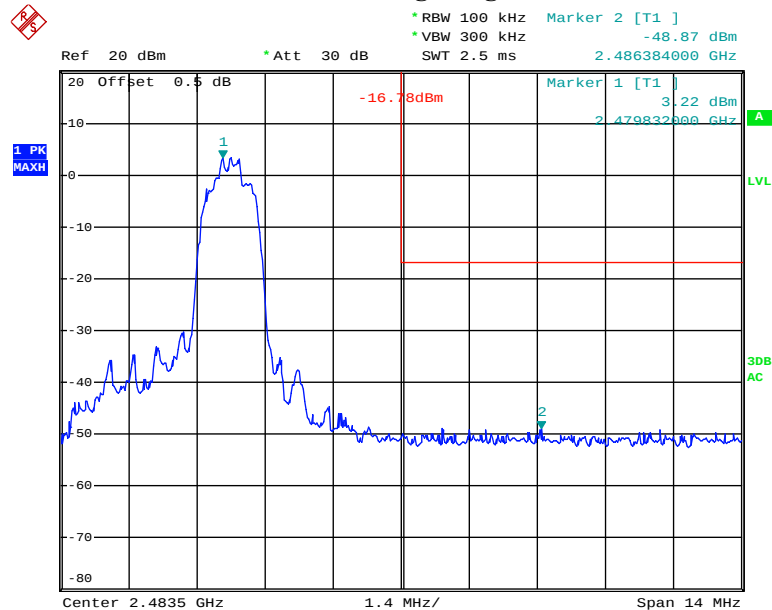

Date: 24.NOV.2017 15:51:41

***** END OF REPORT *****