EMC TEST REPORT	
TEST REPORT NUMBER	DOJ 1517TEL037-A2
TEST REPORT DATE	03rd June 2015
TEST REPORT VERSION	1.0
MANUFACTURER	Gemtek Electronics (ChangSHU) Co.
PRODUCT NAME	5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio
PRODUCT MODEL NO.	C058900P072A, C058900C072A, C058900P062A, C058900C062A
PART NO.	142000001193A
REV	0B
CONDITION OF EUT WHEN RECEIVED	GOOD and in working condition
ISSUED TO	3800 Golf Road, Suite 360 Rolling Meadows, IL 60008. USA +1 888-863-5250
ISSUED BY	**TARANG Lab** Wipro Technologies, SJP2, Survey#70,77,78/8A, DoddaKanelli, Sarjapur road, Bangalore. Karnataka. India - 560 035 Tel: +91-80-30292929Fax: +91-80-30298200 Email: tarang.planet@wipro.com Web: www.wipro.com

AMENDMENT HISTORY

Amendment Number	Amendment Date	Author of Amendment	Previous Report Version	Previous Report Date
Amendment Details				

This report should always be reproduced in full. Any extracts of this report is invalid.

TABLE OF CONTENTS

1 TEST REPORT SUMMARY 9

2 GENERAL INFORMATION 11

2.1 TEST DETAILS 11
2.2 TEST FACILITY DETAILS 11

3 INSTRUMENTATION AND CALIBRATION 12

3.1 TEST AND MEASURING EQUIPMENT 12
3.2 EQUIPMENTS USED 12

4 PRODUCT INFORMATION 13

4.1 DESCRIPTION OF THE PRODUCT 13
4.2 SOFTWARE AND FIRMWARE DETAILS 13
4.3 LIST OF PRODUCT CABLES 16

5 TEST DETAILS 17

5.1 PRODUCT AND TEST SETUP 17
5.1.1 Product Configuration 17
5.1.2 Test Setup Details 17
5.1.3 Accessories 17
5.2 APPLICABLE TESTS 18
5.3 TEST RESULT 19
5.3.1 Duty Cycle 19
5.3.2 26 dB Emission Bandwidth measurement 22
5.3.3 99 Percent Occupied Bandwidth measurement 43
5.3.4 Maximum Conducted Output Power 64
5.3.5 Peak Power Spectral Density 87
5.3.6 Unwanted Emissions levels-Conducted Band edge 108

APPENDIX I – ACRONYMS 134

This report should always be reproduced in full. Any extracts of this report is invalid.

LIST OF FIGURES

Figure 1: Block Diagram of the EUT test setup during the tests 17
Figure 2: Typical test setup for Conducted RF Test setup 19
Figure 3: Duty Cycle for 40MHz Bandwidth 21
Figure 4: Duty Cycle for 5MHz Bandwidth 21
Figure 5: Typical test setup for Conducted RF Test setup 22
Figure 6: 26dB Bandwidth measured at ch0 24
Figure 7: 26dB Bandwidth measured at ch1 24
Figure 8: 26dB Bandwidth measured at ch0 25
Figure 9: 26dB Bandwidth measured at ch1 25
Figure 10: 26dB Bandwidth measured at ch0 26
Figure 11: 26dB Bandwidth measured at ch1 26
Figure 12: 26dB Bandwidth measured at ch0 27
Figure 13: 26dB Bandwidth measured at ch1 27
Figure 14: 26dB Bandwidth measured at ch0 28
Figure 15: 26dB Bandwidth measured at ch1 28
Figure 16: 26dB Bandwidth measured at ch0 29
Figure 17: 26dB Bandwidth measured at ch1 29
Figure 18: 26dB Bandwidth measured at ch0 30
Figure 19: 26dB Bandwidth measured at ch1 30
Figure 20: 26dB Bandwidth measured at ch0 31
Figure 21: 26dB Bandwidth measured at ch1 31
Figure 22: 26dB Bandwidth measured at ch0 32
Figure 23: 26dB Bandwidth measured at ch1 32
Figure 24: 26dB Bandwidth measured at ch0 33
Figure 25: 26dB Bandwidth measured at ch1 33
Figure 26: 26dB Bandwidth measured at ch0 34
Figure 27: 26dB Bandwidth measured at ch1 34
Figure 28: 26dB Bandwidth measured at ch0 35
Figure 29: 26dB Bandwidth measured at ch1 35
Figure 30: 26dB Bandwidth measured at ch0 36
Figure 31: 26dB Bandwidth measured at ch1 36
Figure 32: 26dB Bandwidth measured at ch0 37
Figure 33: 26dB Bandwidth measured at ch1 37
Figure 34: 26dB Bandwidth measured at ch0 38
Figure 35: 26dB Bandwidth measured at ch1 38
Figure 36: 26dB Bandwidth measured at ch0 39
Figure 37: 26dB Bandwidth measured at ch1 39
Figure 38: 26dB Bandwidth measured at ch0 40
Figure 39: 26dB Bandwidth measured at ch1 40
Figure 40: 26dB Bandwidth measured at ch0 41
Figure 41: 26dB Bandwidth measured at ch1 41
Figure 42: Typical test setup for Conducted RF Test setup 43
Figure 43: 99 Percent OBW measured at ch.0 45
Figure 44: 99 Percent OBW measured at ch.1 45
Figure 45: 99 Percent OBW measured at ch.0 46
Figure 46: 99 Percent OBW measured at ch.1 46
Figure 47: 99 Percent OBW measured at ch.0 47
Figure 48: 99 Percent OBW measured at ch.1 47

This report should always be reproduced in full. Any extracts of this report is invalid.

Figure 49: 99 Percent OBW measured at ch.0 48
Figure 50: 99 Percent OBW measured at ch.1 48
Figure 51: 99 Percent OBW measured at ch.0 49
Figure 52: 99 Percent OBW measured at ch.1 49
Figure 53: 99 Percent OBW measured at ch.0 50
Figure 54: 99 Percent OBW measured at ch.1 50
Figure 55: 99 Percent OBW measured at ch.0 51
Figure 56: 99 Percent OBW measured at ch.1 51
Figure 57: 99 Percent OBW measured at ch.0 52
Figure 58: 99 Percent OBW measured at ch.1 52
Figure 59: 99 Percent OBW measured at ch.0 53
Figure 60: 99 Percent OBW measured at ch.1 53
Figure 61: 99 Percent OBW measured at ch.0 54
Figure 62: 99 Percent OBW measured at ch.1 54
Figure 63: 99 Percent OBW measured at ch.0 55
Figure 64: 99 Percent OBW measured at ch.1 55
Figure 65: 99 Percent OBW measured at ch.0 56
Figure 66: 99 Percent OBW measured at ch.1 56
Figure 67: 99 Percent OBW measured at ch.0 57
Figure 68: 99 Percent OBW measured at ch.1 57
Figure 69: 99 Percent OBW measured at ch.0 58
Figure 70: 99 Percent OBW measured at ch.1 58
Figure 71: 99 Percent OBW measured at ch.0 59
Figure 72: 99 Percent OBW measured at ch.1 59
Figure 73: 99 Percent OBW measured at ch.0 60
Figure 74: 99 Percent OBW measured at ch.1 60
Figure 75: 99 Percent OBW measured at ch.0 61
Figure 76: 99 Percent OBW measured at ch.1 61
Figure 77: 99 Percent OBW measured at ch.0 62
Figure 78: 99 Percent OBW measured at ch.1 62
Figure 79: Typical test setup for Conducted RF Test setup 65
Figure 80: Maximum Conducted Output power measured at ch.0 66
Figure 81: Maximum Conducted Output power measured at ch.1 66
Figure 82: Maximum Conducted Output power measured at ch.0 67
Figure 83: Maximum Conducted Output power measured at ch.1 67
Figure 84: Maximum Conducted Output power measured at ch.0 68
Figure 85: Maximum Conducted Output power measured at ch.1 68
Figure 86: Maximum Conducted Output power measured at ch.0 69
Figure 87: Maximum Conducted Output power measured at ch.1 69
Figure 88: Maximum Conducted Output power measured at ch.0 70
Figure 89: Maximum Conducted Output power measured at ch.1 70
Figure 90: Maximum Conducted Output power measured at ch.0 71
Figure 91: Maximum Conducted Output power measured at ch.1 71
Figure 92: Maximum Conducted Output power measured at ch.0 72
Figure 93: Maximum Conducted Output power measured at ch.1 72
Figure 94: Maximum Conducted Output power measured at ch.0 73
Figure 95: Maximum Conducted Output power measured at ch.1 73
Figure 96: Maximum Conducted Output power measured at ch.0 74
Figure 97: Maximum Conducted Output power measured at ch.1 74

This report should always be reproduced in full. Any extracts of this report is invalid.

Figure 98: Maximum Conducted Output power measured at ch.0 75
Figure 99: Maximum Conducted Output power measured at ch.1 75
Figure 100: Maximum Conducted Output power measured at ch.0 76
Figure 101: Maximum Conducted Output power measured at ch.1 76
Figure 102: Maximum Conducted Output power measured at ch.0 77
Figure 103: Maximum Conducted Output power measured at ch.1 77
Figure 104: Maximum Conducted Output power measured at ch.0 78
Figure 105: Maximum Conducted Output power measured at ch.1 78
Figure 106: Maximum Conducted Output power measured at ch.0 79
Figure 107: Maximum Conducted Output power measured at ch.1 79
Figure 108: Maximum Conducted Output power measured at ch.0 80
Figure 109: Maximum Conducted Output power measured at ch.1 80
Figure 110: Maximum Conducted Output power measured at ch.0 81
Figure 111: Maximum Conducted Output power measured at ch.1 81
Figure 112: Maximum Conducted Output power measured at ch.0 82
Figure 113: Maximum Conducted Output power measured at ch.1 82
Figure 114: Maximum Conducted Output power measured at ch.0 83
Figure 115: Maximum Conducted Output power measured at ch.1 83
Figure 116: Typical test setup for Conducted Test setup 87
Figure 117: Power Spectral density measured at Ch. 0 89
Figure 118: Power Spectral density measured at Ch. 1 89
Figure 119: Power Spectral density measured at Ch. 0 90
Figure 120: Power Spectral density measured at Ch. 1 90
Figure 121: Power Spectral density measured at Ch. 0 91
Figure 122: Power Spectral density measured at Ch. 1 91
Figure 123: Power Spectral density measured at Ch. 0 92
Figure 124: Power Spectral density measured at Ch. 1 92
Figure 125: Power Spectral density measured at Ch. 0 93
Figure 126: Power Spectral density measured at Ch. 1 93
Figure 127: Power Spectral density measured at Ch. 0 94
Figure 128: Power Spectral density measured at Ch. 1 94
Figure 129: Power Spectral density measured at Ch. 0 95
Figure 130: Power Spectral density measured at Ch. 1 95
Figure 131: Power Spectral density measured at Ch. 0 96
Figure 132: Power Spectral density measured at Ch. 1 96
Figure 133: Power Spectral density measured at Ch. 0 97
Figure 134: Power Spectral density measured at Ch. 1 97
Figure 135: Power Spectral density measured at Ch. 0 98
Figure 136: Power Spectral density measured at Ch. 1 98
Figure 137: Power Spectral density measured at Ch. 0 99
Figure 138: Power Spectral density measured at Ch. 1 99
Figure 139: Power Spectral density measured at Ch. 0 100
Figure 140: Power Spectral density measured at Ch. 1 100
Figure 141: Power Spectral density measured at Ch. 0 101
Figure 142: Power Spectral density measured at Ch. 1 101
Figure 143: Power Spectral density measured at Ch. 0 102
Figure 144: Power Spectral density measured at Ch. 1 102
Figure 145: Power Spectral density measured at Ch. 0 103
Figure 146: Power Spectral density measured at Ch. 1 103

This report should always be reproduced in full. Any extracts of this report is invalid.

Figure 147: Power Spectral density measured at Ch. 0 104
Figure 148: Power Spectral density measured at Ch. 1 104
Figure 149: Power Spectral density measured at Ch. 0 105
Figure 150: Power Spectral density measured at Ch. 1 105
Figure 151: Power Spectral density measured at Ch. 0 106
Figure 152: Power Spectral density measured at Ch. 1 106
Figure 153: Typical test setup for Conducted Test setup 108
Figure 154: Band edge measured at Ch. 0-Avg 110
Figure 155: Band edge measured at Ch. 0-Peak 110
Figure 156: Band edge measured at Ch. 1-Avg 111
Figure 157: Band edge measured at Ch. 1-Peak 111
Figure 158: Band edge measured at Ch. 0-Avg 112
Figure 159: Band edge measured at Ch. 0-Peak 112
Figure 160: Band edge measured at Ch. 1-Avg 113
Figure 161: Band edge measured at Ch. 1-Peak 113
Figure 162: Band edge measured at Ch. 0-Avg 114
Figure 163: Band edge measured at Ch. 0-Peak 114
Figure 164: Band edge measured at Ch. 1-Avg 115
Figure 165: Band edge measured at Ch. 1-Peak 115
Figure 166: Band edge measured at Ch. 0-Avg 116
Figure 167: Band edge measured at Ch. 0-Peak 116
Figure 168: Band edge measured at Ch. 1-Avg 117
Figure 169: Band edge measured at Ch. 1-Peak 117
Figure 170: Band edge measured at Ch. 0-Avg 118
Figure 171: Band edge measured at Ch. 0-Peak. 118
Figure 172: Band edge measured at Ch. 1-Avg 119
Figure 173: Band edge measured at Ch. 1-Peak 119
Figure 174: Band edge measured at Ch. 0-Avg 120
Figure 175: Band edge measured at Ch. 0-Peak 120
Figure 176: Band edge measured at Ch. 1-Avg 121
Figure 177: Band edge measured at Ch. 1-Peak 121
Figure 178: Band edge measured at Ch. 0-Avg 122
Figure 179: Band edge measured at Ch. 0-Peak 122
Figure 180: Band edge measured at Ch. 1-Avg 123
Figure 181: Band edge measured at Ch. 1-Peak 123
Figure 182: Band edge measured at Ch. 0-Avg 124
Figure 183: Band edge measured at Ch. 0-Peak 124
Figure 184: Band edge measured at Ch. 1-Avg 125
Figure 185: Band edge measured at Ch. 1-Peak 125
Figure 186: Band edge measured at Ch. 0-Avg 126
Figure 187: Band edge measured at Ch. 0-Peak 126
Figure 188: Band edge measured at Ch. 1-Avg 127
Figure 189: Band edge measured at Ch. 1-Peak 127
Figure 190: Band edge measured at Ch. 0-Avg 128
Figure 191: Band edge measured at Ch. 0-Peak 128
Figure 192: Band edge measured at Ch. 1-Avg 129
Figure 193: Band edge measured at Ch. 1-Peak 129
Figure 194: Band edge measured at Ch. 0-Avg 130
Figure 195: Band edge measured at Ch. 0-Peak 130

This report should always be reproduced in full. Any extracts of this report is invalid.

Figure 196: Band edge measured at Ch. 1-Avg 131
Figure 197: Band edge measured at Ch. 1-Peak 131
Figure 198: Band edge measured at Ch. 0-Avg 132
Figure 199: Band edge measured at Ch. 0-Peak 132
Figure 200: Band edge measured at Ch. 1-Avg 133
Figure 201: Band edge measured at Ch. 1-Peak 133

This report should always be reproduced in full. Any extracts of this report is invalid.

1 TEST REPORT SUMMARY

Applicant	Cambium Networks			
Manufacturer	Gemtek Electronics (ChangSHU) Co.			
Equipment Under Test	5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio			
Model	C058900P072A, C058900C072A, C058900P062A, C058900C062A			
Serial number	**Type of test**	**Serial no.**	**Wi-Fi MAC**	**Ethernet MAC**
	Radiated& Conducted	AE50013163	000456F80301	000456F80300
Date of Submission	12th May 2015			
Date of Test	12th May 2015 to 25th May 2015			
Venue of Test	Tarang Lab			

Applicable Standard	**FCC Section**	**Description**	**Results**
47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C; RSS-Gen, Issue 4, Nov 2014 RSS-210, Issue 8, Dec 2010	Informative	Duty Cycle	NA
	§15.403 (h) (i)	26 dB Emission Bandwidth measurement	NA
	NA	99 Percent Occupied Bandwidth	NA
	§15.407 (a) (2)	Maximum Conducted Output Power	PASS
	§15.407 (a) (2)	Peak Power Spectral Density	PASS
	§15.407 (b) (3)	Unwanted emission levels-Conducted Band edge	PASS

This report should always be reproduced in full. Any extracts of this report is invalid.

5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio was tested by Tarang Lab as per the standards that are listed in the table above. Based on the observations during the test and interpretations by Tarang lab, results have been indicated. The test results produced in this report shall apply only to the above sample that have been tested under the specific conditions and modes of testing as described in the report. Other similar equipment may not necessarily reproduce same result due to production tolerances and measurement uncertainties. Any measurement uncertainties listed in this report are for information purpose only.

The results shall stand invalid, in case there are any modifications / additions / removals to the hardware or software or end use atmosphere to the product tested. This report shall not be modified or in any way revised unless it is expressly permitted and endorsed by Tarang lab, through a duly authorized representative. Particulars on Manufacturer / Supplier / Product configuration / performance criteria, given in this report, are based on the information given by the customer, along with test request. Tarang does not assume any responsibility for the correctness of such information for the above mentioned equipment under test.

Customer acknowledges that this is a test report and not a certificate to gain market access for the product. To gain market access, Customer needs appropriate clearance from the Government or authorized agency for the target market. For markets that allow self-declaration, customer needs to follow the procedure defined by the target market.

Prepared by	Reviewed by	Approved by
Subhendu	Harsha	Rajneesh R
Test Engineer	Test Engineer	Functional Head

2 GENERAL INFORMATION

2.1 TEST DETAILS

The tests documented in this report are performed according to the following standards:

- ANSI C63.10-2013
- 47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C
- RSS-Gen, Issue 4, Nov 2014
- RSS-210, Issue 8, Dec 2010

2.2 TEST FACILITY DETAILS

All the tests were carried out at Tarang –Product Qualification and Compliance Planet located at Wipro Limited, SJP2, DoddaKanelli, Sarjapur road, Bangalore, Karnataka, India. 560035.

Following are the accreditation and listing details for Tarang.

Accreditation / Listing body	Registration / Company / Certificate Number
ISO 17025 Accreditation	Certificate Number :T-1533 and T-1534(NABL) http://www.nabl-india.org
FCC (Federal Communications Commission)	Registration Number: 799247 http://www.fcc.gov/
IC (Industry Canada)	Company Number: 9023A http://www.ic.gc.ca
TEC Approval	Certificate Number: TEC/MRA/CAB/IND-D/3 CAB Identification: IND003
DGAQA Approval	1415/F-15/DGAQA/Aircraft
CEMILAC approval	Certificate Number: F-07-22 Reference Number: CEMILAC/6042/TH-13/TC & S

3 INSTRUMENTATION AND CALIBRATION

3.1 TEST AND MEASURING EQUIPMENT

The list of following measuring equipment used for this testing conforms to the applicable standards. Performance of all test and measuring equipment including any accessories are checked periodically to ensure accuracy.

3.2 EQUIPMENTS USED

Name of Equipment	Manufacturer	Model No	Serial No	Calibration Due
EMI Test Receiver	R&S	ESIB40	100306	07th Oct 2015
Spectrum Analyzer	Agilent Technologies	E4407B	MY45112948	02nd Apr 2016
X-Series USB Peak & Average Power Sensor	Keysight Technologies	U2021XA	MY55050002	08th Feb 2016
X-Series USB Peak & Average Power Sensor	Keysight Technologies	U2021XA	MY55050001	08th Feb 2016
Tunable Band reject/Notch filter	Wainwright Instruments GmbH	WTRCJV8-5150-5850-40-160-50SSK	01	NA

4 PRODUCT INFORMATION

4.1 DESCRIPTION OF THE PRODUCT

EUT is a Point to point & Point to Multipoint Fixed outdoor Transceiver.

Product Category / Type of Equipment	TEL (Telecom)
EUT Operating AC Voltage	120V AC
Max EUT AC Operating Current	0.5A
Max EUT AC Power Rating	60W
EUT Operating DC Voltage	30V DC
Max EUT DC Operating Current	0.5A
Max EUT DC Power Rating	12W

4.2 SOFTWARE AND FIRMWARE DETAILS

The 5GHz ePMP Integrated Radio and 5GHz ePMP Connectorized Radio was configured with test software and configured to have the following settings during the course of testing:

- 40MHz modulation bandwidth for low Channel (CH 0)
  - Rate - HT40,
  - 54Mbps OFDM, MCS15:270Mbps
  - Interframe spacing is tx100
  - Tx gain is 86 for 2.15dBi antenna configuration
  - Tx gain is 55for 17dBi antenna configuration
  - Tx gain is 42 for 24dBi antenna configuration

- 40MHz modulation bandwidth for low Channel (CH 1)
  - Rate - HT40,
  - 54Mbps OFDM, MCS15:270Mbps
  - Interframe spacing is tx100
  - Tx gain is 90 for 2.15dBi antenna configuration
  - Tx gain is 63 for 17dBi antenna configuration
  - Tx gain is 46 for 24dBi antenna configuration

- 40MHz modulation bandwidth for Mid Channel (CH 0)
  - Rate - HT40,
  - 54Mbps OFDM, MCS15:270Mbps
  - Interframe spacing is tx100
  - Tx gain is 103 for 2.15dBi antenna configuration
  - Tx gain is 82 for 17dBi antenna configuration
  - Tx gain is 66 for 24dBi antenna configuration

This report should always be reproduced in full. Any extracts of this report is invalid.

- 40MHz modulation bandwidth for Mid Channel (CH 1)
    - Rate - HT40,
    - 54Mbps OFDM, MCS15:270Mbps
    - Interframe spacing is tx100
    - Tx gain is 108 for 2.15dBi antenna configuration
    - Tx gain is 88 for 17dBi antenna configuration
    - Tx gain is 68 for 24dBi antenna configuration

- 40MHz modulation bandwidth for High Channel (CH 0)
    - Rate - HT40,
    - 54Mbps OFDM, MCS15:270Mbps
    - Interframe spacing is tx100
    - Tx gain is 79 for 2.15dBi antenna configuration
    - Tx gain is 48 for 17dBi antenna configuration
    - Tx gain is 33 for 24dBi antenna configuration

- 40MHz modulation bandwidth for High Channel (CH 1)
    - Rate - HT40,
    - 54Mbps OFDM, MCS15:270Mbps
    - Interframe spacing is tx100
    - Tx gain is 80 for 2.15dBi antenna configuration
    - Tx gain is 50 for 17dBi antenna configuration
    - Tx gain is 36 for 24dBi antenna configuration

- 5MHz modulation bandwidth for low Channel (CH 0)
    - Rate – HT20,
    - 54Mbps OFDM, MCS15:130Mbps
    - Interframe spacing is tx100
    - Tx gain is 94 for 2.15dBi antenna configuration
    - Tx gain is 73 for 17dBi antenna configuration
    - Tx gain is 55 for 24dBi antenna configuration

- 5MHz modulation bandwidth for low Channel (CH 1)
    - Rate – HT20,
    - 54Mbps OFDM, MCS15:130Mbps
    - Interframe spacing is tx100
    - Tx gain is 98 for 2.15dBi antenna configuration
    - Tx gain is 75 for 17dBi antenna configuration
    - Tx gain is 60 for 24dBi antenna configuration

- 5MHz modulation bandwidth for Mid Channel (CH 0)
    - Rate – HT20,
    - 54Mbps OFDM, MCS15:130Mbps
    - Interframe spacing is tx100
    - Tx gain is 108 for 2.15dBi antenna configuration
    - Tx gain is 80 for 17dBi antenna configuration
    - Tx gain is 66 for 24dBi antenna configuration

- 5MHz modulation bandwidth for Mid Channel (CH 1)
    - Rate – HT20,
    - 54Mbps OFDM, MCS15:130Mbps
    - Interframe spacing is tx100
    - Tx gain is 110 for 2.15dBi antenna configuration
    - Tx gain is 80 for 17dBi antenna configuration
    - Tx gain is 66 for 24dBi antenna configuration

- 5MHz modulation bandwidth for High Channel (CH 0)
    - Rate – HT20,
    - 54Mbps OFDM, MCS15:130Mbps
    - Interframe spacing is tx100
    - Tx gain is 53 for 2.15dBi antenna configuration
    - Tx gain is 30 for 17dBi antenna configuration
    - Tx gain is 17 for 24dBi antenna configuration

- 5MHz modulation bandwidth for High Channel (CH 1)
    - Rate – HT20,
    - 54Mbps OFDM, MCS15:130Mbps
    - Interframe spacing is tx100
    - Tx gain is 62 for 2.15dBi antenna configuration
    - Tx gain is 34 for 17dBi antenna configuration
    - Tx gain is 19 for 24dBi antenna configuration

The unit was continuously monitored for transmission using an auxiliary antenna during the radiated tests

This report should always be reproduced in full. Any extracts of this report is invalid.

4.3 LIST OF PRODUCT CABLES

Cable No.	Cable Name	Cable Length	Power / Interconnection cable	Shielded / Unshielded
Cable - 1	Cat. 5E_Ethernet cable	0.5 meter	Interconnection	Unshielded
Cable - 2	Cat. 5E_Ethernet cable	2 meter	Interconnection	Unshielded
Cable - 3	RF cable (50 Ω)	0.125 meter	Interconnection	Shielded
Cable - 4	Power Cord	0.8 meter	Power	Unshielded

This report should always be reproduced in full. Any extracts of this report is invalid.

5 TEST DETAILS

5.1 PRODUCT AND TEST SETUP

5.1.1 PRODUCT CONFIGURATION

The EUT was powered through AC power supply (120VAC / 60Hz). The EUT was connected to Ethernet switch by using RJ45 cable. Figure 1 shows the product configuration during the tests. Following power supply module was used during the test to power ON the EUT.

Name of the Equipment	Manufacturer	Model Number	Serial Number
Switching Power Supply Gigabit Compatible	PHIHONG	PSA15M-300 (AP)	N000900L001A

5.1.2 TEST SETUP DETAILS

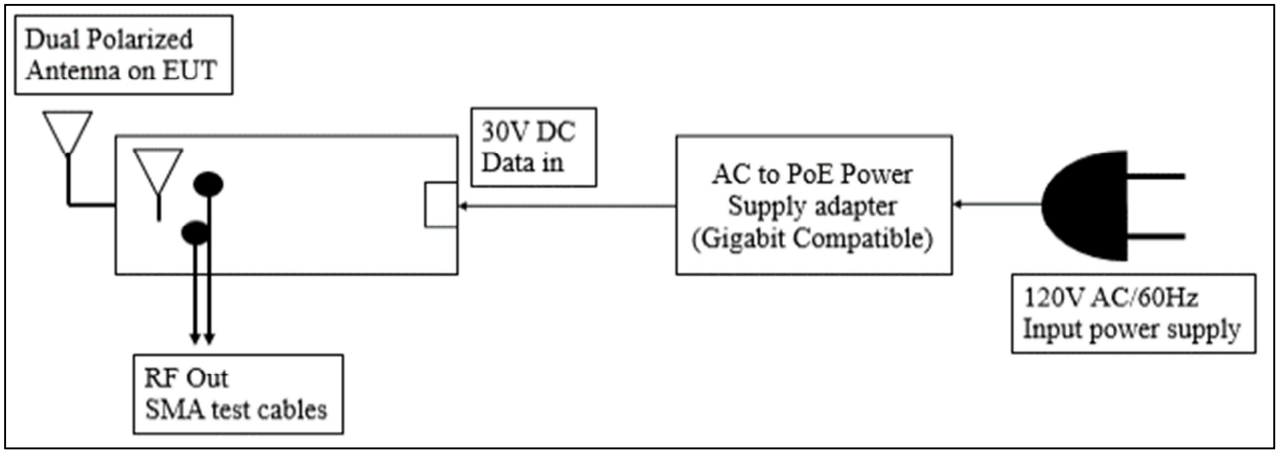

Figure 1: Block Diagram of the EUT test setup during the tests

5.1.3 ACCESSORIES

Name of the Equipment	Manufacturer	Model Number	Serial Number
Laptop	Wipro Technologies Ltd	WLG7E1100	1221

5.2 APPLICABLE TESTS

Applicable Standard	Description	Test level / Test Voltage	Applicability
47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C; RSS-Gen, Issue 4, Nov 2014 RSS-210 Issue 8, Dec 2010	Duty Cycle	NA	Antenna port
	26 dB Emission Bandwidth measurement	NA	Antenna port
	99 Percent Occupied Bandwidth	NA	Antenna port
	Maximum Conducted Output Power	Refer Section 5.3.3.2	Antenna port
	Peak Power Spectral Density	Refer Section 5.3.4.2	Antenna port
	Unwanted Emissions levels-Conducted Band edge	EIRP of < -27dBm/MHz	Antenna port

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3 TEST RESULT

5.3.1 DUTY CYCLE

5.3.1.1 TEST SPECIFICATION

Test Standard	47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014
Test Procedure	ANSI C63.10-2013
Modulation Bandwidth	**40MHz and 5MHz**
Resolution Bandwidth	1 MHz
Video Bandwidth	3 MHz
Sweep Time	10 second
Span	0 Hz
Duty Cycle	100%
Attenuation	Auto
Test Mode	Conducted
Detector	Peak
Input Voltage	120V AC
Input Frequency	60 Hz
Temperature	22.0°C
Humidity	56.0%
Tested By	Subhendu
Test Date	15th May 2015 to25th May 2015

5.3.1.2 LIMITS

Standard	Reference section	Frequency range	Limit
47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	Informative	5150MHz to 5250MHz	NA

5.3.1.3 TEST SETUP

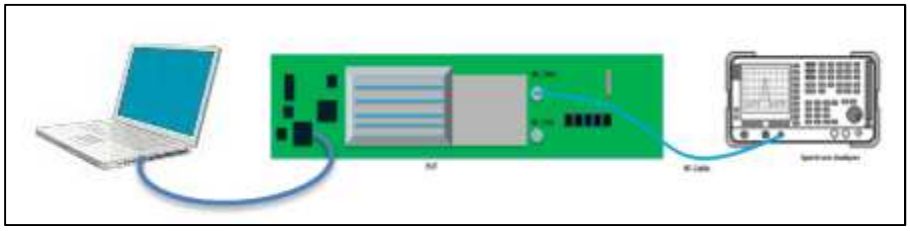

Figure 2: Typical test setup for Conducted RF Test setup

5.3.1.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per Section C of **"789033 D02 General UNII Test Procedures New Rules v01".**The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. Captured the data from spectrum analyzer and compared with the limits specified in the standard.

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.1.5 RESULT (SUPPORTING GRAPHS / DATA)

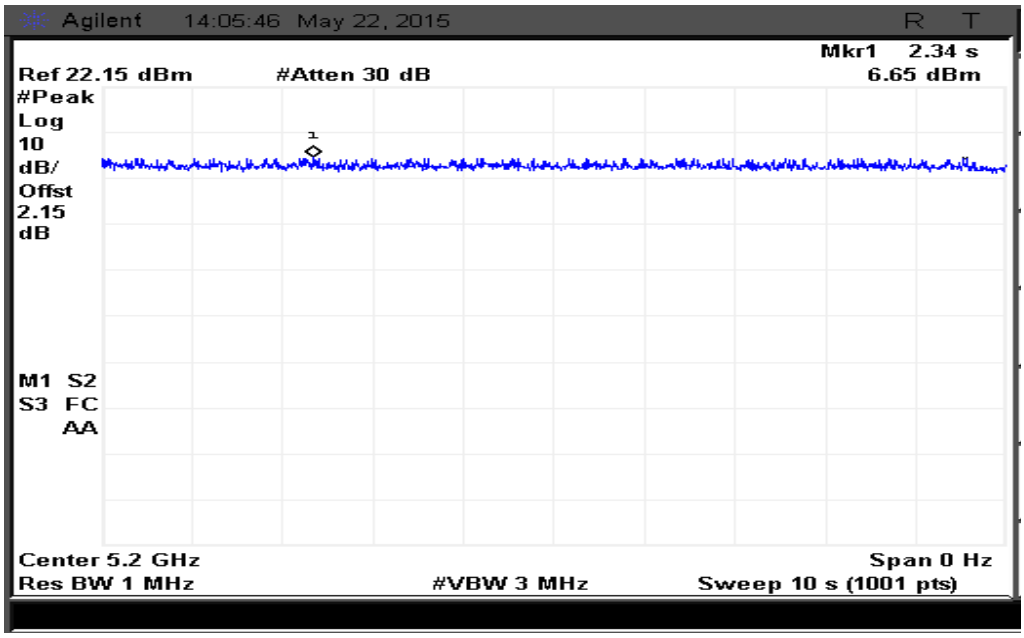

Figure 3: Duty Cycle for 40MHz Bandwidth

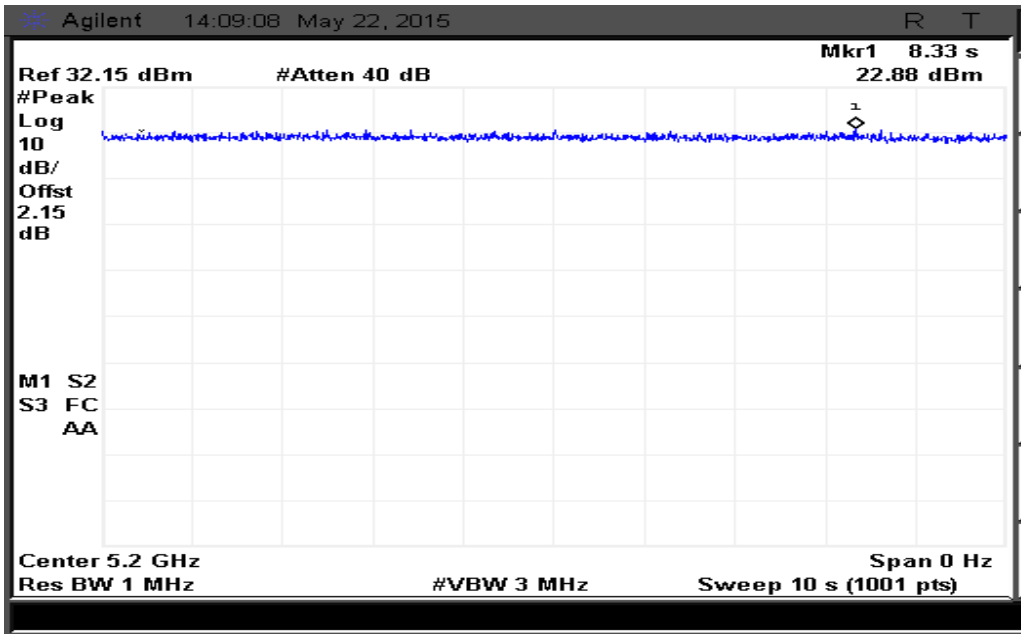

Figure 4: Duty Cycle for 5MHz Bandwidth

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2 26 dB Emission Bandwidth measurement

5.3.2.1 TEST SPECIFICATION

Test Standard	47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	
Test Procedure	ANSI C63.10-2013	
Modulation Bandwidth	**40MHz**	**5MHz**
Resolution Bandwidth	300 kHz	30 kHz
Video Bandwidth	1MHz	100 kHz
Sweep Time	100ms	
Attenuation	Auto	
Test Mode	Conducted	
Detector	Peak	
Input Voltage	120V AC	
Input Frequency	60 Hz	
Temperature	22.0°C	
Humidity	56.0%	
Tested By	Subhendu	
Test Date	12th May 2015 to 25th May 2015	

5.3.2.2 LIMITS

Standard	Reference section	Frequency range	Limit
47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	15.403 (h) (i)	5150MHz to 5250MHz	NA

5.3.2.3 TEST SETUP

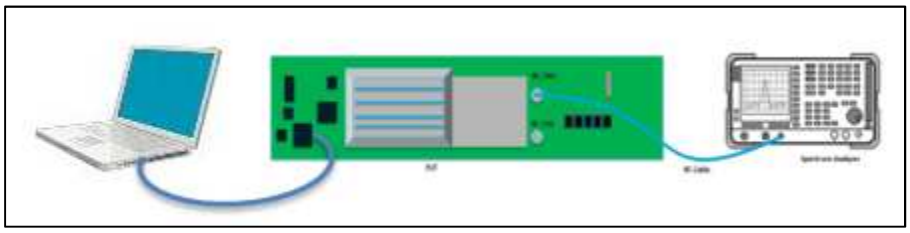

Figure 5: Typical test setup for Conducted RF Test setup

5.3.2.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per Section C of **"789033 D02 General UNII Test Procedures New Rules v01".**The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. Captured the data from spectrum analyzer and compared with the limits specified in the standard.

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.5 RESULT (SUPPORTING GRAPHS / DATA) FOR BASIC CONDITION

5.3.2.5.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

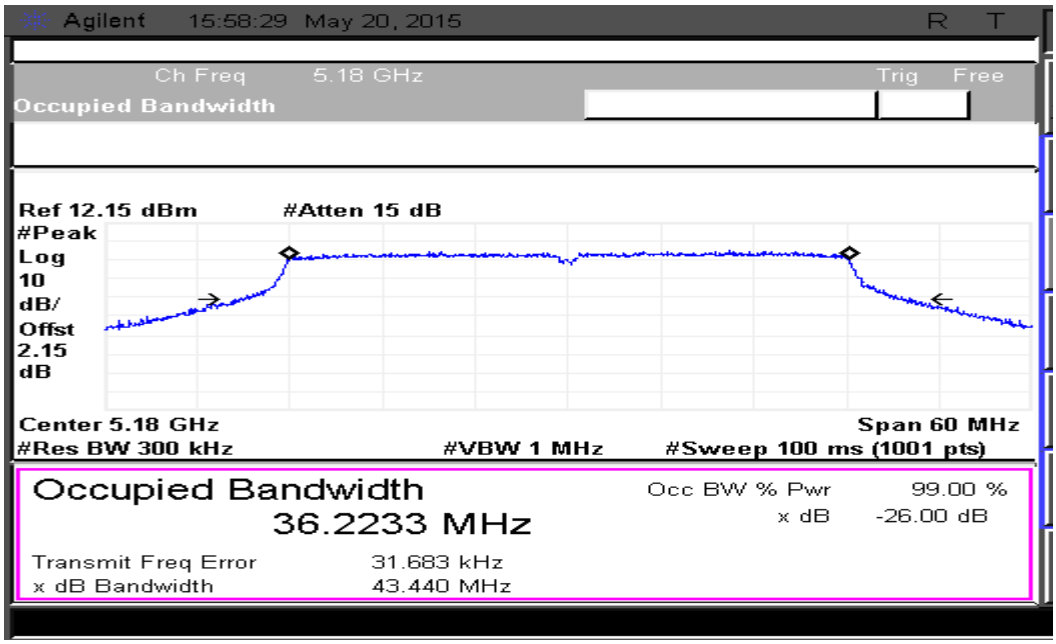

Figure 6: 26dB Bandwidth measured at ch0

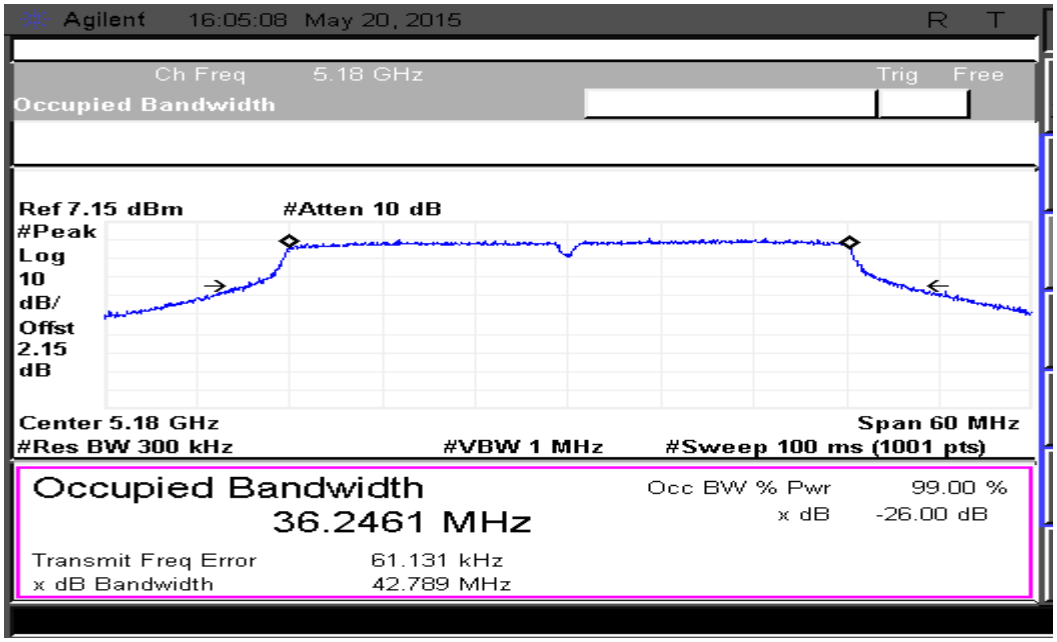

Figure 7: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.5.2 40MHz Modulation BW -Mid channel_5200MHz

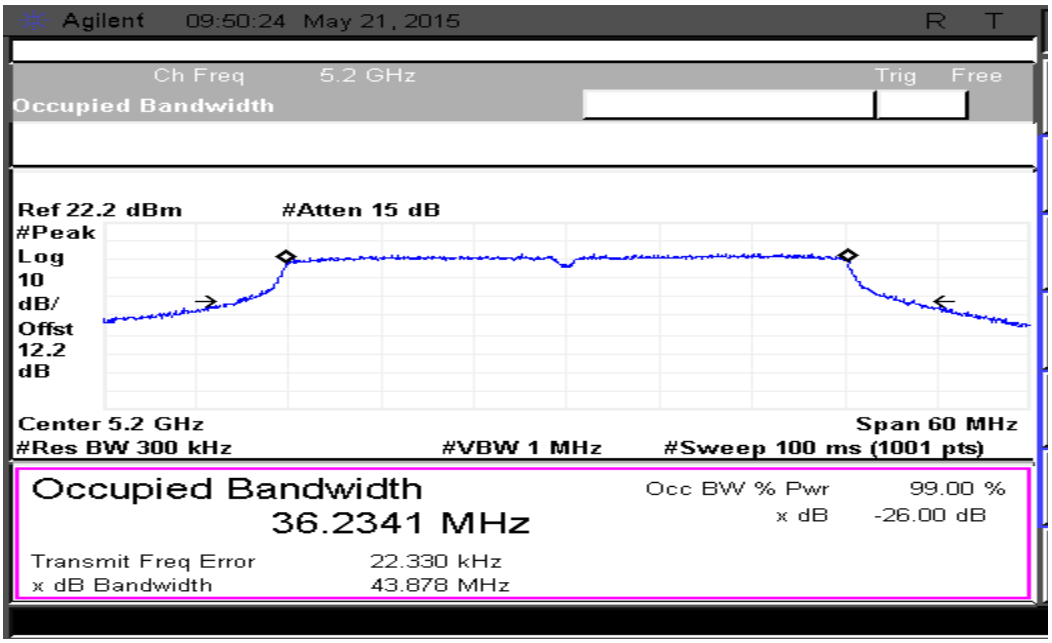

Figure 8: 26dB Bandwidth measured at ch0

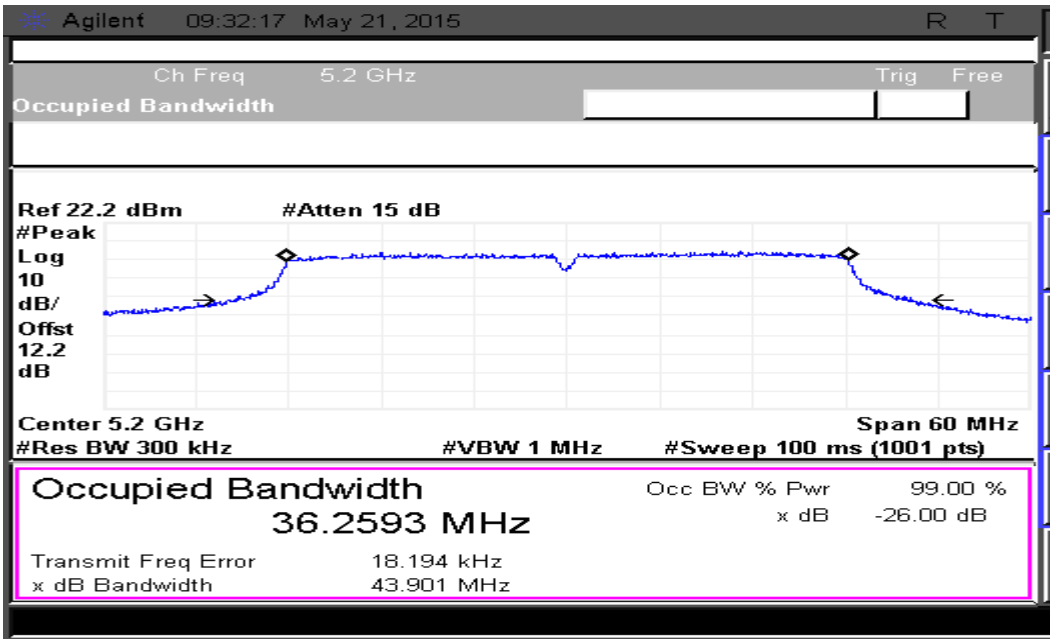

Figure 9: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.5.3 40MHz Modulation BW -High channel_5220MHz

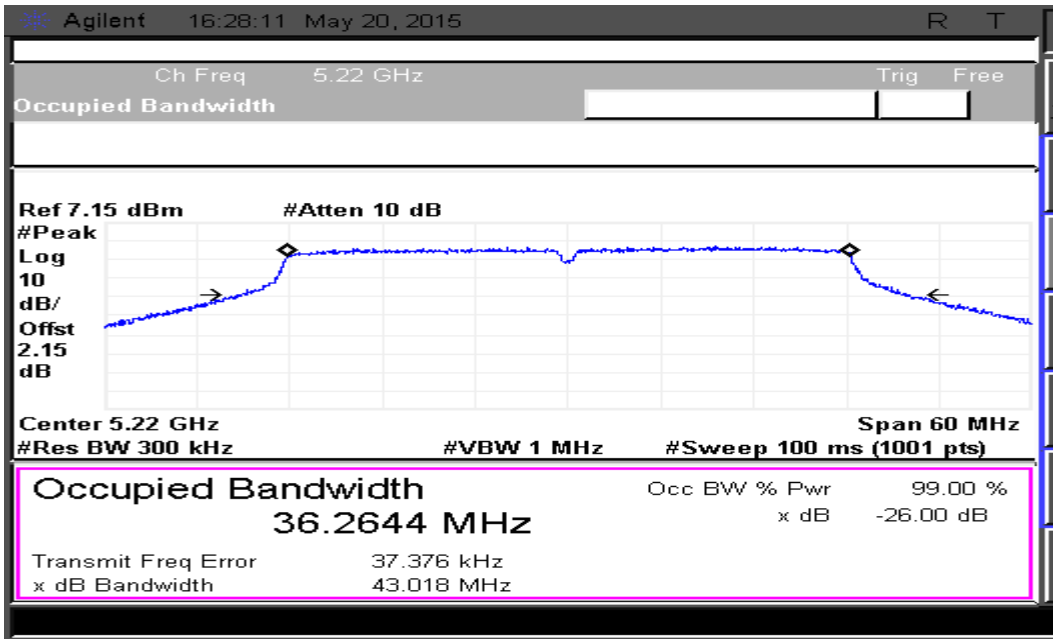

Figure 10: 26dB Bandwidth measured at ch0

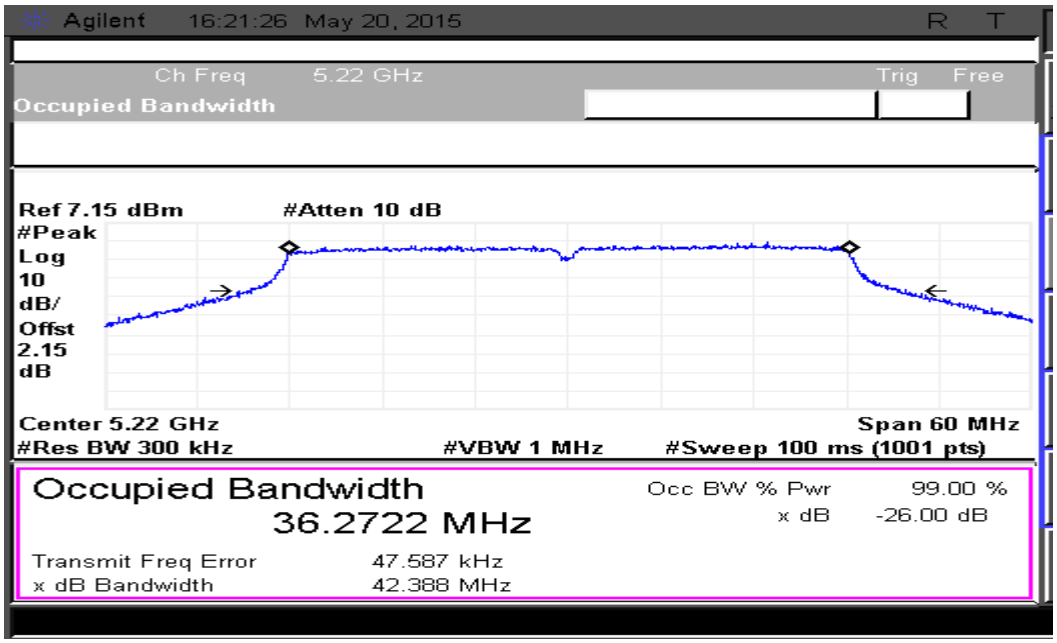

Figure 11: 26dB Bandwidth measured at ch1

5.3.2.5.4 5 MHz MODULATION BW-LOW CHANNEL_5155MHz

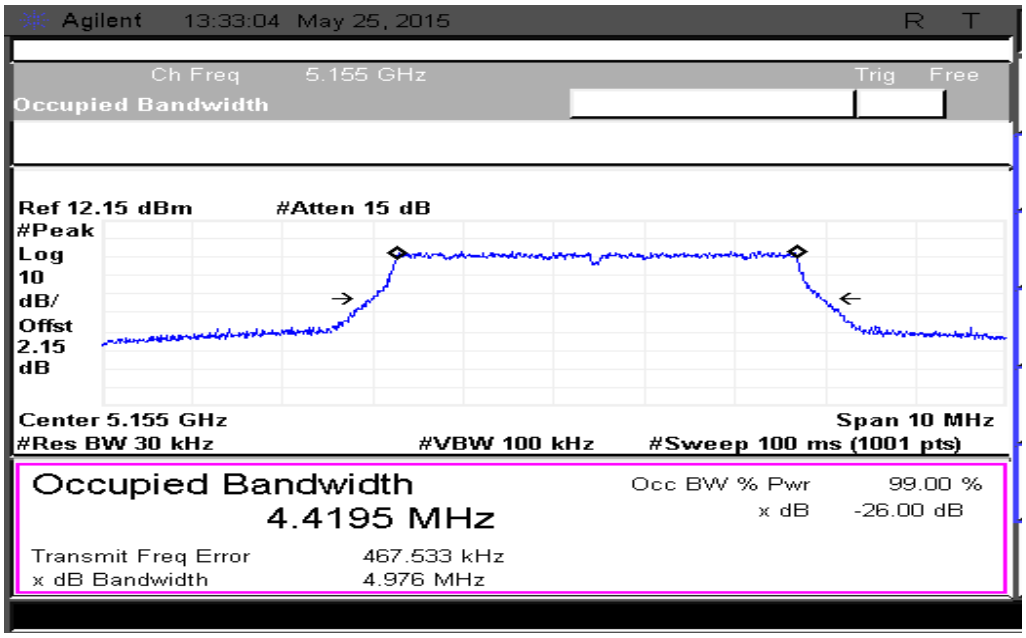

Figure 12: 26dB Bandwidth measured at ch0

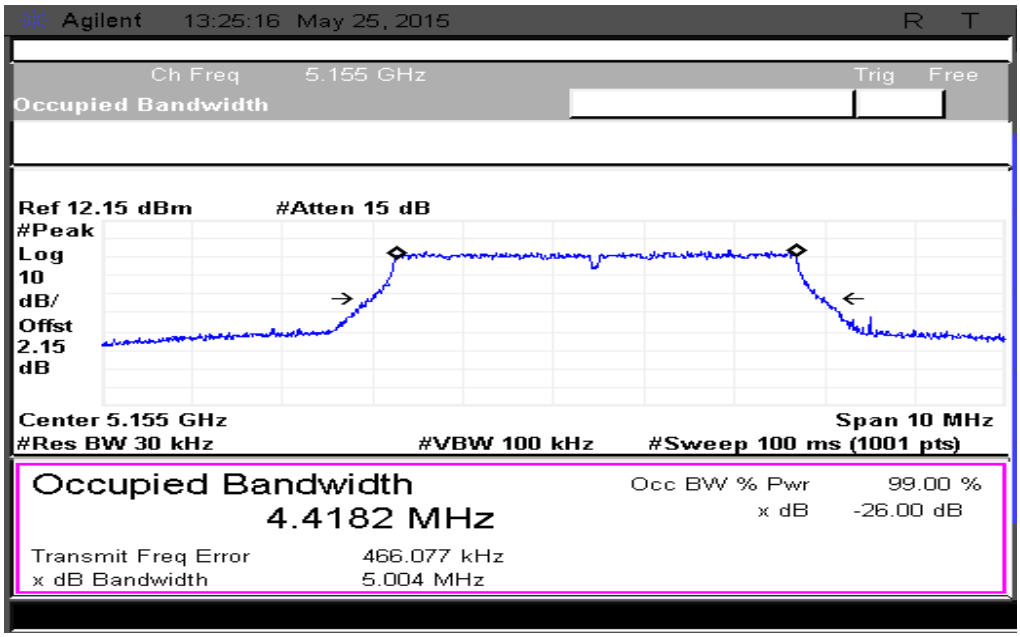

Figure 13: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.5.5 5 MHz MODULATION BW-MID CHANNEL_5200MHz

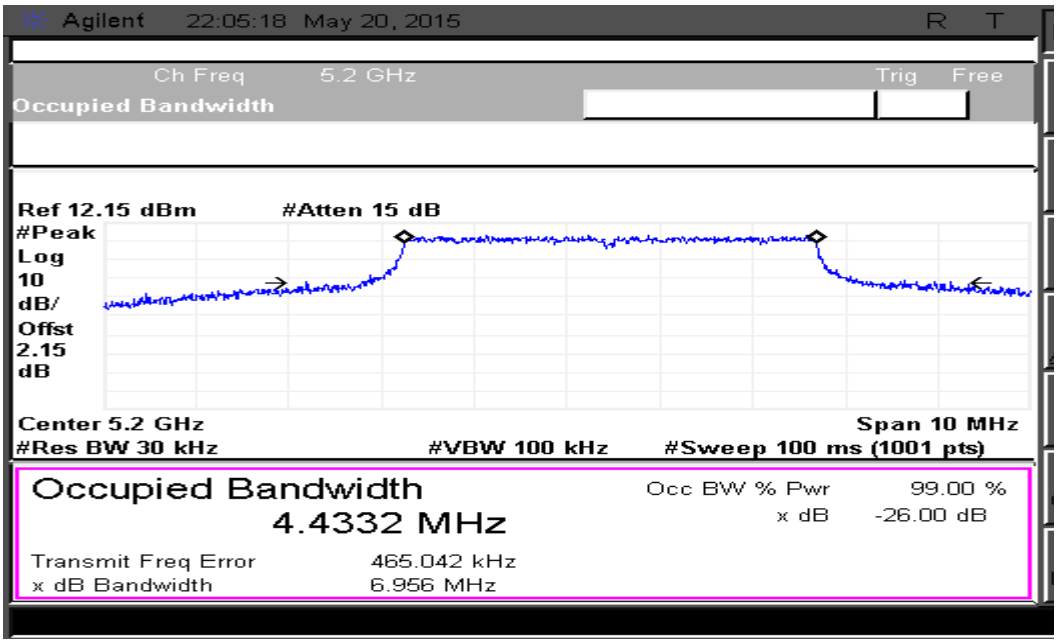

Figure 14: 26dB Bandwidth measured at ch0

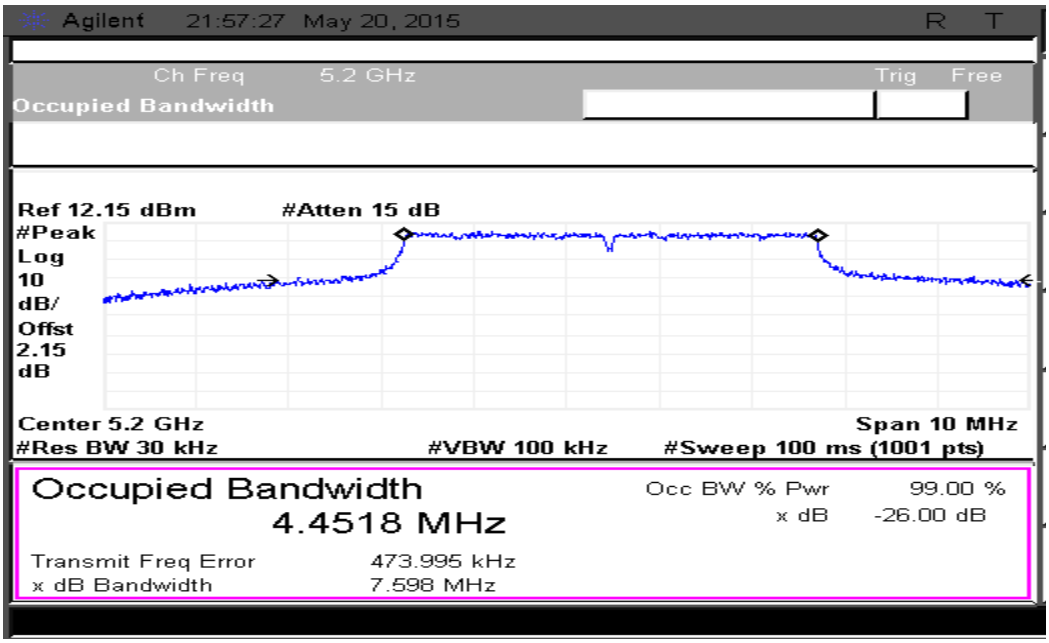

Figure 15: 26dB Bandwidth measured at ch1

5.3.2.5.6 5 MHz MODULATION BW-HIGH CHANNEL_5245MHz

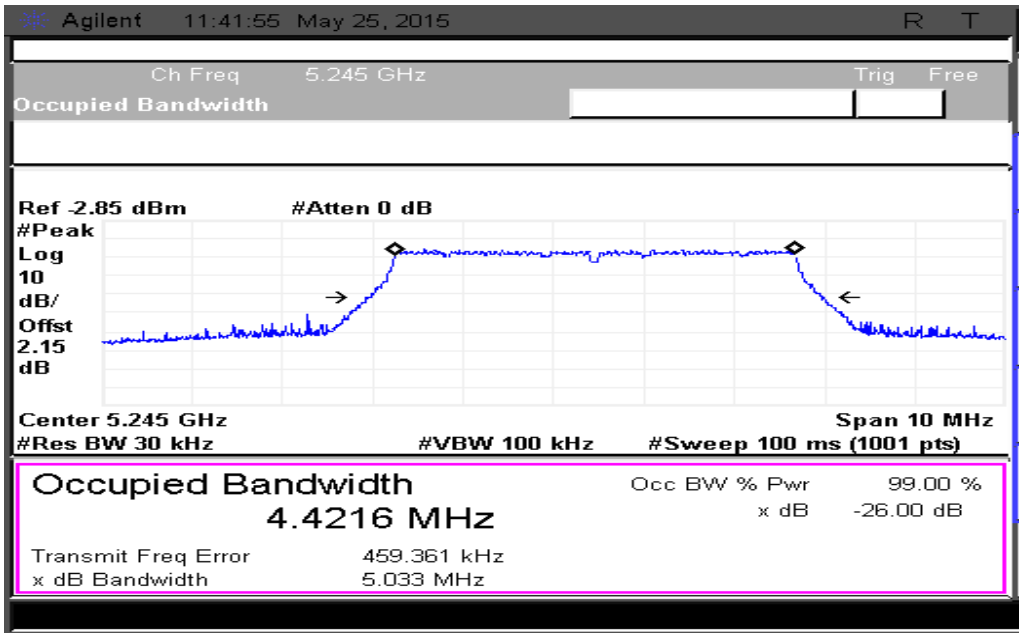

Figure 16: 26dB Bandwidth measured at ch0

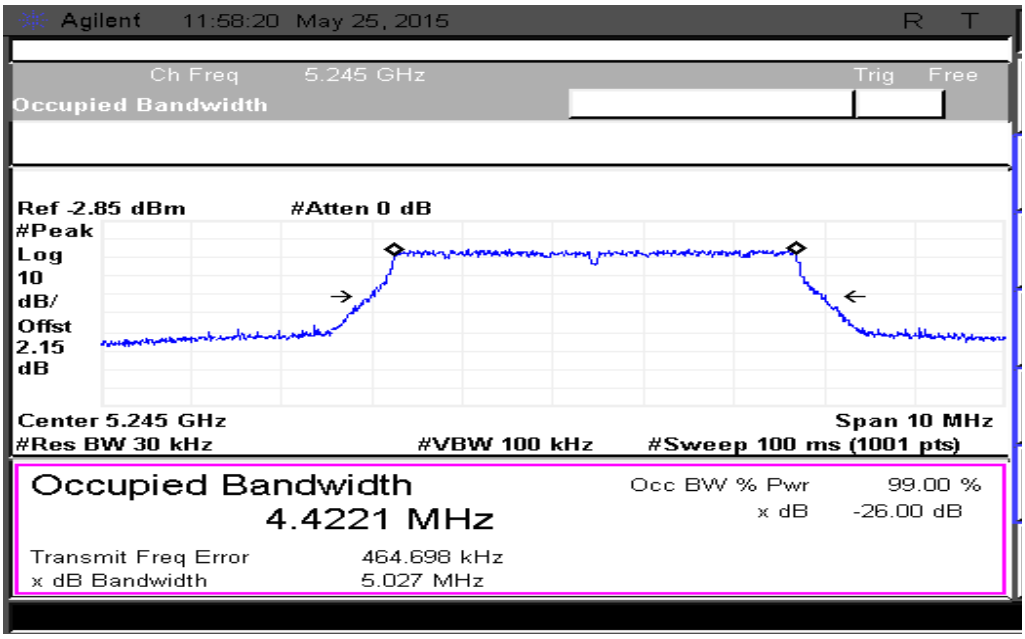

Figure 17: 26dB Bandwidth measured at ch1

5.3.2.6 RESULT (SUPPORTING GRAPHS / DATA) FOR 17DBI ANTENNA CONDITION

5.3.2.6.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

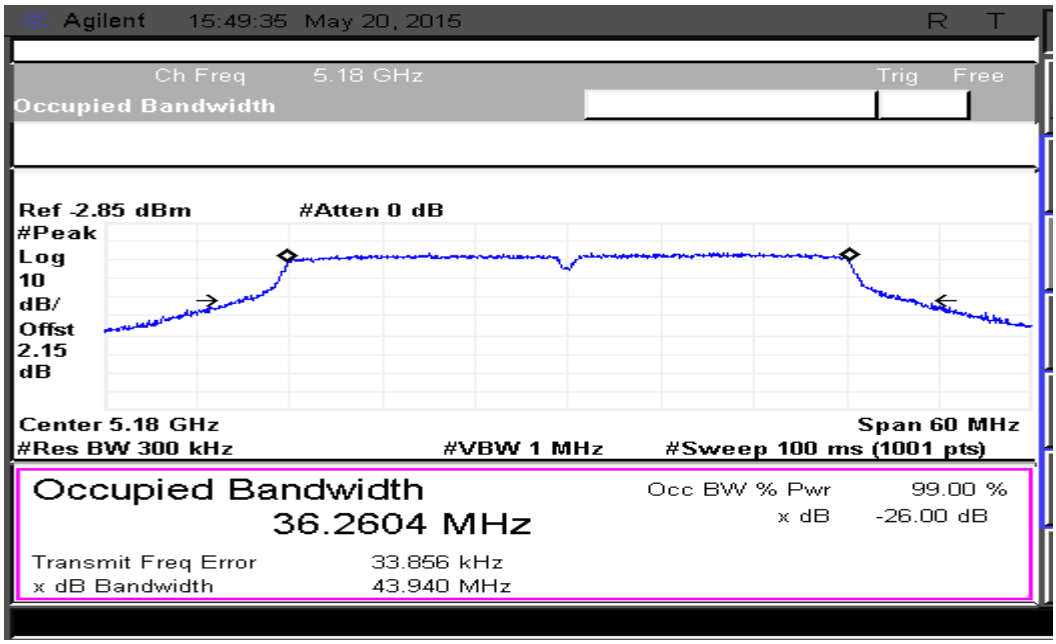

Figure 18: 26dB Bandwidth measured at ch0

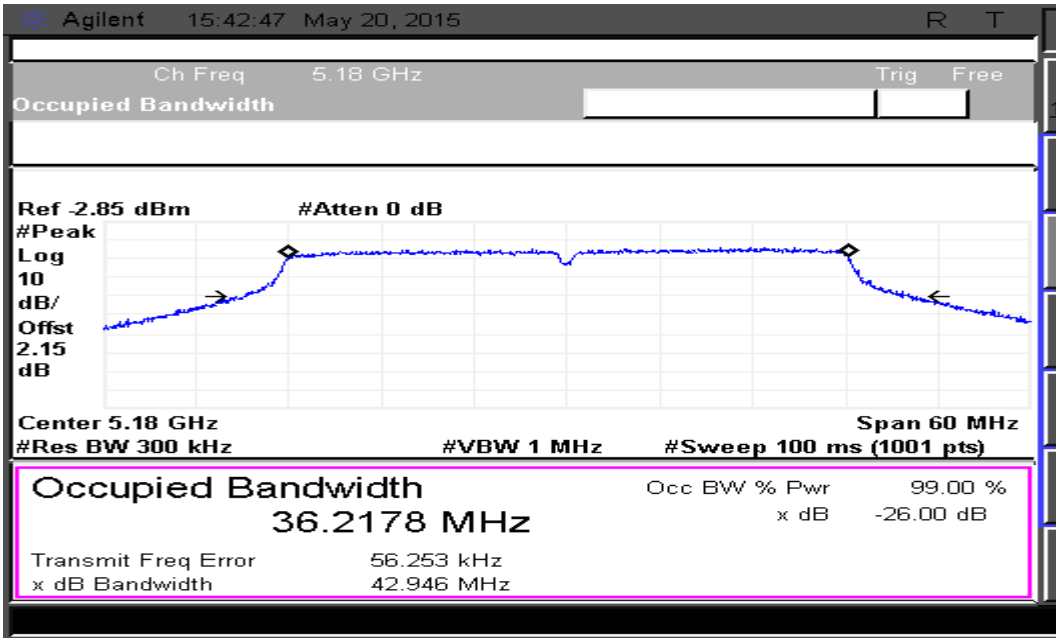

Figure 19: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.6.2 40MHz Modulation BW -Mid channel_5200 MHz

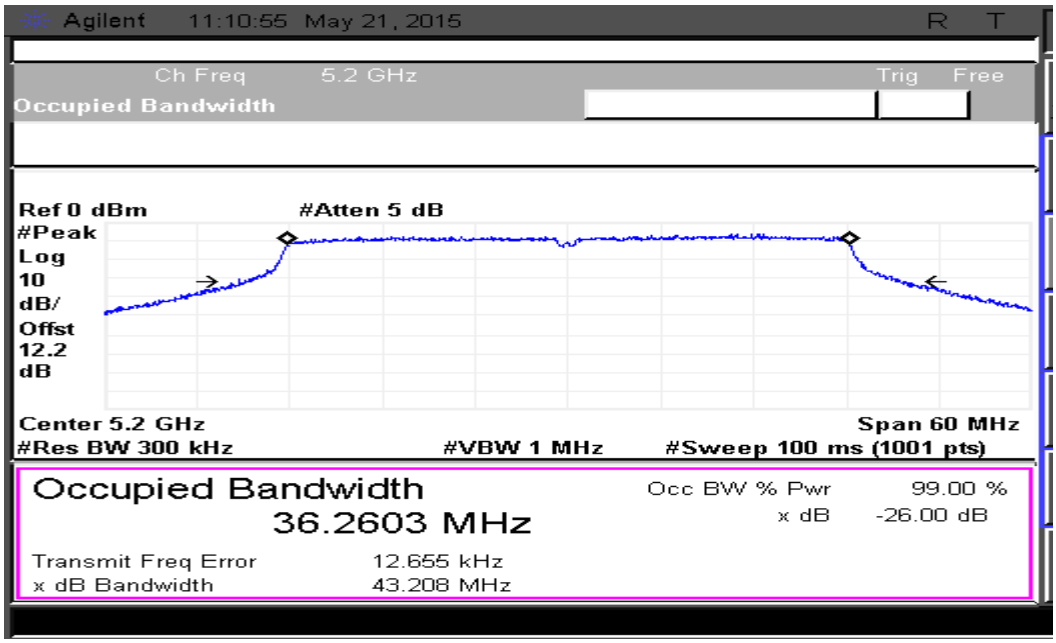

Figure 20: 26dB Bandwidth measured at ch0

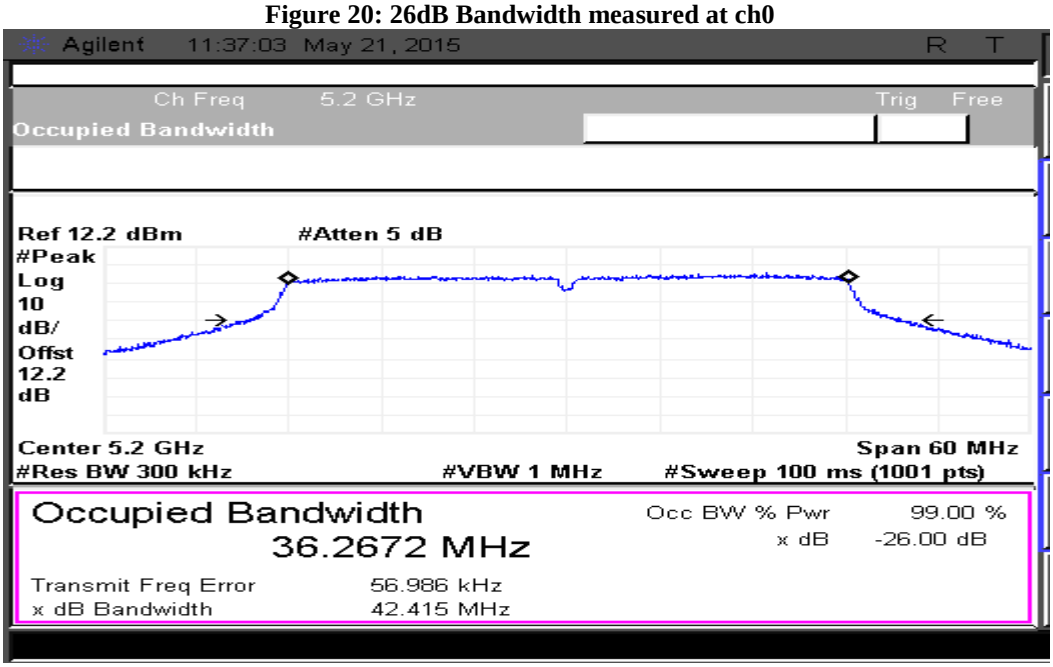

Figure 21: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.6.3 40MHz Modulation BW -High channel_5220MHz

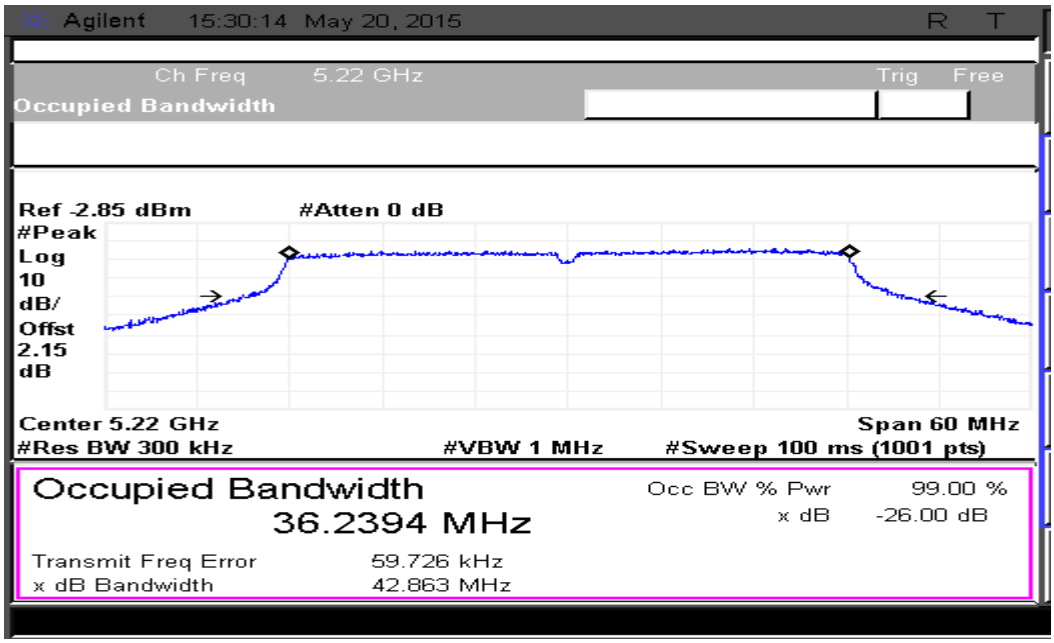

Figure 22: 26dB Bandwidth measured at ch0

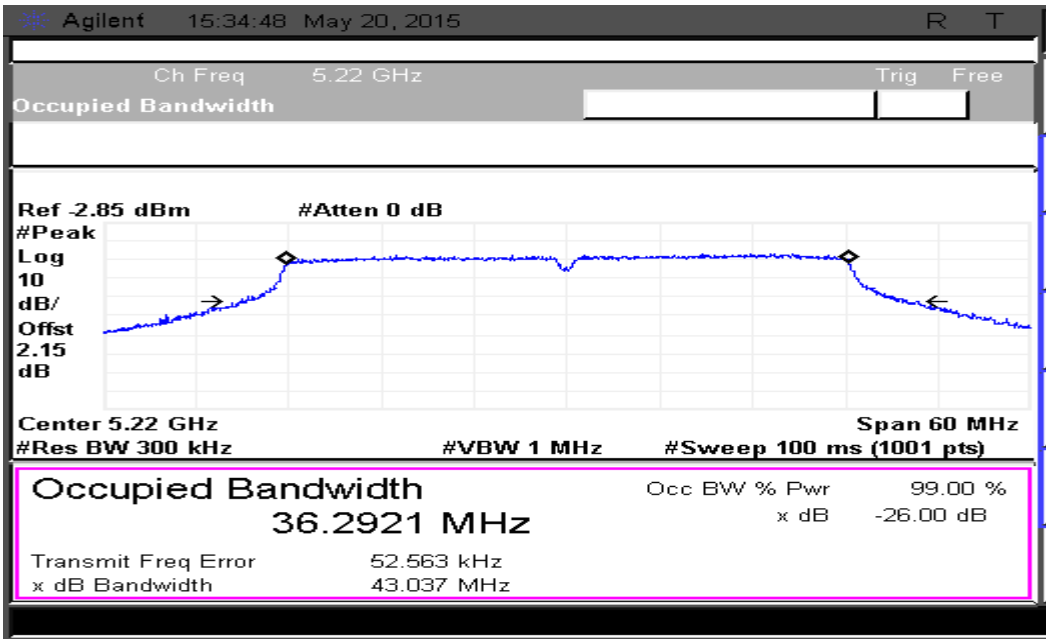

Figure 23: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.6.4 5MHz Modulation BW-Low channel_5155MHz

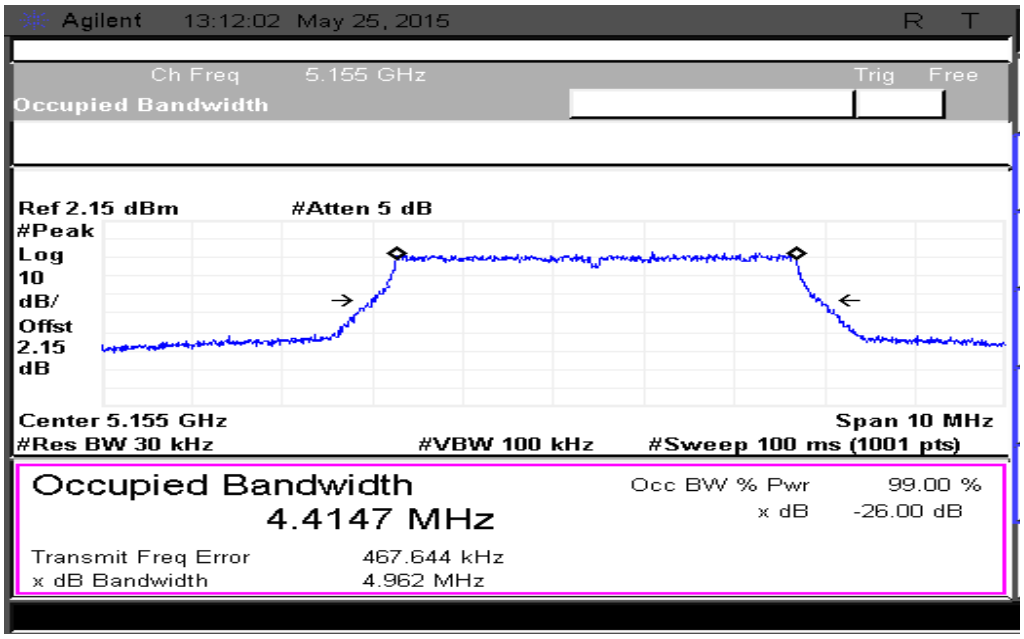

Figure 24: 26dB Bandwidth measured at ch0

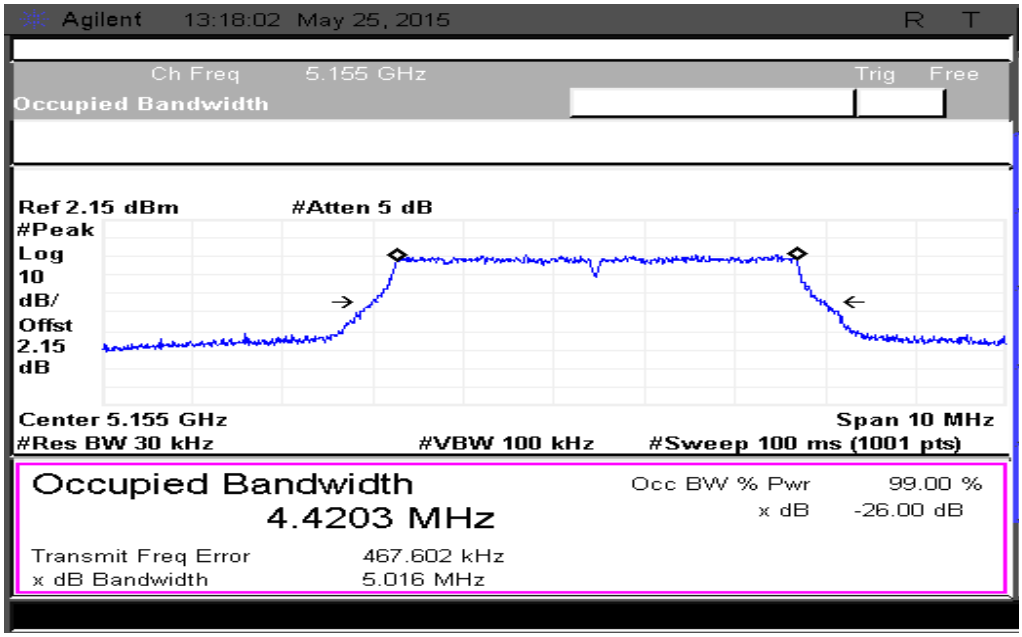

Figure 25: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.6.5 5MHz Modulation BW-Mid channel_5200 MHz

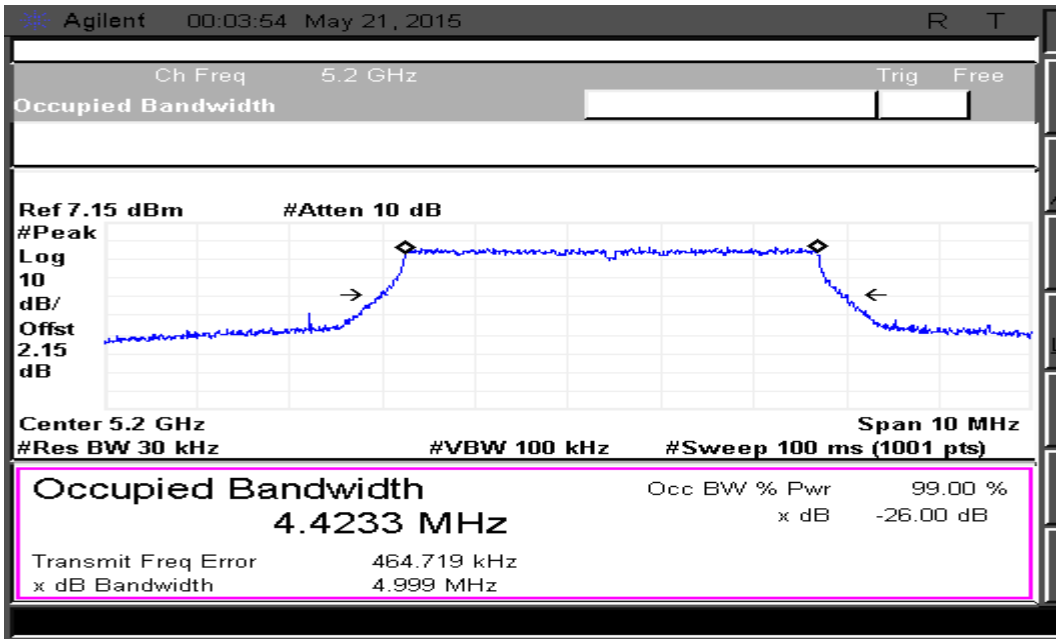

Figure 26: 26dB Bandwidth measured at ch0

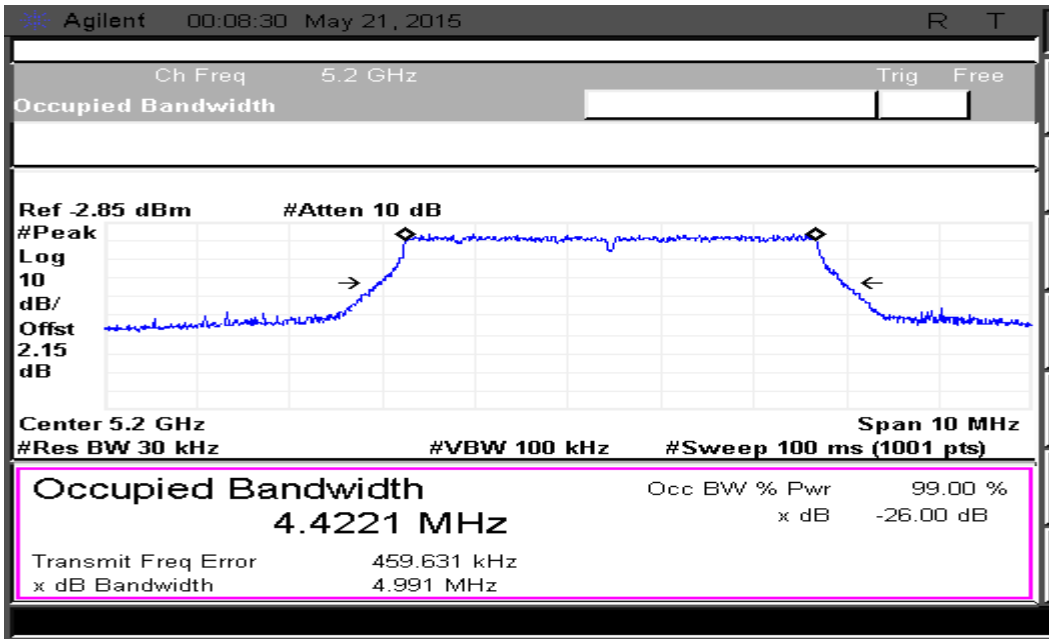

Figure 27: 26dB Bandwidth measured at ch1

5.3.2.6.6 5MHz Modulation BW-High channel_5245MHz

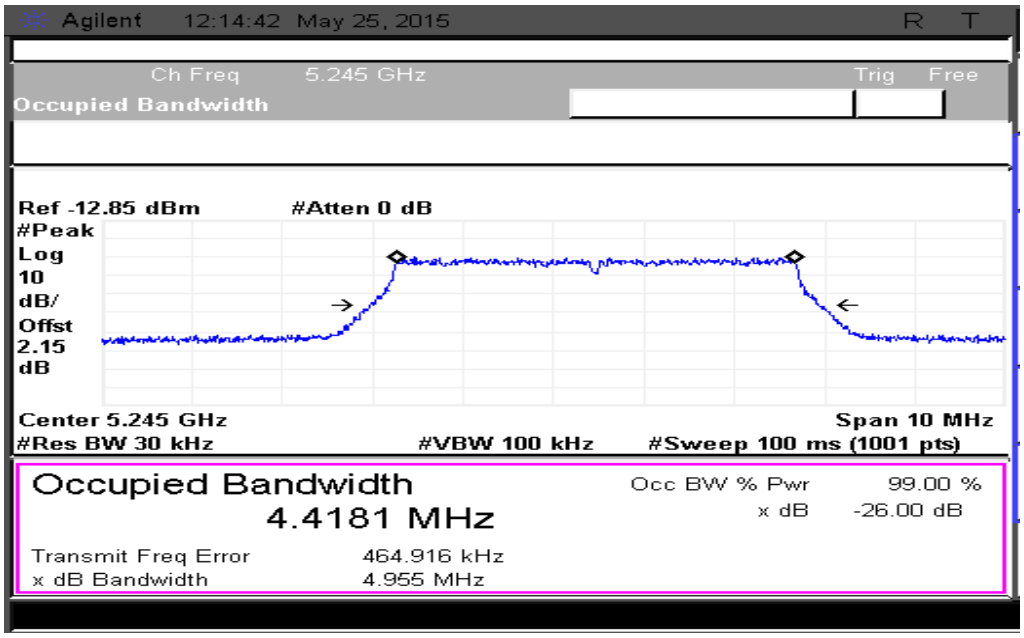

Figure 28: 26dB Bandwidth measured at ch0

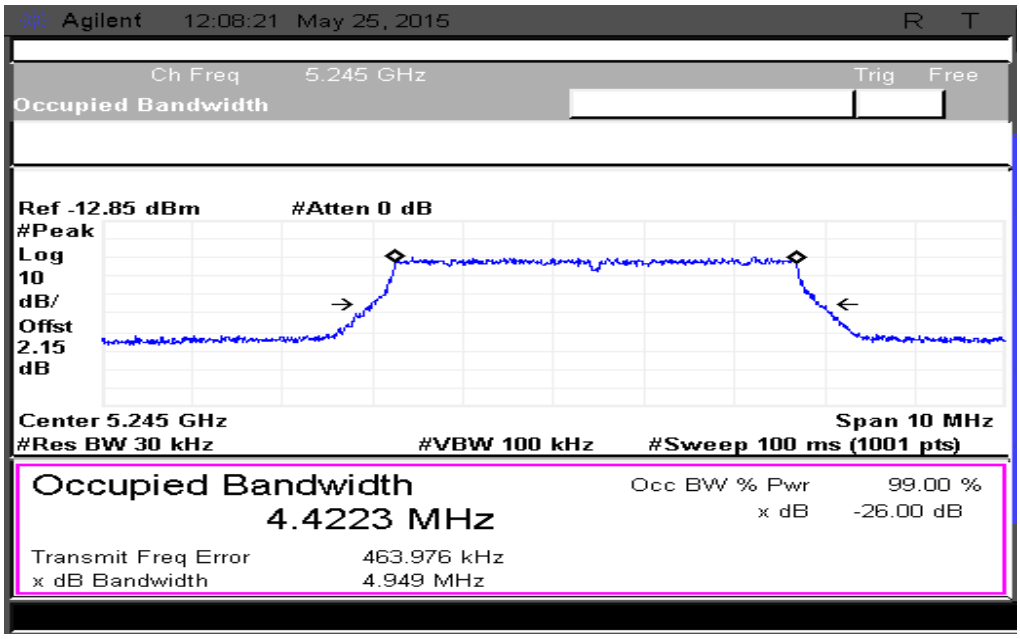

Figure 29: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.7 RESULT (SUPPORTING GRAPHS / DATA) FOR 24DBI DISH CONDITION

5.3.2.7.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

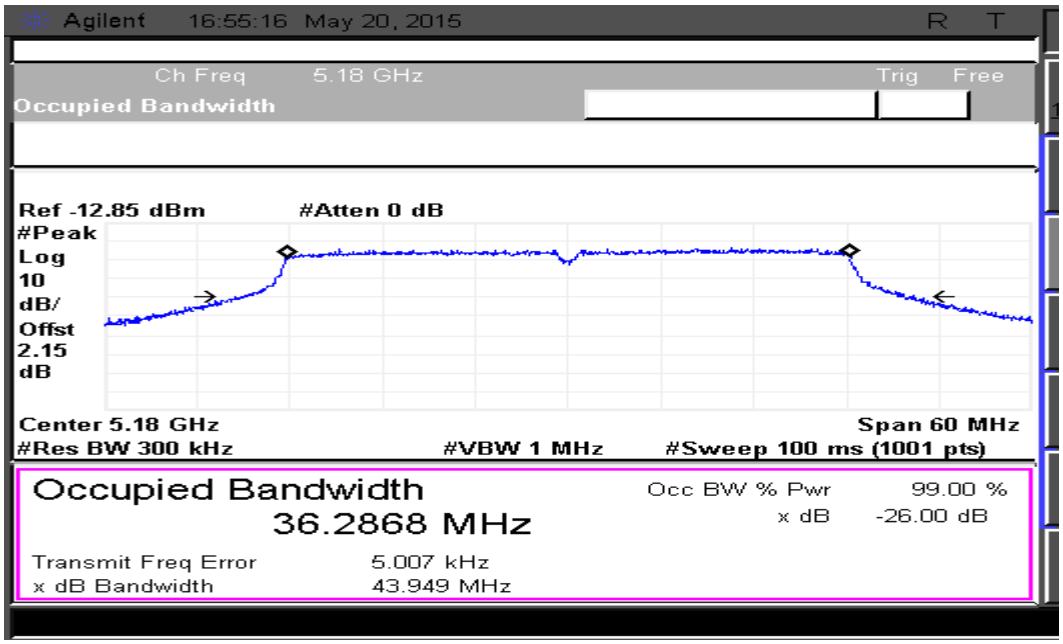

Figure 30: 26dB Bandwidth measured at ch0

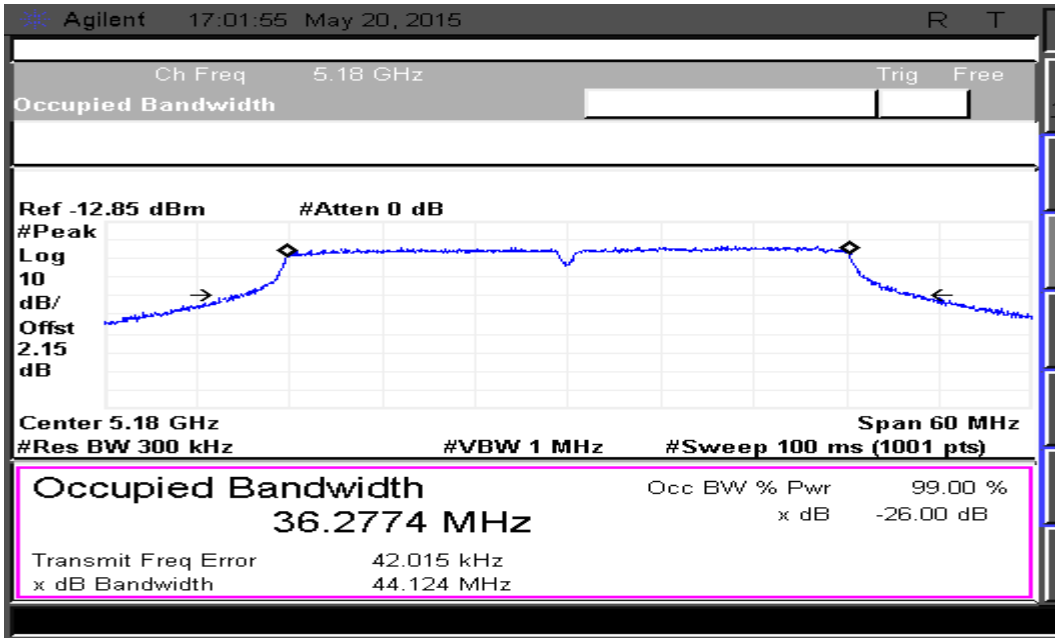

Figure 31: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.7.2 40MHz Modulation BW -Mid channel_5200 MHz

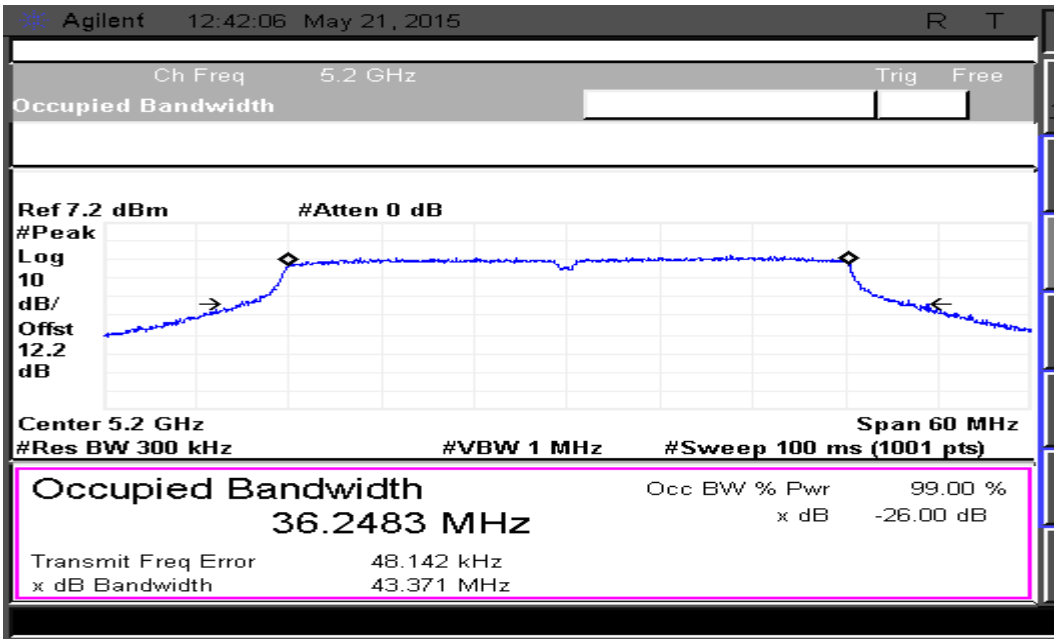

Figure 32: 26dB Bandwidth measured at ch0

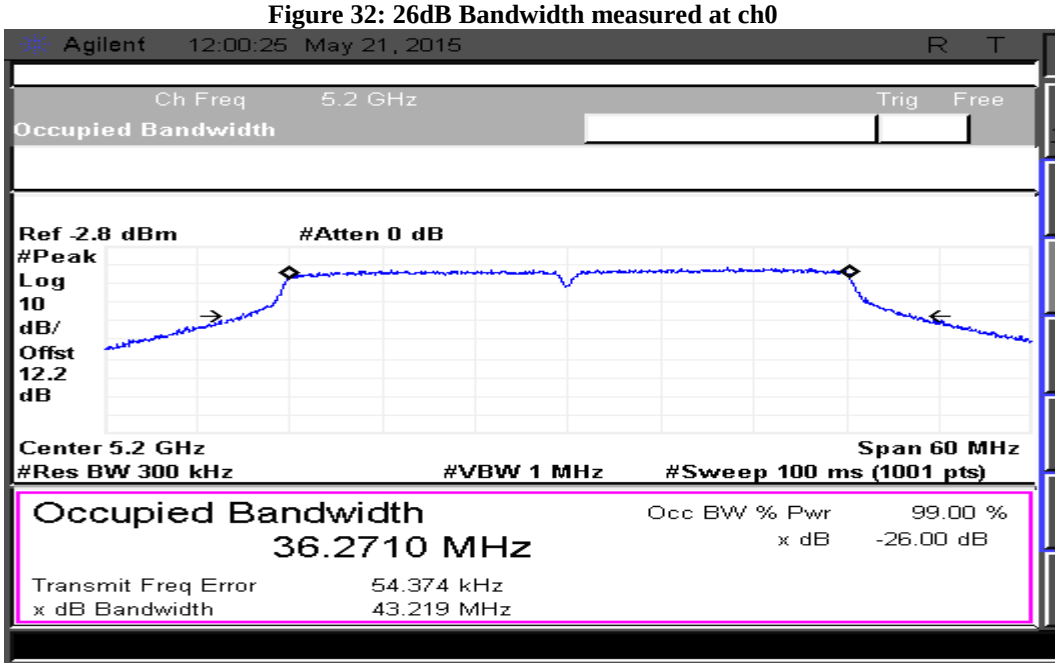

Figure 33: 26dB Bandwidth measured at ch1

5.3.2.7.3 40MHz Modulation BW -High channel_5220MHz

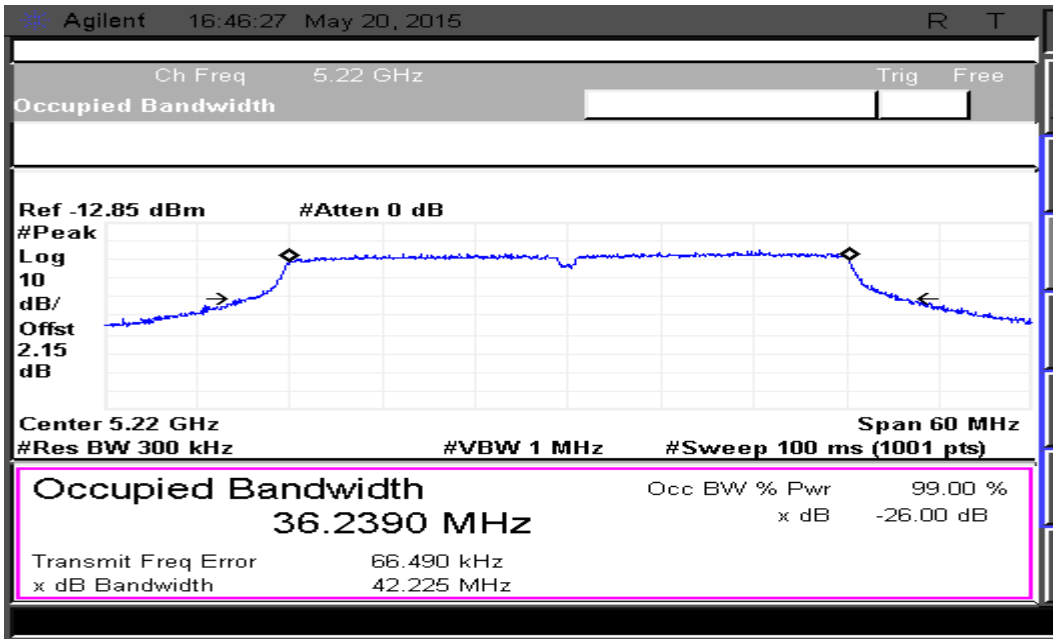

Figure 34: 26dB Bandwidth measured at ch0

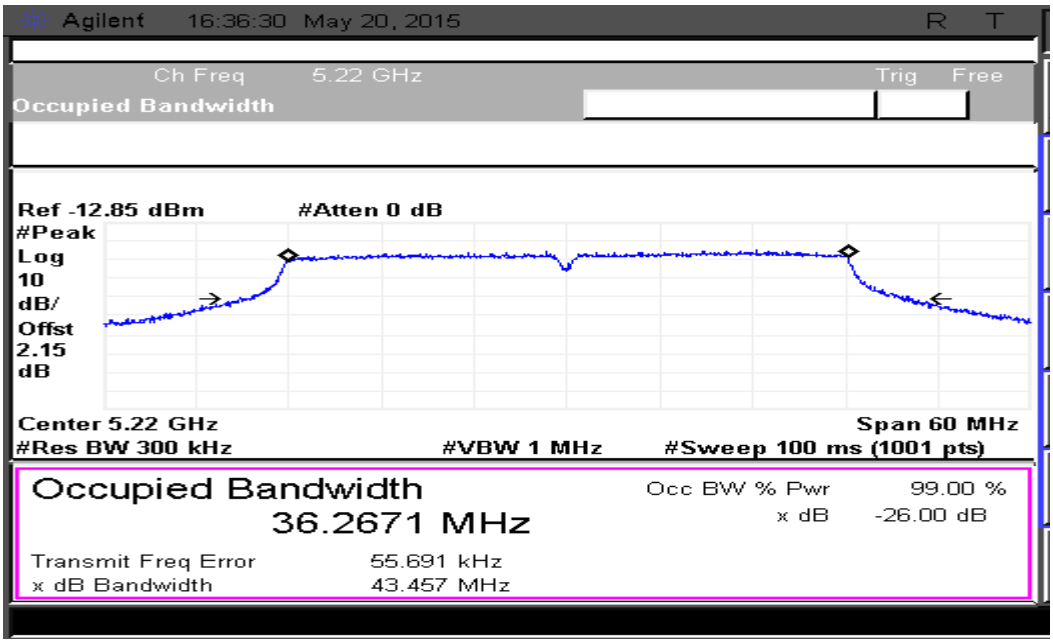

Figure 35: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.7.4 5MHz Modulation BW-Low channel_5155MHz

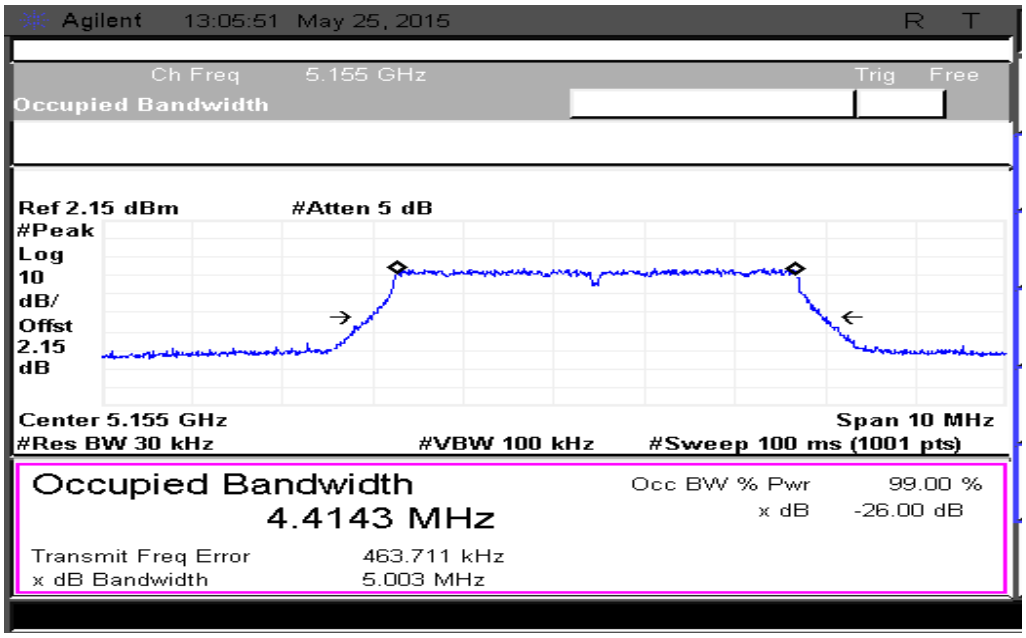

Figure 36: 26dB Bandwidth measured at ch0

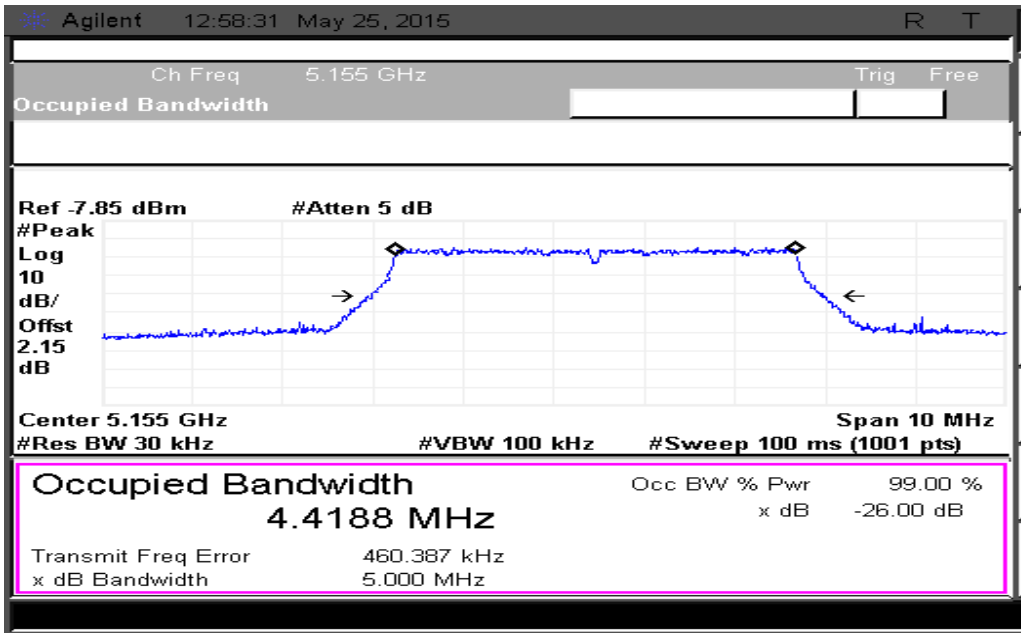

Figure 37: 26dB Bandwidth measured at ch1

5.3.2.7.5 5MHz Modulation BW-Mid channel_5200 MHz

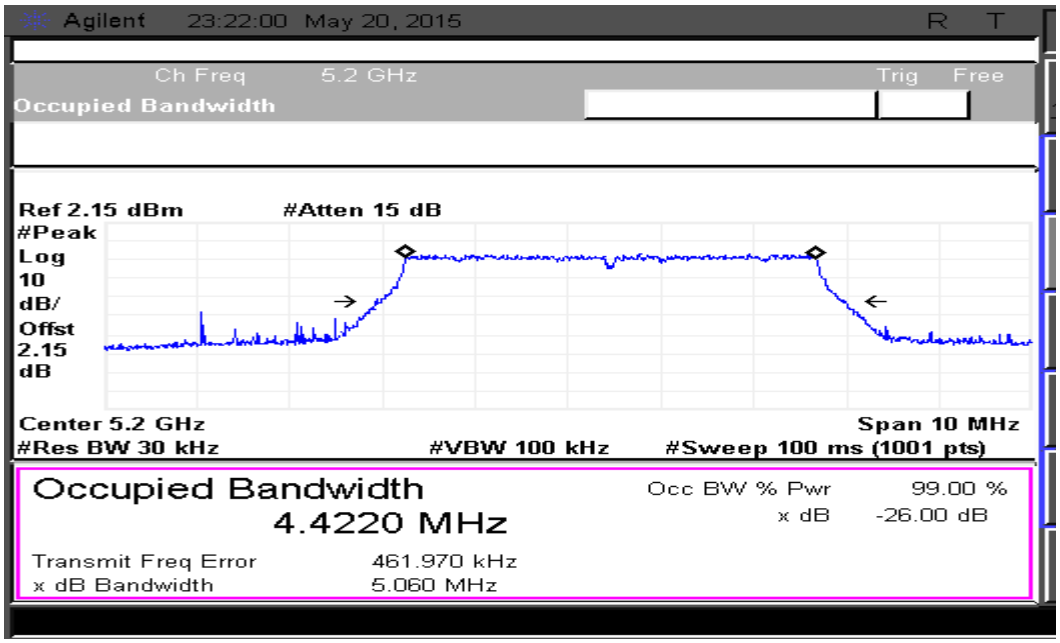

Figure 38: 26dB Bandwidth measured at ch0

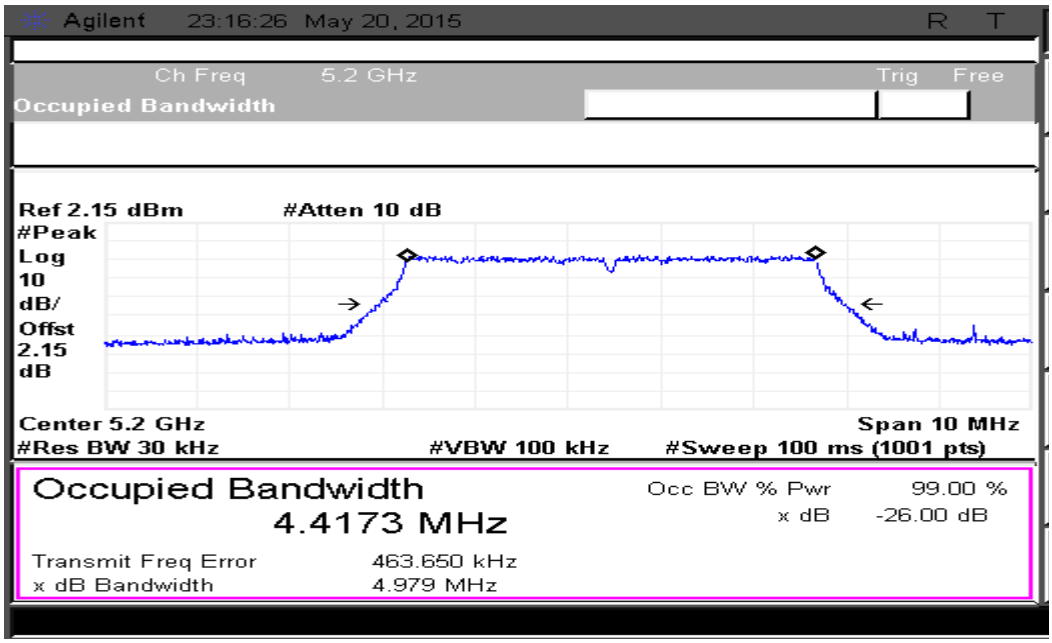

Figure 39: 26dB Bandwidth measured at ch1

5.3.2.7.6 5MHz Modulation BW-High channel_5245MHz

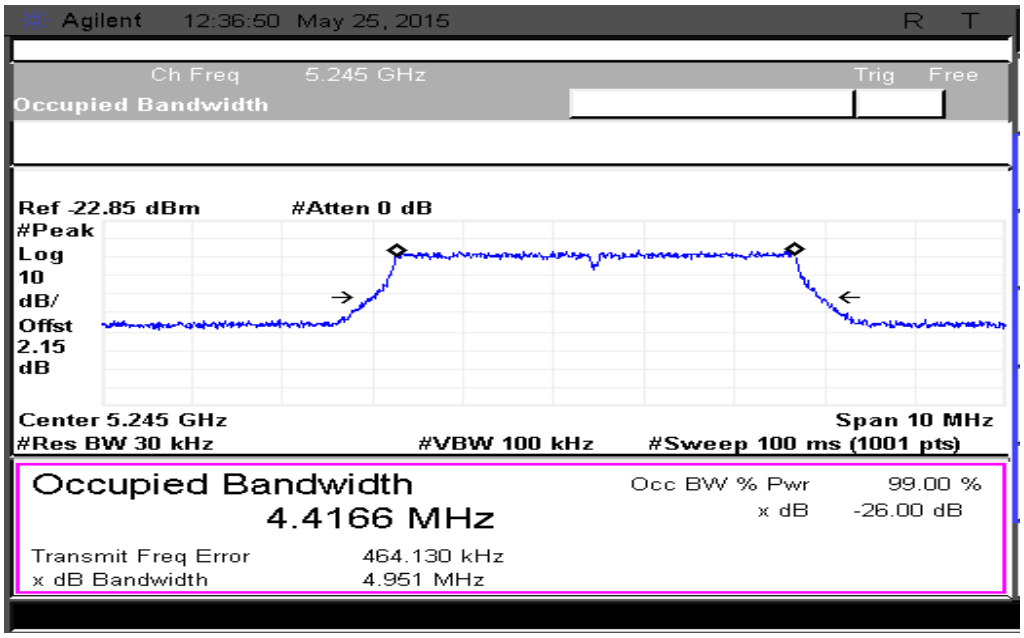

Figure 40: 26dB Bandwidth measured at ch0

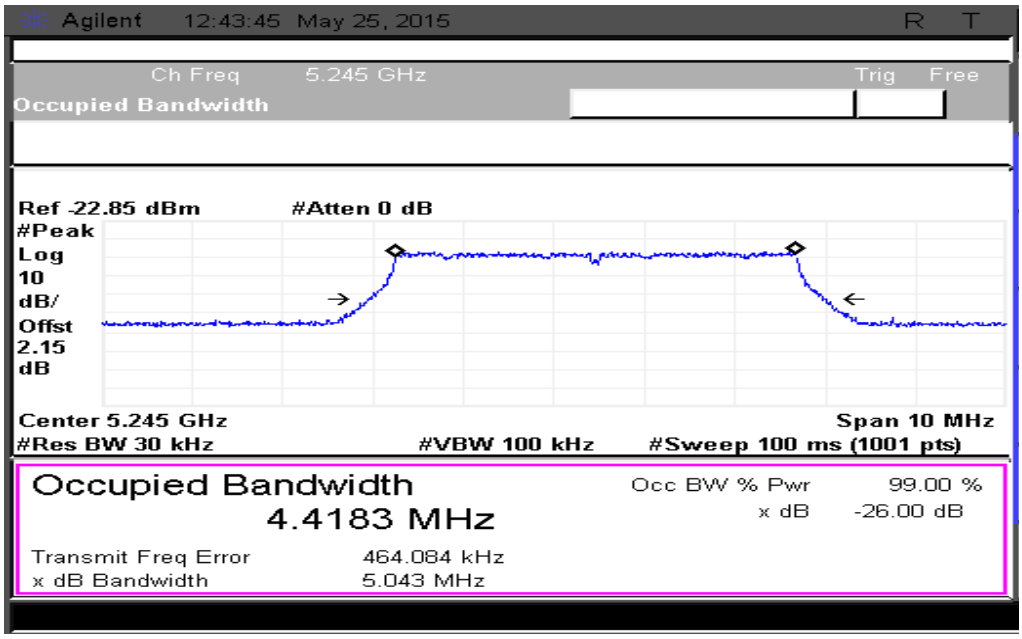

Figure 41: 26dB Bandwidth measured at ch1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.2.8 RESULT

26dB Bandwidth for all channels in both 40MHz & 5MHz Modulation Bandwidths has been measured and tabulated in below table.

Test Condition	Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (MHz)
Basic	40	Ch. 0	5180	43.440
Basic	40	Ch. 0	5200	43.878
Basic	40	Ch. 0	5220	43.018
Basic	40	Ch. 1	5180	42.789
Basic	40	Ch. 1	5200	43.901
Basic	40	Ch. 1	5220	42.388
Basic	5	Ch. 0	5155	4.976
Basic	5	Ch. 0	5200	6.956
Basic	5	Ch. 0	5245	5.033
Basic	5	Ch. 1	5155	5.004
Basic	5	Ch. 1	5200	7.598
Basic	5	Ch. 1	5245	5.027
17dBi Antenna	40	Ch. 0	5180	43.940
17dBi Antenna	40	Ch. 0	5200	43.208
17dBi Antenna	40	Ch. 0	5220	42.863
17dBi Antenna	40	Ch. 1	5180	42.946
17dBi Antenna	40	Ch. 1	5200	42.415
17dBi Antenna	40	Ch. 1	5220	43.037
17dBi Antenna	5	Ch. 0	5155	4.962
17dBi Antenna	5	Ch. 0	5200	4.999
17dBi Antenna	5	Ch. 0	5245	4.955
17dBi Antenna	5	Ch. 1	5155	5.016
17dBi Antenna	5	Ch. 1	5200	4.991
17dBi Antenna	5	Ch. 1	5245	4.949
24dBi Dish	40	Ch. 0	5180	43.949
24dBi Dish	40	Ch. 0	5200	43.371
24dBi Dish	40	Ch. 0	5220	42.225
24dBi Dish	40	Ch. 1	5180	44.124
24dBi Dish	40	Ch. 1	5200	43.219
24dBi Dish	40	Ch. 1	5220	43.457
24dBi Dish	5	Ch. 0	5155	5.003
24dBi Dish	5	Ch. 0	5200	5.060
24dBi Dish	5	Ch. 0	5245	4.951
24dBi Dish	5	Ch. 1	5155	5.000
24dBi Dish	5	Ch. 1	5200	4.979
24dBi Dish	5	Ch. 1	5245	5.043

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3 99 PERCENT OCCUPIED BANDWIDTH MEASUREMENT

5.3.3.1 TEST SPECIFICATION

Test Standard	47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	
Test Procedure	ANSI C63.10-2013	
Modulation Bandwidth	**40MHz**	**5MHz**
Resolution Bandwidth	1MHz	100 kHz
Video Bandwidth	3MHz	300 kHz
Sweep Time	100ms	
Attenuation	Auto	
Test Mode	Conducted	
Detector	Peak	
Input Voltage	120V AC	
Input Frequency	60 Hz	
Temperature	22.0°C	
Humidity	56.0%	
Tested By	Subhendu	
Test Date	12th May 2015 to 25th May 2015	

5.3.3.2 LIMITS

Standard	Reference section	Frequency range	Limit
47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	NA	5150MHz to 5250MHz	NA

5.3.3.3 TEST SETUP

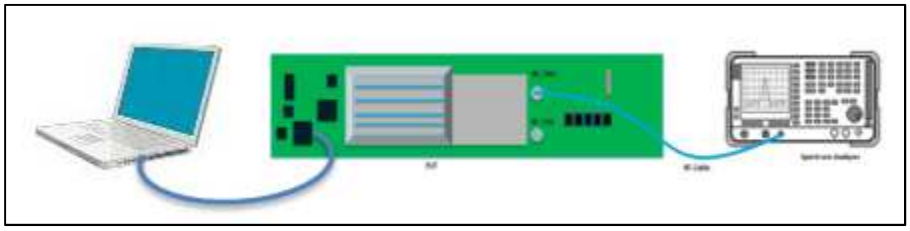

Figure 42: Typical test setup for Conducted RF Test setup

5.3.3.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per Section D of **"789033 D02 General UNII Test Procedures New Rules v01".**The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. Captured the data from spectrum analyzer and compared with the limits specified in the standard.

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.5 RESULT (SUPPORTING GRAPHS / DATA) FOR BASIC CONDITION

5.3.3.5.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

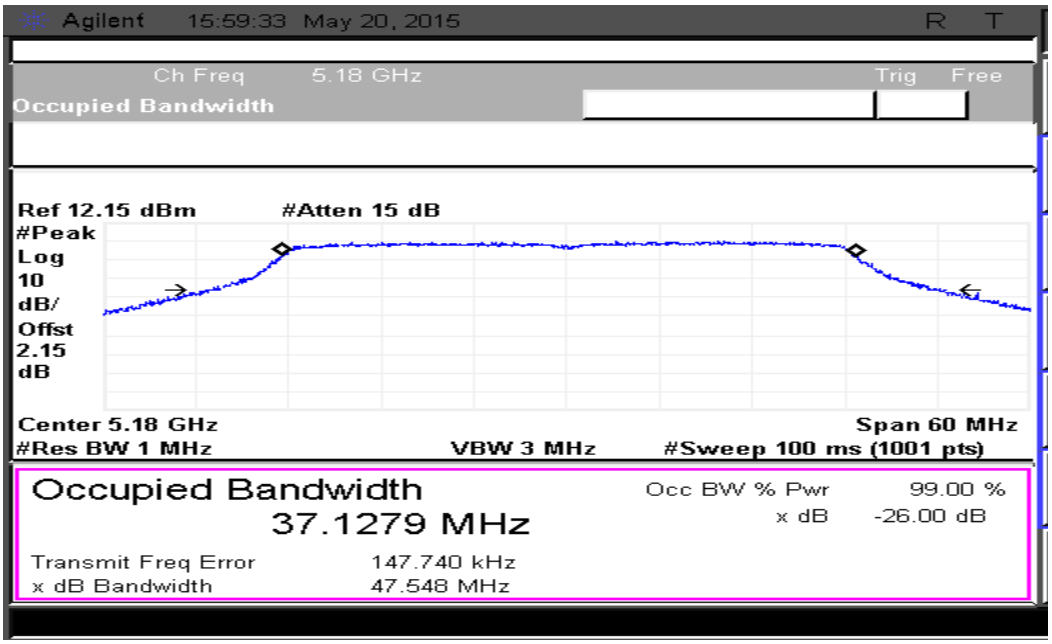

Figure 43: 99 Percent OBW measured at ch.0

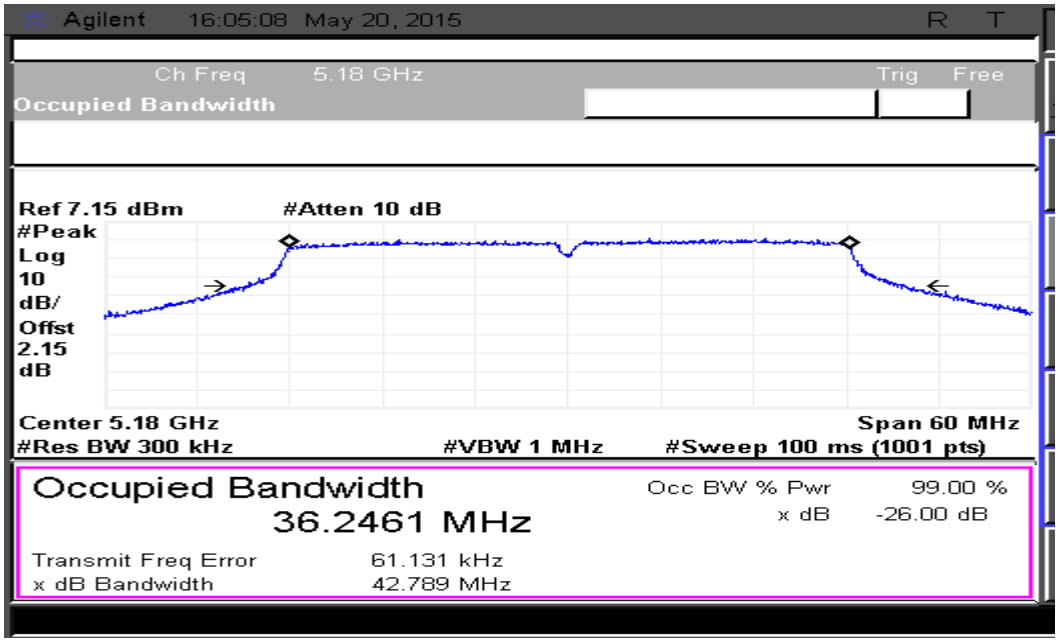

Figure 44: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.5.2 40MHz Modulation BW -Mid channel_5200MHz

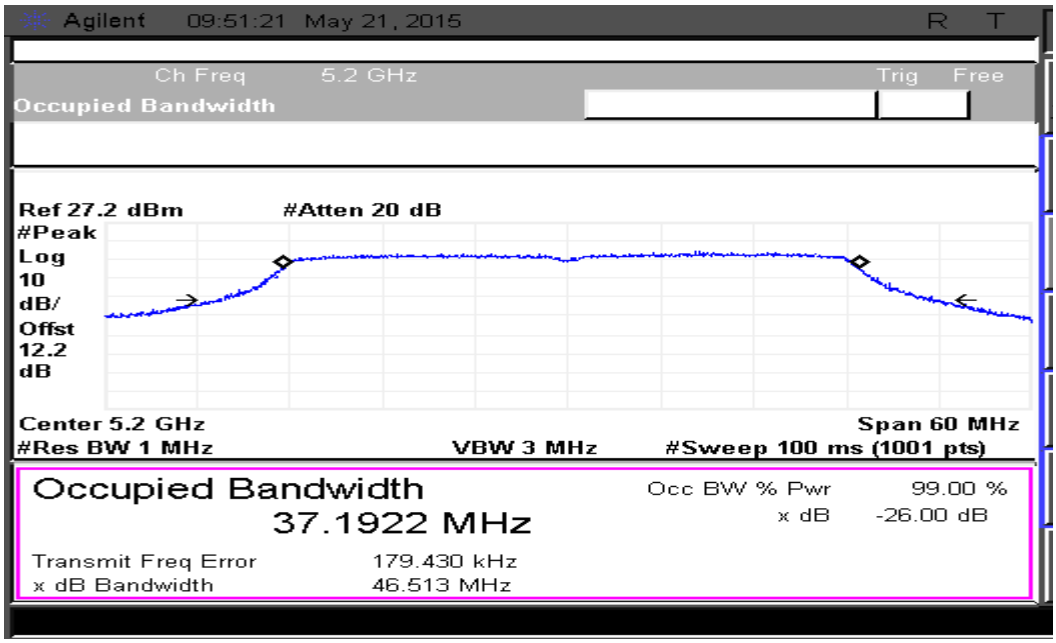

Figure 45: 99 Percent OBW measured at ch.0

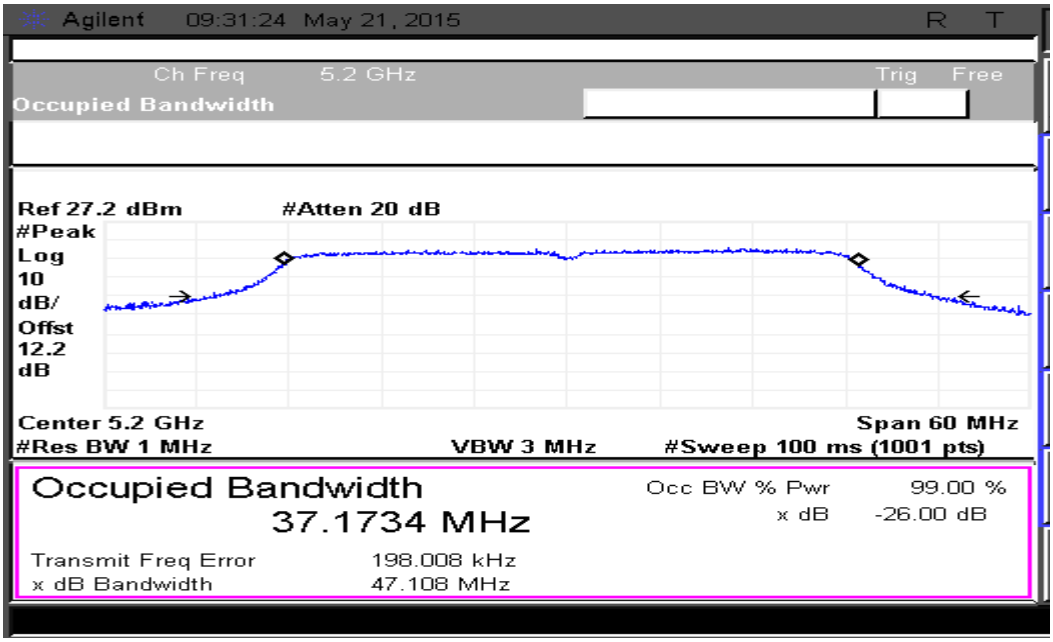

Figure 46: 99 Percent OBW measured at ch.1

5.3.3.5.3 40MHz Modulation BW -High channel_5220MHz

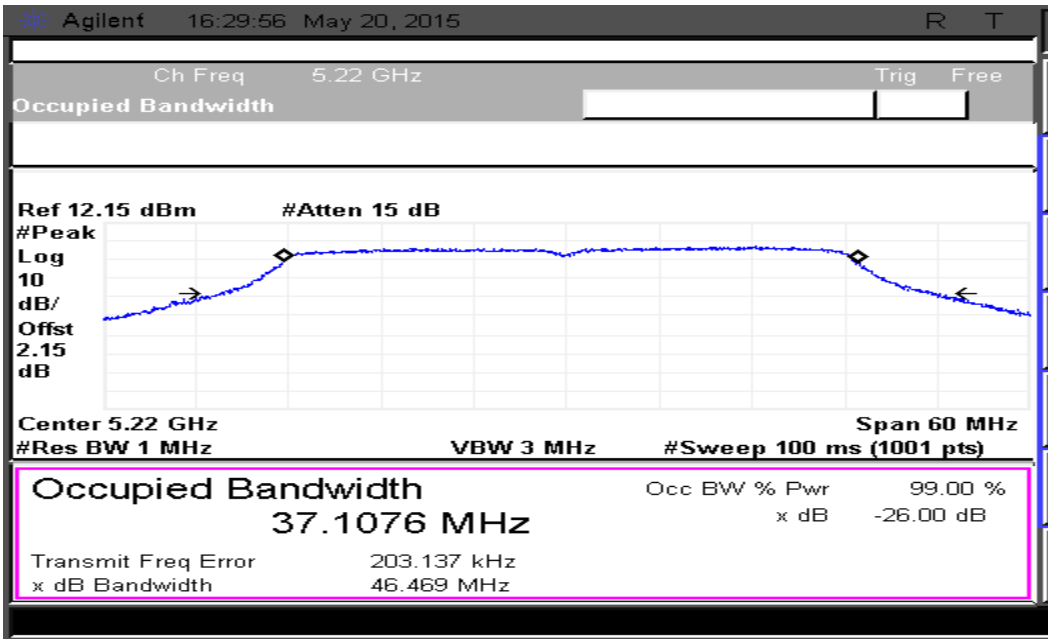

Figure 47: 99 Percent OBW measured at ch.0

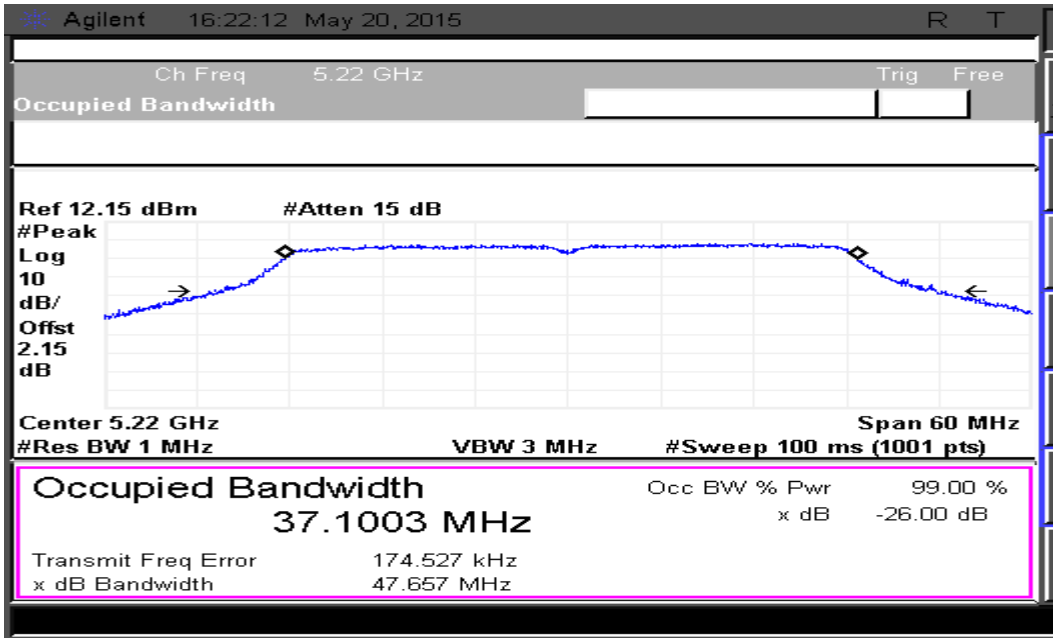

Figure 48: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.5.4 5MHz Modulation BW-Low channel_5155MHz

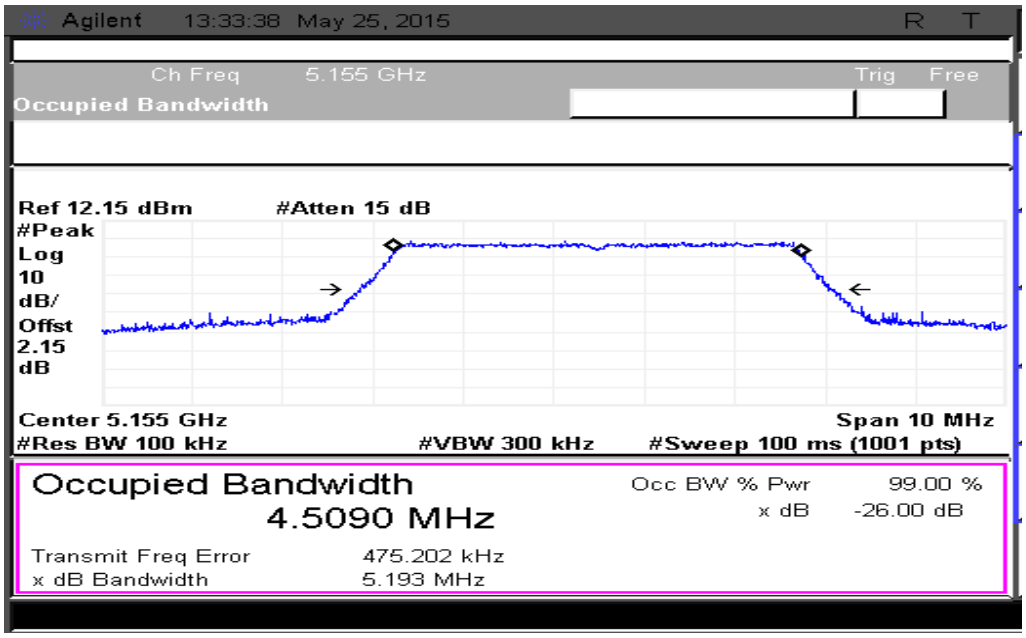

Figure 49: 99 Percent OBW measured at ch.0

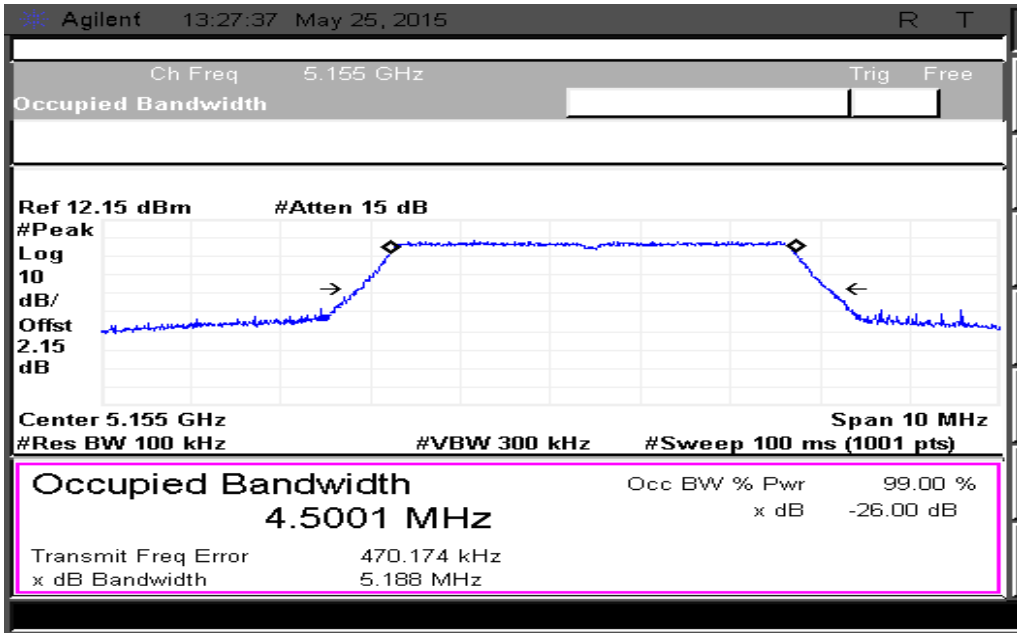

Figure 50: 99 Percent OBW measured at ch.1

5.3.3.5.5 5MHz Modulation BW-Mid channel_5200MHz

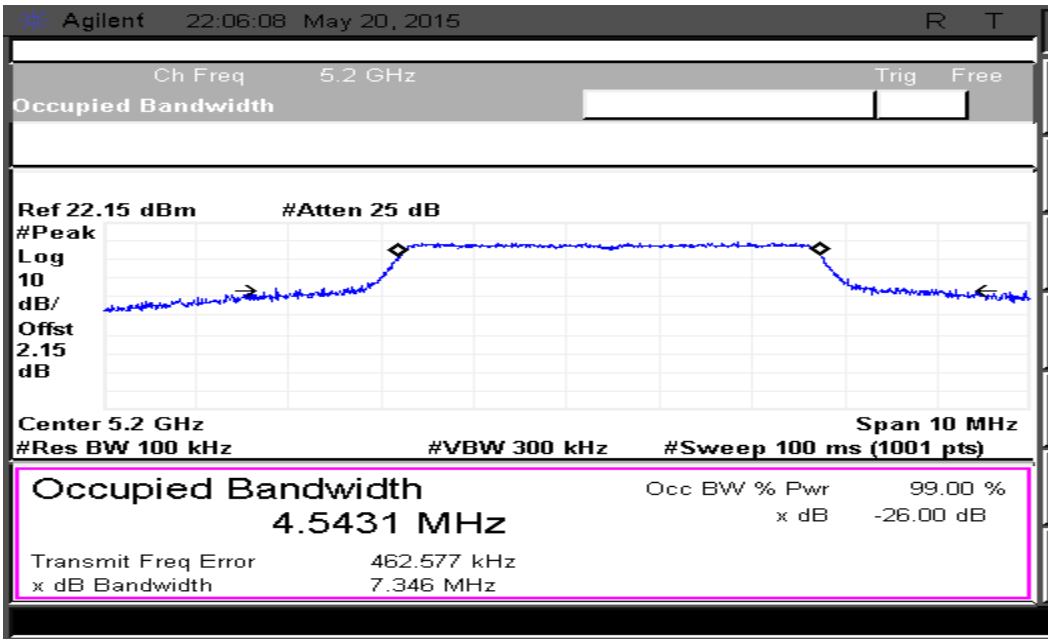

Figure 51: 99 Percent OBW measured at ch.0

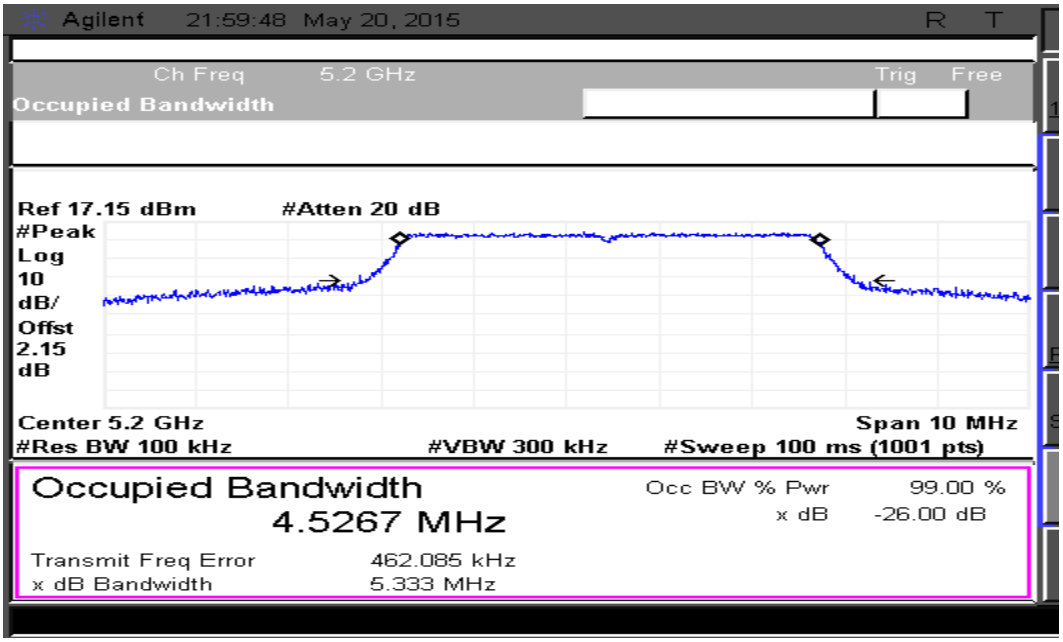

Figure 52: 99 Percent OBW measured at ch.1

5.3.3.5.6 5MHz Modulation BW-High channel_5245MHz

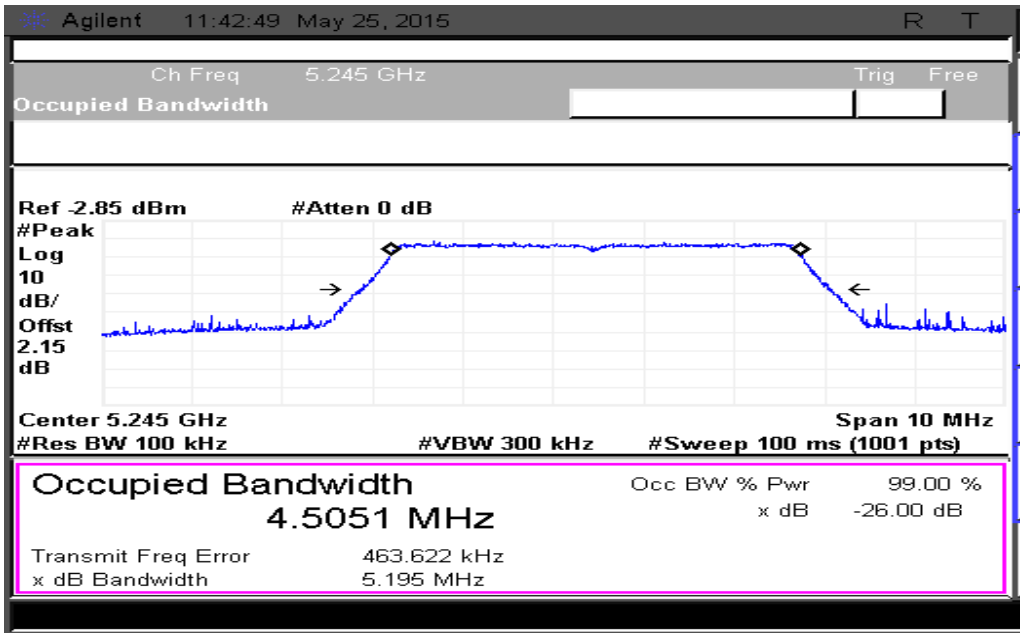

Figure 53: 99 Percent OBW measured at ch.0

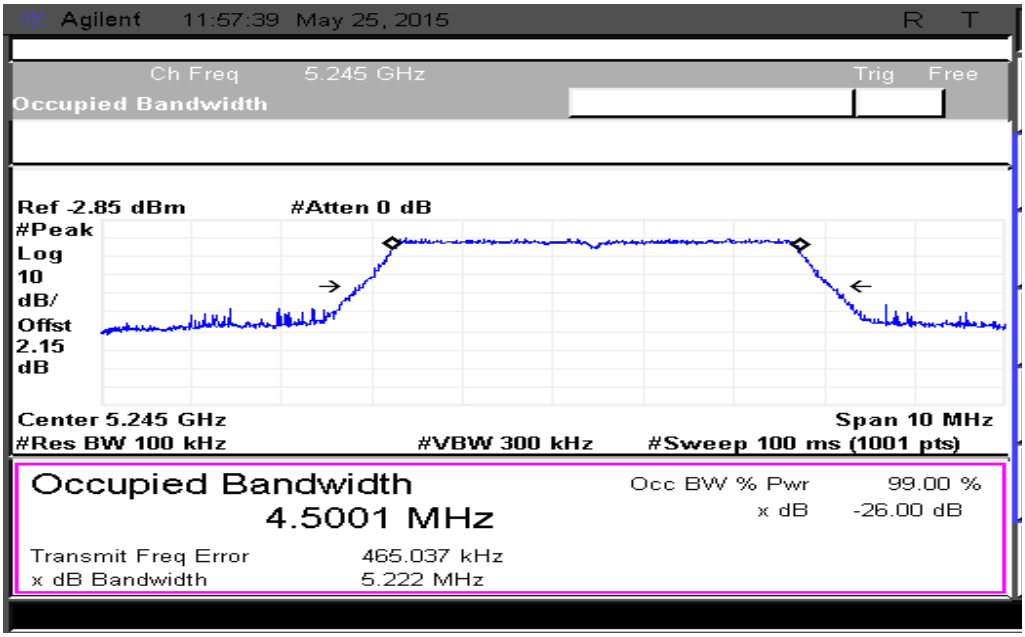

Figure 54: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.6 RESULT (SUPPORTING GRAPHS / DATA) FOR 17DBI ANTENNA CONDITION

5.3.3.6.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

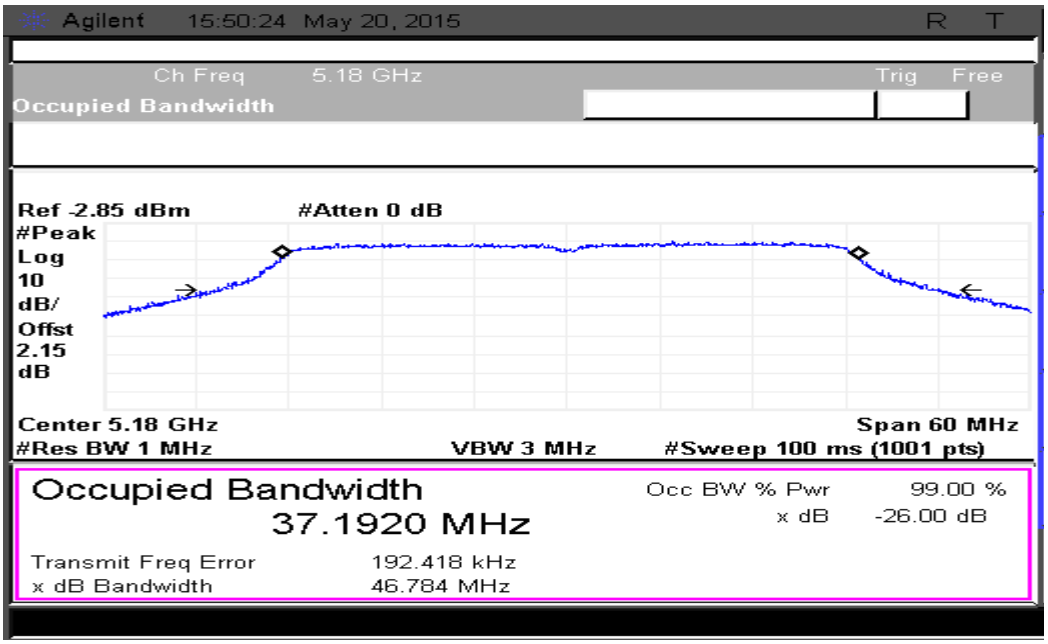

Figure 55: 99 Percent OBW measured at ch.0

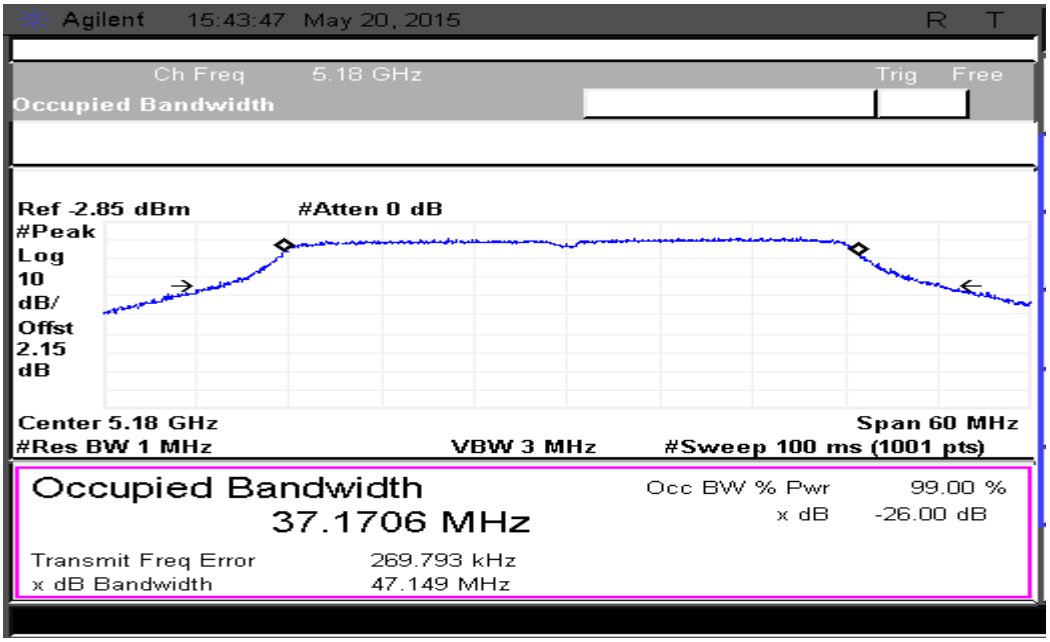

Figure 56: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.6.2 40MHz Modulation BW -Mid channel_5200 MHz

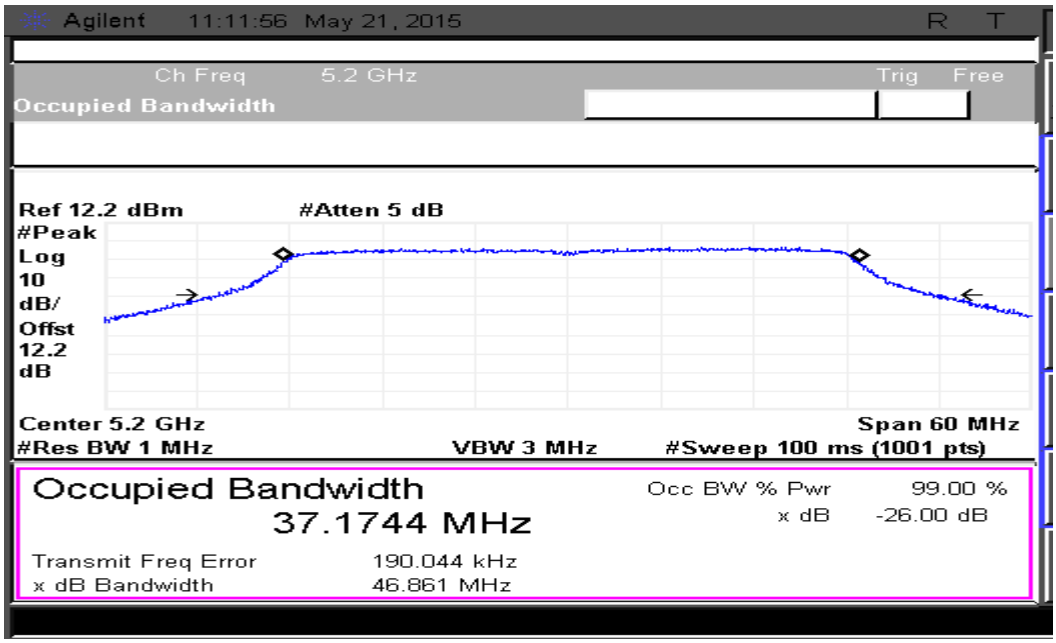

Figure 57: 99 Percent OBW measured at ch.0

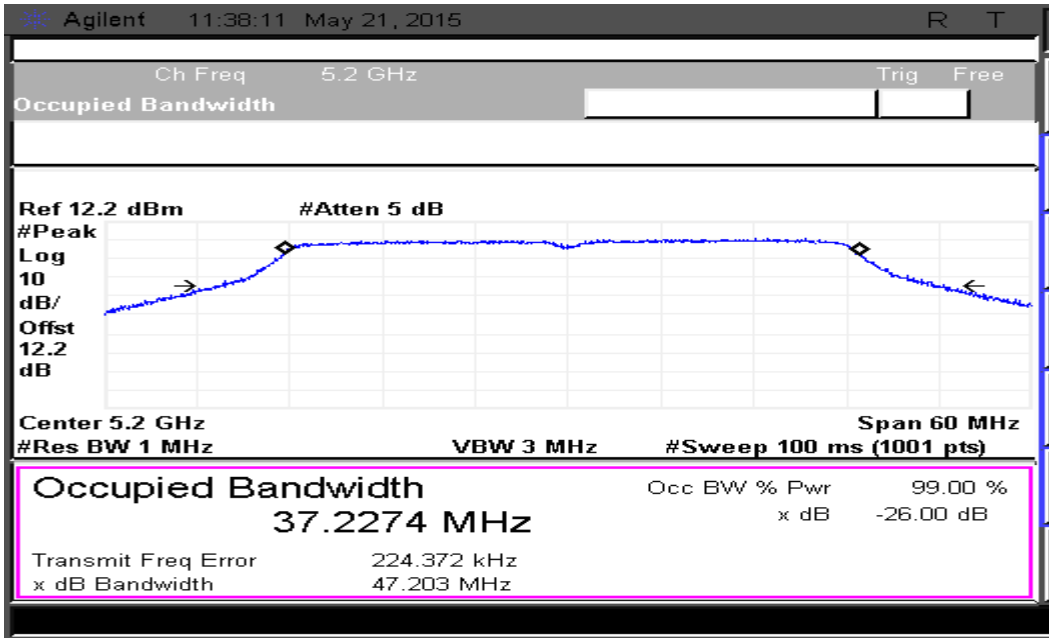

Figure 58: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.6.3 40MHz MODULATION BW -HIGH CHANNEL_5220MHz

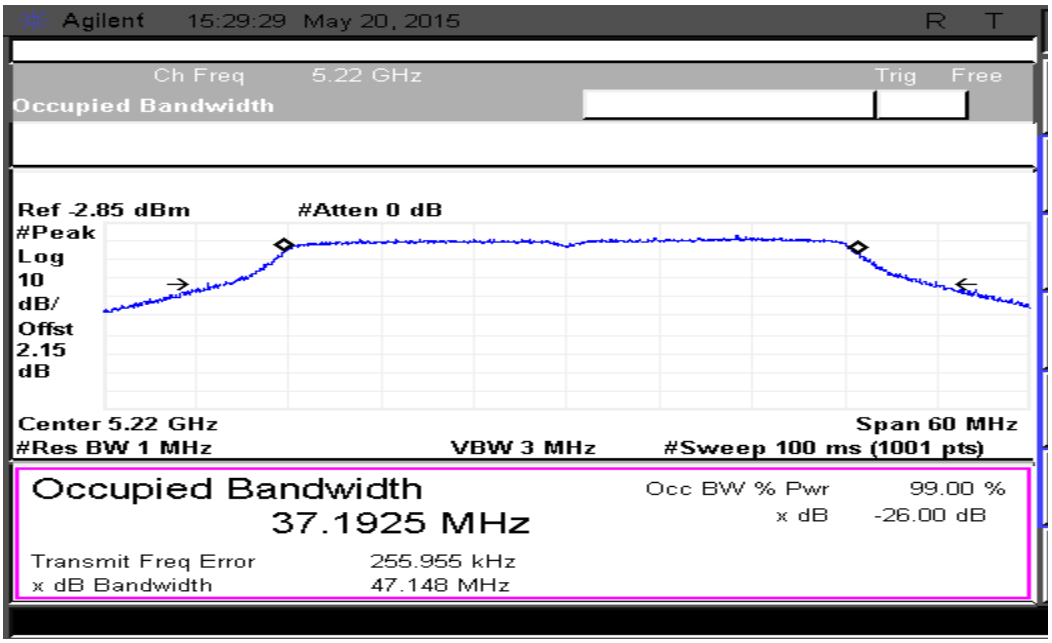

Figure 59: 99 Percent OBW measured at ch.0

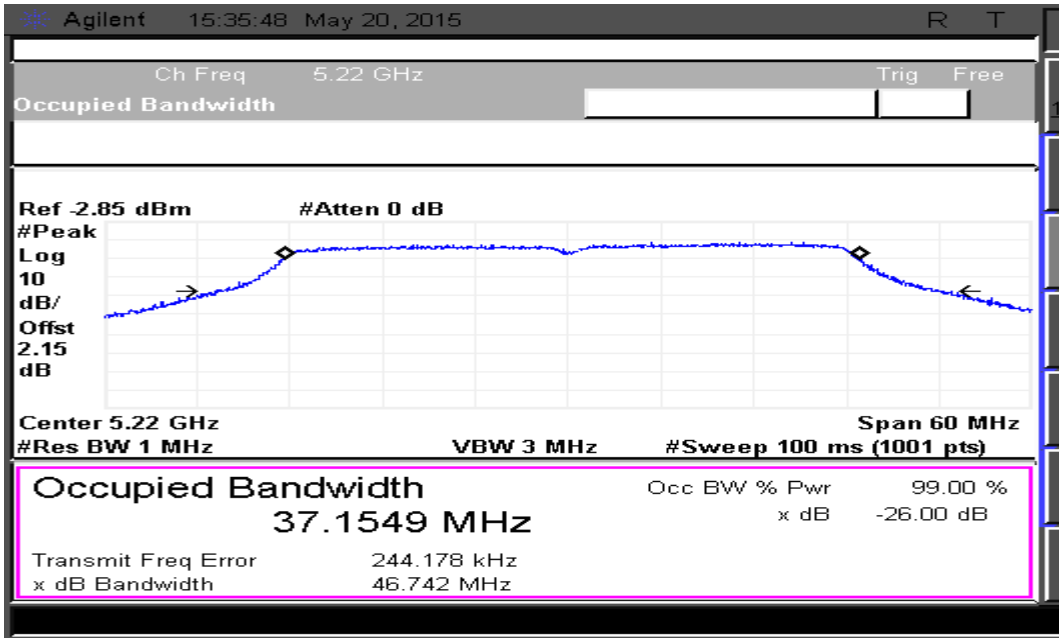

Figure 60: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.6.4 5MHz Modulation BW-Low channel_5155MHz

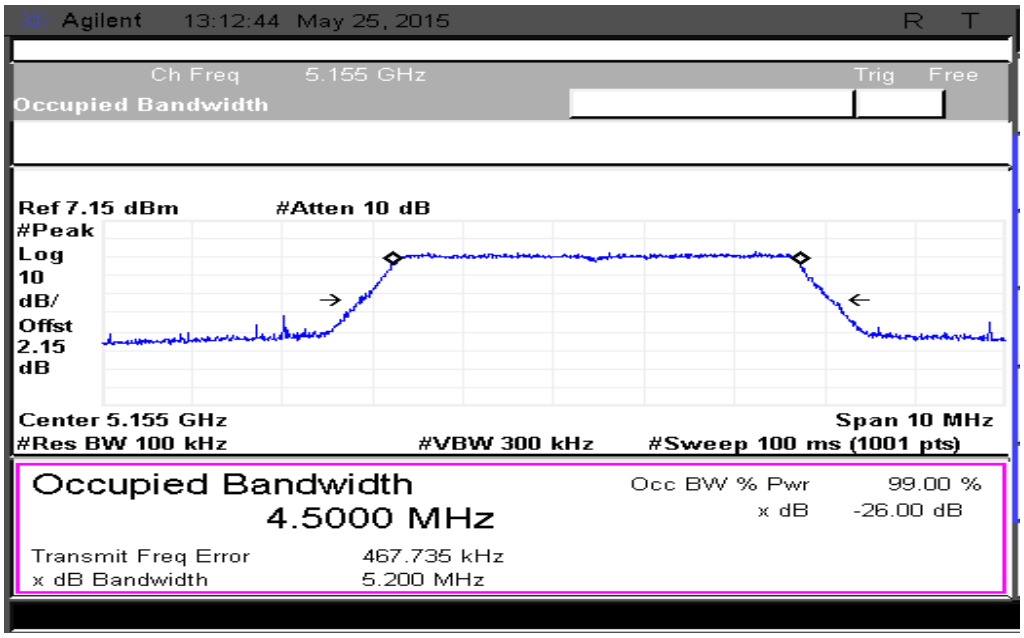

Figure 61: 99 Percent OBW measured at ch.0

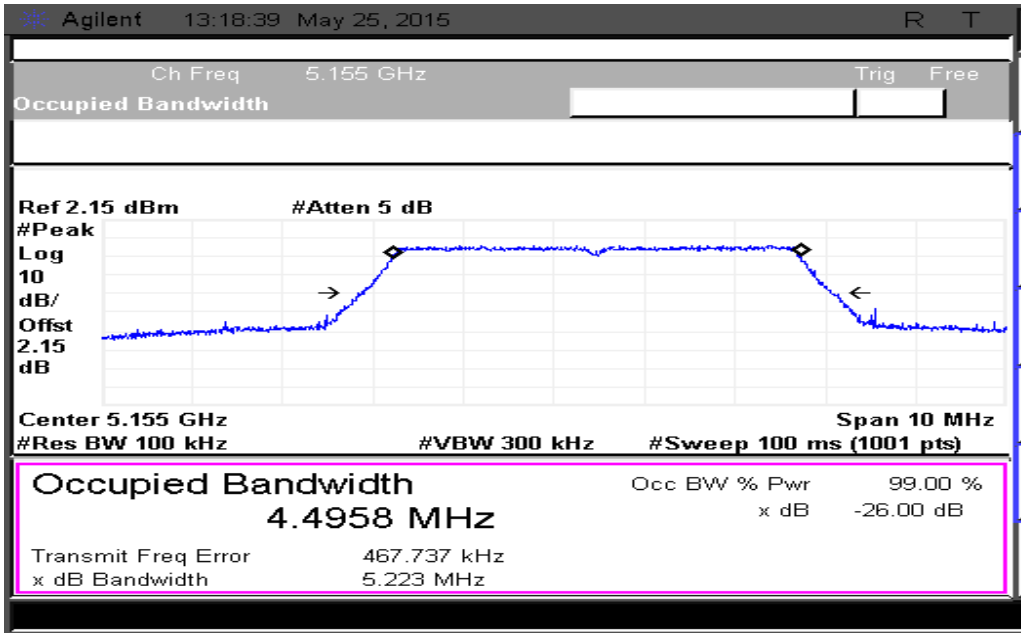

Figure 62: 99 Percent OBW measured at ch.1

5.3.3.6.5 5MHz Modulation BW-Mid channel_5200 MHz

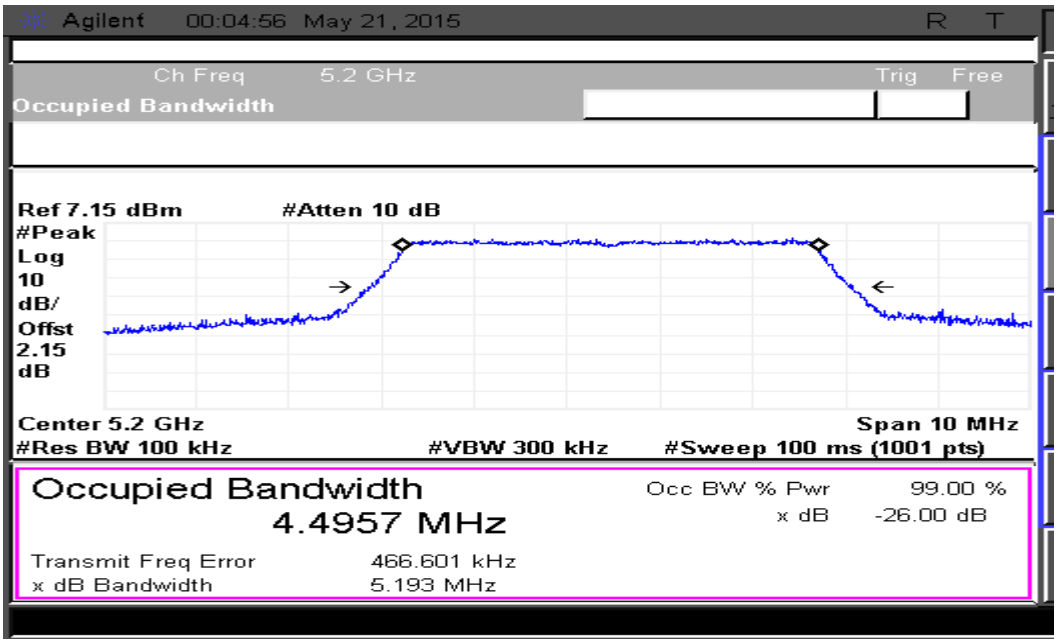

Figure 63: 99 Percent OBW measured at ch.0

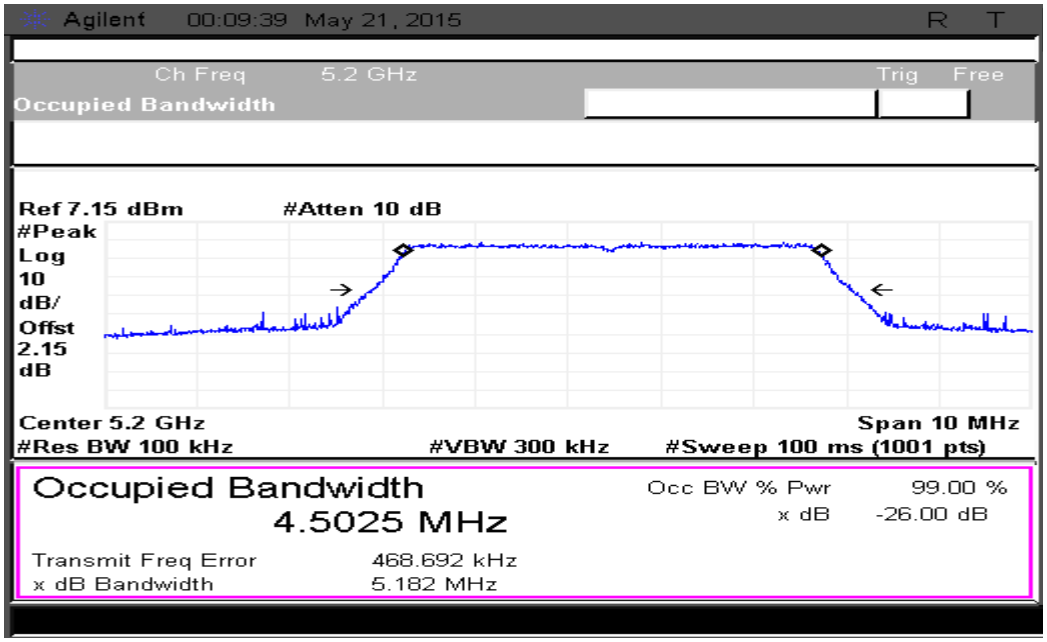

Figure 64: 99 Percent OBW measured at ch.1

5.3.3.6.6 5MHz Modulation BW-High channel_5245MHz

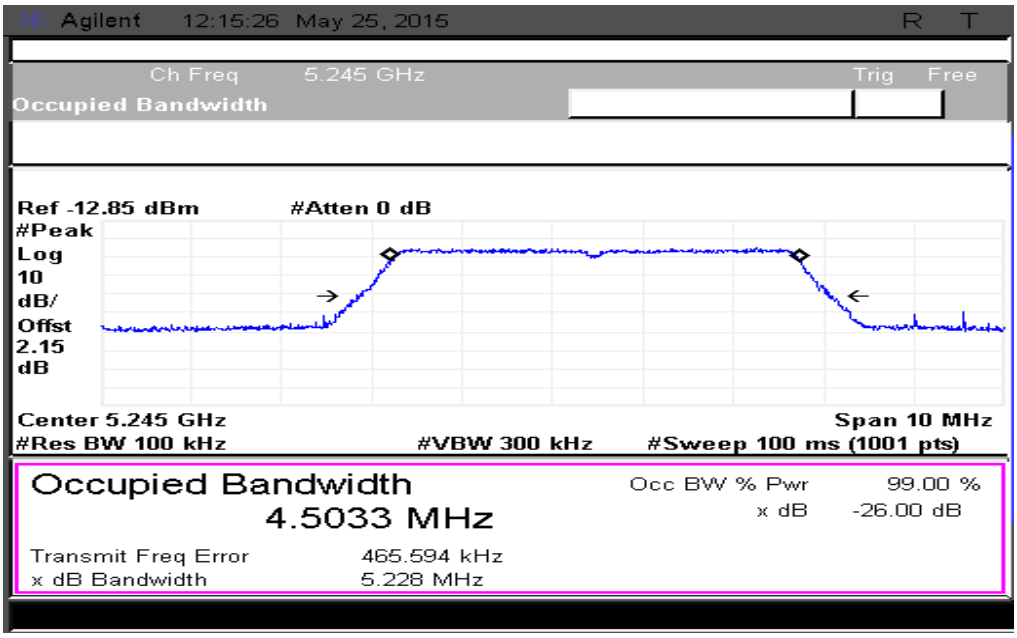

Figure 65: 99 Percent OBW measured at ch.0

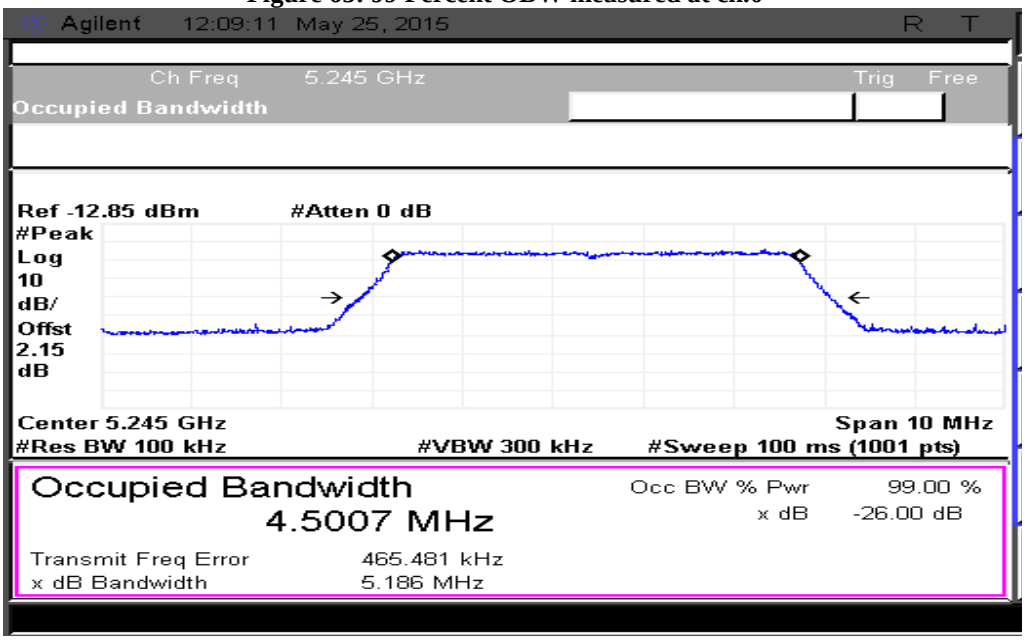

Figure 66: 99 Percent OBW measured at ch.1

5.3.3.7 RESULT (SUPPORTING GRAPHS / DATA) FOR 24DBI DISH CONDITION

5.3.3.7.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

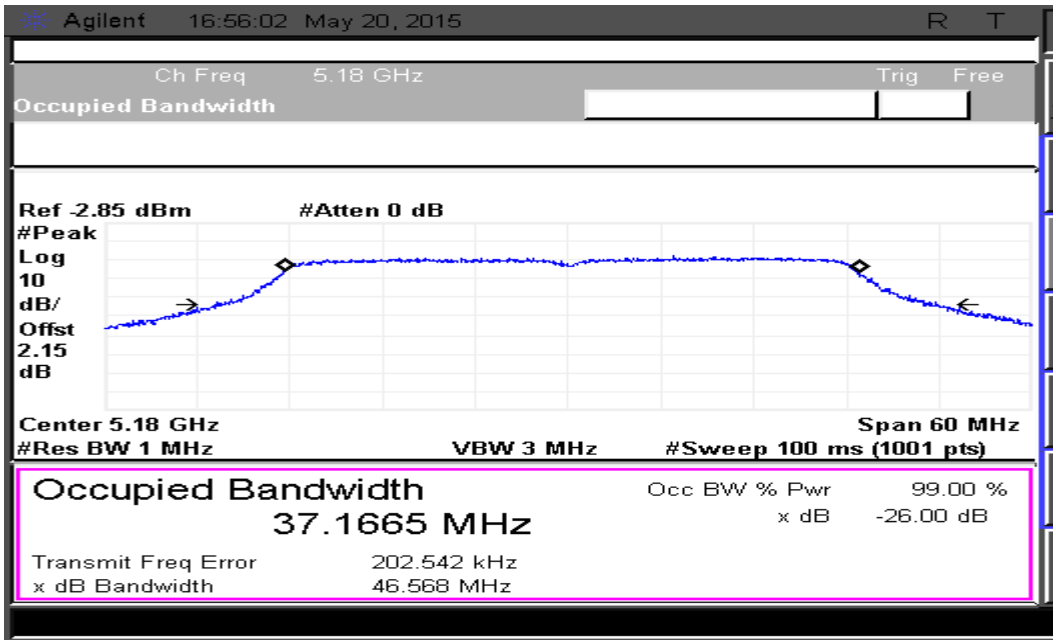

Figure 67: 99 Percent OBW measured at ch.0

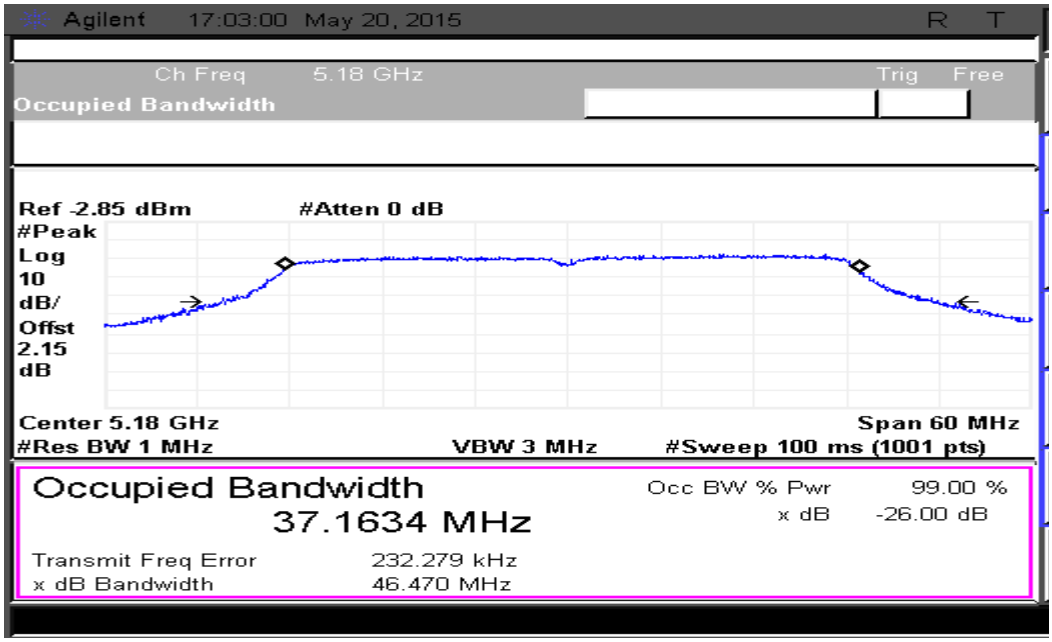

Figure 68: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.7.2 40MHz Modulation BW -Mid channel_5200 MHz

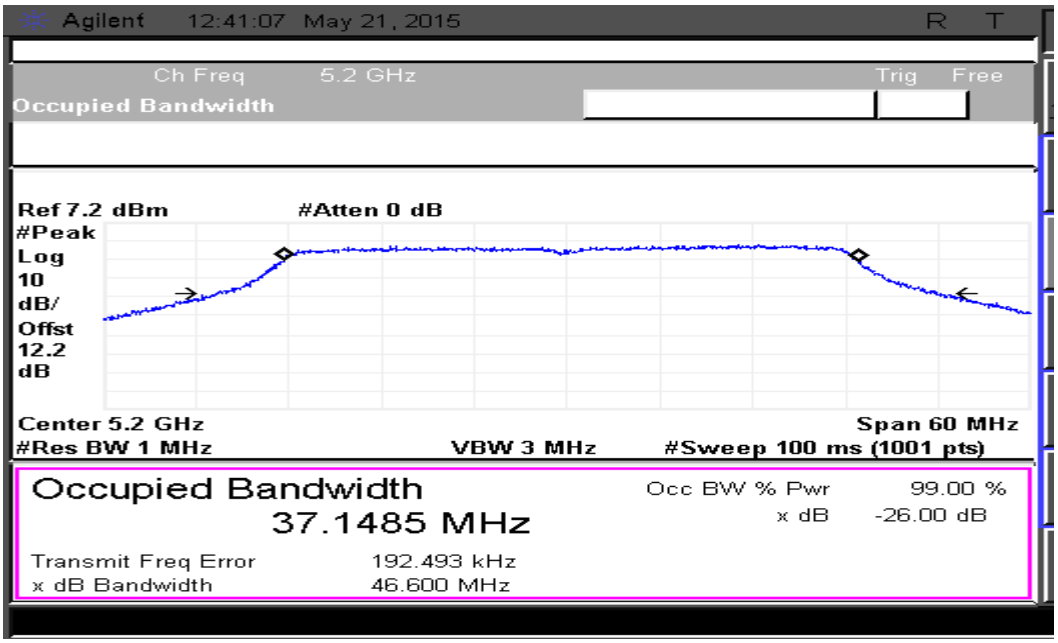

Figure 69: 99 Percent OBW measured at ch.0

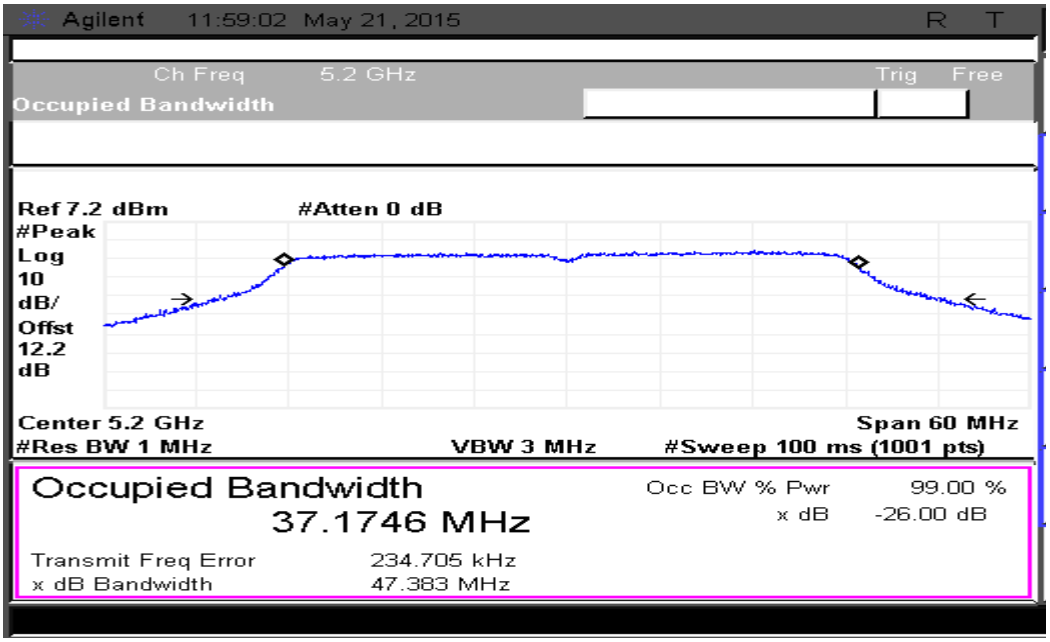

Figure 70: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.7.3 40MHz MODULATION BW -HIGH CHANNEL_5220MHz

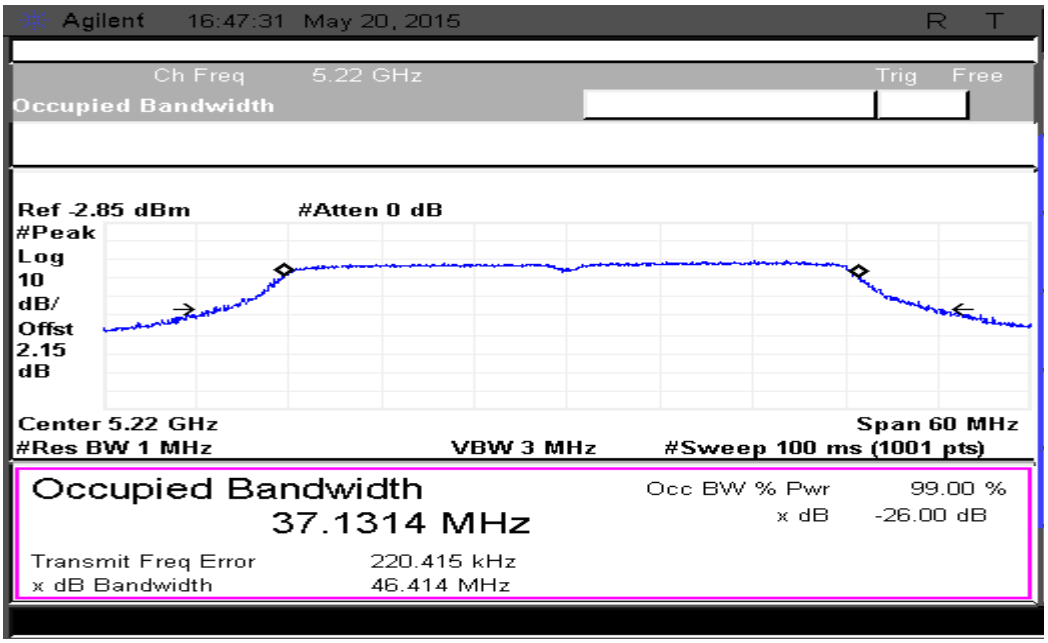

Figure 71: 99 Percent OBW measured at ch.0

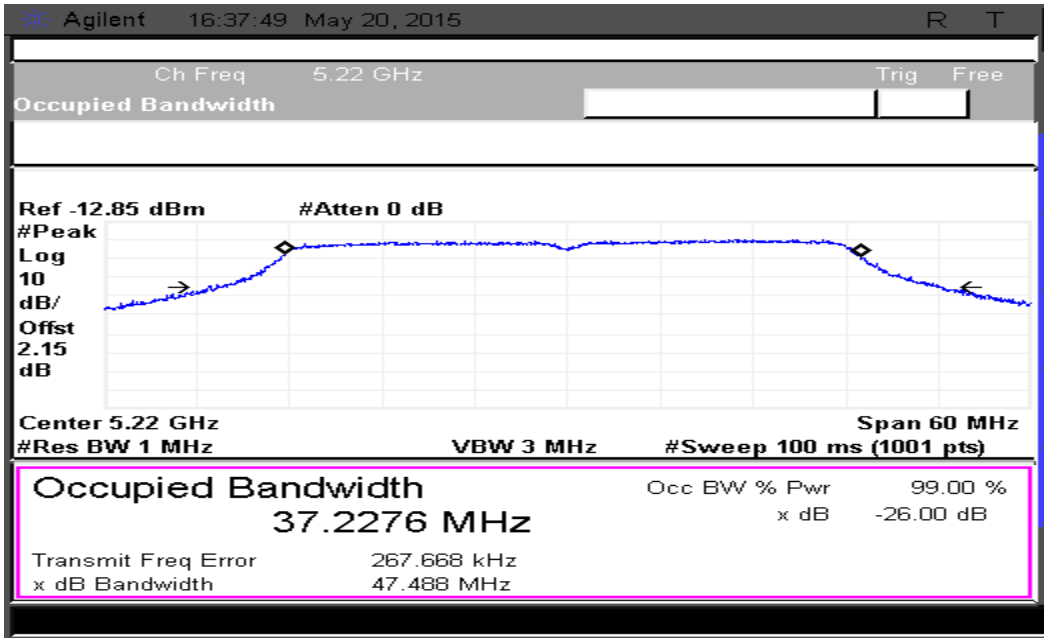

Figure 72: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.7.4 5MHz Modulation BW-Low channel_5155MHz

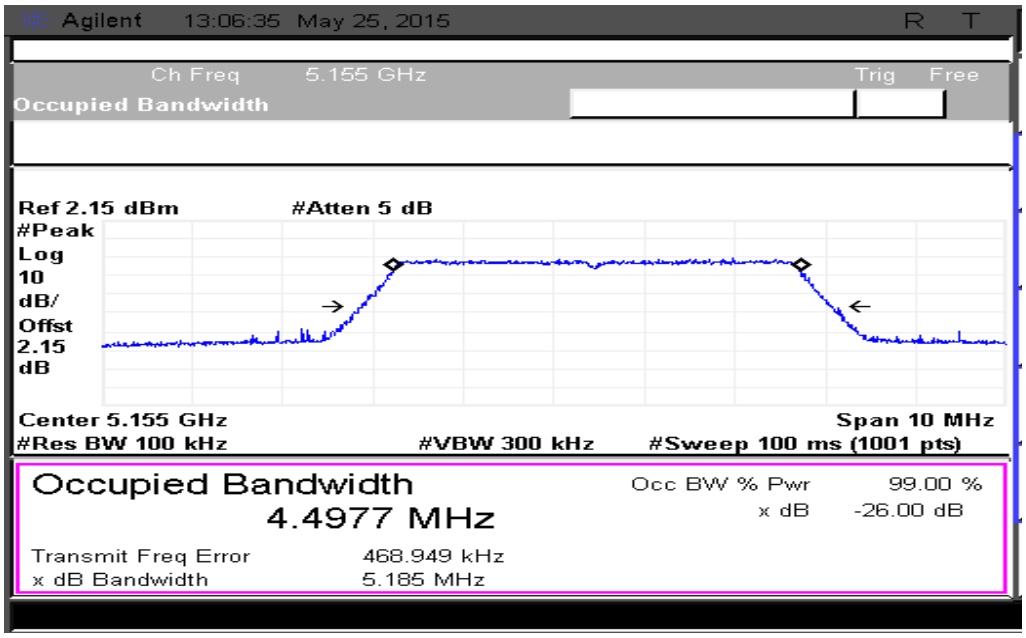

Figure 73: 99 Percent OBW measured at ch.0

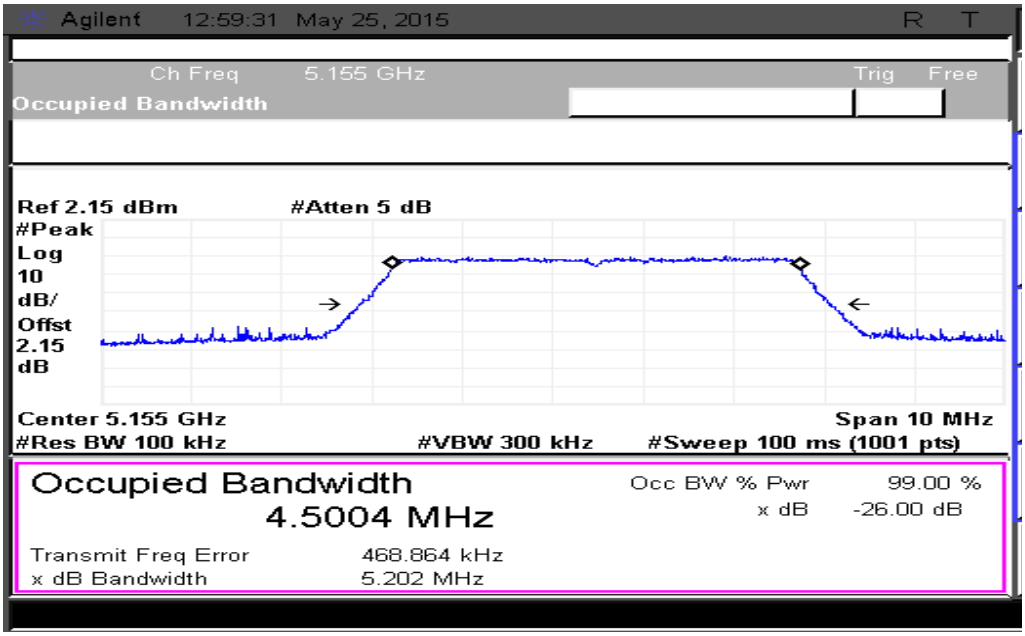

Figure 74: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.7.5 5MHz Modulation BW-Mid channel_5200 MHz

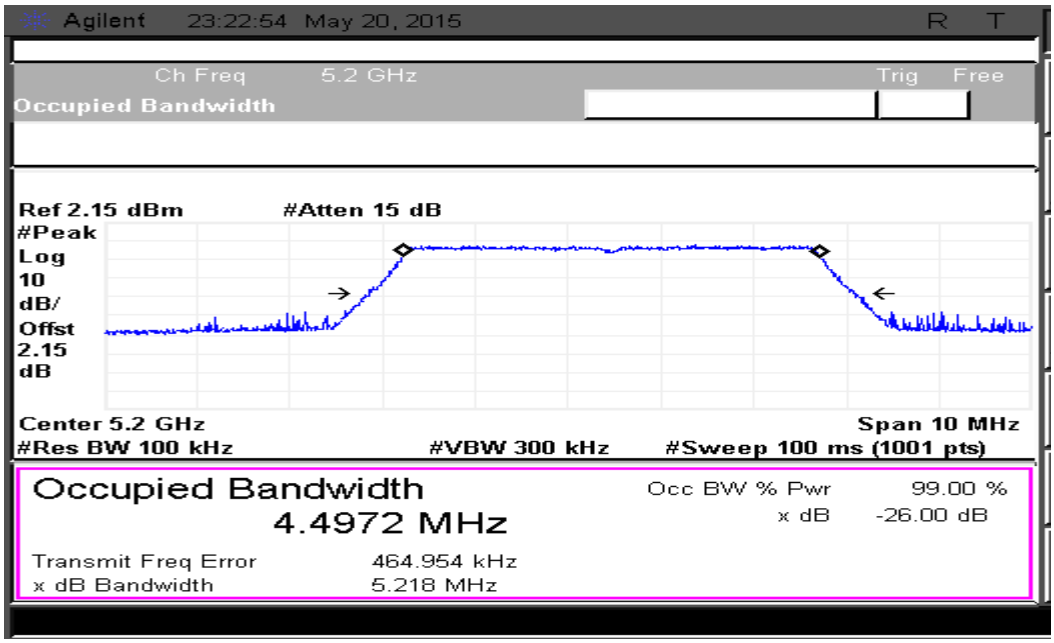

Figure 75: 99 Percent OBW measured at ch.0

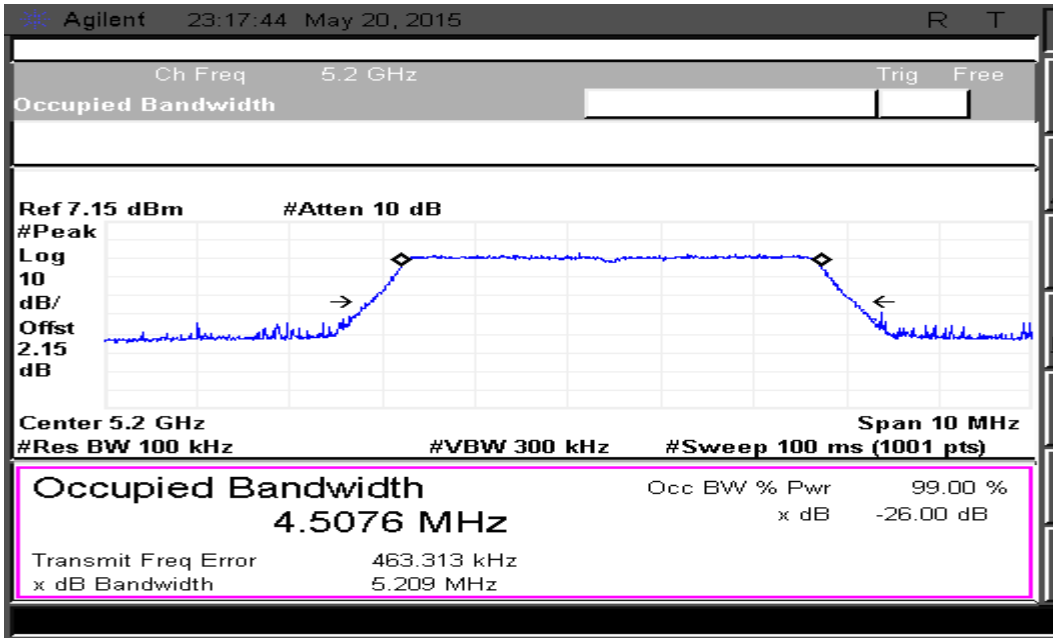

Figure 76: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.7.6 5MHz Modulation BW-High channel_5245MHz

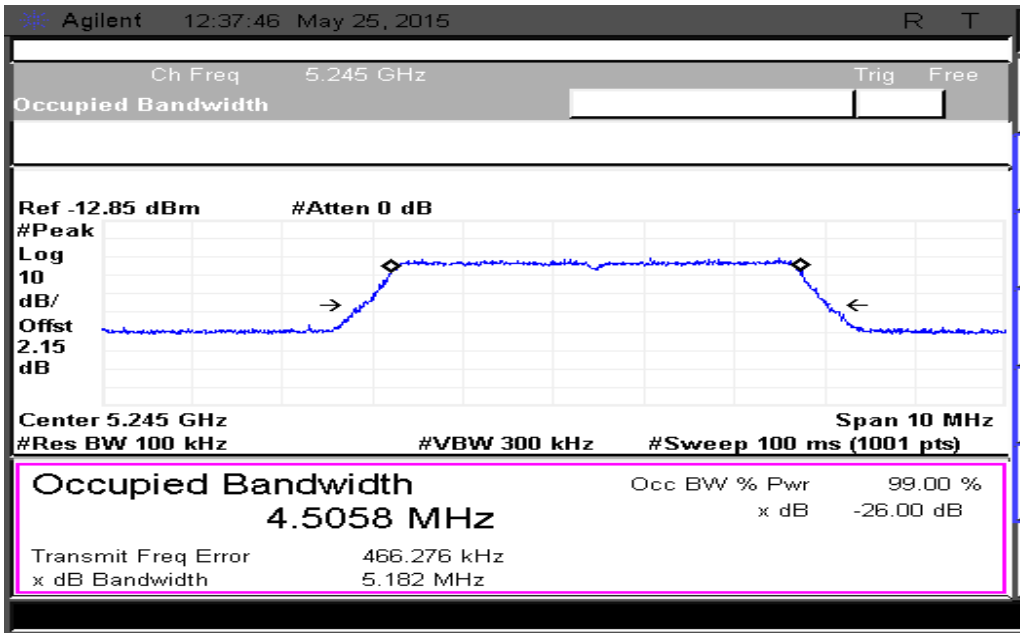

Figure 77: 99 Percent OBW measured at ch.0

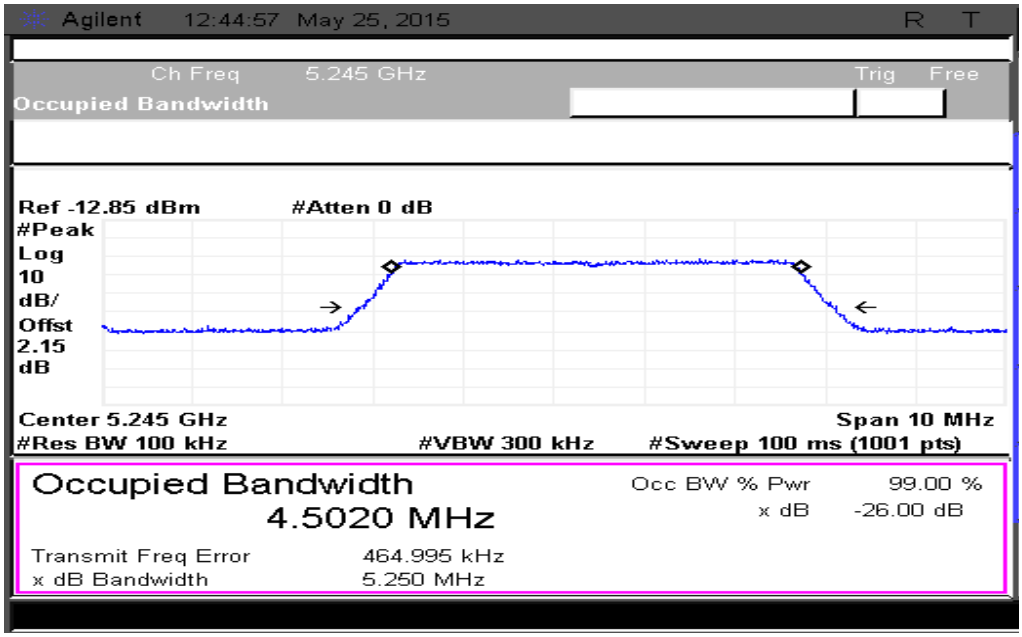

Figure 78: 99 Percent OBW measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.3.8 RESULT

99 Percent Occupied Bandwidth for all channels in both 40MHz & 5MHz Modulation Bandwidths has been measured and tabulated in below table.

Test Condition	Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (MHz)
Basic	40	Ch. 0	5180	37.1279
Basic	40	Ch. 0	5200	37.1922
Basic	40	Ch. 0	5220	37.1076
Basic	40	Ch. 1	5180	36.2461
Basic	40	Ch. 1	5200	37.1734
Basic	40	Ch. 1	5220	37.1003
Basic	5	Ch. 0	5155	4.5090
Basic	5	Ch. 0	5200	4.5431
Basic	5	Ch. 0	5245	4.5051
Basic	5	Ch. 1	5155	4.5001
Basic	5	Ch. 1	5200	4.5267
Basic	5	Ch. 1	5245	4.5001
17dBi Antenna	40	Ch. 0	5180	37.1920
17dBi Antenna	40	Ch. 0	5200	37.1744
17dBi Antenna	40	Ch. 0	5220	37.1925
17dBi Antenna	40	Ch. 1	5180	37.1706
17dBi Antenna	40	Ch. 1	5200	37.2274
17dBi Antenna	40	Ch. 1	5220	37.1549
17dBi Antenna	5	Ch. 0	5155	4.5000
17dBi Antenna	5	Ch. 0	5200	4.4957
17dBi Antenna	5	Ch. 0	5245	4.5033
17dBi Antenna	5	Ch. 1	5155	4.4958
17dBi Antenna	5	Ch. 1	5200	4.5025
17dBi Antenna	5	Ch. 1	5245	4.5007
24dBi Dish	40	Ch. 0	5180	37.1665
24dBi Dish	40	Ch. 0	5200	37.1485
24dBi Dish	40	Ch. 0	5220	37.1314
24dBi Dish	40	Ch. 1	5180	37.1634
24dBi Dish	40	Ch. 1	5200	37.1746
24dBi Dish	40	Ch. 1	5220	37.2276
24dBi Dish	5	Ch. 0	5155	4.4977
24dBi Dish	5	Ch. 0	5200	4.4972
24dBi Dish	5	Ch. 0	5245	4.5058
24dBi Dish	5	Ch. 1	5155	4.5004
24dBi Dish	5	Ch. 1	5200	4.5076
24dBi Dish	5	Ch. 1	5245	4.5020

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4 MAXIMUM CONDUCTED OUTPUT POWER

5.3.4.1 TEST SPECIFICATION

Test Standard	47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014
Test Procedure	ANSI C63.10-2013
Resolution Bandwidth	1 MHz
Video Bandwidth	3 MHz
Sweep Time	100ms
Attenuation	Auto
Test Mode	Conducted
Detector	Average
Input Voltage	120V AC
Input Frequency	60 Hz
Temperature	22.0°C
Humidity	56.0%
Tested By	Subhendu
Test Date	12th May 2015 to 25th May 2015

5.3.4.2 LIMITS

As per 15.407 (a) (2) we need to select 1W (30dBm) limit or 17+10log(B) dBm whichever is lower.
Where, B is 26dB emission bandwidth

Below limit is used if the transmit antenna gain is less than 6dBi

Modulation Bandwidth (MHz)	Fixed Limit as per standard (dBm)	Calculated Limit (dBm)	Limit to be considered (2 chains) (dBm)	Limit to be considered (1 chain) (dBm)
40	30	33.0206	30	27
5	30	23.9897	24	21

For Cambium, we have 17dBi External antenna. So limits to be considered as per below table

Modulation Bandwidth (MHz)	Limit as per above table (dBm)	Limit to be considered (2 chains) (dBm)	Limit to be considered (1 chain) (dBm)
40	30	19	16
5	24	13	10

Here the limit is reduced by 11dBm as per clause given in standard that if antenna gain is more than 6dBi, the limit should be reduced by the amount in dB that the gain of the antenna exceeds 6dBi.

Also we have 24dBi dish. So limits to be considered as per below table

Modulation Bandwidth (MHz)	Limit as per above table (dBm)	Limit to be considered (2 chains) (dBm)	Limit to be considered (1 chain) (dBm)
40	30	12	9
5	24	6	3

Here the limit is reduced by 18dBm as per clause given in standard that if antenna gain is more than 6dBi, the limit should be reduced by the amount in dB that the gain of the antenna exceeds 6dBi.

5.3.4.3 TEST SETUP

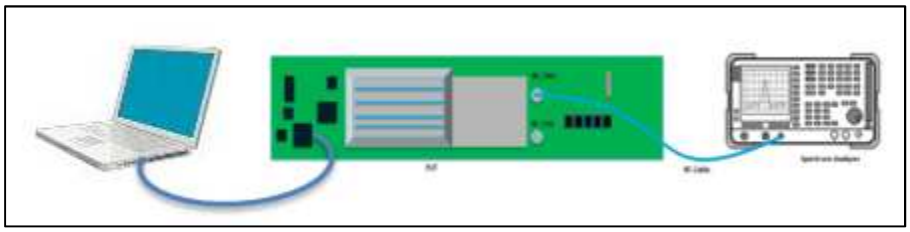

Figure 79: Typical test setup for Conducted RF Test setup

5.3.4.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per the **"789033 D02 General UNII Test Procedures New Rules v01".** The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. Captured the data from spectrum analyzer and compared with the limits specified in the standard.

5.3.4.5 RESULT (SUPPORTING GRAPHS / DATA) FOR BASIC CONDITION

5.3.4.5.1 40MHz MODULATION BW-LOW CHANNEL_5180MHz

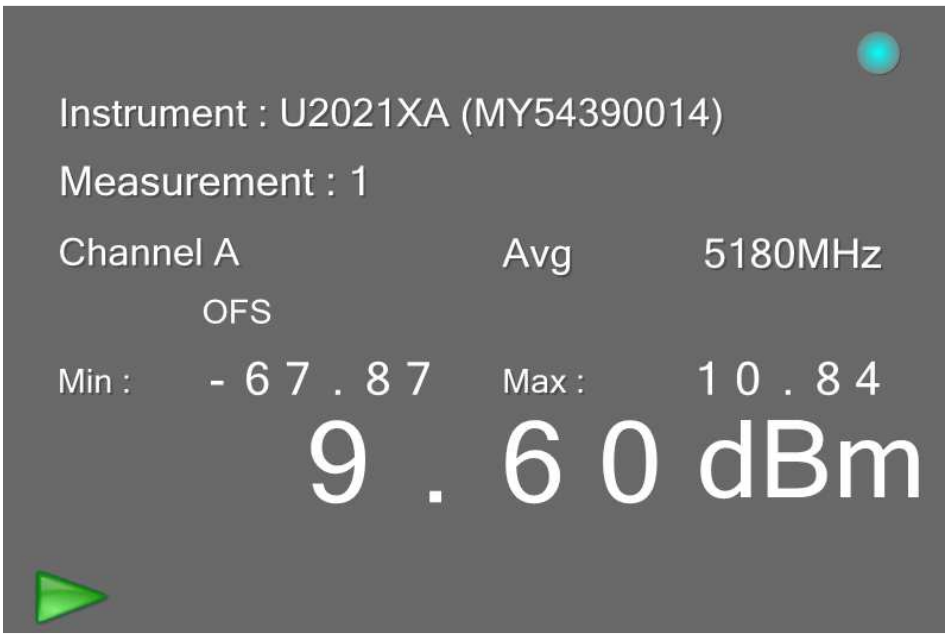

Figure 80: Maximum Conducted Output power measured at ch.0

Figure 81: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.5.2 40MHz Modulation BW-Mid channel_5200MHz

Figure 82: Maximum Conducted Output power measured at ch.0

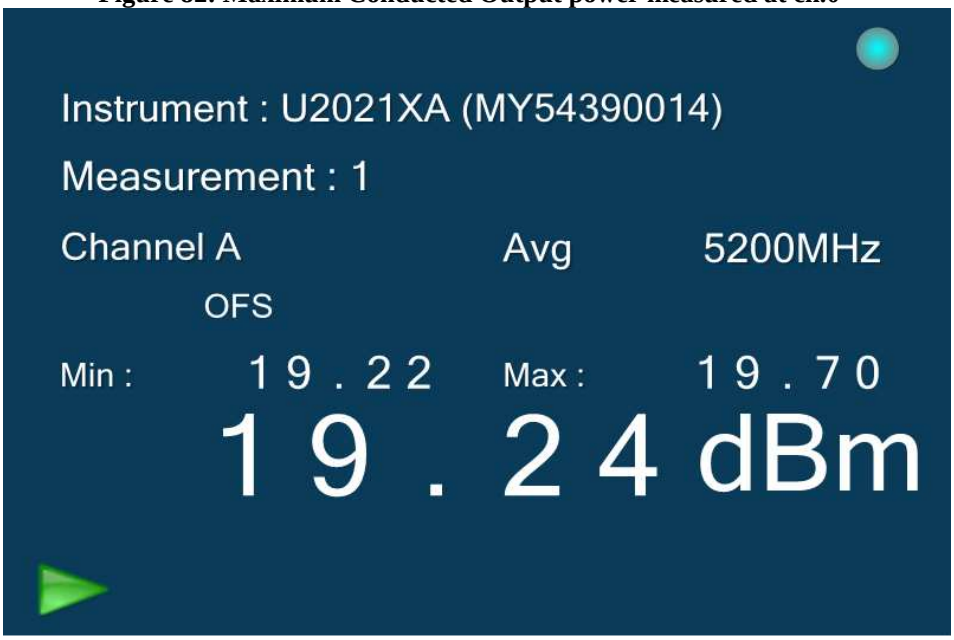

Figure 83: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.5.3 40MHz Modulation BW-High channel_5220MHz

Figure 84: Maximum Conducted Output power measured at ch.0

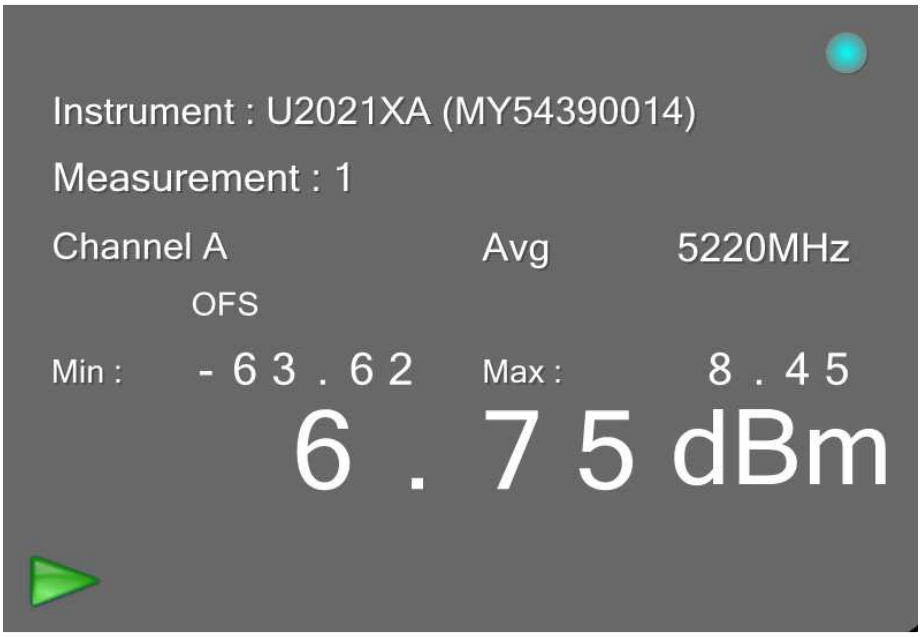

Figure 85: Maximum Conducted Output power measured at ch.1

5.3.4.5.4 5MHz Modulation BW-Low channel_5155MHz

Figure 86: Maximum Conducted Output power measured at ch.0

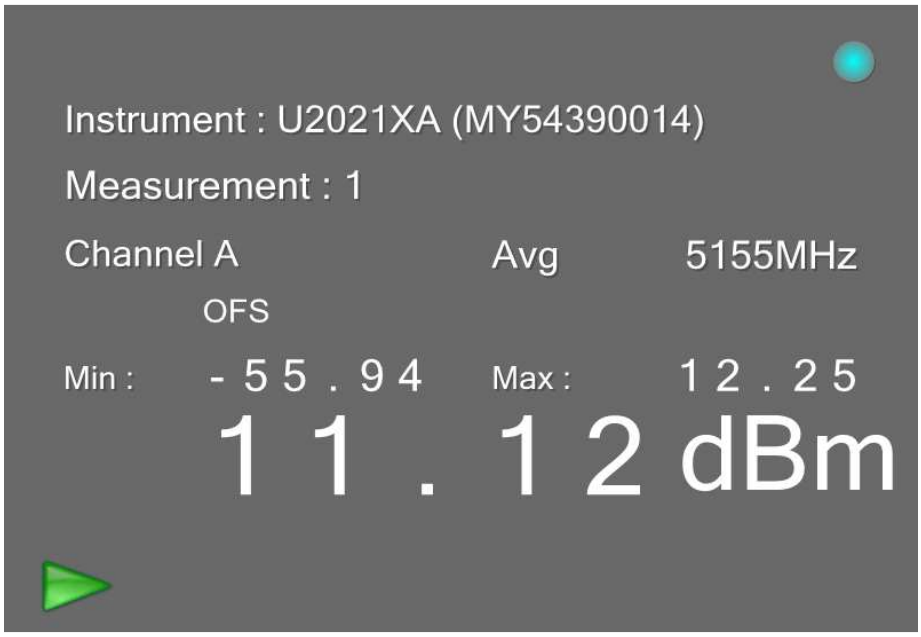

Figure 87: Maximum Conducted Output power measured at ch.1

5.3.4.5.5 5MHz Modulation BW-Mid channel_5200 MHz

Figure 88: Maximum Conducted Output power measured at ch.0

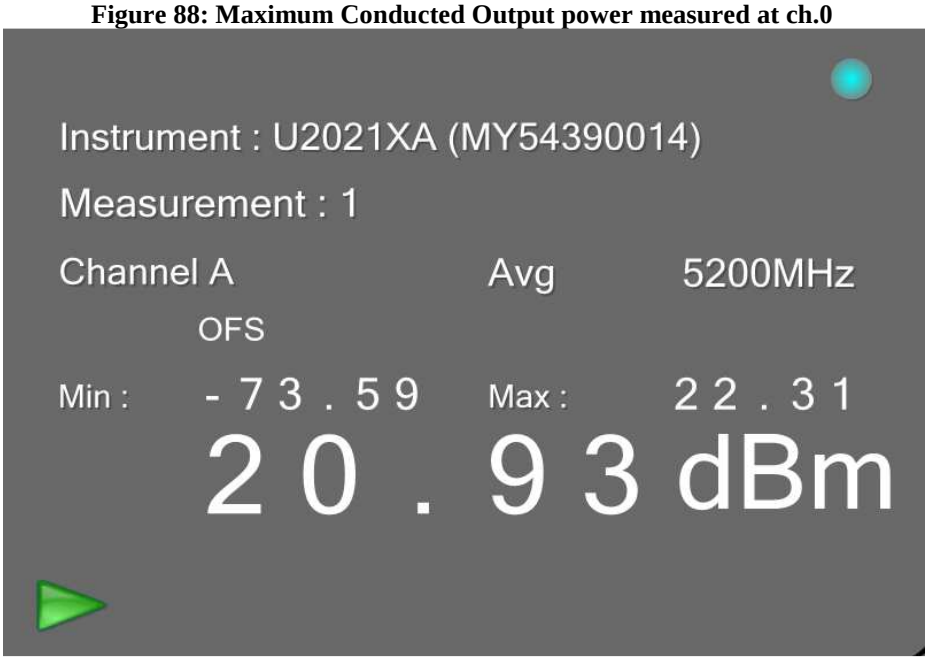

Figure 89: Maximum Conducted Output power measured at ch.1

5.3.4.5.6 5MHz Modulation BW-High channel_5245MHz

Figure 90: Maximum Conducted Output power measured at ch.0

Figure 91: Maximum Conducted Output power measured at ch.1

5.3.4.6 RESULT (SUPPORTING GRAPHS / DATA) FOR 17DBI ANTENNA CONDITION

5.3.4.6.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

Figure 92: Maximum Conducted Output power measured at ch.0

Figure 93: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.6.2 40MHz Modulation BW-Mid channel_5200 MHz

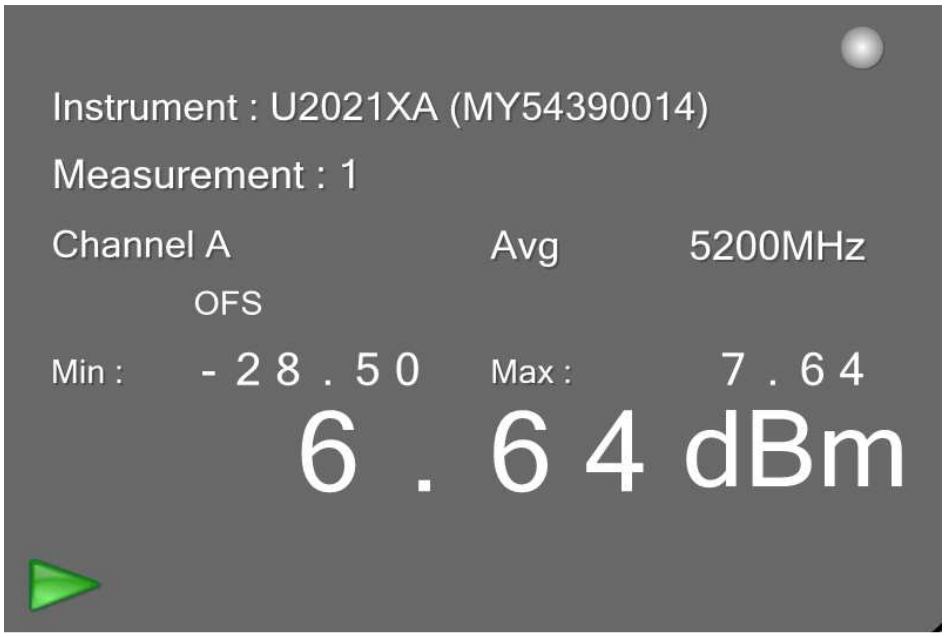

Figure 94: Maximum Conducted Output power measured at ch.0

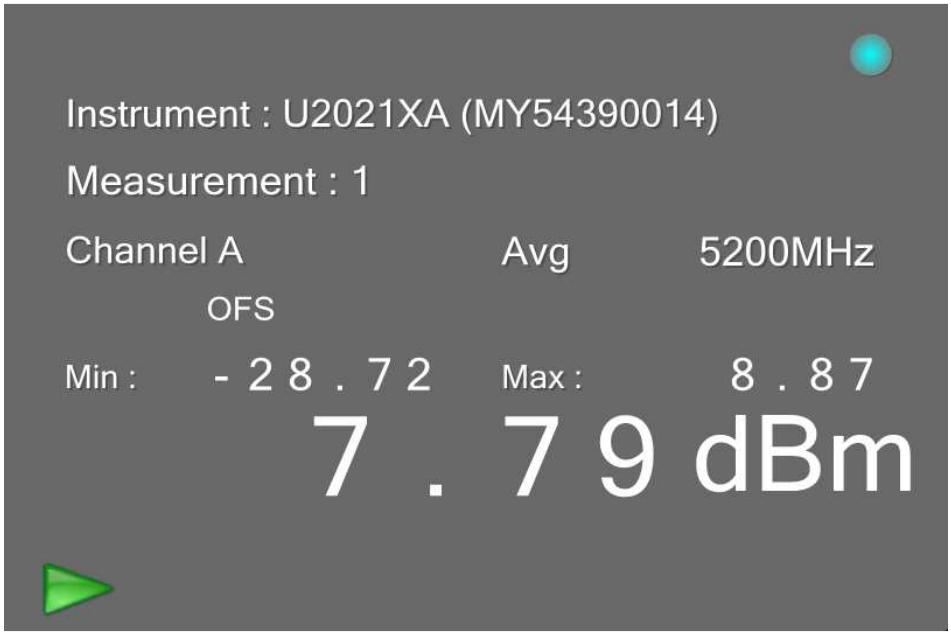

Figure 95: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.6.3 40MHz Modulation BW-High channel_5220MHz

Figure 96: Maximum Conducted Output power measured at ch.0

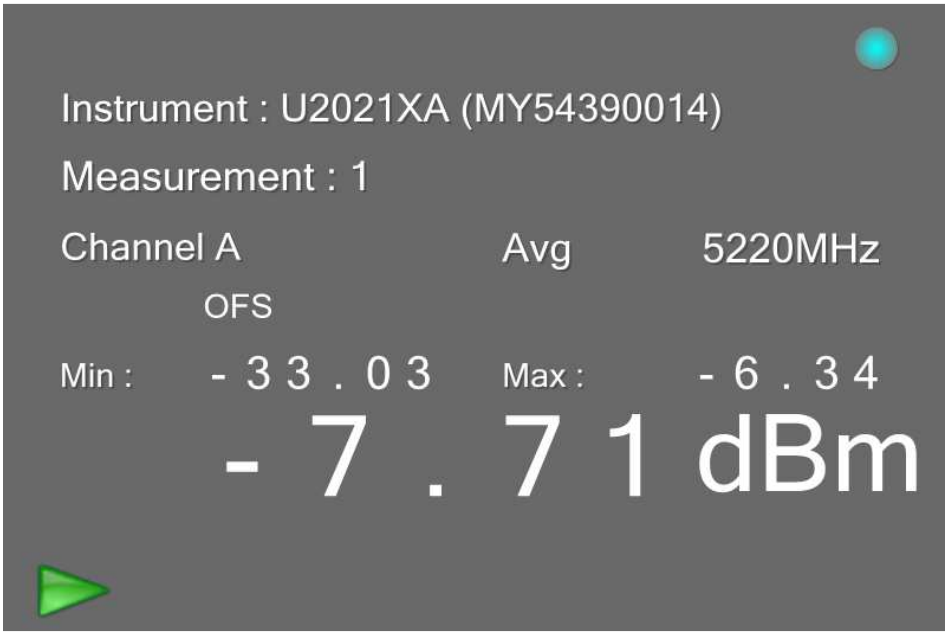

Figure 97: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.6.4 5MHz Modulation BW-Low channel_5155MHz

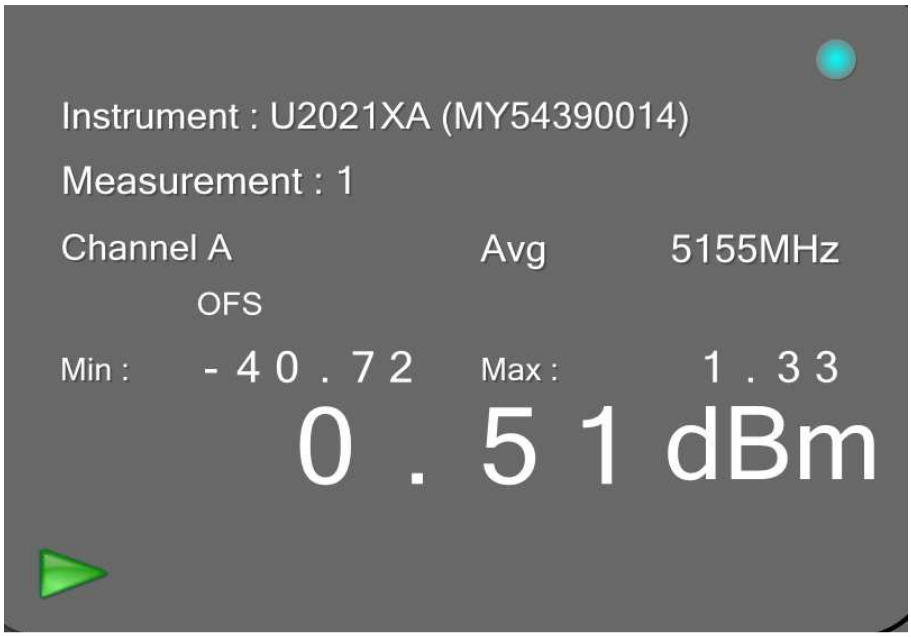

Figure 98: Maximum Conducted Output power measured at ch.0

Figure 99: Maximum Conducted Output power measured at ch.1

5.3.4.6.5 5MHz Modulation BW-Mid channel_5200MHz

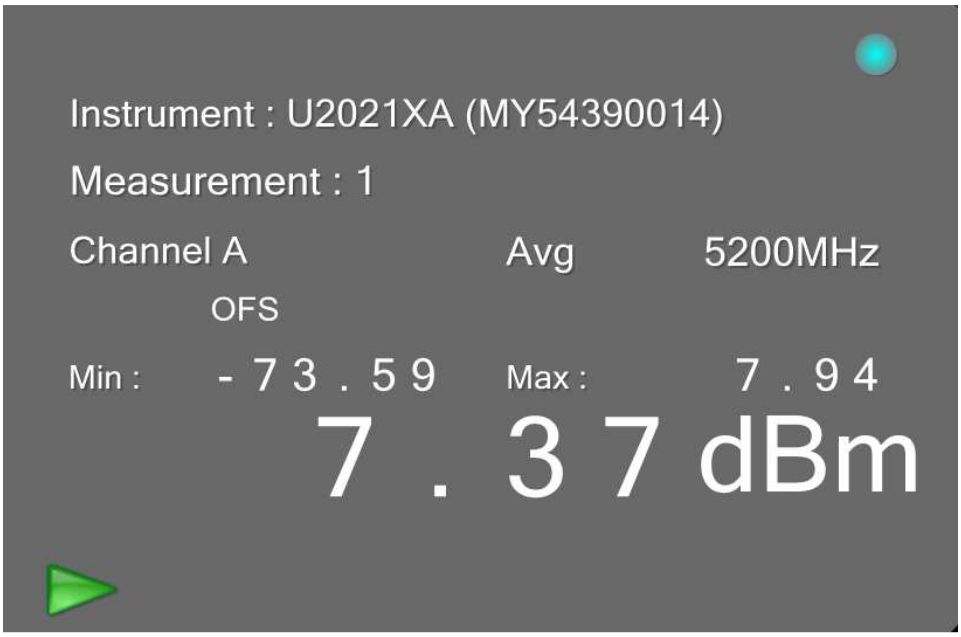

Figure 100: Maximum Conducted Output power measured at ch.0

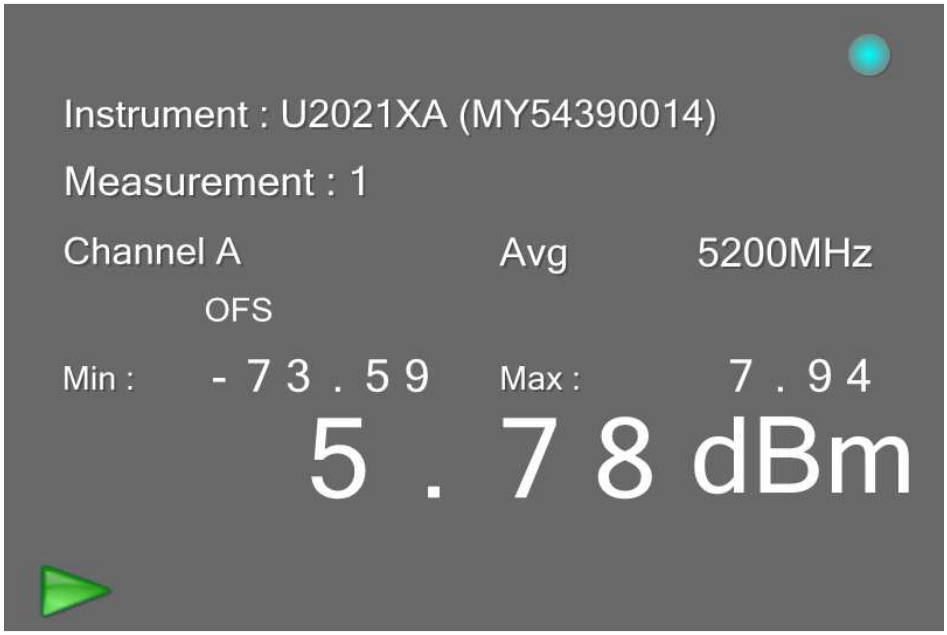

Figure 101: Maximum Conducted Output power measured at ch.1

5.3.4.6.6 5MHz Modulation BW-High channel_5245MHz

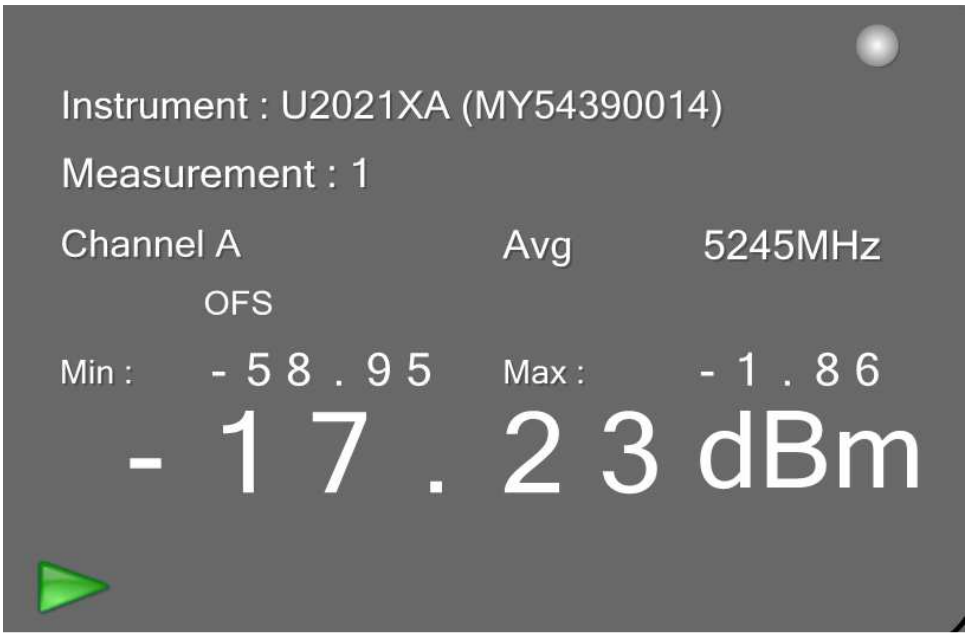

Figure 102: Maximum Conducted Output power measured at ch.0

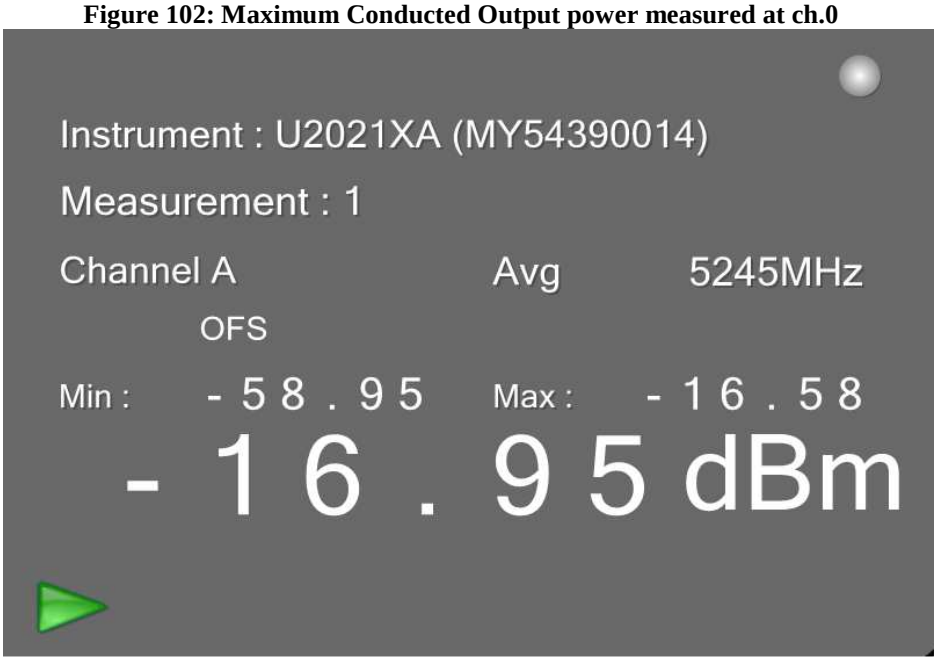

Figure 103: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.7 RESULT (SUPPORTING GRAPHS / DATA) FOR 24DBI DISH CONDITION

5.3.4.7.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

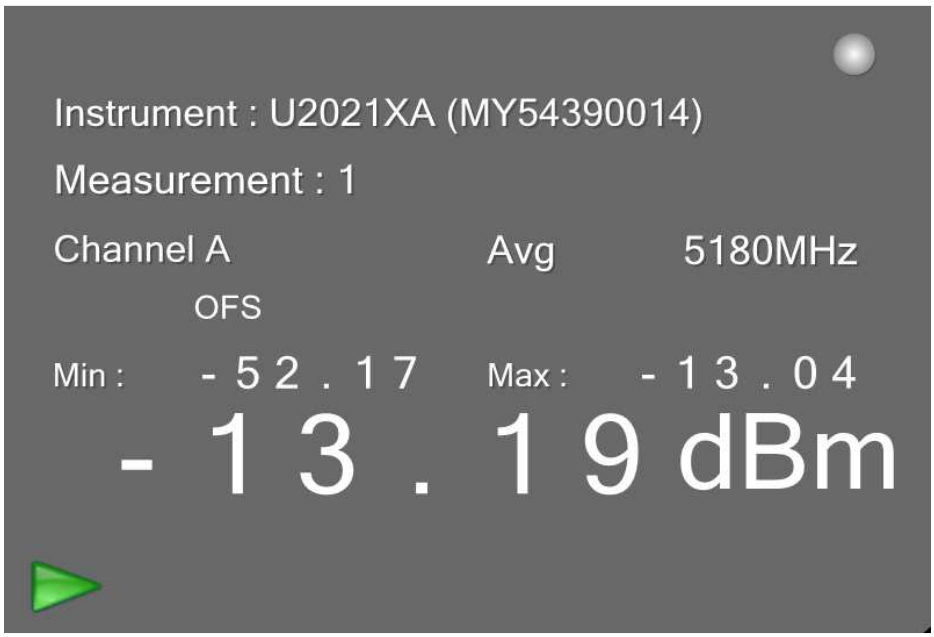

Figure 104: Maximum Conducted Output power measured at ch.0

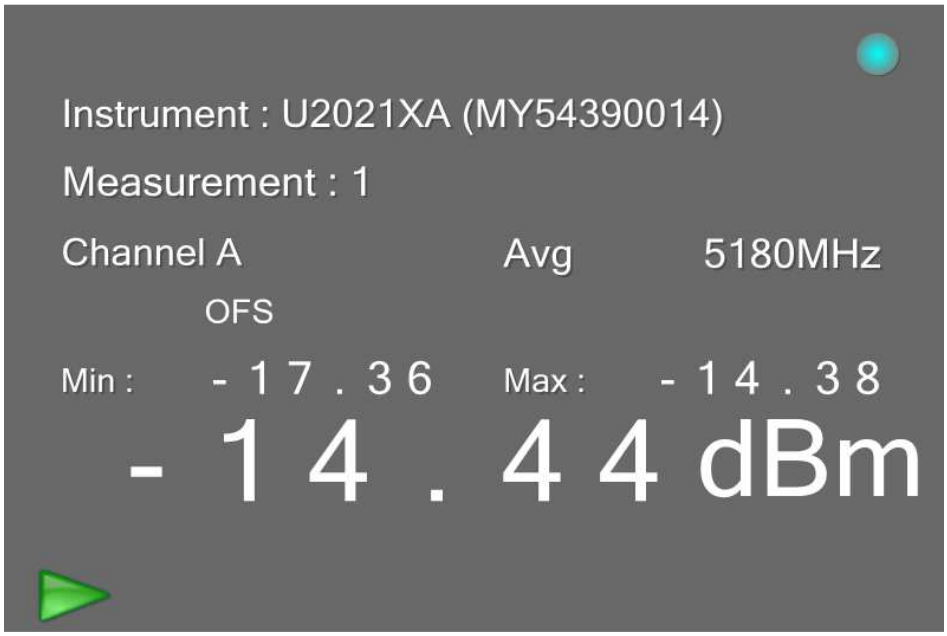

Figure 105: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.7.2 40MHz Modulation BW-Mid channel_5200 MHz

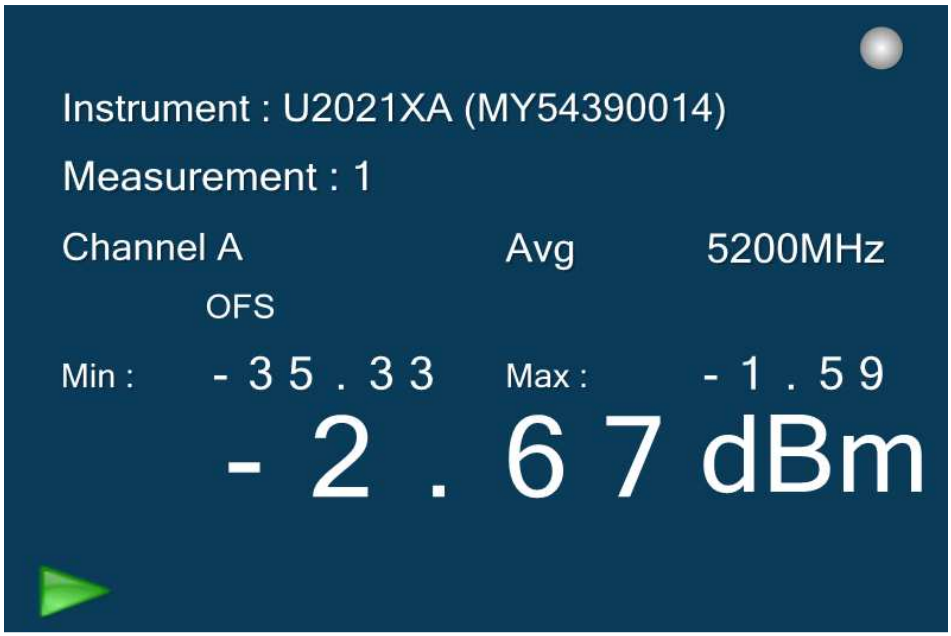

Figure 106: Maximum Conducted Output power measured at ch.0

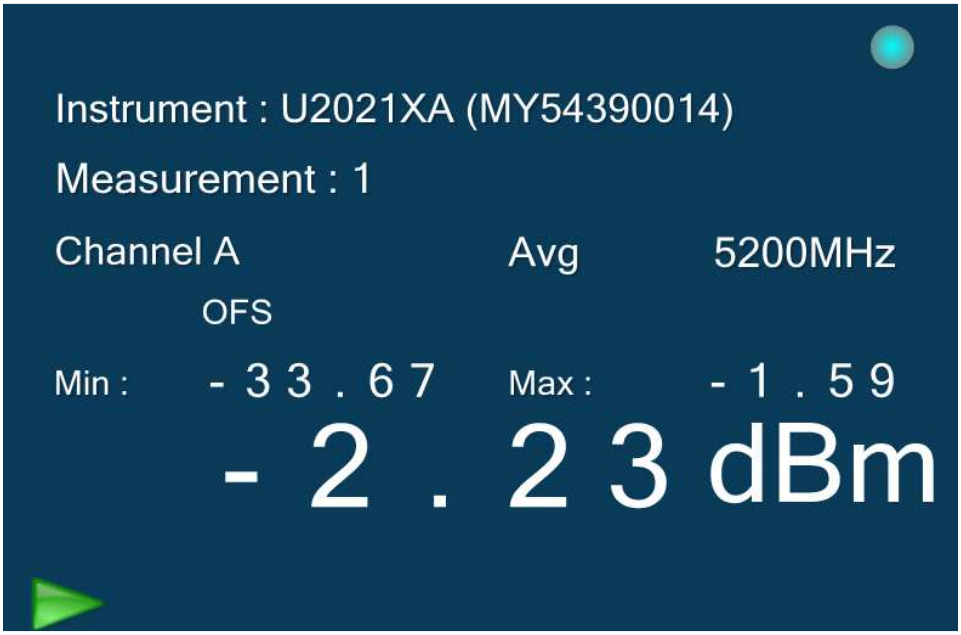

Figure 107: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.7.3 40MHz Modulation BW-High channel_5220MHz

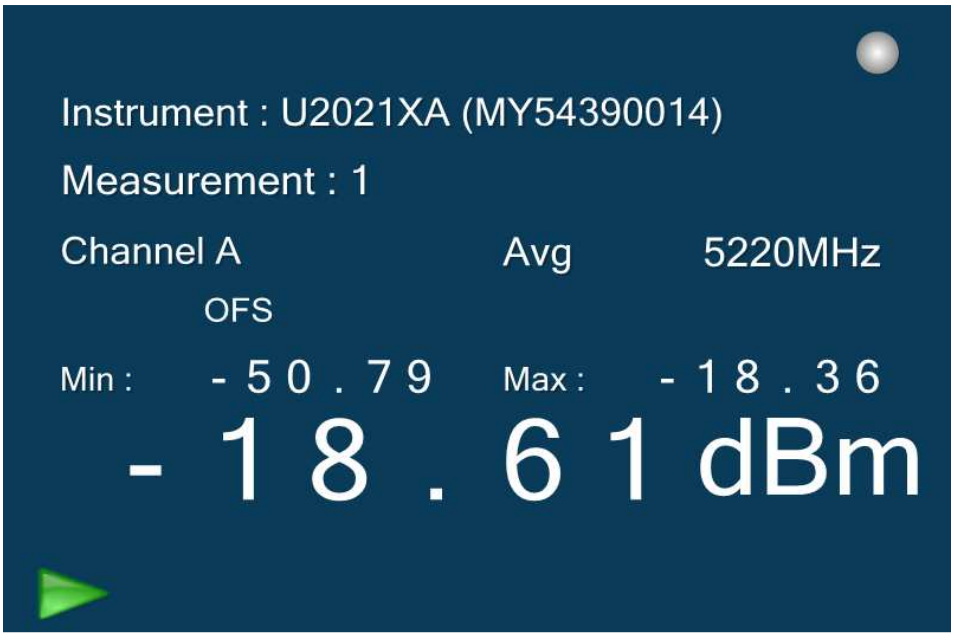

Figure 108: Maximum Conducted Output power measured at ch.0

Figure 109: Maximum Conducted Output power measured at ch.1

5.3.4.7.4 5MHz Modulation BW-Low channel_5155MHz

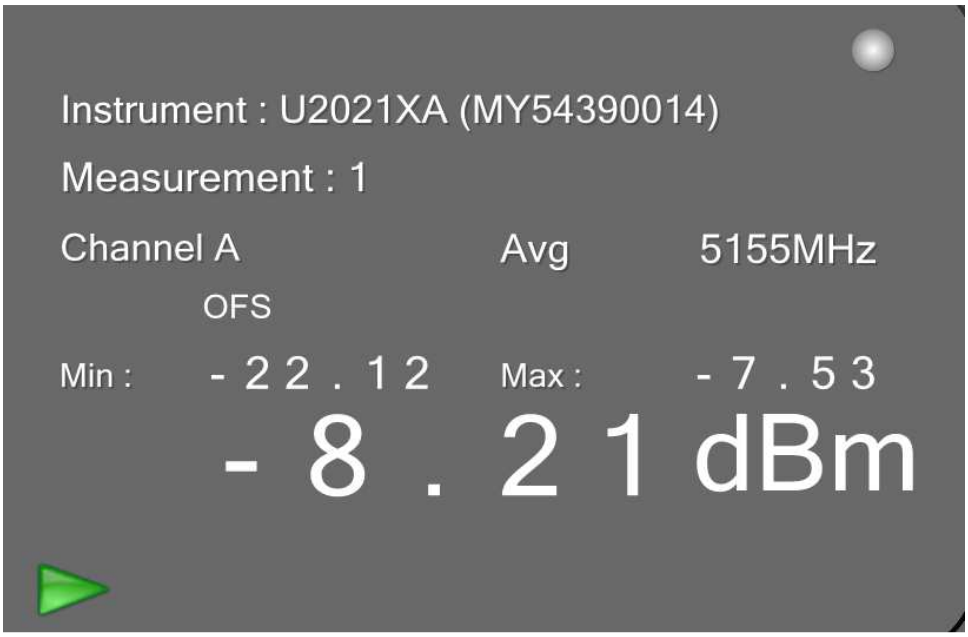

Figure 110: Maximum Conducted Output power measured at ch.0

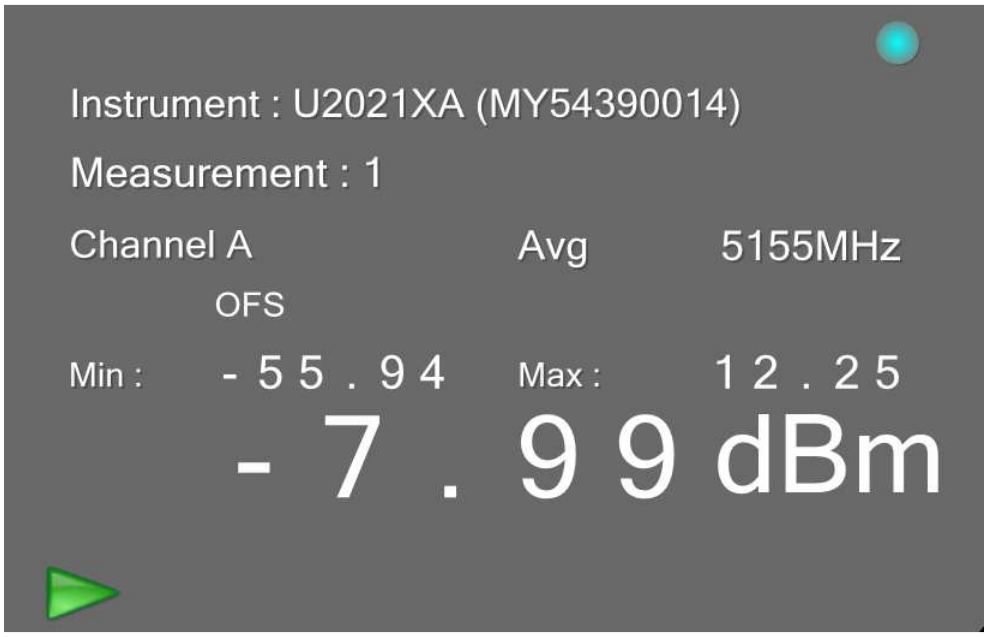

Figure 111: Maximum Conducted Output power measured at ch.1

5.3.4.7.5 5MHz Modulation BW-Mid channel_5200 MHz

Figure 112: Maximum Conducted Output power measured at ch.0

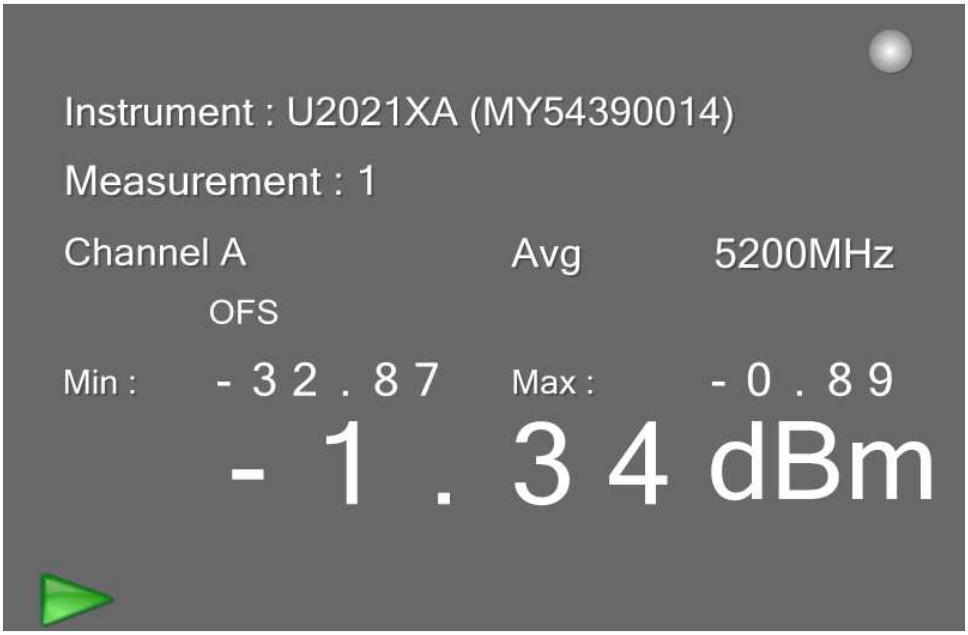

Figure 113: Maximum Conducted Output power measured at ch.1

5.3.4.7.6 5MHz Modulation BW-High channel_5245MHz

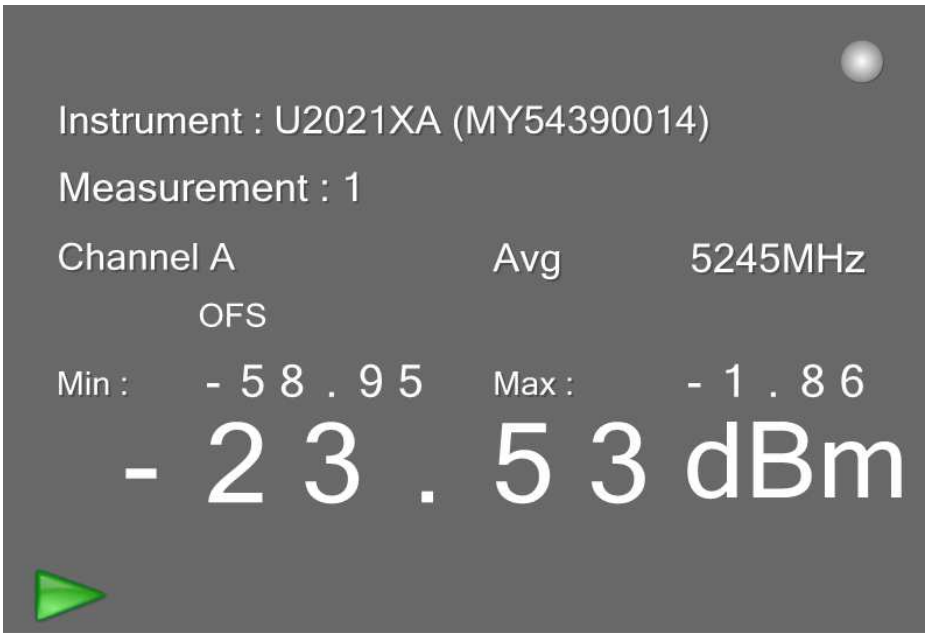

Figure 114: Maximum Conducted Output power measured at ch.0

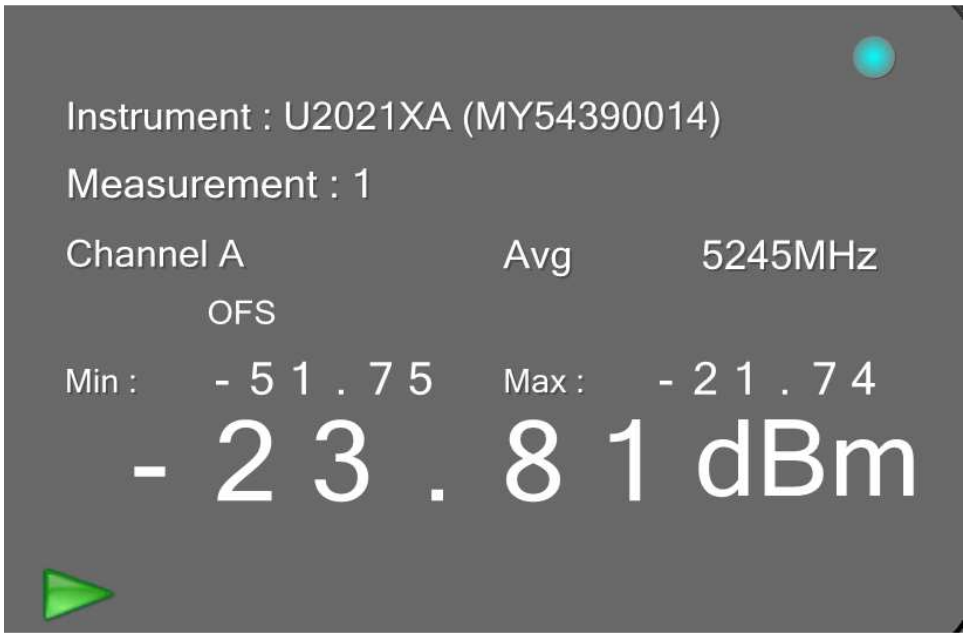

Figure 115: Maximum Conducted Output power measured at ch.1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.8 RESULT

Maximum Conducted Output power for all channels in both 40MHz &5MHz Modulation Bandwidths is within the specified limit. Refer below table for consolidated data.

5.3.4.8.1 BASIC CONDITION

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (dBm)
40	Ch. 0	5180	9.60
40	Ch. 0	5200	16.61
40	Ch. 0	5220	8.08
40	Ch. 1	5180	10.47
40	Ch. 1	5200	19.24
40	Ch. 1	5220	6.75
5	Ch. 0	5155	11.10
5	Ch. 0	5200	20.40
5	Ch. 0	5245	-5.04
5	Ch. 1	5155	11.12
5	Ch. 1	5200	20.93
5	Ch. 1	5245	-2.63

Consolidated values across channels and Final Power

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Consolidated Power (dBm)	Limit (dBm)	Result
40	Ch. 0& Ch. 1	5180	13.067	30	PASS
40	Ch. 0 & Ch. 1	5200	21.131	30	PASS
40	Ch. 0 & Ch. 1	5220	10.476	30	PASS
5	Ch. 0 & Ch. 1	5155	14.120	24	PASS
5	Ch. 0 & Ch. 1	5200	23.68	24	PASS
5	Ch. 0 & Ch. 1	5245	-0.659	24	PASS

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.8.2 17DBI ANTENNA CONDITION

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (dBm)
40	Ch. 0	5180	-4.60
40	Ch. 0	5200	6.64
40	Ch. 0	5220	-4.82
40	Ch. 1	5180	-3.70
40	Ch. 1	5200	7.79
40	Ch. 1	5220	-7.71
5	Ch. 0	5155	0.51
5	Ch. 0	5200	7.37
5	Ch. 0	5245	-17.23
5	Ch. 1	5155	-1.00
5	Ch. 1	5200	5.78
5	Ch. 1	5245	-16.95

Consolidated values across channels and Final Power

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Consolidated Power (dBm)	Limit (dBm)	Result
40	Ch. 0& Ch. 1	5180	-1.116	19	PASS
40	Ch. 0 & Ch. 1	5200	10.263	19	PASS
40	Ch. 0 & Ch. 1	5220	-3.018	19	PASS
5	Ch. 0 & Ch. 1	5155	2.830	13	PASS
5	Ch. 0 & Ch. 1	5200	9.873	13	PASS
5	Ch. 0 & Ch. 1	5245	-14.077	13	PASS

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.4.8.3 24DBI DISH CONDITION

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (dBm)
40	Ch. 0	5180	-13.19
40	Ch. 0	5200	-2.67
40	Ch. 0	5220	-18.61
40	Ch. 1	5180	-14.44
40	Ch. 1	5200	-2.23
40	Ch. 1	5220	-19.02
5	Ch. 0	5155	-8.21
5	Ch. 0	5200	0.48
5	Ch. 0	5245	-23.53
5	Ch. 1	5155	-7.99
5	Ch. 1	5200	-1.34
5	Ch. 1	5245	-23.81

Consolidated values across channels and Final Power

Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Consolidated Power (dBm)	Limit (dBm)	Result
40	Ch. 0& Ch. 1	5180	-10.760	12	PASS
40	Ch. 0 & Ch. 1	5200	0.566	12	PASS
40	Ch. 0 & Ch. 1	5220	-15.800	12	PASS
10	Ch. 0 & Ch. 1	5155	-5.088	6	PASS
10	Ch. 0 & Ch. 1	5200	2.675	6	PASS
10	Ch. 0 & Ch. 1	5245	-20.657	6	PASS

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5 PEAK POWER SPECTRAL DENSITY

5.3.5.1 TEST SPECIFICATION

Test Standard	47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014
Test Procedure	ANSI C63.10-2013
Frequency Range	5150MHz to 5250MHz
Resolution Bandwidth	1MHz
Video Bandwidth	3MHz
Sweep Time	100msec
Attenuation	Auto
Test Mode	Conducted
Detector	Average
Input Voltage	120V AC
Input Frequency	60 Hz
Temperature	22.0°C
Humidity	56.0%
Tested By	Subhendu
Test Date	12th May to 25th May 2015

5.3.5.2 LIMITS

Test condition	Limit (dBm/MHz) – 2 chains	Limit (dBm/MHz) – 1 chain
Basic limit	17	14
17dBi External antenna limit	6*	3*
24dBi dish	-1*	-4*

*: As per standard if antenna gain is more than 6dBi, then the limit should be reduced by the amount in dB that the gain of the antenna exceeds 6dBi

5.3.5.3 TEST SETUP

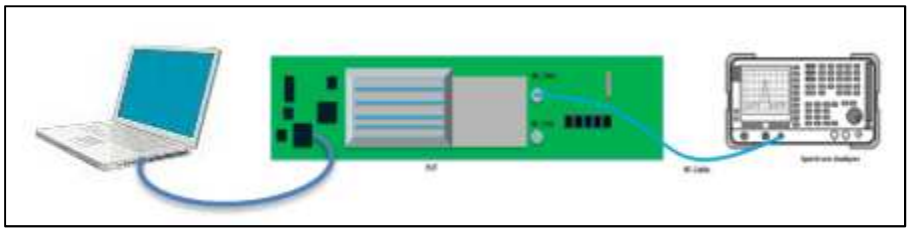

Figure 116: Typical test setup for Conducted Test setup

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per Sections F & E (2) (b) of **"789033 D02 General UNII Test Procedures New Rules v01".** The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. Captured the data from spectrum analyzer and compared with the limits specified in the standard.

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.5 RESULT (SUPPORTING GRAPHS / DATA) FOR BASIC CONDITION

5.3.5.5.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

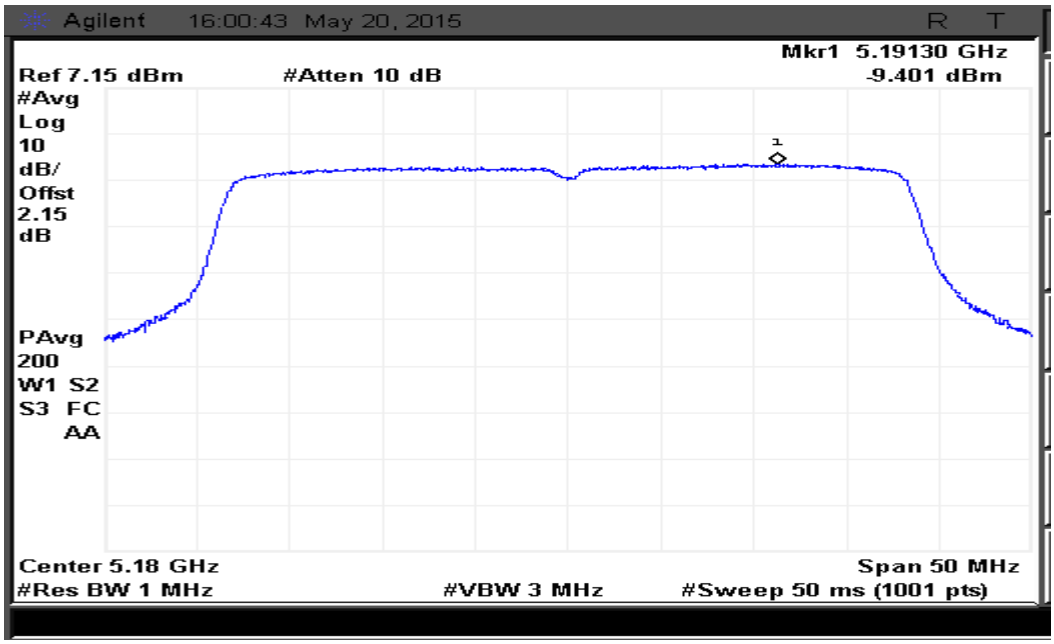

Figure 117: Power Spectral density measured at Ch. 0

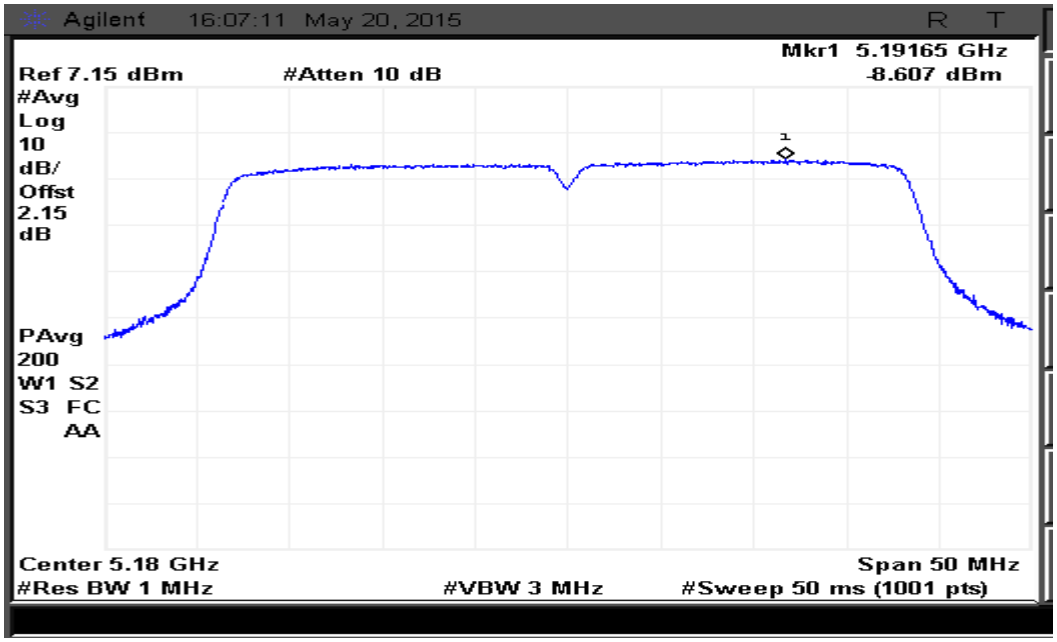

Figure 118: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.5.2 40MHz Modulation BW-Mid channel_5200MHz

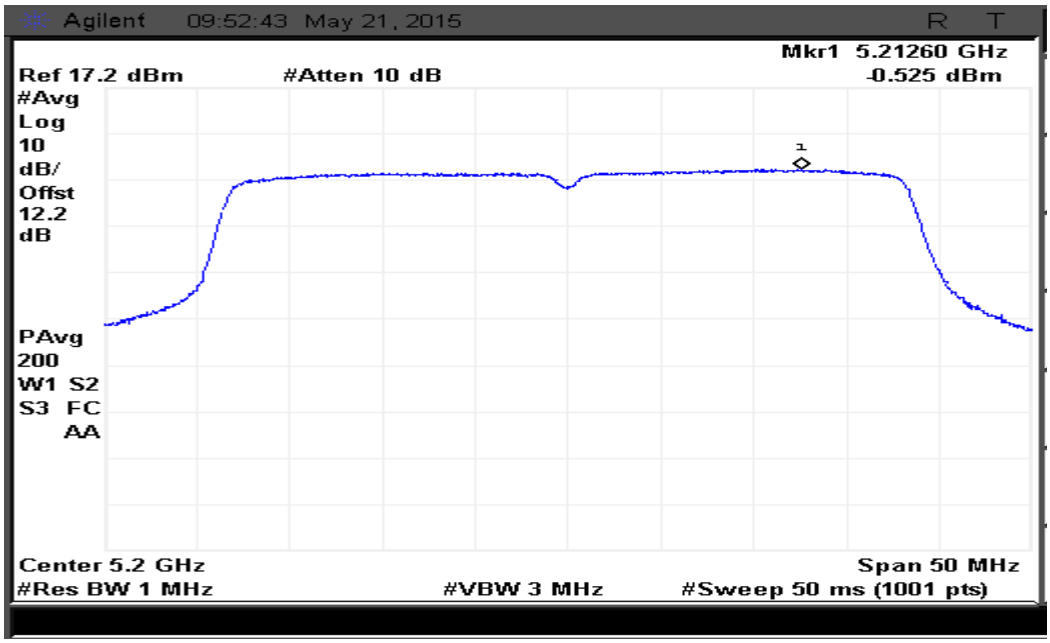

Figure 119: Power Spectral density measured at Ch. 0

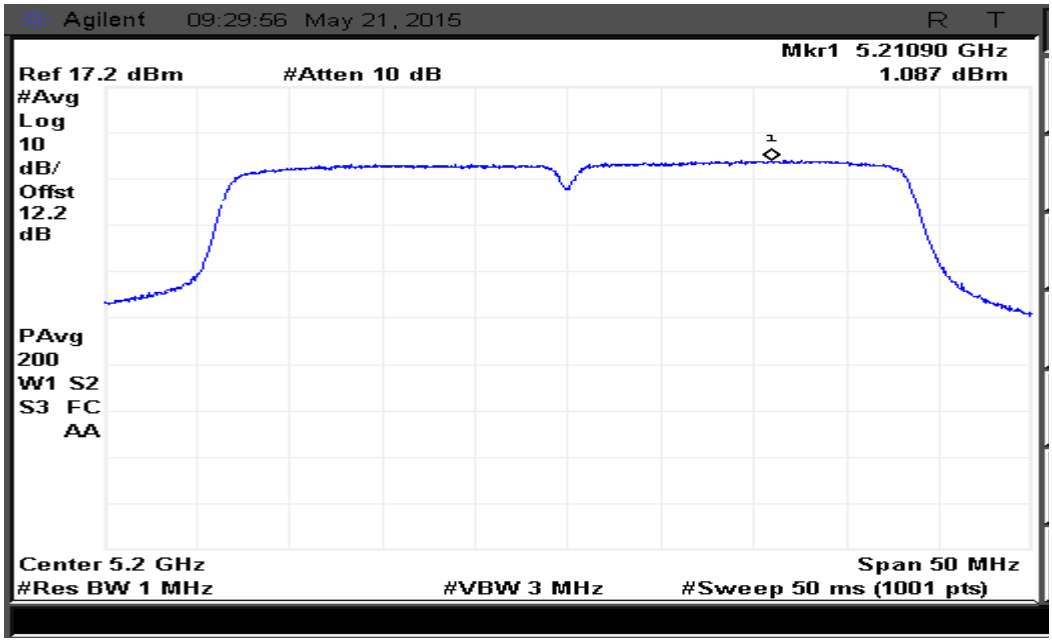

Figure 120: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.5.3 40MHz Modulation BW-High channel_5220MHz

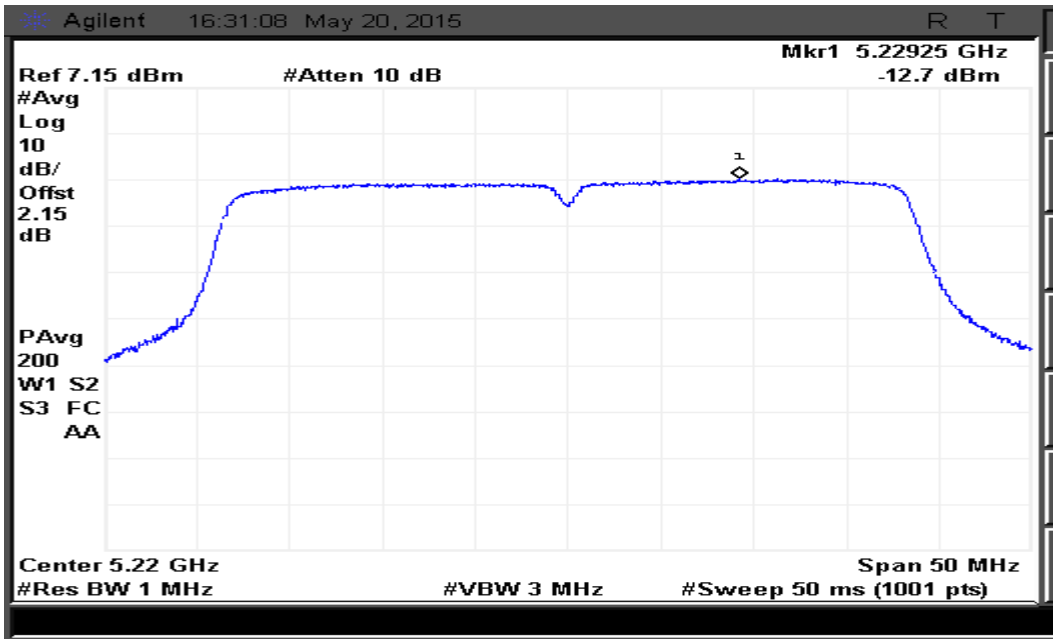

Figure 121: Power Spectral density measured at Ch. 0

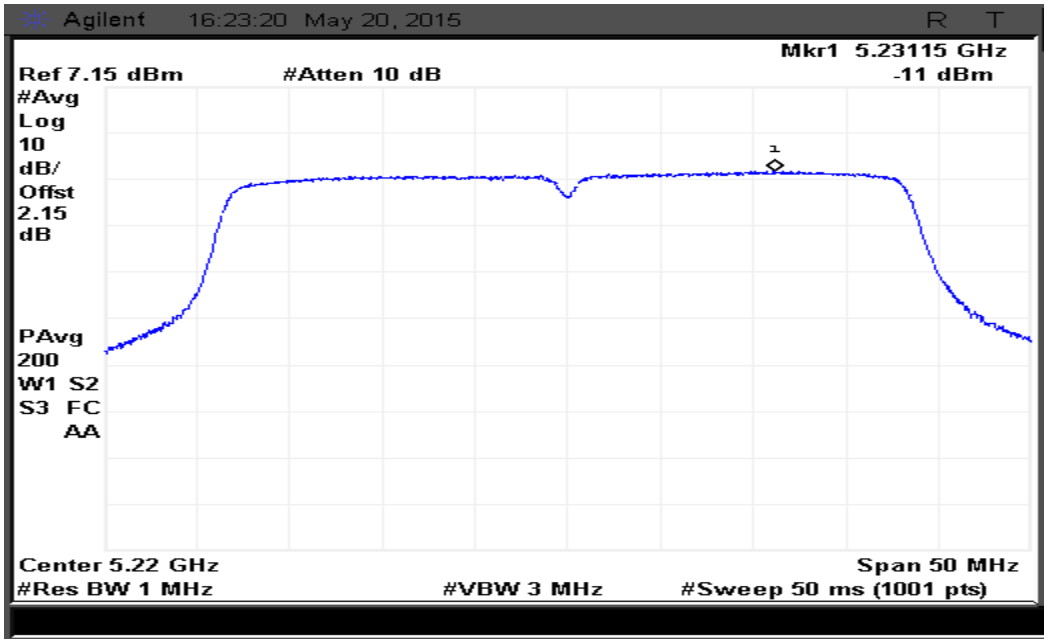

Figure 122: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.5.4 5MHz MODULATION BW-LOW CHANNEL_5155MHz

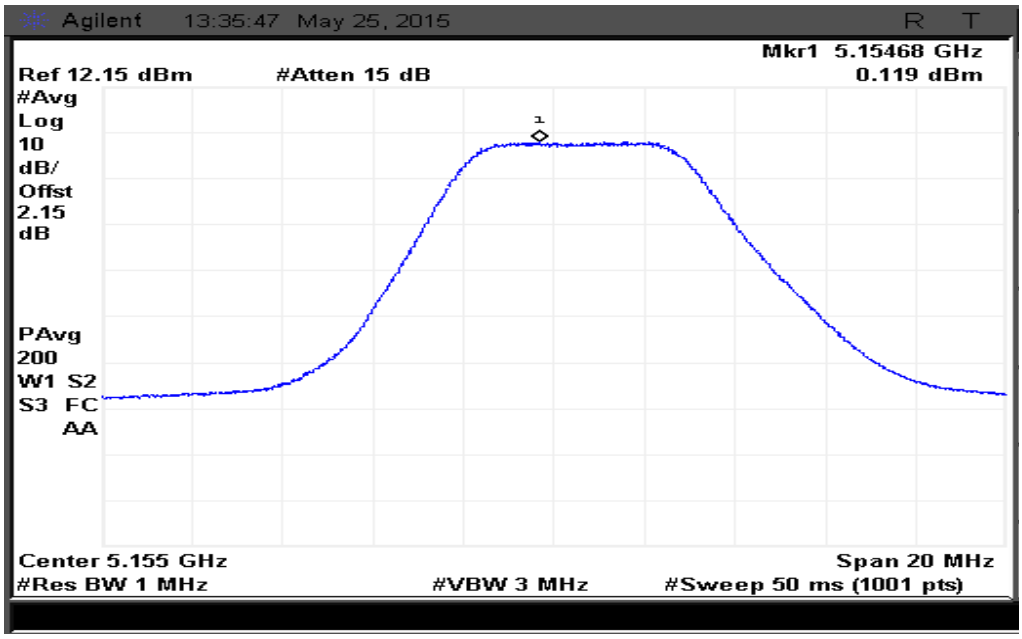

Figure 123: Power Spectral density measured at Ch. 0

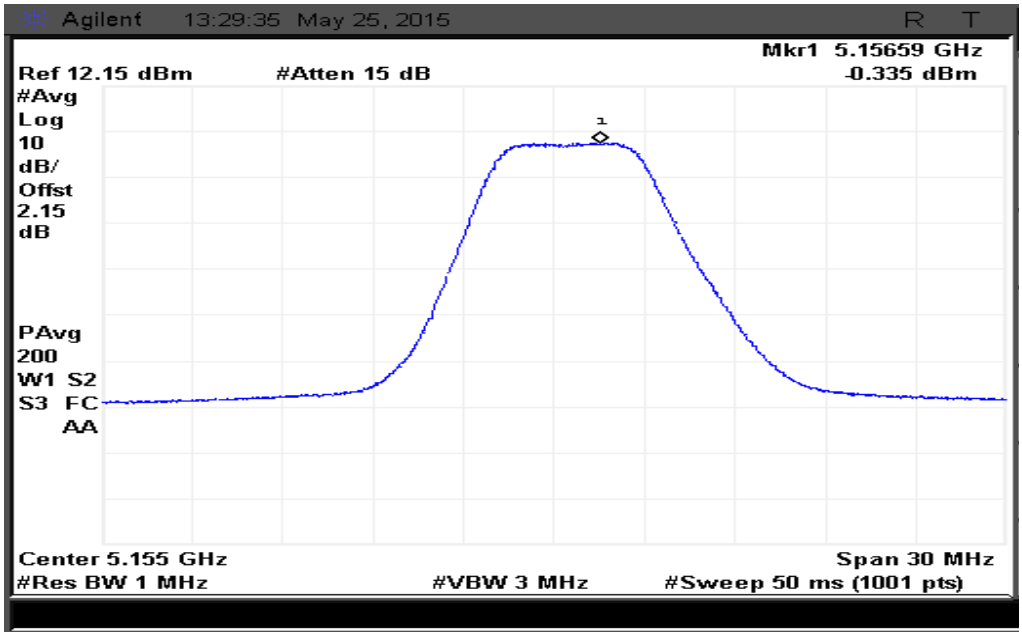

Figure 124: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.5.5 5MHz MODULATION BW-MID CHANNEL_5200 MHz

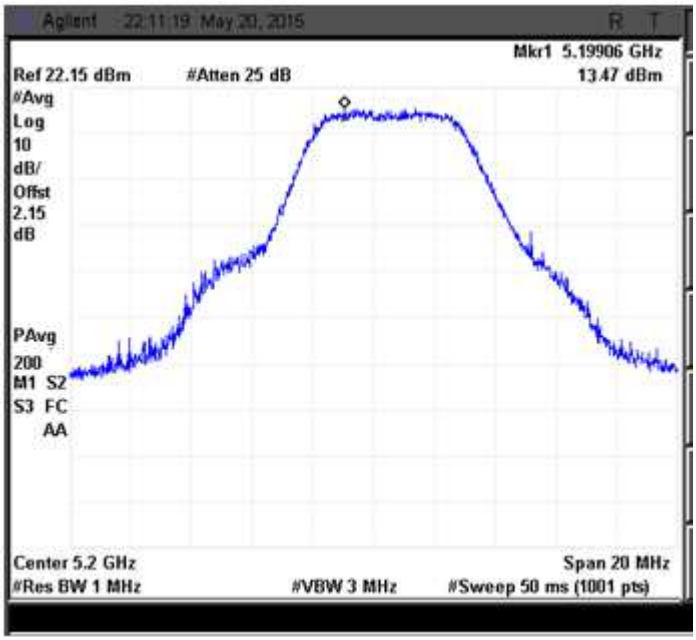

Figure 125: Power Spectral density measured at Ch. 0

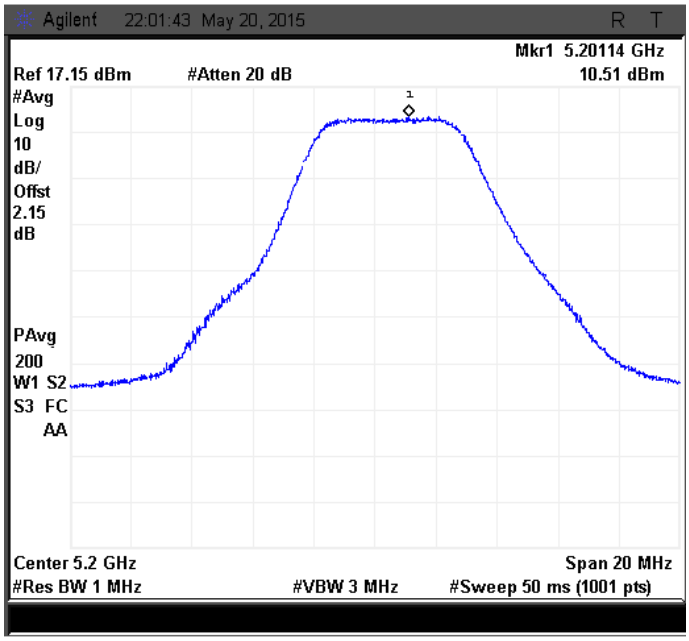

Figure 126: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.5.6 5MHz Modulation BW-High channel_5245MHz

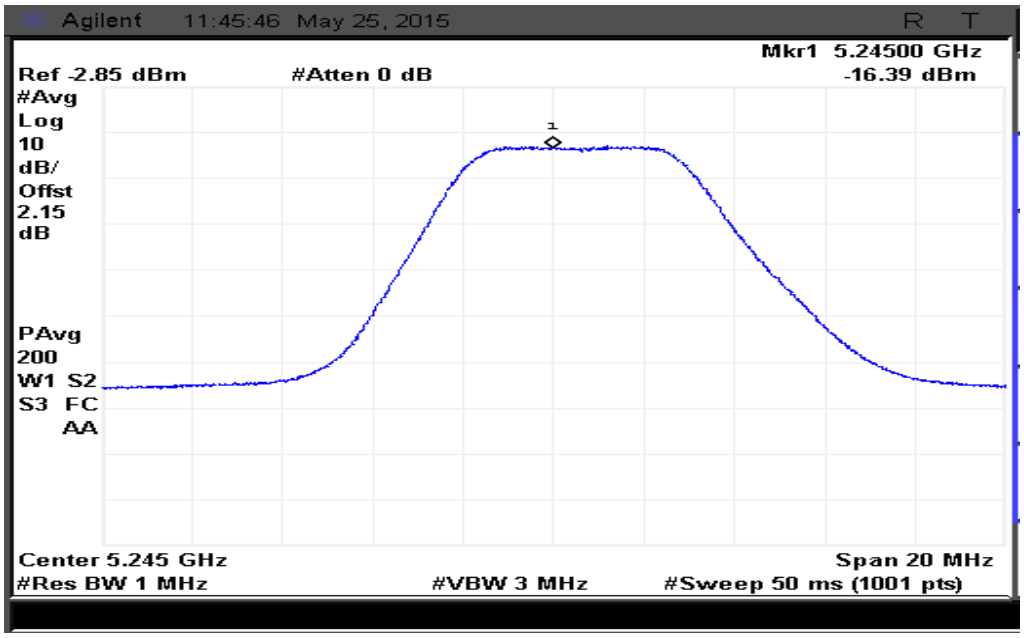

Figure 127: Power Spectral density measured at Ch. 0

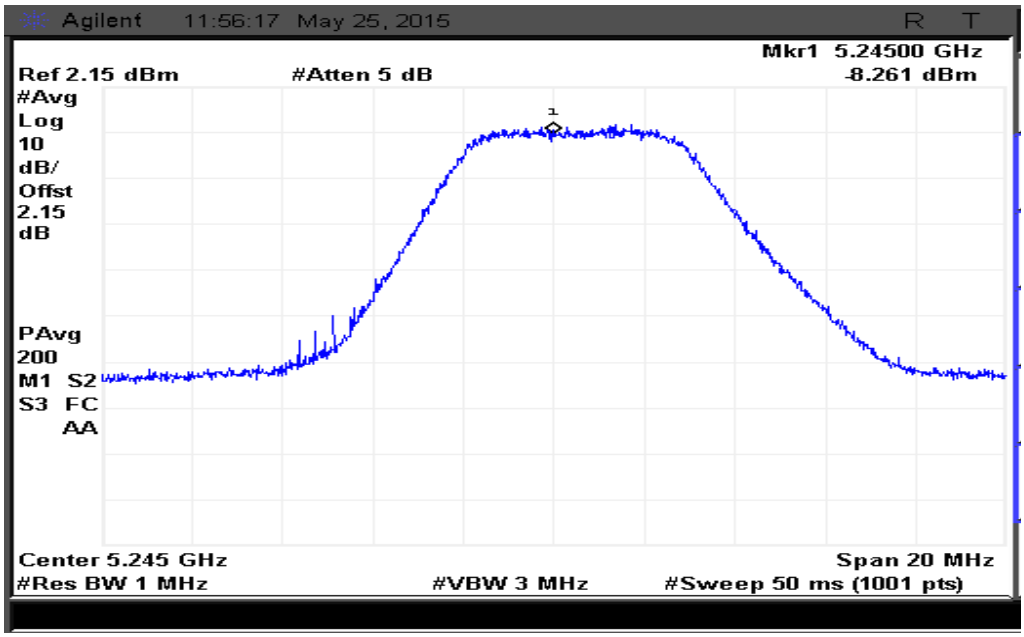

Figure 128: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.6 RESULT (SUPPORTING GRAPHS / DATA) FOR 17DBI ANTENNA CONDITION

5.3.5.6.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

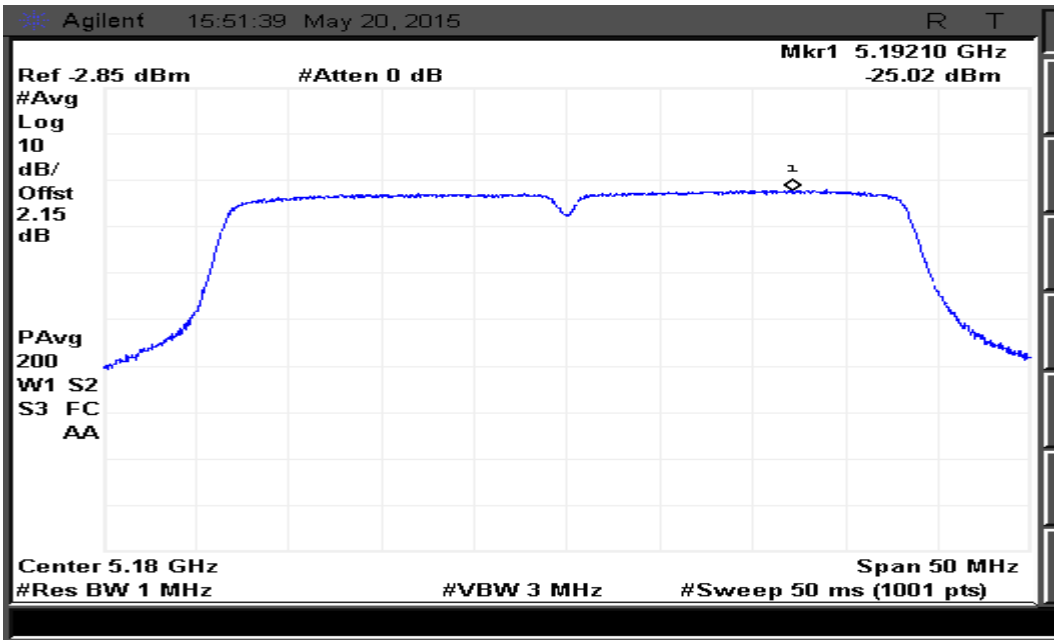

Figure 129: Power Spectral density measured at Ch. 0

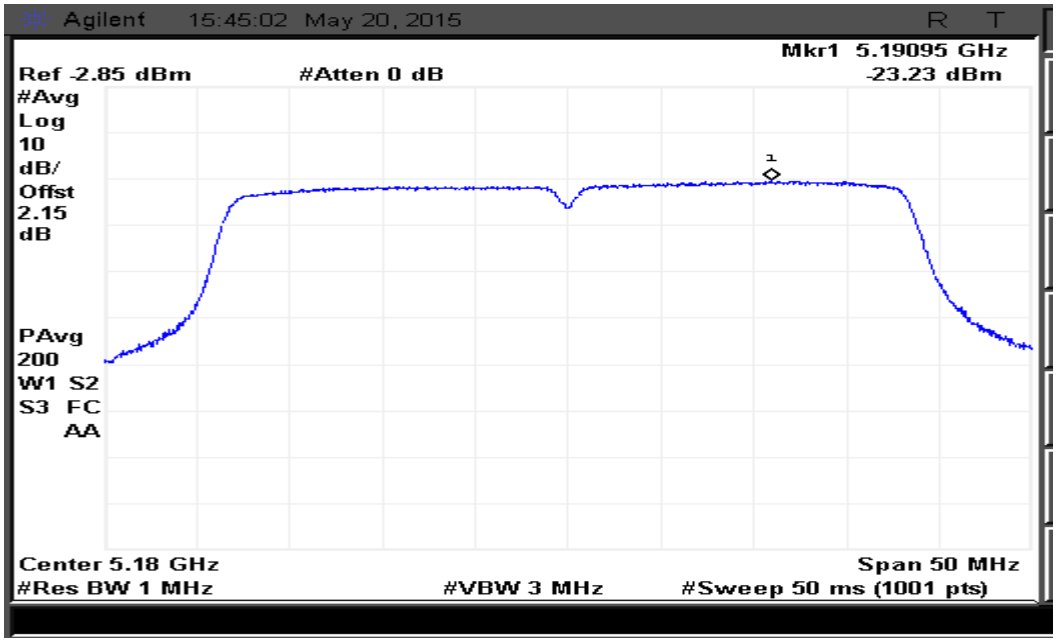

Figure 130: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.6.2 40MHz Modulation BW-Mid channel_5200 MHz

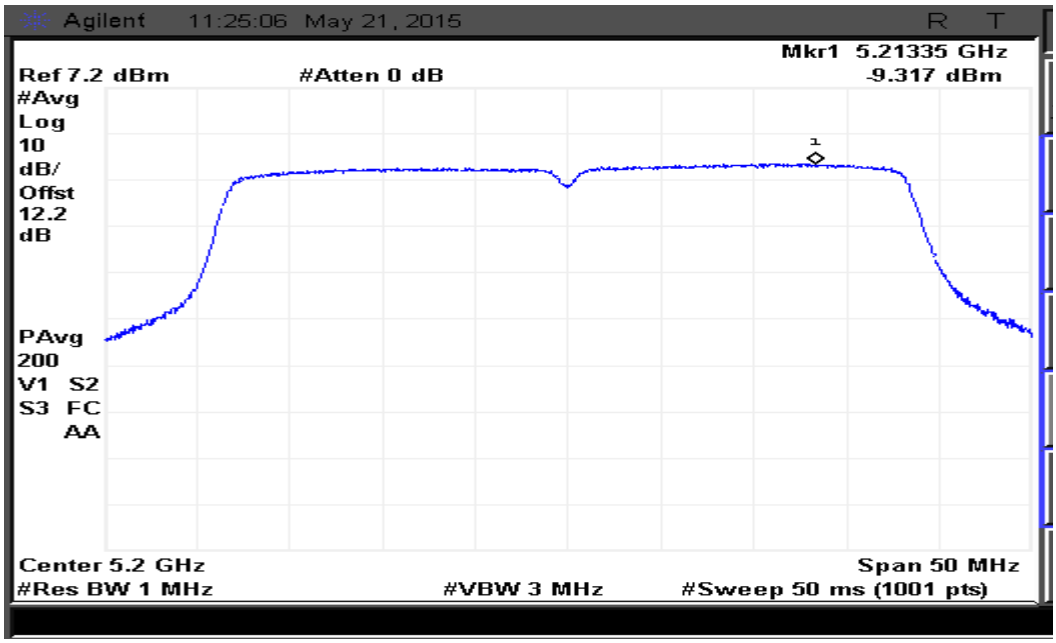

Figure 131: Power Spectral density measured at Ch. 0

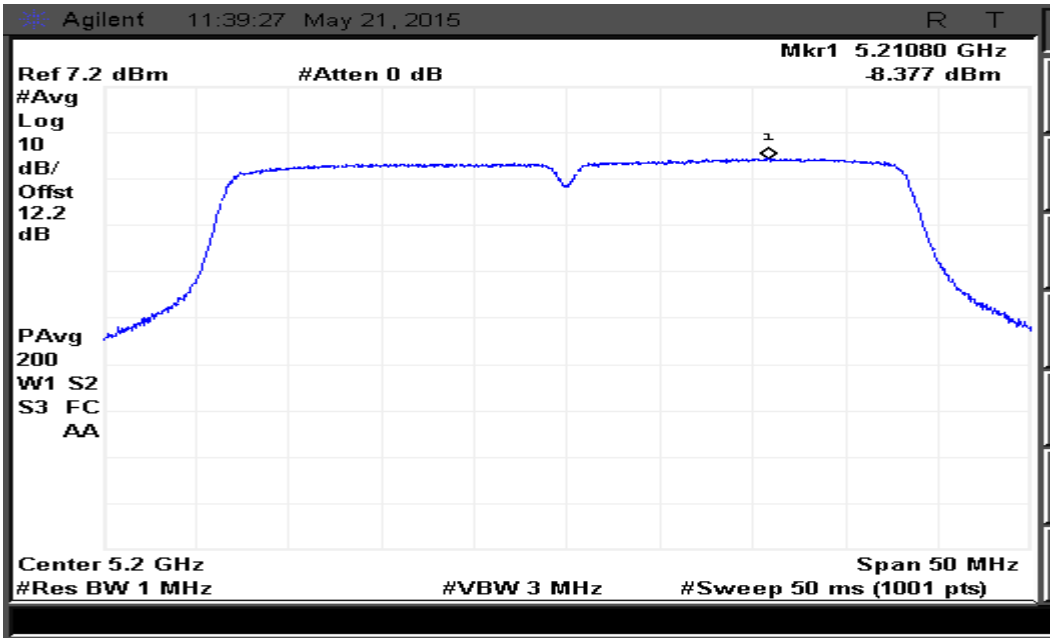

Figure 132: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.6.3 40MHz Modulation BW-High channel_5220MHz

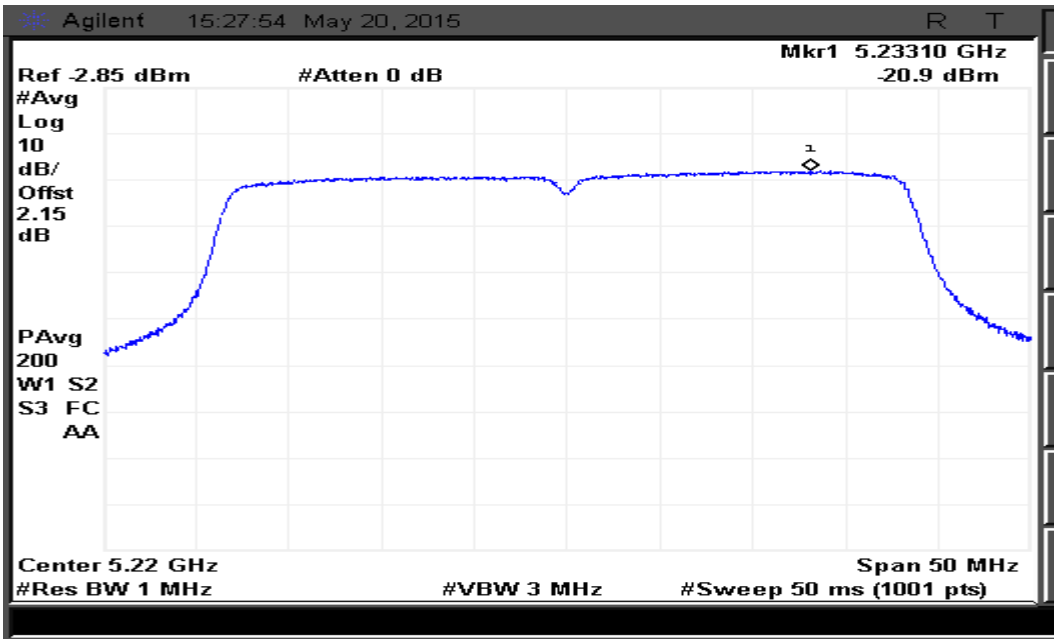

Figure 133: Power Spectral density measured at Ch. 0

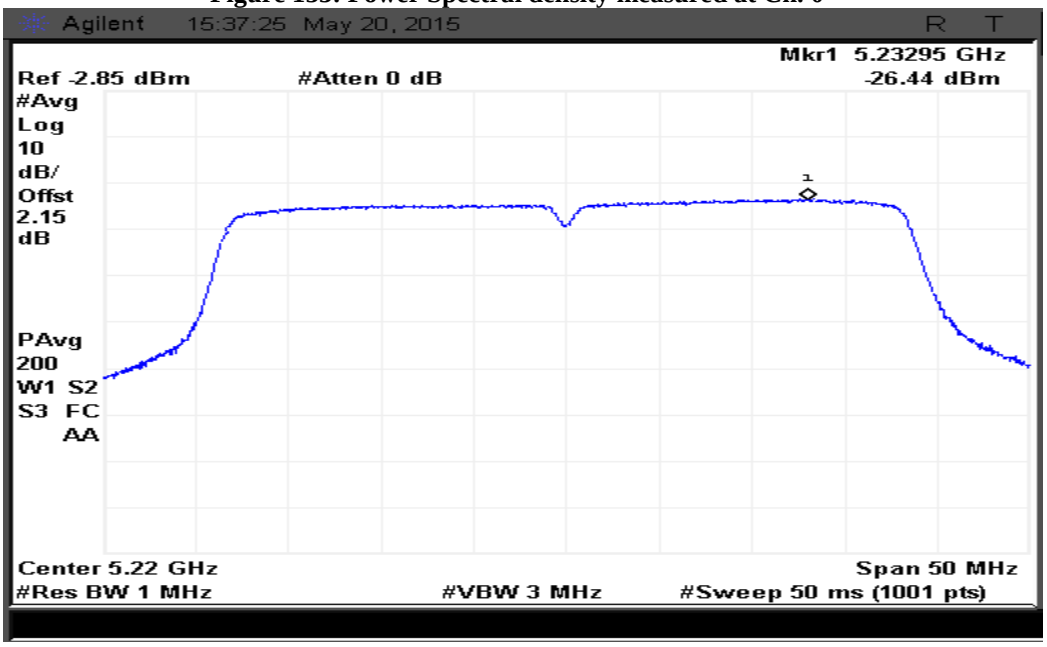

Figure 134: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.6.4 5MHz Modulation BW-Low hannel_5155MHz

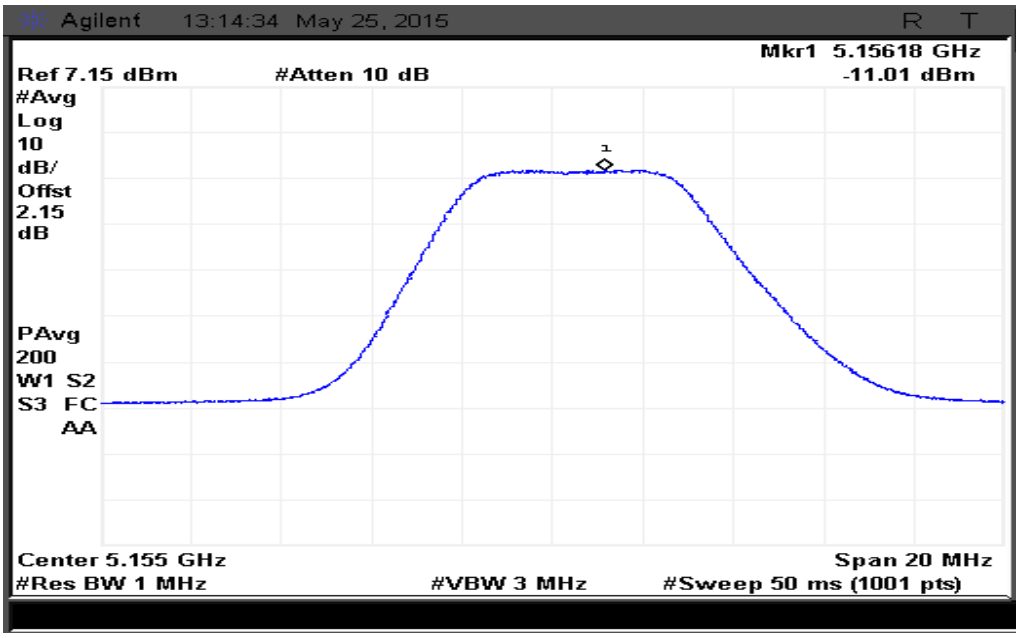

Figure 135: Power Spectral density measured at Ch. 0

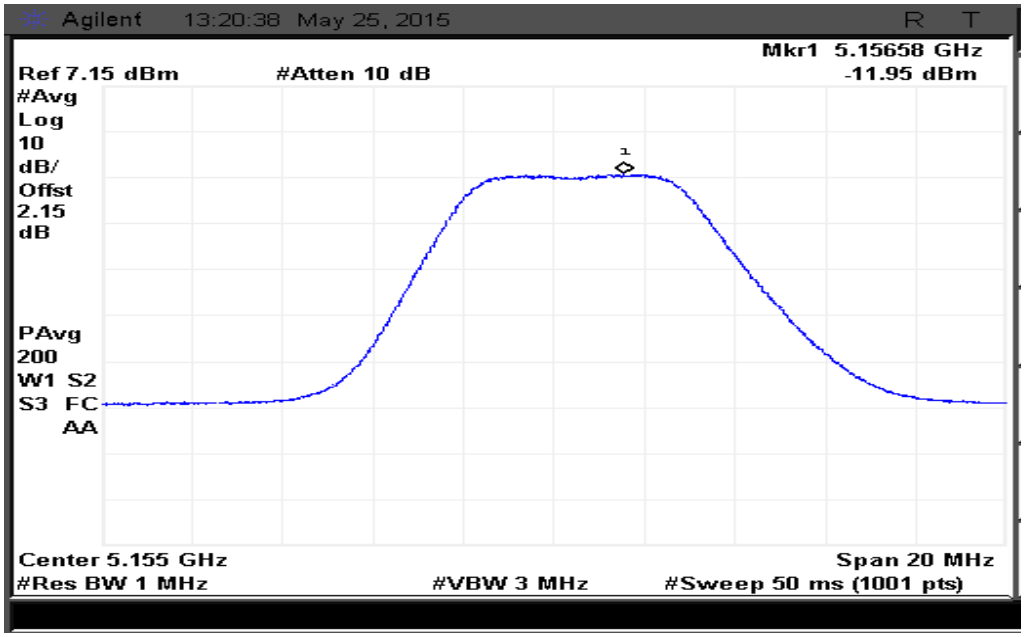

Figure 136: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.6.5 5MHz Modulation BW-Mid channel_5200MHz

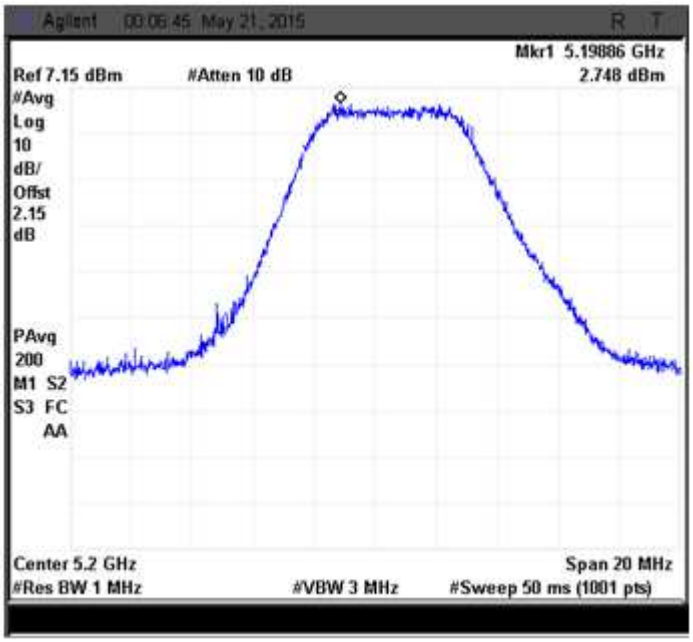

Figure 137: Power Spectral density measured at Ch. 0

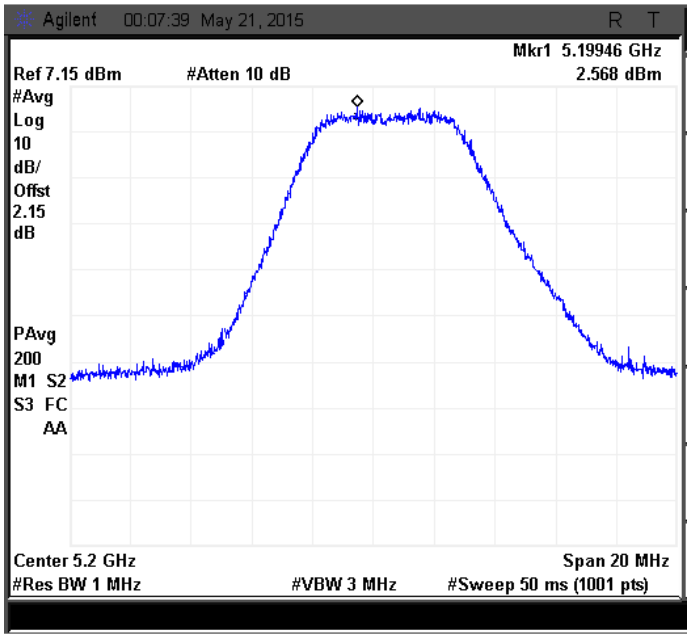

Figure 138: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.6.6 5MHz Modulation BW-High channel_5245MHz

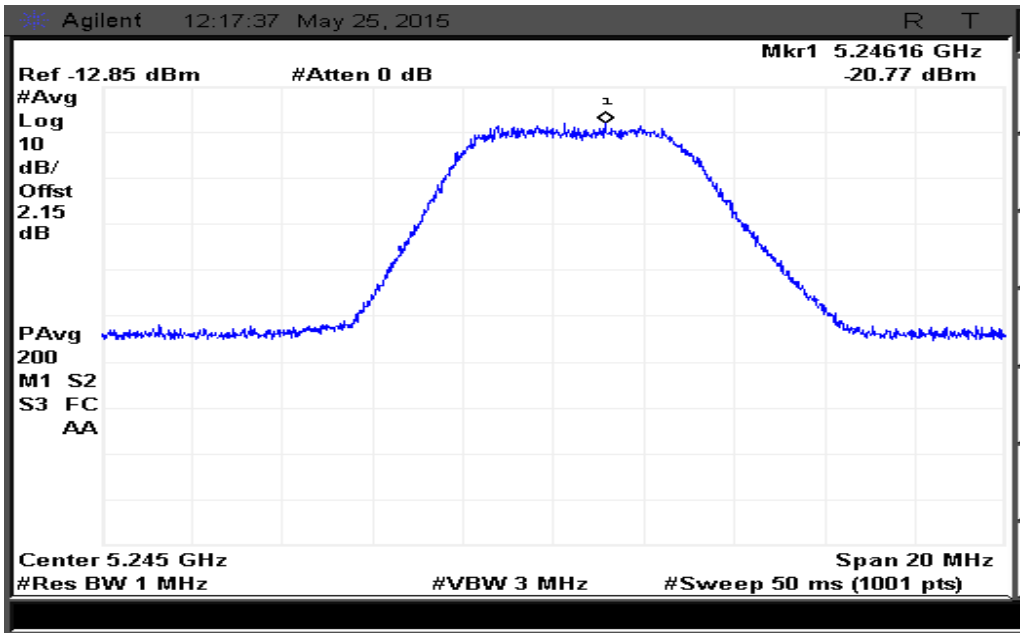

Figure 139: Power Spectral density measured at Ch. 0

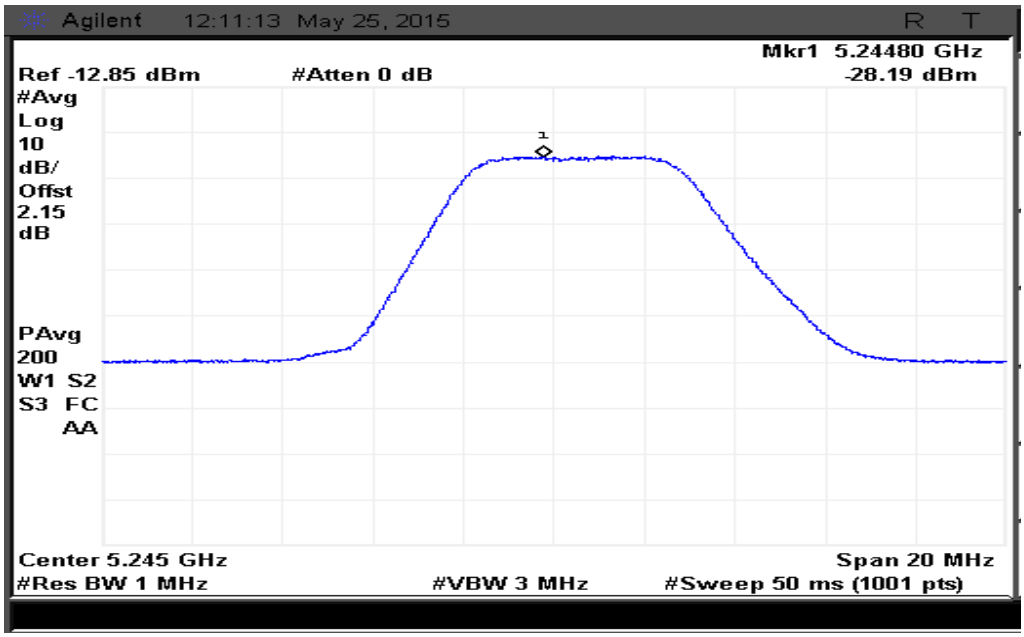

Figure 140: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.7 RESULT (SUPPORTING GRAPHS / DATA) FOR 24DBI ANTENNA CONDITION

5.3.5.7.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

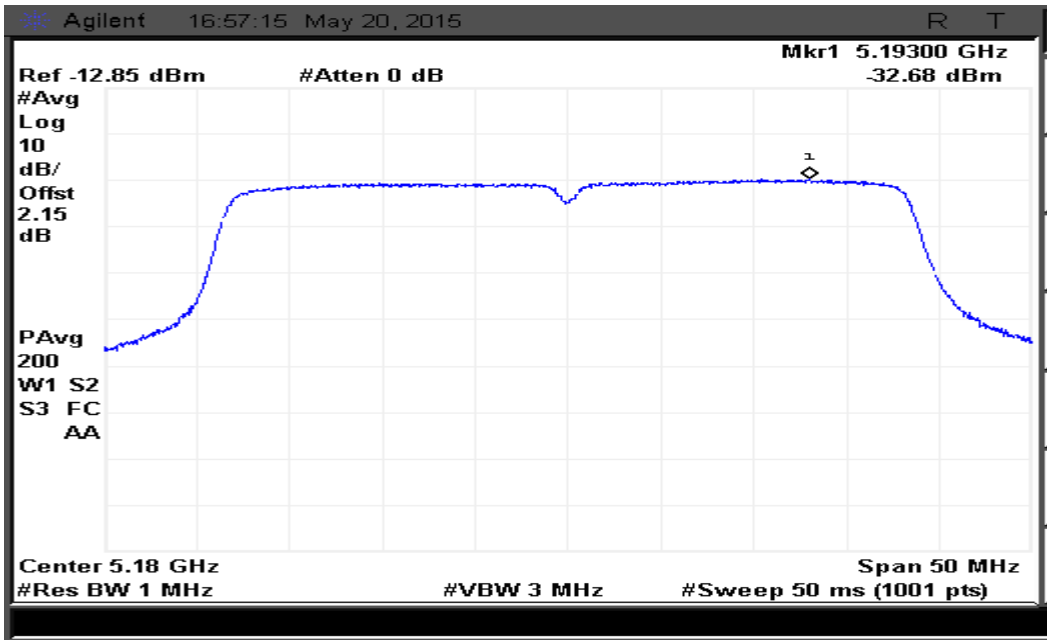

Figure 141: Power Spectral density measured at Ch. 0

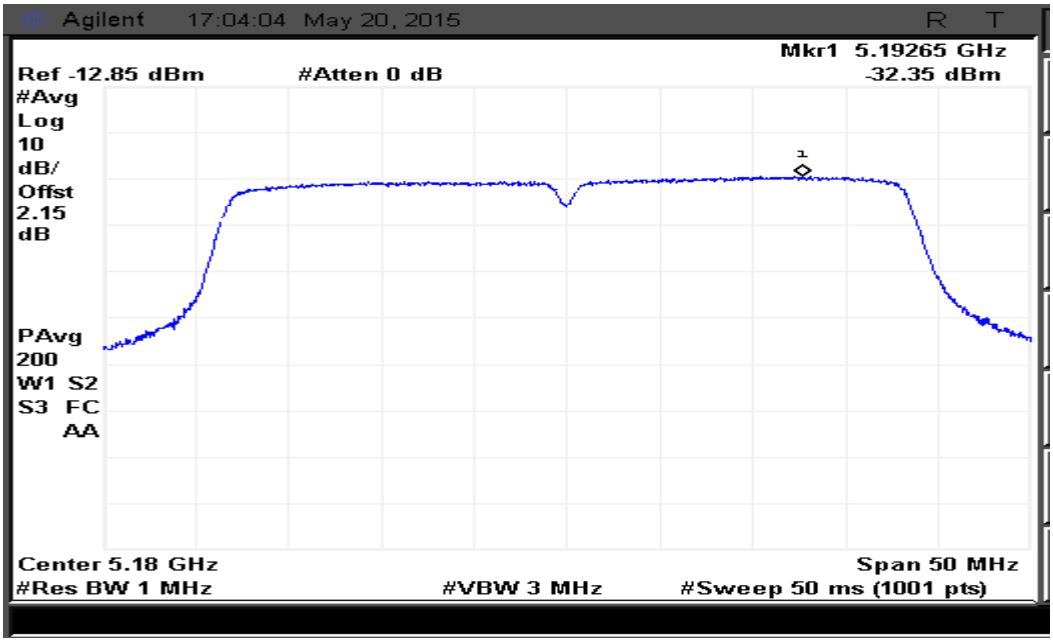

Figure 142: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.7.2 40MHz MODULATION BW-MID CHANNEL_5200 MHz

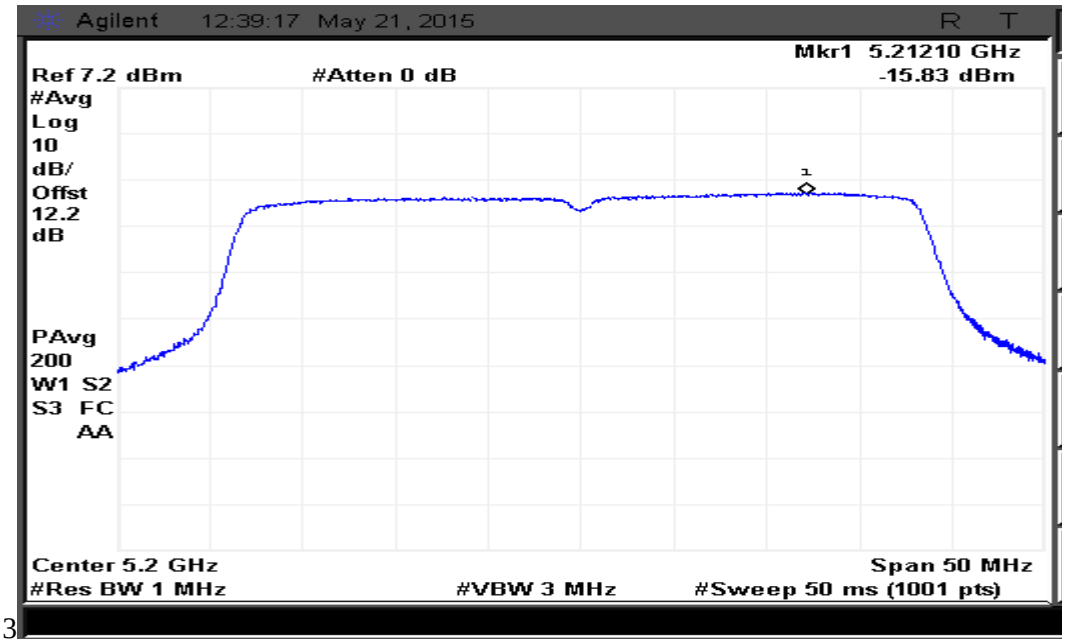

3

Figure 143: Power Spectral density measured at Ch. 0

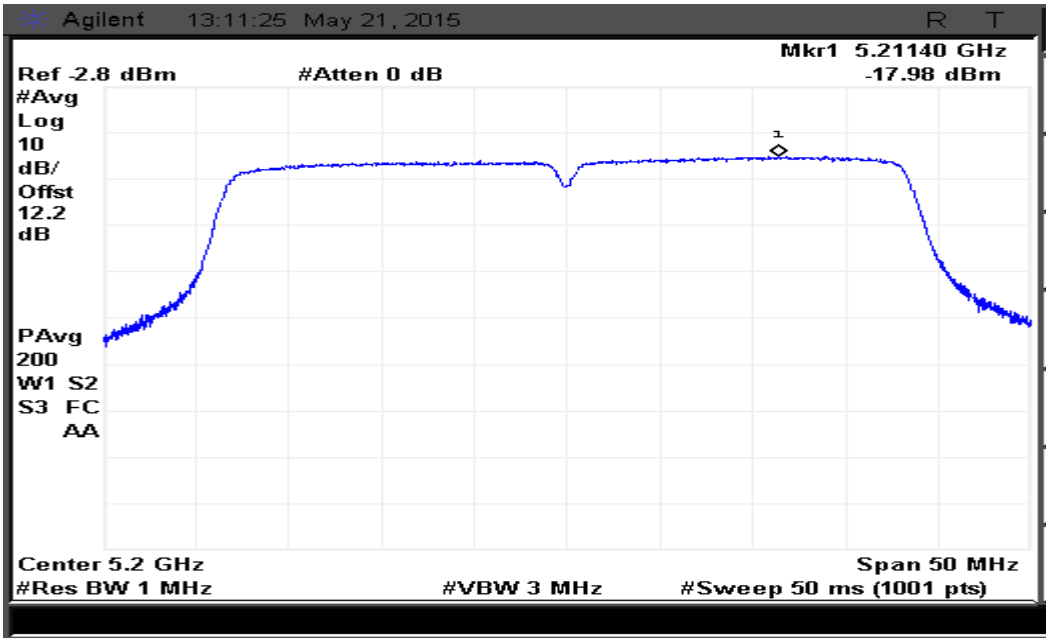

Figure 144: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.7.3 40MHz MODULATION BW-HIGH CHANNEL_5220MHz

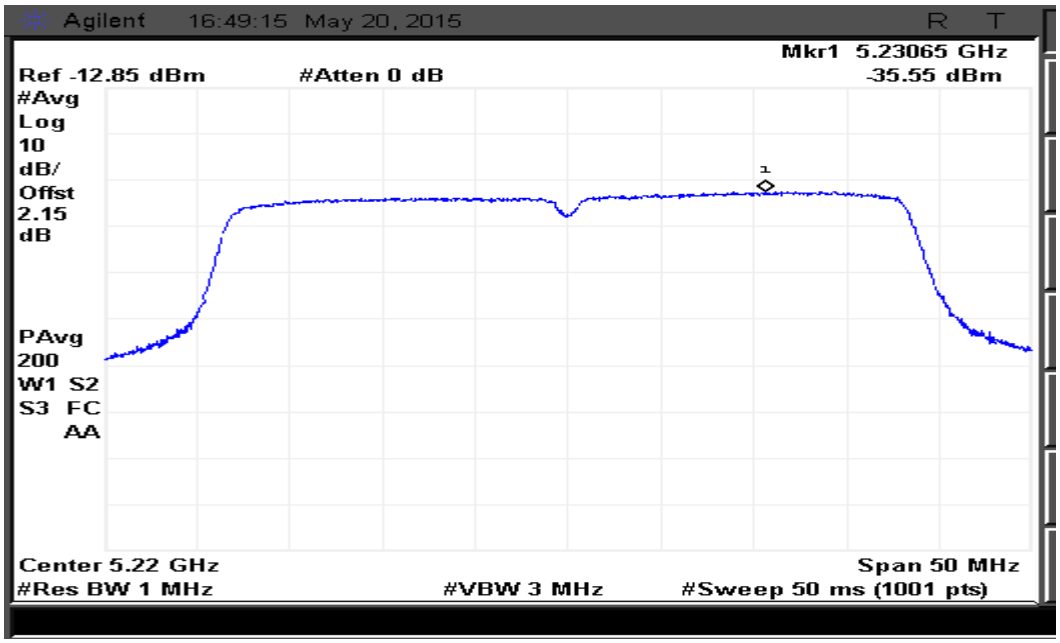

Figure 145: Power Spectral density measured at Ch. 0

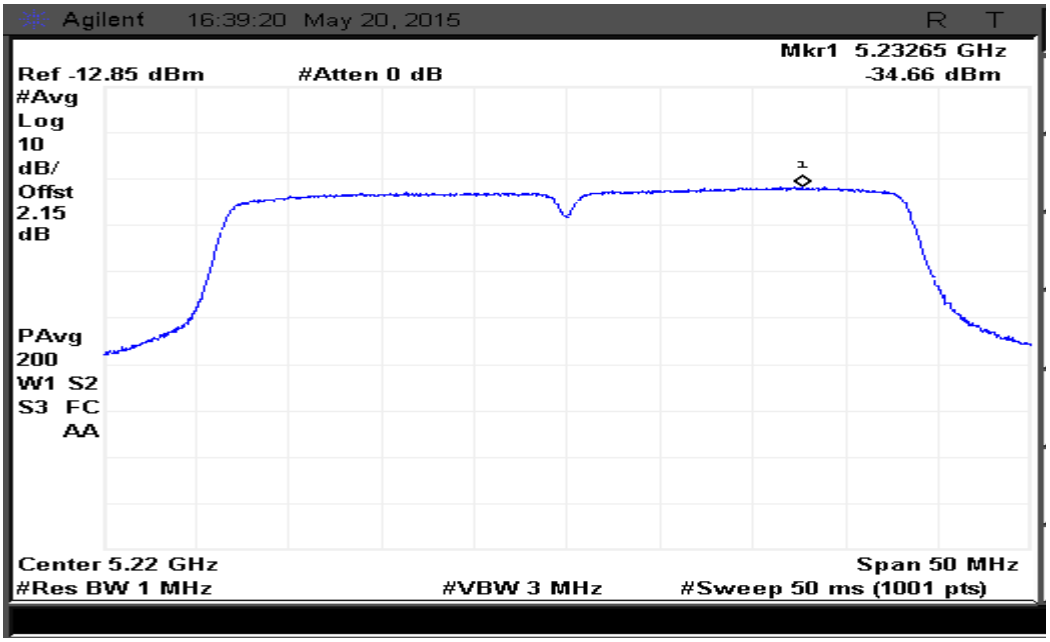

Figure 146: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.7.4 5MHz Modulation BW-Low channel_5155MHz

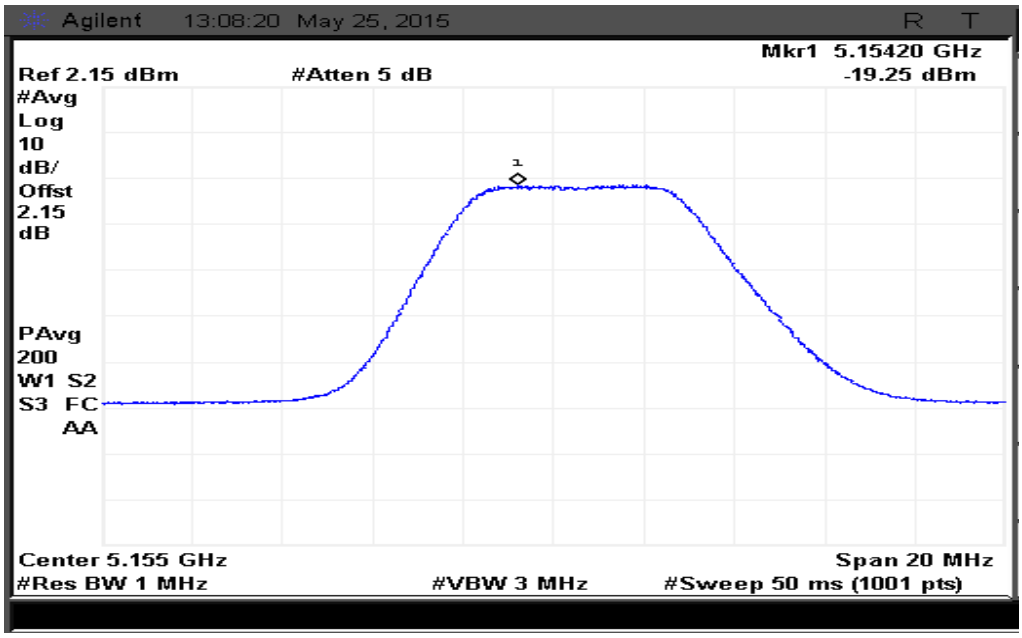

Figure 147: Power Spectral density measured at Ch. 0

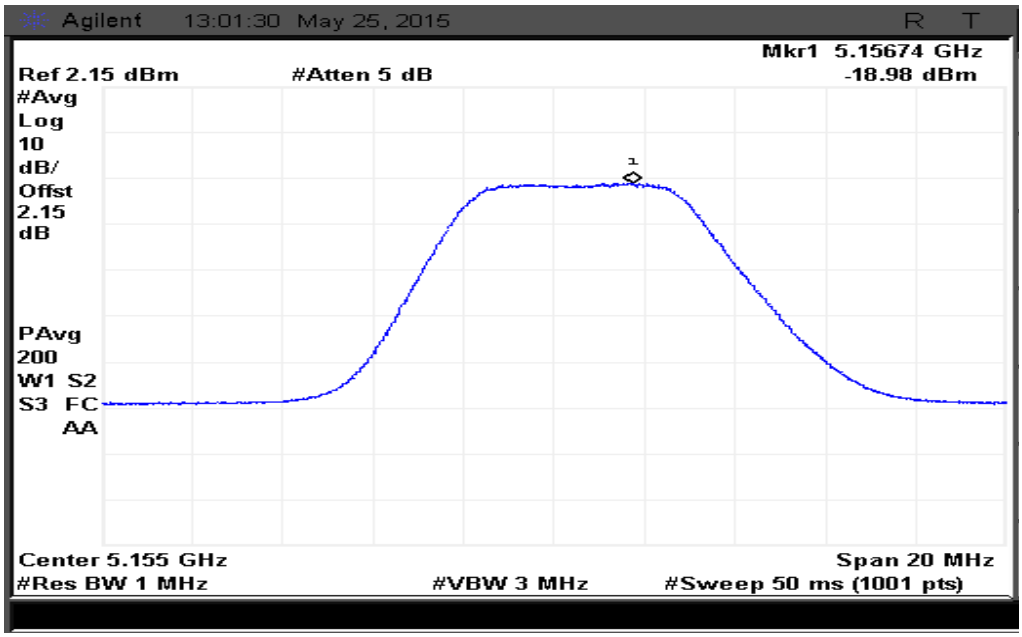

Figure 148: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.7.5 5MHz MODULATION BW-MID CHANNEL_5200 MHz

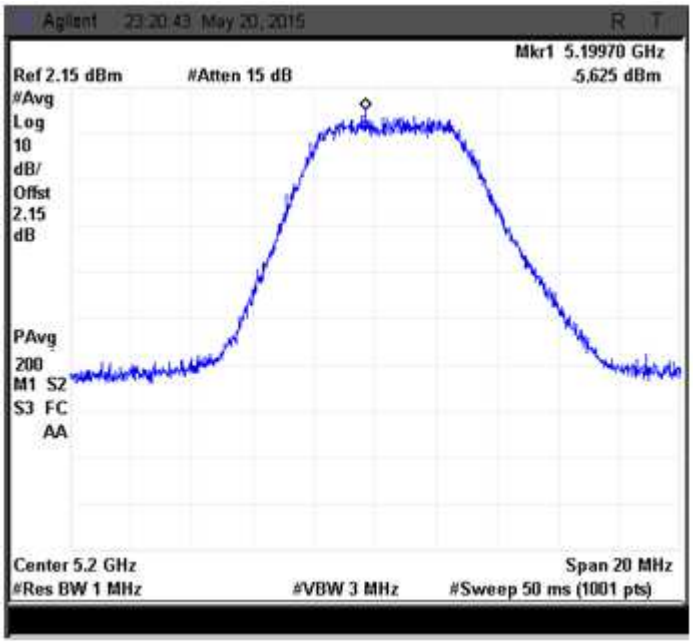

Figure 149: Power Spectral density measured at Ch. 0

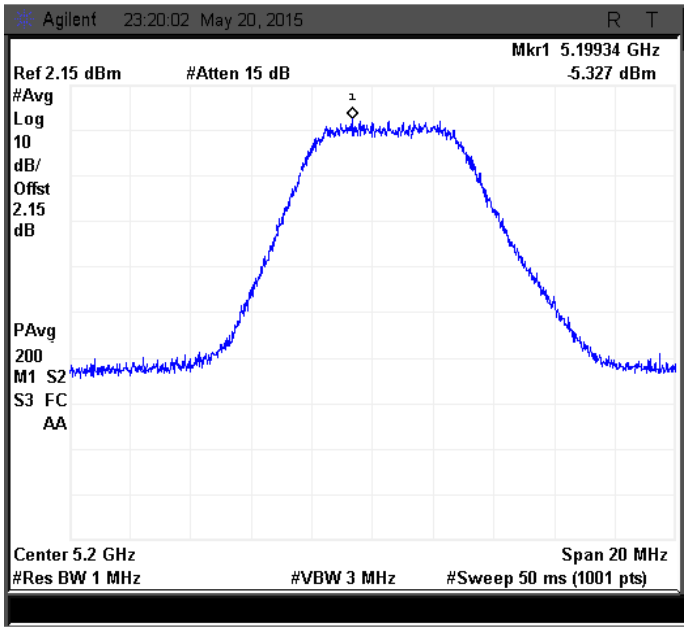

Figure 150: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.7.6 5MHz Modulation BW-High channel_5245MHz

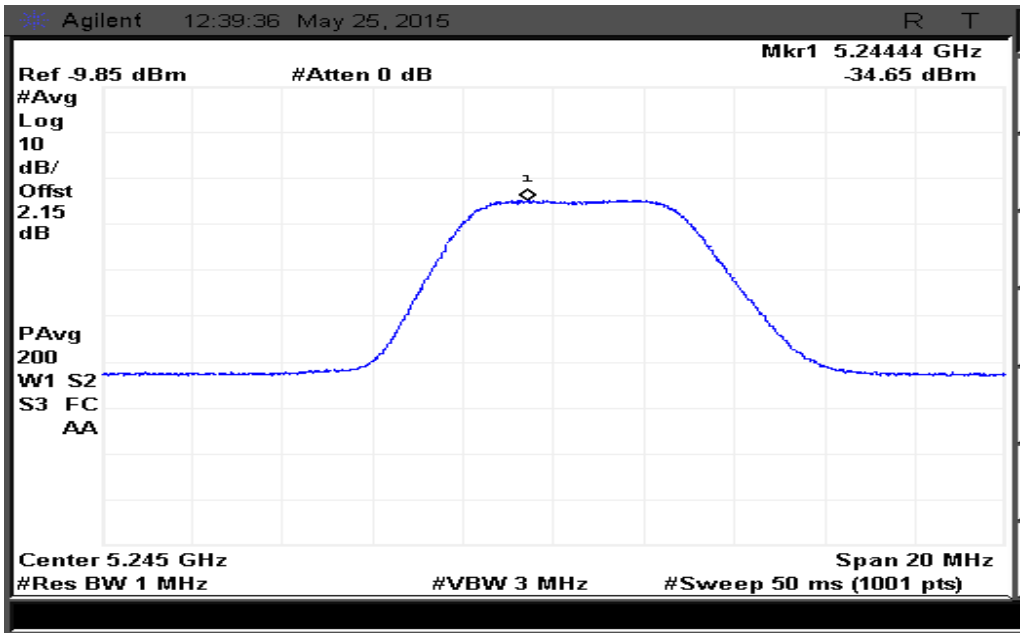

Figure 151: Power Spectral density measured at Ch. 0

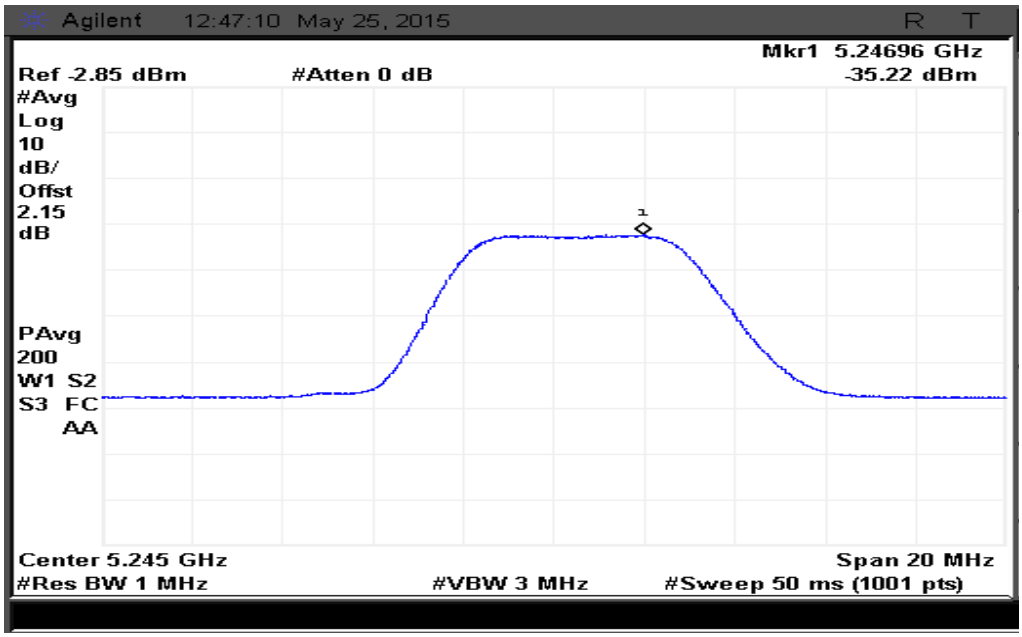

Figure 152: Power Spectral density measured at Ch. 1

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.5.8 RESULT

Peak Power Spectral Density for all channels in both 40MHz &5MHz Modulation Bandwidths is within the Specified limit. Refer below table for consolidated result.

Condition	Modulation Bandwidth (MHz)	Antenna path	Channel Frequency (MHz)	Recorded value (dBm/MHz)	Limit (dBm/MHz)	Result
Basic	40	Ch. 0	5180	-9.401	14	Pass
Basic	40	Ch. 0	5200	-0.525	14	Pass
Basic	40	Ch. 0	5220	-12.7	14	Pass
Basic	40	Ch. 1	5180	-8.607	14	Pass
Basic	40	Ch. 1	5200	1.087	14	Pass
Basic	5	Ch. 1	5220	-11	14	Pass
Basic	5	Ch. 0	5155	0.119	14	Pass
Basic	5	Ch. 0	5200	13.47	14	Pass
Basic	5	Ch. 0	5245	-16.39	14	Pass
Basic	5	Ch. 1	5155	-0.335	14	Pass
Basic	5	Ch. 1	5200	10.51	14	Pass
Basic	5	Ch. 1	5245	-8.261	14	Pass
17dBi	40	Ch. 0	5180	-25.02	3	Pass
17dBi	40	Ch. 0	5200	-9.317	3	Pass
17dBi	40	Ch. 0	5220	-20.9	3	Pass
17dBi	40	Ch. 1	5180	-23.23	3	Pass
17dBi	40	Ch. 1	5200	-8.377	3	Pass
17dBi	40	Ch. 1	5220	-26.44	3	Pass
17dBi	5	Ch. 0	5155	-11.01	3	Pass
17dBi	5	Ch. 0	5200	2.748	3	Pass
17dBi	5	Ch. 0	5245	-20.77	3	Pass
17dBi	5	Ch. 1	5155	-11.95	3	Pass
17dBi	5	Ch. 1	5200	2.568	3	Pass
17dBi	5	Ch. 1	5245	-28.19	3	Pass
24dBi	40	Ch. 0	5180	-32.68	-4	Pass
24dBi	40	Ch. 0	5200	-15.83	-4	Pass
24dBi	40	Ch. 0	5220	-35.55	-4	Pass
24dBi	40	Ch. 1	5180	-32.35	-4	Pass
24dBi	40	Ch. 1	5200	-17.98	-4	Pass
24dBi	40	Ch. 1	5220	-34.66	-4	Pass
24dBi	5	Ch. 0	5155	-19.25	-4	Pass
24dBi	5	Ch. 0	5200	-4.625	-4	Pass
24dBi	5	Ch. 0	5245	-34.65	-4	Pass
24dBi	5	Ch. 1	5155	-18.98	-4	Pass
24dBi	5	Ch. 1	5200	-5.327	-4	Pass
24dBi	5	Ch. 1	5245	-35.22	-4	Pass

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6 UNWANTED EMISSIONS LEVELS-CONDUCTED BAND EDGE

5.3.6.1 TEST SPECIFICATION

Test Standard	47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014
Test Procedure	ANSI C63.10-2013
Frequency Range	5150 MHz to 5250 MHz
Resolution Bandwidth	1MHz
Video Bandwidth	3MHz
Sweep Time	Auto
Attenuation	Auto
Test Mode	Conducted
Detector	Peak & Average
Input Voltage	120V AC
Input Frequency	60 Hz
Temperature	22.0°C
Humidity	56.0%
Tested By	Subhendu
Test Date	12th May to 25th May 2015

5.3.6.2 LIMITS

Standard	FCC Section	Antenna condition	Calculated Limit
47 CFR Ch. I (10–1–14 Ed), Part 15, Subpart C RSS-Gen, Issue 4, Nov 2014	15.407 (b) (3)	2.15dBi Antenna	-32.15dBm/MHz
		17dBi Antenna	-47dBm/MHz
		24dBi dish	-54dBm/MHz

Limit as per standard is -27dBm/MHz. In this condition we have to consider MIMO condition & take 3dB Factor and also the antenna gain needs to be considered.
Calculated limit = -27dBm/MHz – 3 – Antenna gain

5.3.6.3 TEST SETUP

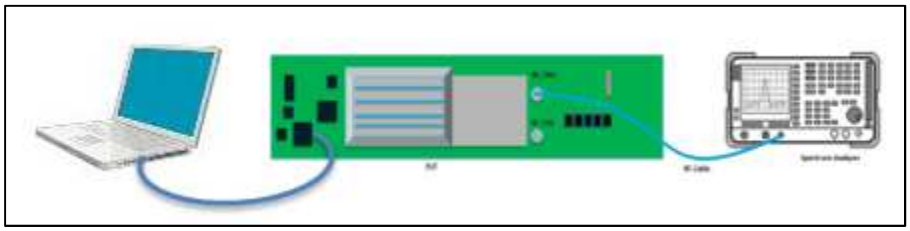

Figure 153: Typical test setup for Conducted Test setup

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.4 TEST PROCEDURE

The Conducted test was performed using the Spectrum analyzer. Measurements were done as per SectionsH(1), H(2), H(3), H(5) & H(6) of **"789033 D02 General UNII Test Procedures New Rules v01".** The RF output of the EUT was connected to the input port of Spectrum analyzer using an attenuator. Captured the data from spectrum analyzer and compared with the limits specified in the standard.

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.5 RESULT (SUPPORTING GRAPHS / DATA) FOR BASIC CONDITION

5.3.6.5.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

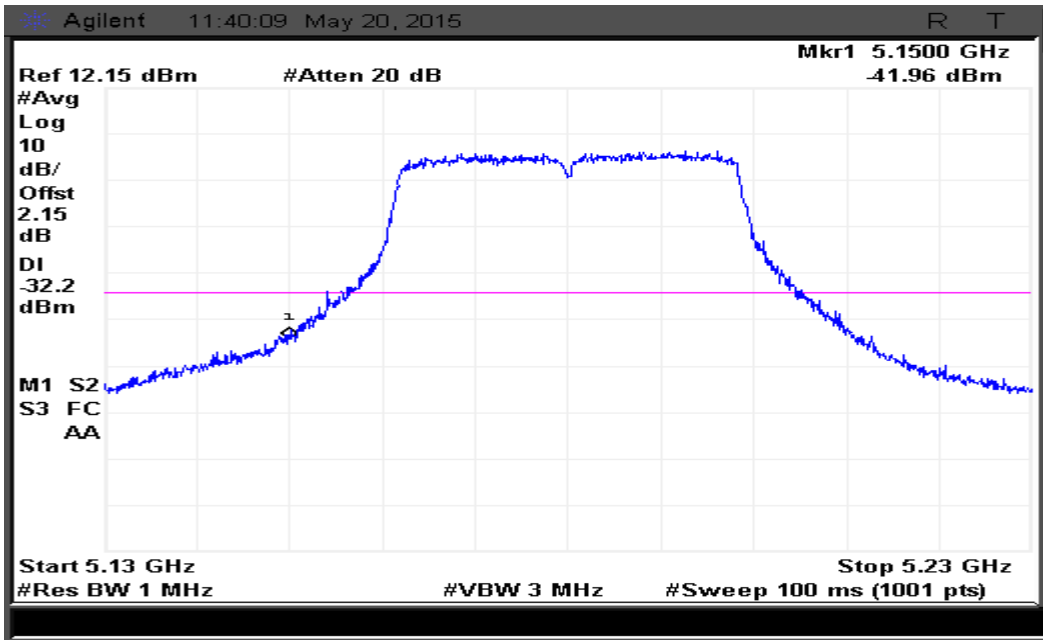

Figure 154: Band edge measured at Ch. 0-Avg

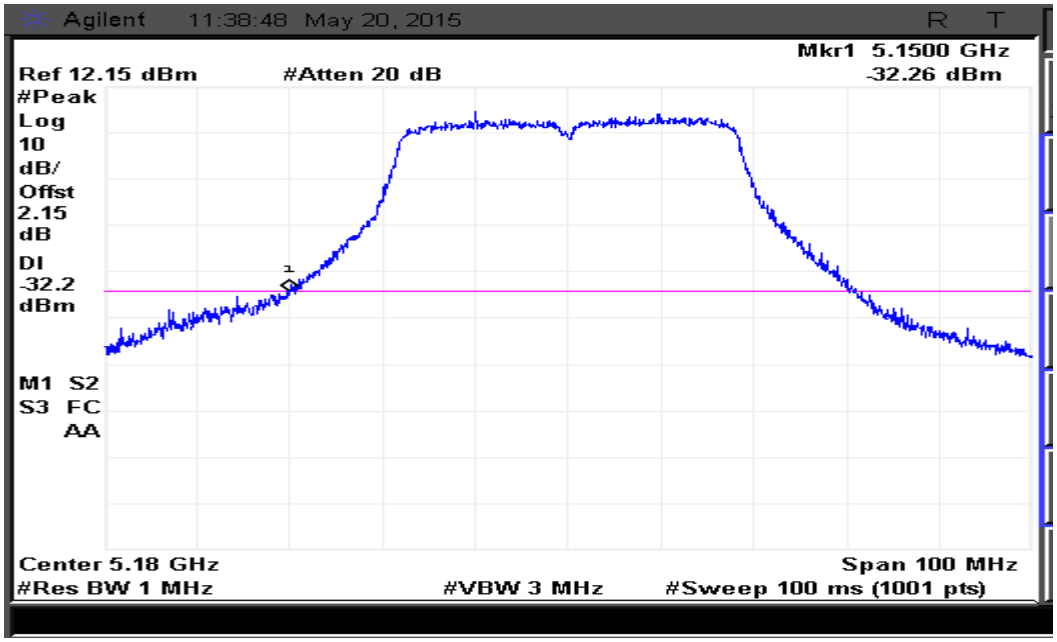

Figure 155: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

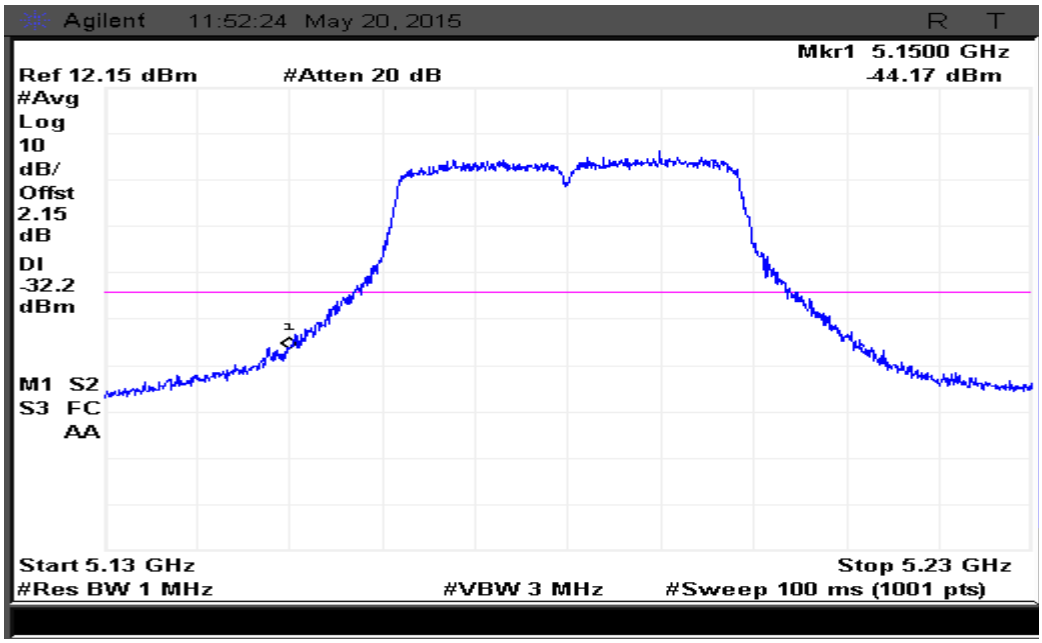

Figure 156: Band edge measured at Ch. 1-Avg

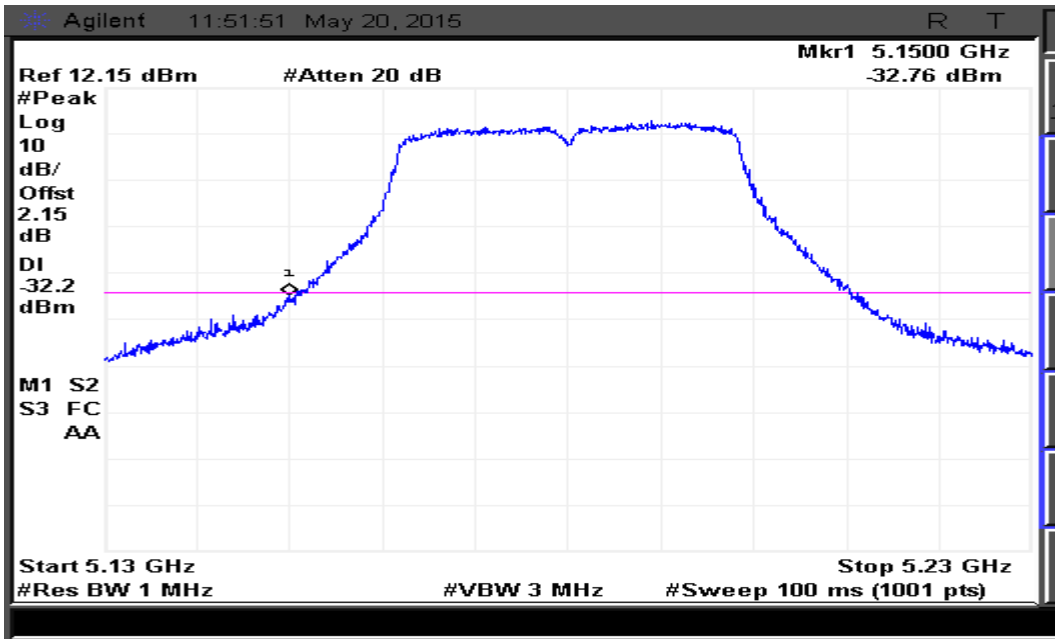

Figure 157: Band edge measured at Ch. 1-Peak

5.3.6.5.2 40MHz Modulation BW-High channel_5220MHz

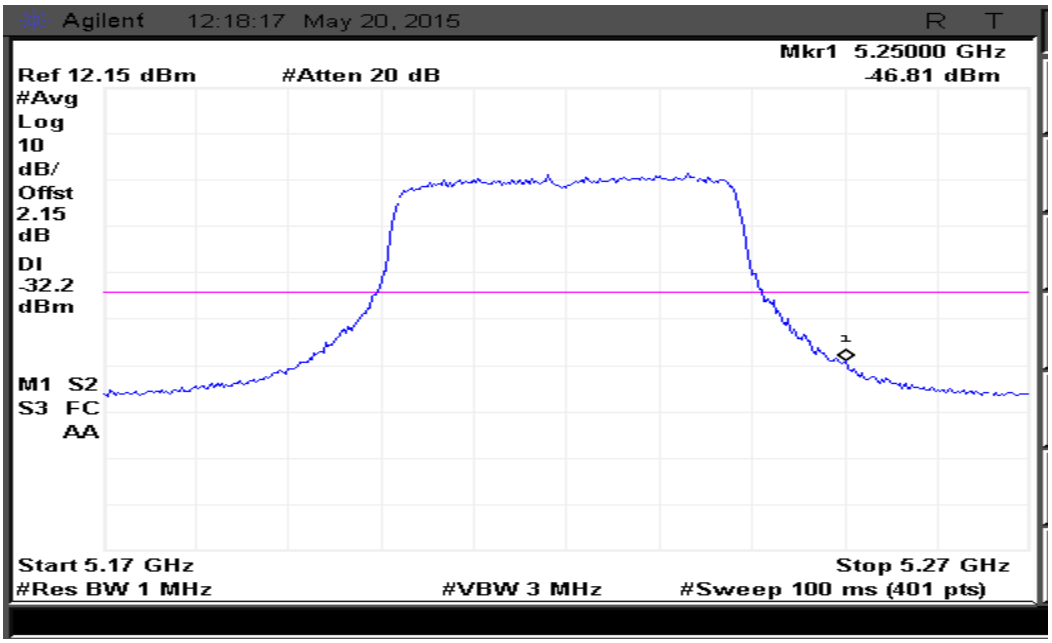

Figure 158: Band edge measured at Ch. 0-Avg

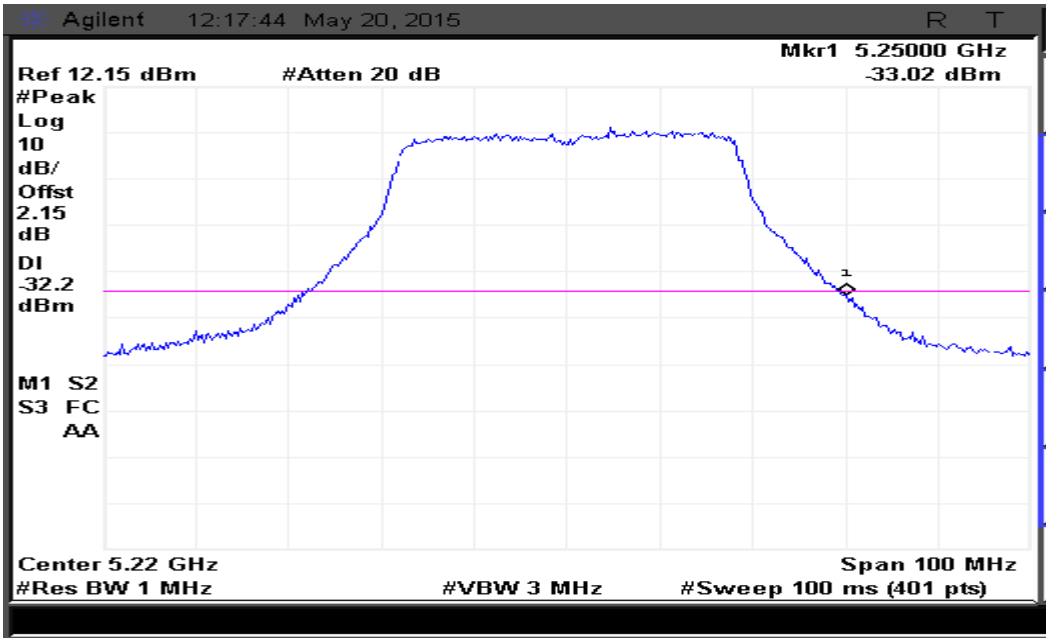

Figure 159: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

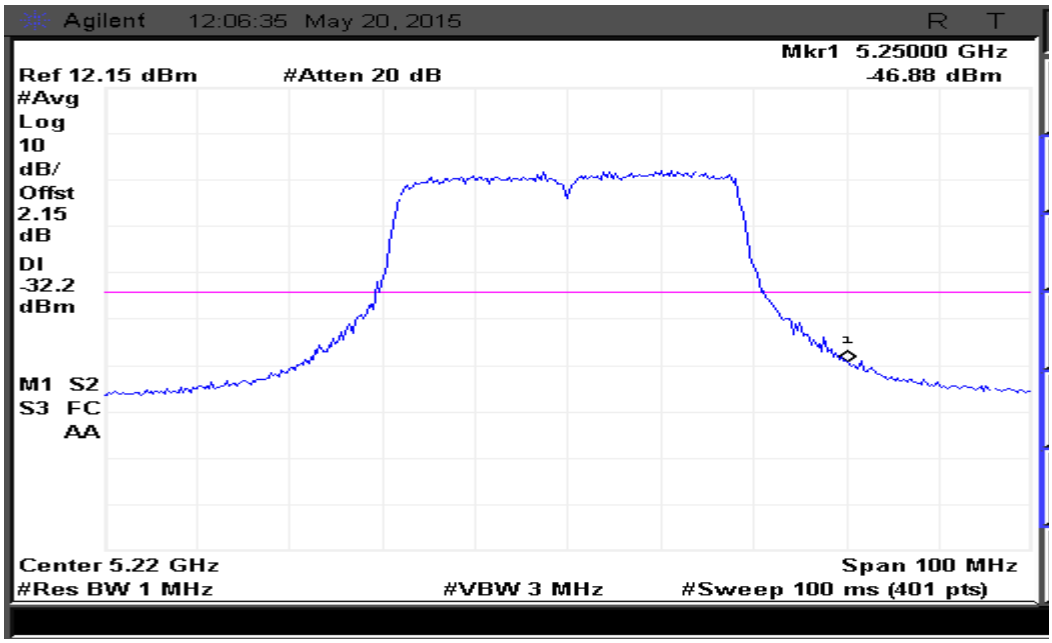

Figure 160: Band edge measured at Ch. 1-Avg

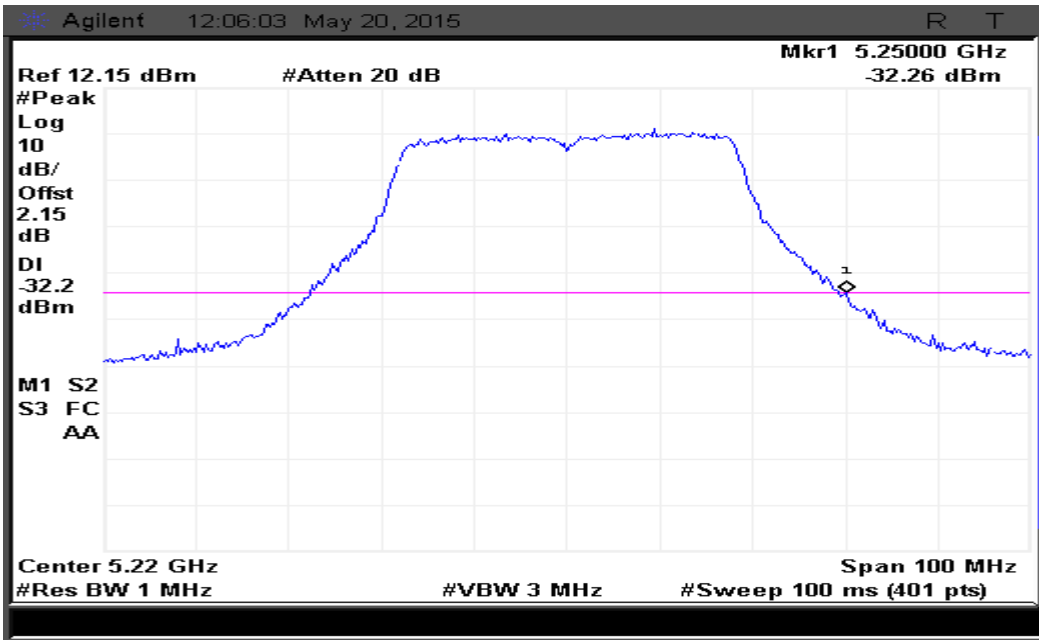

Figure 161: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.5.3 5MHz Modulation BW-Low channel_5155MHz

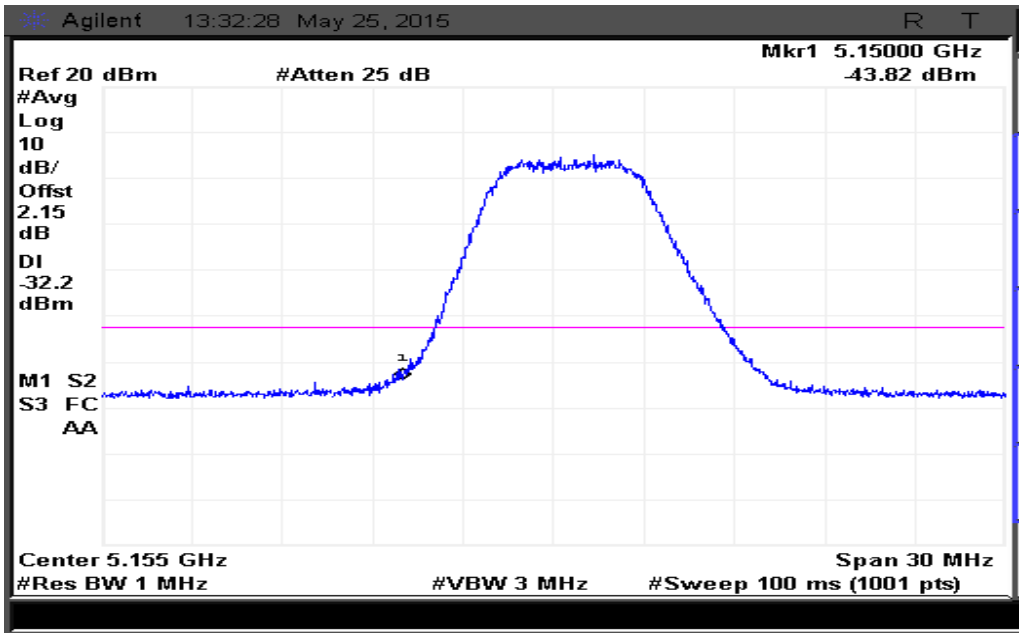

Figure 162: Band edge measured at Ch. 0-Avg

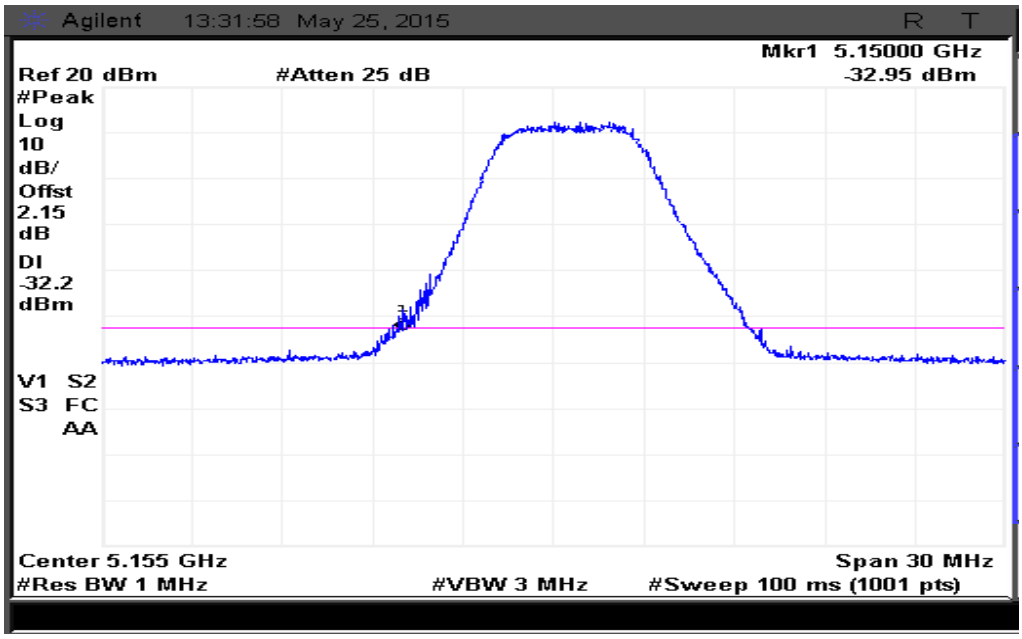

Figure 163: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

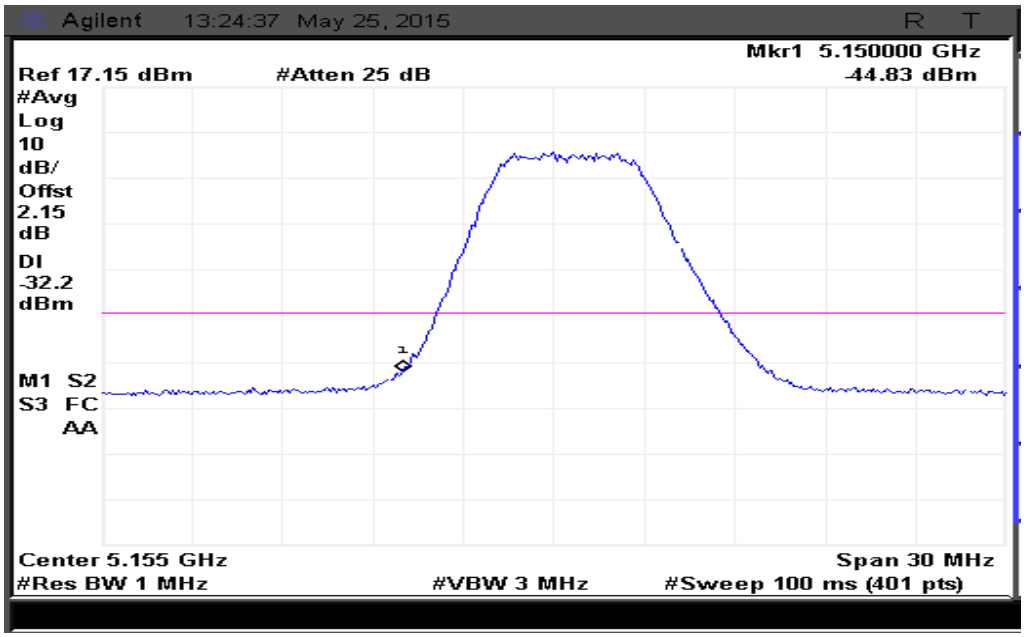

Figure 164: Band edge measured at Ch. 1-Avg

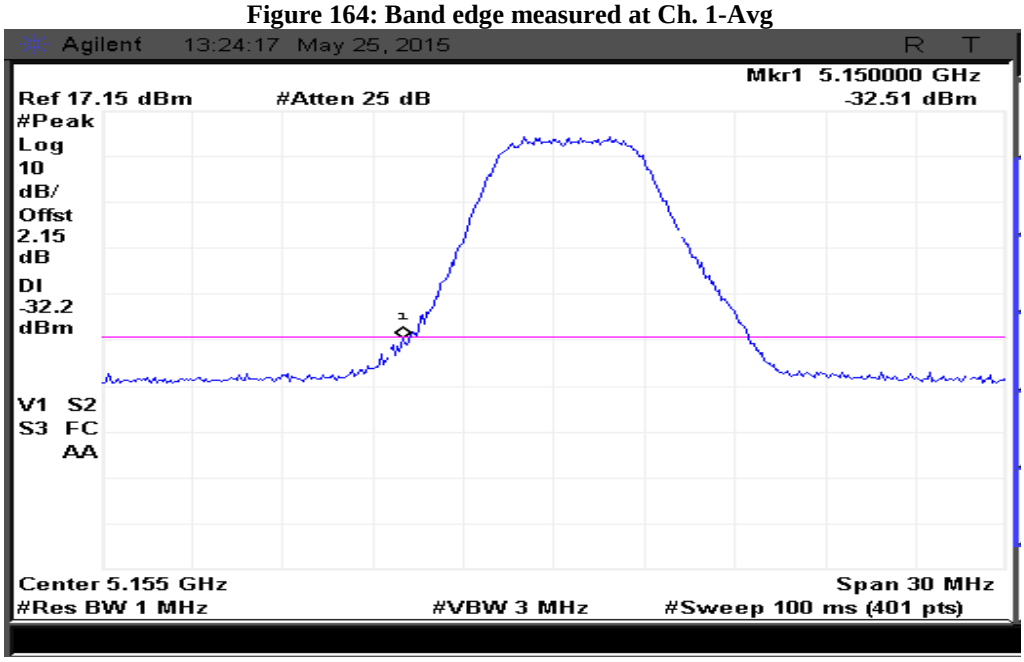

Figure 165: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.5.4 5MHz Modulation BW-High channel_5245MHz

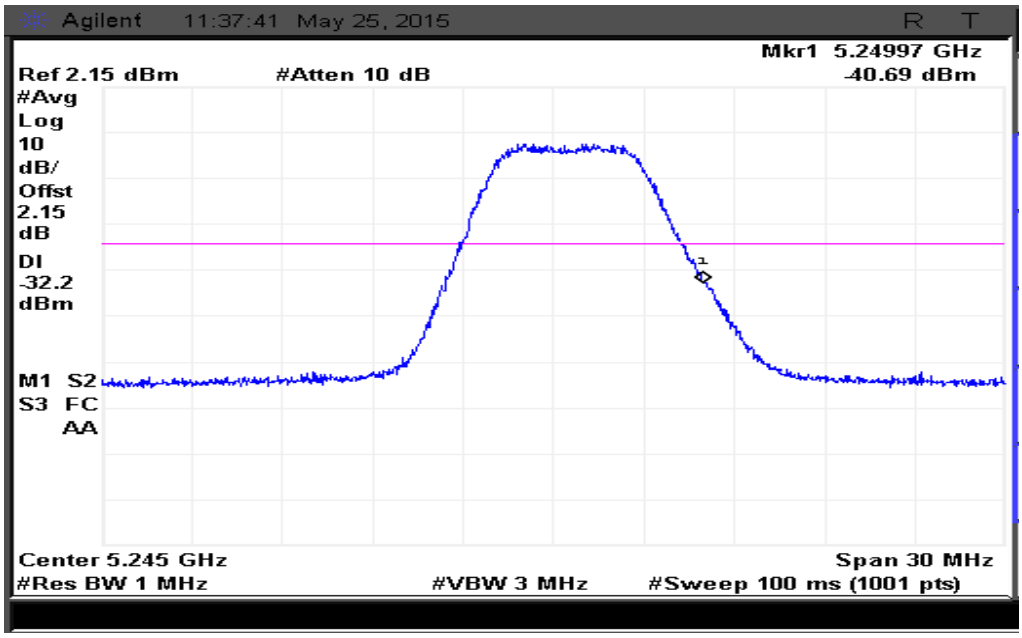

Figure 166: Band edge measured at Ch. 0-Avg

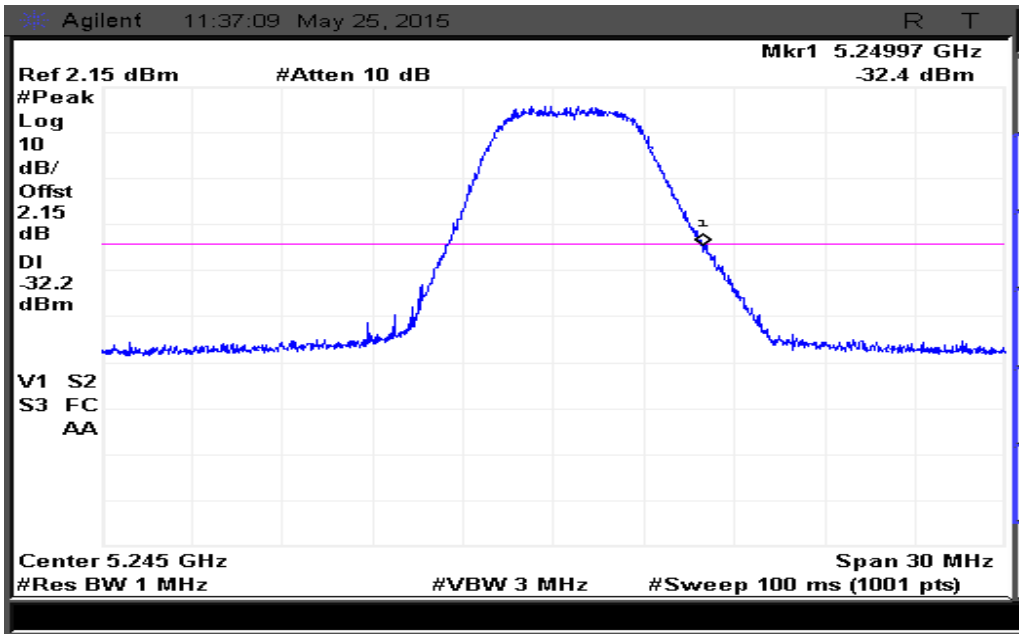

Figure 167: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

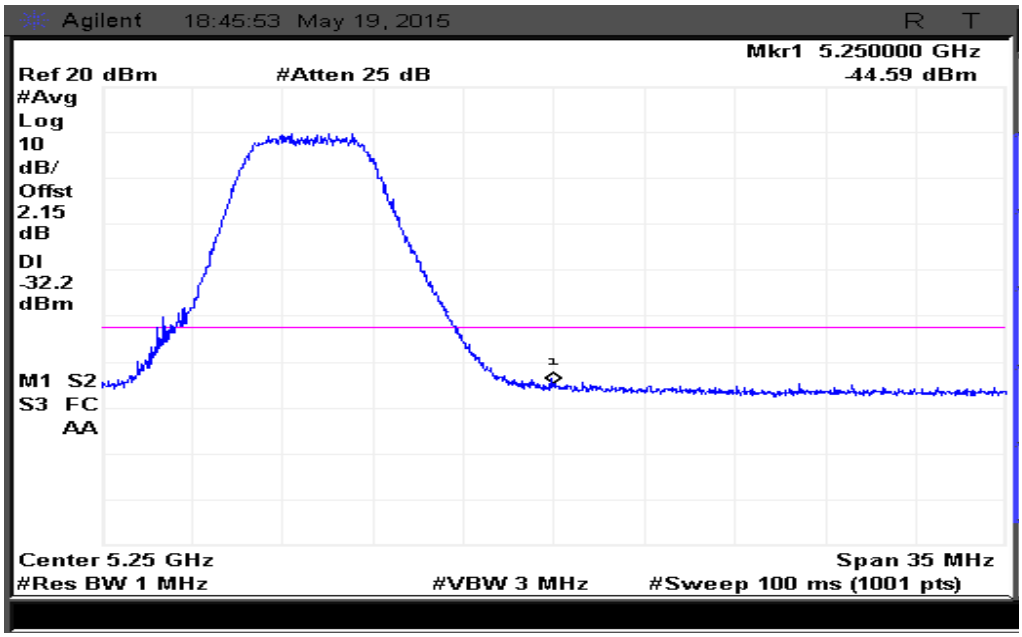

Figure 168: Band edge measured at Ch. 1-Avg

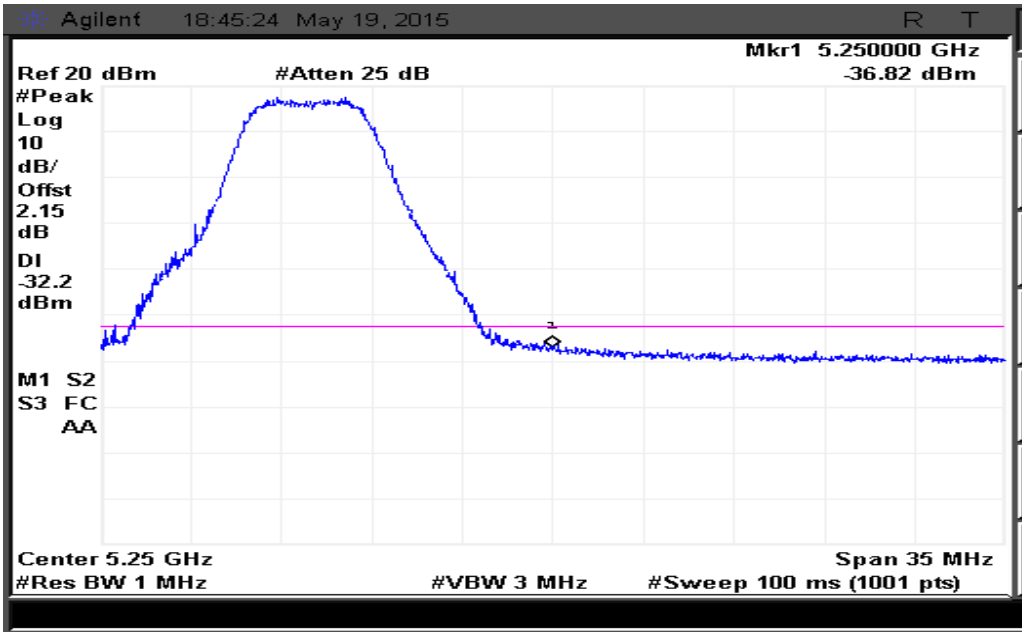

Figure 169: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.6 RESULT (SUPPORTING GRAPHS / DATA) FOR 17DBI ANTENNA CONDITION

5.3.6.6.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

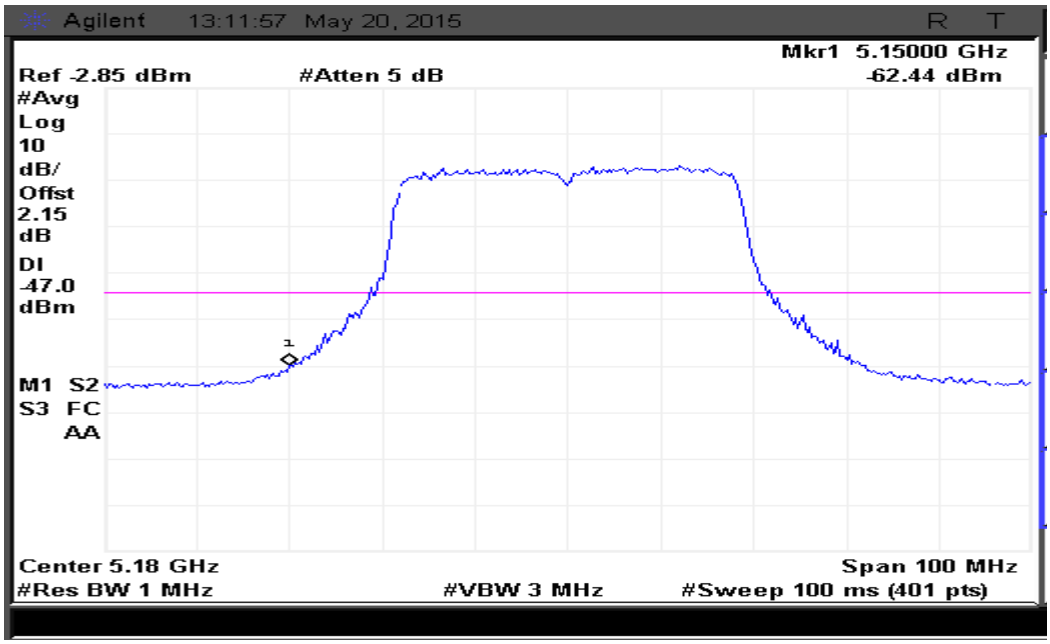

Figure 170: Band edge measured at Ch. 0-Avg

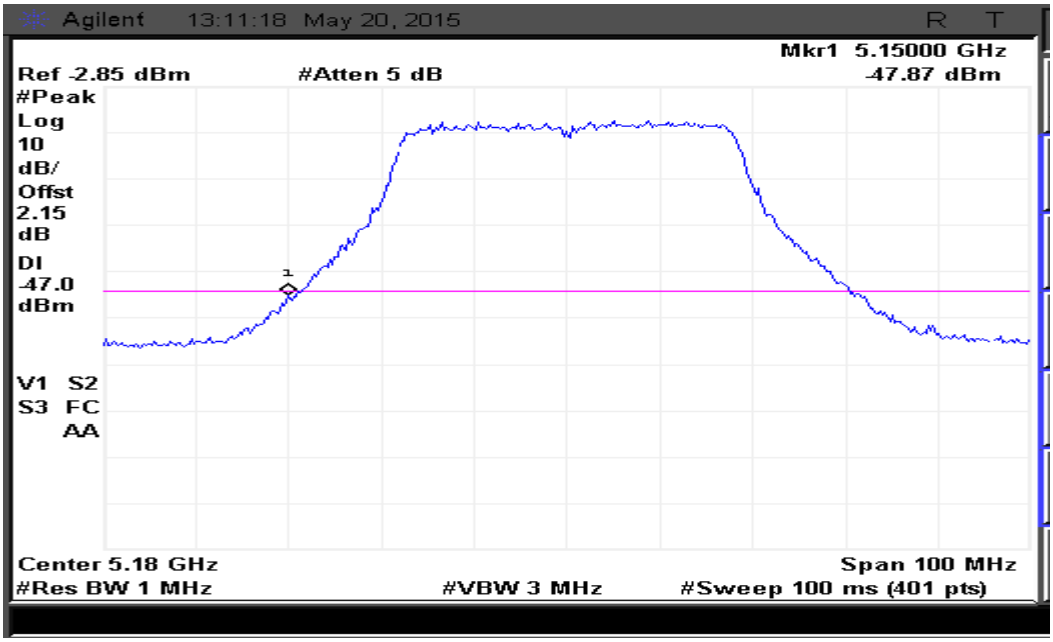

Figure 171: Band edge measured at Ch. 0-Peak.

This report should always be reproduced in full. Any extracts of this report is invalid.

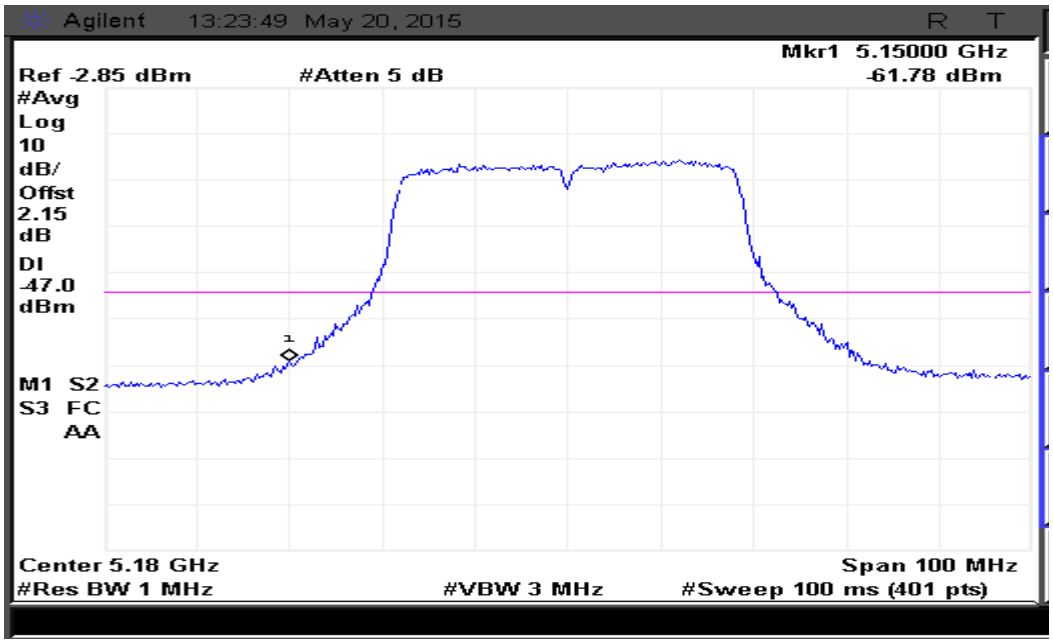

Figure 172: Band edge measured at Ch. 1-Avg

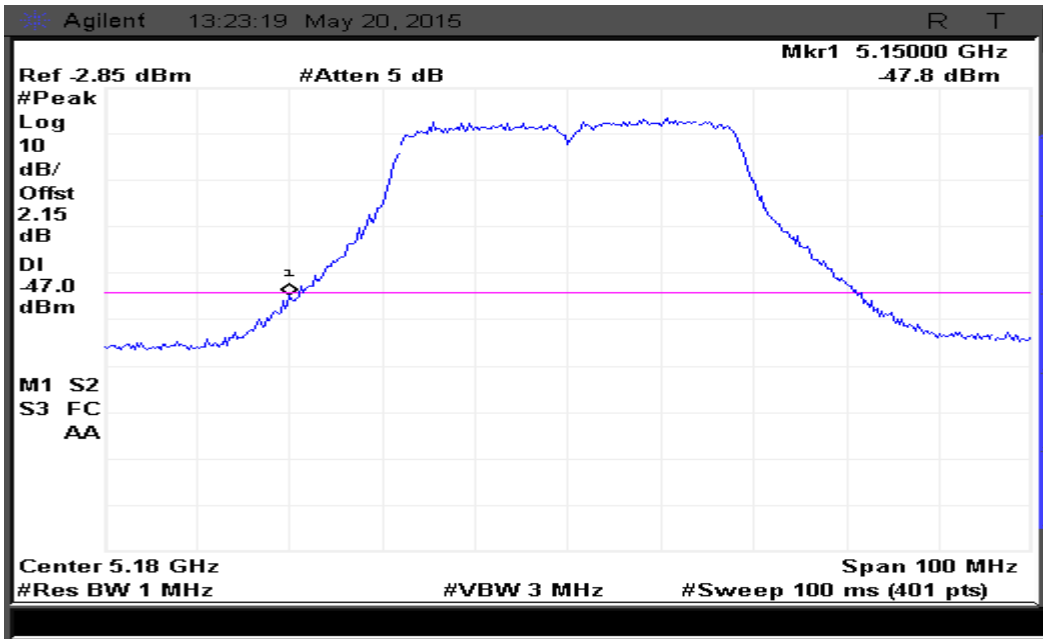

Figure 173: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.6.2 40MHz Modulation BW-High channel_5220MHz

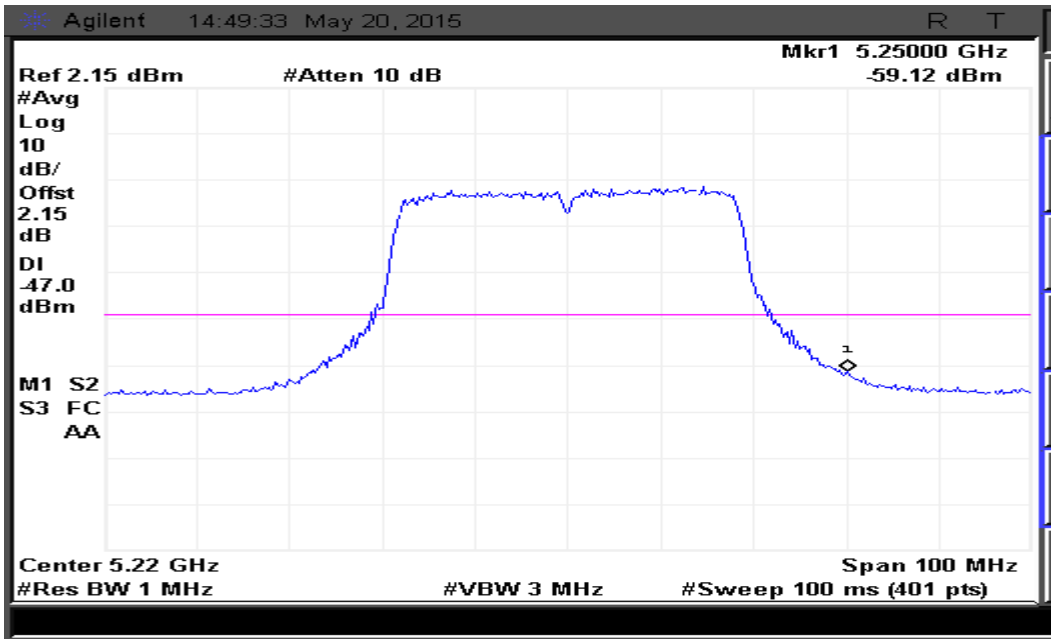

Figure 174: Band edge measured at Ch. 0-Avg

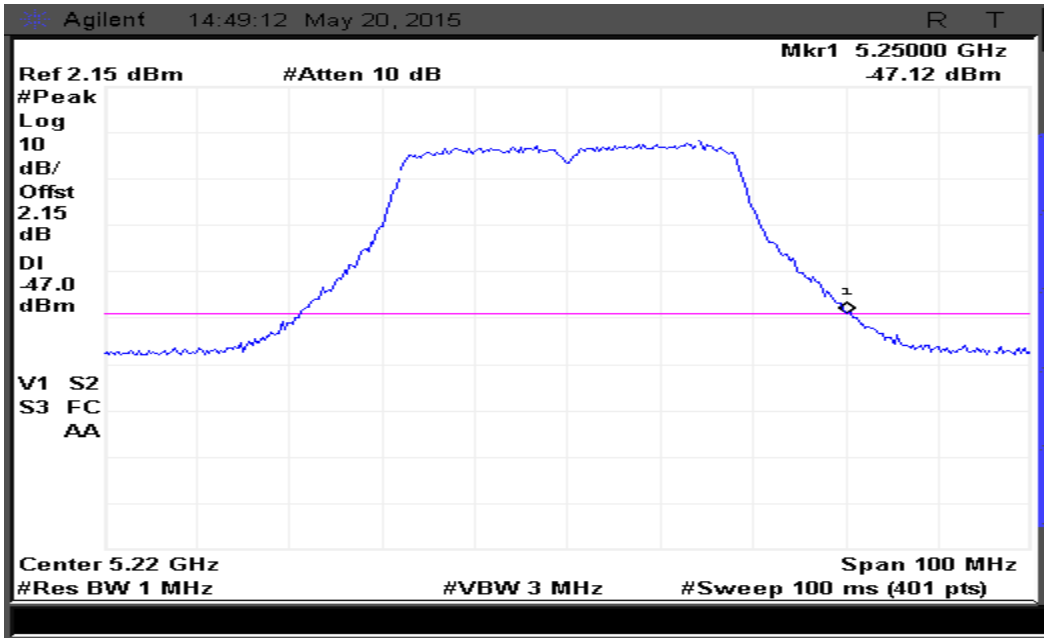

Figure 175: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

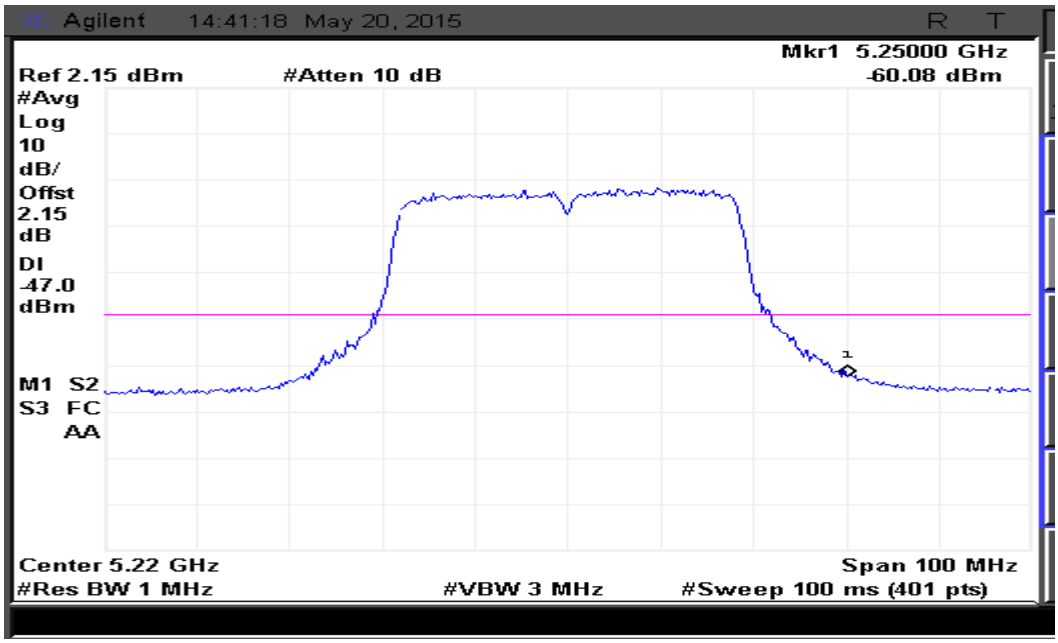

Figure 176: Band edge measured at Ch. 1-Avg

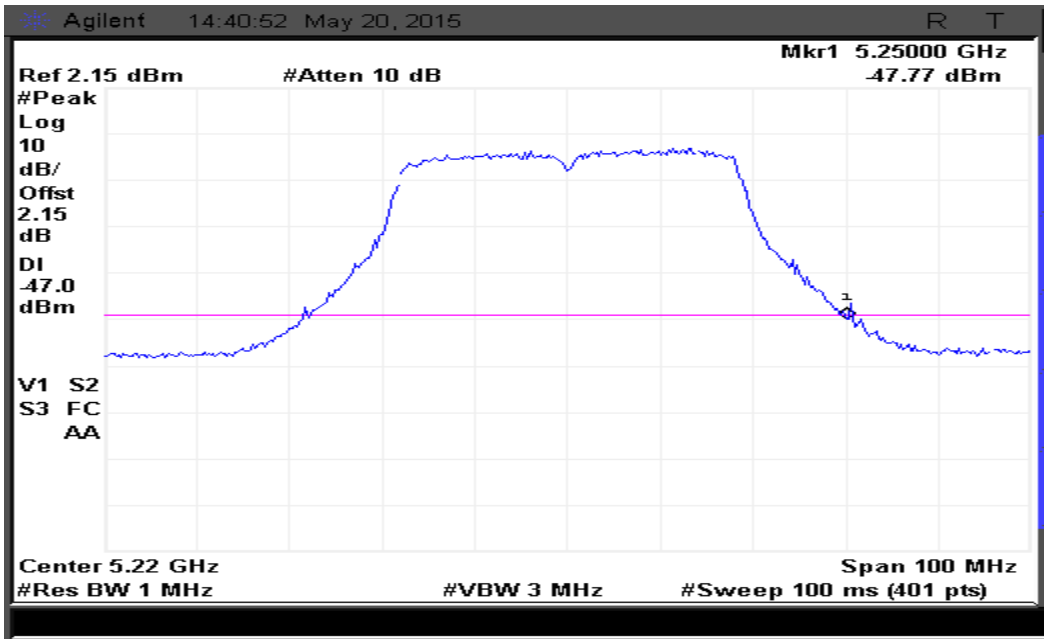

Figure 177: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.6.3 5MHz Modulation BW-Low channel_5155MHz

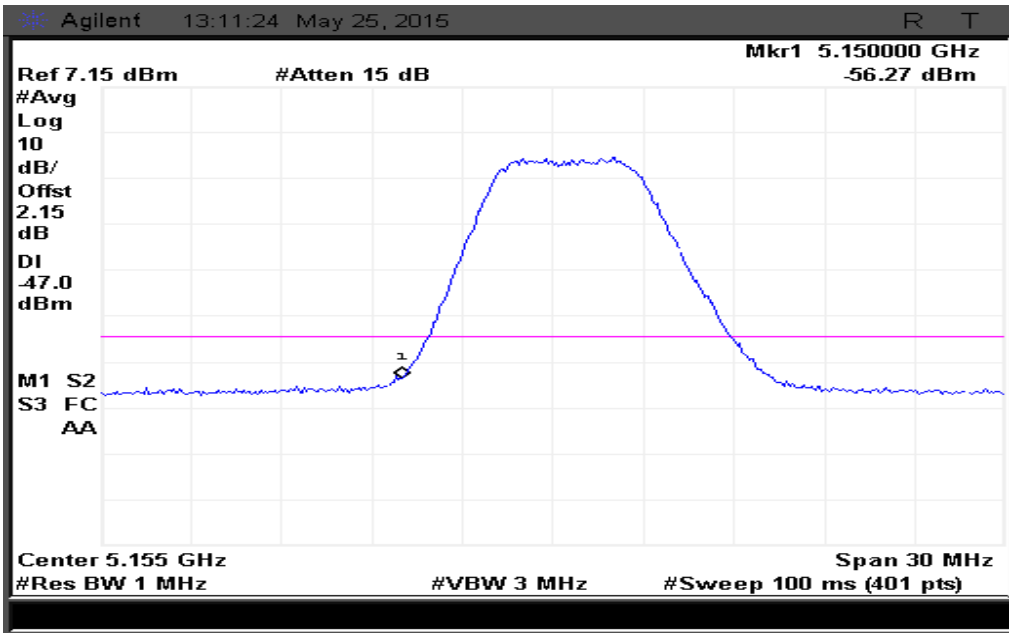

Figure 178: Band edge measured at Ch. 0-Avg

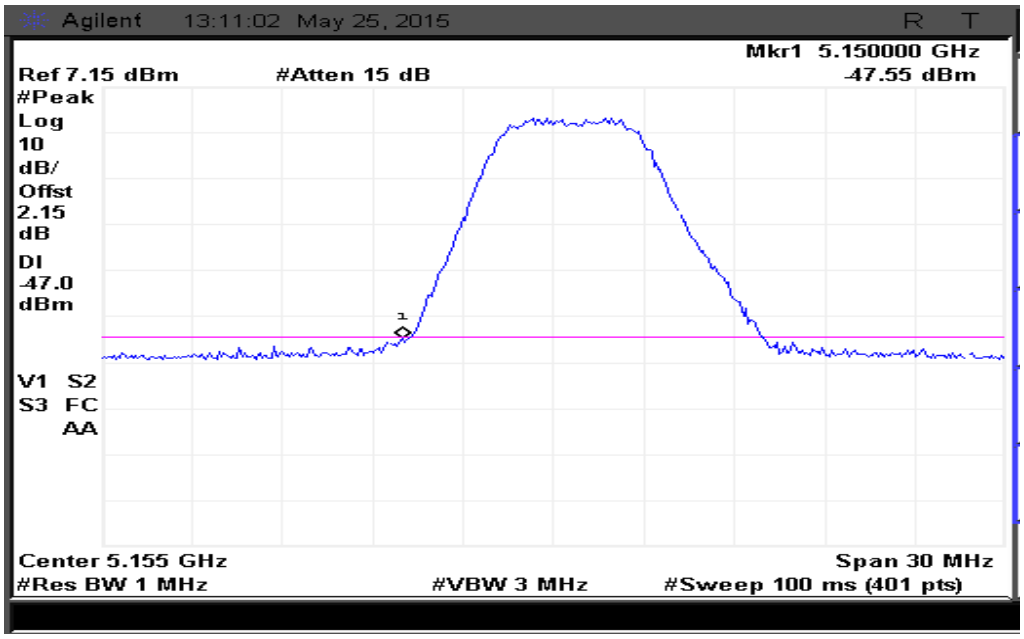

Figure 179: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

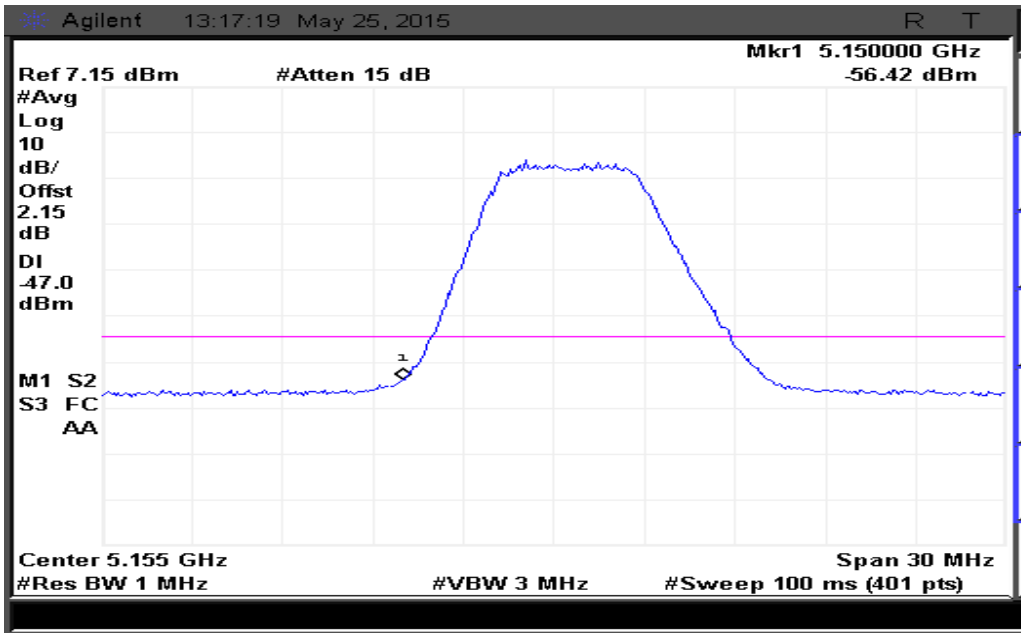

Figure 180: Band edge measured at Ch. 1-Avg

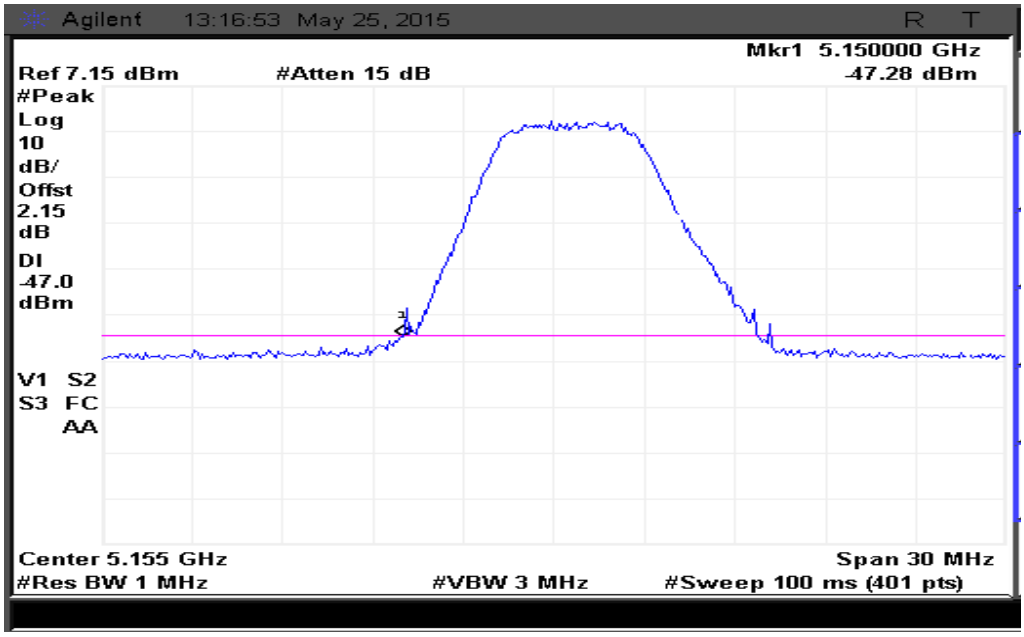

Figure 181: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.6.4 5MHz Modulation BW-High channel_5245MHz

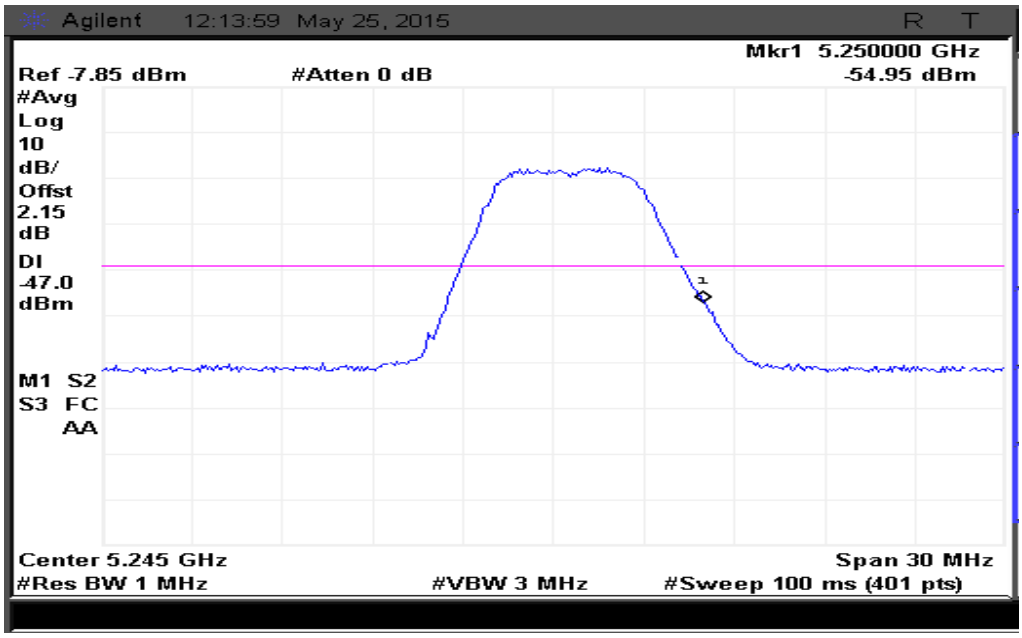

Figure 182: Band edge measured at Ch. 0-Avg

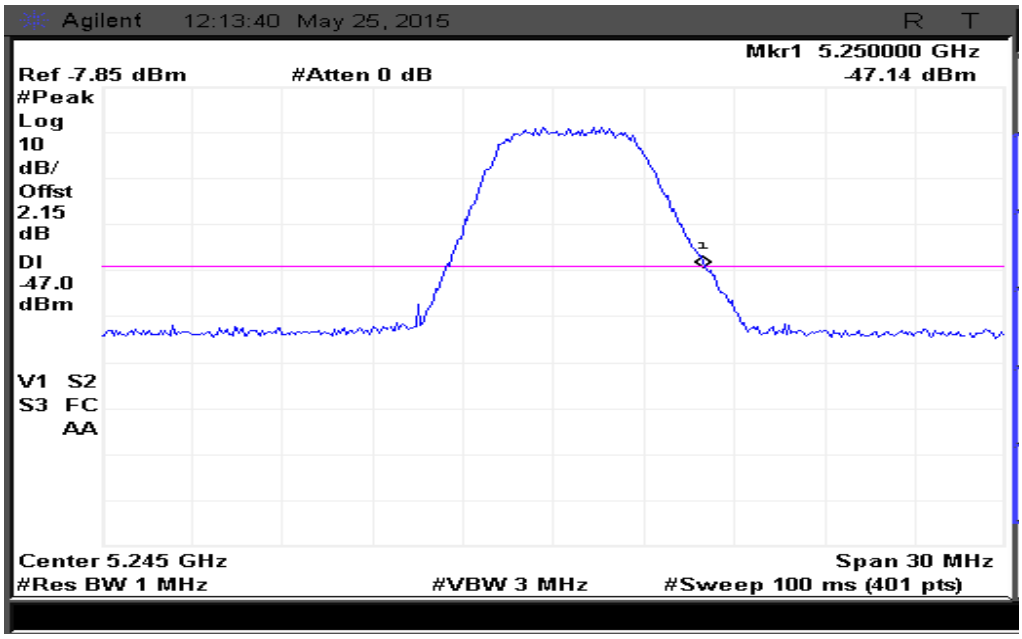

Figure 183: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

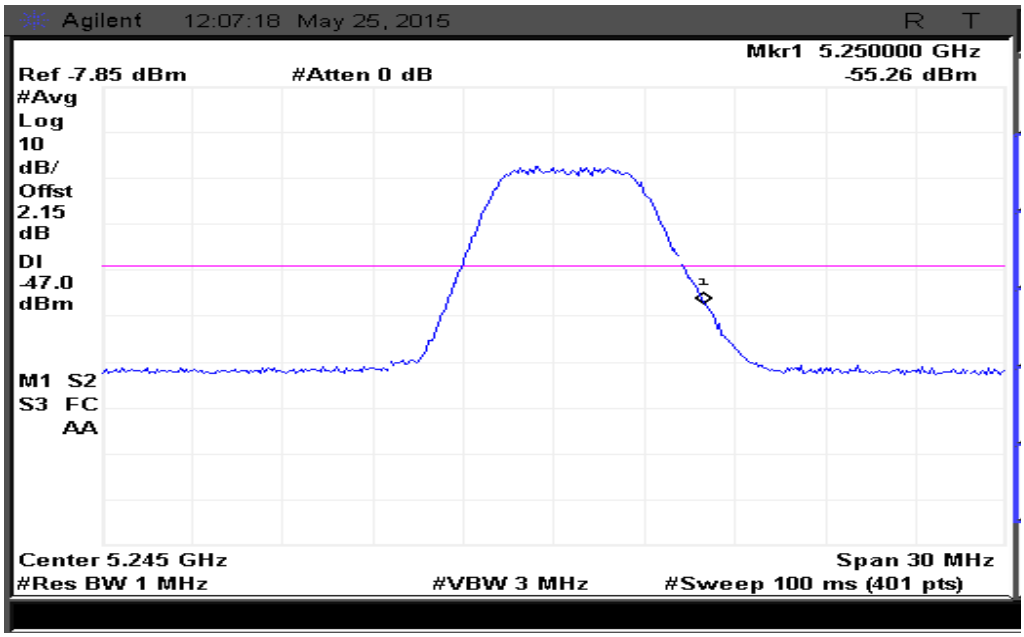

Figure 184: Band edge measured at Ch. 1-Avg

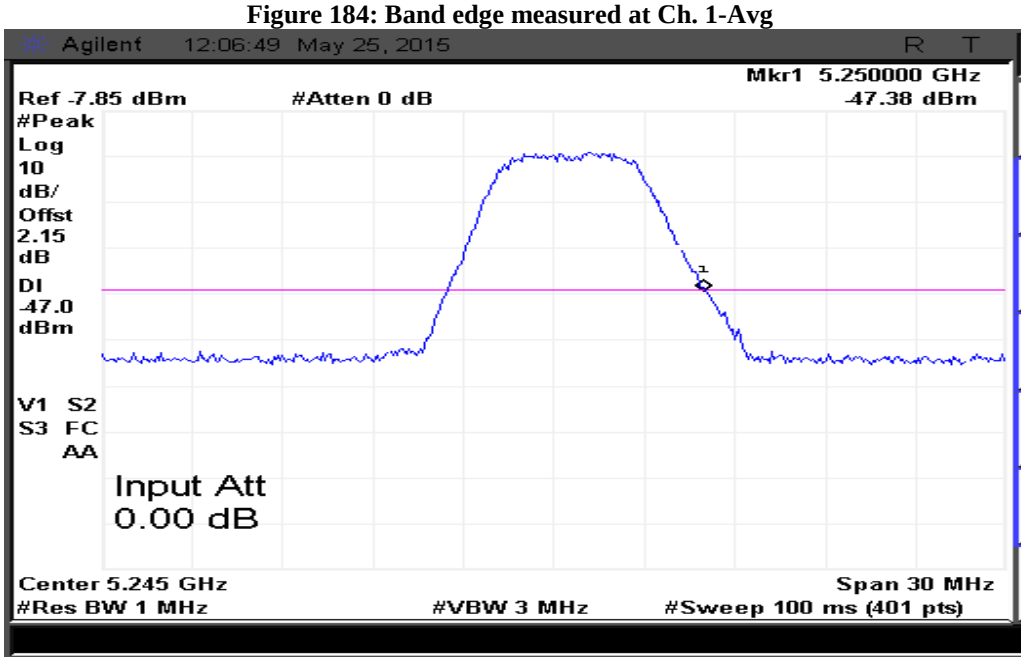

Figure 185: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.7 RESULT (SUPPORTING GRAPHS / DATA) FOR 24DBI ANTENNA CONDITION

5.3.6.7.1 40MHZ MODULATION BW-LOW CHANNEL_5180MHZ

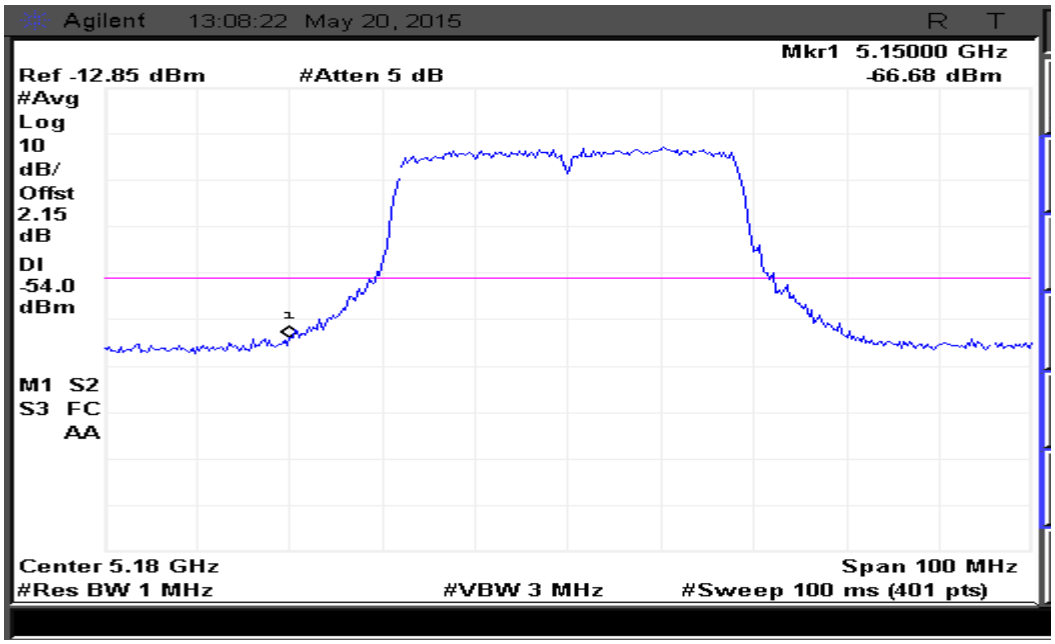

Figure 186: Band edge measured at Ch. 0-Avg

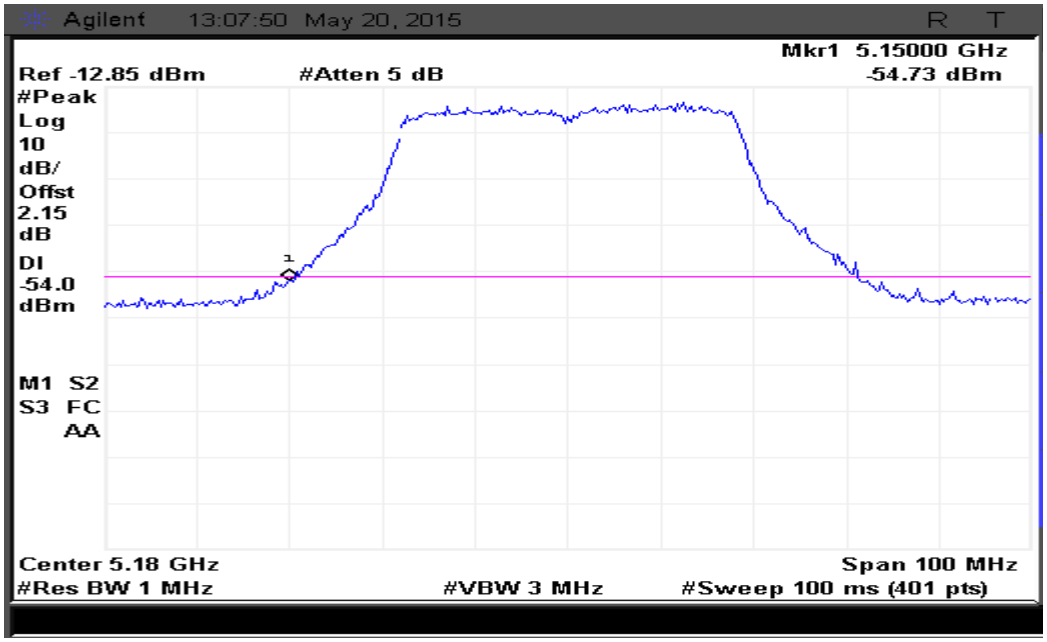

Figure 187: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

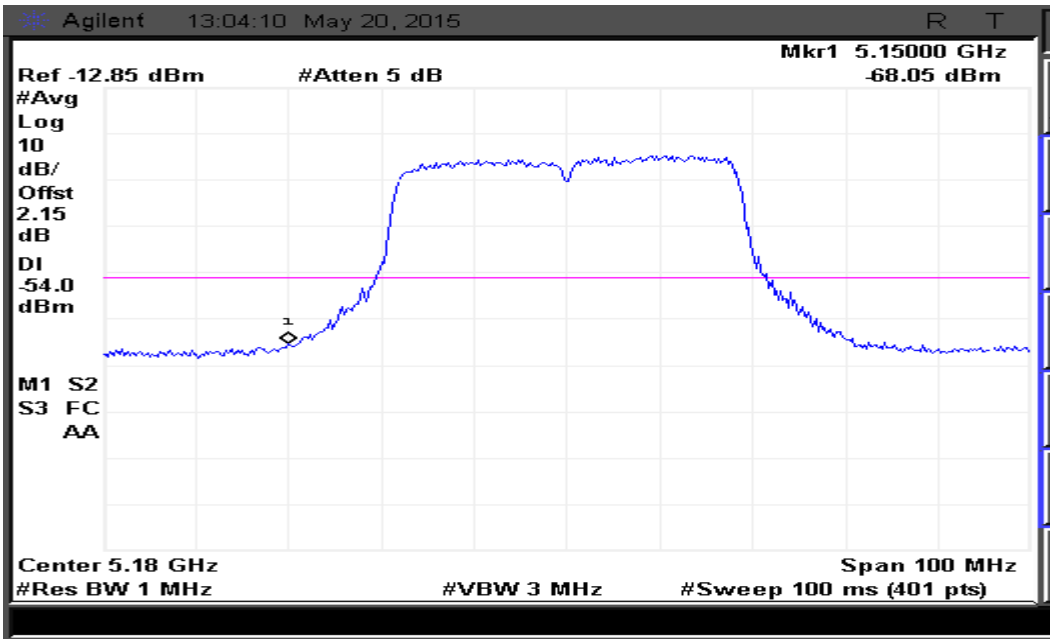

Figure 188: Band edge measured at Ch. 1-Avg

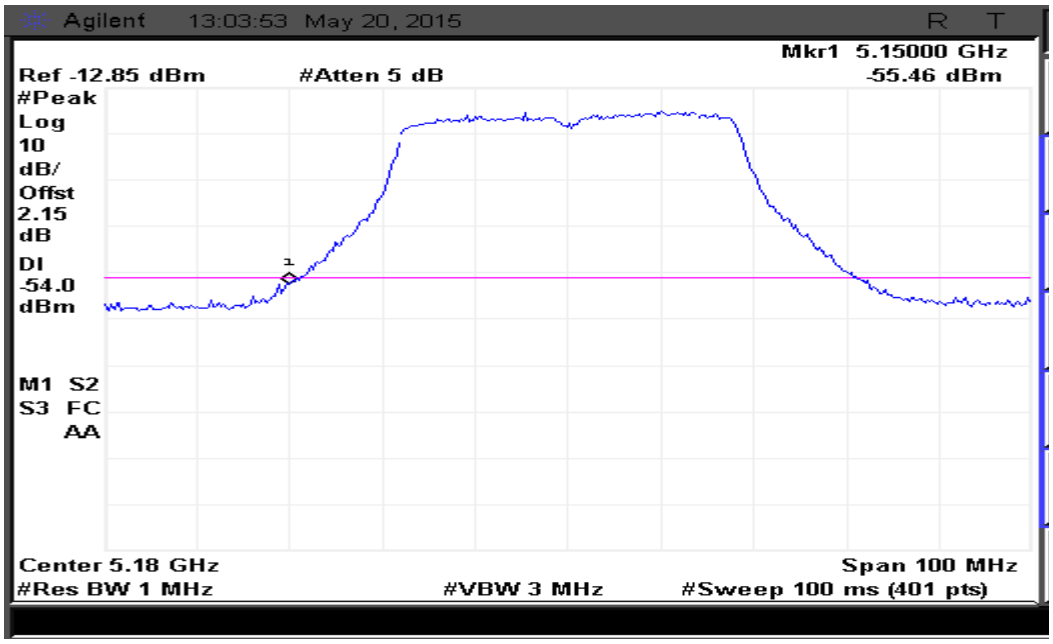

Figure 189: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.7.2 40MHz Modulation BW-High channel_5220MHz

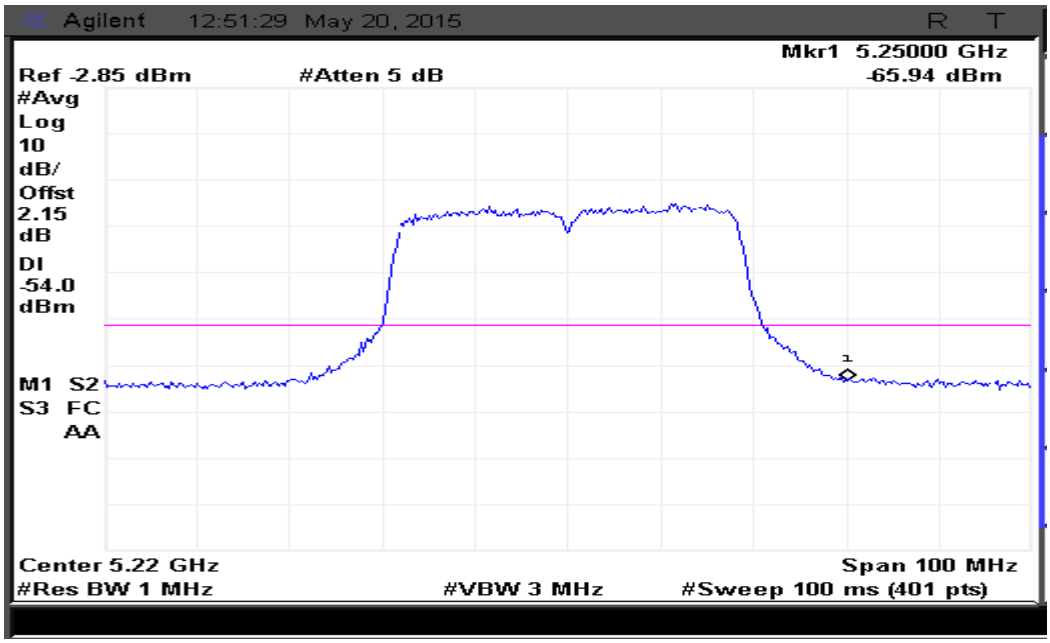

Figure 190: Band edge measured at Ch. 0-Avg

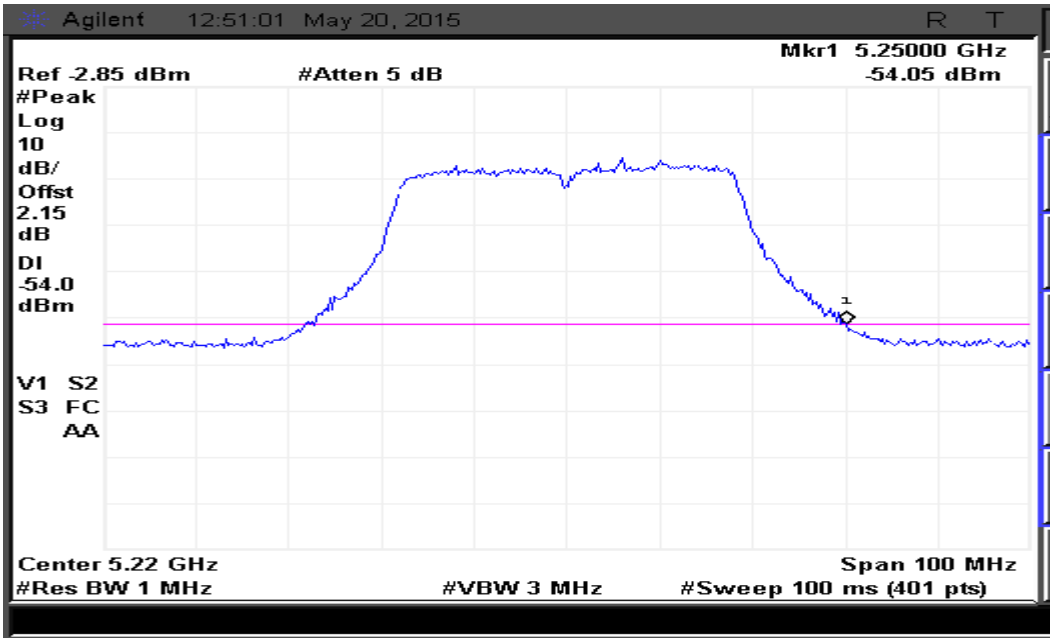

Figure 191: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

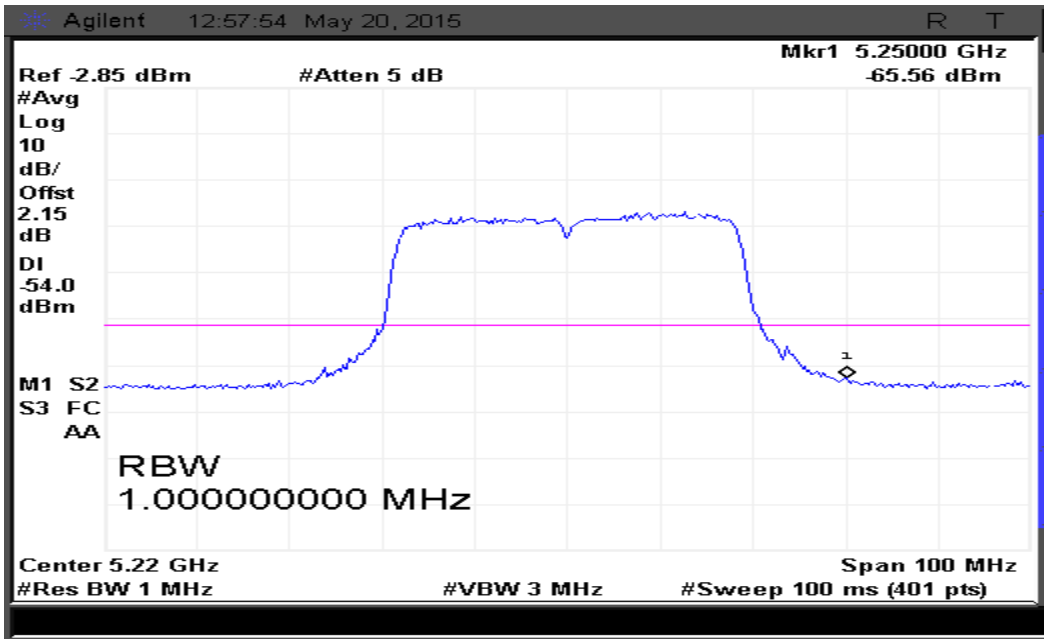

Figure 192: Band edge measured at Ch. 1-Avg

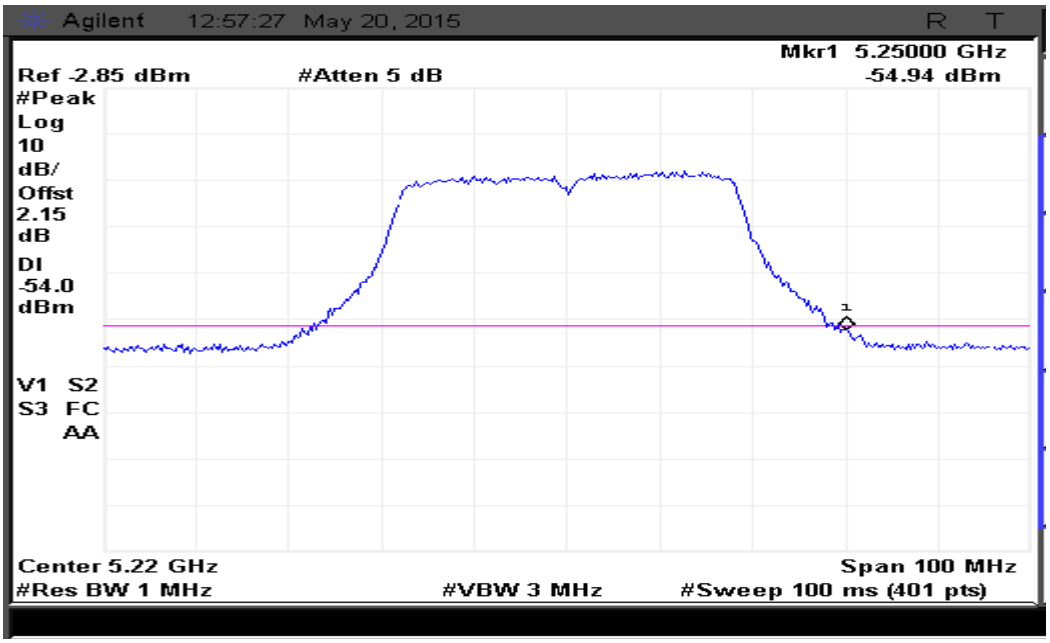

Figure 193: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.7.3 5MHz Modulation BW-Low channel_5155MHz

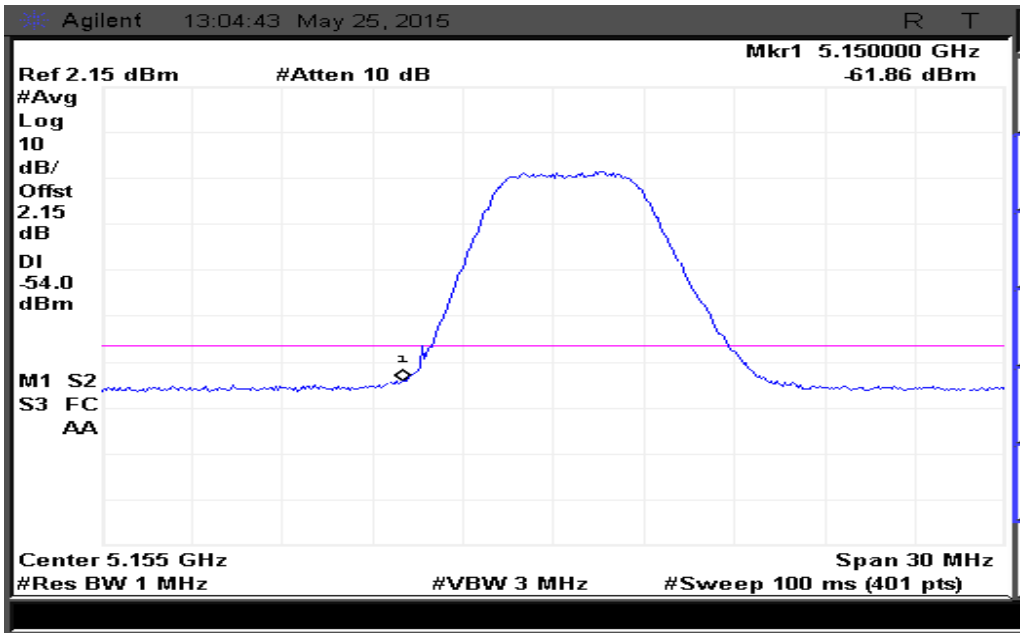

Figure 194: Band edge measured at Ch. 0-Avg

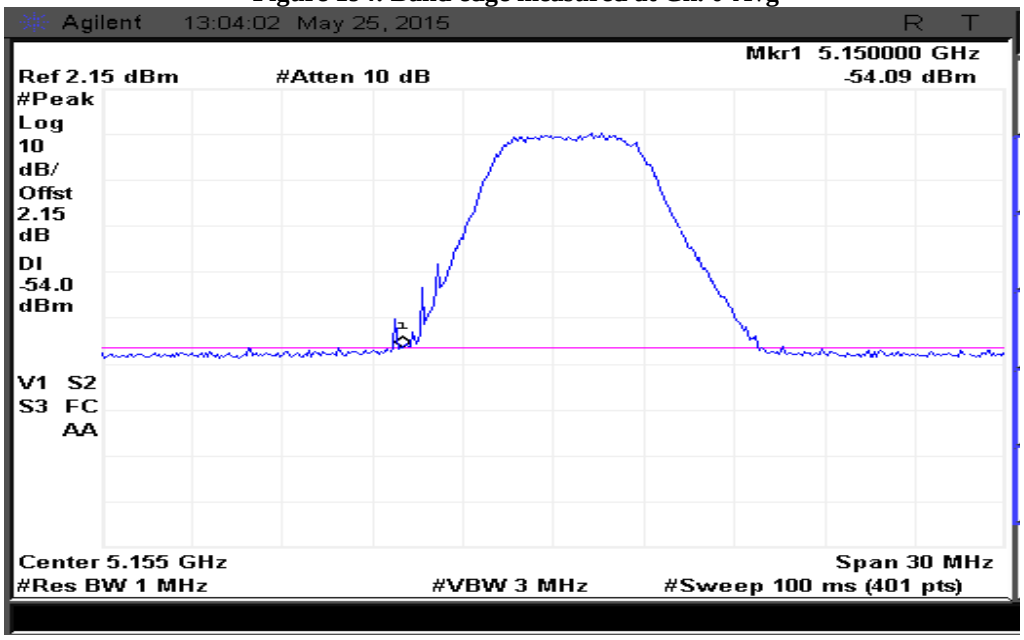

Figure 195: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

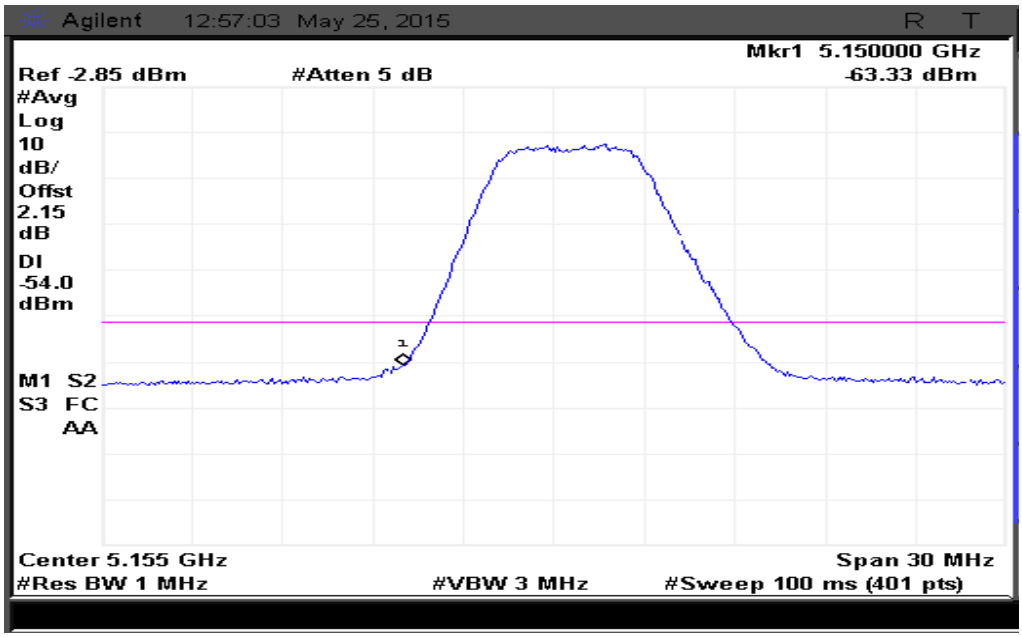

Figure 196: Band edge measured at Ch. 1-Avg

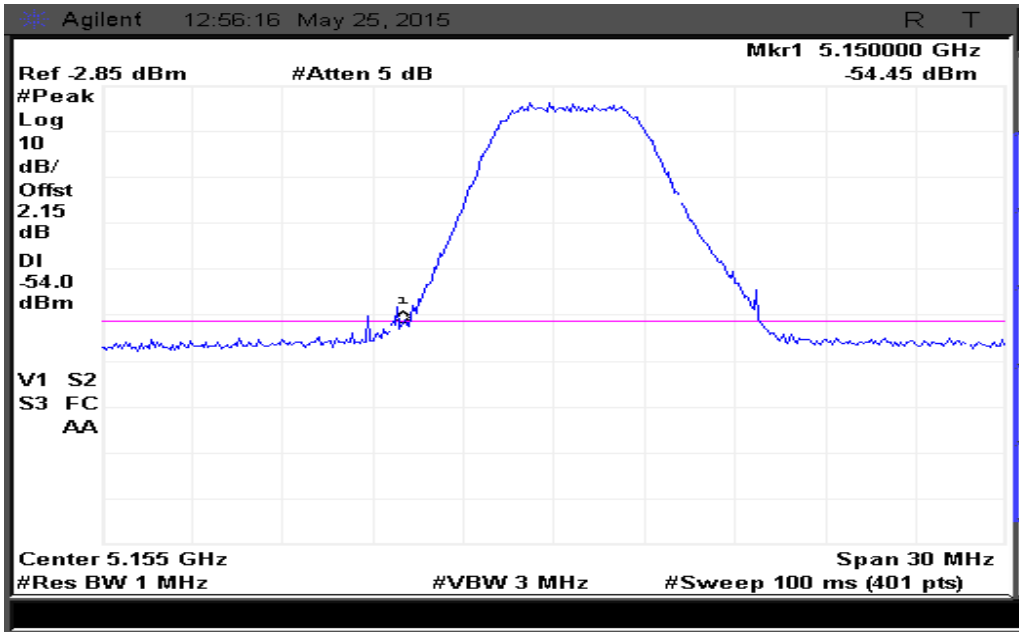

Figure 197: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

5.3.6.7.4 5MHz Modulation BW-High channel_5245MHz

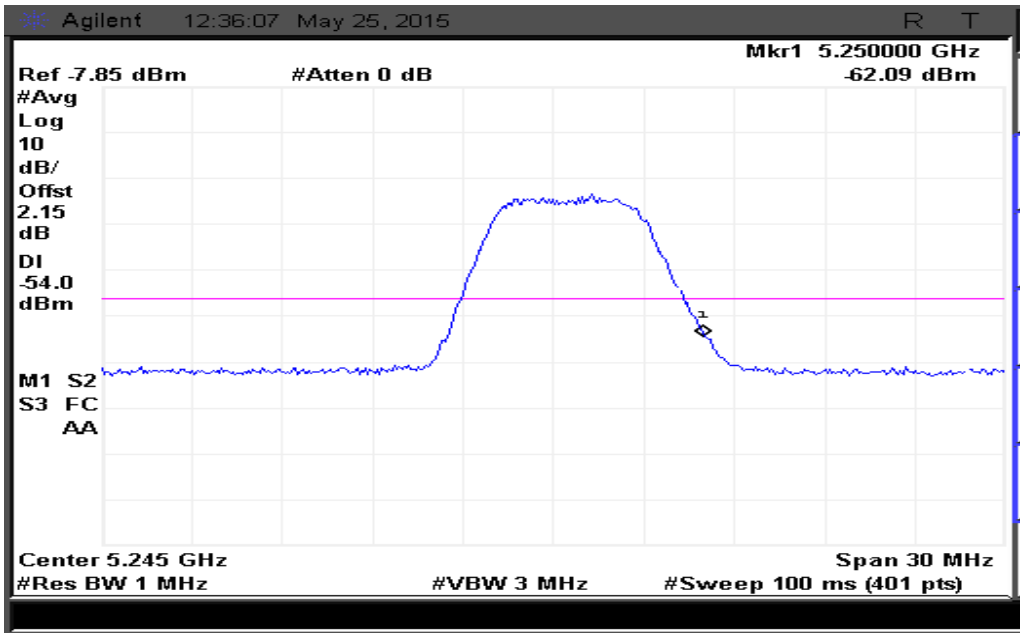

Figure 198: Band edge measured at Ch. 0-Avg

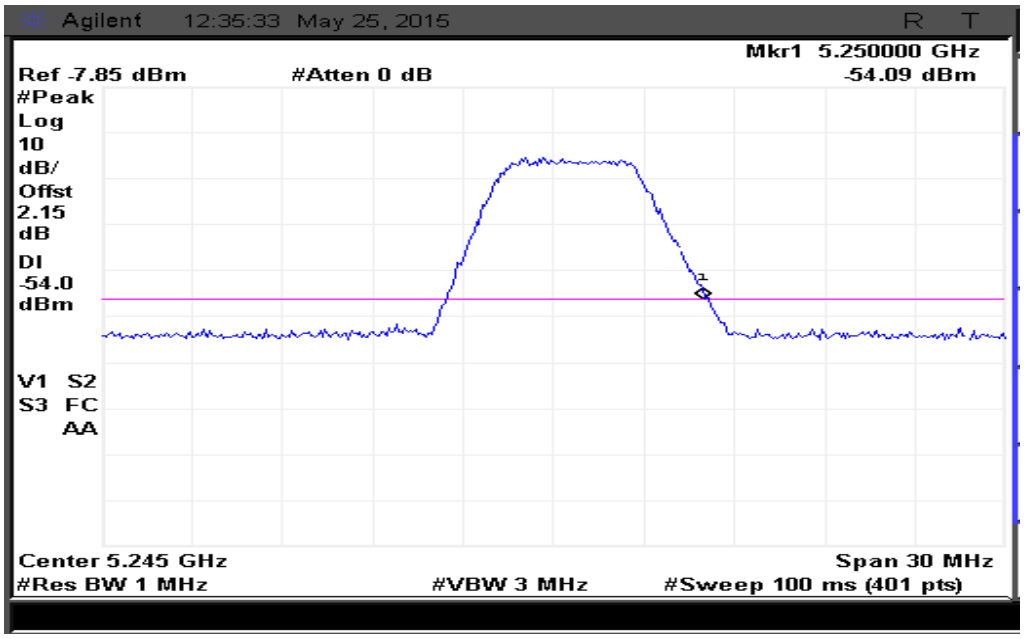

Figure 199: Band edge measured at Ch. 0-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

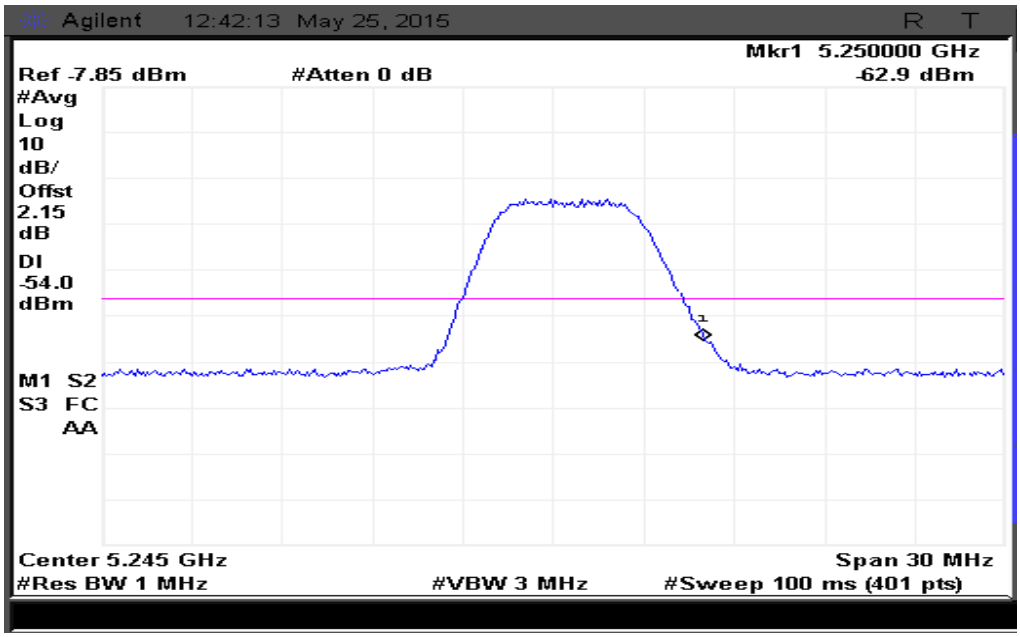

Figure 200: Band edge measured at Ch. 1-Avg

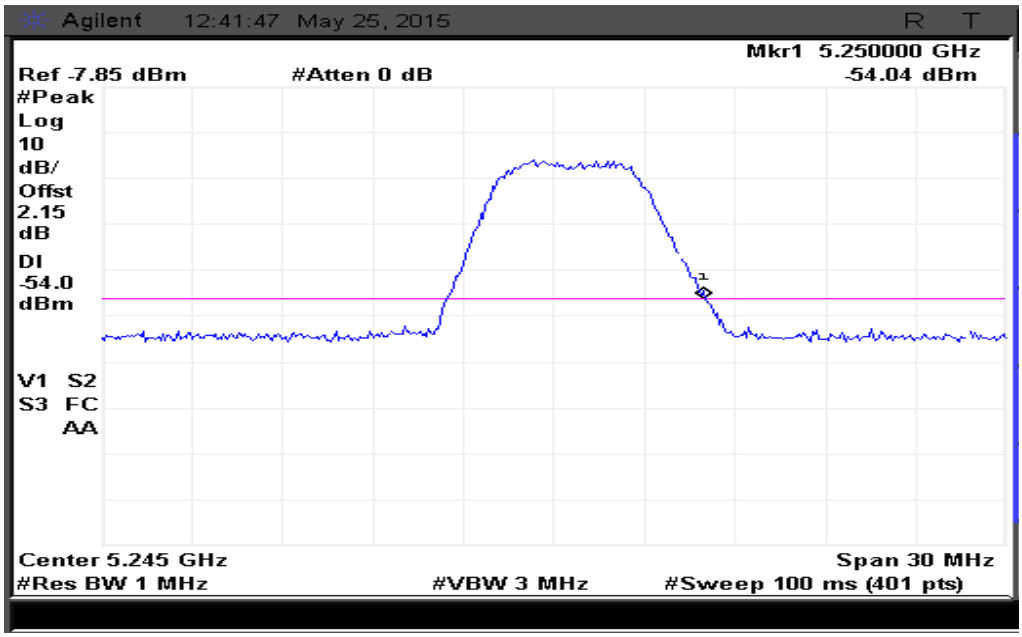

Figure 201: Band edge measured at Ch. 1-Peak

This report should always be reproduced in full. Any extracts of this report is invalid.

APPENDIX I – ACRONYMS

dBm	Power in dB with reference to 1mW
dBµV	Decibel micro Volts
EUT	Equipment Under Test
FCC	Federal Communications Commission
GHz	Giga Hertz
kHz	Kilo Hertz
LISN	Line Impedance Stabilization Network
MHz	Mega Hertz
QP	Quasi Peak

END OF REPORT

This report should always be reproduced in full. Any extracts of this report is invalid.