

Antenna Test Report

Project: SH-301T


Antenna Type:PCB antenna

Manufacturer: SHENZHEN DNS INDUSTRIES CO., LTD.
Address: 23/F Building A, Shenzhen International Innovation Center, No. 1006
Shennan Road, Futian, Shenzhen, 518026, China

Version: V1


Customer	和宏	Project	SH-301T
Band	BT	Color	
Issued by	冯工	Checked by	
Confirmed by		Date	2025.9.15

	测试项目	设备
1. S 参数	1. 回波损耗(RL) 2. 驻波比 (VSWR)	网络分析仪: Agilent E5071B RS ZVB8
2. 耦合测试	1. 发射功率 (MAX Power) 2. 接收灵敏度 (MIN Sens)	1.2G/3G 测试设备: Agilent 8960 2. 微波暗室: 广屏 ETS 3D Chamber (5x3x3)
3. 3D 无源测试 (Passive Test)	1. 效率 (η) 2. 增益 (Gain) 3.辐射方向图	1. 微波暗室: TEM24 3D Chamber (5x5x5) 广屏 ETS 3D Chamber (5x3x3) 2. 网络分析仪: Agilent E5071B
4.3D 有源测试 (Active Test)	1. 3D 功率 (TRP) 2. 3D 灵敏度 (TIS) 3.吞吐测试 4.人头手测试 5.人头耳测试	1. 微波暗室: TEM24 3D Chamber (5x5x5) 广屏 ETS 3D Chamber (5x3x3) 2.2G/3G 测试设备: Agilent 8960 3.4G 测试设备: 安立 MT8820C/CMW500 4.WIFI/BT/NB-iot 测试设备: CMW500 5. 5G 测试设备: 星河亮点 SP9500-CTS

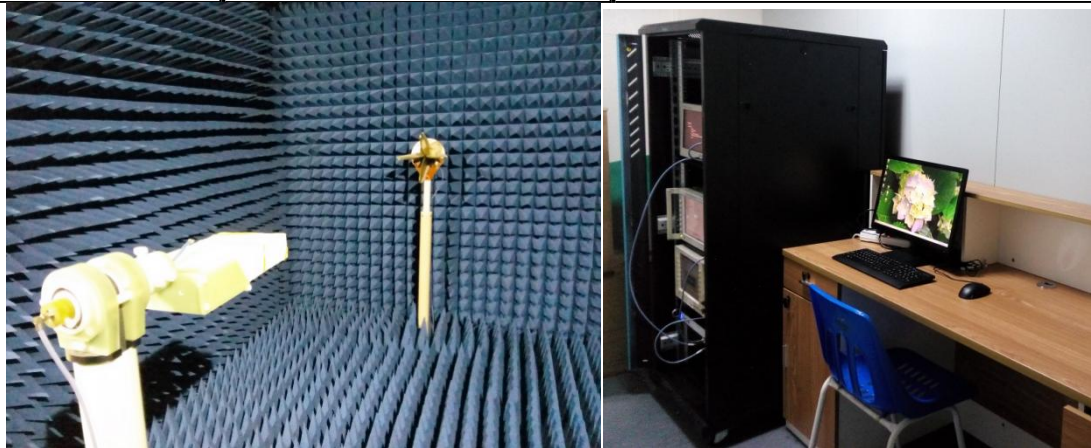



深圳市国质信网络通讯有限公司
ShenZhen NQI network communication ltd

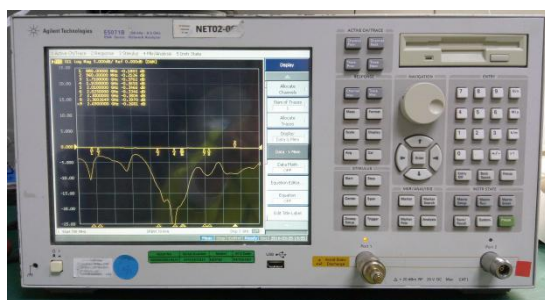


二. Definitions

VSWR: Voltage Standing Wave Rate

TRP: total radiated power


TIS: total isotropic sensitivity


三. Cell-Phone Photo and Dealing Methord

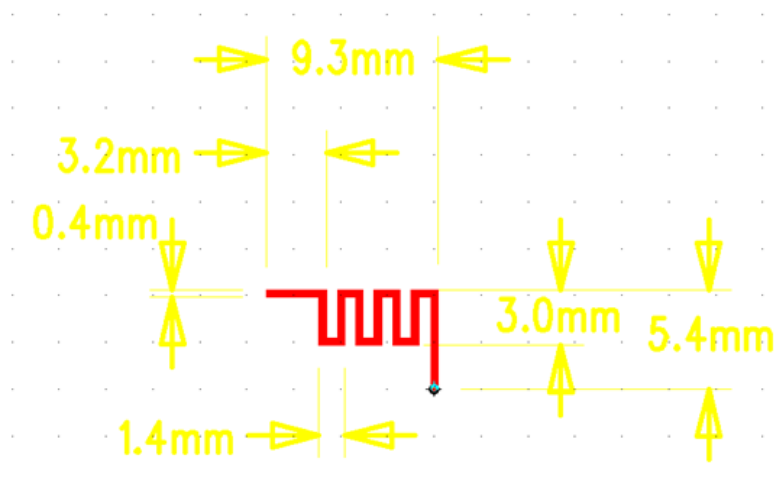



四. 匹配电路

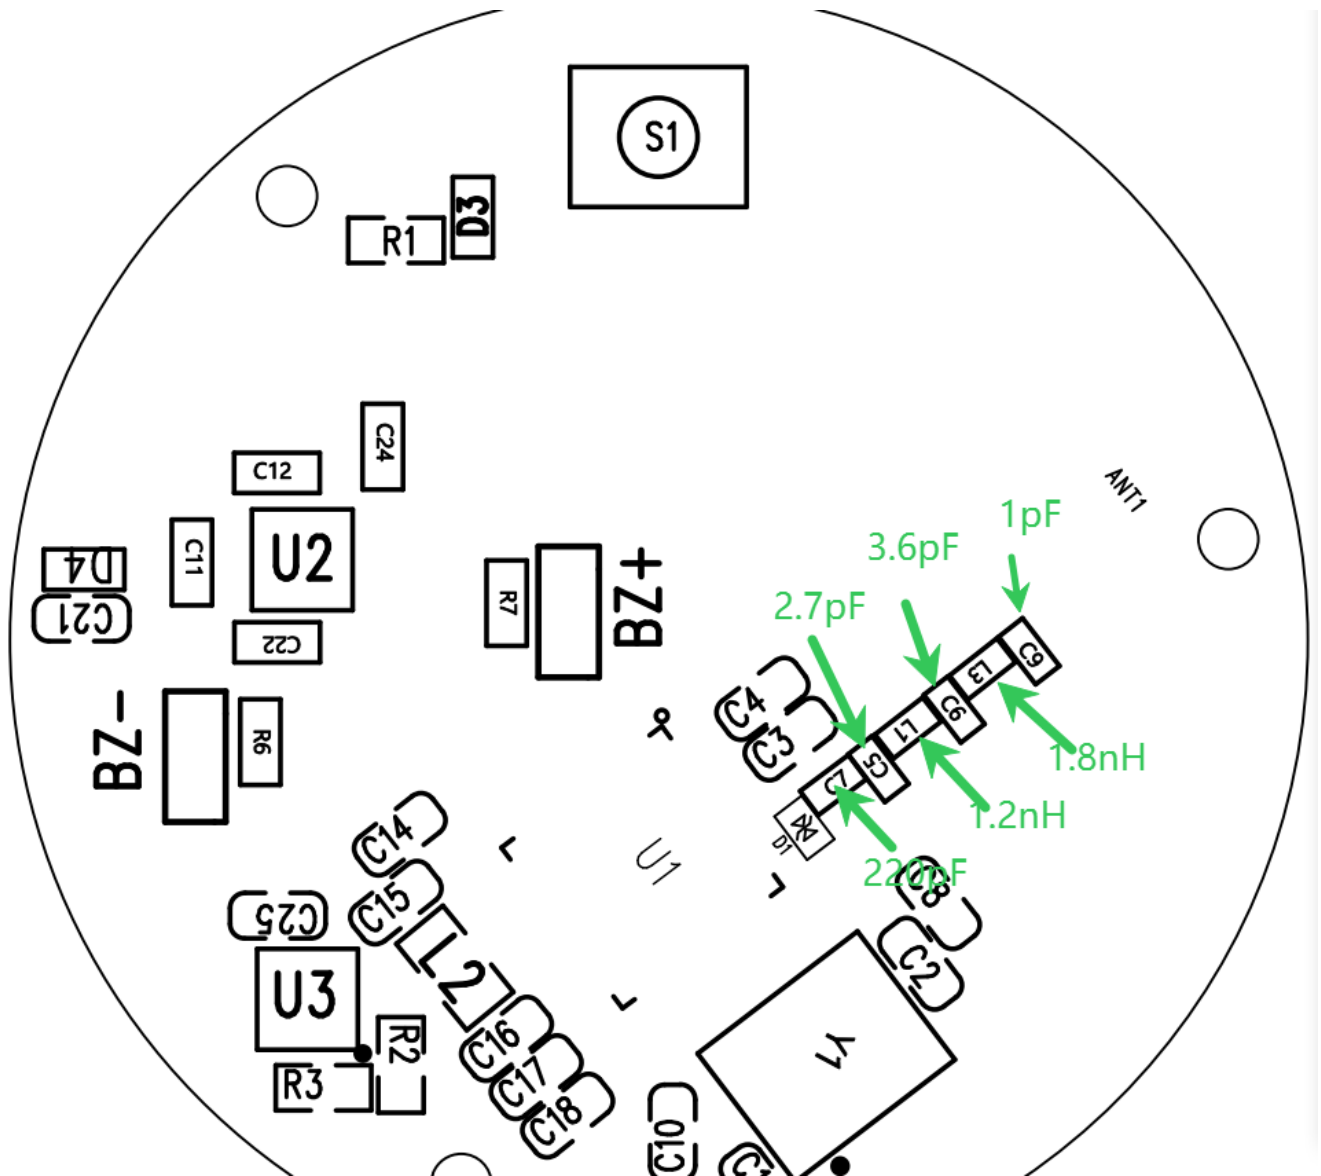

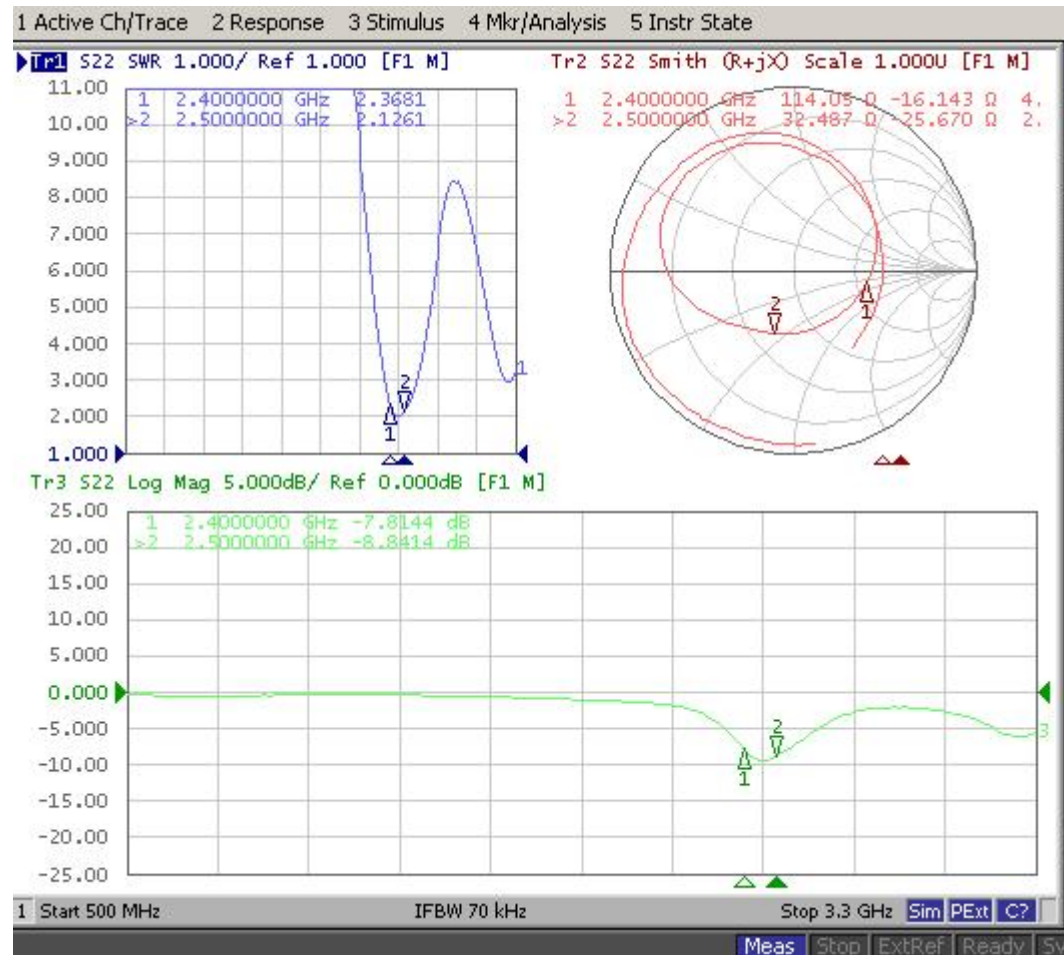



深圳市国质信网络通讯有限公司

ShenZhen NQI network communication ltd

Frequenc y/Mhz	Efficiency / %	MaxGain/ dBi
2400	16.11	-3.39
2410	15.49	-3.23
2420	15.96	-3.51
2430	15.85	-3.56
2440	16.41	-3.77
2450	16.44	-3.72
2460	16.52	-3.77
2470	15.85	-4.13
2480	14.35	-4.23
2490	14.61	-4.63
2500	14.65	-4.88

