



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM171101158301
Page: 1 of 18

TEST REPORT

Application No.: SZEM1711011583CR
Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.
Address of Applicant: 23/F Building A, Shenzhen International Innovation Center, No.1006
Shennan Road, Futian, Shenzhen, China 518026
Manufacturer: SHENZHEN DNS INDUSTRIES CO., LTD.
Address of Manufacturer: 23/F Building A, Shenzhen International Innovation Center, No.1006
Shennan Road, Futian, Shenzhen, China 518026
Factory: HUIZHOU D&S CABLE CO., LTD.
Address of Factory: LONGJIN DONGJIANG INDUSTRY ZONE, SHUIKOU, HUICHENG,
HUIZHOU, GUANGDONG, CHINA
Equipment Under Test (EUT):
EUT Name: WIRELESS CHARGER, Wireless charging pad
Model No.: AC52100N, AC51100N, AWJ-PD1 WH, AWJ-PDBK, 4379187, 4378776,
05061♣
♣ Please refer to section 2 of this report which indicates which model was
actually tested and which were electrically identical.
Trade mark: Please refer to section 2
FCC ID: ZBCAC511001N
Standard(s) : 47 CFR Part 18
Date of Receipt: 2017-11-16
Date of Test: 2017-11-20 to 2017-11-27
Date of Issue: 2017-11-30

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-11-30		Original

Authorized for issue by:				
				
		Peter Geng /Project Engineer		
				
		Eric Fu /Reviewer		

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 18	FCC OST/MP-5:1986	N/A	Pass
Radiated Emissions (9kHz-30MHz)	47 CFR Part 18	FCC OST/MP-5:1986	N/A	Pass

N/A: Not applicable

Remark:

Model No.: AC52100N, AC51100N, AWJ-PD1 WH, AWJ-PDBK, 4379187, 4378776, 05061

Only the model AC52100N was tested fully, and the model AC51100N was performed the Radiated Disturbance for discrepancy, since the electrical circuit design, PCB layout, components used and internal wiring were identical for the above models, with only difference being model number, appearance.

Details see below:

Trade mark	Model number	Description
DNS, Omars, LBT, IHOME Owltech, nexxtech, ATIVA® iHope Leplus, VIBE, AmazonBasics	AC52100N	 rectangles appearance
	AC51100N	 Square appearance
Air-J	AWJ-PD1 WH	rectangles appearance
Air-J	AWJ-PD1 BK	rectangles appearance
VIBE	4379187	rectangles appearance
VIBE	4378776	rectangles appearance
ROSS	05061	rectangles appearance



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS	5
4.3 MEASUREMENT UNCERTAINTY	5
4.4 TEST LOCATION	6
4.5 TEST FACILITY	6
4.6 DEVIATION FROM STANDARDS.....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
5 EQUIPMENT LIST	7
6 EMISSION TEST RESULTS.....	9
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz)	9
6.1.1 E.U.T. Operation.....	9
6.1.2 Test Setup Diagram.....	9
6.1.3 Measurement Data	9
6.2 RADIATED EMISSIONS (9kHz-30MHz)	12
6.2.1 E.U.T. Operation.....	12
6.2.2 Test Setup Diagram.....	12
6.2.3 Measurement Data	12
7 PHOTOGRAPHS	18
7.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) TEST SETUP	18
7.2 RADIATED EMISSIONS (9kHz-30MHz)	18



4 General Information

4.1 Details of E.U.T.

Rated input:	DC 5V,2A
Rated output:	DC 5V,1A
Operation frequency:	113-183kHz
Modulation type:	Load modulation

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
mobile phone	Samsung	Galaxy S6 Edge+	N/A
Micro USB Cable	PHILIPS	SWR2101	REF. No.SEA0700
Adapter	Apple	A1357 W010A051	REF. No.:SEA0500

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Spurious emissions	0.75dB
2	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
3	Temperature test	1 °C
4	Humidity test	3%



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	GB-88	SEM001-06	2017-05-10	2018-05-09
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2017-07-13	2018-07-12
LISN	Rohde & Schwarz	ENV216	SEM007-01	2017-09-27	2018-09-26
LISN	ETS-LINDGREN	3816/2	SEM007-02	2017-04-14	2018-04-13
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2017-04-14	2018-04-13

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2017-07-13	2018-07-12
EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2017-09-27	2018-09-26
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2017-04-14	2018-04-13

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2017-05-10	2018-05-09
2	EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2017-04-14	2018-04-13
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-28
4	Pre-amplifier (9kHz-1GHz)	Sonoma Instrument Co	310N	SEM005-04	2017-06-05	2018-06-04
5	Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
6	Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
7	Coaxial Cable	SGS	N/A	SEM029-01	2017-07-13	2018-07-12



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM171101158301

Page: 8 of 18

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-09-29	2018-09-28
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-04-18	2018-04-17

6 Emission Test Results


6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement: 47 CFR Part 18
 Test Method: FCC OST/MP-5:1986
 Frequency Range: 150kHz to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:
 Temperature: 25 °C Humidity: 45 % RH Atmospheric Pressure: 1005 mbar
 Test mode a:Normal Working_Blank


6.1.2 Test Setup Diagram

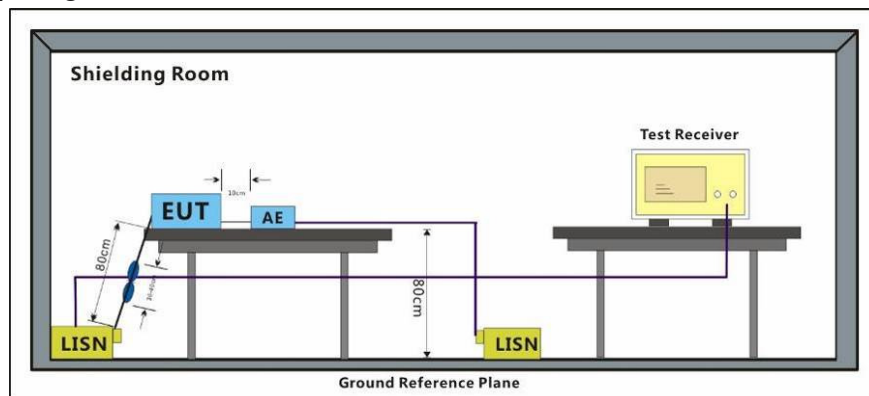

6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.


Mode:a; Line:Live Line

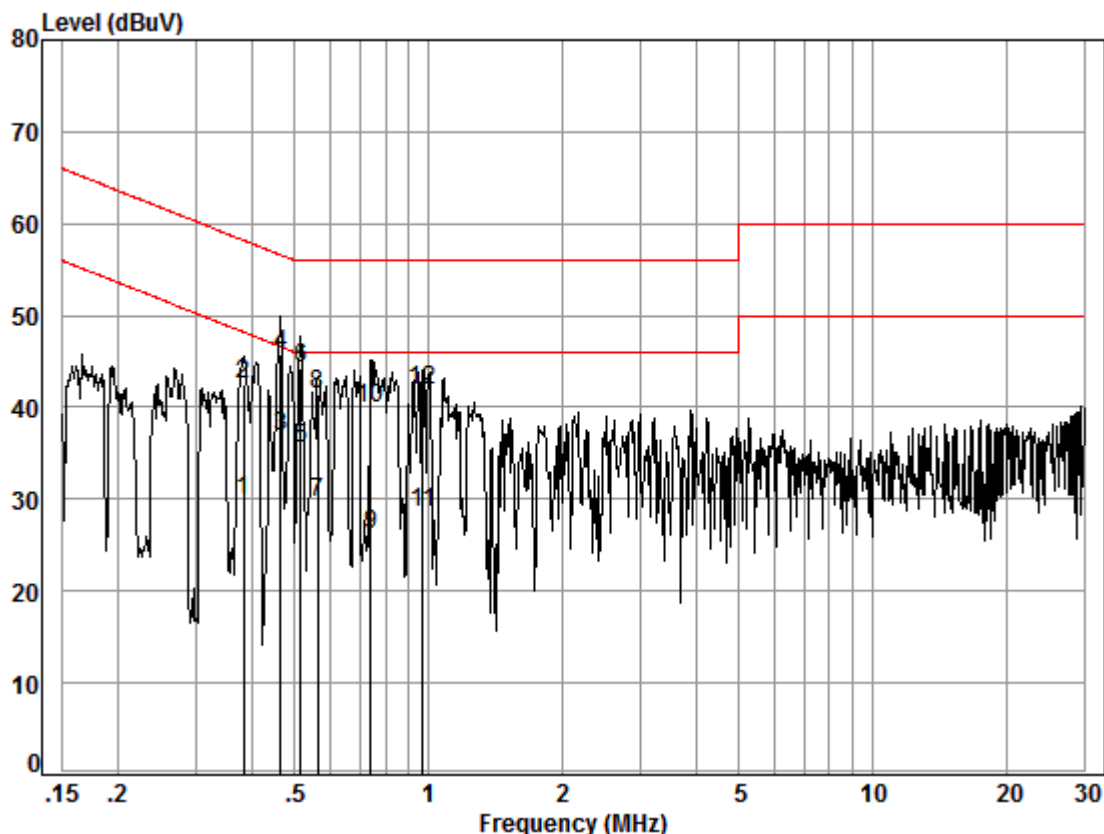

Site : Shielding Room
Condition: Line
Job No. : 11583CR
Test mode: a S6

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.38	0.01	9.49	20.26	29.76	48.21	-18.45	Average
2	0.38	0.01	9.49	33.03	42.53	58.21	-15.68	QP
3	0.47	0.01	9.49	27.36	36.86	46.58	-9.72	Average
4	0.47	0.01	9.49	36.35	45.85	56.58	-10.73	QP
5	0.52	0.01	9.50	25.99	35.50	46.00	-10.50	Average
6	0.52	0.01	9.50	34.82	44.33	56.00	-11.67	QP
7	0.56	0.01	9.52	20.16	29.69	46.00	-16.31	Average
8	0.56	0.01	9.52	31.94	41.47	56.00	-14.53	QP
9	0.74	0.02	9.49	16.58	26.09	46.00	-19.91	Average
10	0.74	0.02	9.49	30.41	39.92	56.00	-16.08	QP
11	0.97	0.02	9.50	18.93	28.45	46.00	-17.55	Average
12	0.97	0.02	9.50	32.32	41.84	56.00	-14.16	QP

Mode:a; Line:Neutral Line

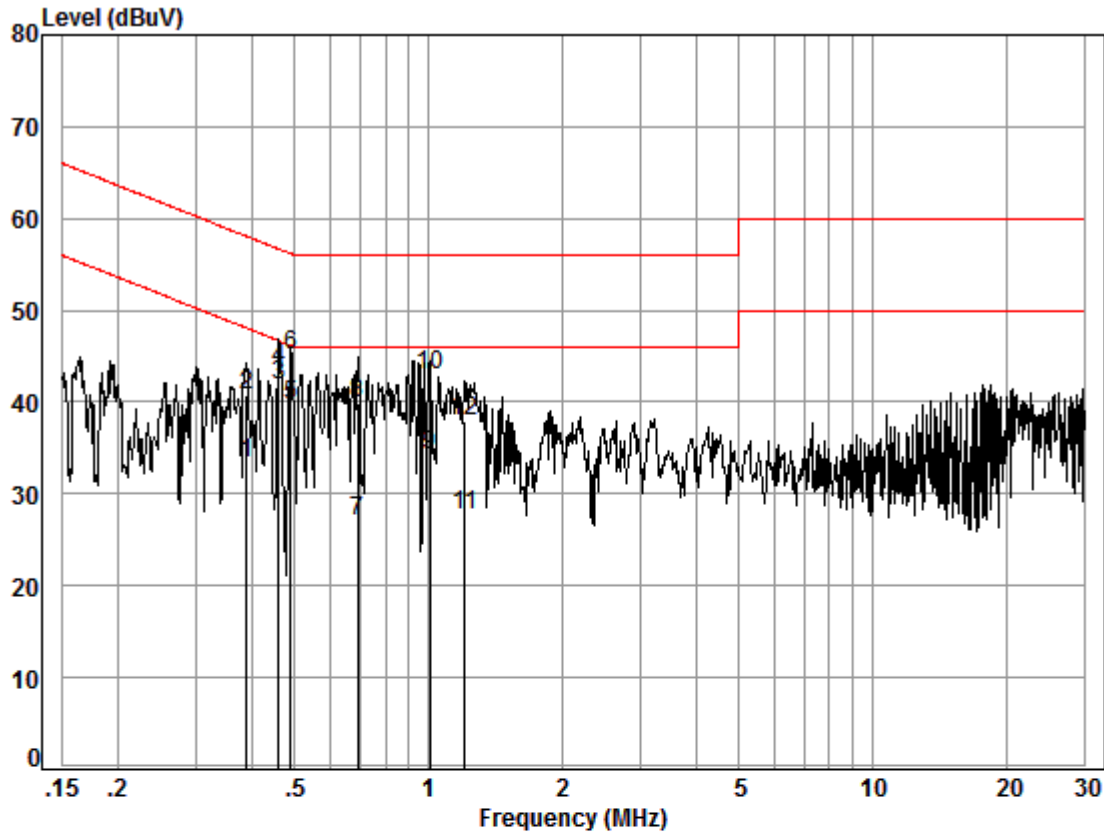

Site : Shielding Room
Condition: Neutral
Job No. : 11583CR
Test mode: a S6

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.39	0.01	9.59	23.65	33.25	48.08	-14.83	Average
2	0.39	0.01	9.59	31.07	40.67	58.08	-17.41	QP
3	0.46	0.01	9.60	32.26	41.87	46.67	-4.80	Average
4	0.46	0.01	9.60	33.88	43.49	56.67	-13.18	QP
5	0.49	0.01	9.60	30.11	39.72	46.19	-6.47	Average
6	0.49	0.01	9.60	35.52	45.13	56.19	-11.06	QP
7	0.69	0.02	9.62	17.40	27.04	46.00	-18.96	Average
8	0.69	0.02	9.62	30.19	39.83	56.00	-16.17	QP
9	1.00	0.02	9.63	24.64	34.29	46.00	-11.71	Average
10	1.00	0.02	9.63	33.40	43.05	56.00	-12.95	QP
11	1.21	0.02	9.64	18.05	27.71	46.00	-18.29	Average
12	1.21	0.02	9.64	28.28	37.94	56.00	-18.06	QP


6.2 Radiated Emissions (9kHz-30MHz)

Test Requirement: 47 CFR Part 18
 Test Method: FCC OST/MP-5:1986
 Frequency Range: 9kHz-30MHz
 Measurement Distance: 10m

6.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 24 °C Humidity: 54 % RH Atmospheric Pressure: 1005 mbar
 Test mode a:Normal Working_Blank

6.2.2 Test Setup Diagram

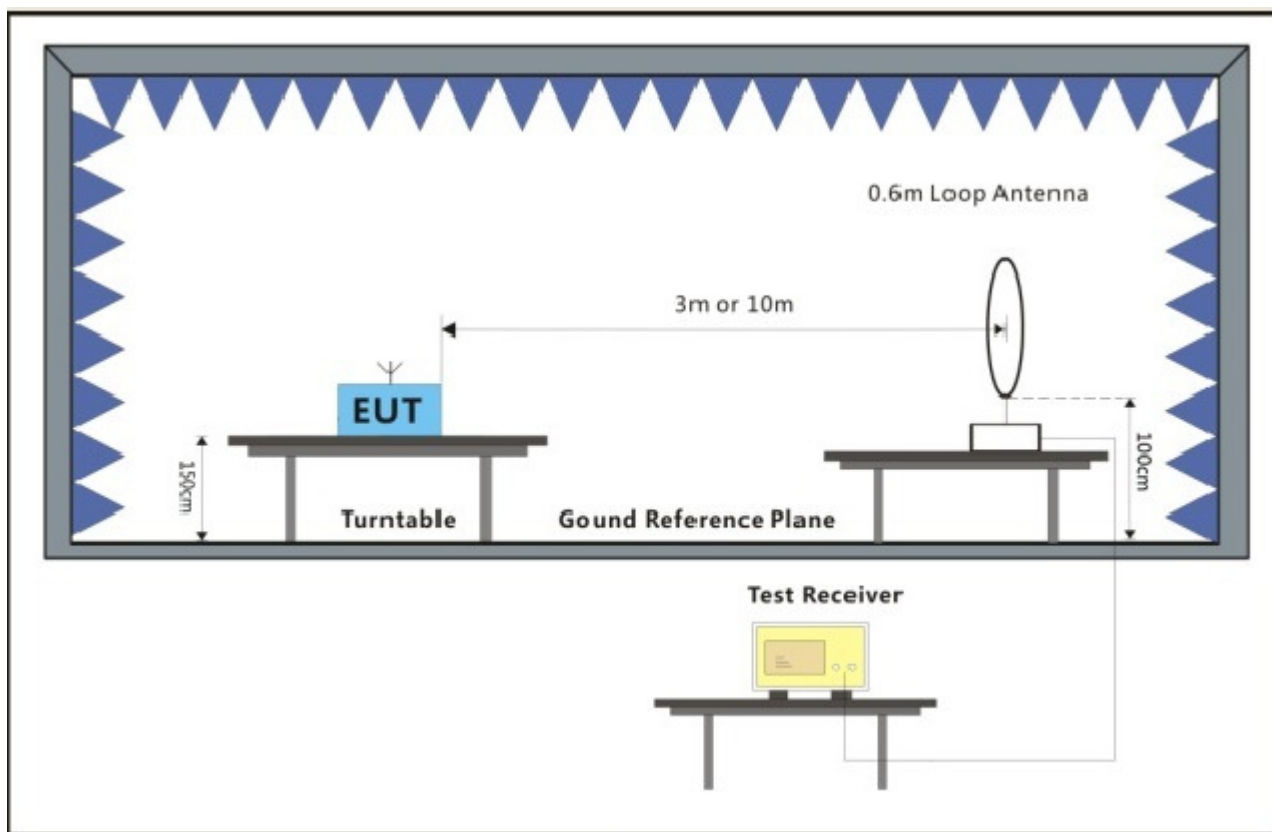


6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.



Model: AC51100N

Mode:a; Line:Live Line

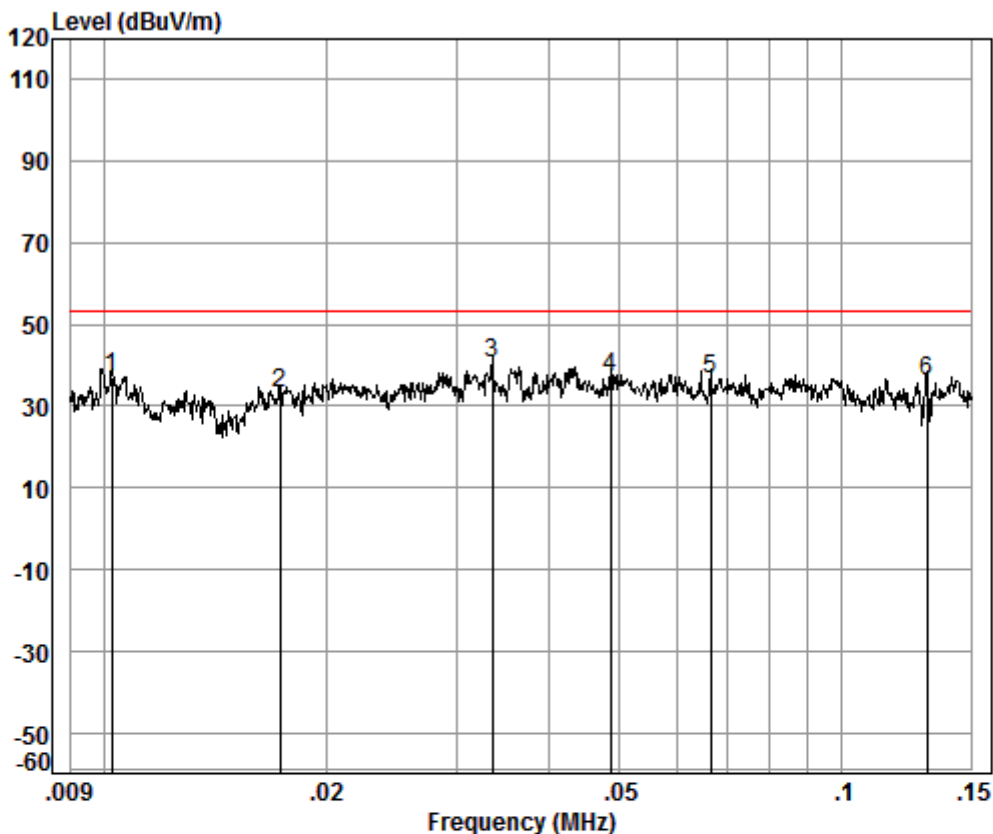


Condition: 10m

Job No. : 11583CR

Test Mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0.01	0.29	19.15	32.48	50.35	37.31	53.06	-15.75
2	0.02	0.23	15.89	32.49	49.39	33.02	53.06	-20.04
3 pp	0.03	0.16	13.53	32.50	59.24	40.43	53.06	-12.63
4	0.05	0.12	12.48	32.51	56.94	37.03	53.06	-16.03
5	0.07	0.09	12.19	32.51	57.09	36.86	53.06	-16.20
6	0.13	0.06	11.80	32.51	56.99	36.34	53.06	-16.72

Mode:a; Line:Neutral Line

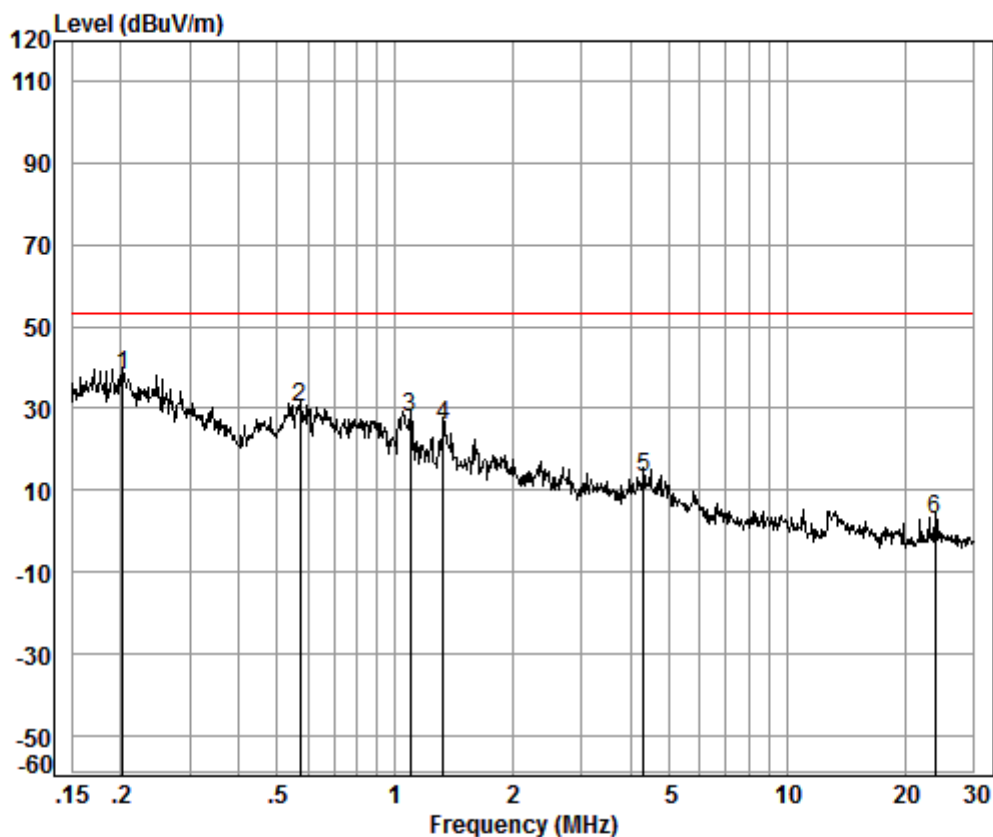

Condition: 10m

Job No. : 11583CR


Test Mode: a

		Cable	Ant	Preamp	Read	Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1 pp	0.20	0.08	11.87	32.51	58.45	37.89	53.06 -15.17
2	0.57	0.13	11.80	32.48	50.98	30.43	53.06 -22.63
3	1.09	0.24	12.01	32.45	47.79	27.59	53.06 -25.47
4	1.33	0.28	12.04	32.45	45.89	25.76	53.06 -27.30
5	4.31	0.41	12.03	32.48	33.34	13.30	53.06 -39.76
6	23.89	0.72	8.94	32.53	25.69	2.82	53.06 -50.24



Model: AC52100N

Mode:a; Line:Live Line

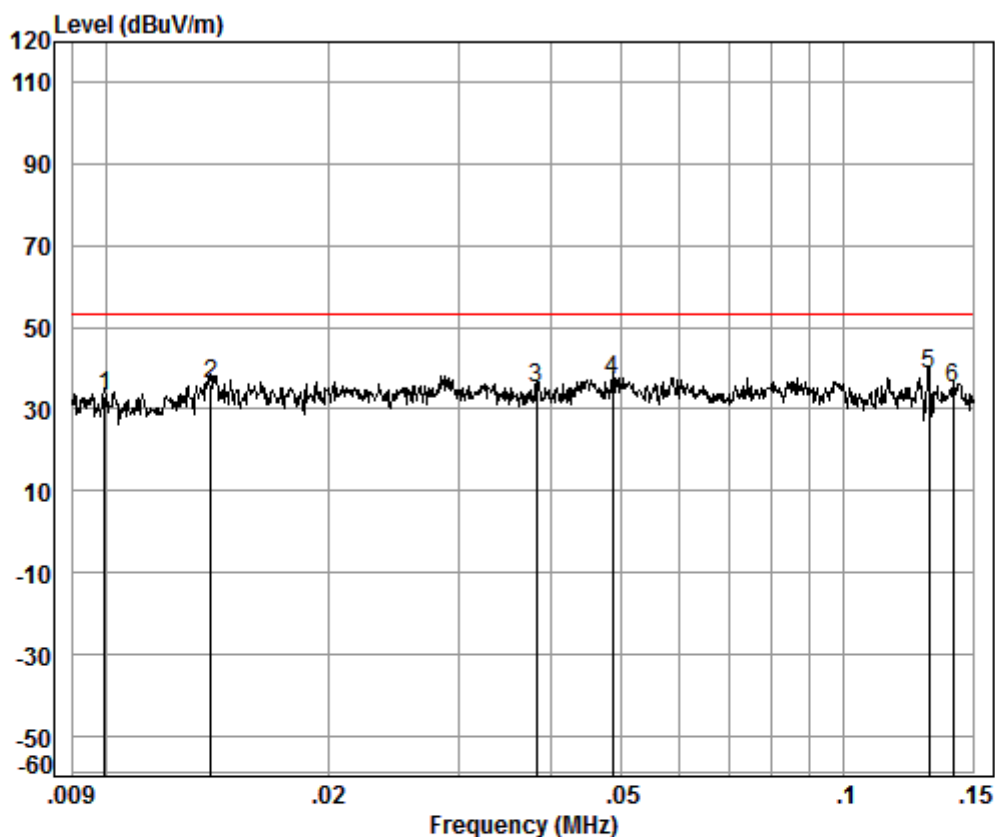


Condition: 10m

Job No. : 11583CR

Test Mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0.01	0.29	19.33	32.46	45.82	32.98	53.06	-20.08
2	0.01	0.26	17.27	32.49	51.33	36.37	53.06	-16.69
3	0.04	0.15	13.15	32.50	54.47	35.27	53.06	-17.79
4	0.05	0.12	12.48	32.51	56.94	37.03	53.06	-16.03
5 pp	0.13	0.06	11.80	32.51	58.99	38.34	53.06	-14.72
6	0.14	0.06	11.75	32.50	55.80	35.11	53.06	-17.95

Mode:a; Line:Neutral Line

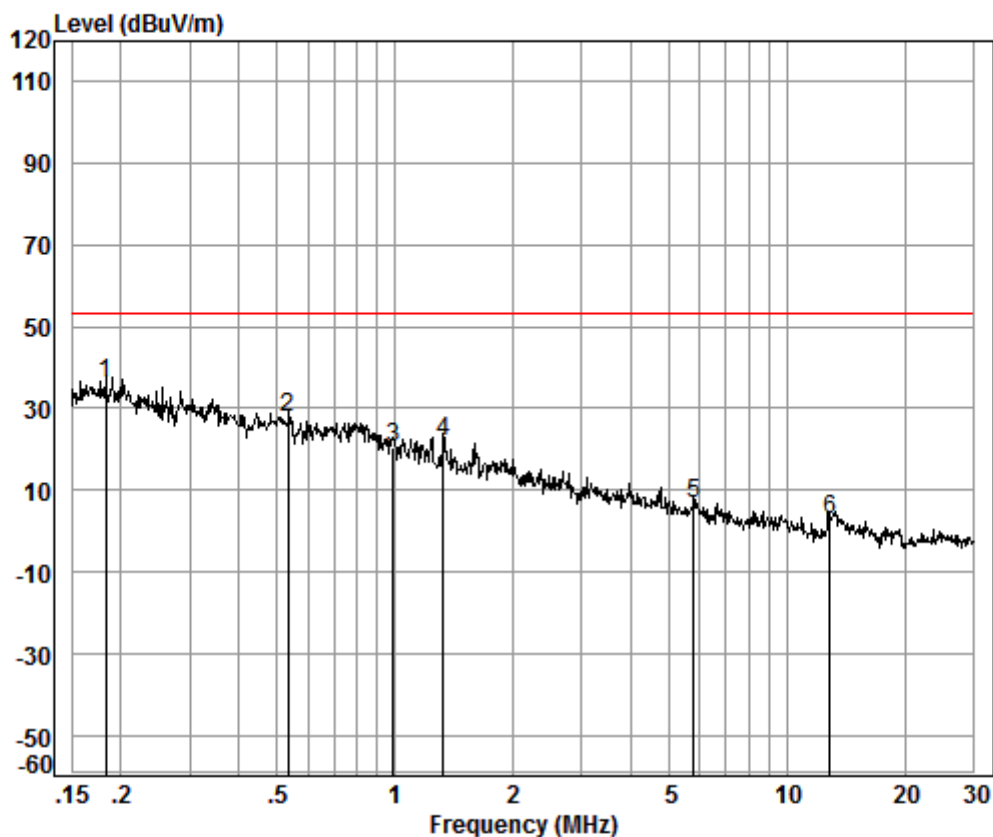

Condition: 10m

Job No. : 11583CR

Test Mode: a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	0.18	0.07	11.82	32.51	56.81	36.19	53.06	-16.87
2		0.53	0.12	11.75	32.49	48.34	27.72	53.06	-25.34
3		0.99	0.23	12.00	32.45	40.87	20.65	53.06	-32.41
4		1.33	0.28	12.04	32.45	41.89	21.76	53.06	-31.30
5		5.80	0.44	11.64	32.48	26.90	6.50	53.06	-46.56
6		12.92	0.56	10.51	32.50	24.17	2.74	53.06	-50.32



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM171101158301

Page: 17 of 18

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_{300} / L_{10} = D_{10} / D_{300}$$

Note:

L_{300} : Level @ 300m distance. Unit: $\mu\text{V/m}$;

L_{10} : Level @ 10m distance. Unit: $\mu\text{V/m}$;

D_{300} : 300m distance. Unit: m

D_{10} : 10m distance. Unit: m

The level at 300m test distance is below:

Model: AC51100N

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m ($\mu\text{V/m}$)	Level @ 300m ($\mu\text{V/m}$)	Level @ 300m (dBuV/m)	Limit @ 300m (dBuV/m)	Margin (dB)
0.01	37.31	73.37	2.45	7.77	23.52	-15.75
0.02	33.02	44.77	1.49	3.48	23.52	-20.04
0.03	40.43	105.08	3.50	10.89	23.52	-12.63
0.05	37.03	71.04	2.37	7.49	23.52	-16.03
0.07	36.86	69.66	2.32	7.32	23.52	-16.20
0.13	36.34	65.61	2.19	6.80	23.52	-16.72
0.20	37.89	78.43	2.61	8.35	23.52	-15.17
0.57	30.43	33.23	1.11	0.89	23.52	-22.63
1.09	27.59	23.96	0.80	-1.95	23.52	-25.47
1.33	25.76	19.41	0.65	-3.78	23.52	-27.30
4.31	13.30	4.62	0.15	-16.24	23.52	-39.76
23.89	2.82	1.38	0.05	-26.72	23.52	-50.24

Model: AC52100N


Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m ($\mu\text{V/m}$)	Level @ 300m ($\mu\text{V/m}$)	Level @ 300m (dBuV/m)	Limit @ 300m (dBuV/m)	Margin (dB)
0.01	32.98	44.57	1.49	3.44	23.52	-20.08
0.01	36.37	65.84	2.19	6.83	23.52	-16.69
0.04	35.27	58.01	1.93	5.73	23.52	-17.79
0.05	37.03	71.04	2.37	7.49	23.52	-16.03
0.13	38.34	82.60	2.75	8.80	23.52	-14.72
0.14	35.11	56.95	1.90	5.57	23.52	-17.95
0.18	36.19	64.49	2.15	6.65	23.52	-16.87
0.53	27.72	24.32	0.81	-1.82	23.52	-25.34
0.99	20.65	10.78	0.36	-8.89	23.52	-32.41
1.33	21.76	12.25	0.41	-7.78	23.52	-31.30
5.80	6.50	2.11	0.07	-23.04	23.52	-46.56
12.92	2.74	1.37	0.05	-26.80	23.52	-50.32

7 Photographs

7.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup



7.2 Radiated Emissions (9kHz-30MHz)

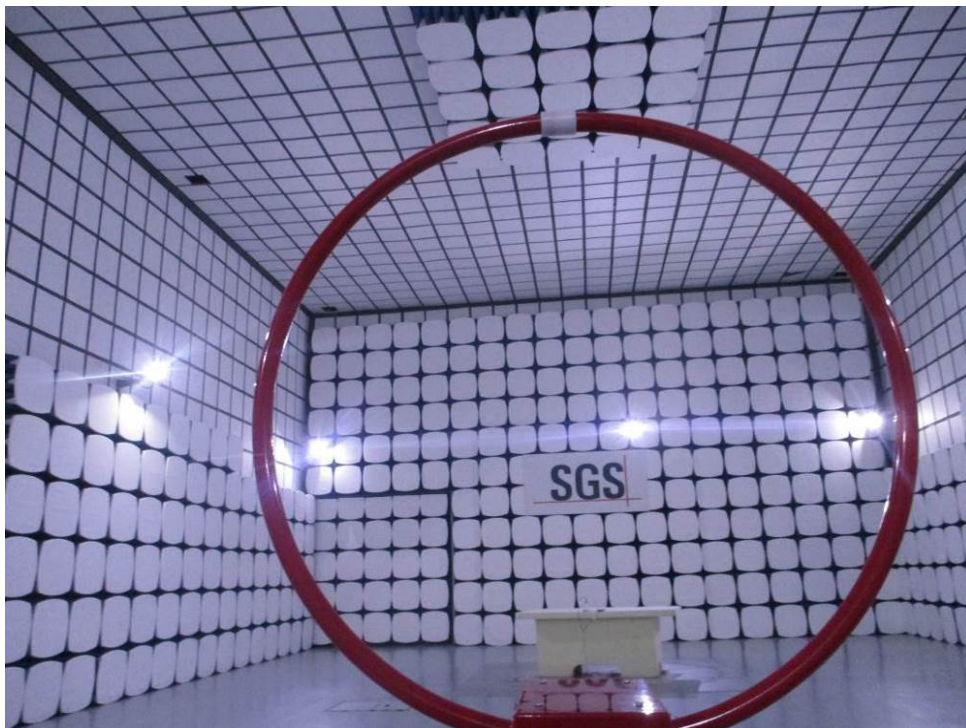

- End of the Report -