

FCC RF Test Report


APPLICANT : CORPORATIVO LANIX S.A. DE C.V.
EQUIPMENT : Mobile phone
BRAND NAME : LANIX
MODEL NAME : Ilium S105
FCC ID : ZC4S105
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jul. 02, 2013 and completely tested on Jul. 22, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Site.....	6
1.7 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power.....	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system	11
2.6 Description of RF Function Operation Test Setup.....	11
2.7 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB Bandwidth Measurement	13
3.2 Output Power Measurement.....	21
3.3 Power Spectral Density Measurement	25
3.4 Conducted Band Edges and Spurious Emission Measurement	40
3.5 Radiated Band Edges and Spurious Emission Measurement	57
3.6 AC Conducted Emission Measurement.....	82
3.7 Antenna Requirements.....	88
4 LIST OF MEASURING EQUIPMENT	89
5 UNCERTAINTY OF EVALUATION	90
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR370202C	Rev. 01	Initial issue of report	Jul. 23, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.38 dB at 4824.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.19 dB at 0.590 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

CORPORATIVO LANIX S.A. DE C.V.

CARRETERA INTERNACIONAL HERMOSILLO-NOGALE KM 8.5 HERMOSILLO MEXICO

1.2 Manufacturer

Shanghai Huaqin Telecom Technology Co., Ltd

Building1, 399 Keyuan Road, Pudong district, Shanghai, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile phone
Brand Name	LANIX
Model Name	Ilium S105
FCC ID	ZC4S105
EUT supports Radios application	GSM/GPRS/WCDMA/WLAN 11bgn/Bluetooth 2.1/4.0
HW Version	A100P_MB_V2.0
SW Version	ZA100EA_45A0_V8_1_H
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to Antenna	802.11b : 9.09 dBm (0.0081 W) 802.11g : 19.18 dBm (0.0828 W) 802.11n HT20 : 19.84 dBm (0.0964 W) 802.11n HT40 : 19.87 dBm (0.0971 W)
Antenna Type	PIFA Antenna type with gain 1.10 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.			
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-SZ	03CH01-SZ	CO01-SZ	831040/4086F-1

The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate as following table and the highest (peak) power data rates were chosen for full test in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	8.31	8.27	8.25	8.28
CH 06	2437 MHz	8.59	8.58	8.56	8.53
CH 11	2462 MHz	9.09	9.04	9.02	9.04

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	18.44	18.37	18.31	18.36	18.32	18.43	18.39	18.27
CH 06	2437 MHz	18.29	18.26	18.24	18.16	18.18	18.22	18.25	18.19
CH 11	2462 MHz	19.18	19.09	18.92	18.94	18.87	18.98	18.89	18.87

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	19.05	18.97	18.51	18.65	18.49	18.59	18.54	18.47
CH 06	2437 MHz	18.9	18.44	18.34	18.31	18.36	18.38	18.32	18.41
CH 11	2462 MHz	19.84	18.95	18.87	18.88	18.92	18.86	18.87	18.91

Channel	Frequency	2.4GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		13.5 Mbps	27 Mbps	40.5 Mbps	54 Mbps	81 Mbps	108 Mbps	121.5 Mbps	135 Mbps
CH 03	2422 MHz	19.31	18.66	18.64	18.35	18.32	18.42	18.43	18.31
CH 06	2437 MHz	19.5	18.77	18.72	18.56	18.55	18.53	18.52	18.49
CH 09	2452 MHz	19.87	18.92	18.75	18.89	18.73	18.89	18.76	18.77


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

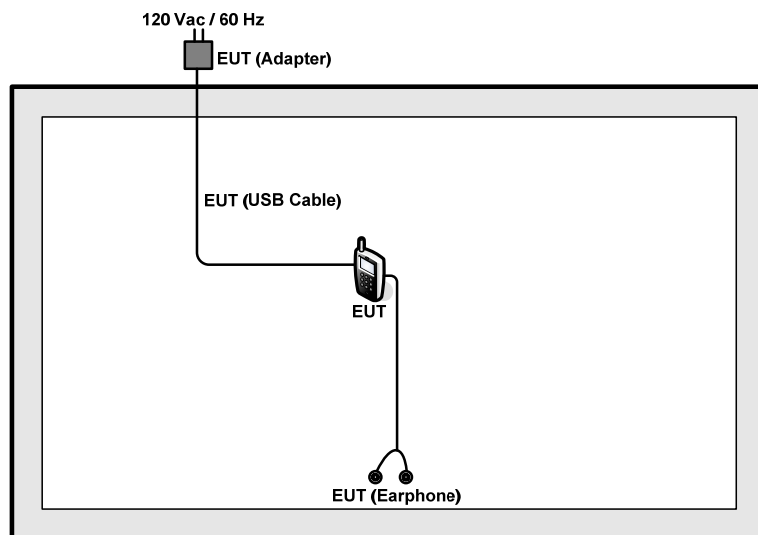

<AC Conducted Emission Mode>

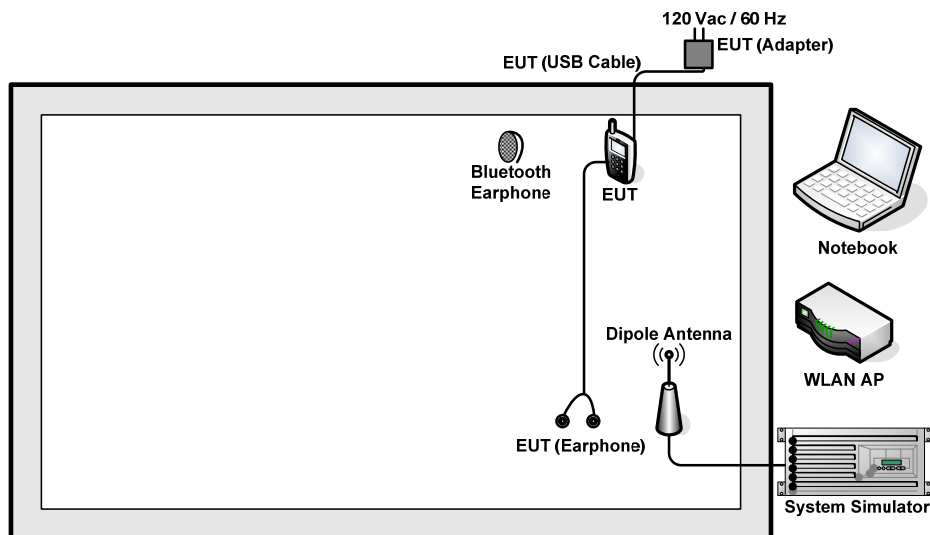

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.6 Description of RF Function Operation Test Setup

For WLAN RF test items, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 7.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.5 + 10 = 17.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

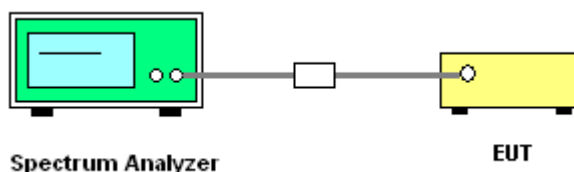

3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	10.04	0.5	Pass
06	2437	10.04	0.5	Pass
11	2462	10.04	0.5	Pass

Test Mode :	802.11g	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.32	0.5	Pass
06	2437	16.36	0.5	Pass
11	2462	16.32	0.5	Pass

Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%


Channel	Frequency (MHz)	2.4GHz 802.11n HT20 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	17.60	0.5	Pass
06	2437	17.60	0.5	Pass
11	2462	17.60	0.5	Pass

Test Mode :	802.11n HT40	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT40 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
03	2422	35.12	0.5	Pass
06	2437	35.04	0.5	Pass
09	2452	35.12	0.5	Pass


3.1.6 Test Result of 6dB Bandwidth Plots

6 dB Bandwidth Plot on 802.11b Channel 01

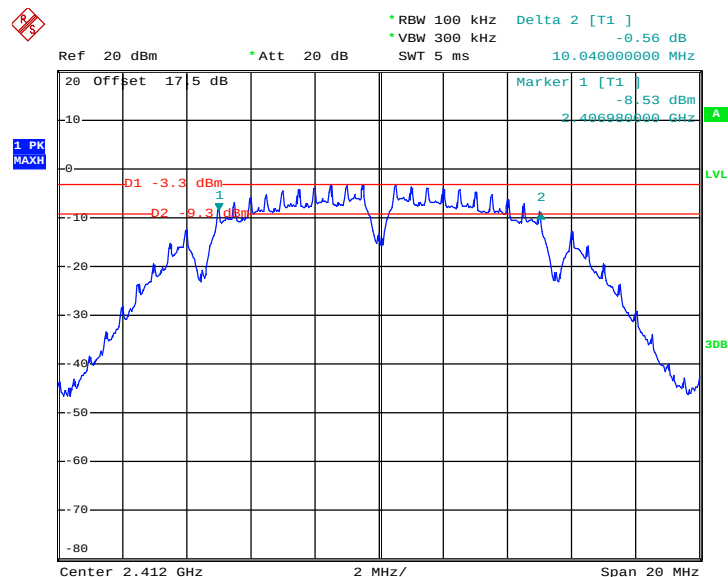

Date: 15.JUL.2013 21:45:45


6 dB Bandwidth Plot on 802.11b Channel 06

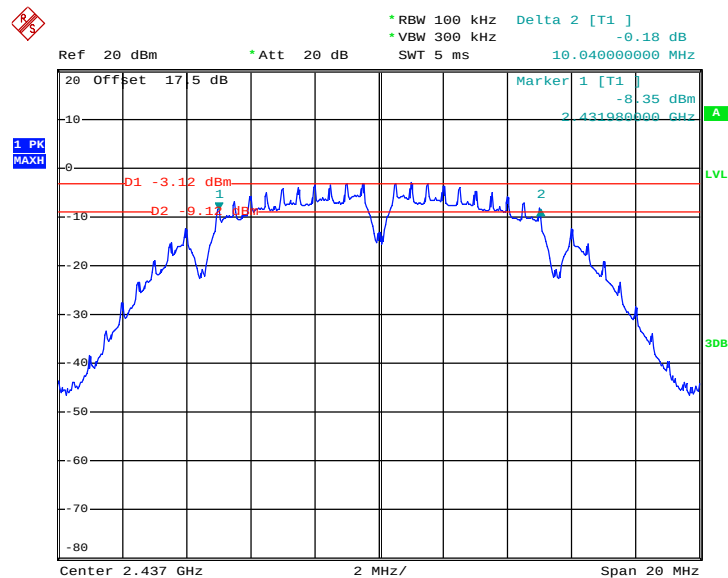

Date: 15.JUL.2013 21:50:12




6 dB Bandwidth Plot on 802.11b Channel 11

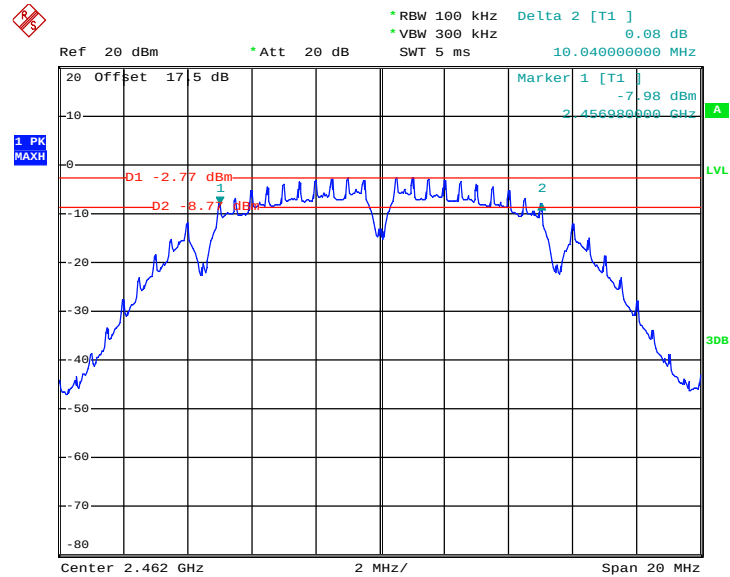

Date: 15.JUL.2013 21:55:48


6 dB Bandwidth Plot on 802.11g Channel 01

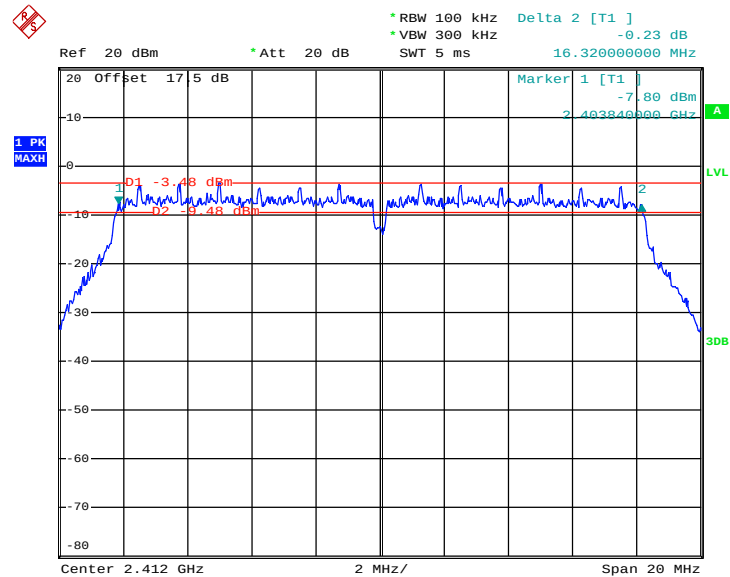

Date: 8.JUL.2013 00:26:07




6 dB Bandwidth Plot on 802.11g Channel 06

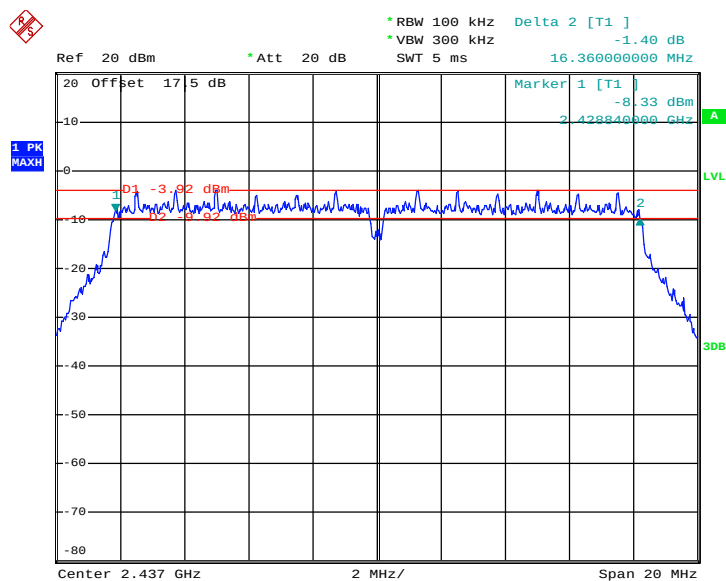


Date: 8.JUL.2013 00:32:58


6 dB Bandwidth Plot on 802.11g Channel 11

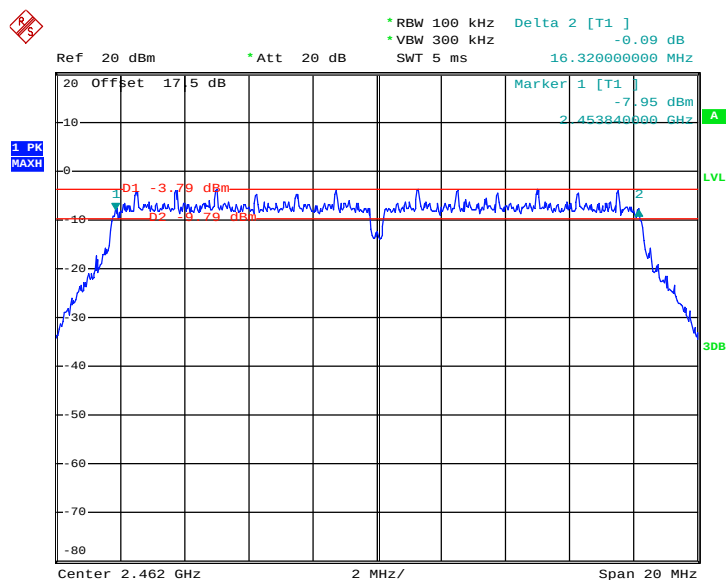

Date: 8.JUL.2013 00:39:54

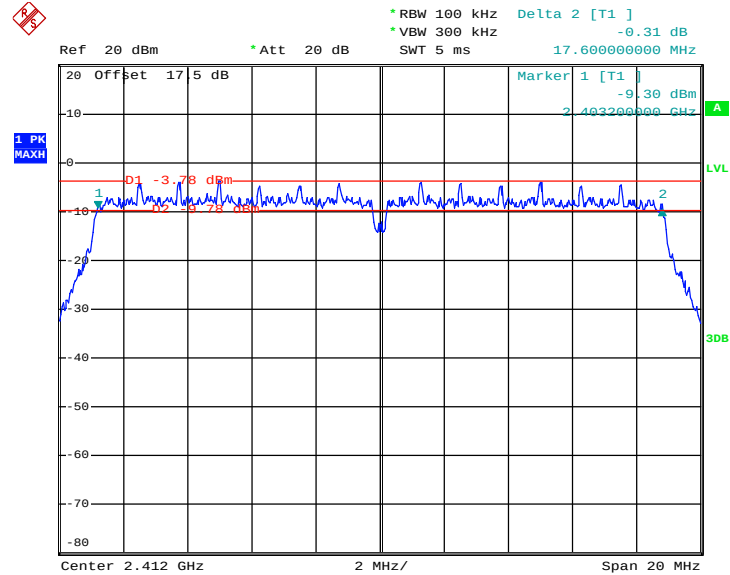
6 dB Bandwidth Plot on 2.4GHz 802.11n HT20 Channel 01


Date: 8.JUL.2013 00:47:30

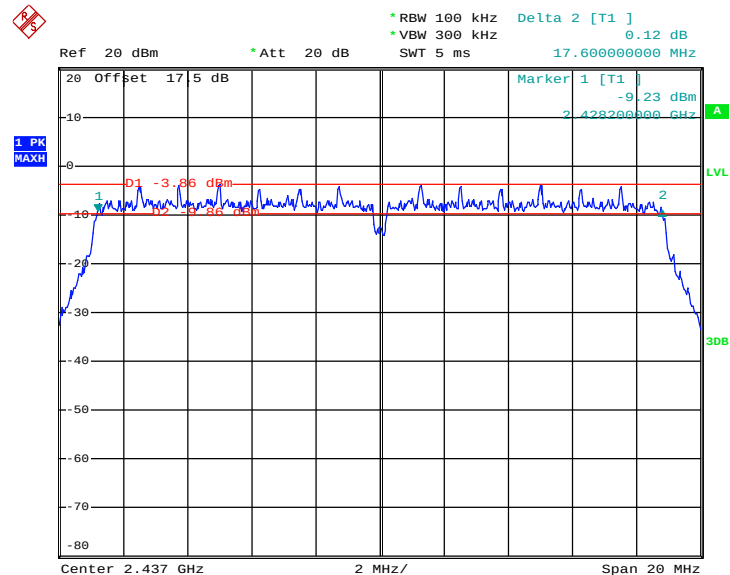6 dB Bandwidth Plot on 2.4GHz 802.11n HT20 Channel 06


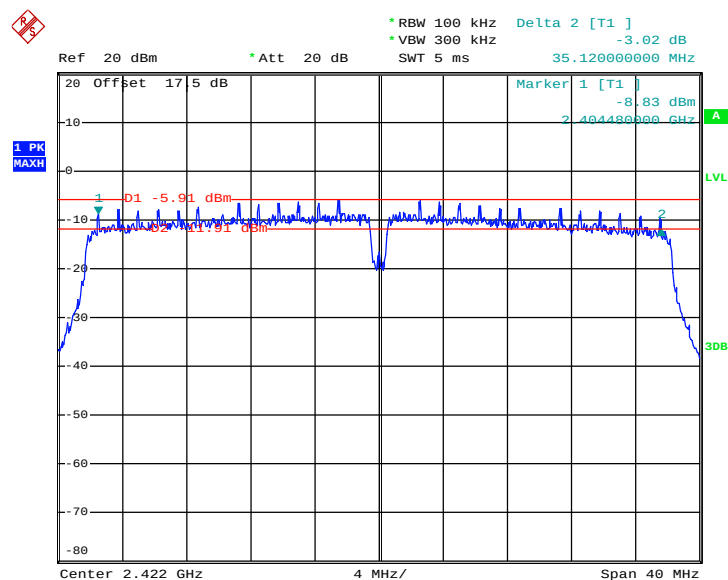
Date: 8.JUL.2013 00:53:13

6 dB Bandwidth Plot on 2.4GHz 802.11n HT20 Channel 11

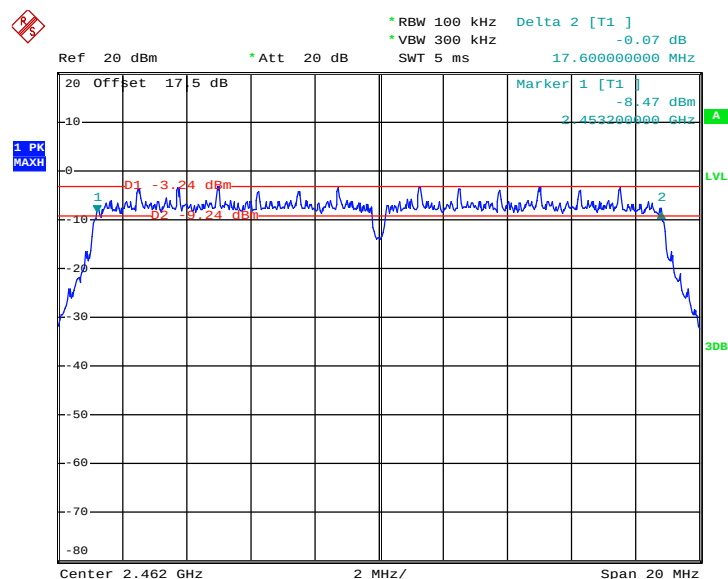


Date: 8.JUL.2013 00:58:43


6 dB Bandwidth Plot on 2.4GHz 802.11n HT40 Channel 03



Date: 8.JUL.2013 01:07:59

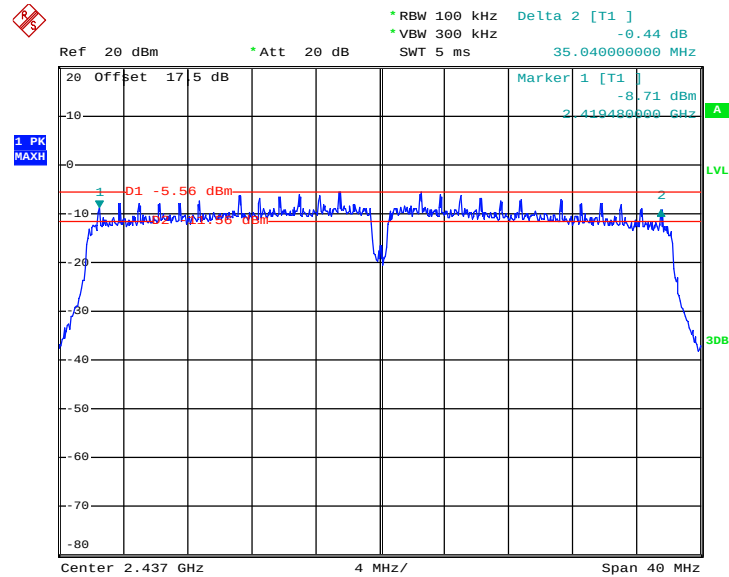6 dB Bandwidth Plot on 2.4GHz 802.11n HT40 Channel 06


Date: 8.JUL.2013 01:14:10

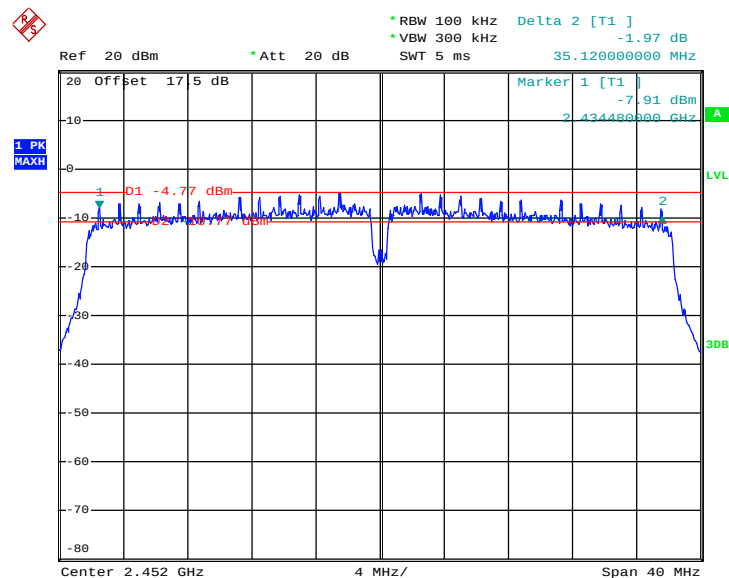6 dB Bandwidth Plot on 2.4GHz 802.11n HT40 Channel 09


Date: 8.JUL.2013 01:19:38

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

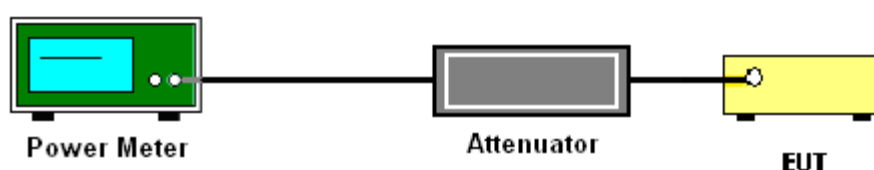

3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	8.31	30	Pass
06	2437	8.59	30	Pass
11	2462	9.09	30	Pass

Test Mode :	802.11g	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	18.44	30	Pass
06	2437	18.29	30	Pass
11	2462	19.18	30	Pass

Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.05	30	Pass
06	2437	18.9	30	Pass
11	2462	19.84	30	Pass

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT40 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
03	2422	19.31	30	Pass
06	2437	19.5	30	Pass
09	2452	19.87	30	Pass

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%
Duty Cycle:	98.59%	Duty Factor:	0.06dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	5.45
06	2437	5.65
11	2462	6.30

Test Mode :	802.11g	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%
Duty Cycle:	93.71%	Duty Factor:	0.28dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	8.00
06	2437	7.76
11	2462	8.70

Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%
Duty Cycle:	92.19%	Duty Factor:	0.35dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	7.97
06	2437	7.78
11	2462	8.78



Test Mode :	802.11n HT40	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%
Duty Cycle:	85.64%	Duty Factor:	0.67dB

Channel	Frequency (MHz)	802.11n HT40 Average Output Power (dBm)
03	2422	7.87
06	2437	7.99
09	2452	8.64

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100KHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

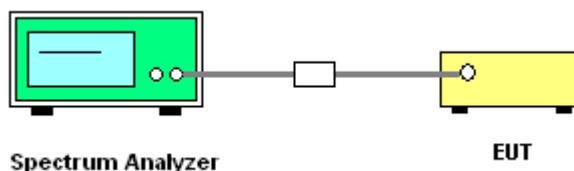

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-3.47	-17.91	8	Pass
06	2437	-3.24	-17.12	8	Pass
11	2462	-2.74	-14.66	8	Pass

Test Mode :	802.11g	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-3.64	-16.90	8	Pass
06	2437	-4.14	-18.12	8	Pass
11	2462	-3.92	-17.38	8	Pass

Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-4.10	-17.81	8	Pass
06	2437	-4.05	-18.57	8	Pass
11	2462	-3.29	-16.92	8	Pass

Test Mode :	802.11n HT40	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%


Channel	Frequency (MHz)	802.11n HT40 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
03	2422	-5.96	-20.17	8	Pass
06	2437	-5.93	-19.99	8	Pass
09	2452	-5.01	-18.33	8	Pass

Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.


3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on 802.11b Channel 01

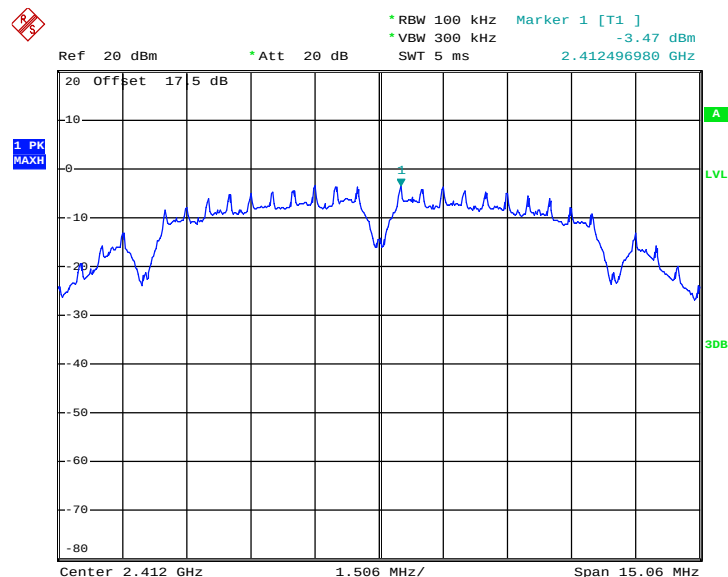


Date: 15.JUL.2013 21:46:15


PSD 100kHz Plot on 802.11b Channel 06

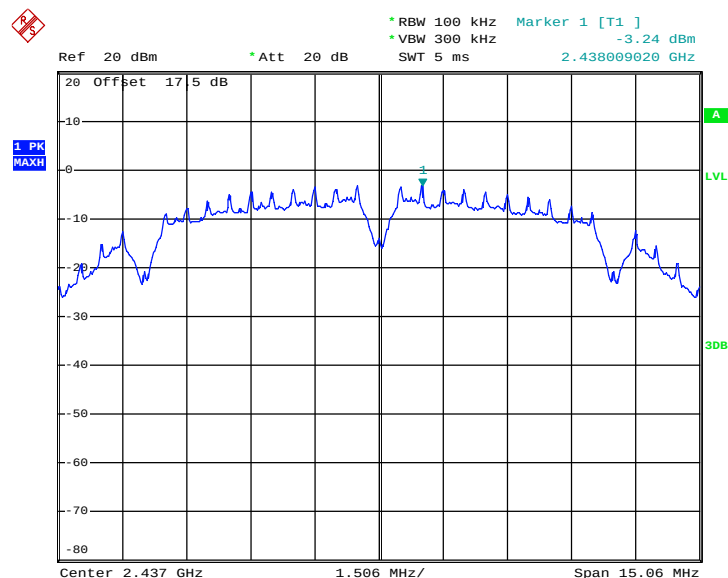

Date: 15.JUL.2013 21:50:43

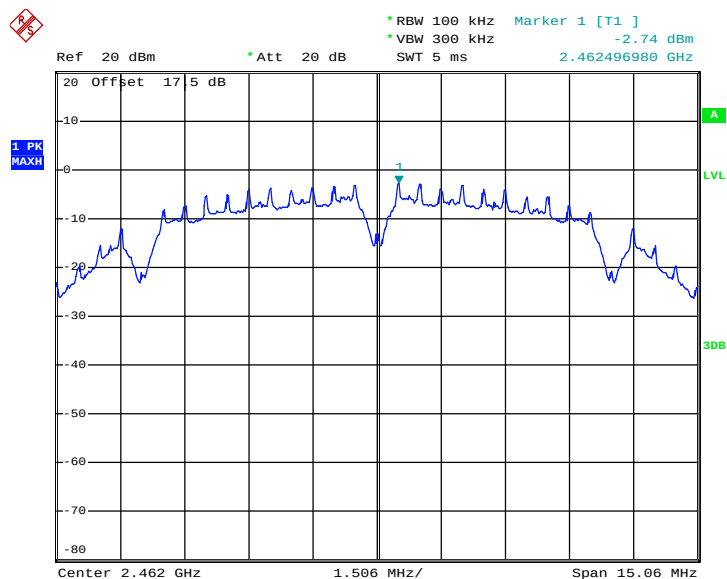
PSD 100kHz Plot on 802.11b Channel 11


Date: 15.JUL.2013 21:56:19

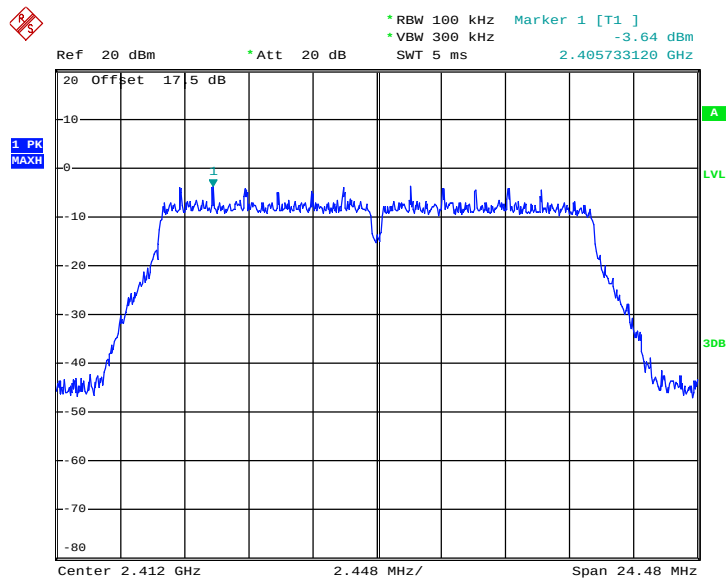PSD 100kHz Plot on 802.11g Channel 01


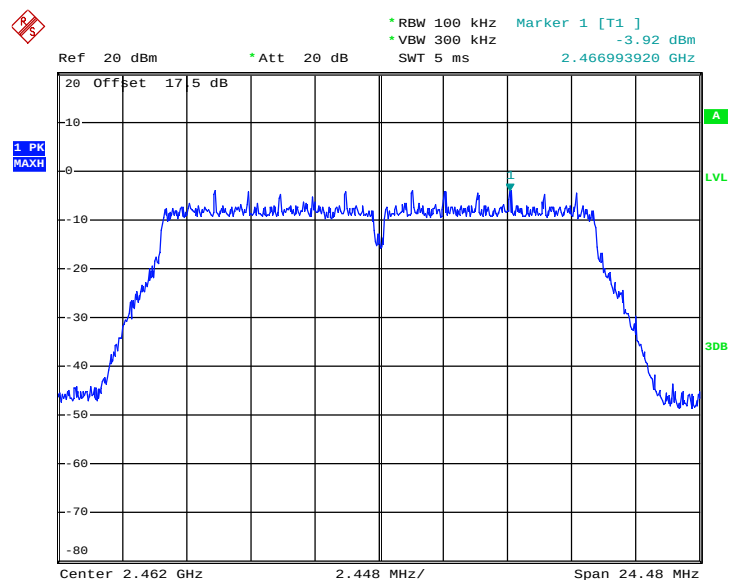
Date: 8.JUL.2013 00:26:58

PSD 100kHz Plot on 802.11g Channel 06

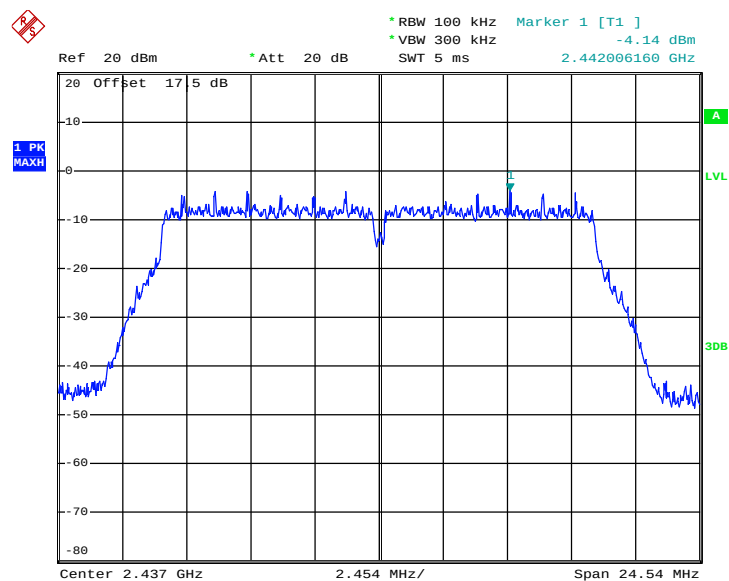


Date: 8.JUL.2013 00:34:48


PSD 100kHz Plot on 802.11g Channel 11




Date: 8.JUL.2013 00:40:39

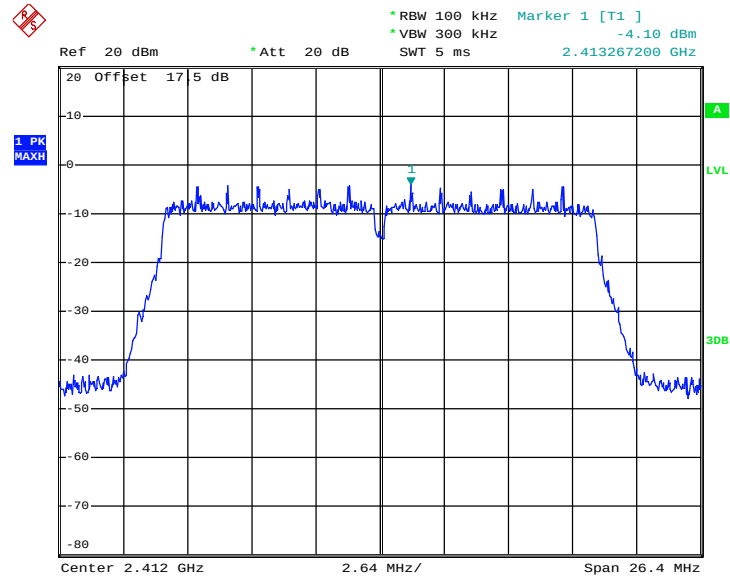PSD 100kHz Plot on 802.11n HT20 Channel 01


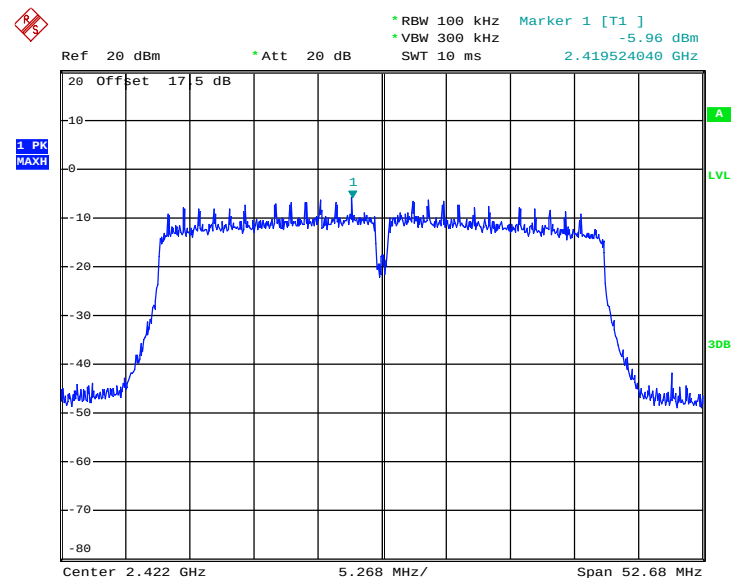
Date: 8.JUL.2013 00:48:23

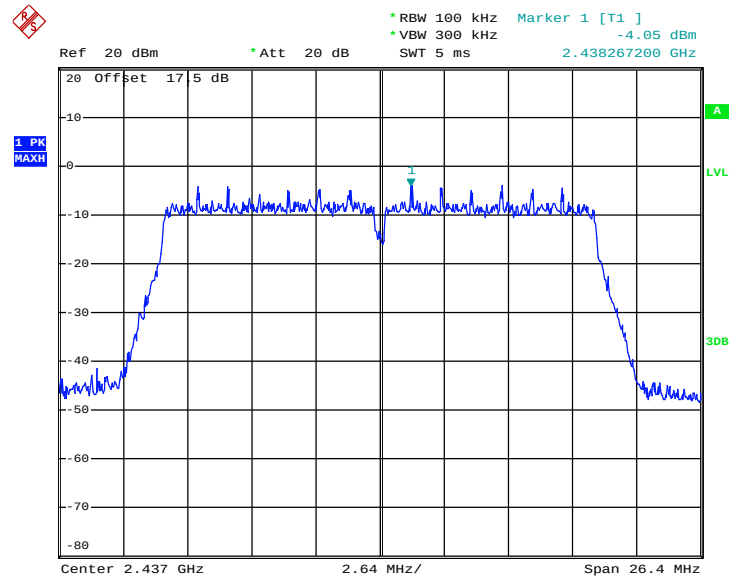PSD 100kHz Plot on 802.11n HT20 Channel 06


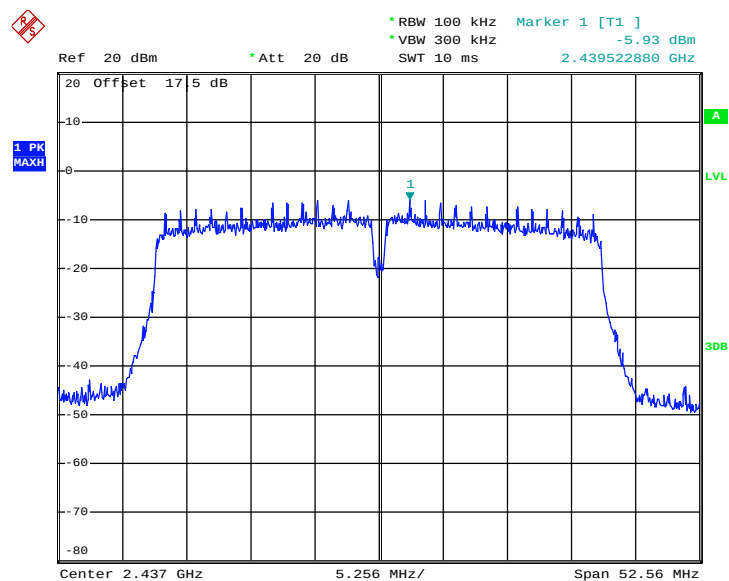
Date: 8.JUL.2013 00:53:58

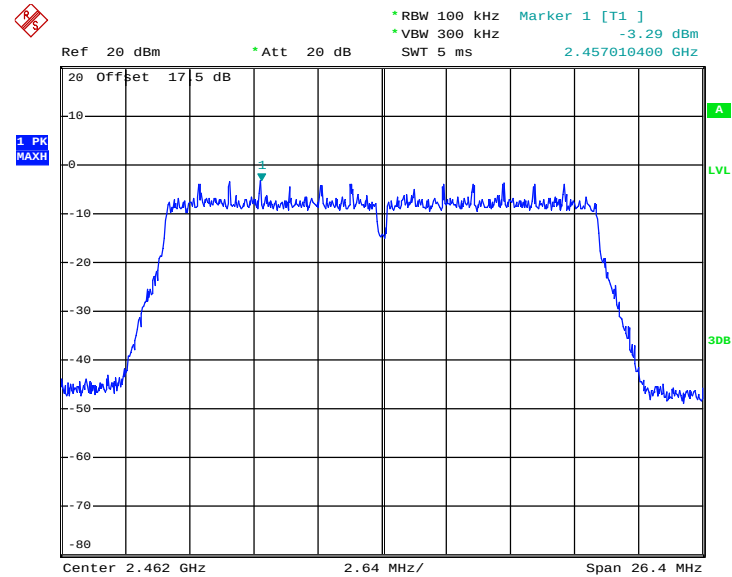PSD 100kHz Plot on 802.11n HT20 Channel 11


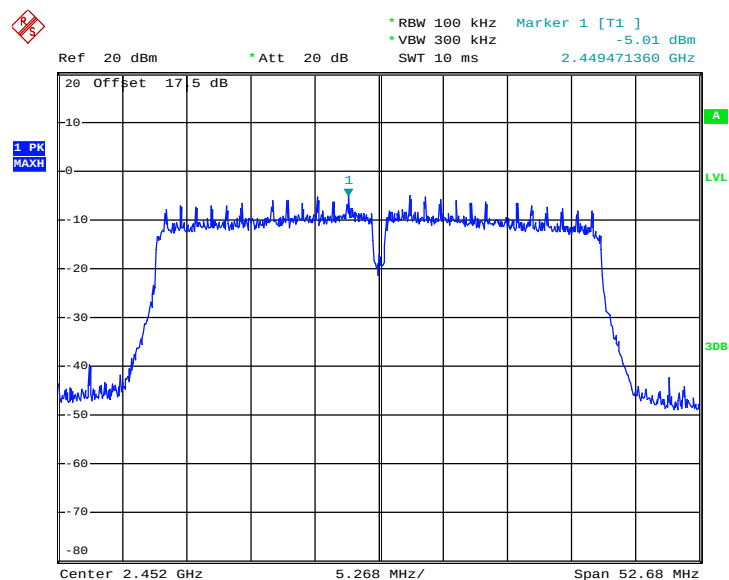
Date: 8.JUL.2013 00:59:35

PSD 100kHz Plot on 802.11n HT40 Channel 03


Date: 8.JUL.2013 01:08:50

PSD 100kHz Plot on 802.11n HT40 Channel 06


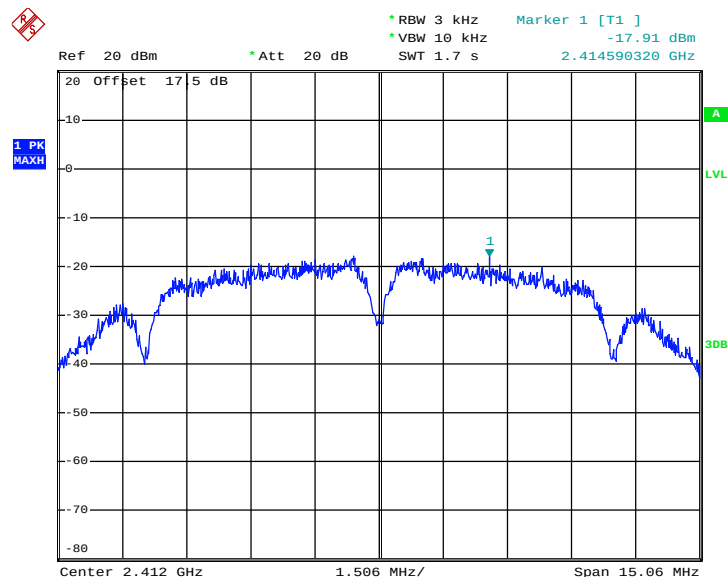
Date: 8.JUL.2013 01:15:07

PSD 100kHz Plot on 802.11n HT40 Channel 09


Date: 8.JUL.2013 01:20:23


3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on 802.11b Channel 01




Date: 15.JUL.2013 21:46:06


PSD 3kHz Plot on 802.11b Channel 06

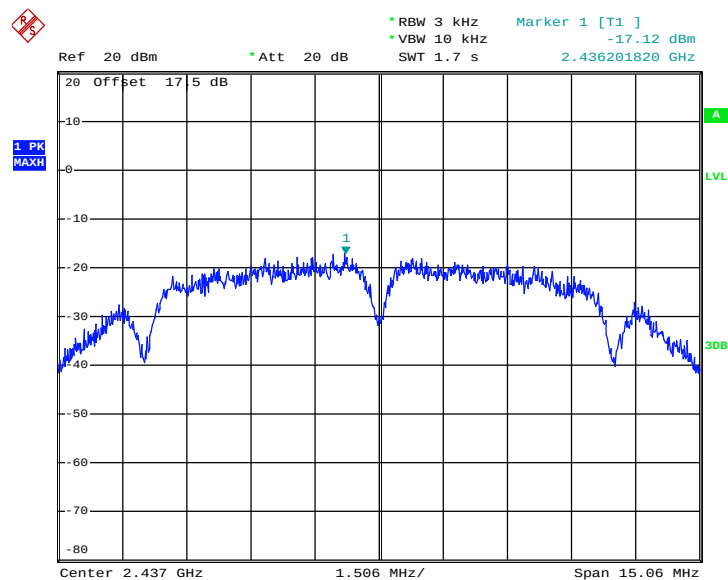

Date: 15.JUL.2013 21:50:34

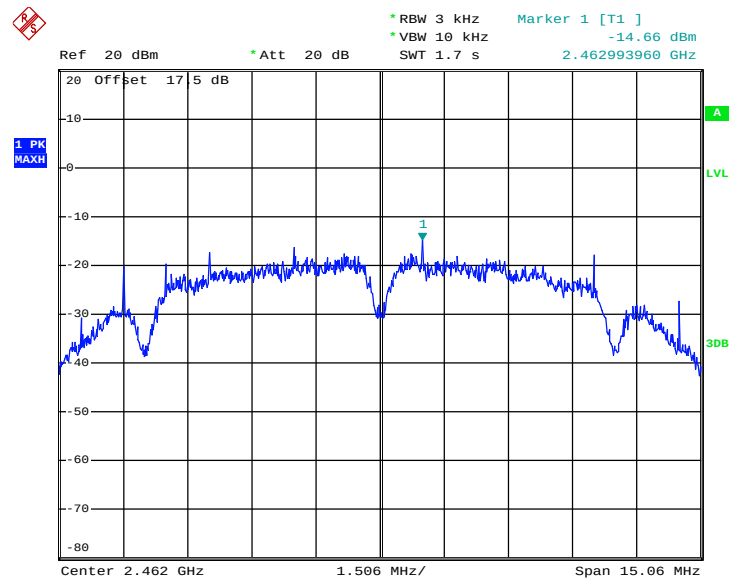PSD 3kHz Plot on 802.11b Channel 11


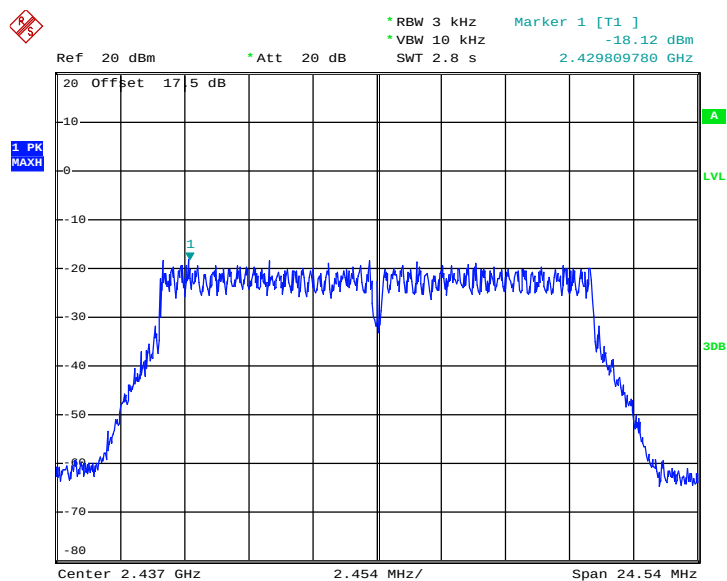
Date: 15.JUL.2013 21:56:10

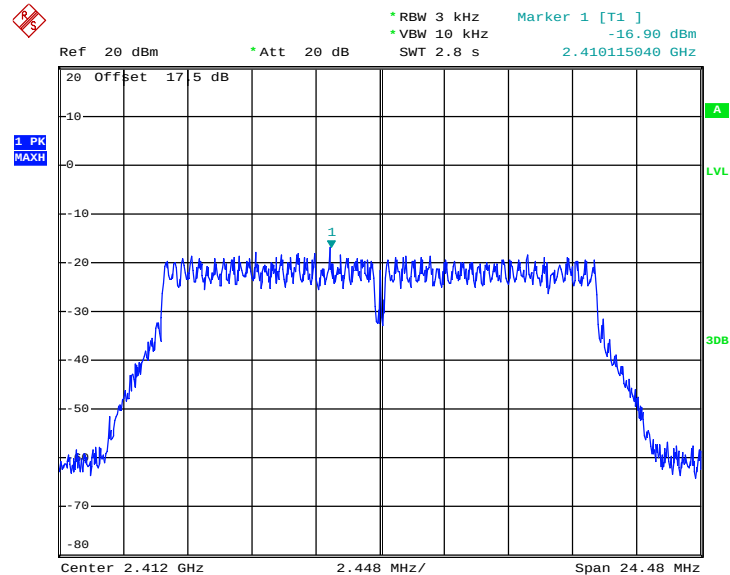PSD 3kHz Plot on 802.11g Channel 01


Date: 8.JUL.2013 00:26:36




PSD 3kHz Plot on 802.11g Channel 06




Date: 8.JUL.2013 00:33:33


PSD 3kHz Plot on 802.11g Channel 11

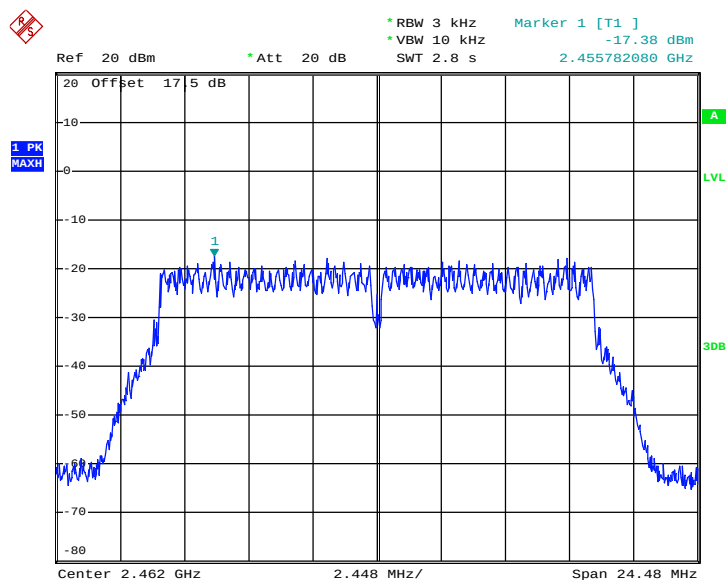


Date: 8.JUL.2013 00:40:22

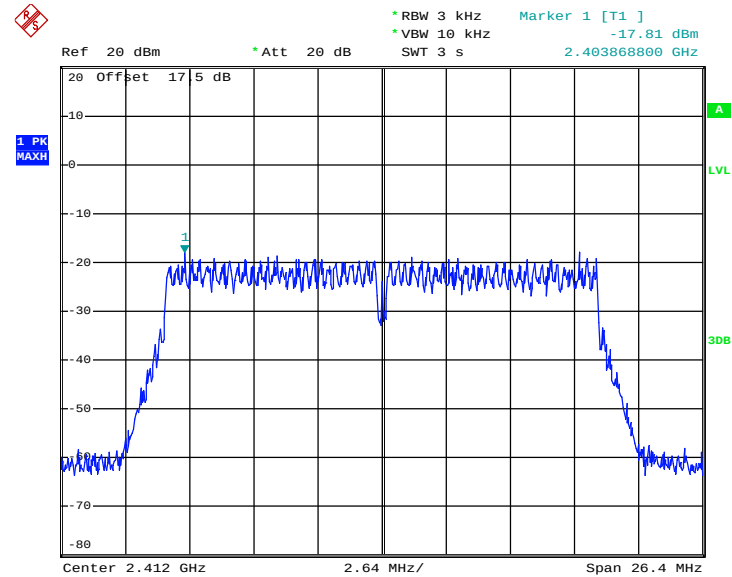PSD 3kHz Plot on 802.11n HT20 Channel 01


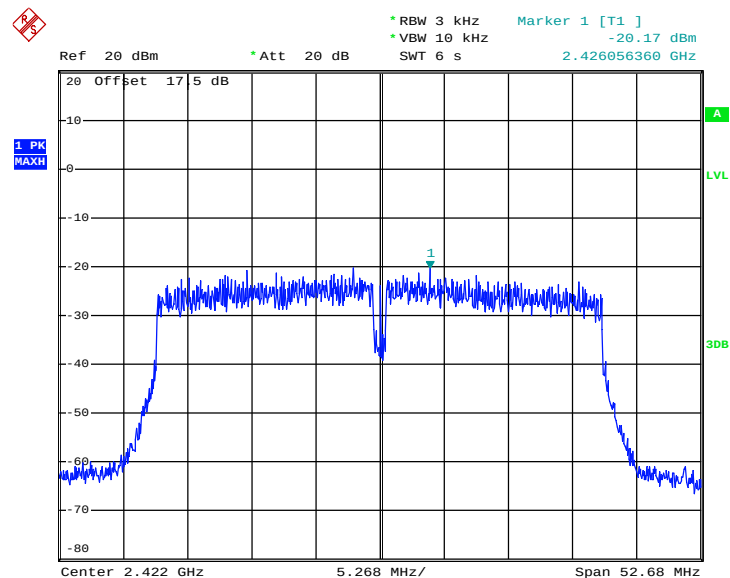
Date: 8.JUL.2013 00:48:02

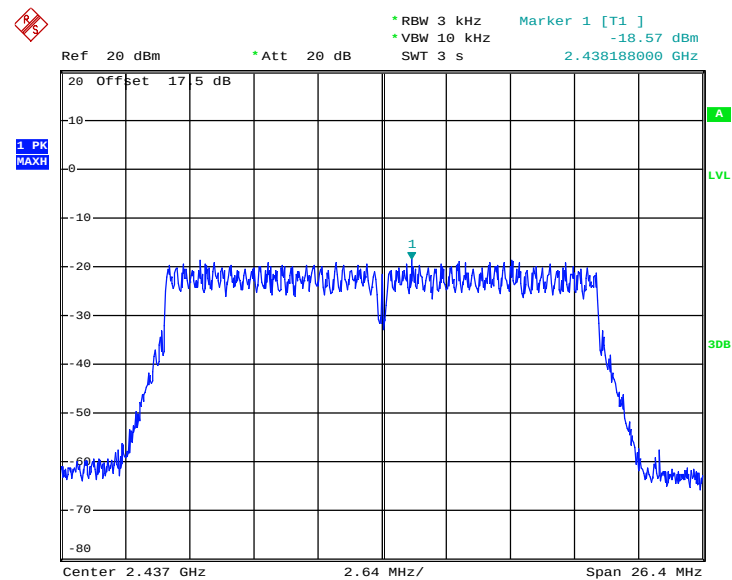PSD 3kHz Plot on 802.11n HT20 Channel 06


Date: 8.JUL.2013 00:53:40

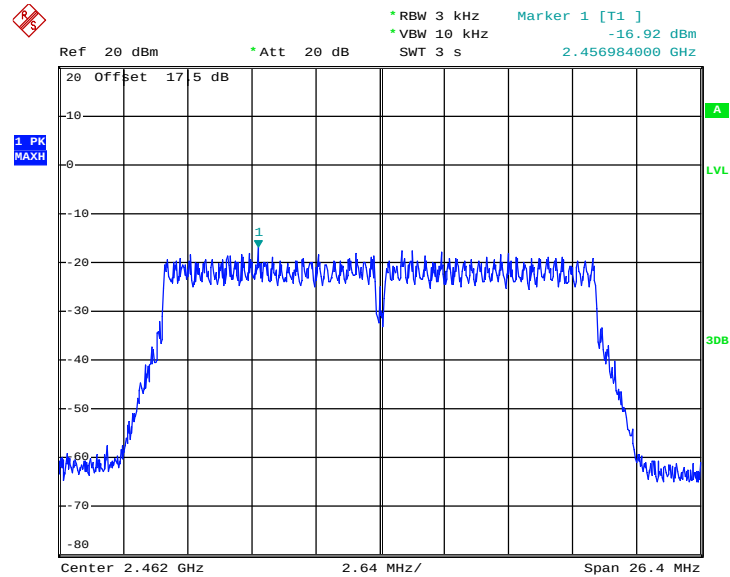PSD 3kHz Plot on 802.11n HT20 Channel 11


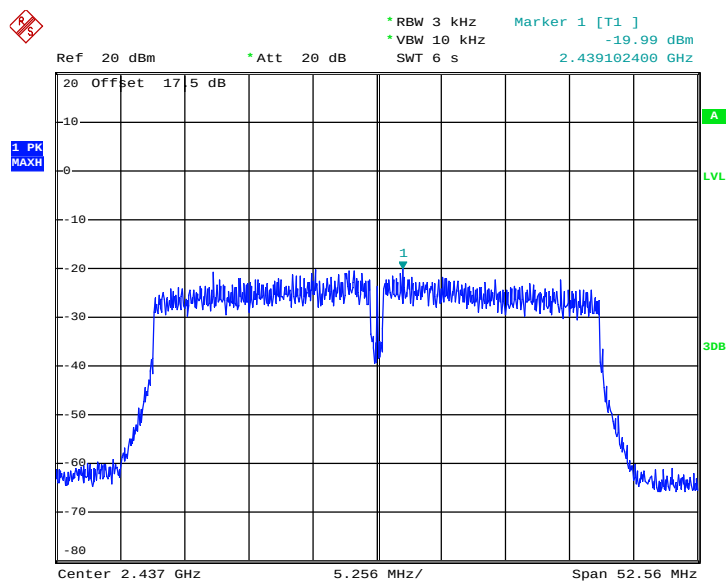
Date: 8.JUL.2013 00:59:14

PSD 3kHz Plot on 802.11n HT40 Channel 03


Date: 8.JUL.2013 01:08:33




PSD 3kHz Plot on 802.11n HT40 Channel 06



Date: 8.JUL.2013 01:14:58

PSD 3kHz Plot on 802.11n HT40 Channel 09

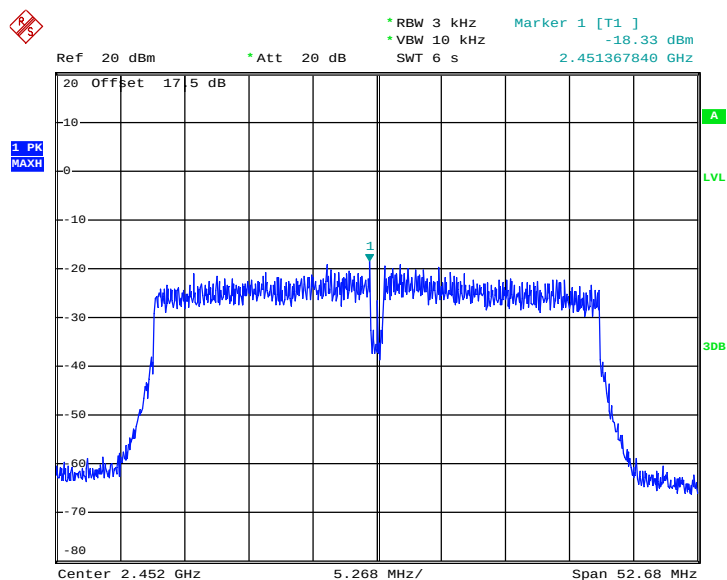

Date: 8.JUL.2013 01:20:07

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval.
5. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
6. Measure and record the results in the test report.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

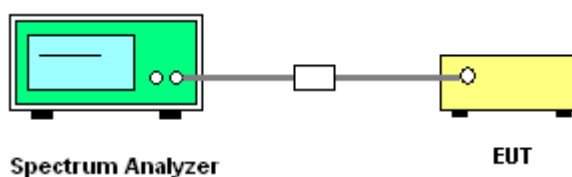

3.4.5 Test Plots of Conducted Spurious at Band Edges


Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Fly Chen

Low Band Edge Plot on 802.11b Channel 01

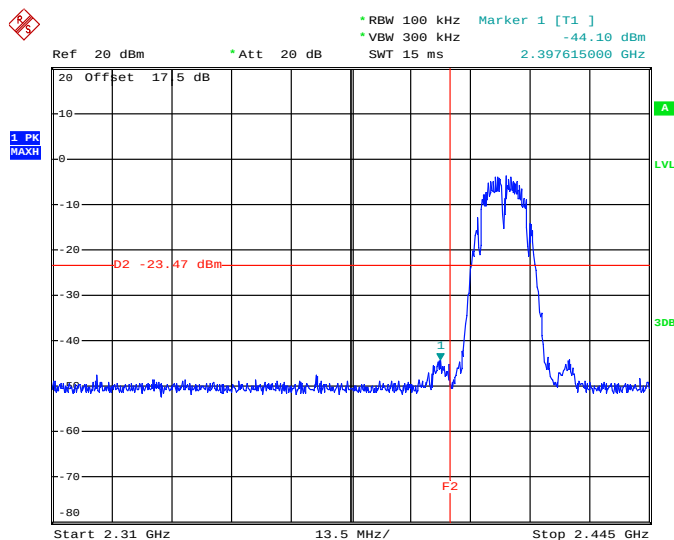

Date: 15.JUL.2013 21:46:29


High Band Edge Plot on 802.11b Channel 11

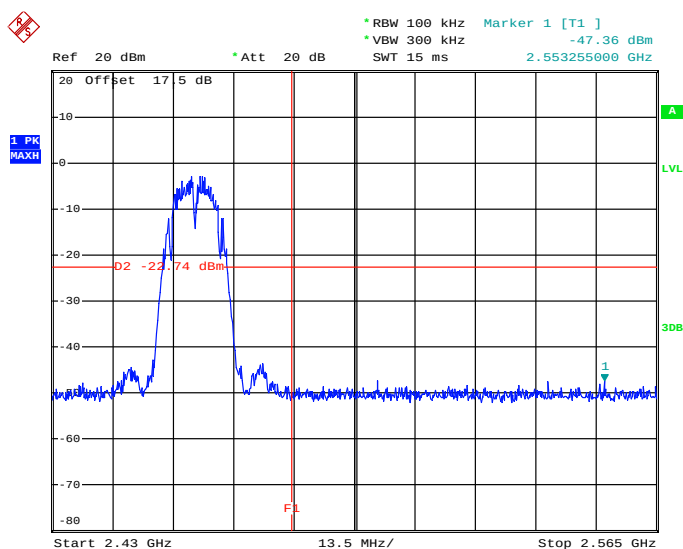

Date: 15.JUL.2013 21:56:32


Test Mode :	802.11g	Temperature :	24~26℃
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Fly Chen

Low Band Edge Plot on 802.11g Channel 01

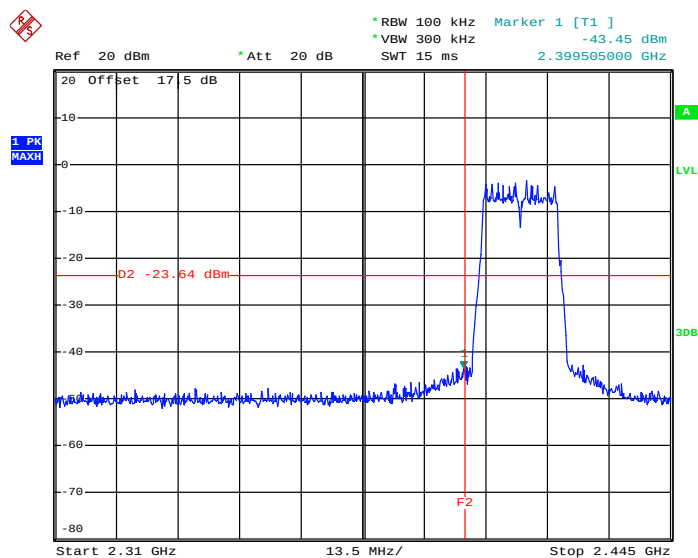


Date: 8.JUL.2013 00:27:27

High Band Edge Plot on 802.11g Channel 11

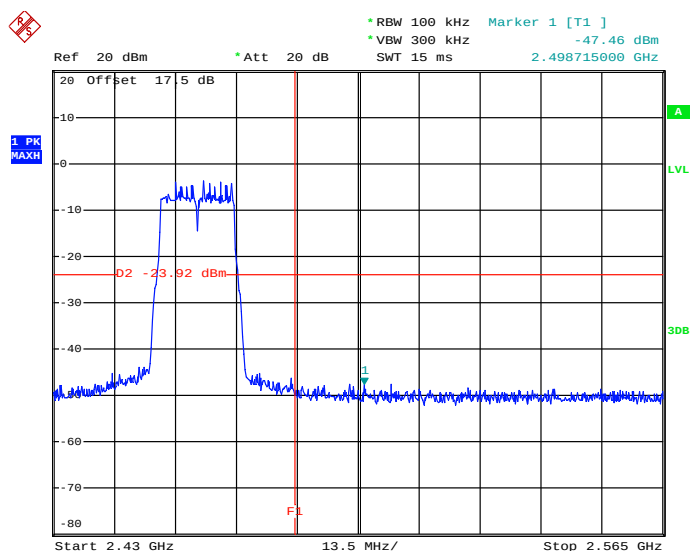


Date: 8.JUL.2013 00:41:06

Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Fly Chen

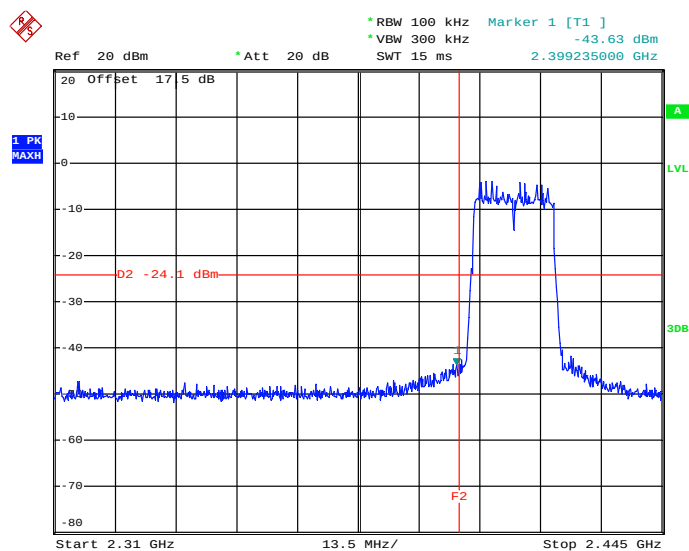
Low Band Edge Plot on 802.11n HT20 Channel 01


Date: 8.JUL.2013 00:49:02

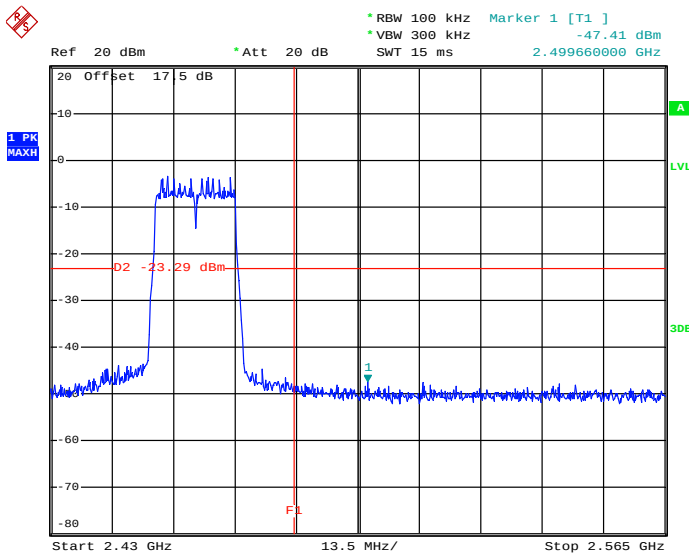
High Band Edge Plot on 802.11n HT20 Channel 11


Date: 8.JUL.2013 01:00:03

Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	03 and 09	Test Engineer :	Fly Chen

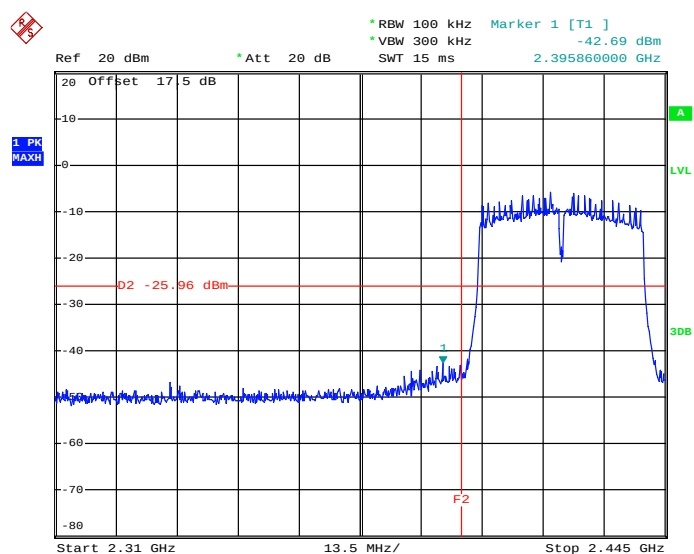Low Band Edge Plot on 802.11n HT40 Channel 03


Date: 8.JUL.2013 01:09:18

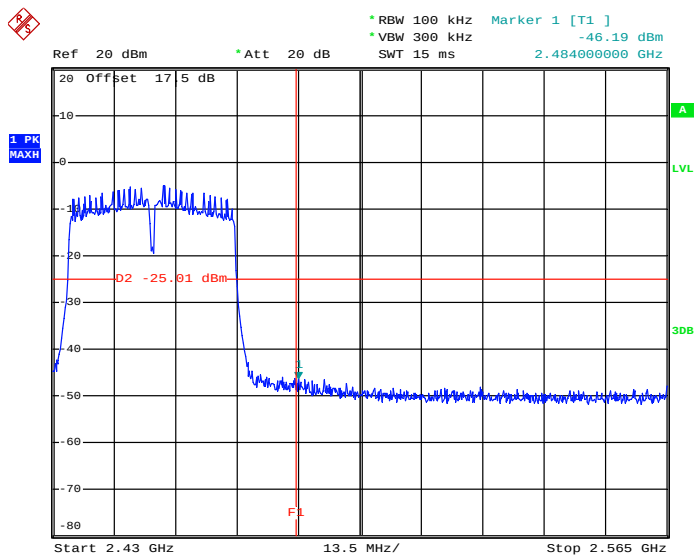High Band Edge Plot on 802.11n HT40 Channel 09


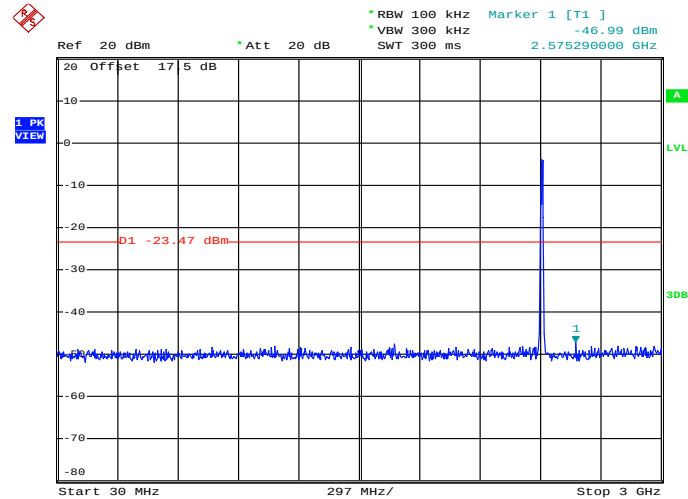
Date: 8.JUL.2013 01:21:17

3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Fly Chen

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01




Date: 15.JUL.2013 21:46:48

802.11b 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 01

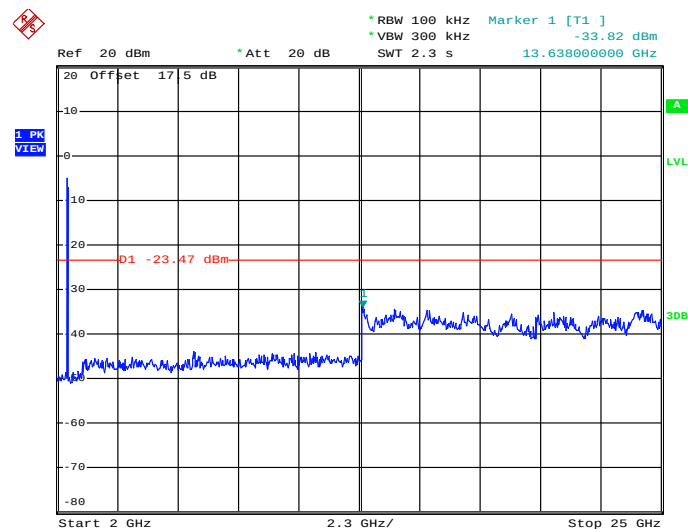


Date: 15.JUL.2013 21:47:07

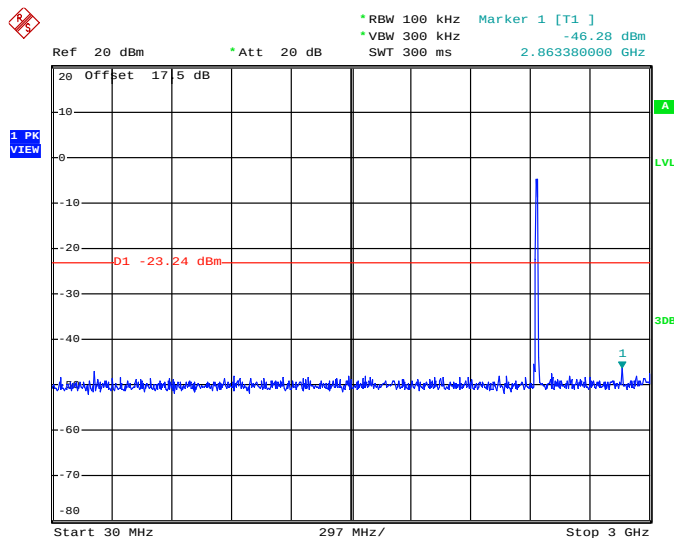802.11b 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 06


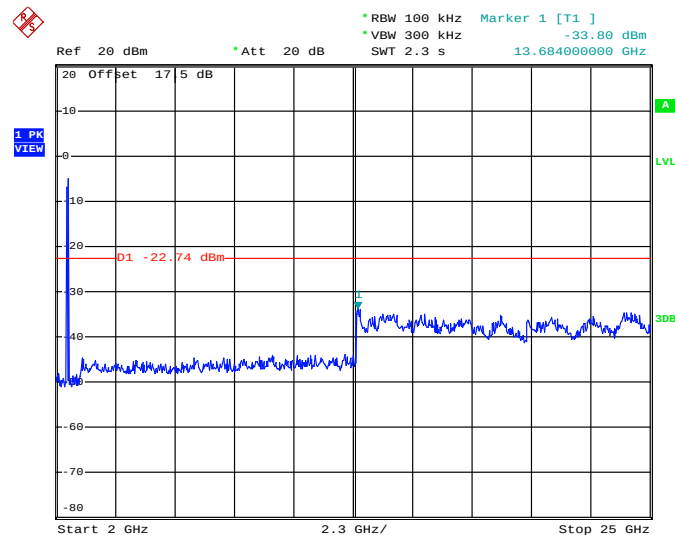
Date: 15.JUL.2013 21:51:02

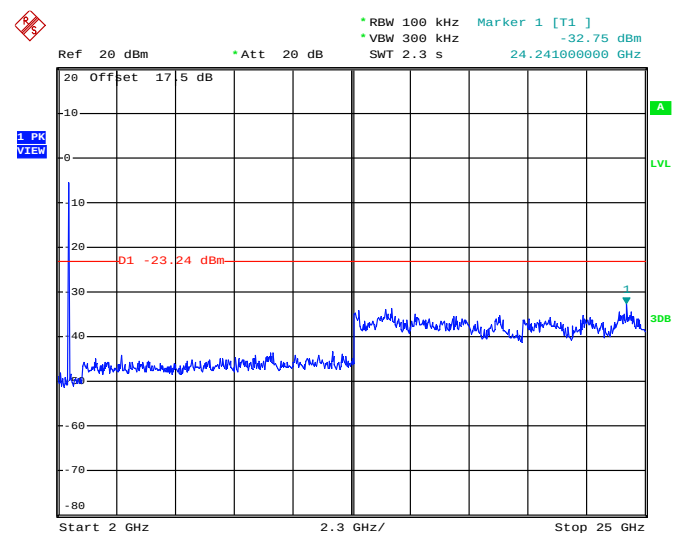802.11b 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 06


Date: 15.JUL.2013 21:51:20

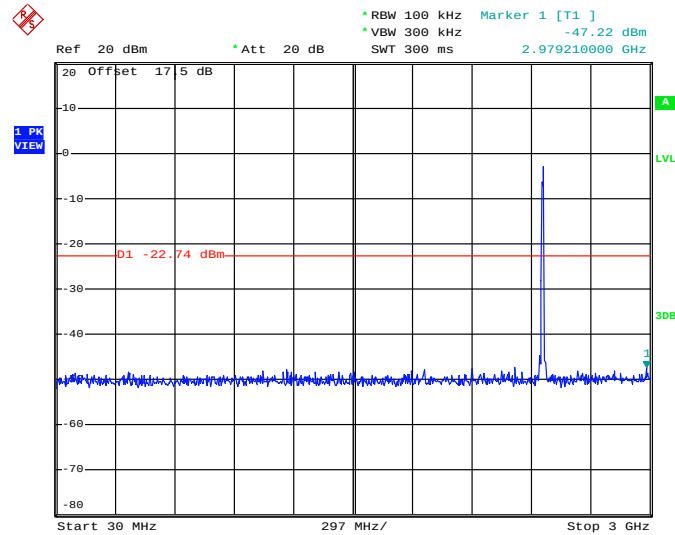
802.11b 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 15.JUL.2013 21:56:52


802.11b 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 15.JUL.2013 21:57:10


Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Fly Chen

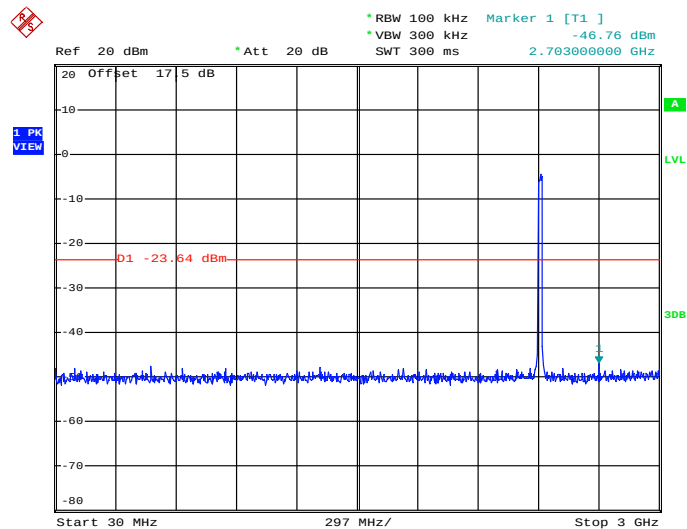802.11g 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 01


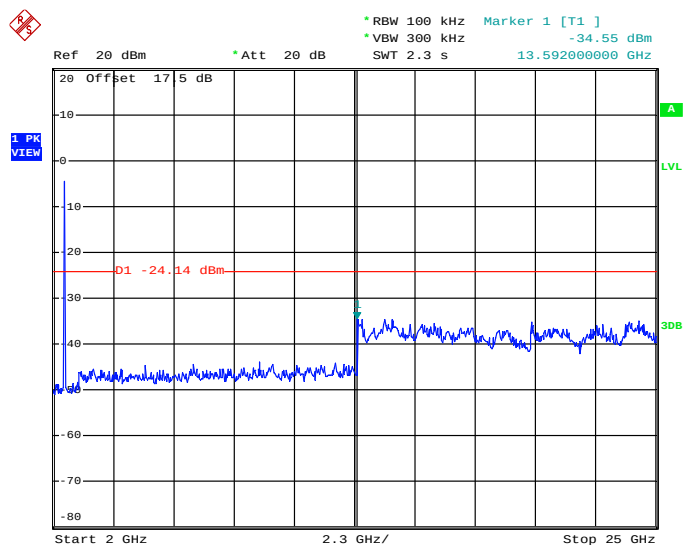
Date: 8.JUL.2013 00:28:01

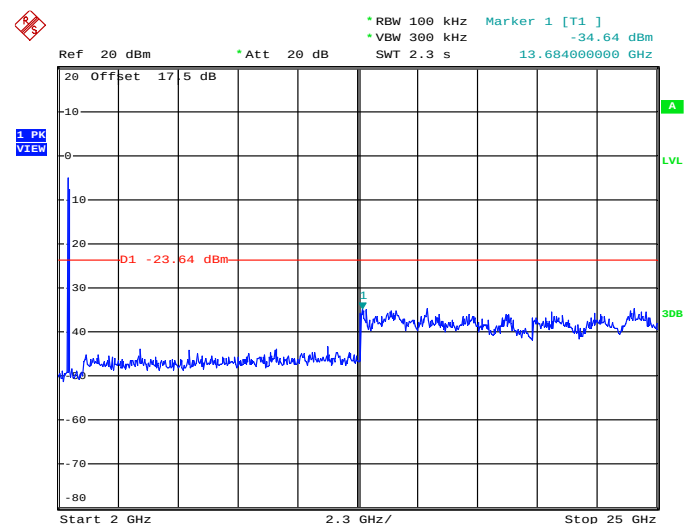802.11g 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 01


Date: 8.JUL.2013 00:28:19

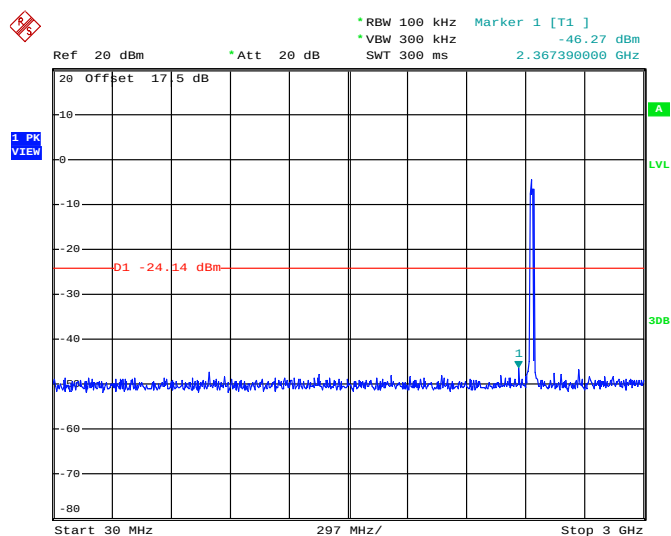802.11g 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 06


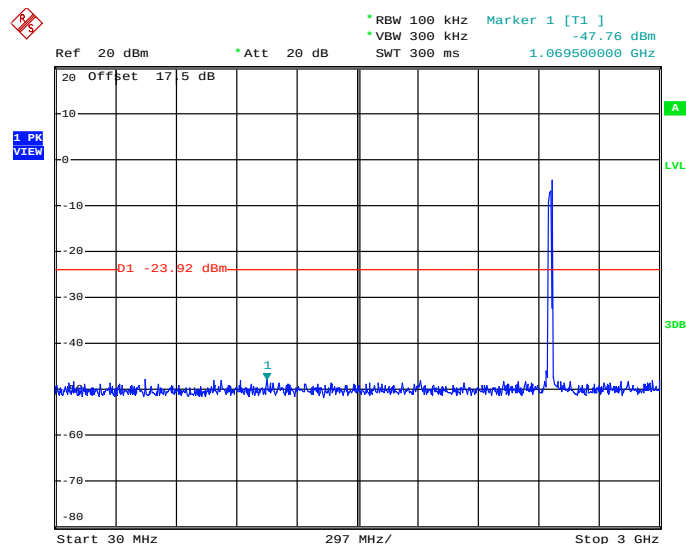
Date: 8.JUL.2013 00:35:26

802.11g 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 06


Date: 8.JUL.2013 00:35:45

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11



Date: 8.JUL.2013 00:41:40


802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

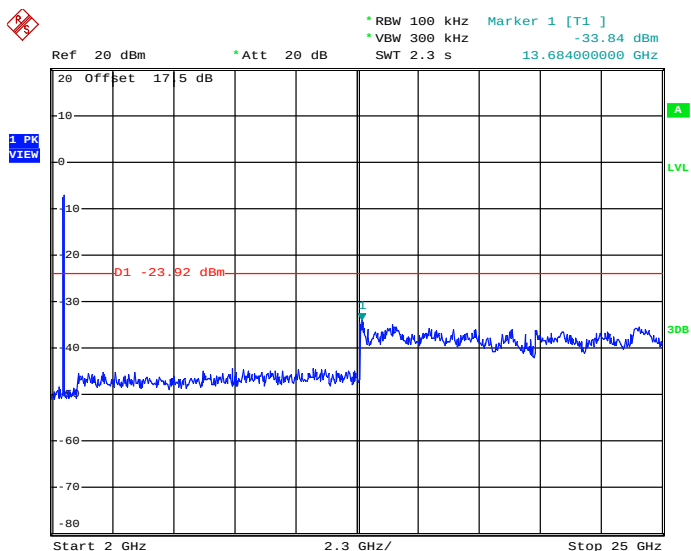


Date: 8.JUL.2013 00:41:59

Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Fly Chen

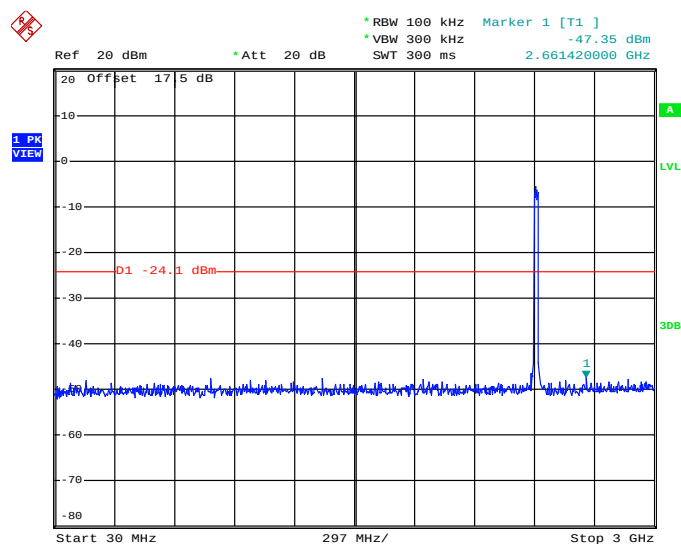802.11n HT20 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 01


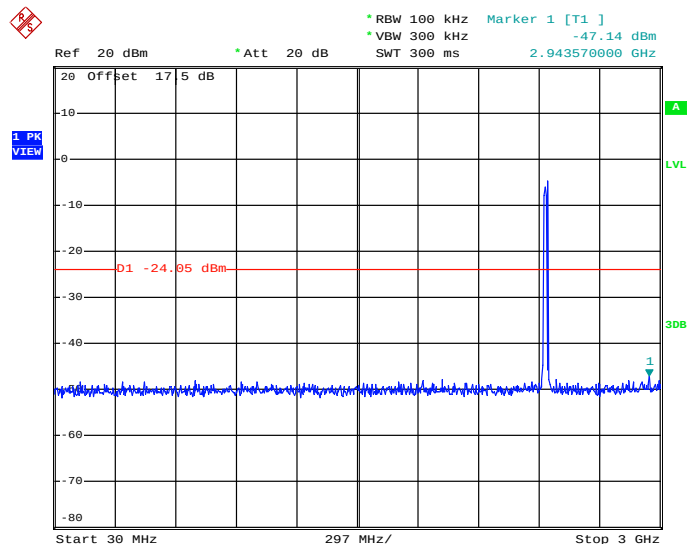
Date: 8.JUL.2013 00:49:39

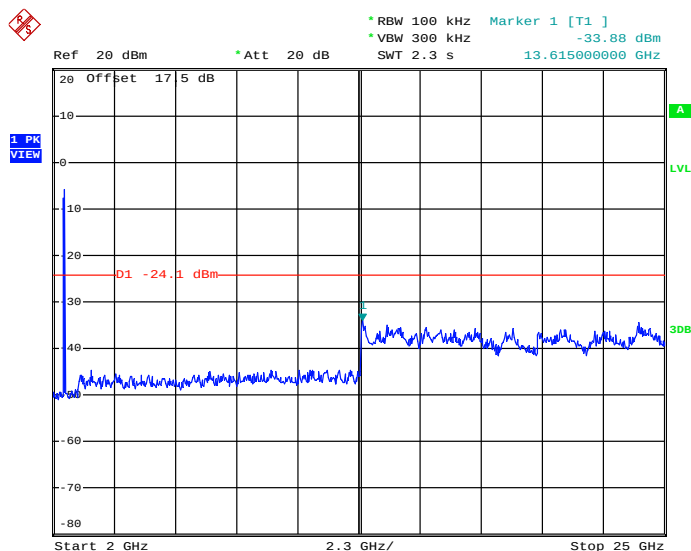802.11n HT20 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 01


Date: 8.JUL.2013 00:49:57

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06




Date: 8.JUL.2013 00:55:15

802.11n HT20 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 06

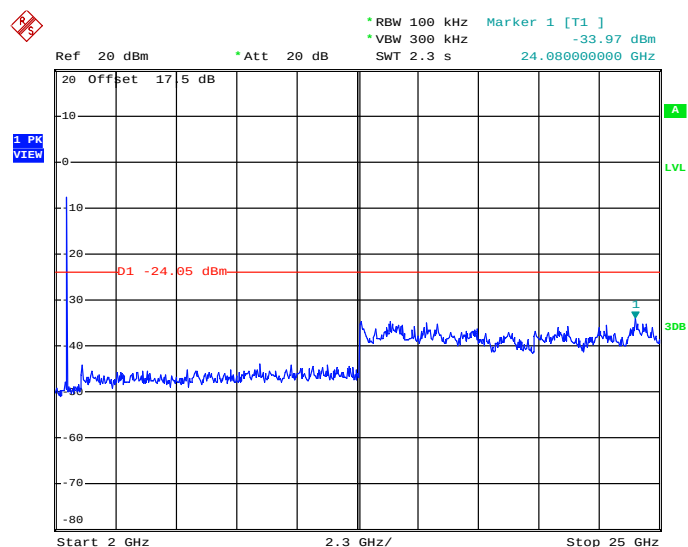

Date: 8.JUL.2013 00:55:33

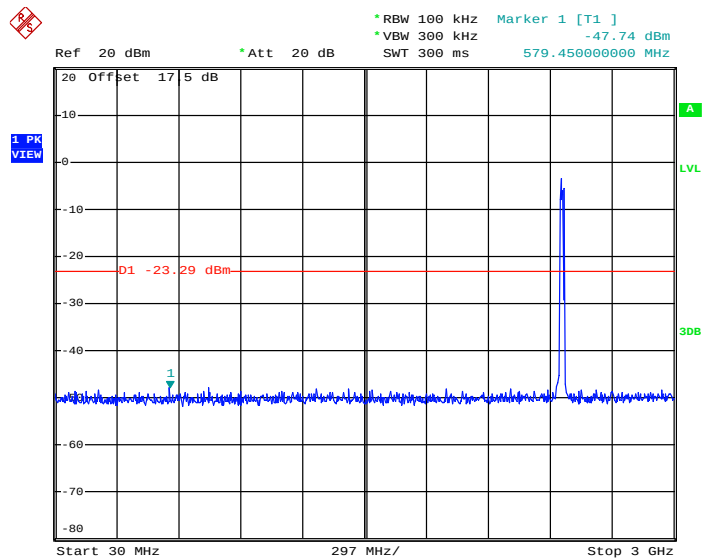
802.11n HT20 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 8.JUL.2013 01:00:31

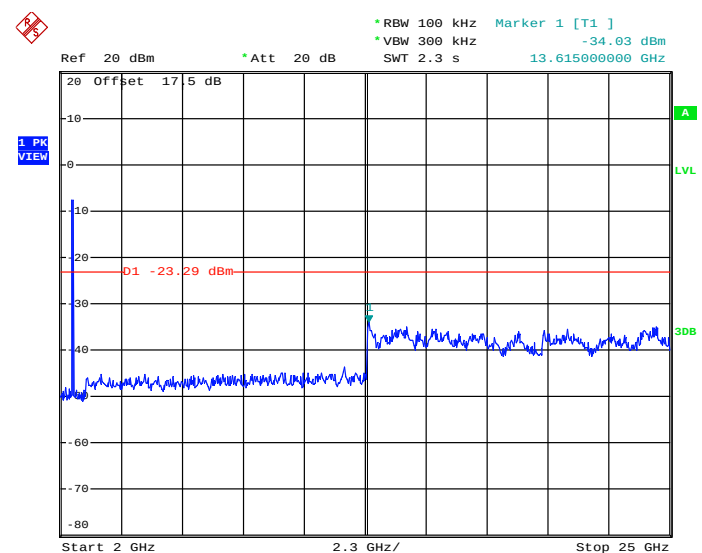
802.11n HT20 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 8.JUL.2013 01:00:50


Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	03, 06, 09	Test Engineer :	Fly Chen

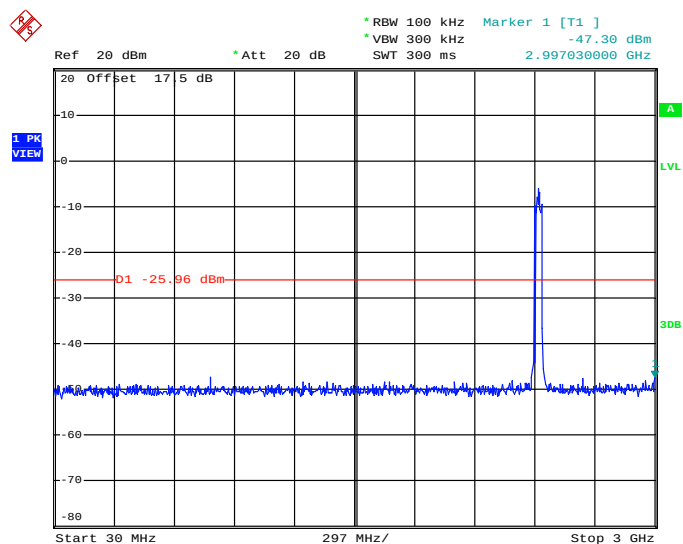802.11n HT40 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 03


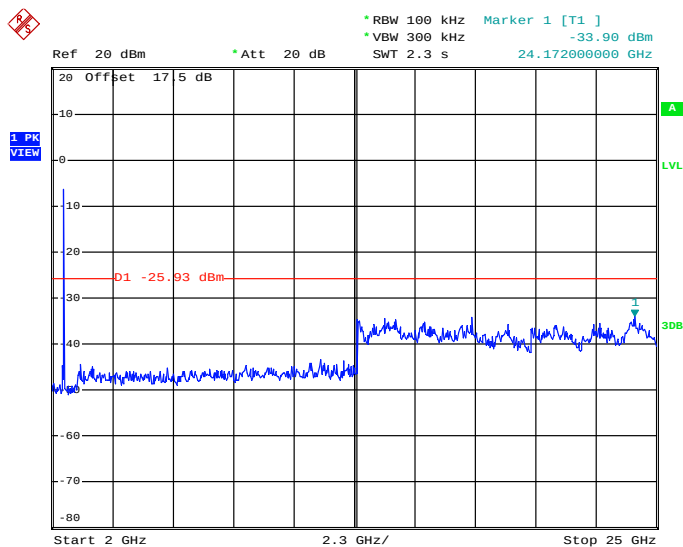
Date: 8.JUL.2013 01:09:44

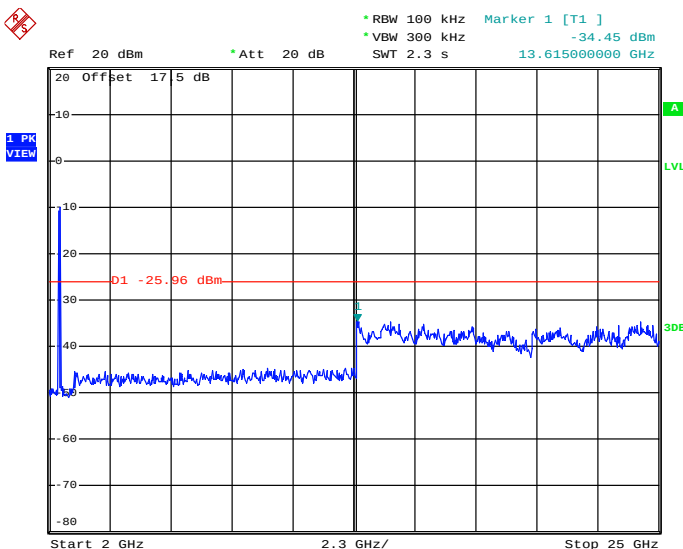802.11n HT40 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 03


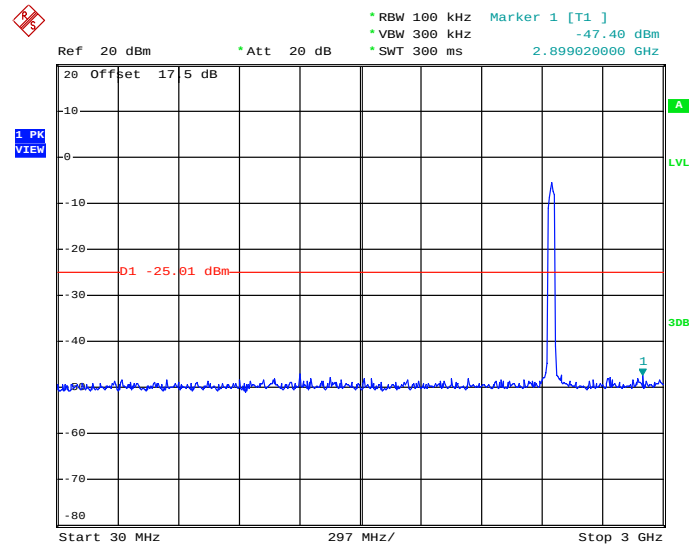
Date: 8.JUL.2013 01:10:03

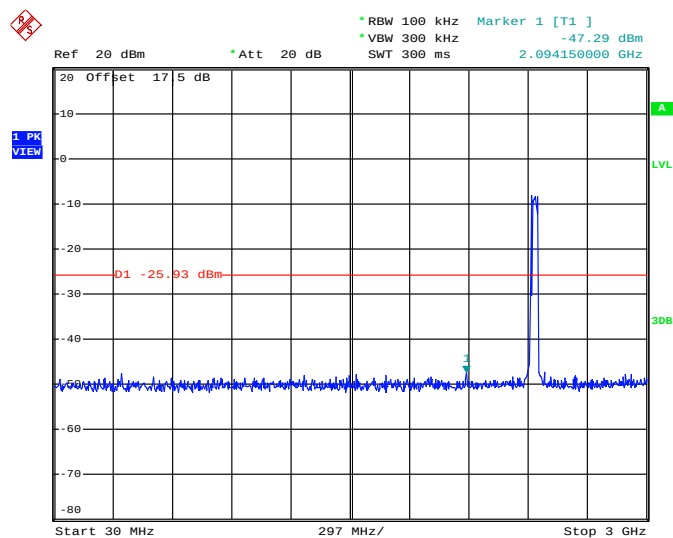802.11n HT40 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 06


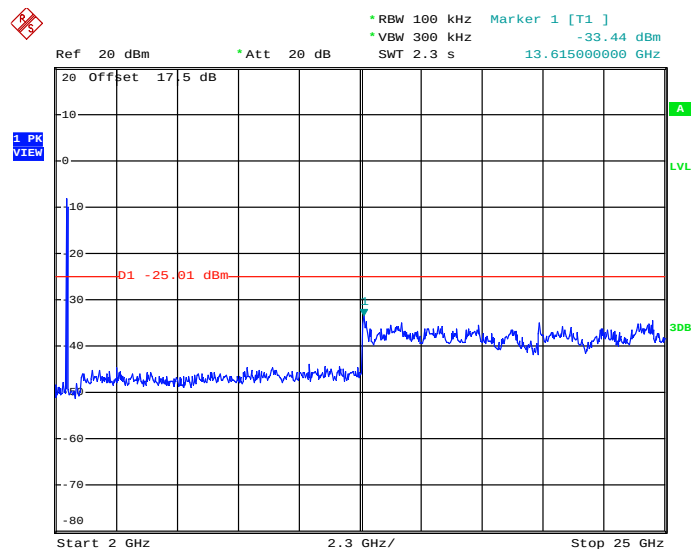
Date: 8.JUL.2013 01:15:37

802.11n HT40 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 06


Date: 8.JUL.2013 01:15:56

802.11n HT40 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 09


Date: 22.JUL.2013 16:57:43

802.11n HT40 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 09


Date: 8.JUL.2013 01:22:02

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	98.592	-	-	10Hz
802.11g	93.708	1.400	0.714	1kHz
2.4G 802.11n HT20	92.188	1.298	0.770	1kHz
2.4G 802.11n HT40	85.638	0.644	1.553	3kHz

Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

802.11b Duty Cycle

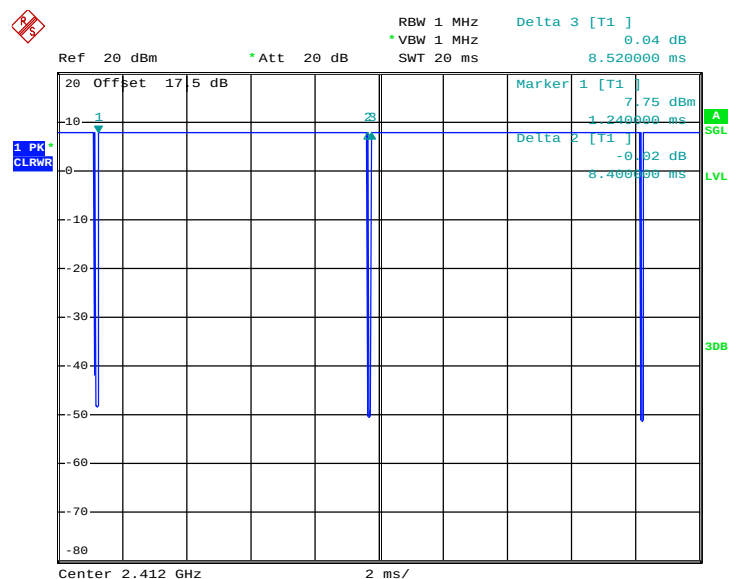


Date: 6.JUL.2013 18:20:43

Note:

The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

802.11g Duty Cycle

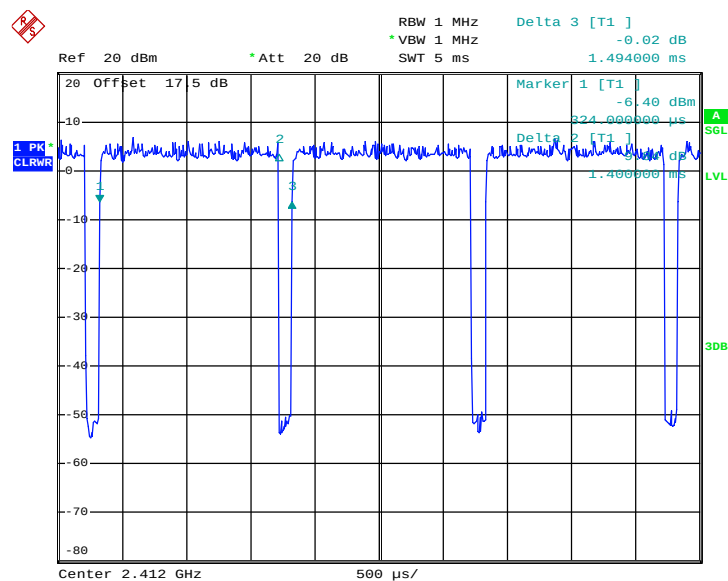

Date: 6.JUL.2013 18:23:27

Note:

The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.



RBW 1 MHz
VBW 1 MHz
SWT 5 ms

Ref 20 dBm
Att 20 dB

Delta 3 [T1]
-0.00 dB
1.408000 ms

20 Offset 17.5 dB

1 PK CLKWR

Marker 1 [T1]
-6.24 dBm
328.000000 μ s


Delta 2 [T1]
-6.24 dBm
1.298000 ms

Center 2.412 GHz
500 μ s/

Date: 6.JUL.2013 18:29:19

Note:

The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

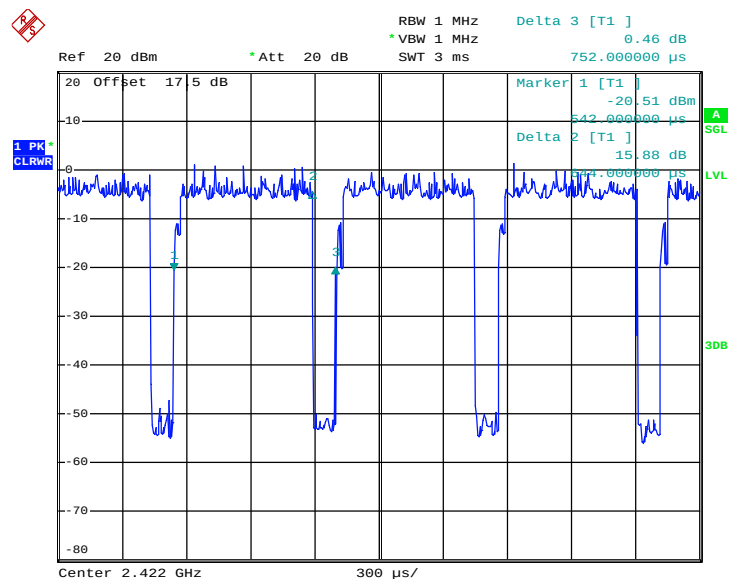2.4GHz 802.11n HT40 Duty Cycle


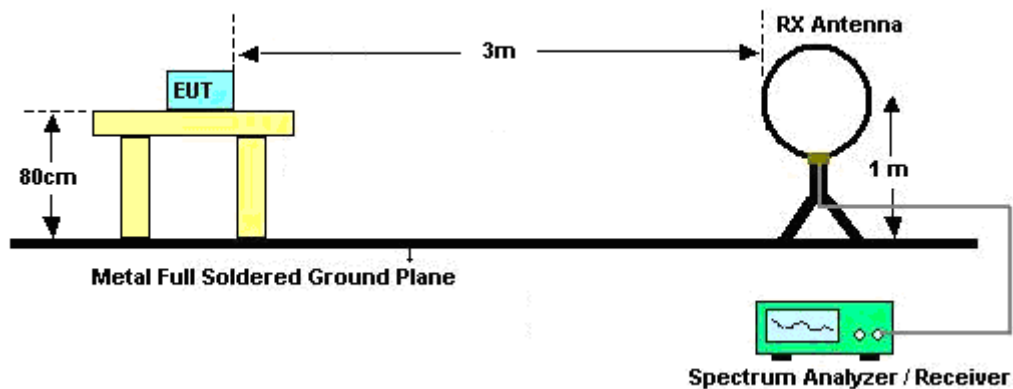
Date: 6.JUL.2013 18:34:59

Note:


The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.5.4 Test Setup


For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz

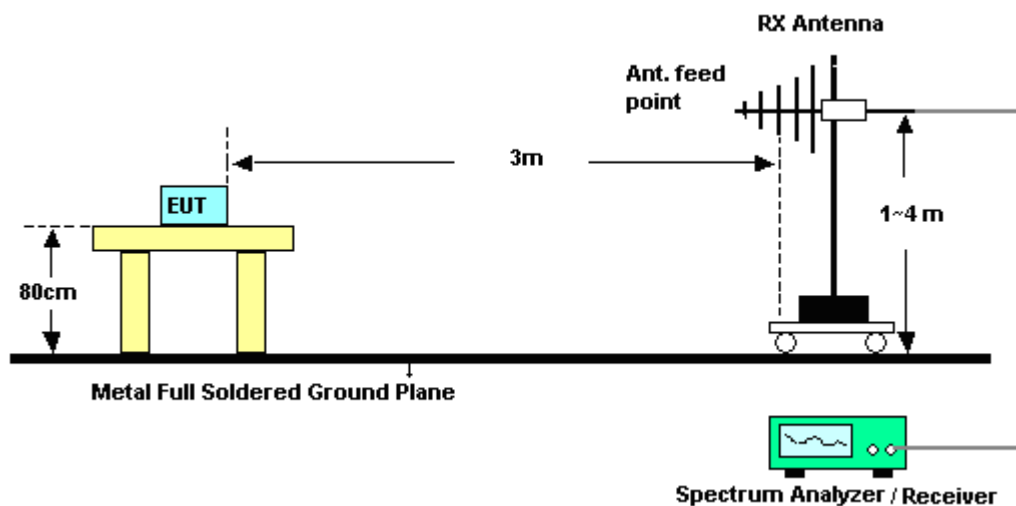

For radiated emissions above 1GHz

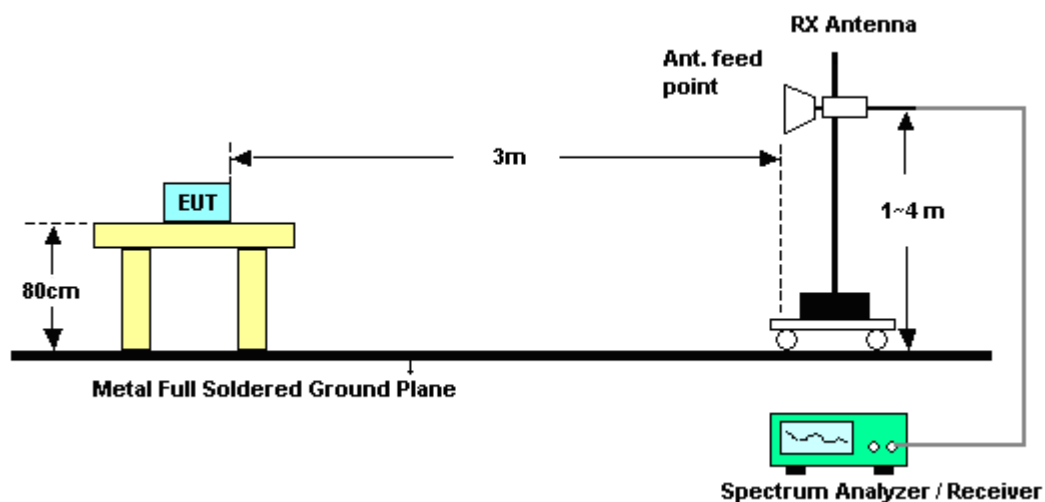

3.5.5 Test Results of Radiated Spurious Emission (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	23~25℃
Test Band :	Low	Relative Humidity :	49~53%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.67	46.78	-27.22	74	38.84	32.14	5.59	29.79	138	51	Peak
2386.14	35.1	-18.9	54	27.16	32.14	5.59	29.79	138	51	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2320.17	46.64	-27.36	74	38.86	32.05	5.53	29.8	100	250	Peak
2313.69	34.38	-19.62	54	26.63	32.02	5.53	29.8	100	250	Average

Test Mode :	802.11b	Temperature :	23~25℃
Test Band :	High	Relative Humidity :	49~53%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.96	48.54	-25.46	74	40.32	32.27	5.71	29.76	132	47	Peak
2483.5	36.94	-17.06	54	28.72	32.27	5.71	29.76	132	47	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2487.1	47.89	-26.11	74	39.67	32.27	5.71	29.76	119	272	Peak
2483.5	36.02	-17.98	54	27.8	32.27	5.71	29.76	119	272	Average

Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	49~53%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	56.16	-17.84	74	48.22	32.14	5.59	29.79	109	324	Peak
2388.84	43.06	-10.94	54	35.12	32.14	5.59	29.79	109	324	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.66	51.29	-22.71	74	43.35	32.14	5.59	29.79	100	344	Peak
2388.93	38.93	-15.07	54	30.99	32.14	5.59	29.79	100	344	Average

Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	49~53%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.49	57.24	-16.76	74	49.02	32.27	5.71	29.76	134	323	Peak
2483.59	45.43	-8.57	54	37.21	32.27	5.71	29.76	134	323	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.16	52.88	-21.12	74	44.66	32.27	5.71	29.76	100	338	Peak
2483.62	40.51	-13.49	54	32.29	32.27	5.71	29.76	100	338	Average

Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	49~53%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.92	52.22	-21.78	74	44.24	32.14	5.62	29.78	200	333	Peak
2389.83	40.74	-13.26	54	32.76	32.14	5.62	29.78	200	333	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.3	50.97	-23.03	74	43.03	32.14	5.59	29.79	118	336	Peak
2389.92	38.48	-15.52	54	30.5	32.14	5.62	29.78	118	336	Average

Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	49~53%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.86	56.71	-17.29	74	48.49	32.27	5.71	29.76	164	313	Peak
2483.56	44.29	-9.71	54	36.07	32.27	5.71	29.76	164	313	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.59	58.39	-15.61	74	50.17	32.27	5.71	29.76	121	282	Peak
2483.5	44.35	-9.65	54	36.13	32.27	5.71	29.76	121	282	Average

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	49~53%
Test Channel :	03	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	57.52	-16.48	74	49.58	32.14	5.59	29.79	161	319	Peak
2390	43.98	-10.02	54	36	32.14	5.62	29.78	161	319	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.92	56.99	-17.01	74	49.01	32.14	5.62	29.78	100	261	Peak
2389.38	42.7	-11.3	54	34.76	32.14	5.59	29.79	100	261	Average

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	49~53%
Test Channel :	09	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.43	59.91	-14.09	74	51.69	32.27	5.71	29.76	104	353	Peak
2483.71	47.94	-6.06	54	39.72	32.27	5.71	29.76	104	353	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2488.39	54.87	-19.13	74	46.63	32.29	5.71	29.76	100	57	Peak
2484.58	42.01	-11.99	54	33.79	32.27	5.71	29.76	100	57	Average

3.5.7 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Note: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	802.11b	Temperature :	23~25℃
Test Channel :	01	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 90.93 dBμV/m - 20dB = 70.93 dBμV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
62.67	27.26	-12.74	40	51.42	5.53	0.85	30.54	-	-	Peak
105.6	33.59	-9.91	43.5	51.26	11.8	1.18	30.65	100	120	Peak
186.33	26.79	-16.71	43.5	46.84	9	1.33	30.38	-	-	Peak
352.5	27.86	-18.14	46	41.09	14.77	1.83	29.83	-	-	Peak
531.7	24.22	-21.78	46	33.22	18.1	2.19	29.29	-	-	Peak
696.9	36.23	-9.77	46	43.49	19.38	2.43	29.07	-	-	Peak
2412	90.93	-	-	82.92	32.17	5.62	29.78	138	51	Peak
2412	88.8	-	-	80.79	32.17	5.62	29.78	138	51	Average
4824	54.01	-19.99	74	69.23	33.68	8.36	57.26	114	315	Peak
4824	51.31	-2.69	54	66.53	33.68	8.36	57.26	114	315	Average
7236	39.71	-31.22	70.93	51.69	35.29	9.97	57.24	100	0	Peak

Test Mode :	802.11b	Temperature :	23~25℃
Test Channel :	01	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
84	24.22	-15.78	40	45.66	8.1	1.08	30.62	-	-	Peak
95.88	31.31	-12.19	43.5	50.41	10.4	1.16	30.66	-	-	Peak
172.56	31.61	-11.89	43.5	51.12	9.63	1.28	30.42	120	210	Peak
353.9	28.66	-17.34	46	41.87	14.77	1.84	29.82	-	-	Peak
533.1	25.37	-20.63	46	34.37	18.1	2.19	29.29	-	-	Peak
898.5	29.93	-16.07	46	34.81	21.22	2.71	28.81	-	-	Peak
2412	87.95	-	-	79.94	32.17	5.62	29.78	100	258	Peak
2412	85.46	-	-	77.45	32.17	5.62	29.78	100	258	Average
4824	55.77	-18.23	74	70.99	33.68	8.36	57.26	103	278	Peak
4824	52.62	-1.38	54	67.84	33.68	8.36	57.26	103	278	Average
7236	40.2	-27.75	67.95	52.18	35.29	9.97	57.24	100	360	Peak

Test Mode :	802.11b	Temperature :	23~25℃
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	91.61	-	-	83.51	32.22	5.65	29.77	137	294	Peak
2437	89.4	-	-	81.3	32.22	5.65	29.77	137	294	Average
4874	54.62	-19.38	74	69.58	33.8	8.41	57.17	102	17	Peak
4874	52.04	-1.96	54	67	33.8	8.41	57.17	102	17	Average
7311	40.37	-33.63	74	52.23	35.31	9.99	57.16	100	0	Peak

Test Mode :	802.11b	Temperature :	23~25℃
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	86.79	-	-	78.69	32.22	5.65	29.77	126	360	Peak
2437	84.59	-	-	76.49	32.22	5.65	29.77	126	360	Average
4874	54.91	-19.09	74	69.87	33.8	8.41	57.17	103	280	Peak
4874	52.29	-1.71	54	67.25	33.8	8.41	57.17	103	280	Average
7311	40.14	-33.86	74	52	35.31	9.99	57.16	100	360	Peak

Test Mode :	802.11b	Temperature :	23~25℃
Test Channel :	11	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	93.45	-	-	85.29	32.24	5.68	29.76	132	47	Peak
2462	91.21	-	-	83.05	32.24	5.68	29.76	132	47	Average
4924	55.21	-18.79	74	69.91	33.92	8.46	57.08	100	18	Peak
4924	52.17	-1.83	54	66.87	33.92	8.46	57.08	100	18	Average
7386	41.18	-32.82	74	52.86	35.35	10.02	57.05	100	0	Peak

Test Mode :	802.11b	Temperature :	23~25℃
Test Channel :	11	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	90.19	-	-	82.03	32.24	5.68	29.76	119	272	Peak
2462	88.12	-	-	79.96	32.24	5.68	29.76	119	272	Average
4924	54.26	-19.74	74	68.96	33.92	8.46	57.08	100	284	Peak
4924	51.56	-2.44	54	66.26	33.92	8.46	57.08	100	284	Average
7386	40.3	-33.7	74	51.98	35.35	10.02	57.05	100	360	Peak

Test Mode :	802.11g	Temperature :	23~25℃
Test Channel :	01	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	99.11	-	-	91.1	32.17	5.62	29.78	109	324	Peak
2412	90.66	-	-	82.65	32.17	5.62	29.78	109	324	Average
4824	58.73	-15.27	74	73.95	33.68	8.36	57.26	148	360	Peak
4824	47.01	-6.99	54	62.23	33.68	8.36	57.26	148	360	Average
7236	40.6	-38.51	79.11	52.58	35.29	9.97	57.24	120	150	Peak

Test Mode :	802.11g	Temperature :	23~25℃
Test Channel :	01	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	93.76	-	-	85.75	32.17	5.62	29.78	100	344	Peak
2412	85.01	-	-	77	32.17	5.62	29.78	100	344	Average
4824	56.39	-17.61	74	71.61	33.68	8.36	57.26	100	360	Peak
4824	44.09	-9.91	54	59.31	33.68	8.36	57.26	100	360	Average
7236	40.87	-32.89	73.76	52.85	35.29	9.97	57.24	120	145	Peak

Test Mode :	802.11g	Temperature :	23~25℃
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	100.37	-	-	92.27	32.22	5.65	29.77	109	325	Peak
2437	91.55	-	-	83.45	32.22	5.65	29.77	109	325	Average
4874	59.54	-14.46	74	74.5	33.8	8.41	57.17	100	360	Peak
4874	46.84	-7.16	54	61.8	33.8	8.41	57.17	100	360	Average
7311	41.36	-32.64	74	53.22	35.31	9.99	57.16	120	140	Peak

Test Mode :	802.11g	Temperature :	23~25℃
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	95.34	-	-	87.24	32.22	5.65	29.77	100	338	Peak
2437	86.68	-	-	78.58	32.22	5.65	29.77	100	338	Average
4874	52.99	-21.01	74	67.95	33.8	8.41	57.17	139	352	Peak
4874	41.25	-12.75	54	56.21	33.8	8.41	57.17	139	352	Average
7311	39.64	-34.36	74	51.5	35.31	9.99	57.16	145	250	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	100.11	-	-	91.95	32.24	5.68	29.76	134	323	Peak
2462	91.48	-	-	83.32	32.24	5.68	29.76	134	323	Average
4924	57.51	-16.49	74	72.21	33.92	8.46	57.08	100	360	Peak
4924	46.32	-7.68	54	61.02	33.92	8.46	57.08	100	360	Average
7386	41.41	-32.59	74	53.09	35.35	10.02	57.05	110	140	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	96.61	-	-	88.45	32.24	5.68	29.76	100	338	Peak
2462	87.48	-	-	79.32	32.24	5.68	29.76	100	338	Average
4924	55.97	-18.03	74	70.67	33.92	8.46	57.08	116	312	Peak
4924	43.81	-10.19	54	58.51	33.92	8.46	57.08	116	312	Average
7386	40.32	-33.68	74	52	35.35	10.02	57.05	120	150	Peak

Test Mode :	802.11n HT20	Temperature :	23~25℃
Test Channel :	01	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	96.21	-	-	88.2	32.17	5.62	29.78	200	333	Peak
2412	87.61	-	-	79.6	32.17	5.62	29.78	200	333	Average
4824	59.64	-14.36	74	74.86	33.68	8.36	57.26	159	329	Peak
4824	46.27	-7.73	54	61.49	33.68	8.36	57.26	159	329	Average
7236	39.2	-37.01	76.21	21.98	35.29	9.97	28.04	52	120	Peak

Test Mode :	802.11n HT20	Temperature :	23~25℃
Test Channel :	01	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	92.11	-	-	84.1	32.17	5.62	29.78	118	336	Peak
2412	81.55	-	-	73.54	32.17	5.62	29.78	118	336	Average
4824	53.43	-20.57	74	40.73	33.68	8.36	29.34	148	300	Peak
4824	47.37	-6.63	54	34.67	33.68	8.36	29.34	148	300	Average
7236	41.56	-30.55	72.11	24.34	35.29	9.97	28.04	100	360	Peak

Test Mode :	802.11n HT20	Temperature :	23~25℃
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	97.54	-	-	89.44	32.22	5.65	29.77	134	328	Peak
2437	89.05	-	-	80.95	32.22	5.65	29.77	134	328	Average
4874	54.87	-19.13	74	42	33.8	8.41	29.34	100	53	Peak
4874	47.5	-6.5	54	34.63	33.8	8.41	29.34	100	53	Average
7311	42.4	-31.6	74	25.08	35.31	9.99	27.98	150	240	Peak

Test Mode :	802.11n HT20	Temperature :	23~25℃
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	96.73	-	-	88.59	32.22	5.68	29.76	100	301	Peak
2437	88	-	-	79.86	32.22	5.68	29.76	100	301	Average
4875	50.87	-23.13	74	38	33.8	8.41	29.34	108	288	Peak
4875	45.62	-8.38	54	32.75	33.8	8.41	29.34	108	288	Average
7311	40.43	-33.57	74	23.11	35.31	9.99	27.98	100	360	Peak

Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	98.41	-	-	90.25	32.24	5.68	29.76	164	313	Peak
2462	88.26	-	-	80.1	32.24	5.68	29.76	164	313	Average
4924	52.9	-21.1	74	39.87	33.92	8.46	29.35	144	3	Peak
4924	40.39	-13.61	54	27.36	33.92	8.46	29.35	144	3	Average
7386	40.71	-33.29	74	23.24	35.35	10.02	27.9	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	96.9	-	-	88.74	32.24	5.68	29.76	121	282	Peak
2462	88.23	-	-	80.07	32.24	5.68	29.76	121	282	Average
4924	53.8	-20.2	74	40.77	33.92	8.46	29.35	132	356	Peak
4924	43.77	-10.23	54	30.74	33.92	8.46	29.35	132	356	Average
7386	42.09	-31.91	74	24.62	35.35	10.02	27.9	150	240	Peak

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Channel :	03	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	95	-	-	86.93	32.19	5.65	29.77	160	319	Peak
2422	87.42	-	-	79.35	32.19	5.65	29.77	160	319	Average
4844	50.7	-23.3	74	37.94	33.72	8.38	29.34	100	350	Peak
4844	44	-10	54	31.24	33.72	8.38	29.34	100	350	Average
7266	43.69	-30.31	74	26.42	35.3	9.98	28.01	100	0	Peak

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Channel :	03	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	91.96	-	-	83.89	32.19	5.65	29.77	100	260	Peak
2422	83.89	-	-	75.82	32.19	5.65	29.77	100	260	Average
4844	48.35	-25.65	74	35.59	33.72	8.38	29.34	100	0	Peak
7266	42.45	-31.55	74	25.18	35.3	9.98	28.01	100	360	Peak

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	97.55	-	-	89.45	32.22	5.65	29.77	103	306	Peak
2437	88.92	-	-	80.82	32.22	5.65	29.77	103	306	Average
4874	52.5	-21.5	74	39.63	33.8	8.41	29.34	100	13	Peak
4874	43.28	-10.72	54	30.41	33.8	8.41	29.34	100	13	Average
7311	38.12	-35.88	74	20.8	35.31	9.99	27.98	200	360	Peak

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	92.22	-	-	84.12	32.22	5.65	29.77	119	272	Peak
2437	84.23	-	-	76.13	32.22	5.65	29.77	119	272	Average
4874	46.49	-27.51	74	33.62	33.8	8.41	29.34	200	320	Peak
7311	39.27	-34.73	74	21.95	35.31	9.99	27.98	100	320	Peak

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Channel :	09	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	94.88	-	-	86.74	32.22	5.68	29.76	104	353	Peak
2452	87.82	-	-	79.68	32.22	5.68	29.76	104	353	Average
4904	51.1	-22.9	74	38.12	33.88	8.44	29.34	100	17	Peak
4904	41.49	-12.51	54	28.51	33.88	8.44	29.34	100	17	Average
7356	40.32	-33.68	74	22.9	35.33	10.01	27.92	100	320	Peak

Test Mode :	802.11n HT40	Temperature :	23~25°C
Test Channel :	09	Relative Humidity :	49~53%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	91	-	-	82.86	32.22	5.68	29.76	100	57	Peak
2452	80.88	-	-	72.74	32.22	5.68	29.76	100	57	Average
4904	47.47	-26.53	74	34.49	33.88	8.44	29.34	200	360	Peak
7356	40.62	-33.38	74	23.2	35.33	10.01	27.92	100	320	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

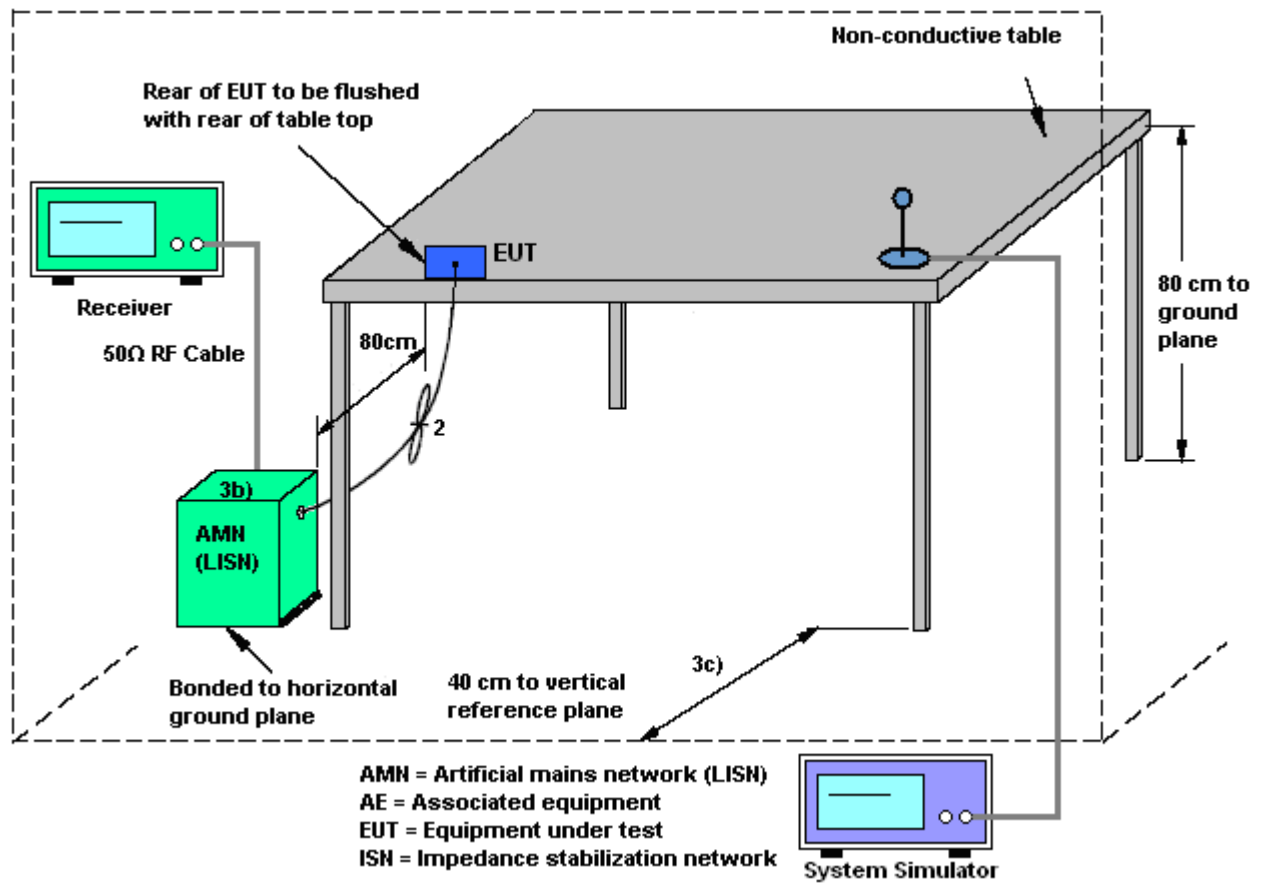

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Leo Liao	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

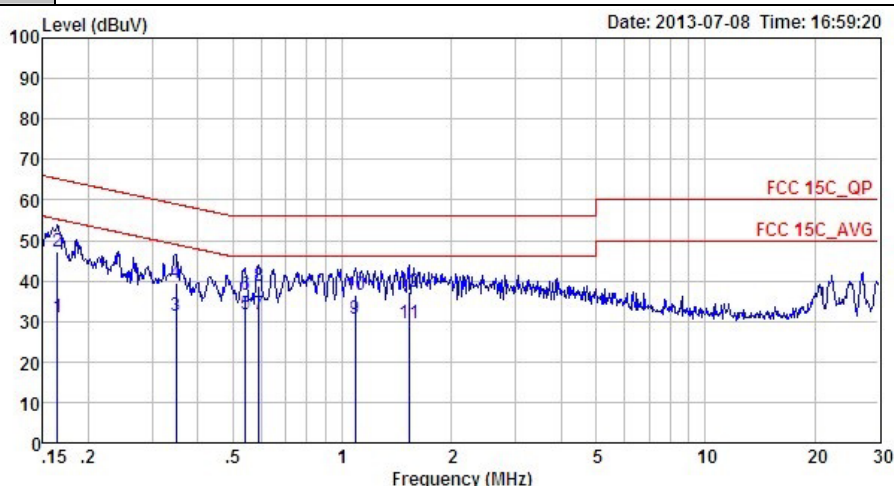


Site : CO01-SZ
Condition: FCC 15C QP LISN L 2000601 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	31.08	-24.17	55.25	21.00	0.03	10.05	Average
2	0.16	47.08	-18.17	65.25	37.00	0.03	10.05	QP
3	0.35	31.29	-17.71	49.00	21.20	0.02	10.07	Average
4	0.35	39.49	-19.51	59.00	29.40	0.02	10.07	QP
5	0.54	31.61	-14.39	46.00	21.50	0.02	10.09	Average
6	0.54	36.71	-19.29	56.00	26.60	0.02	10.09	QP
7 *	0.59	31.92	-14.08	46.00	21.81	0.02	10.09	Average
8	0.59	38.72	-17.28	56.00	28.61	0.02	10.09	QP
9	1.09	30.44	-15.56	46.00	20.29	0.03	10.12	Average
10	1.09	36.64	-19.36	56.00	26.49	0.03	10.12	QP
11	1.53	29.66	-16.34	46.00	19.50	0.03	10.13	Average
12	1.53	37.16	-18.84	56.00	27.00	0.03	10.13	QP



Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Leo Liao	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

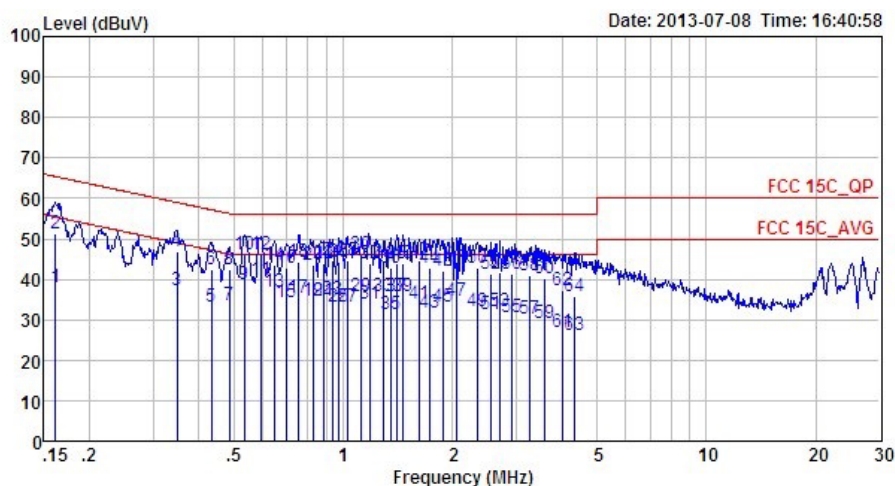


Site : C001-SZ
Condition: FCC 15C_QP LISN_N_2000601 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	38.07	-17.31	55.38	28.00	0.02	10.05	Average
2	0.16	51.27	-14.11	65.38	41.20	0.02	10.05	QP
3	0.35	37.09	-11.91	49.00	27.00	0.02	10.07	Average
4	0.35	46.89	-12.11	59.00	36.80	0.02	10.07	QP
5	0.43	33.39	-13.81	47.20	23.29	0.02	10.08	Average
6	0.43	42.59	-14.61	57.20	32.49	0.02	10.08	QP
7	0.49	33.40	-12.83	46.23	23.30	0.02	10.08	Average
8	0.49	42.30	-13.93	56.23	32.20	0.02	10.08	QP
9	0.53	38.90	-7.10	46.00	28.79	0.02	10.09	Average
10	0.53	46.20	-9.80	56.00	36.09	0.02	10.09	QP
11 *	0.59	39.81	-6.19	46.00	29.70	0.02	10.09	Average
12	0.59	46.21	-9.79	56.00	36.10	0.02	10.09	QP
13	0.65	36.72	-9.28	46.00	26.60	0.02	10.10	Average
14	0.65	43.62	-12.38	56.00	33.50	0.02	10.10	QP
15	0.70	34.32	-11.68	46.00	24.20	0.02	10.10	Average
16	0.70	42.92	-13.08	56.00	32.80	0.02	10.10	QP
17	0.75	35.32	-10.68	46.00	25.20	0.02	10.10	Average
18	0.75	44.22	-11.78	56.00	34.10	0.02	10.10	QP
19	0.83	34.73	-11.27	46.00	24.60	0.02	10.11	Average
20	0.83	43.63	-12.37	56.00	33.50	0.02	10.11	QP
21	0.88	34.63	-11.37	46.00	24.50	0.02	10.11	Average
22	0.88	43.73	-12.27	56.00	33.60	0.02	10.11	QP
23	0.93	35.23	-10.77	46.00	25.10	0.02	10.11	Average
24	0.93	44.63	-11.37	56.00	34.50	0.02	10.11	QP
25	0.97	33.03	-12.97	46.00	22.90	0.02	10.11	Average
26	0.97	44.13	-11.87	56.00	34.00	0.02	10.11	QP
27	1.03	33.24	-12.76	46.00	23.11	0.02	10.11	Average
28	1.03	44.64	-11.36	56.00	34.51	0.02	10.11	QP
29	1.12	35.94	-10.06	46.00	25.80	0.02	10.12	Average




Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Leo Liao	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

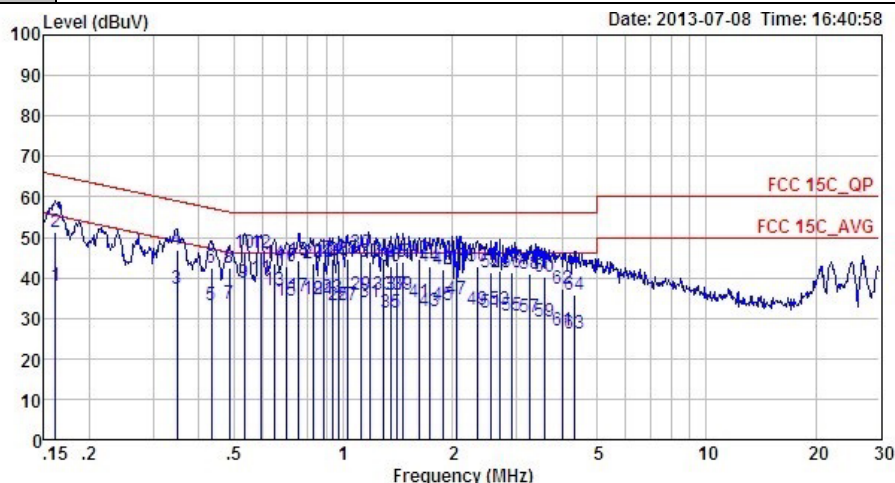

Site : CO01-SZ
Condition: FCC 15C_QP LISN_N_2000601 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
30	1.12	46.14	-9.86	56.00	36.00	0.02	10.12	QP
31	1.18	33.84	-12.16	46.00	23.70	0.02	10.12	Average
32	1.18	44.04	-11.96	56.00	33.90	0.02	10.12	QP
33	1.30	35.65	-10.35	46.00	25.51	0.02	10.12	Average
34	1.30	44.25	-11.75	56.00	34.11	0.02	10.12	QP
35	1.35	31.25	-14.75	46.00	21.10	0.03	10.12	Average
36	1.35	42.85	-13.15	56.00	32.70	0.03	10.12	QP
37	1.40	35.75	-10.25	46.00	25.60	0.03	10.12	Average
38	1.40	43.75	-12.25	56.00	33.60	0.03	10.12	QP
39	1.46	35.95	-10.05	46.00	25.79	0.03	10.13	Average
40	1.46	43.75	-12.25	56.00	33.59	0.03	10.13	QP
41	1.62	33.96	-12.04	46.00	23.80	0.03	10.13	Average
42	1.62	44.56	-11.44	56.00	34.40	0.03	10.13	QP
43	1.73	31.57	-14.43	46.00	21.40	0.03	10.14	Average
44	1.73	42.67	-13.33	56.00	32.50	0.03	10.14	QP
45	1.89	33.28	-12.72	46.00	23.11	0.03	10.14	Average
46	1.89	42.18	-13.82	56.00	32.01	0.03	10.14	QP

Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Leo Liao	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

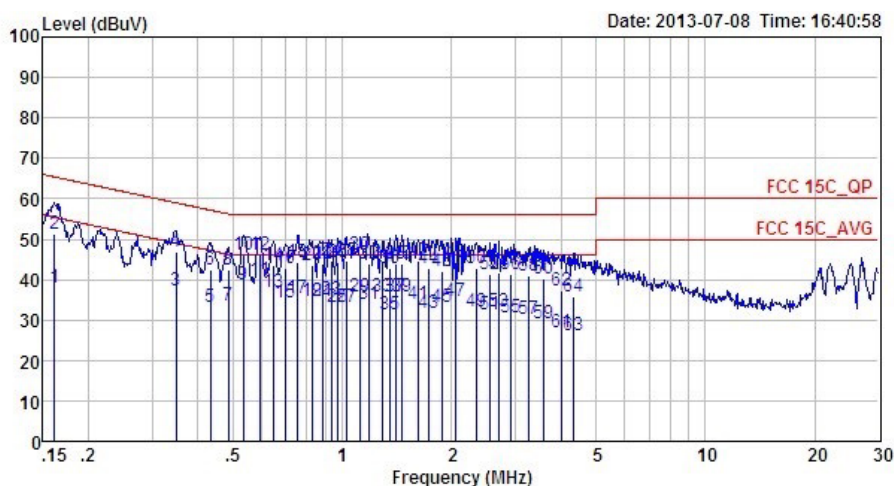

Site : CO01-SZ
Condition: FCC 15C_QP LISN_N_2000601 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
47	2.05	34.69	-11.31	46.00	24.51	0.03	10.15	Average
48	2.05	44.19	-11.81	56.00	34.01	0.03	10.15	QP
49	2.33	32.21	-13.79	46.00	22.00	0.04	10.17	Average
50	2.33	42.81	-13.19	56.00	32.60	0.04	10.17	QP
51	2.54	31.32	-14.68	46.00	21.10	0.04	10.18	Average
52	2.54	41.22	-14.78	56.00	31.00	0.04	10.18	QP
53	2.69	32.22	-13.78	46.00	22.00	0.04	10.18	Average
54	2.69	41.82	-14.18	56.00	31.60	0.04	10.18	QP
55	2.92	30.53	-15.47	46.00	20.29	0.05	10.19	Average
56	2.92	41.33	-14.67	56.00	31.09	0.05	10.19	QP
57	3.28	30.24	-15.76	46.00	20.00	0.05	10.19	Average
58	3.28	41.04	-14.96	56.00	30.80	0.05	10.19	QP
59	3.58	29.05	-16.95	46.00	18.80	0.06	10.19	Average
60	3.58	40.25	-15.75	56.00	30.00	0.06	10.19	QP
61	4.01	27.06	-18.94	46.00	16.81	0.06	10.19	Average
62	4.01	37.26	-18.74	56.00	27.01	0.06	10.19	QP
63	4.31	26.26	-19.74	46.00	16.00	0.07	10.19	Average
64	4.31	35.76	-20.24	56.00	25.50	0.07	10.19	QP

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	Jul. 08, 2013~ Jul. 22, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	Jul. 08, 2013~ Jul. 22, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	Jul. 08, 2013~ Jul. 22, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
ESCI TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Mar. 28, 2013	Jul. 06, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP30	101362	9kHz~30GHz	Oct. 11, 2012	Jul. 06, 2013	Oct. 10, 2013	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	Jul. 06, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Nov. 03, 2012	Jul. 06, 2013	Nov. 02, 2013	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz GAIN 30db	Mar. 28, 2013	Jul. 06, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 28, 2013	Jul. 06, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
SHF-EHF -Horn	Schwarzbeck	BBHA9170	BBHA9170249	14GHz~40GHz	Nov. 23, 2012	Jul. 06, 2013	Nov. 22, 2013	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2012	Jul. 06, 2013	Oct. 21, 2013	Radiation (03CH01-SZ)
Turn Table	EM Electronic	EM 1000	N/A	0~360 degree	N/A	Jul. 06, 2013	N/A	Radiation (03CH01-SZ)
Antenna Mast	EM Electronic	EM 1000	N/A	1 m~4 m	N/A	Jul. 06, 2013	N/A	Radiation (03CH01-SZ)
AC LISN	ETS-LINDGRE N	3816/2SH	00103912	0.1MHz~108MHz	Feb. 28, 2013	Jul. 08, 2013	Feb. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	ETS-LINDGRE N	3816/2SH	00103892	0.1MHz~108MHz	Feb. 28, 2013	Jul. 08, 2013	Feb. 27, 2014	Conduction (CO01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.03	100724	9kHz~3GHz	Mar. 08, 2013	Jul. 08 2013	Mar. 07, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891 N/A	N/A	Oct. 12, 2012	Jul. 08 2013	Oct. 11, 2013	Conduction (CO01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP370202 as below.