FCC PART 15E
TEST REPORT
No.24T04Z200128-007

for

Samsung Electronics

Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN

SM-A065F/DS

FCC ID: ZCASMA065F

with

Hardware Version: REV1.0

Software Version: A065F.001

Issued Date: 2024-06-21

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

©Copyright. All rights reserved by CTTL.

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z200128-007	Rev.0	1st edition	2024-06-21

Note: the latest revision of the test report supersedes all previous version.

. ©Copyright. All rights reserved by CTTL.

CONTENTS

CONTENTS 3

1. TEST LABORATORY 5

1.1. INTRODUCTION & ACCREDITATION 5
1.2. TESTING LOCATION 5
1.3. TESTINGENVIRONMENT 5
1.4. PROJECT DATE 5
1.5. SIGNATURE 5

2. CLIENT INFORMATION 6

2.1. APPLICANT INFORMATION 6
2.2. MANUFACTURER INFORMATION 6

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 7

3.1. ABOUT EUT 7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST 7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST 7
3.4. GENERAL DESCRIPTION 7

4. REFERENCE DOCUMENTS 8

4.1. DOCUMENTS SUPPLIED BY APPLICANT 8
4.2. REFERENCE DOCUMENTS FOR TESTING 8

5. LABORATORY ENVIRONMENT 8

6. TEST RESULTS 9

6.1. SUMMARY OF TEST RESULTS 9
6.2. STATEMENTS 9
6.3. TEST CONDITIONS 9

7. TEST FACILITIES UTILIZED 10

8. MEASUREMENT UNCERTAINTY 11

8.1. TRANSMITTER OUTPUT POWER 11
8.2. PEAK POWER SPECTRAL DENSITY 11
8.3. 6DB EMISSION BANDWIDTH 11
8.4. SPURIOUS EMISSIONS 11
8.5. RADIATED UNWANTED EMISSION 11
8.6. AC POWER-LINE CONDUCTED EMISSION 11

ANNEX A: MEASUREMENT RESULTS 12

A.1. MEASUREMENT METHOD 12
A.2. MAXIMUM PEAK OUTPUT POWER 13
A.2.1 ANTENNA GAIN 13

. ©Copyright. All rights reserved by CTTL.

A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED 13
A.3. PEAK POWER SPECTRAL DENSITY 18
A.4. 6DB EMISSION BANDWIDTH 20
A.5. RADIATED UNWANTED EMISSION 26
A.5.1 LIMITS 26
A.5.2 TEST SETUP 27
A.5.3 TEST PROCEDURES 28
A.5.4 CALCULATION 28
A.6. AC POWERLINE CONDUCTED EMISSION 46
A.6.1 SUMMARY 46
A.6.2 METHOD OF MEASUREMENT 46
A.6.3 TEST CONDITION 46
A.6.4 TEST SETUP 46
A.6.5 MEASUREMENT RESULT AND LIMIT 47

ANNEX B: EUT PARAMETERS 50

ANNEX C: ACCREDITATION CERTIFICATE 50

. ©Copyright. All rights reserved by CTTL.

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China100191

Radiated testing Location: (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, P. R. China 100176

1.3. TestingEnvironment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2024-05-20

Testing End Date: 2024-06-14

1.5. Signature

Dong Jiaxuan

(Prepared this test report)

Zheng Wei

(Reviewed this test report)

Pang Shuai

(Approved this test report)

. ©Copyright. All rights reserved by CTTL.

2. Client Information

2.1. Applicant Information

Company Name:	SAMSUNG Electronics Co., Ltd.
Address /Post:	19 Chapin Rd.,Building D Pine Brook, NJ 07058
Contact:	Jenni Chun
Email:	j1.chun@samsung.com
Telephone:	+1-201-937-4203

2.2. Manufacturer Information

Company Name:	Samsung Electronics Co., Ltd.
Address /Post:	Samsung R5, Maetan dong 129, Samsung ro Youngtong gu, Suwon city 443 742, Korea
Contact:	Sunghoon Cho
Email:	ggobi.cho@samsung.com
Telephone:	+82-10-2722-4159

. ©Copyright. All rights reserved by CTTL.

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN
Model name	SM-A065F/DS
FCC ID	ZCASMA065F
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Nominal Voltage	3.85V

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT12a	2404200128UT12a	REV1.0	A065F.001	2024-05-20
UT11a	2404200128UT11a	REV1.0	A065F.001	2024-05-20

*EUT ID: is used to identify the test sample in the lab internally.
UT12a is used for Conduction test, UT11a is used for Radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Name	Model	Manufacturer
AE1-1	Battery	HQ-7160SS	SCUD (FUJIAN) Electronics Co., Ltd.
AE1-2	Battery	HQ-7160SD	SCUD (FUJIAN) Electronics Co., Ltd.
AE1-3	Battery	HQ-7160NA	Ningde Amperex technology limited
AE2-1*	Adapter	EP-TA800	SOLUM CO.,LTD.
AE2-2*	Adapter	EP-T1510	DONGYANG E&P INC.
AE2-3*	Adapter	EP-TA200	RFTECH ELECTRONICS (HUIZHOU) CO., LTD
AE3-1	Date Cable1 C-C	EP-DN980BWE	RFTECH ELECTRONICS (HUIZHOU) CO., LTD
AE3-2	Date Cable2 C-C	EP-DN980BWE	Guangxi Broad Telecommunication Co.,Ltd.
AE3-3	Date Cable3 C-C	EP-DN980BWE	Cresyn electronics(Dongguan)Co;Ltd.
AE3-4	Date Cable4 C-C	EP-DN980BWE	ASAP TECHNOLOGY(JIANGXI) CO.,LTD.
AE4*	Date Cable5 C-A	EP-DR140AWE	Cresyn electronics(Dongguan)Co;Ltd.
AE5*	Headset	EHS61ASFWE	Dongguan YoungBo Electronics

*AE ID: is used to identify the test sample in the lab internally.
*AE2-1, AE2-2, AE2-3, AE4 and A5 are not the AE for EUT, provided by the client for relevant tests.

3.4. General Description

Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN with integrated antenna. It consists of normal options: Battery and Charger.
Manual and specifications of the EUT were provided to fulfil the test.
Samples undergoing test were selected by the Client.

. ©Copyright. All rights reserved by CTTL.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2021
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

5. Laboratory Environment

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

. ©Copyright. All rights reserved by CTTL.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	**P**
Peak Power Spectral Density	15.407 (a)	/	**P**
Occupied 6dB Bandwidth	15.407 (e)	/	**P**
Radiated Unwanted Emission	15.407, 15.205, 15.209	/	**P**
AC Powerline Conducted Emission	15.107, 15.207	/	**P**

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

. ©Copyright. All rights reserved by CTTL.

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2024-07-04
2	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2025-04-05
3	Attenuator	10dB/2W	/	Rosenberger	/	/
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	R&S	1 year	2025-01-18
2	Test Receiver	FSV30	101047	R&S	1 year	2024-10-08
3	Test Receiver	ESU26	100376	R&S	1 year	2024-06-29
4	Loop Antenna	HFH2-Z2	829324/007	R&S	1 year	2025-01-04
5	EMI Antenna	VULB9163	302	Schwarzbeck	1 year	2024-08-28
6	EMI Antenna	3117	00139065	ETS-Lindgren	1 year	2024-10-22
7	EMI Antenna	LB-180400-25-C-KF	2110084000006	A-INFO	1 year	2025-05-15

AC Power Line Conducted Emission

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101459	R&S	1 year	2025-05-16
2	Test Receiver	ESCI	100766	R&S	1 year	2025-04-18

. ©Copyright. All rights reserved by CTTL.

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. 6dB Emission Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	1.22
2GHz ≤ f ≤3.6GHz	1.22
3.6GHz ≤ f ≤8GHz	1.22
8GHz ≤ f ≤12.75GHz	1.51
12.75GHz ≤ f ≤26GHz	1.51
26GHz ≤ f ≤40GHz	1.59

8.5. Radiated Unwanted Emission

Frequency Range	Uncertainty(dB)
9kHz-30MHz	3.96
30MHz ≤ f ≤ 1GHz	5.73
1GHz ≤ f ≤18GHz	5.62
18GHz ≤ f ≤40GHz	3.52

8.6. AC Power-line Conducted Emission

Measurement Uncertainty: 3.10dB, k=2

. ©Copyright. All rights reserved by CTTL.

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

1). Connect the EUT to the test system correctly.
2). Set the EUT to the required work mode.
3). Set the EUT to the required channel.
4). Set the spectrum analyzer to start measurement.
5). Record the values. Vector Signal Analyzer

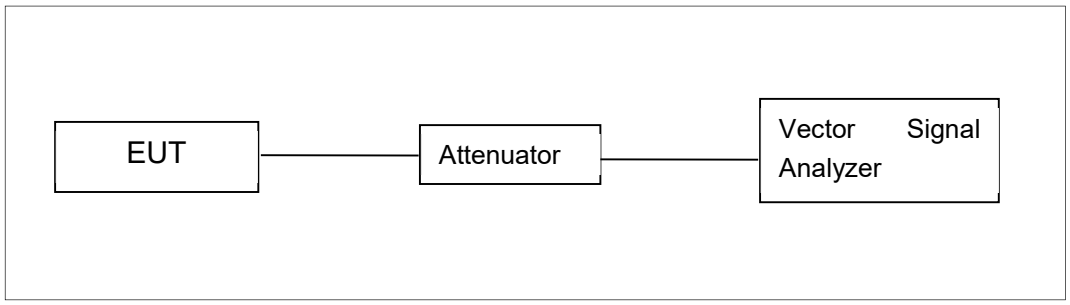

A.1.2. Radiated Emission Measurements

Measurement performed according to Clause 6.4, 6.5, 6.6 in ANSI C63.10 and II.G.4, II.G.5, II.G.6 in KDB 789033.

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360°and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

. ©Copyright. All rights reserved by CTTL.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
Set RBW = 1 MHz.
Set VBW ≥ 3 MHz.
Number of points in sweep ≥ 2 × span / RBW.
Sweep time = auto.
Detector = power averaging (rms)
Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal. Add 10 log (1/x), where x is the duty cycle

A.2.1 Antenna Gain

Antenna gain is -0.8dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Maximum Average Output Power-Conducted

EUT ID: UT12a

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	12.72	/	/
	9	12.86	/	/
	12	13.40	13.43	13.19
	18	13.07	/	/
	24	12.87	/	/
	36	12.63	/	/
	48	12.54	/	/
	54	12.57	/	/

The data rate 12Mbps is selected as worst condition, and the following cases are performed with this condition.

. ©Copyright. All rights reserved by CTTL.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	12.98	/	/
	MCS1	12.91	/	/
	MCS2	13.01	/	/
	MCS3	13.05	13.16	13.12
	MCS4	12.97	/	/
	MCS5	12.82	/	/
	MCS6	12.63	/	/
	MCS7	12.66	/	/

The data rate MCS3 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	12.73	12.74	12.68
	MCS1	11.98	/	/
	MCS2	11.97	/	/
	MCS3	11.86	/	/
	MCS4	11.81	/	/
	MCS5	10.97	/	/
	MCS6	10.88	/	/
	MCS7	10.77	/	/
	MCS8	11.03	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

. ©Copyright. All rights reserved by CTTL.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	12.97	12.83
	MCS1	12.26	/
	MCS2	12.30	/
	MCS3	12.15	/
	MCS4	12.48	/
	MCS5	11.94	/
	MCS6	12.34	/
	MCS7	12.53	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	12.26	/
	MCS1	12.35	/
	MCS2	12.23	/
	MCS3	12.05	/
	MCS4	12.90	12.70
	MCS5	11.37	/
	MCS6	11.07	/
	MCS7	10.89	/
	MCS8	11.38	/
	MCS9	11.39	/

The data rate MCS4 is selected as worst condition, and the following cases are performed with this condition.

. ©Copyright. All rights reserved by CTTL.

802.11ac-VHT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	12.35
	MCS1	12.29
	MCS2	13.01
	MCS3	12.26
	MCS4	10.61
	MCS5	11.20
	MCS6	10.91
	MCS7	10.80
	MCS8	11.24
	MCS9	11.36

The data rate MCS2 is selected as worst condition, and the following cases are performed with this condition.

Duty cycle

Mode	11a		
Duty Cycle	94%		
Mode	11n-20	11n-40	
Duty Cycle	90%	92%	
Mode	11ac-20	11ac-40	11ac-80
Duty Cycle	91%	77%	73%

. ©Copyright. All rights reserved by CTTL.

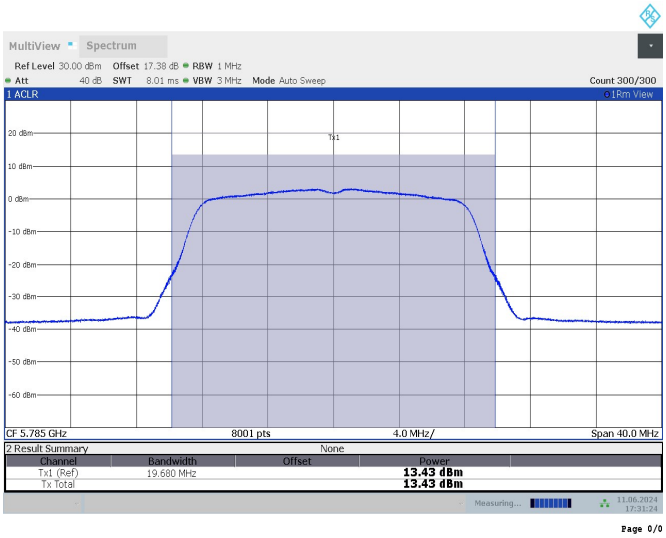

Maximum output Power

Conclusion: PASS

. ©Copyright. All rights reserved by CTTL.

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
Set RBW = 500 kHz.
Set VBW ≥ 3 MHz.
Number of points in sweep ≥ 2 × span / RBW.
Sweep time = auto.
Detector = power averaging (rms)
Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter. Use the peak search function on the instrument to find the peak of the spectrum and record its value. Add 10 log (1/x), where x is the duty cycle.

Measurement Uncertainty:

Measurement Uncertainty	0.75dB

EUT ID: UT12a

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	0.36	P
	157	0.50	P
	165	0.41	P
802.11n HT20	149	-0.13	P
	157	0.09	P
	165	-0.03	P
802.11n HT40	151	-2.90	P
	159	-3.42	P
802.11ac VHT80	155	-5.64	P

. ©Copyright. All rights reserved by CTTL.

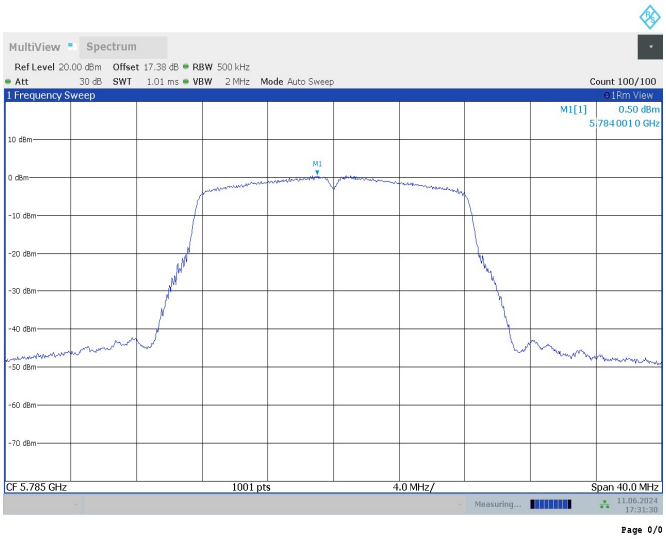

Peak Power Spectral Density

Conclusion: PASS

. ©Copyright. All rights reserved by CTTL.

A.4. 6dB Emission Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 × RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz

EUT ID: UT12a

Measurement Result:

Mode	Channel	6dB Emission Bandwidth (MHz)		conclusion
802.11a	149	Fig.1	15.12	P
	157	Fig.2	14.76	P
	165	Fig.3	14.76	P
802.11n HT20	149	Fig.4	15.12	P
	157	Fig.5	15.76	P
	165	Fig.6	15.72	P
802.11n HT40	151	Fig.7	35.12	P
	159	Fig.8	32.56	P
802.11ac VHT80	155	Fig.9	75.20	P

Test graphs as below:

. ©Copyright. All rights reserved by CTTL.

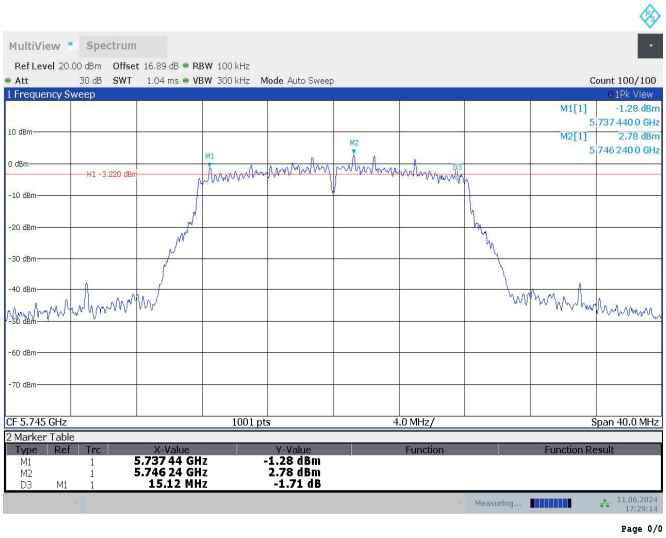

Fig. 1 6dB Emission Bandwidth (802.11a, Ch 149)

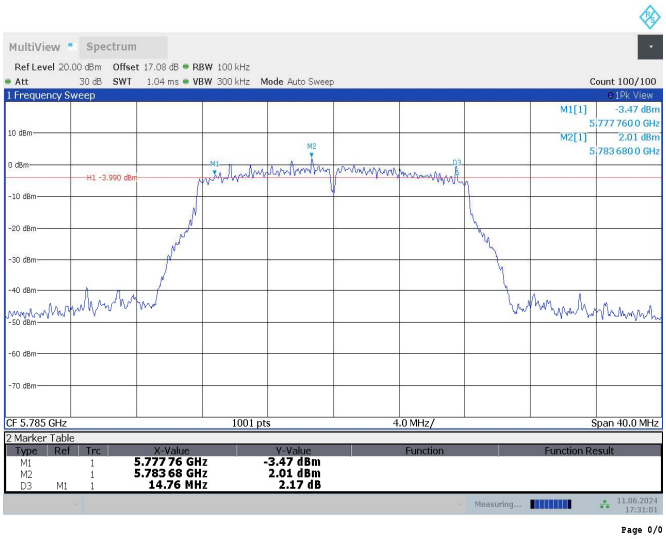

Fig. 2 6dB Emission Bandwidth (802.11a, Ch 157)

. ©Copyright. All rights reserved by CTTL.

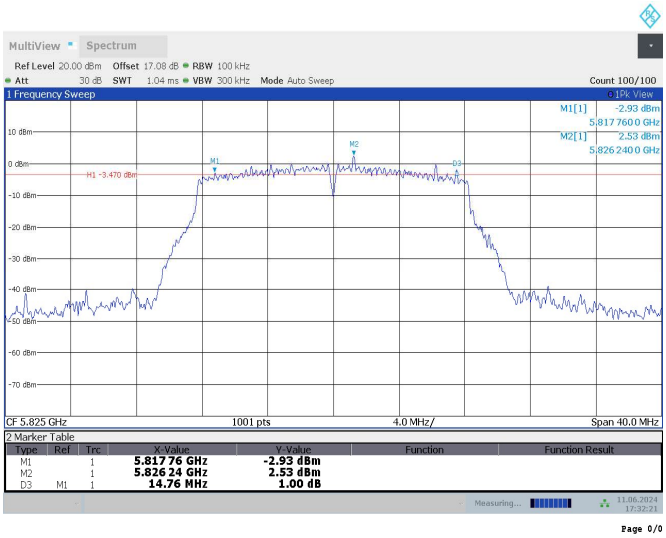

Fig. 3 6dB Emission Bandwidth (802.11a, Ch 165)

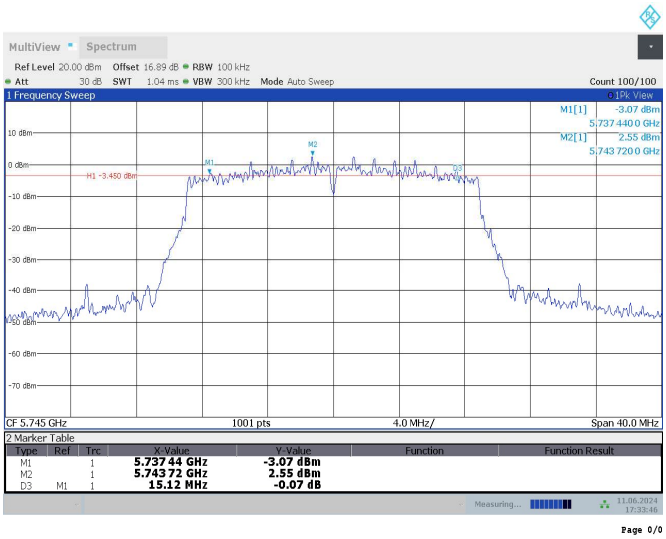

Fig. 4 6dB Emission Bandwidth (802.11n-HT20, Ch 149)

. ©Copyright. All rights reserved by CTTL.

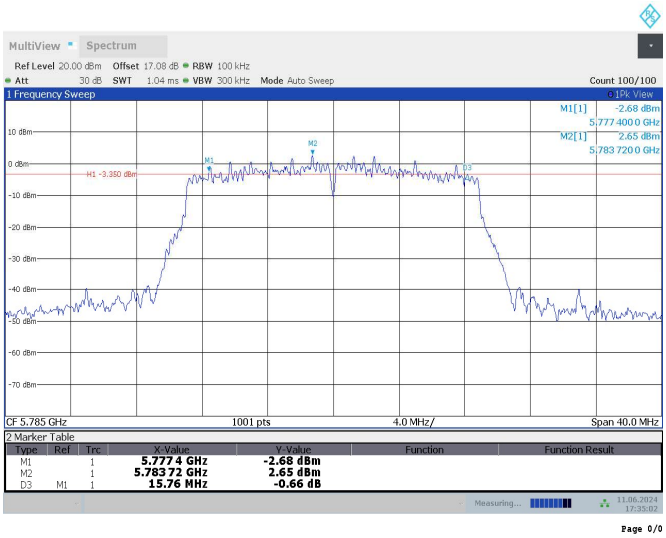

Fig. 5 6dB Emission Bandwidth (802.11n-HT20, Ch 157)

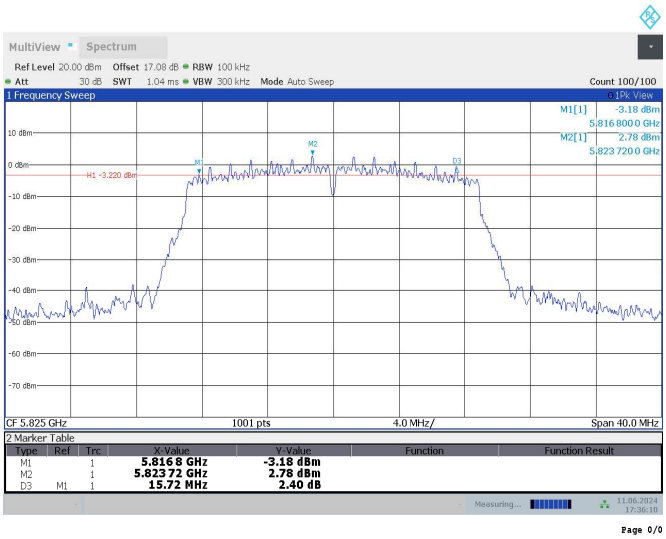

Fig. 6 6dB Emission Bandwidth (802.11n-HT20, Ch 165)

. ©Copyright. All rights reserved by CTTL.

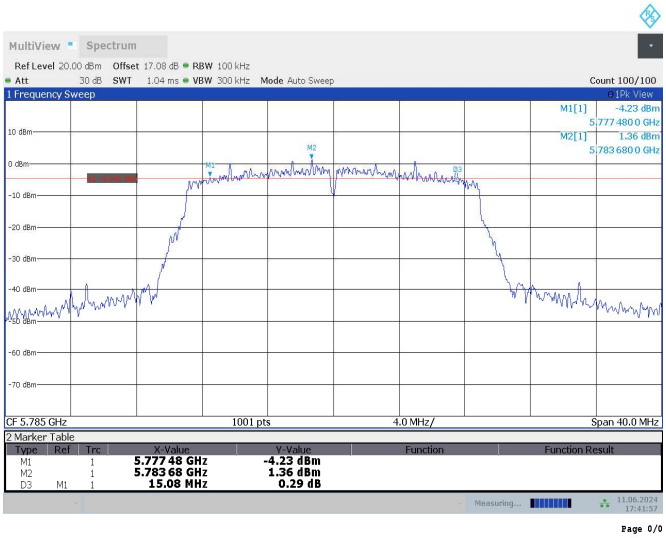

Fig. 7 6dB Emission Bandwidth (802.11n-HT40, Ch 151)

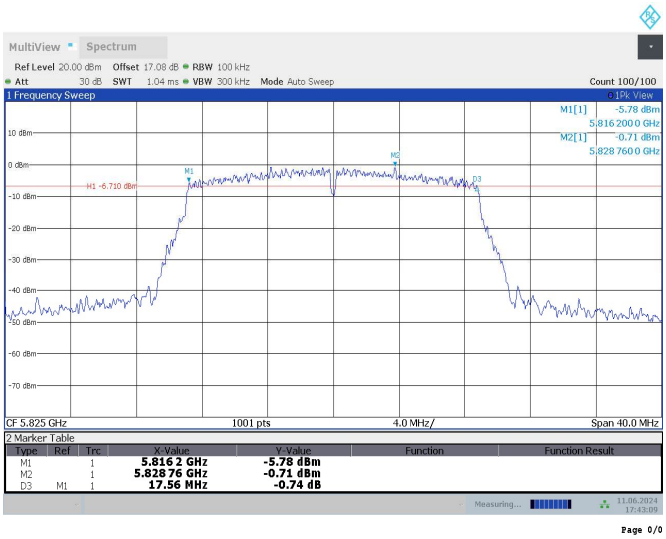

Fig. 8 6dB Emission Bandwidth (802.11n-HT40, Ch 159)

. ©Copyright. All rights reserved by CTTL.

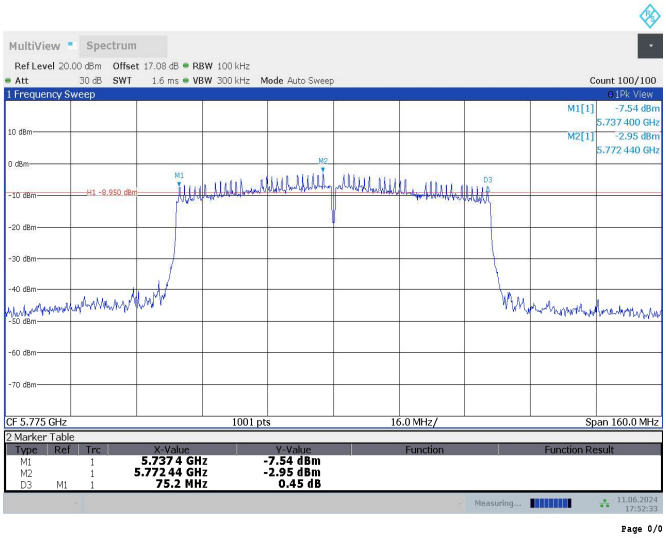

Fig. 9 6dB Emission Bandwidth (802.11ac-VHT80, Ch 155)

Conclusion: PASS

. ©Copyright. All rights reserved by CTTL.

A.5. Radiated Unwanted Emission

A.5.1 Limits

Unwanted Emissions in the unrestricted bands shall not exceed the limits that shown in 15.407:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note：Increasing linearly from point to point.	

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor (as defined in KDB 789033 II.G.2.d).

. ©Copyright. All rights reserved by CTTL.

A.5.2 Test setup

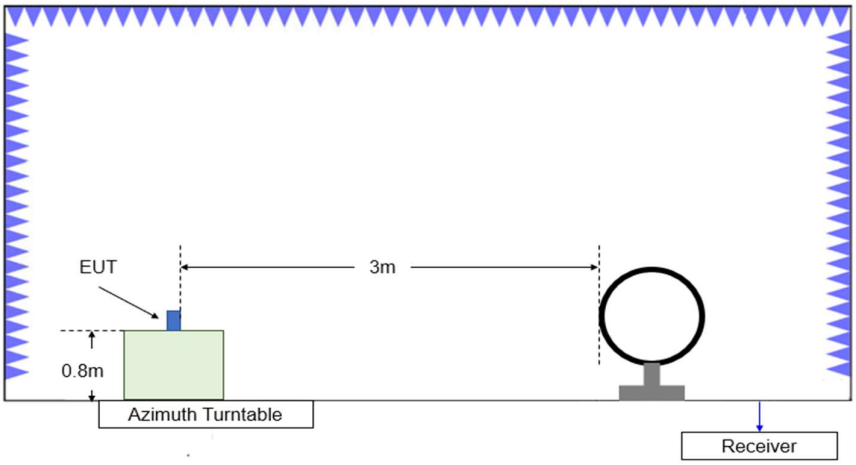

Figure A.5.1. Test Site Diagram (9kHz-30MHz)

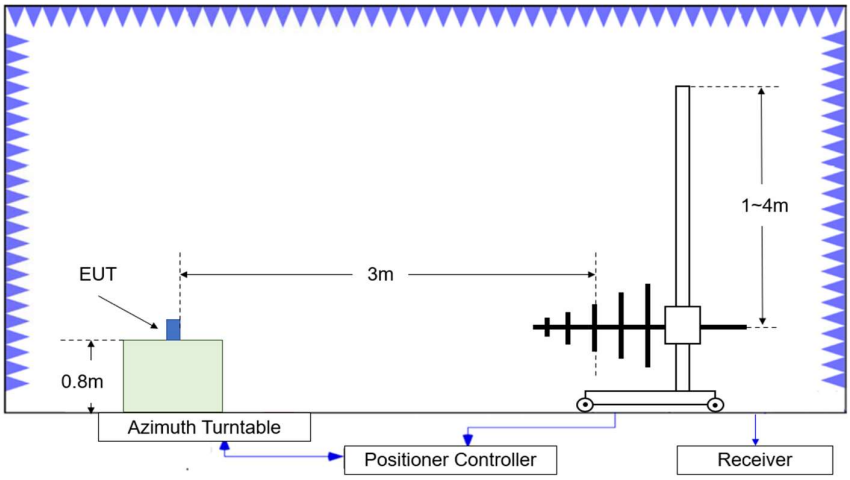

Figure A.5.2. Test Site Diagram (30MHz-1GHz)

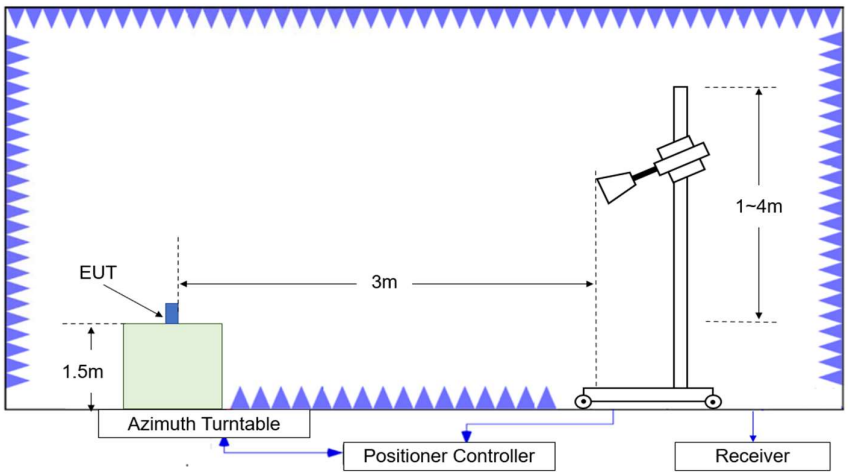

Figure A.5.3. Test Site Diagram (1GHz-40GHz)

. ©Copyright. All rights reserved by CTTL.

A.5.3 Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10and KDB 789033 D02 v02r01.

Test setting

Frequency of emission (MHz)	RBW/VBW
30-1000	100kHz/300kHz
1000-4000	1MHz/3MHz
4000-18000	1MHz/3MHz
18000-26500	1MHz/3MHz
26500-40000	1MHz/3MHz

A.5.4 Calculation

1. The measurement results reported below is calculated by:

Measurement Results (dBμV/m) = $P_{measurement}$ (dBμV) + Cable Loss(dB) + Antenna Factor (dB/m)

Where: $P_{measurement}$ is the field strength recorded from the instrument

2. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

E=EIRP- 20log (*D*) +104.77

Where:

E is the field strength in dBμV/m

D is the measurement distance in meters

EIRP is the equivalent isotropically radiated power in dBm

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. Measurement frequencies were performed from 9 kHz to 40GHz.

. ©Copyright. All rights reserved by CTTL.

A.5.5 Measurement Result

Average Results:

802.11a

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5373.250	44.51	-22.86	34.95	32.42	54.00	9.49	V
5379.250	44.37	-22.78	34.94	32.21	54.00	9.63	V
11490.000	34.09	-29.46	38.28	25.27	54.00	19.91	H
15879.000	39.10	-23.70	40.66	22.14	54.00	14.90	H
17983.000	40.29	-23.12	41.20	22.21	54.00	13.71	H
17989.500	40.32	-23.06	41.20	22.18	54.00	13.68	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5394.500	44.36	-22.73	34.91	32.18	54.00	9.64	V
5408.750	44.51	-22.41	34.85	32.07	54.00	9.49	V
11570.000	34.15	-29.58	38.30	25.43	54.00	19.85	H
15879.000	39.23	-23.70	40.66	22.28	54.00	14.77	V
17986.000	40.56	-23.09	41.20	22.45	54.00	13.44	V
17997.000	40.61	-22.85	41.20	22.26	54.00	13.39	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5411.375	44.52	-22.41	34.83	32.11	54.00	9.48	V
5412.875	44.54	-22.45	34.82	32.17	54.00	9.46	V
11650.000	34.26	-29.25	38.40	25.11	54.00	19.74	V
15874.000	39.62	-23.84	40.65	22.81	54.00	14.38	V
17984.500	40.84	-23.11	41.20	22.75	54.00	13.16	V
17997.500	40.95	-22.83	41.20	22.59	54.00	13.05	H

. ©Copyright. All rights reserved by CTTL.

802.11n-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5370.250	44.57	-22.90	34.96	32.51	54.00	9.43	V
5377.250	44.38	-22.81	34.95	32.24	54.00	9.62	V
11490.000	34.01	-29.46	38.28	25.19	54.00	19.99	V
15888.000	39.10	-23.88	40.68	22.30	54.00	14.90	H
17957.000	40.31	-23.17	41.20	22.29	54.00	13.69	H
17991.500	40.42	-23.01	41.20	22.23	54.00	13.58	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5403.625	44.35	-22.51	34.88	31.99	54.00	9.65	V
5411.125	44.54	-22.41	34.83	32.11	54.00	9.46	V
11570.000	34.14	-29.58	38.30	25.42	54.00	19.86	H
15881.000	39.40	-23.70	40.66	22.44	54.00	14.60	V
17984.500	40.48	-23.11	41.20	22.39	54.00	13.52	V
17996.000	40.72	-22.88	41.20	22.39	54.00	13.28	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5374.125	44.46	-22.85	34.95	32.36	54.00	9.54	V
5378.250	44.37	-22.79	34.94	32.22	54.00	9.63	V
11650.000	30.04	-29.25	38.40	20.89	54.00	23.96	V
15870.000	39.15	-23.94	40.64	22.46	54.00	14.85	H
17984.500	40.45	-23.11	41.20	22.36	54.00	13.55	H
17995.500	40.62	-22.89	41.20	22.31	54.00	13.38	V

. ©Copyright. All rights reserved by CTTL.

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5404.875	44.41	-22.49	34.87	32.03	54.00	9.59	V
5410.125	44.56	-22.39	34.84	32.11	54.00	9.44	V
11510.000	34.11	-29.64	38.30	25.45	54.00	19.89	V
15880.000	39.42	-23.67	40.66	22.44	54.00	14.58	V
17984.500	40.61	-23.11	41.20	22.52	54.00	13.39	H
17994.500	40.67	-22.92	41.20	22.39	54.00	13.33	H

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5369.125	44.51	-22.91	34.96	32.46	54.00	9.49	V
5383.750	44.37	-22.80	34.93	32.24	54.00	9.63	V
11590.000	34.36	-29.29	38.30	25.35	54.00	19.64	V
15888.000	39.12	-23.88	40.68	22.32	54.00	14.88	H
17967.000	40.21	-23.12	41.20	22.13	54.00	13.79	H
17989.000	40.48	-23.07	41.20	22.34	54.00	13.52	H

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5402.375	44.30	-22.54	34.89	31.95	54.00	9.70	V
5410.375	44.49	-22.39	34.84	32.04	54.00	9.51	V
11490.000	34.16	-29.46	38.28	25.34	54.00	19.84	H
15865.000	39.10	-23.99	40.63	22.46	54.00	14.90	H
17939.000	39.94	-23.04	41.20	21.78	54.00	14.06	H
17986.000	40.41	-23.09	41.20	22.30	54.00	13.59	H

. ©Copyright. All rights reserved by CTTL.

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5408.625	44.48	-22.41	34.85	32.04	54.00	9.52	V
5412.875	44.39	-22.45	34.82	32.01	54.00	9.61	V
11570.000	34.09	-29.58	38.30	25.37	54.00	19.91	H
15905.500	38.86	-24.27	40.71	22.42	54.00	15.14	H
17937.500	40.00	-23.07	41.20	21.88	54.00	14.00	V
17994.500	40.53	-22.92	41.20	22.25	54.00	13.47	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5409.875	44.48	-22.39	34.84	32.03	54.00	9.52	V
5413.750	44.46	-22.47	34.82	32.11	54.00	9.54	V
11650.000	33.95	-29.25	38.40	24.80	54.00	20.05	H
15888.000	39.10	-23.88	40.68	22.30	54.00	14.90	V
17951.500	40.27	-23.15	41.20	22.22	54.00	13.73	V
17967.500	40.26	-23.11	41.20	22.17	54.00	13.74	H

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5405.500	44.37	-22.48	34.87	31.98	54.00	9.63	V
5408.750	44.52	-22.41	34.85	32.08	54.00	9.48	V
11510.000	34.00	-29.64	38.30	25.34	54.00	20.00	V
15879.000	39.12	-23.70	40.66	22.16	54.00	14.88	H
17889.500	39.77	-23.20	41.20	21.78	54.00	14.23	H
17975.500	40.31	-23.12	41.20	22.23	54.00	13.69	V

. ©Copyright. All rights reserved by CTTL.

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5406.500	44.39	-22.46	34.86	31.98	54.00	9.61	V
5409.250	44.44	-22.40	34.84	31.99	54.00	9.56	V
11590.000	34.20	-29.29	38.30	25.19	54.00	19.80	V
15860.500	39.10	-24.03	40.62	22.51	54.00	14.90	H
17947.500	40.21	-23.11	41.20	22.12	54.00	13.79	H
17993.500	40.57	-22.95	41.20	22.32	54.00	13.43	H

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5836.875	44.42	-22.49	34.97	31.93	54.00	9.58	V
5409.500	44.45	-22.39	34.84	32.00	54.00	9.55	V
11550.000	34.45	-29.30	38.30	25.46	54.00	19.55	H
15877.500	39.43	-23.74	40.66	22.51	54.00	14.57	H
17985.000	40.67	-23.10	41.20	22.57	54.00	13.33	H
17997.000	40.77	-22.85	41.20	22.42	54.00	13.23	H

. ©Copyright. All rights reserved by CTTL.

Peak Results：

802.11a

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5653.047	58.48	-22.27	34.70	46.06	70.46	11.97	H
5651.783	58.11	-22.31	34.70	45.72	69.52	11.41	V
11490.000	46.00	-29.46	38.28	37.18	74.00	28.00	H
17235.000	52.62	-23.23	40.96	34.88	68.30	15.68	V
17503.000	53.39	-23.36	41.00	35.75	68.30	14.91	H
17627.500	52.60	-23.17	41.06	34.72	68.30	15.70	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5761.000	59.42	-22.36	34.82	46.97	68.30	8.88	H
5808.000	60.28	-22.27	34.92	47.63	68.30	8.02	V
11570.000	47.13	-29.58	38.30	38.41	74.00	26.87	H
17355.000	52.19	-23.36	40.90	34.64	68.30	16.11	V
17624.500	53.22	-23.13	41.05	35.30	68.30	15.08	H
17679.000	53.34	-23.43	41.16	35.61	68.30	14.96	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5921.780	58.78	-22.17	35.10	45.85	70.58	11.81	V
5922.470	58.47	-22.19	35.10	45.56	70.07	11.61	V
11650.000	46.40	-29.25	38.40	37.25	68.30	21.90	V
17475.000	50.64	-23.22	40.98	32.89	68.30	17.66	H
17530.000	54.04	-23.40	41.00	36.44	68.30	14.26	V
17621.000	53.41	-23.08	41.04	35.45	68.30	14.89	H

. ©Copyright. All rights reserved by CTTL.

802.11n-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5651.783	57.95	-22.31	34.70	45.55	69.52	11.57	V
5653.680	58.03	-22.26	34.70	45.59	70.92	12.89	V
11490.000	47.61	-29.46	38.28	38.79	74.00	26.39	H
17235.000	50.79	-23.23	40.96	33.06	68.30	17.51	V
17505.500	51.35	-23.37	41.00	33.72	68.30	16.95	V
17666.000	50.34	-23.30	41.13	32.50	68.30	17.96	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5758.000	57.39	-22.37	34.82	44.94	68.30	10.91	H
5811.500	57.42	-22.20	34.92	44.69	68.30	10.88	H
11570.000	45.56	-29.58	38.30	36.84	74.00	28.44	V
17355.000	50.91	-23.36	40.90	33.36	68.30	17.39	V
17459.500	52.61	-23.19	40.96	34.84	68.30	15.69	V
17688.000	52.79	-23.40	41.18	35.01	68.30	15.51	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5922.757	59.32	-22.20	35.10	46.42	69.86	10.54	H
5924.195	58.93	-22.25	35.10	46.08	68.80	9.86	H
11650.000	46.45	-29.25	38.40	37.30	74.00	27.55	H
17475.000	51.31	-23.22	40.98	33.56	68.30	16.99	V
17608.000	54.16	-22.94	41.02	36.09	68.30	14.14	V
17648.000	53.24	-23.32	41.10	35.47	68.30	15.05	H

. ©Copyright. All rights reserved by CTTL.

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5651.035	57.76	-22.32	34.70	45.38	68.97	11.21	V
5651.495	57.79	-22.31	34.70	45.41	69.31	11.51	V
11510.000	45.22	-29.64	38.30	36.56	74.00	28.78	H
17265.000	50.66	-23.21	40.93	32.93	68.30	17.64	V
17445.000	52.99	-23.18	40.95	35.23	68.30	15.31	V
17626.000	52.88	-23.15	41.05	34.97	68.30	15.42	H

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5917.640	59.34	-22.22	35.10	46.46	73.65	14.30	H
5923.102	59.31	-22.21	35.10	46.42	69.60	10.30	H
11590.000	45.65	-29.29	38.30	36.64	74.00	28.35	V
17385.000	51.56	-23.39	40.90	34.05	68.30	16.74	V
17551.000	53.58	-23.32	41.00	35.91	68.30	14.72	V
17651.500	53.55	-23.29	41.10	35.74	68.30	14.75	V

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5651.438	58.01	-22.31	34.70	45.63	69.26	11.25	H
5653.565	58.35	-22.26	34.70	45.91	70.84	12.49	H
11490.000	45.45	-29.46	38.28	36.63	74.00	28.55	H
17235.000	51.22	-23.23	40.96	33.48	68.30	17.08	V
17386.500	53.30	-23.38	40.90	35.78	68.30	15.00	V
17672.500	52.98	-23.37	41.15	35.21	68.30	15.32	H

. ©Copyright. All rights reserved by CTTL.

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5767.500	58.11	-22.39	34.84	45.67	68.30	10.19	H
5807.000	58.34	-22.29	34.91	45.72	68.30	9.96	V
11570.000	45.92	-29.58	38.30	37.20	74.00	28.08	V
17355.000	50.62	-23.36	40.90	33.08	68.30	17.68	H
17465.500	53.10	-23.18	40.97	35.31	68.30	15.20	H
17623.000	53.54	-23.11	41.05	35.61	68.30	14.76	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5922.642	58.48	-22.20	35.10	45.58	69.94	11.47	V
5924.712	58.55	-22.26	35.10	45.71	68.41	9.87	V
11650.000	45.28	-29.25	38.40	36.13	74.00	28.72	H
17475.000	51.00	-23.22	40.98	33.24	68.30	17.30	H
17569.500	52.22	-23.28	41.00	34.50	68.30	16.08	V
17695.000	53.04	-23.19	41.19	35.04	68.30	15.26	V

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5650.460	58.10	-22.34	34.70	45.74	68.54	10.44	V
5651.265	58.39	-22.32	34.70	46.01	69.14	10.74	H
11510.000	45.98	-29.64	38.30	37.31	74.00	28.02	H
17265.000	50.67	-23.21	40.93	32.94	68.30	17.63	V
17443.000	53.01	-23.15	40.94	35.22	68.30	15.29	V
17572.000	53.22	-23.28	41.00	35.50	68.30	15.08	V

. ©Copyright. All rights reserved by CTTL.

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5922.182	59.23	-22.19	35.10	46.32	70.28	11.05	H
5924.023	59.03	-22.24	35.10	46.17	68.92	9.90	H
11590.000	47.01	-29.29	38.30	38.00	74.00	26.99	V
17385.000	51.15	-23.39	40.90	33.64	68.30	17.15	V
17507.500	52.28	-23.38	41.00	34.66	68.30	16.02	V
17630.000	53.01	-23.21	41.06	35.16	68.30	15.29	V

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5650.977	58.45	-22.33	34.70	46.08	68.30	9.85	V
5924.023	58.47	-22.24	35.10	45.61	68.30	9.83	H
11550.000	45.67	-29.30	38.30	36.67	68.30	22.63	V
17325.000	51.12	-23.36	40.90	33.59	68.30	17.18	H
17423.500	53.62	-23.34	40.92	36.03	68.30	14.68	H
17617.000	53.06	-23.02	41.03	35.05	68.30	15.23	V

Conclusion: PASS

Note:

1. The spurious emission above 18G is noise only.
2. All emissions below 30MHz are more than 20 dB below the limit

. ©Copyright. All rights reserved by CTTL.

Band edge compliance

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.10	P
	5825 MHz	Fig.11	P
802.11n HT20	5745 MHz	Fig.12	P
	5825 MHz	Fig.13	P
802.11n HT40	5755 MHz	Fig.14	P
	5795 MHz	Fig.15	P
802.11ac HT20	5745 MHz	Fig.16	P
	5825 MHz	Fig.17	P
802.11ac HT40	5755 MHz	Fig.18	P
	5795 MHz	Fig.19	P
802.11ac HT80	5775 MHz	Fig.20 Fig.21	P

Conclusion: PASS

Test graphs as below:

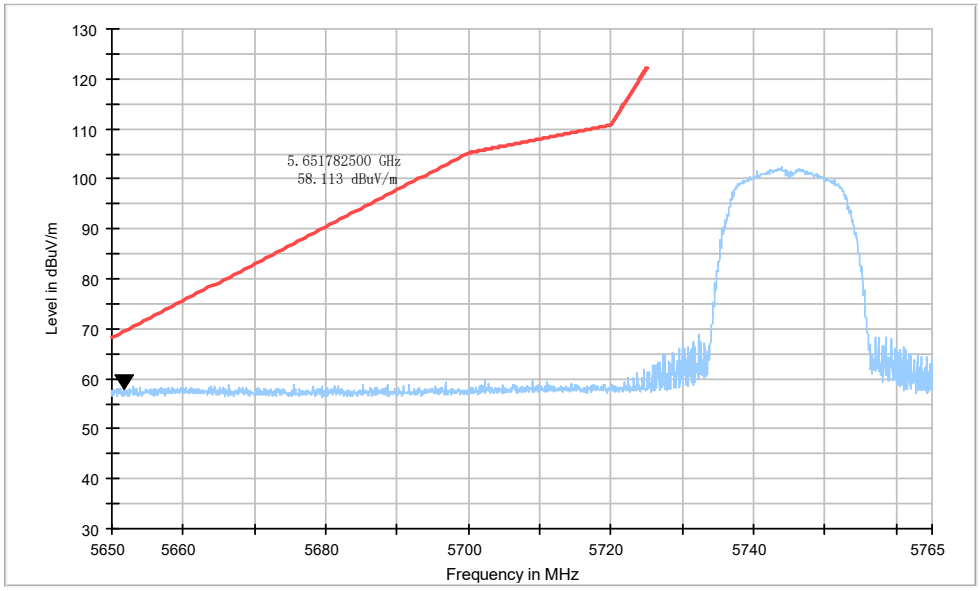

Fig. 15 Band Edges (802.11a Ch149, 5745MHz)

. ©Copyright. All rights reserved by CTTL.

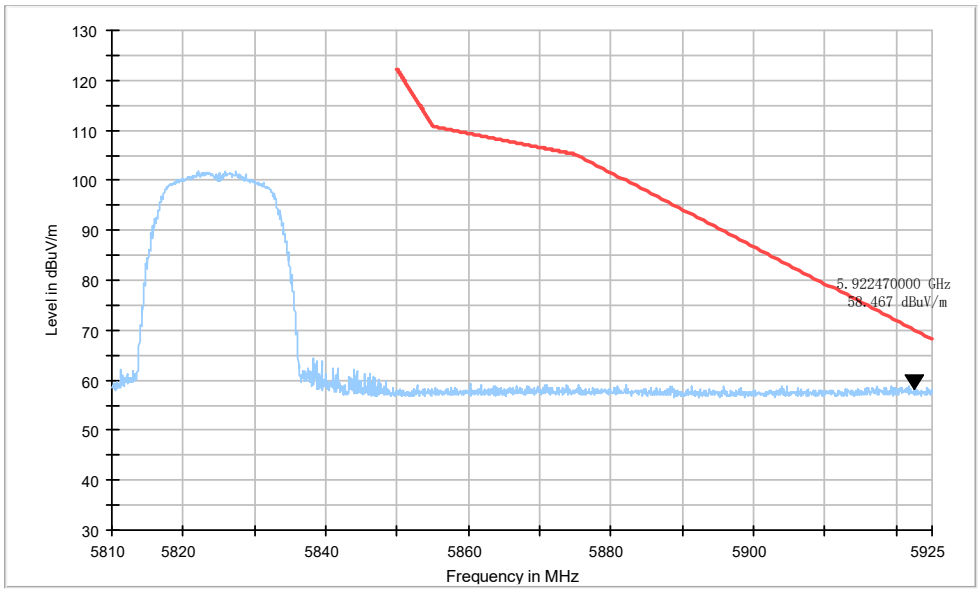

Fig. 16 Band Edges (802.11a Ch165, 5825MHz)

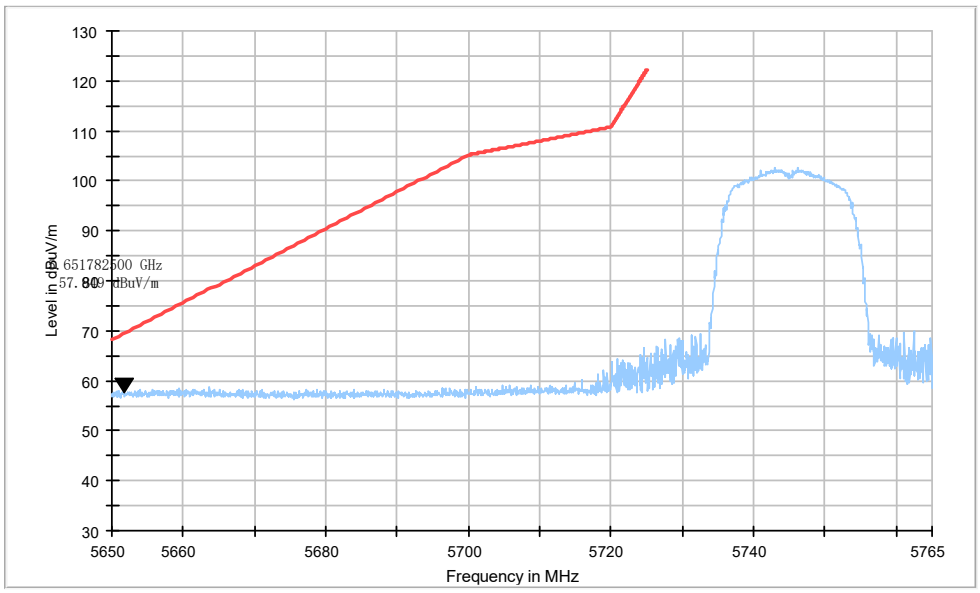

Fig. 17 Band Edges (802.11n-HT20 Ch149, 5745MHz)

. ©Copyright. All rights reserved by CTTL.

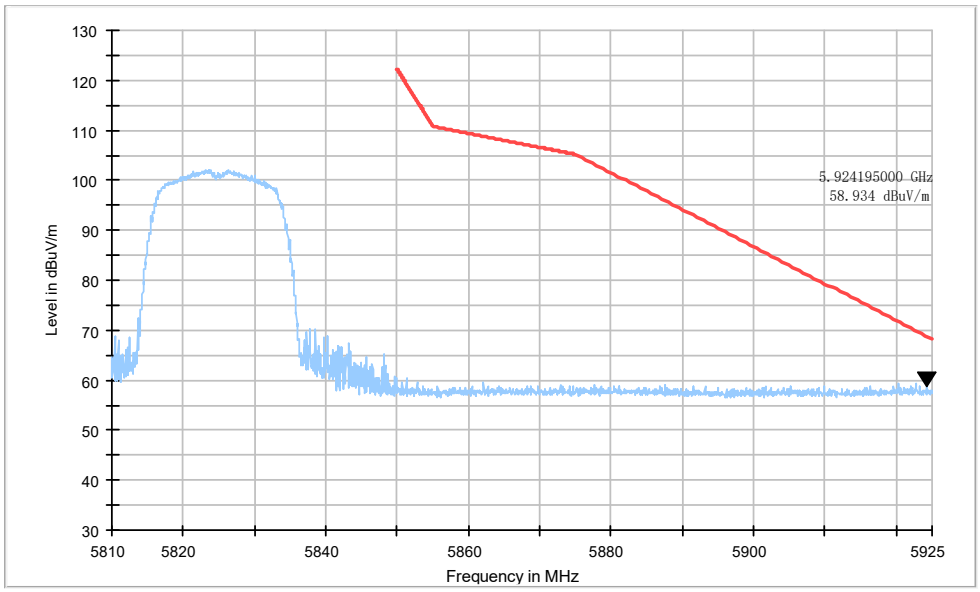

Fig. 18 Band Edges (802.11n-HT20 Ch165, 5825MHz)

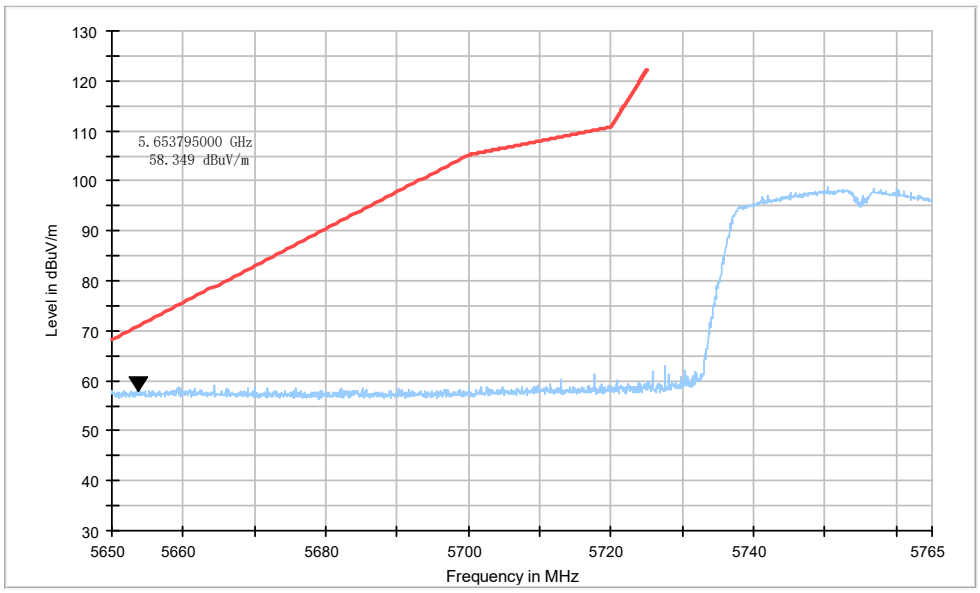

Fig. 19 Band Edges (802.11n-HT40 Ch151, 5755MHz)

. ©Copyright. All rights reserved by CTTL.

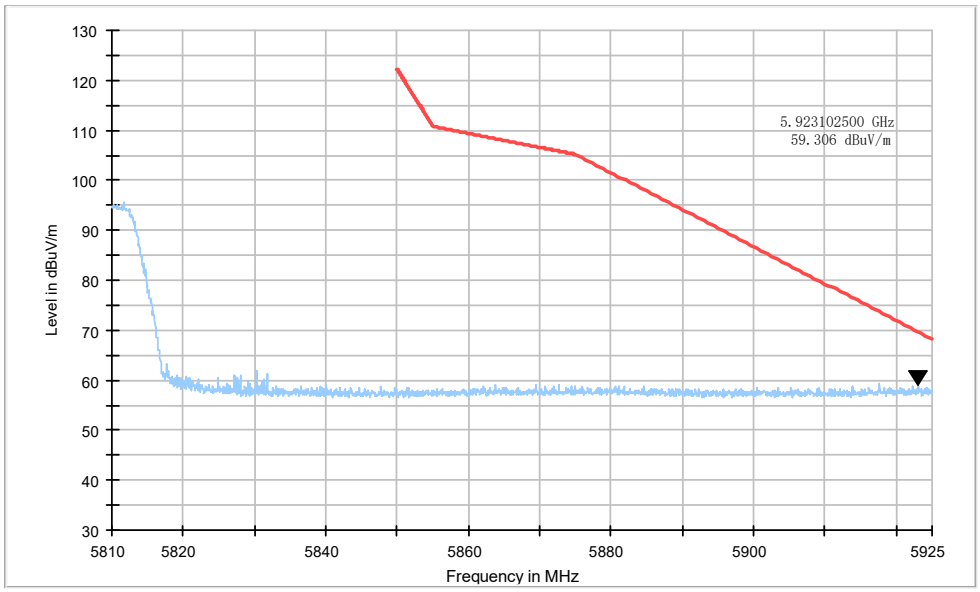

Fig. 20 Band Edges (802.11n-HT40 Ch159, 5795MHz)

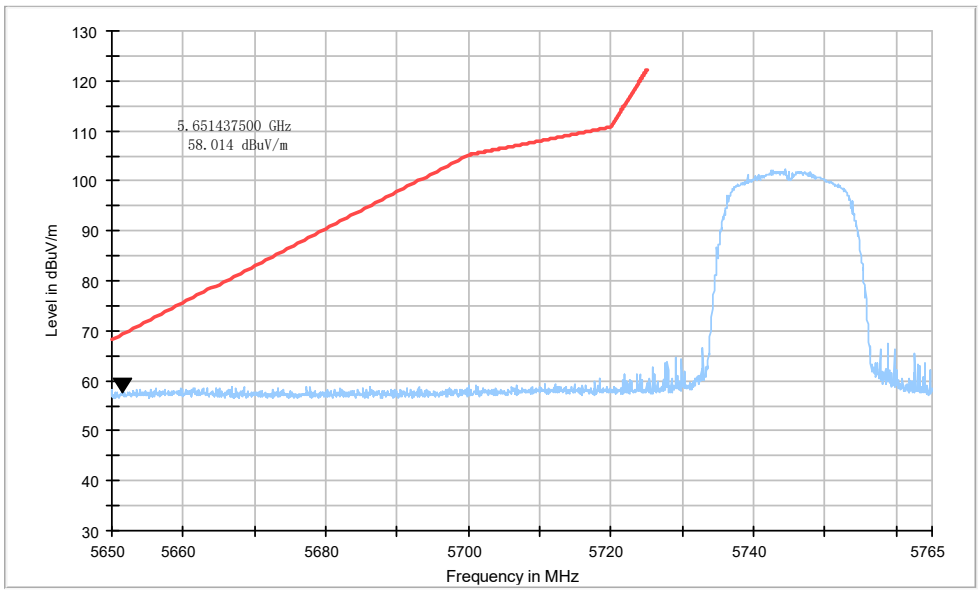

Fig. 21 Band Edges (802.11ac-HT20 Ch149, 5745MHz)

. ©Copyright. All rights reserved by CTTL.

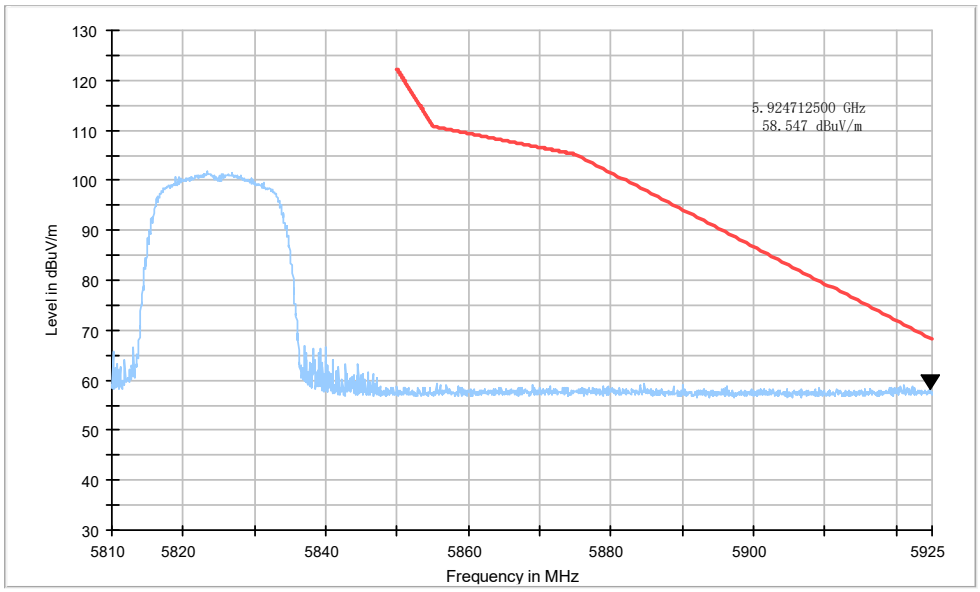

Fig. 22 Band Edges (802.11ac-HT20 Ch165, 5825MHz)

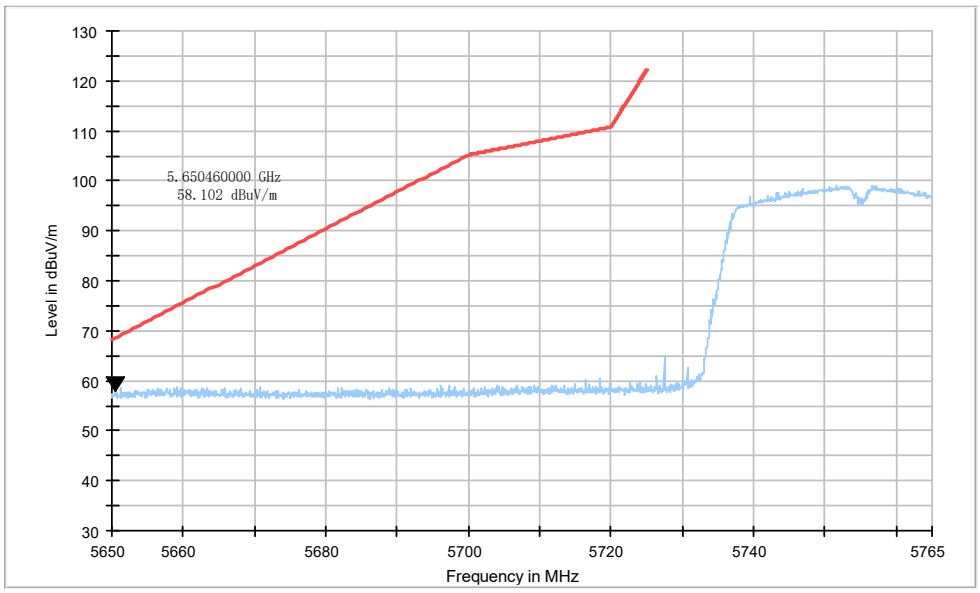

Fig. 23 Band Edges (802.11ac-HT40 Ch151, 5755MHz)

. ©Copyright. All rights reserved by CTTL.

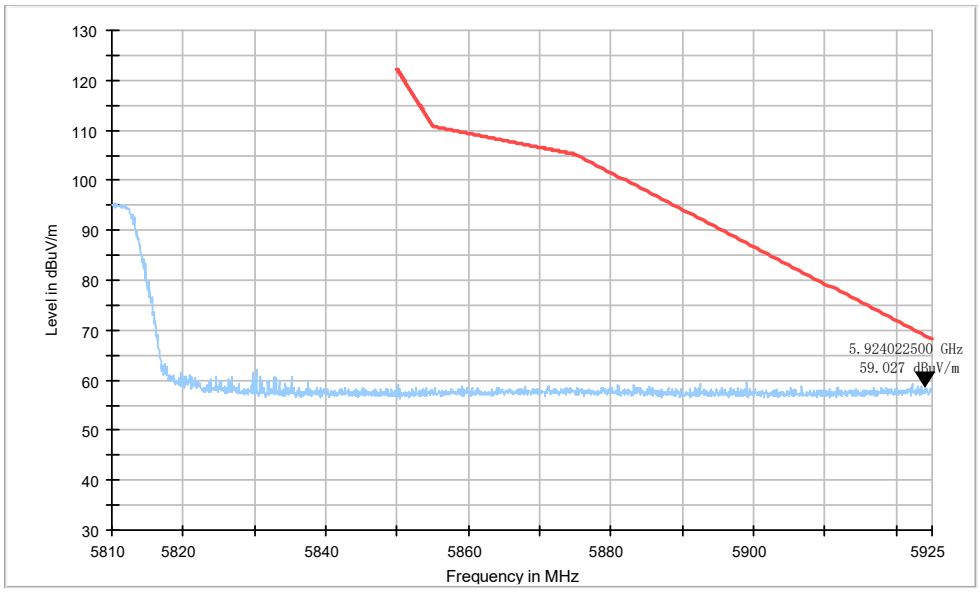

Fig. 24 Band Edges (802.11ac-HT40 Ch159, 5795MHz)

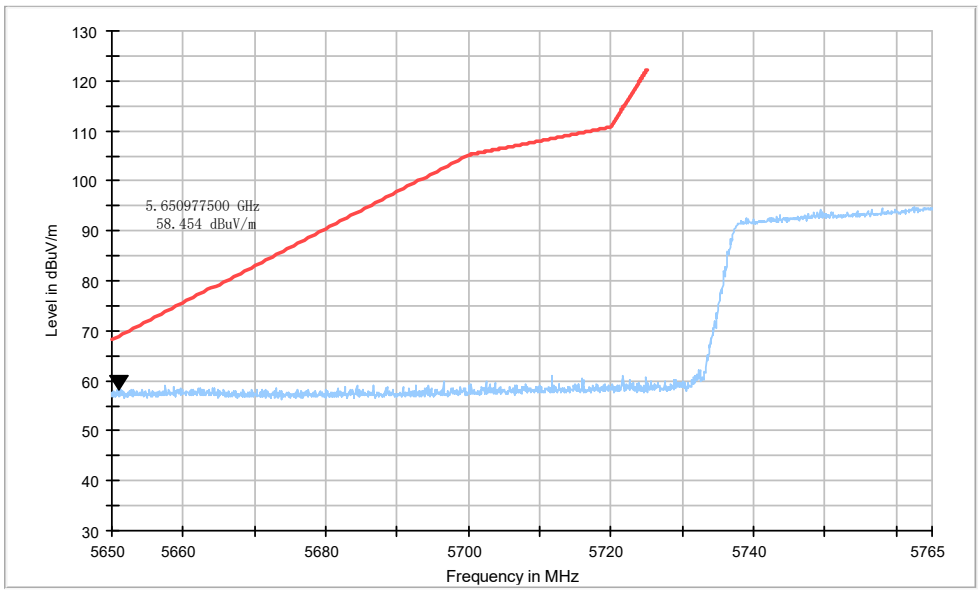

Fig. 25 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

. ©Copyright. All rights reserved by CTTL.

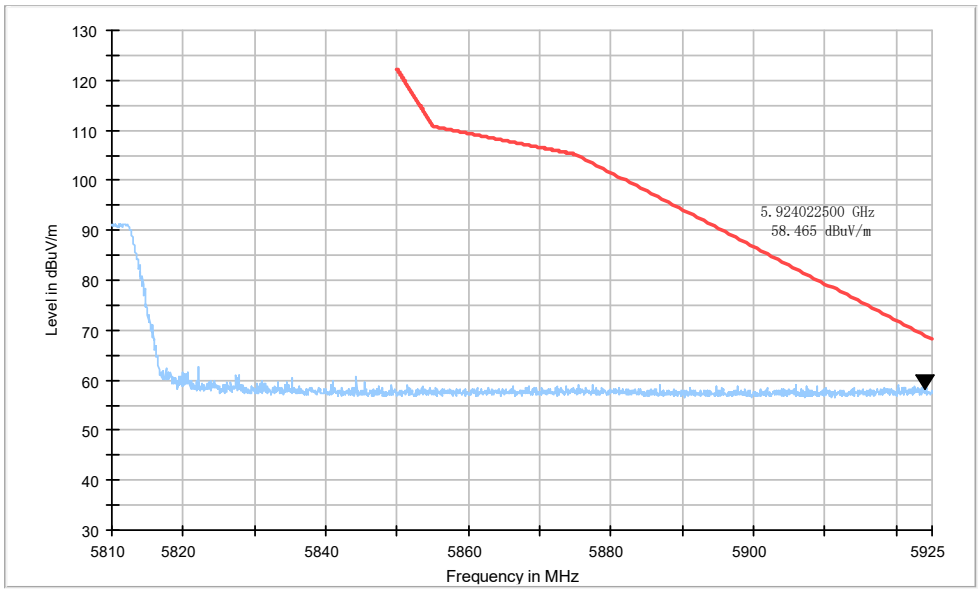

Fig. 26 Band Edges (802.11ac-HT80, 5775MHz)

. ©Copyright. All rights reserved by CTTL.

A.6. AC Powerline Conducted Emission

A.6.1 Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

A.6.2 Method of Measurement

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.

The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

A.6.3 Test Condition

Voltage（V）	Frequency（Hz）
120	60

A.6.4 Test setup

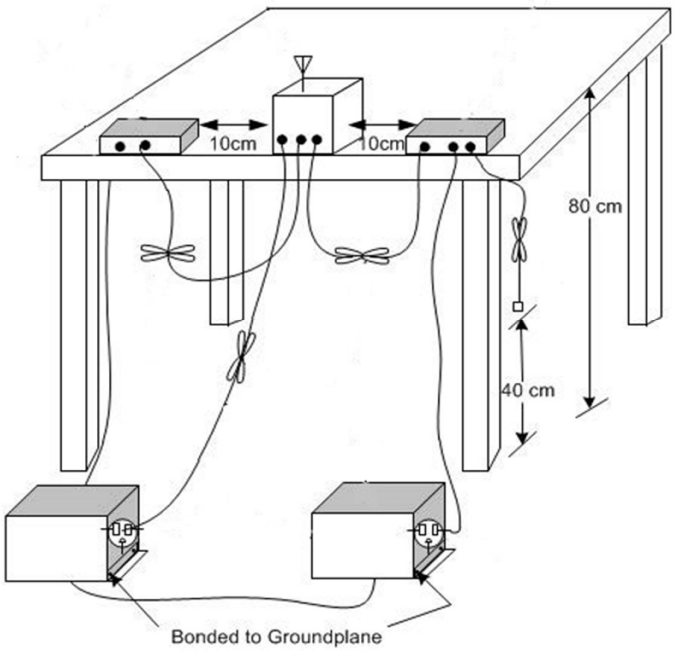

. ©Copyright. All rights reserved by CTTL.

A.6.5 Measurement Result and limit

Wi-Fi (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV) With charger		Conclusion
		Wi-Fi	Idle	
0.15 to 0.5	66 to 56	Fig.A.6.1	Fig. A.6.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Wi-Fi (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV) With charger		Conclusion
		Wi-Fi	Idle	
0.15 to 0.5	56 to 46	Fig.A.6.1	Fig. A.6.2	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass

Test graphs as below:

. ©Copyright. All rights reserved by CTTL.

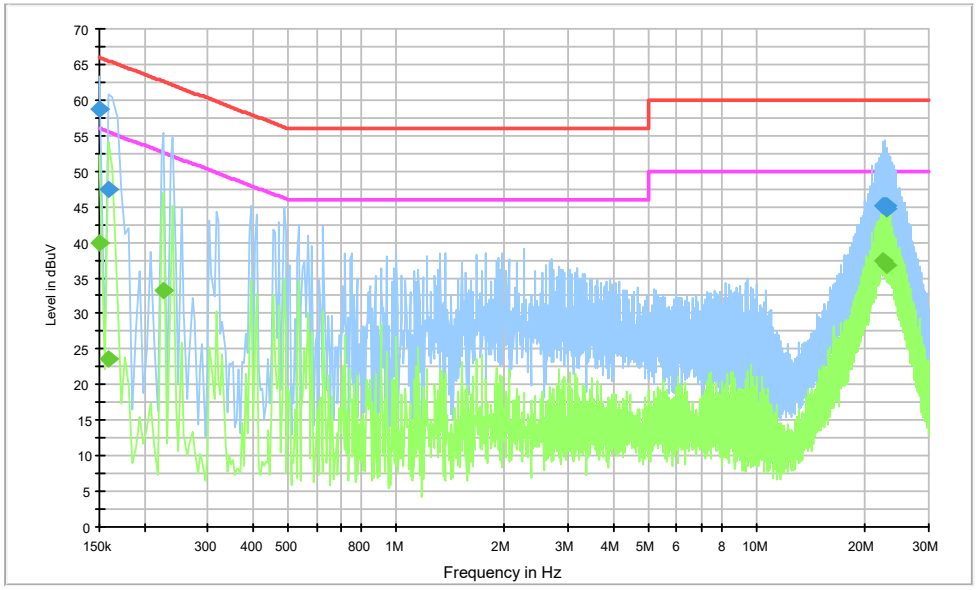

Fig.A.6.1. AC Powerline Conducted Emission-Idle

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	58.7	2000.0	9.000	On	L1	20.2	7.3	66.0
0.159000	47.5	2000.0	9.000	On	N	20.1	18.1	65.5
22.492500	45.2	2000.0	9.000	On	L1	20.1	14.8	60.0
22.551000	45.2	2000.0	9.000	On	L1	20.1	14.8	60.0
22.830000	45.1	2000.0	9.000	On	L1	20.1	14.9	60.0
22.983000	44.7	2000.0	9.000	On	L1	20.1	15.3	60.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	40.0	2000.0	9.000	On	L1	20.2	16.0	56.0
0.159000	23.6	2000.0	9.000	On	L1	20.1	31.9	55.5
0.226500	33.1	2000.0	9.000	On	L1	20.0	19.4	52.6
22.447500	37.4	2000.0	9.000	On	L1	20.1	12.6	50.0
22.492500	37.4	2000.0	9.000	On	L1	20.1	12.6	50.0
22.920000	36.9	2000.0	9.000	On	L1	20.1	13.1	50.0

. ©Copyright. All rights reserved by CTTL.

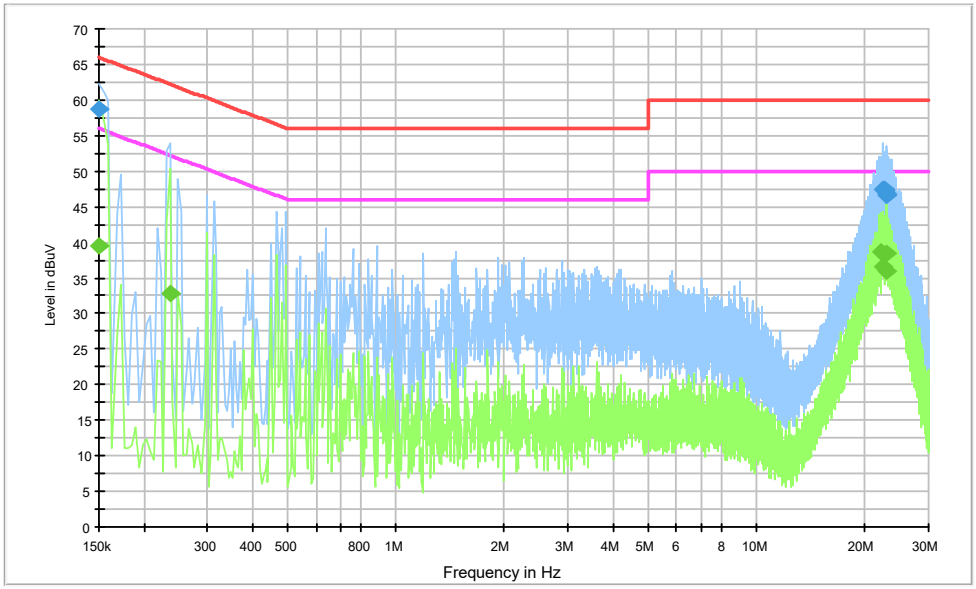

Fig.A.6.2. AC Powerline Conducted Emission-Idle

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	58.7	2000.0	9.000	On	L1	20.2	7.3	66.0
22.492500	47.4	2000.0	9.000	On	L1	20.1	12.6	60.0
22.537500	47.4	2000.0	9.000	On	L1	20.1	12.6	60.0
22.767000	47.3	2000.0	9.000	On	L1	20.1	12.7	60.0
22.888500	46.9	2000.0	9.000	On	L1	20.1	13.1	60.0
23.028000	46.6	2000.0	9.000	On	L1	20.1	13.4	60.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	39.5	2000.0	9.000	On	L1	20.2	16.5	56.0
0.235500	32.9	2000.0	9.000	On	L1	20.0	19.4	52.3
22.141500	38.7	2000.0	9.000	On	L1	20.1	11.3	50.0
22.492500	36.5	2000.0	9.000	On	N	20.3	13.5	50.0
22.888500	38.5	2000.0	9.000	On	L1	20.1	11.5	50.0
23.028000	35.9	2000.0	9.000	On	N	20.3	14.1	50.0

. ©Copyright. All rights reserved by CTTL.

ANNEX B: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (*refer to joint ISO-ILAC-IAF Communiqué dated April 2017*).

Presented this 26th day of June 2023.

Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

***** END OF REPORT BODY *****

. ©Copyright. All rights reserved by CTTL.