For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.38	Fig.77	320	121.6	P
	3DH3	Fig.78	1.63	Fig.79	113	184.19	P
	3DH5	Fig.80	2.89	Fig.81	55	158.95	P

Conclusion: PASS

Test graphs as below:

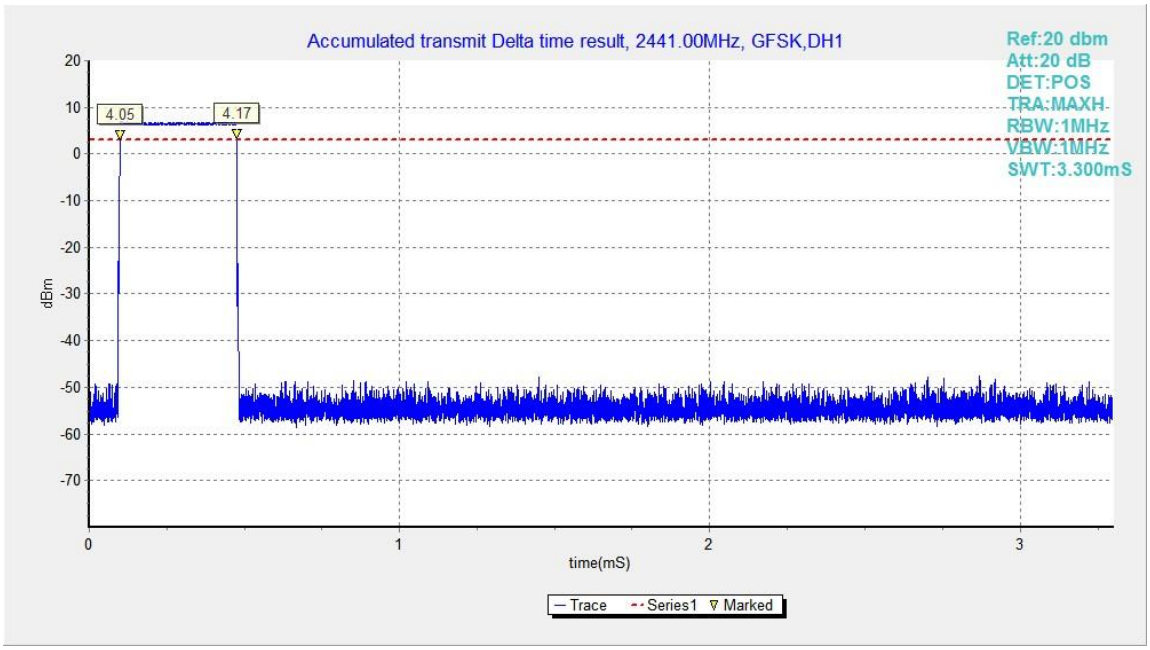

Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

©Copyright. All rights reserved by CTTL.

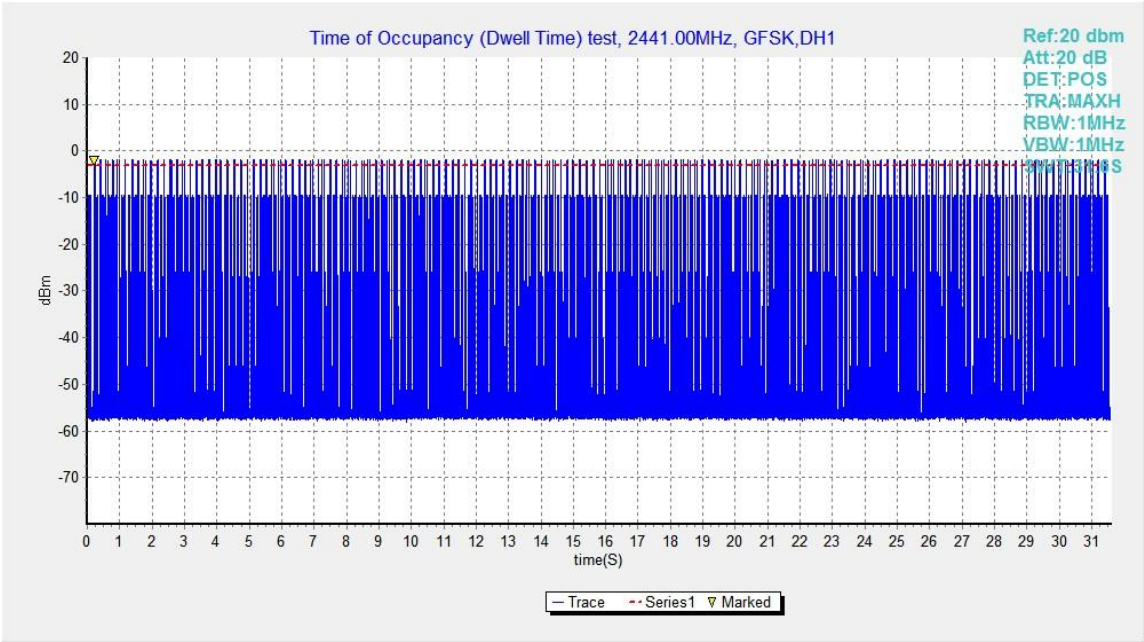

Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

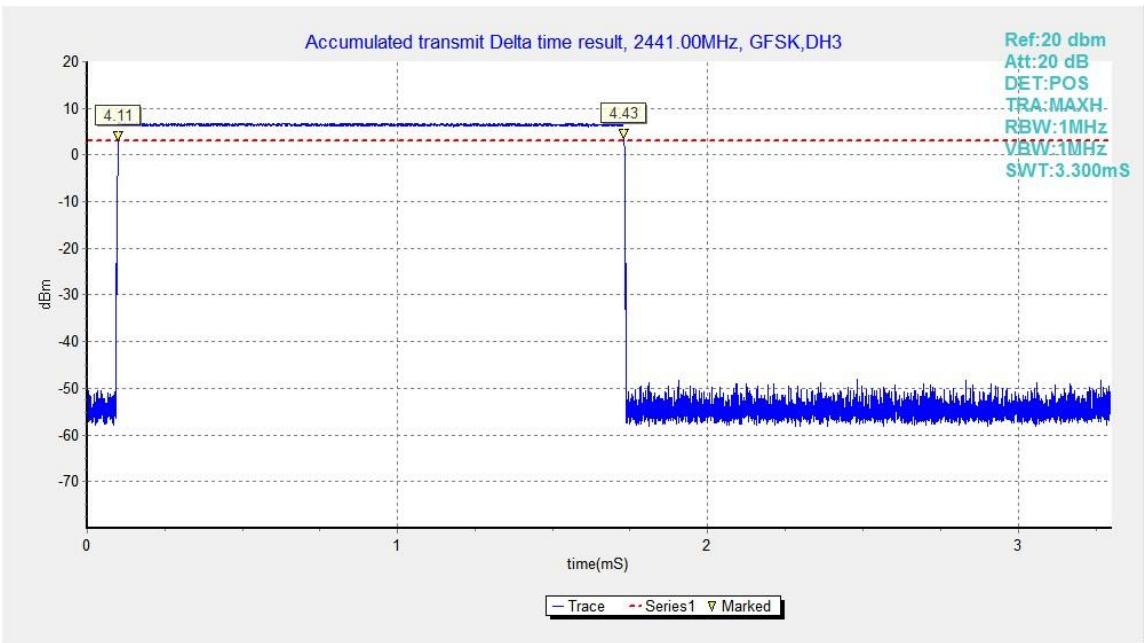

Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

©Copyright. All rights reserved by CTTL.

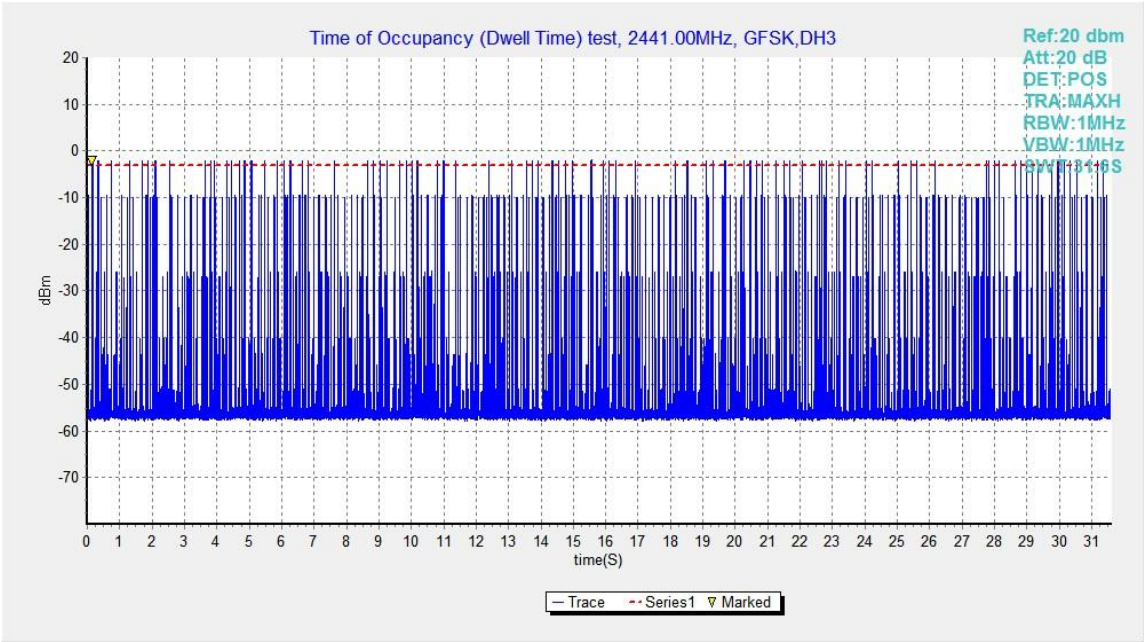

Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

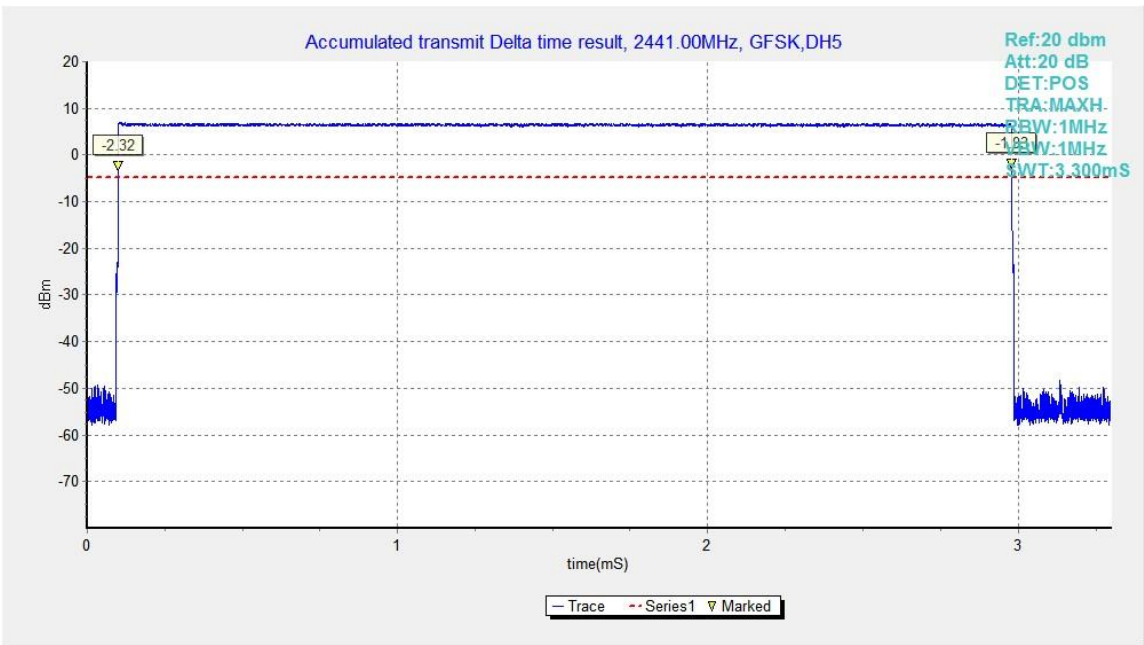

Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

©Copyright. All rights reserved by CTTL.

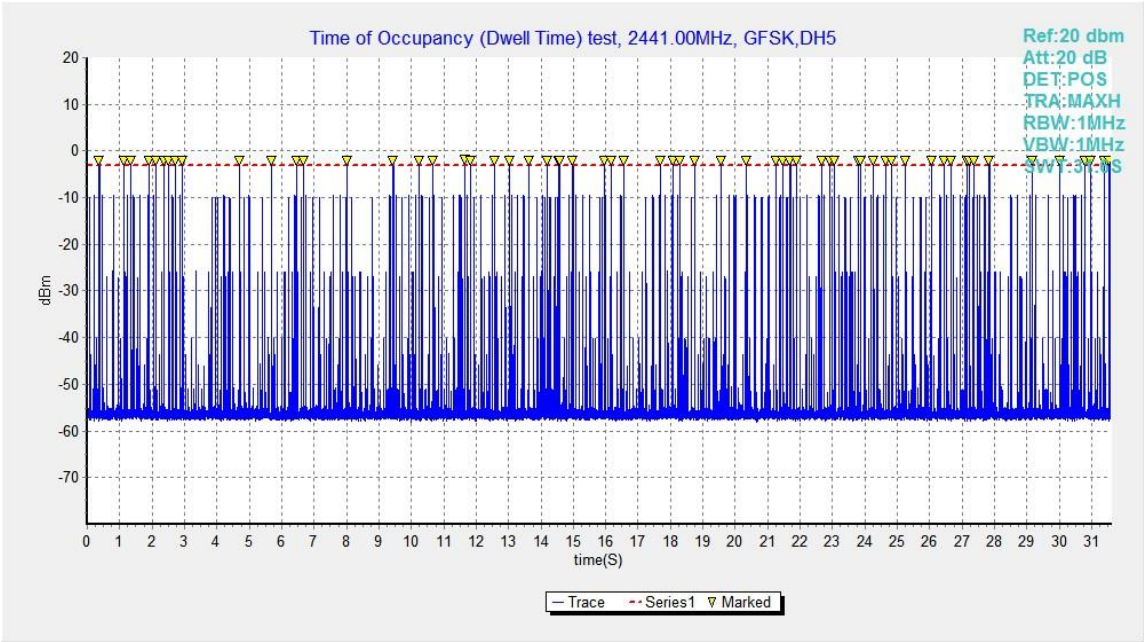

Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

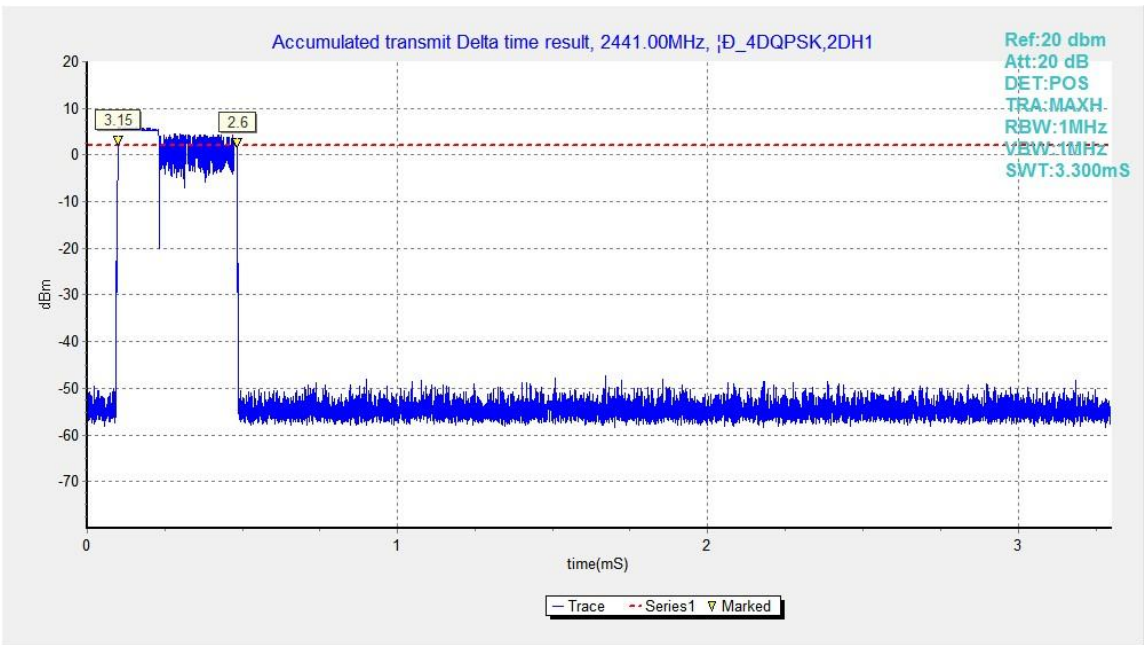

Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

©Copyright. All rights reserved by CTTL.

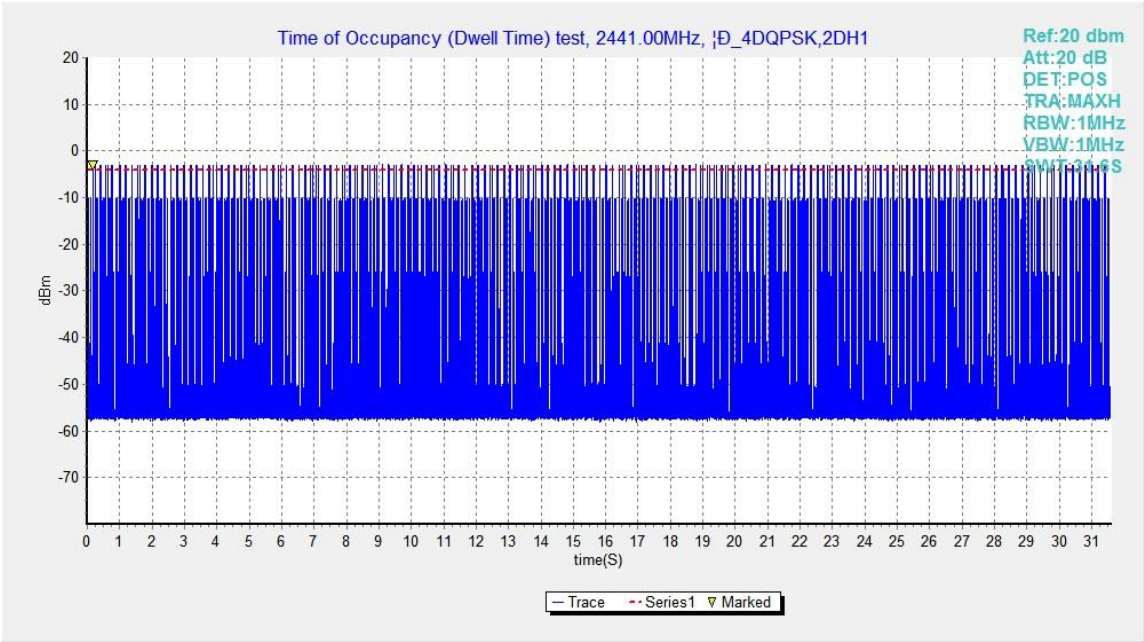

Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

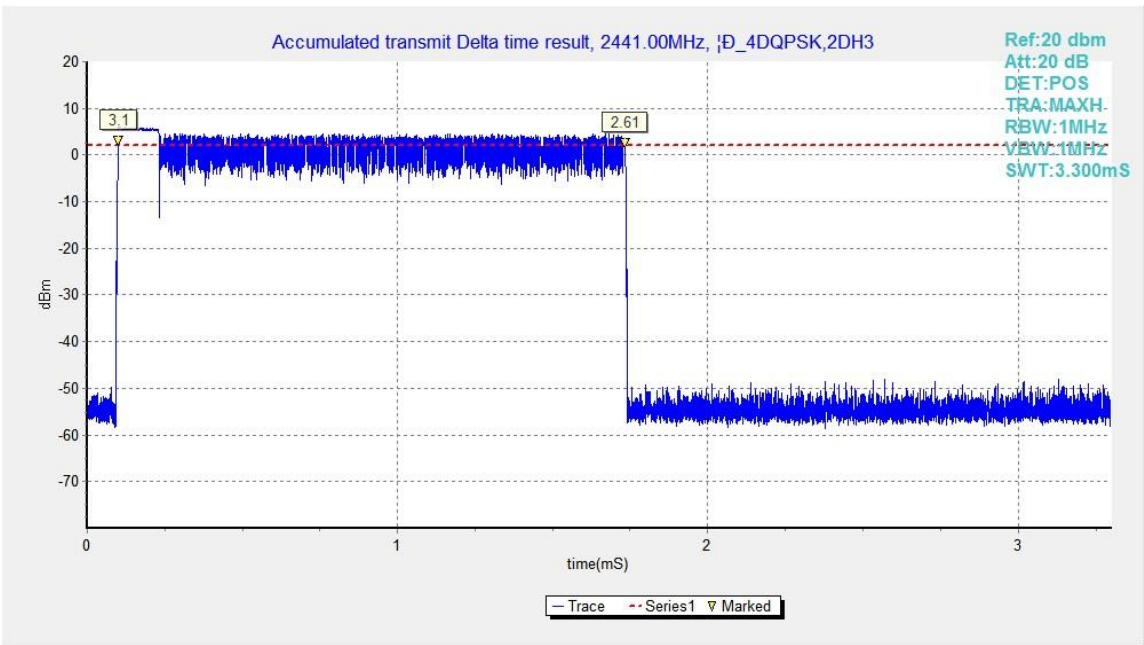

Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

©Copyright. All rights reserved by CTTL.

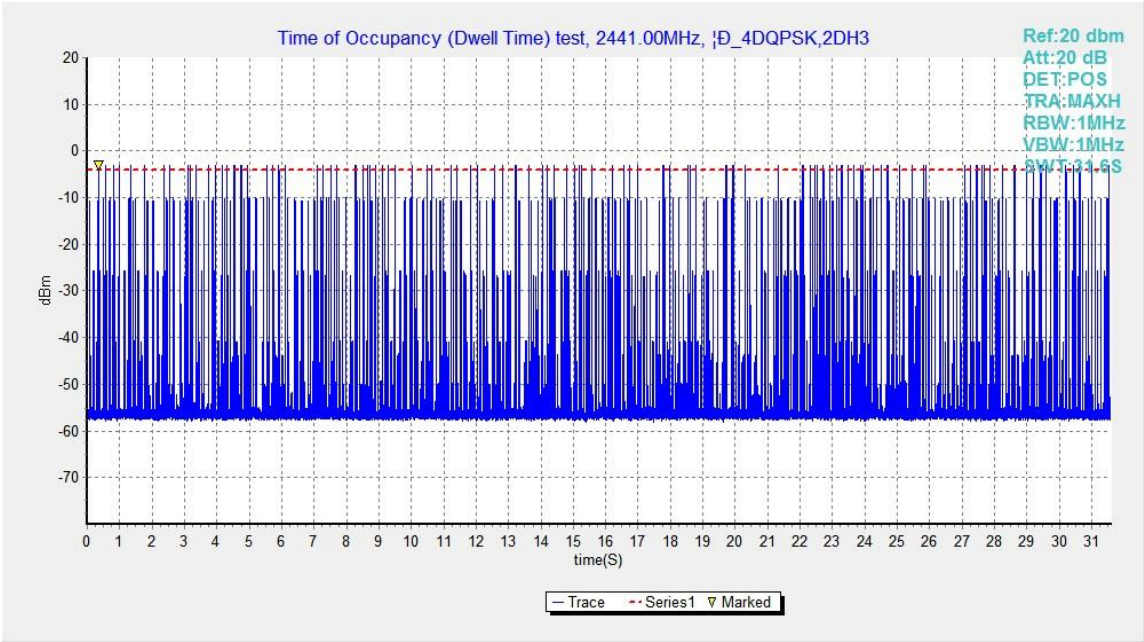

Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

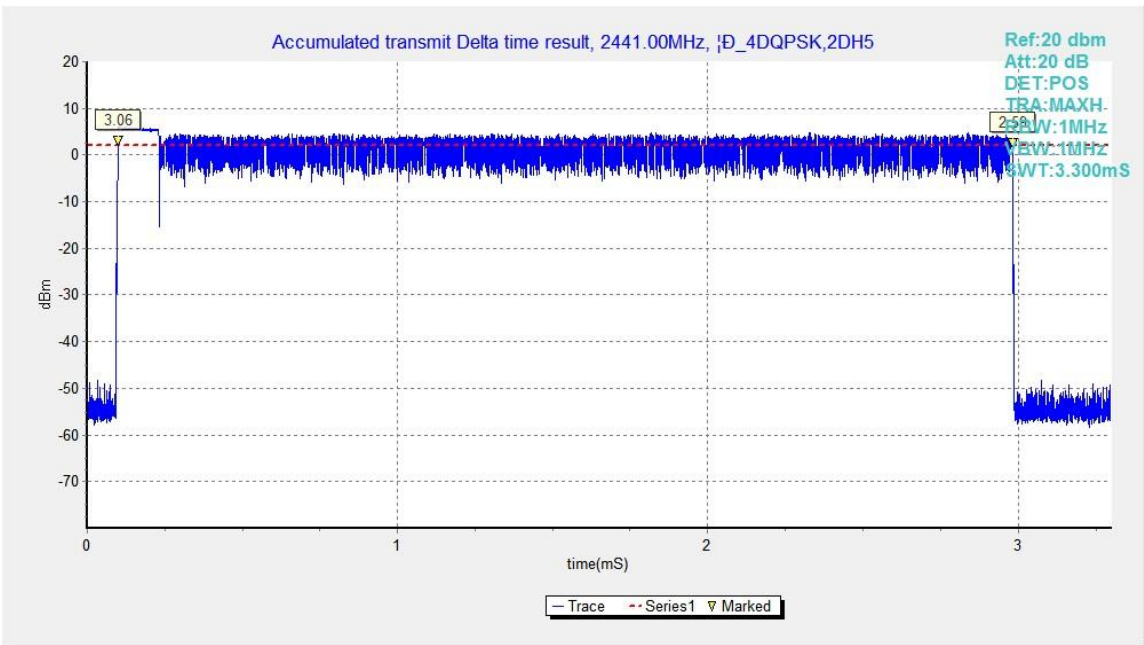

Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

©Copyright. All rights reserved by CTTL.

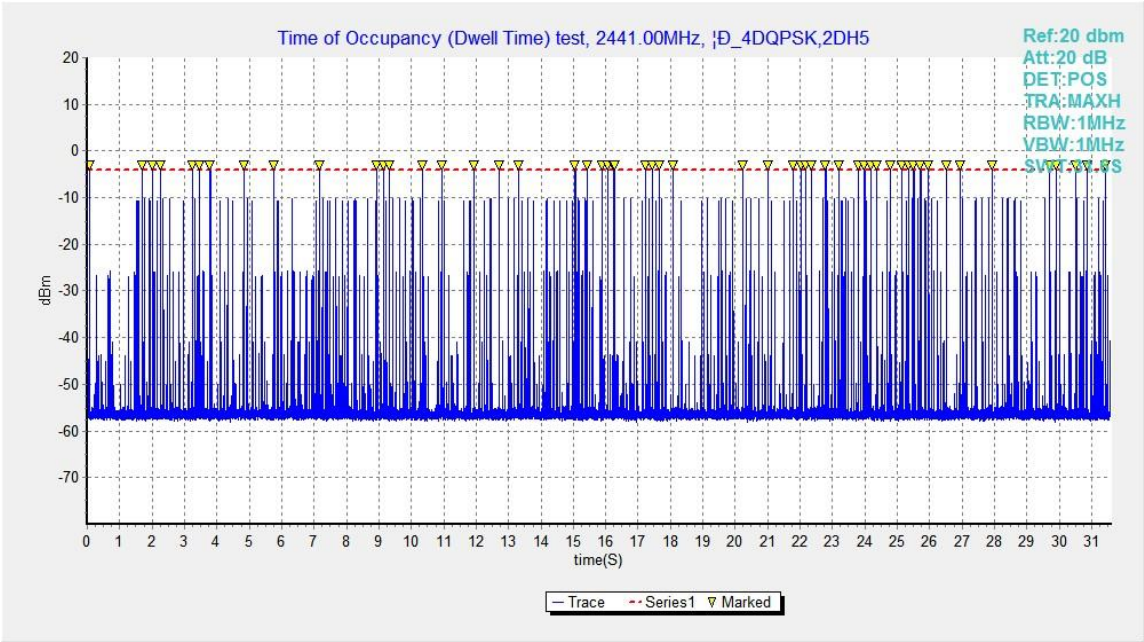

Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

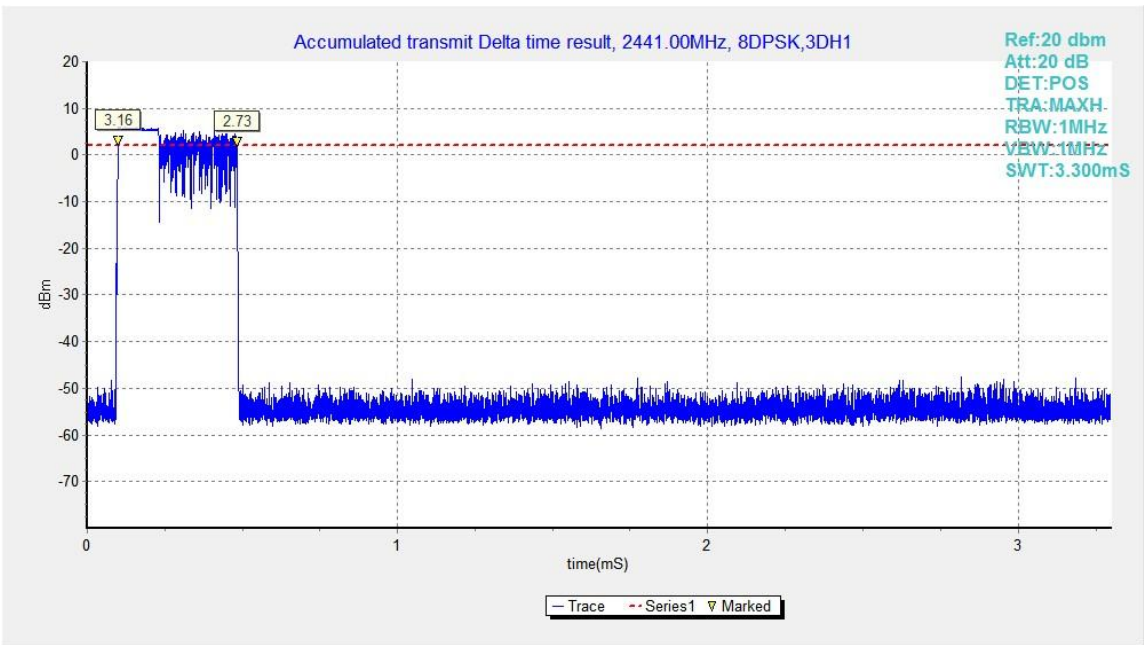

Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

©Copyright. All rights reserved by CTTL.

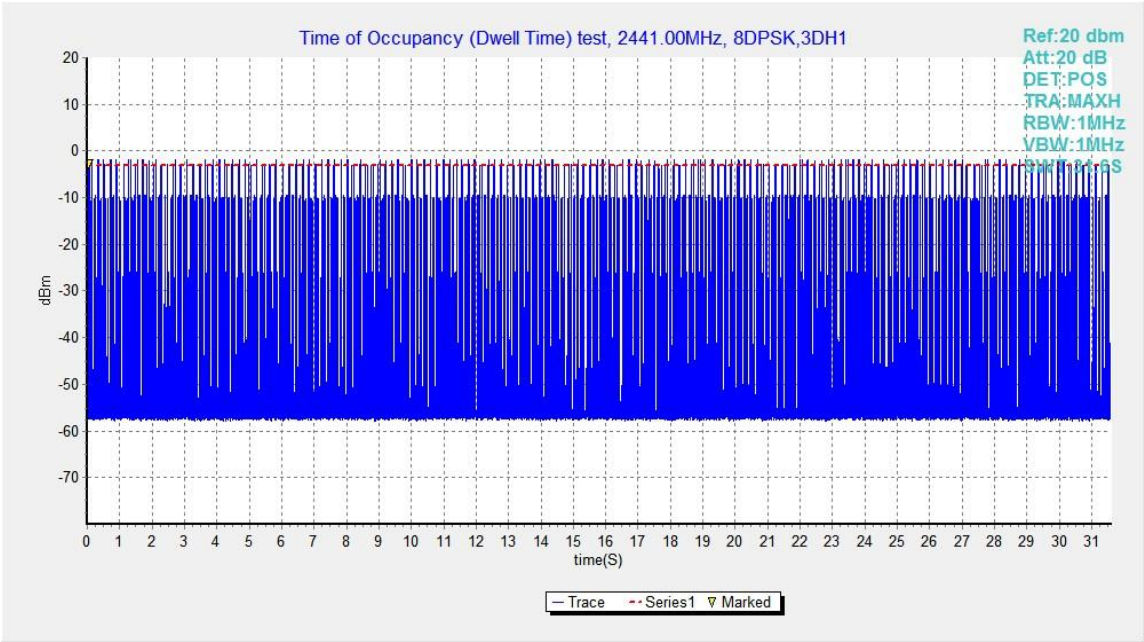

Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

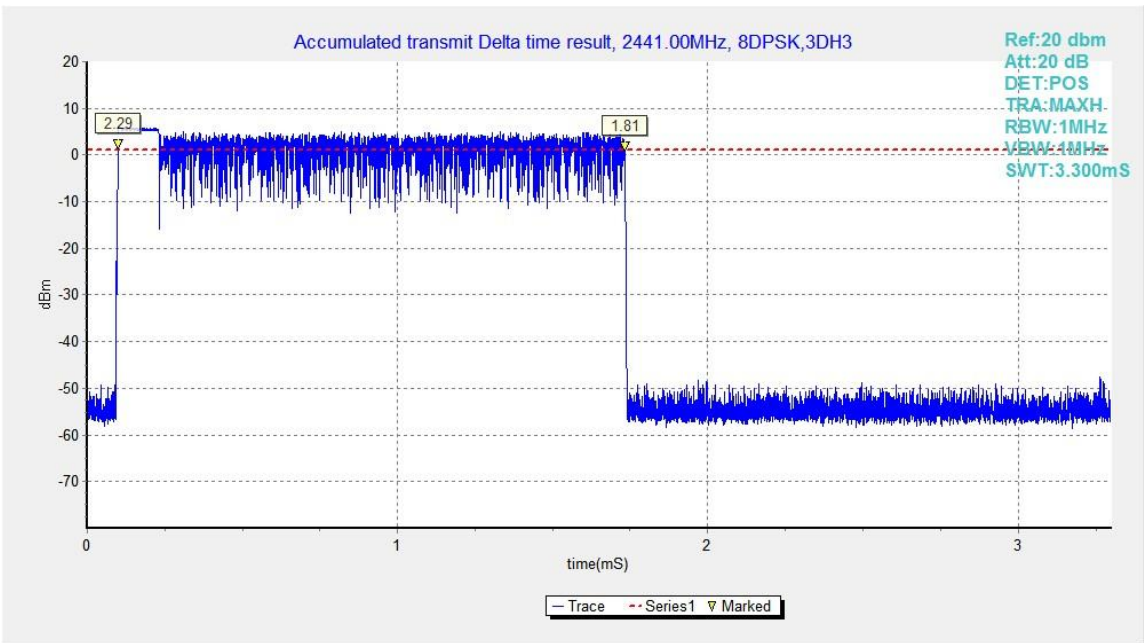

Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

©Copyright. All rights reserved by CTTL.

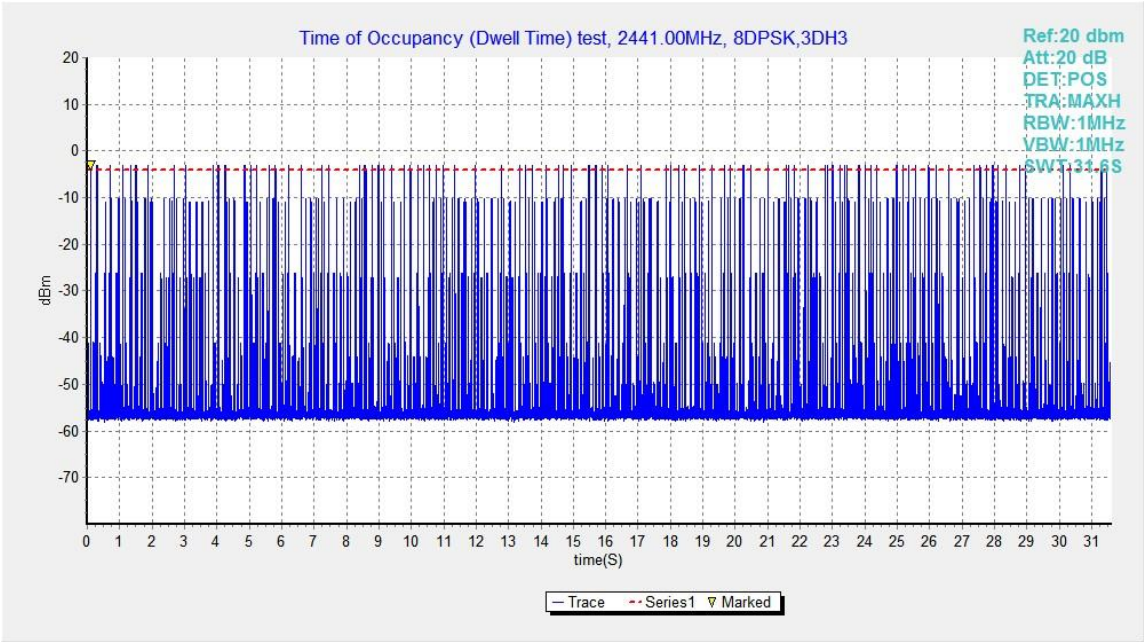

Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

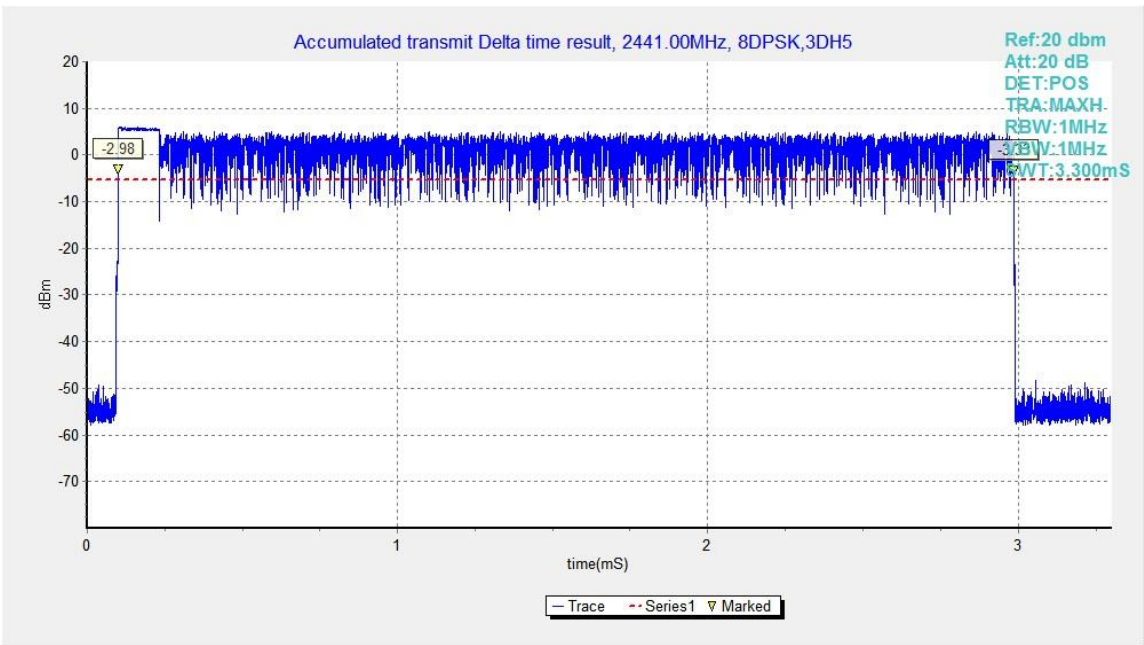

Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

©Copyright. All rights reserved by CTTL.

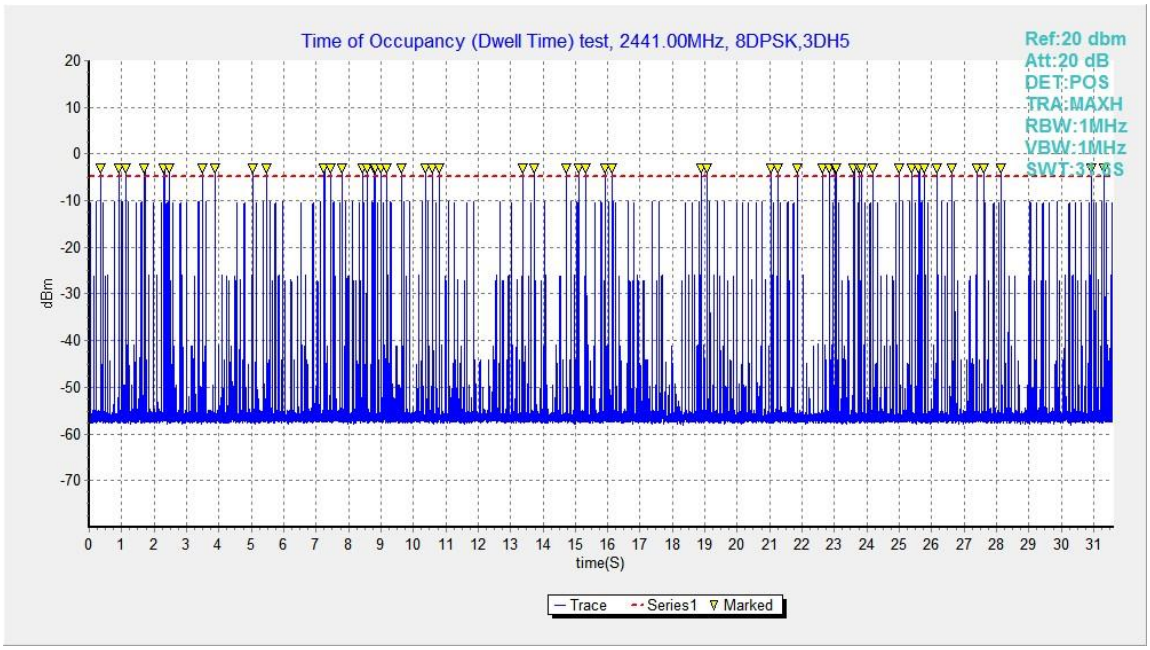

Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

©Copyright. All rights reserved by CTTL.

B.8. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.

2. Set VBW = 100 kHz.

3. Set span to 3MHz

4. Detector = peak.

5. Trace Mode = max hold.

6. Sweep = auto couple.

7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for "carrier frequency separation" test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	940.50	NA
39	Fig.83	939.75	NA
78	Fig.84	939.75	NA

For π/4 DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1253.25	NA
39	Fig.86	1254.00	NA
78	Fig.87	1211.25	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1203.00	NA
39	Fig.89	1204.50	NA
78	Fig.90	1254.00	NA

Conclusion: NA

Test graphs as below:

©Copyright. All rights reserved by CTTL.

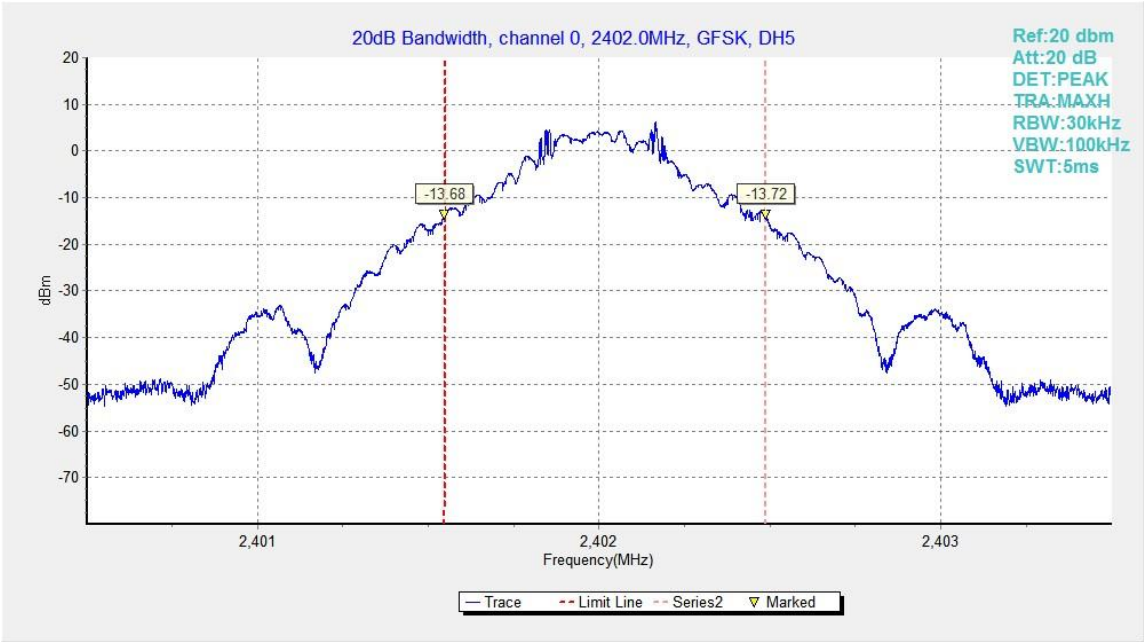

Fig.82. 20dB Bandwidth: GFSK, Channel 0

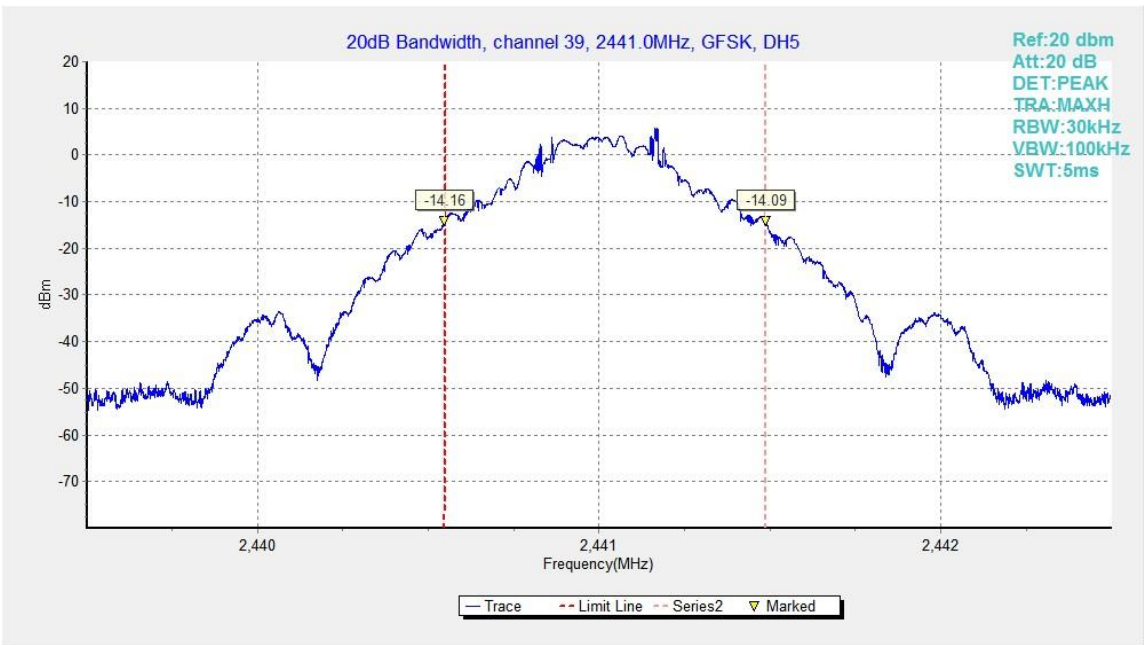

Fig.83. 20dB Bandwidth: GFSK, Channel 39

©Copyright. All rights reserved by CTTL.

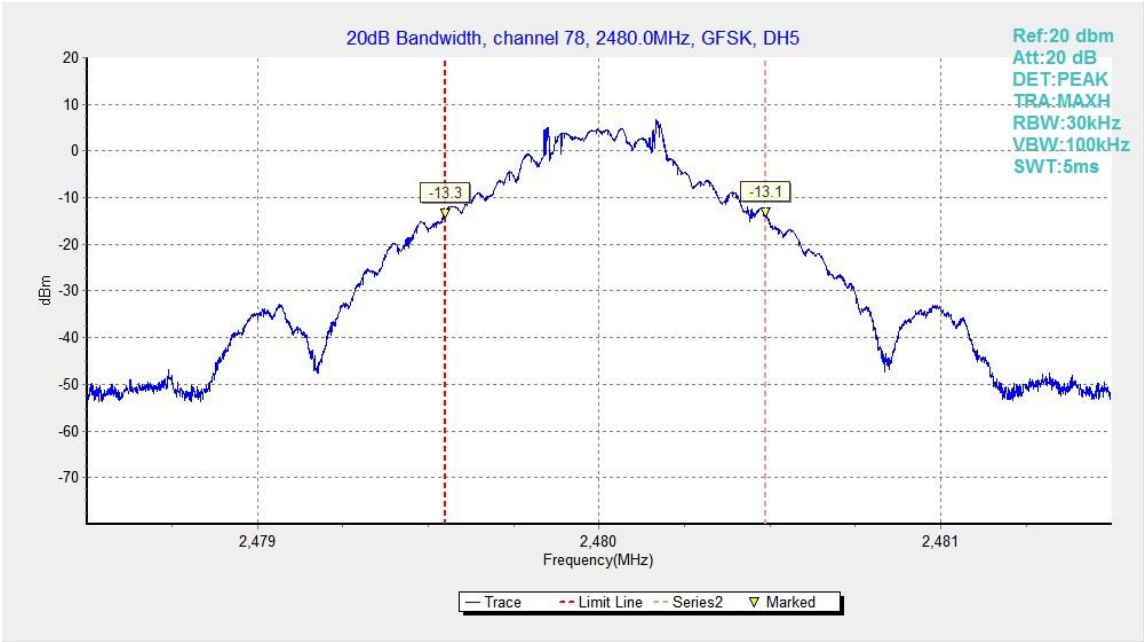

Fig.84. 20dB Bandwidth: GFSK, Channel 78

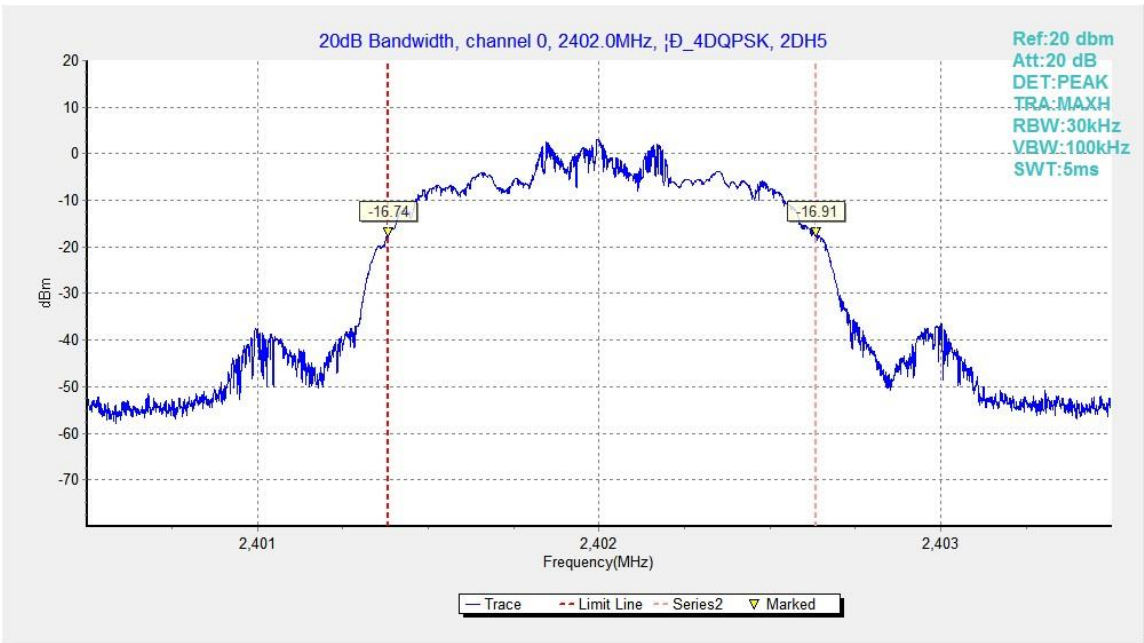

Fig.85. 20dB Bandwidth: π/4 DQPSK, Channel 0

©Copyright. All rights reserved by CTTL.

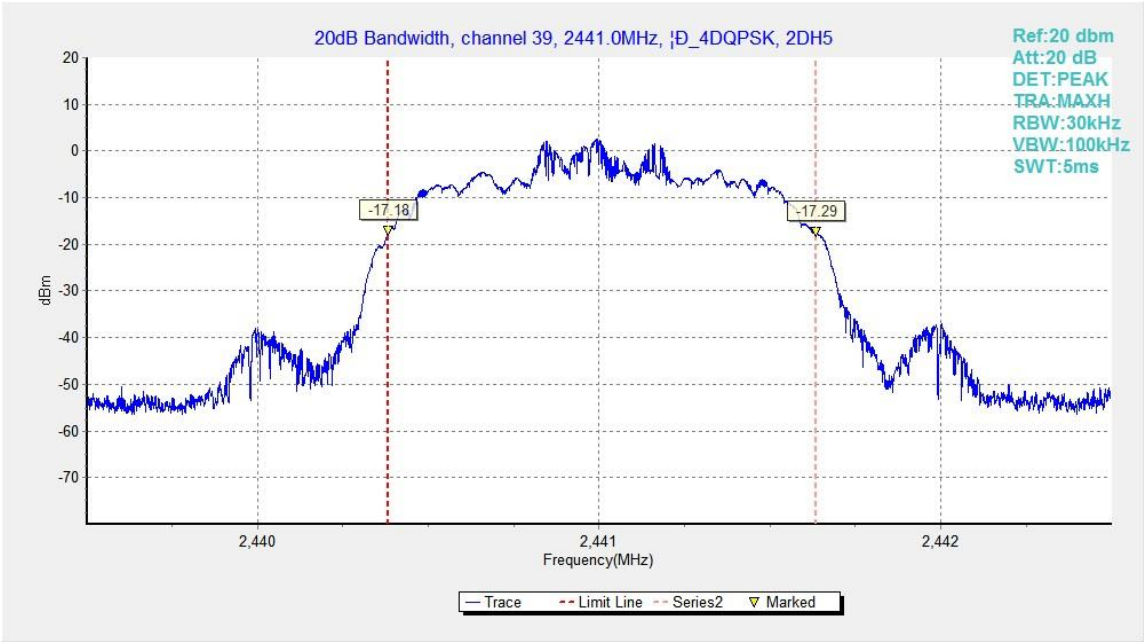

Fig.86. 20dB Bandwidth: π/4 DQPSK, Channel 39

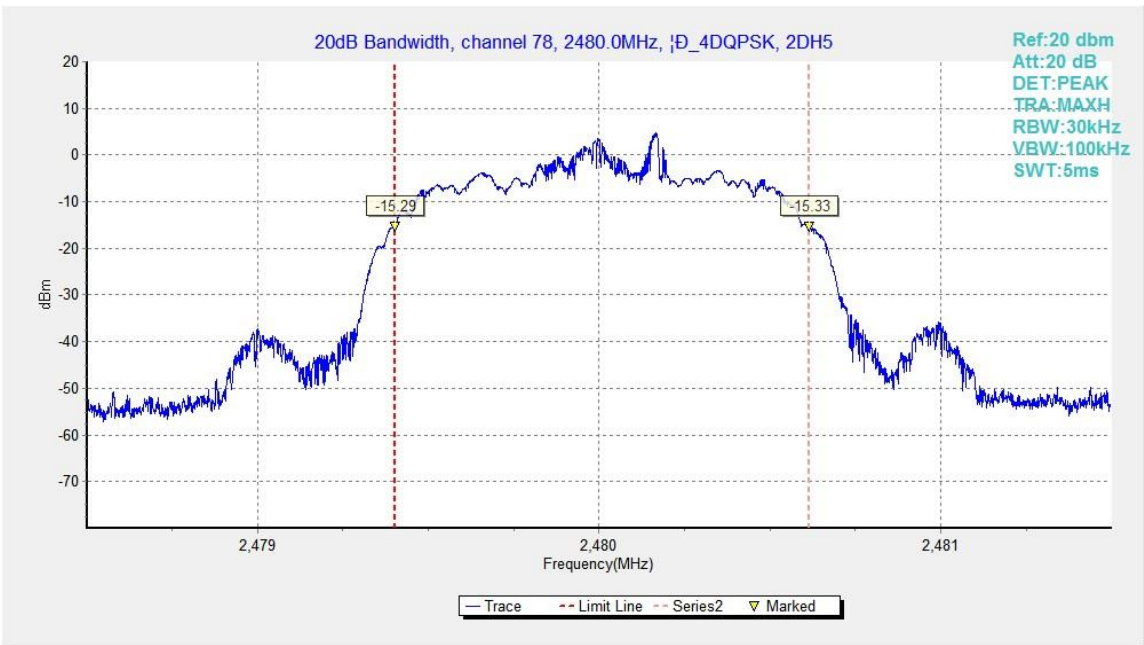

Fig.87. 20dB Bandwidth: π/4 DQPSK, Channel 78

©Copyright. All rights reserved by CTTL.

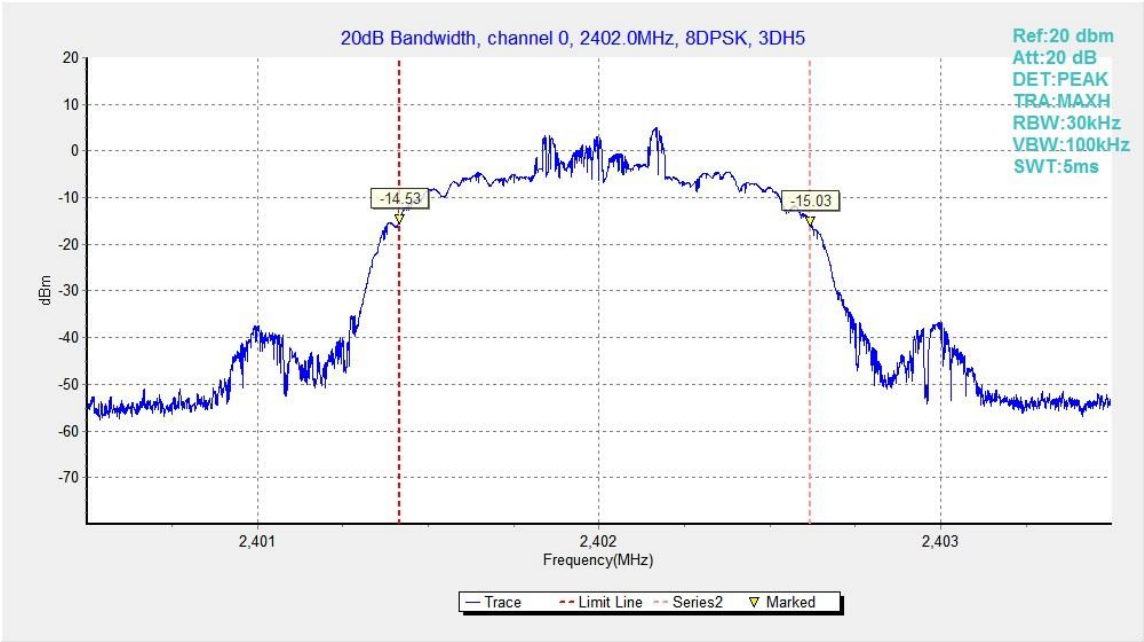

Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

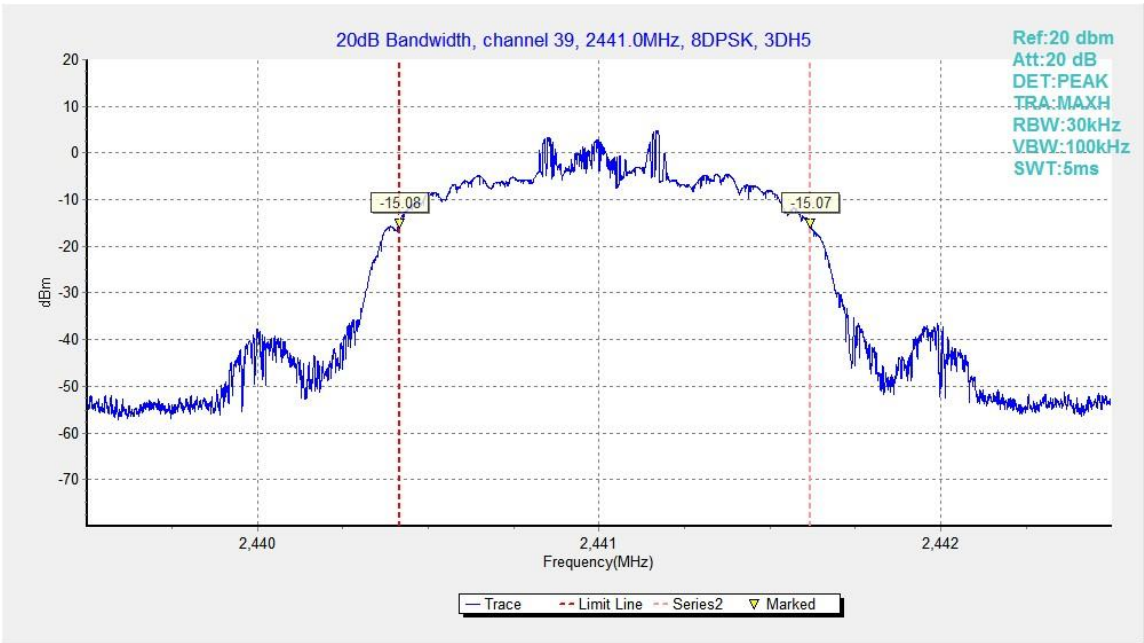

Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

©Copyright. All rights reserved by CTTL.

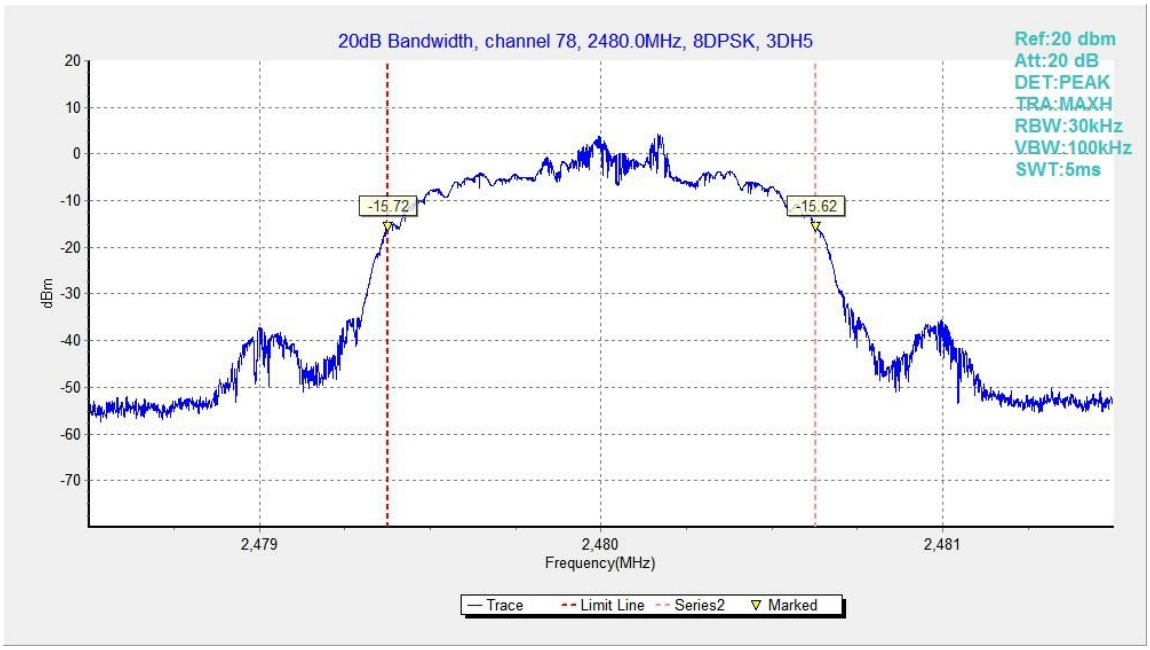

Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

©Copyright. All rights reserved by CTTL.

B.9. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or (2/3) * 20dB bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or (2/3) * 20dB bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	1005.00	P

For π/4 DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	1311.00	P

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	1134.00	P

Conclusion: PASS

Test graphs as below:

©Copyright. All rights reserved by CTTL.

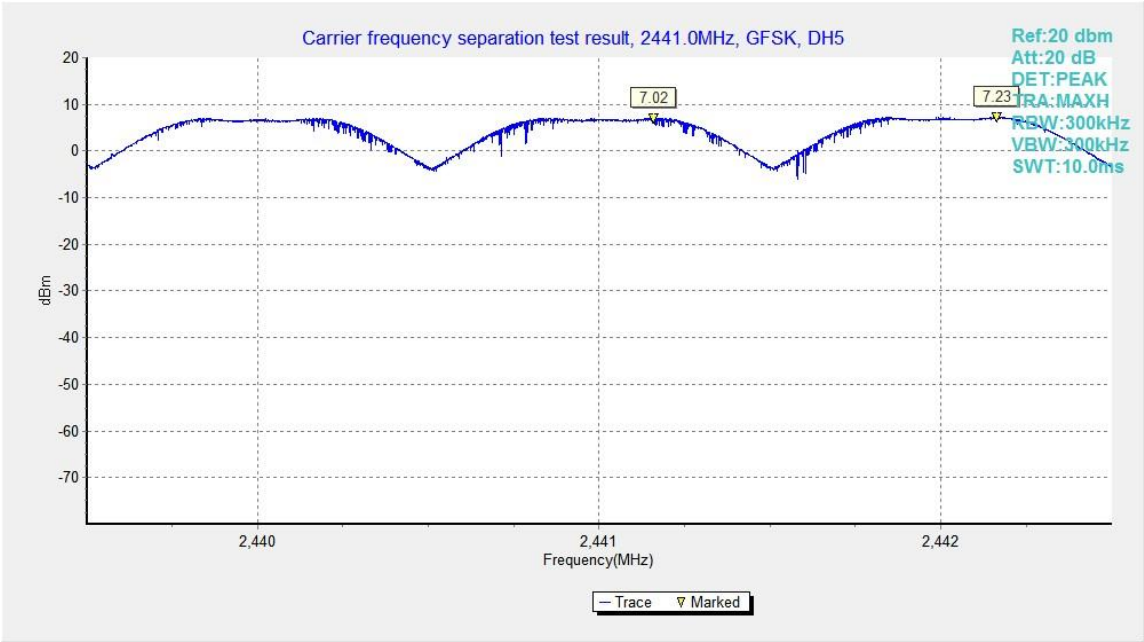

Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

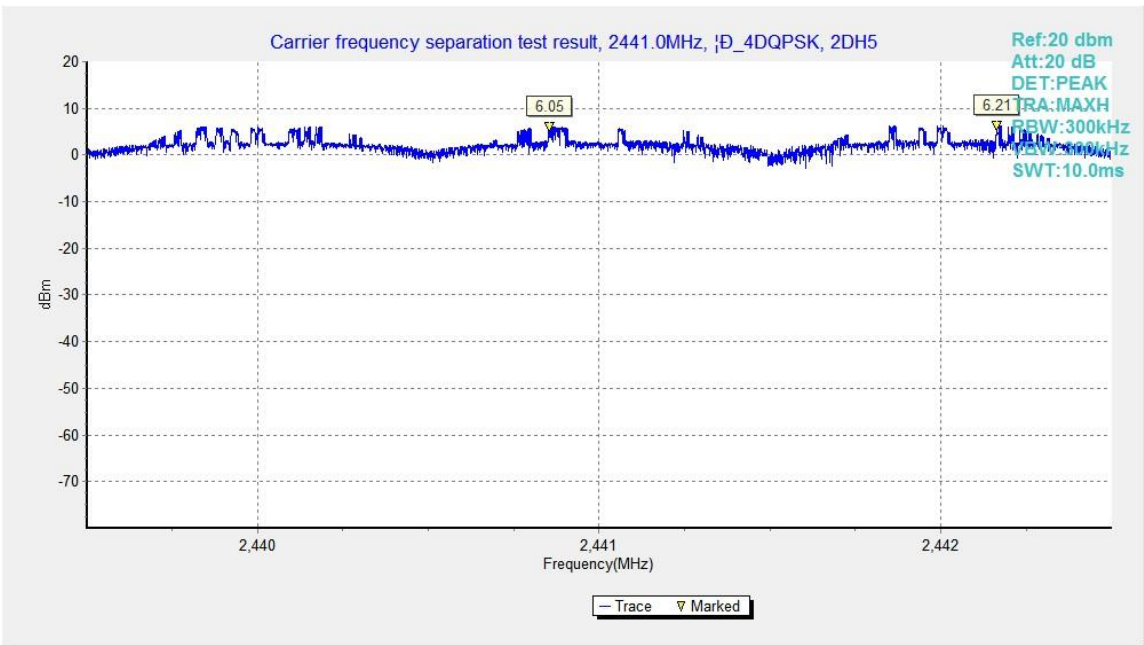

Fig.92. Carrier frequency separation measurement: π/4 DQPSK, Channel 39

©Copyright. All rights reserved by CTTL.

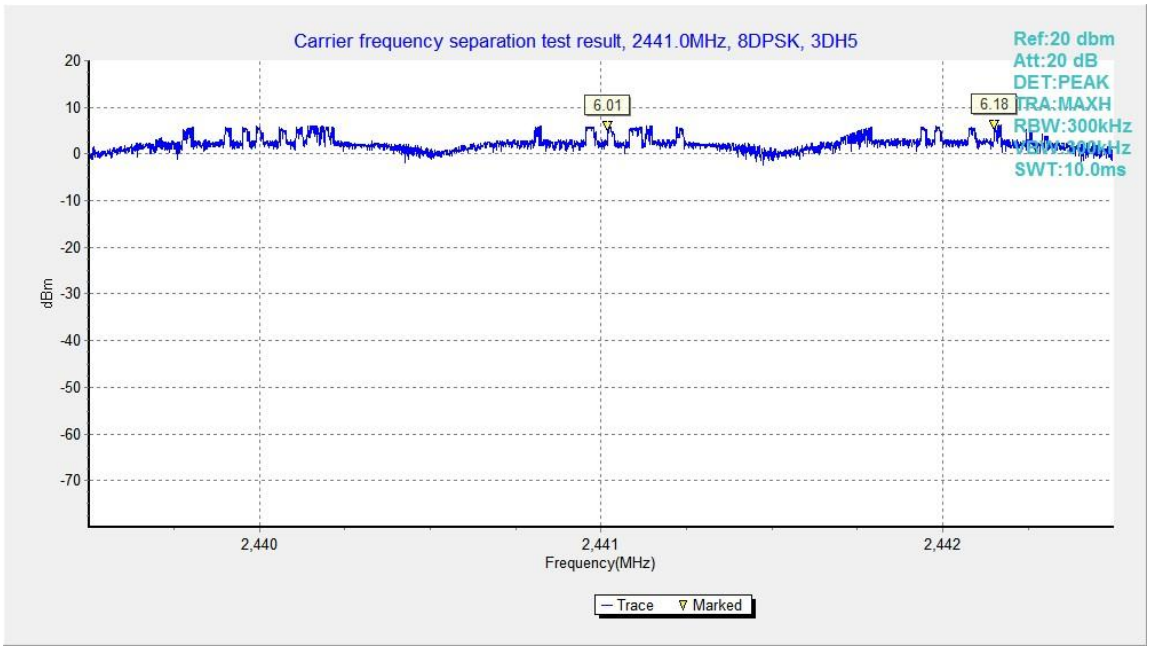

Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

©Copyright. All rights reserved by CTTL.

B.10. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	P
40~78	Fig.95		

Forπ/4 DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.96	79	P
40~78	Fig.97		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.98	79	P
40~78	Fig.99		

Conclusion: PASS

Test graphs as below:

©Copyright. All rights reserved by CTTL.

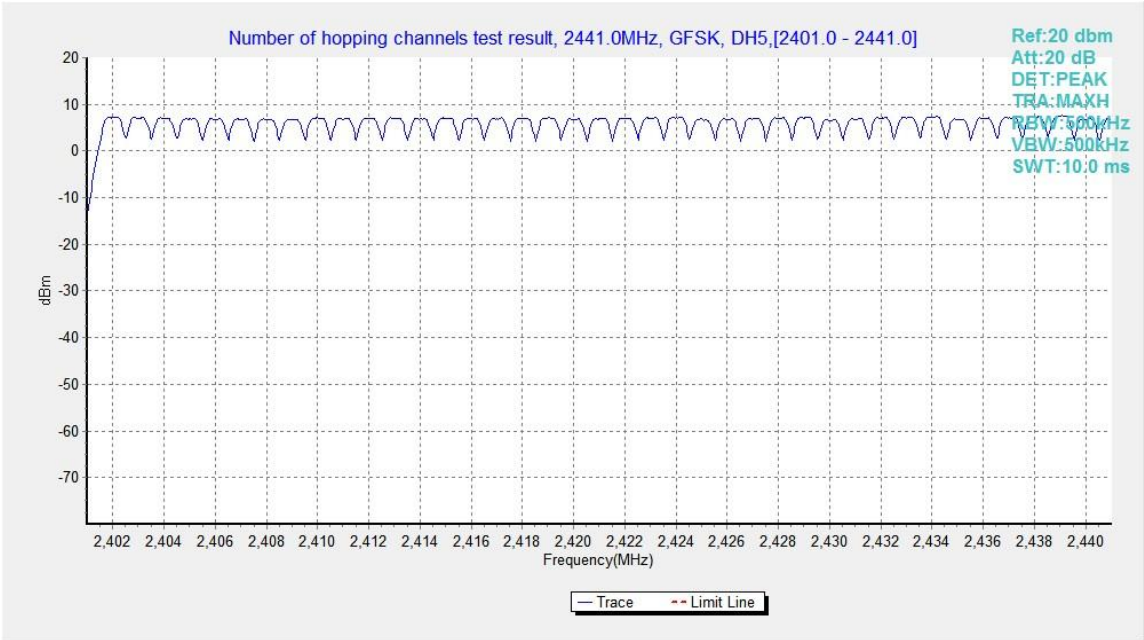

Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

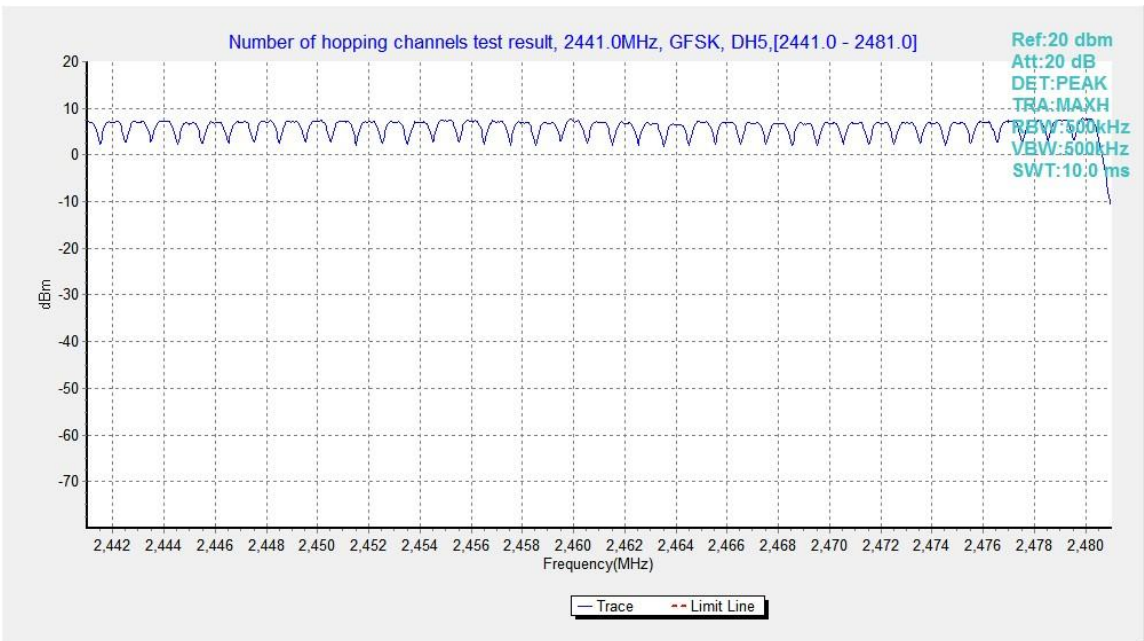

Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

©Copyright. All rights reserved by CTTL.

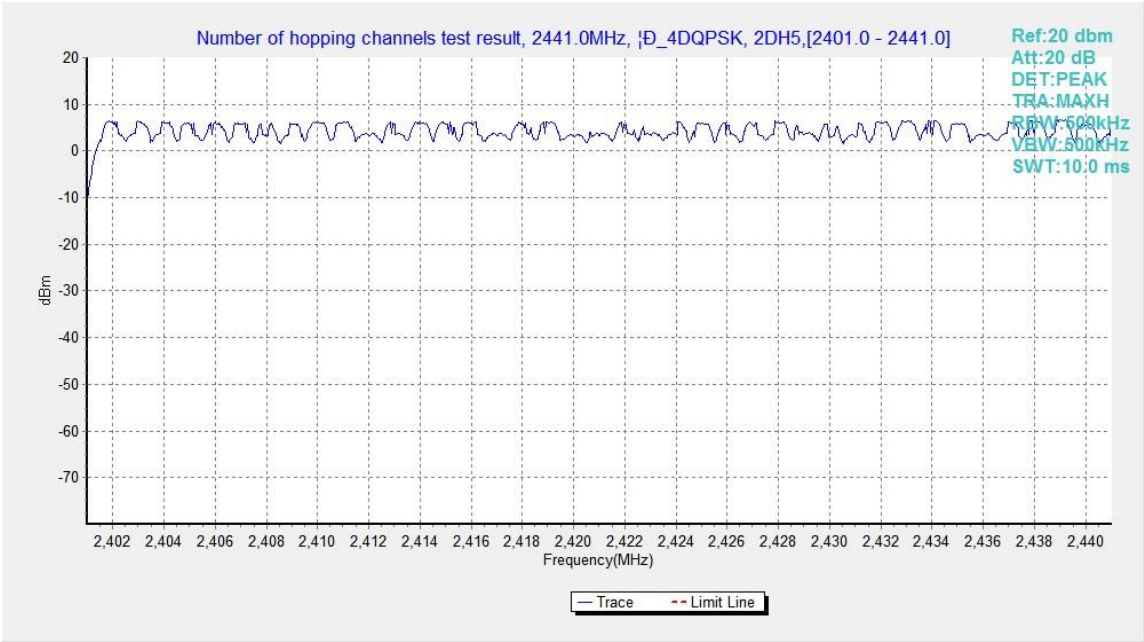

Fig.96. Number of hopping frequencies: π/4 DQPSK, Channel 0 - 39

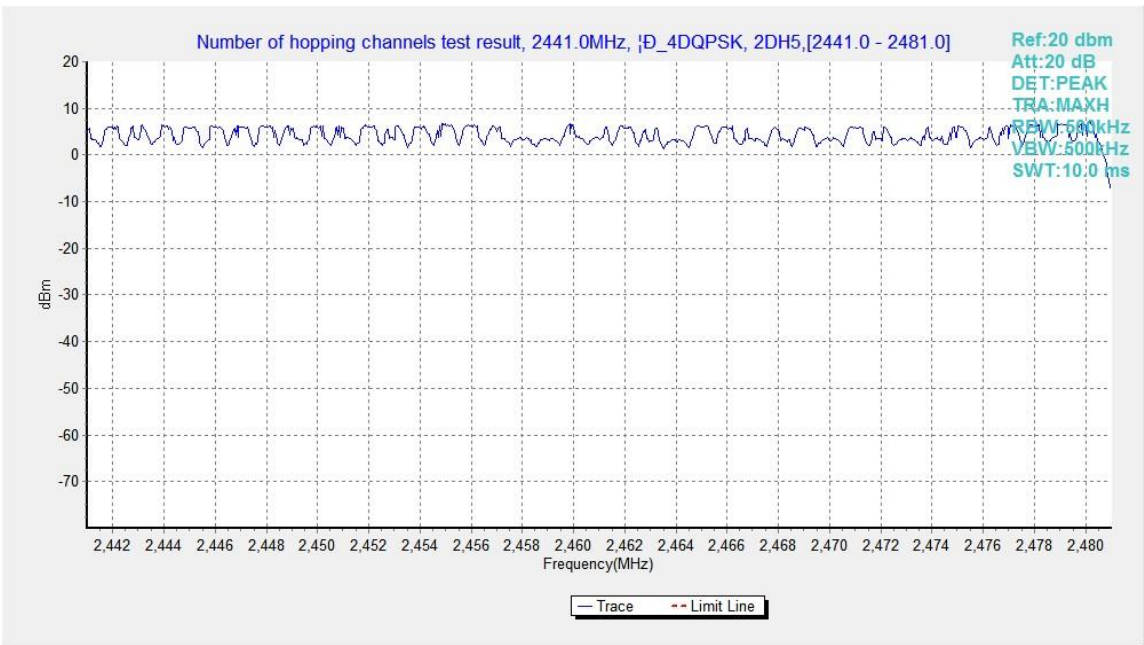

Fig.97. Number of hopping frequencies: π/4 DQPSK, Channel 40 - 78

©Copyright. All rights reserved by CTTL.

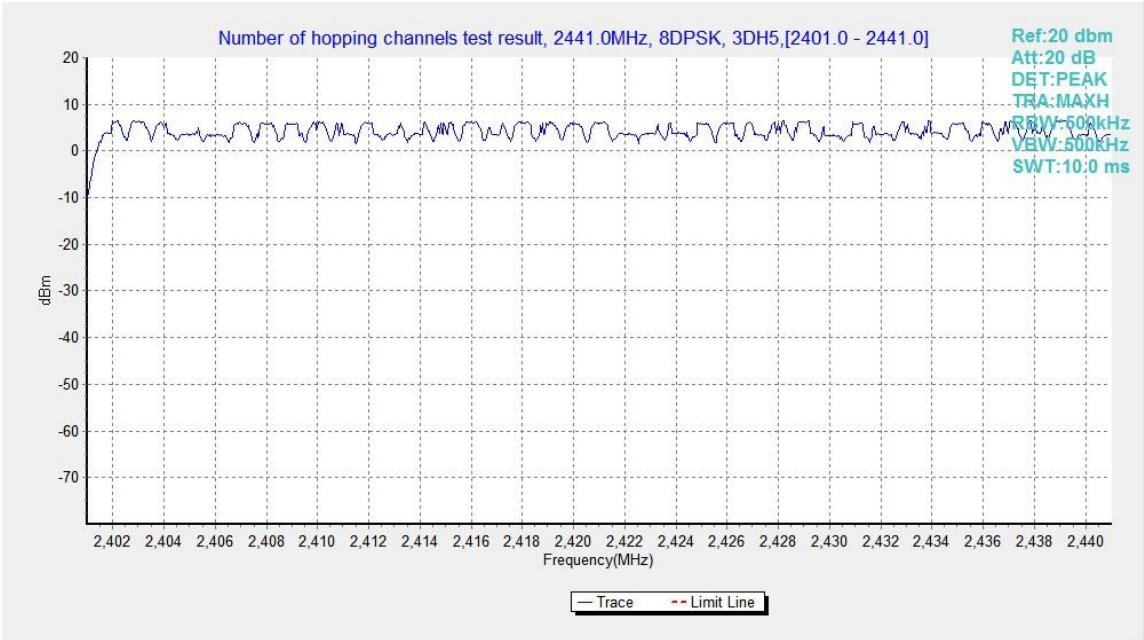

Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

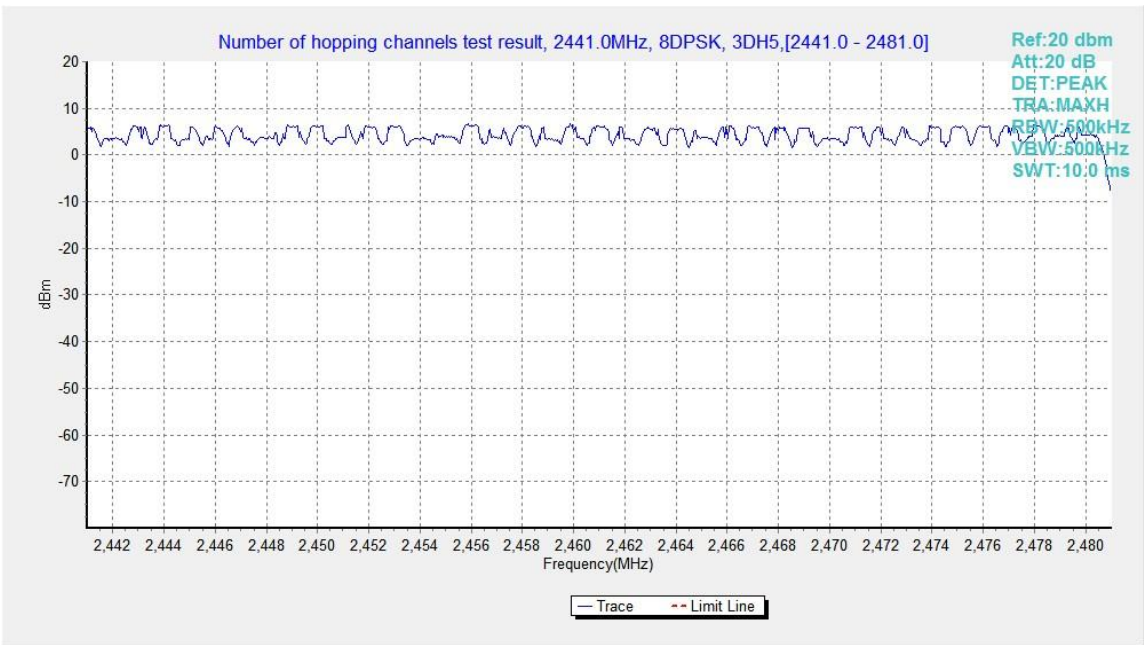

Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

©Copyright. All rights reserved by CTTL.

B.11. AC Powerline Conducted Emission

Method of Measurement:

See Clause 6.2 of ANSI C63.10-2013 specifically.

See Clause 4 and Clause 5 of ANSI C63.10-2013 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.

The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage（V）	Frequency（Hz）
120	60

Measurement Setup

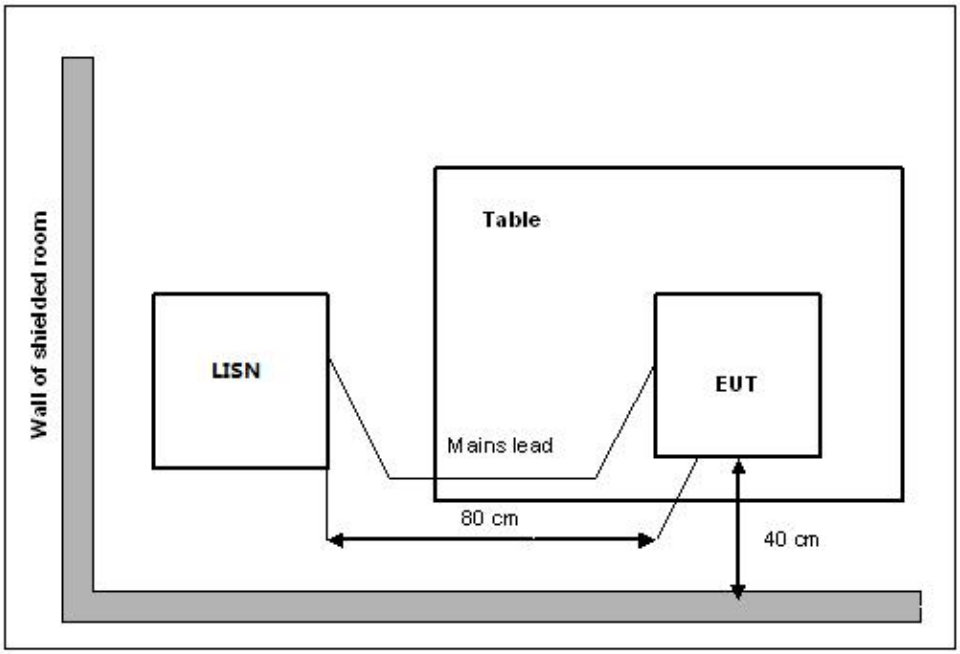

©Copyright. All rights reserved by CTTL.

Measurement Result and limit:

EUT ID: UT18a

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.11.1	Fig.B.11.2	**P**
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.11.1	Fig.B.11.2	**P**
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass

Test graphs as below:

©Copyright. All rights reserved by CTTL.

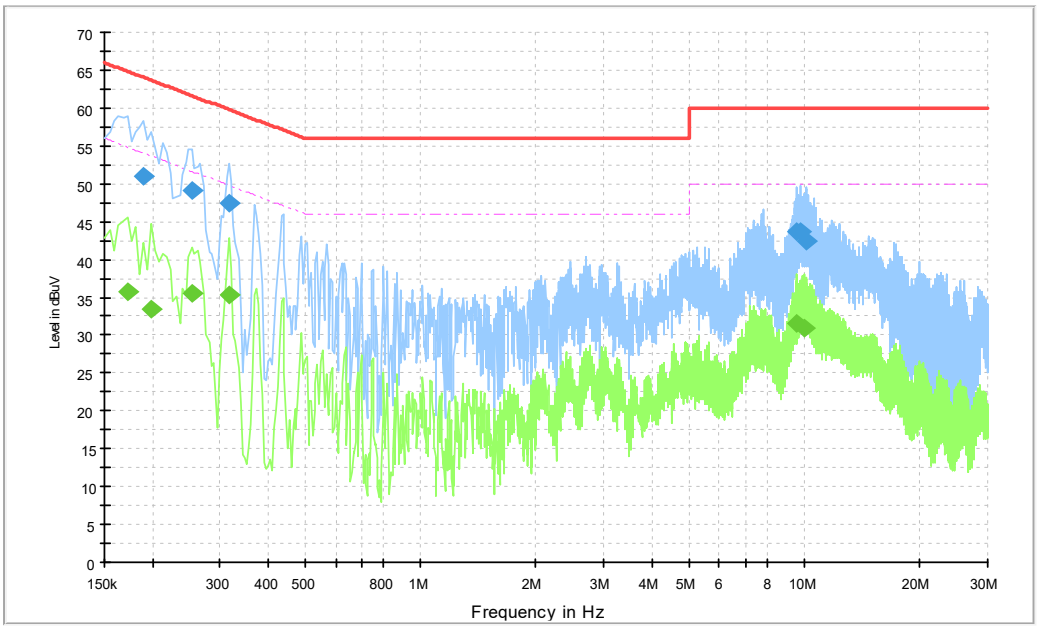

Fig.B.11.1 AC Powerline Conducted Emission- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190500	51.0	2000.0	9.000	On	N	19.8	13.0	64.0
0.253500	49.0	2000.0	9.000	On	N	19.8	12.6	61.6
0.316500	47.4	2000.0	9.000	On	N	19.8	12.4	59.8
9.546000	43.6	2000.0	9.000	On	L1	19.8	16.4	60.0
9.766500	43.7	2000.0	9.000	On	L1	19.8	16.3	60.0
10.162500	42.3	2000.0	9.000	On	L1	19.7	17.7	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.172500	35.8	2000.0	9.000	On	L1	19.9	19.1	54.8
0.199500	33.3	2000.0	9.000	On	N	19.7	20.3	53.6
0.253500	35.5	2000.0	9.000	On	L1	19.8	16.1	51.6
0.316500	35.3	2000.0	9.000	On	L1	19.8	14.5	49.8
9.582000	31.6	2000.0	9.000	On	N	19.8	18.4	50.0
10.032000	30.8	2000.0	9.000	On	N	19.7	19.2	50.0

©Copyright. All rights reserved by CTTL.

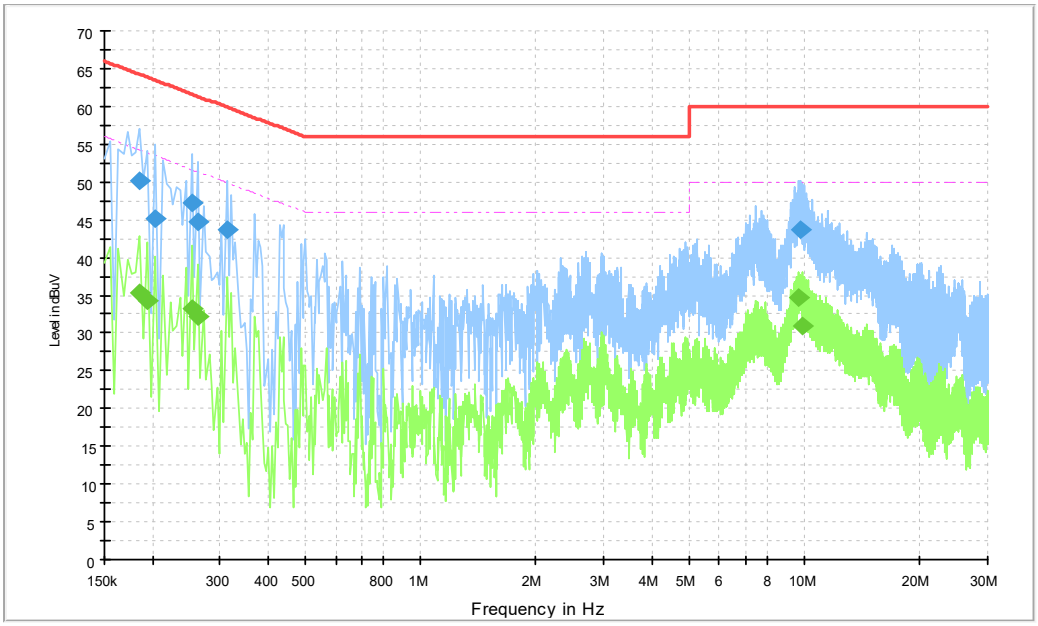

Fig.B.11.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.186000	50.2	2000.0	9.000	On	N	19.8	14.1	64.2
0.204000	45.2	2000.0	9.000	On	N	19.7	18.3	63.4
0.253500	47.2	2000.0	9.000	On	L1	19.8	14.5	61.6
0.262500	44.8	2000.0	9.000	On	N	19.8	16.6	61.4
0.312000	43.7	2000.0	9.000	On	L1	19.8	16.2	59.9
9.712500	43.7	2000.0	9.000	On	L1	19.8	16.3	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.186000	35.3	2000.0	9.000	On	N	19.8	18.9	54.2
0.195000	34.2	2000.0	9.000	On	N	19.7	19.6	53.8
0.253500	33.1	2000.0	9.000	On	N	19.8	18.5	51.6
0.262500	32.2	2000.0	9.000	On	L1	19.8	19.2	51.4
9.681000	34.7	2000.0	9.000	On	L1	19.8	15.3	50.0
9.879000	31.0	2000.0	9.000	On	N	19.7	19.0	50.0

©Copyright. All rights reserved by CTTL.

ANNEX C: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology

NVLAP® ilac-MRA

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT
Beijing
China

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Electromagnetic Compatibility & Telecommunications

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2022-10-01 through 2023-09-30
Effective Dates

DEPARTMENT OF COMMERCE · UNITED STATES OF AMERICA

For the National Voluntary Laboratory Accreditation Program

*****END OF REPORT*****

©Copyright. All rights reserved by CTTL.