TEST REPORT

No. 25T04Z200036-001

for

Samsung Electronics Co., Ltd.

Bluetooth Headset

Model Name: SM-R410

with

FCC ID: ZCASMR410L

Hardware Version: REV1.0

Software Version: R410.001

Issued Date: 2025-04-10

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

©Copyright. All rights reserved by CTTL.

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z200036-001	Rev.0	1st edition	2025-04-10

Note: the latest revision of the test report supersedes all previous versions.

©Copyright. All rights reserved by CTTL.

CONTENTS

1. TEST LABORATORY 4
1.1. INTRODUCTION & ACCREDITATION 4
1.2. TESTING LOCATION 4
1.3. TESTING ENVIRONMENT 4
1.4. PROJECT DATA 4
1.5. SIGNATURE 4
2. CLIENT INFORMATION 5
2.1. APPLICANT INFORMATION 5
2.2. MANUFACTURER INFORMATION 5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 6
3.1. ABOUT EUT 6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST 6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST 6
3.4. EUT SET-UPS 6
4. REFERENCE DOCUMENTS 7
4.1. DOCUMENTS SUPPLIED BY APPLICANT 7
4.2. REFERENCE DOCUMENTS FOR TESTING 7
5. SUMMARY OF TEST RESULTS 8
6. TEST FACILITIES UTILIZED 9
7. MEASUREMENT UNCERTAINTY 10
ANNEX A: EUT PARAMETERS 11
ANNEX B: MEASUREMENT RESULTS 12
ANNEX C: PERSONS INVOLVED IN THIS TESTING 27

©Copyright. All rights reserved by CTTL.

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

CTTL (BDA)

Address: No. 18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, 100176, P.R. China

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2025-03-06

Testing End Date: 2025-03-31

1.5. Signature

Li Yan

(Prepared this test report)

Zhang Ying

(Reviewed this test report)

Zhang Xia

Deputy Director of the laboratory

(Approved this test report)

©Copyright. All rights reserved by CTTL.

2. Client Information

2.1. Applicant Information

Company Name:	Samsung Electronics Co., Ltd.
Address:	19 Chapin Rd.,Building D Pine Brook, NJ 07058
City:	/
Postal Code:	/
Country:	/
Contact Person:	Jenni Chun
Contact Email	j1.chun@samsung.com
Telephone:	+1-201-937-4203
Fax	/

2.2. Manufacturer Information

Company Name:	Samsung Electronics Co., Ltd.
Address:	Samsung R5, Maetan dong 129, Samsung ro Youngtong gu, Suwon city 443 742, Korea
City:	/
Postal Code:	/
Country:	/
Contact Person:	Sunghoon Cho
Contact Email	ggobi.cho@samsung.com
Telephone:	+82-10-2722-4159
Fax	/

©Copyright. All rights reserved by CTTL.

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Bluetooth Headset
Model name	SM-R410
FCC ID	ZCASMR410L

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI/SN	HW Version	SW Version
EUT1	2504200036UT10a	REV1.0	R410.001
EUT2	2504200036UT11a (FCC ID: ZCASMR410R)	REV1.0	R410.001

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Name	Model	Manufacturer
AE1	Battery	JN043	EVE ENERGY CO., LTD
AE2	Cradle	EP-QR410	Samsung Electronics. Co., Ltd.
AE3*	Adaptor	EP-TA200	RFT
AE4*	USB Cable	EPDR140AWE	Cresyn
AE5*	PC	T14S	/

*AE ID: is used to identify the test sample in the lab internally.

*AE3 and AE4 is not the AE for EUT, provided by the client for relevant tests.

*AE5 is not the AE for EUT, provided by the Lab for relevant tests.

3.4. EUT set-ups

Set-up

EUT set-up No.	Combination of EUT and AE
Set.1	EUT1+ Cradle+ USB Cable +Adaptor
Set.2	EUT1+ Cradle+ USB Cable +PC
Set.3	EUT1+ EUT2+ Cradle+ USB Cable +Adaptor
Set.4	EUT1+ EUT2+ Cradle+ USB Cable +PC

Note: this device is sold together with FCC ID: ZCASMR410R in the same package as a system. Working together configurations were tested and the worst test data has been included in this report.

Test mode

Mode No.	Operating mode	Remarks
mode.1	EUT Charged by Cradle and powered by AC/DC adaptor with USB cable	RE, CE
mode.2	EUT Charged by Cradle and powered by PC with USB cable	RE, CE

©Copyright. All rights reserved by CTTL.

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters are supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC 47 CFR Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2023
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

©Copyright. All rights reserved by CTTL.

5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	**CTTL(BDA)**
2	Conducted Emission	15.107(a)	B.2	P	**CTTL(BDA)**

©Copyright. All rights reserved by CTTL.

6. Test Facilities Utilized

Test Equipment

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURER	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2025-06-06	1 year
2	Test Receiver	ESCI	100766	R&S	2025-04-18	1 year
3	LISN	ENV216	101459	R&S	2025-05-18	1 year
4	BiLog Antenna	VULB9163	01177	Schwarzbeck	2025-11-09	1 year
5	EMI Antenna	3117	00119021	ETS-Lindgren	2025-09-18	1 year

Test Software

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V8.53.0	R&S
Conducted Emission	EMC32 V8.53.0	R&S

©Copyright. All rights reserved by CTTL.

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty (worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL (huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.72dB(*k*=2)
	1GHz-18GHz	4.84dB(*k*=2)
Conducted Emission	150kHz-30MHz	3.08dB(*k*=2)

Location 2: CTTL (BDA)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	5.73dB(*k*=2)
	1GHz-18GHz	5.58dB(*k*=2)
Conducted Emission	150kHz-30MHz	3.10dB(*k*=2)

©Copyright. All rights reserved by CTTL.

ANNEX A: EUT parameters

Description	Bluetooth Headset		
Model name	SM-R410		
Marketing name	Galaxy Buds Core		
Brand name	SAMSUNG		
Cellular Bands	☐GSM	/	
	☐CDMA	/	
	☐WCDMA	/	
	☐LTE	/	
	☐5G NR SA	/	
	☐5G NR NSA	/	
Unlicensed Radio	☐Wi-Fi 2.4GHz	☐802.11b ☐802.11g	
		☐802.11n	☐20MHz ☐40MHz
		☐802.11ac	☐20MHz ☐40MHz ☐80MHz
		☐802.11ax	☐20MHz ☐40MHz ☐80MHz
	☐Wi-Fi 5GHz	☐802.11a	
		☐802.11n	☐20MHz ☒40MHz
		☐802.11ac	☐20MHz ☒40MHz ☒80MHz ☐160MHz
		☐802.11ax	☐20MHz ☐40MHz ☐80MHz ☐160MHz
	☐Wi-Fi 5.8GHz	☐802.11a	
		☐802.11n	☐20MHz ☒40MHz
		☐802.11ac	☐20MHz ☒40MHz ☒80MHz ☐160MHz
		☐802.11ax	☐20MHz ☐40MHz ☐80MHz ☐160MHz
	☒Bluetooth	☒EDR ☐BLE4 ☒BLE5	

For more EUT information please refers to the manufacturer's specifications or user's manual.

Disclaimer: The EUT information provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

©Copyright. All rights reserved by CTTL.

ANNEX B: MEASUREMENT RESULTS

B.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

B.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator at distances of 3 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

For the test setup photographs please see the test setup photos document.

B.1.2 EUT Operating Mode

The EUT is operating in charging and Bluetooth mode.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

B.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit (μV/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance.

B.1.4 Test Condition

Voltage（V）	Frequency（Hz）
120	60

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

©Copyright. All rights reserved by CTTL.

B.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of “reference path loss”. It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

Result = $P_{Mea} + A_{Rpl} = P_{Mea} + G_A + G_{PL}$

Where

G_A: Antenna factor of receive antenna

G_{PL}: Path Loss

P_{Mea}: Measurement result on receiver.

Note: all the set-up and operating mode list in section 3.4 were tested, only the worst test data are showed in this section.

©Copyright. All rights reserved by CTTL.

Set.1+Mode1

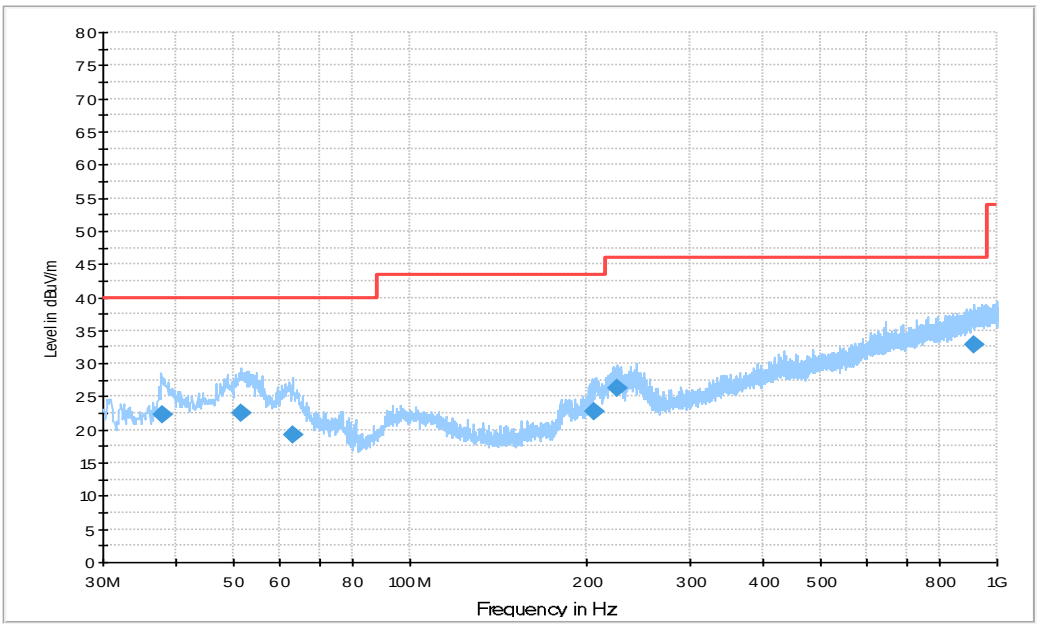

Figure A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
37.743000	22.3	100.0	V	68.0	-1.5	17.7	40.0
51.614000	22.4	113.0	V	100.0	0.4	17.6	40.0
63.177000	19.3	100.0	V	90.0	-1.7	20.7	40.0
206.11200	22.7	100.0	V	87.0	-1.3	20.8	43.5
225.18400	26.3	125.0	H	202.0	-0.2	19.7	46.0
912.56300	32.8	125.0	H	248.0	13.5	13.2	46.0

©Copyright. All rights reserved by CTTL.

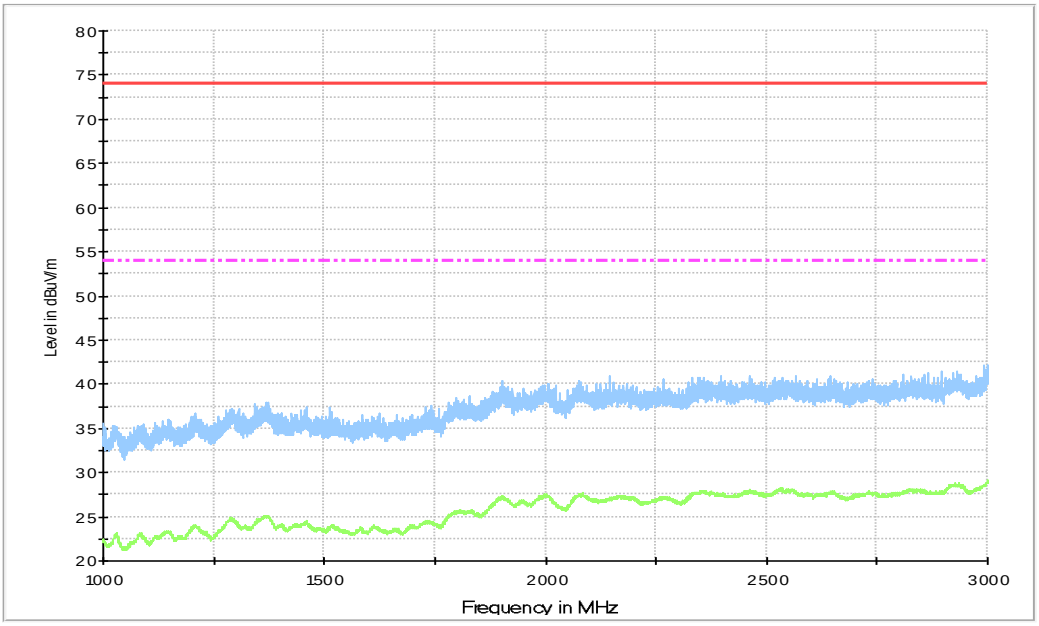

Figure A.2 Radiated Emission from 1GHz to 3GHz

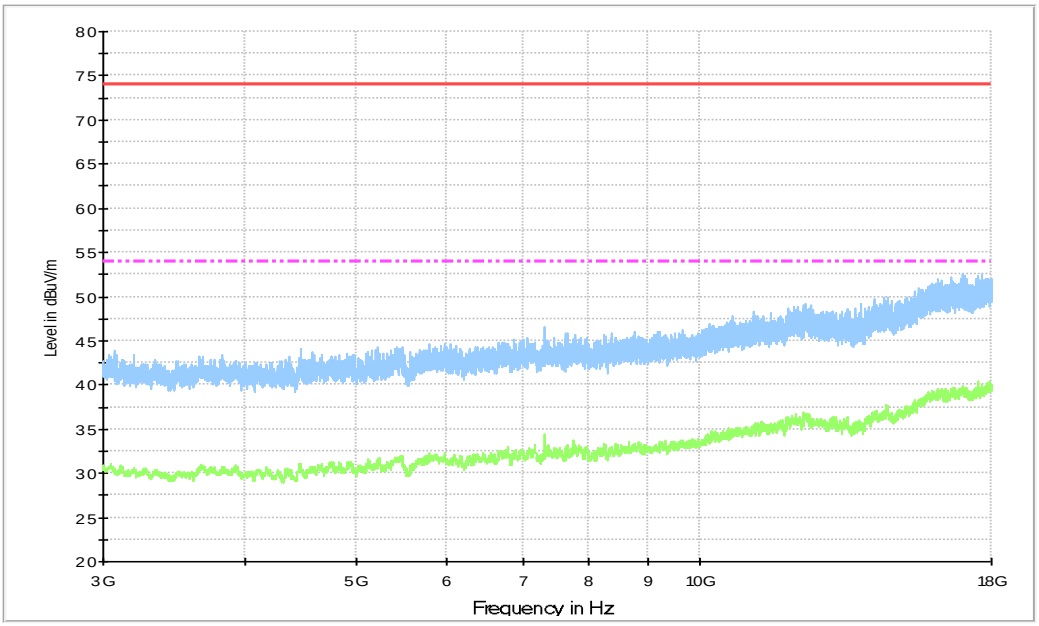

Figure A.3 Radiated Emission from 3GHz to 18GHz

©Copyright. All rights reserved by CTTL.

Average detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17540.000	40.37	-20.63	40.76	20.24	54.00	13.63	V
17542.000	40.33	-20.79	40.76	20.36	54.00	13.67	V
17954.500	40.33	-20.88	40.55	20.65	54.00	13.67	V
17539.500	40.30	-20.67	40.76	20.21	54.00	13.70	V
17878.000	40.28	-21.03	40.52	20.78	54.00	13.72	V
17541.500	40.27	-20.75	40.76	20.26	54.00	13.73	V

Peak detector result

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
16980.500	52.60	-22.17	41.16	33.61	74.00	21.40	V
17005.000	52.57	-22.11	41.09	33.59	74.00	21.43	V
17640.000	52.50	-21.49	40.62	33.37	74.00	21.50	V
17019.500	52.34	-22.06	41.08	33.32	74.00	21.66	V
17541.000	52.33	-20.71	40.76	32.28	74.00	21.67	V
17541.500	52.23	-20.75	40.76	32.22	74.00	21.77	V

©Copyright. All rights reserved by CTTL.

Set.3+Mode1

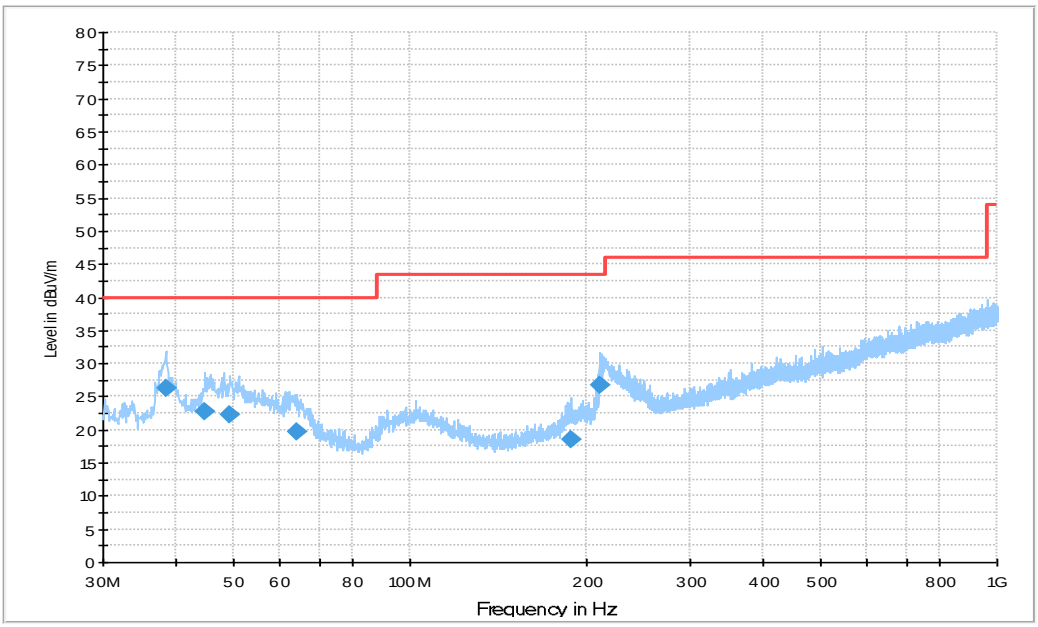

Figure A.4 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
38.442000	26.3	100.0	V	80.0	-1.3	13.7	40.0
44.824000	22.7	100.0	V	87.0	0.3	17.3	40.0
49.203000	22.4	100.0	V	202.0	0.5	17.6	40.0
64.358000	19.6	125.0	V	164.0	-2.1	20.4	40.0
187.58500	18.6	125.0	H	0.0	-1.8	24.9	43.5
211.27600	26.8	100.0	V	-10.0	-1.1	16.7	43.5

©Copyright. All rights reserved by CTTL.

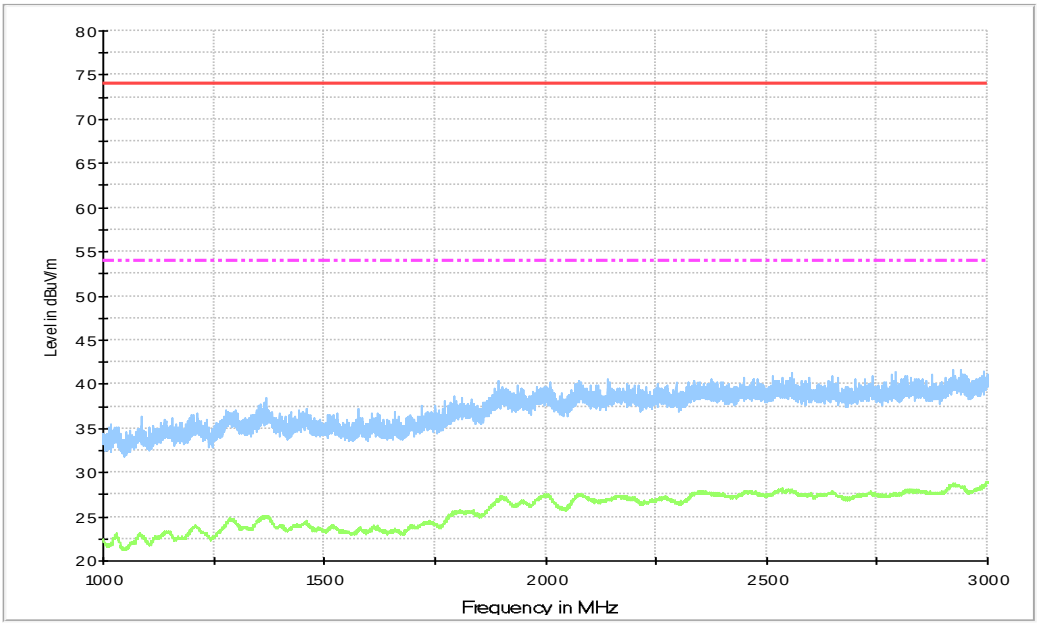

Figure A.5 Radiated Emission from 1GHz to 3GHz

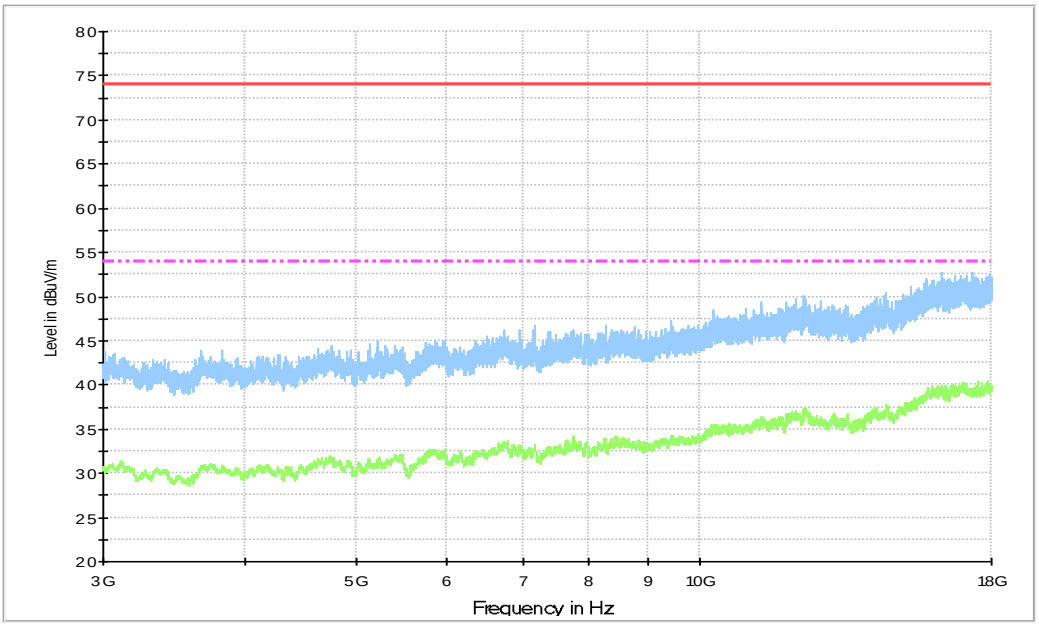

Figure A.6 Radiated Emission from 3GHz to 18GHz

©Copyright. All rights reserved by CTTL.

Average detector result

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17540.500	40.42	-20.67	40.76	20.32	54.00	13.58	V
17540.000	40.40	-20.63	40.76	20.26	54.00	13.60	V
17542.500	40.35	-20.83	40.76	20.43	54.00	13.65	V
17541.500	40.35	-20.75	40.76	20.34	54.00	13.65	V
17882.500	40.34	-20.96	40.52	20.78	54.00	13.66	V
17542.000	40.33	-20.79	40.76	20.36	54.00	13.67	V

Peak detector result

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
16266.000	52.72	-22.79	40.90	34.61	74.00	21.28	V
17296.500	52.70	-22.13	40.80	34.03	74.00	21.30	V
17961.000	52.47	-20.97	40.56	32.88	74.00	21.53	V
16909.000	52.45	-22.30	41.37	33.38	74.00	21.55	V
17101.500	52.33	-22.32	41.00	33.65	74.00	21.67	V
16706.000	52.33	-22.38	41.40	33.31	74.00	21.67	V

©Copyright. All rights reserved by CTTL.

Set.4+Mode2

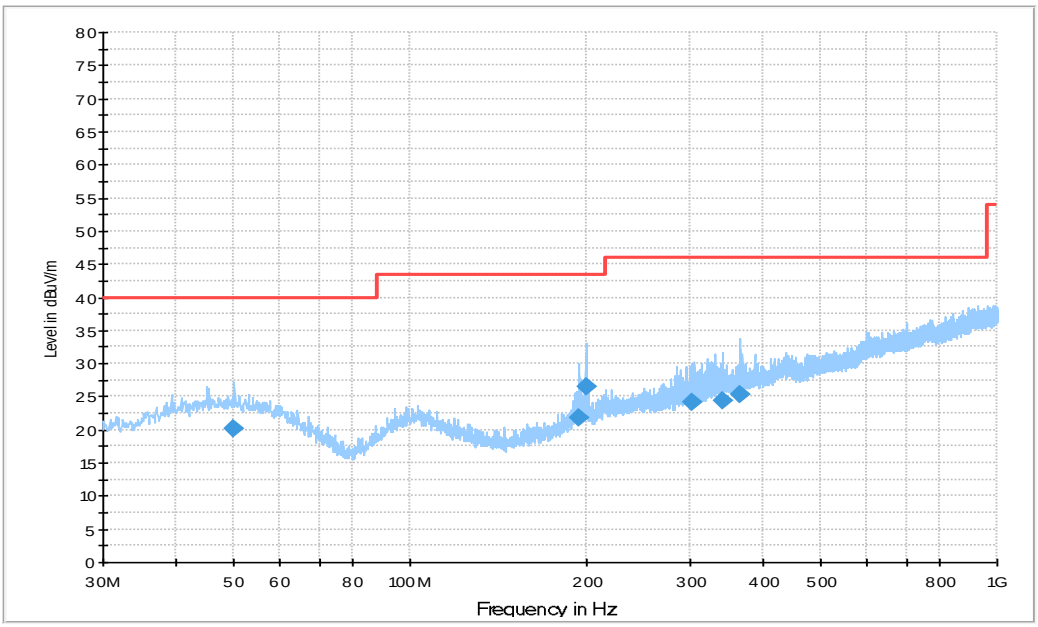

Figure A.7 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
50.196000	20.2	113.0	H	280.0	0.5	19.8	40.0
193.50200	21.9	100.0	H	270.0	-0.7	21.6	43.5
199.92700	26.4	125.0	H	292.0	-0.9	17.1	43.5
302.00800	24.1	100.0	H	270.0	1.6	21.9	46.0
339.71800	24.4	100.0	H	270.0	3.5	21.6	46.0
364.92400	25.4	100.0	H	273.0	4.1	20.6	46.0

©Copyright. All rights reserved by CTTL.

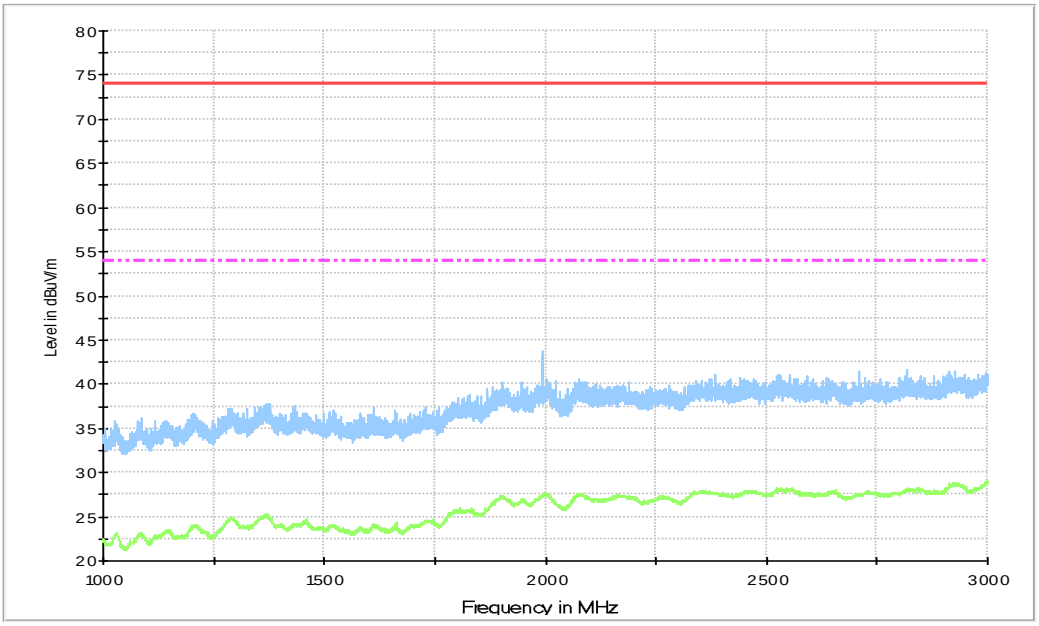

Figure A.8 Radiated Emission from 1GHz to 3GHz

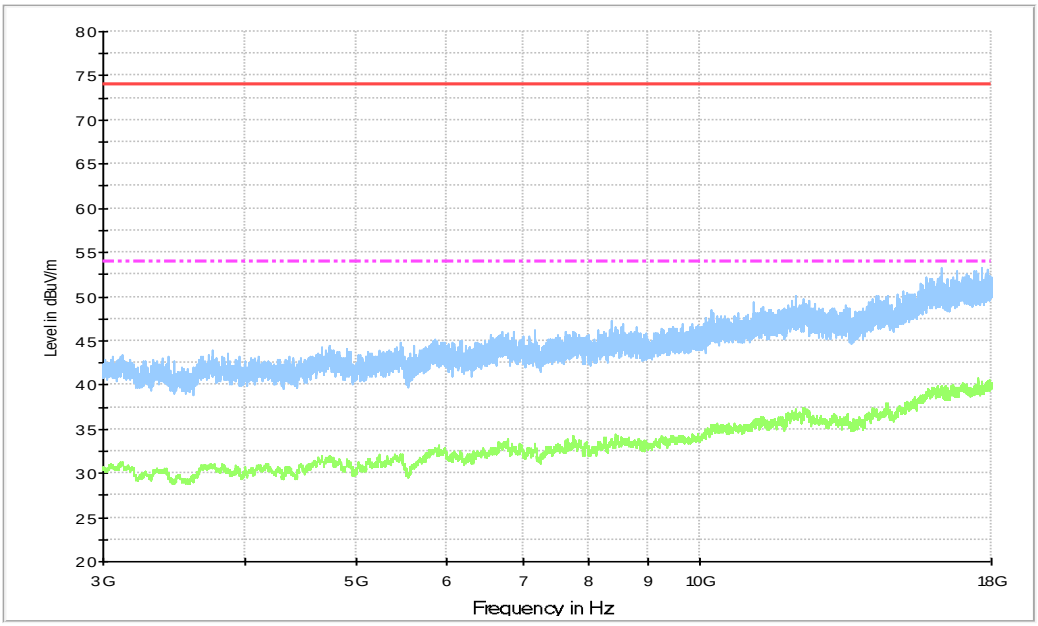

Figure A.9 Radiated Emission from 3GHz to 18GHz

©Copyright. All rights reserved by CTTL.

Average detector result

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
17540.000	40.83	-20.63	40.76	20.70	54.00	13.17	V
17539.500	40.72	-20.67	40.76	20.63	54.00	13.28	V
17540.500	40.69	-20.67	40.76	20.60	54.00	13.31	V
17542.000	40.69	-20.79	40.76	20.73	54.00	13.31	V
17539.000	40.61	-20.72	40.76	20.58	54.00	13.39	V
17960.000	40.56	-20.96	40.56	20.96	54.00	13.44	V

Peak detector result

Frequency (MHz)	Measurement Result (dBµV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBµV)	Limit (dBµV/m)	Margin (dB)	Antenna Pol. (H/V)
1992.200	42.27	-36.90	31.43	47.74	74.00	31.73	V
17661.500	53.21	-21.25	40.58	33.87	74.00	20.79	V
16298.000	53.18	-22.49	40.90	34.77	74.00	20.82	V
17868.500	53.03	-21.32	40.53	33.82	74.00	20.97	V
16805.000	52.96	-22.79	41.40	34.34	74.00	21.04	V
17375.000	52.94	-21.83	40.72	34.05	74.00	21.06	V

©Copyright. All rights reserved by CTTL.

B.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

B.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

For the test setup photographs please see the test setup photos document.

B.2.2 EUT Operating Mode

The EUT is operating in charging and Bluetooth mode.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014.

B.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

B.2.4 Test Condition in charging mode

Voltage（V）	Frequency（Hz）
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

©Copyright. All rights reserved by CTTL.

B.2.5 Measurement Results

Note: all the set-up and operating mode list in section 3.4 were tested, only the worst test data are showed in this section.

Set.1+Mode1

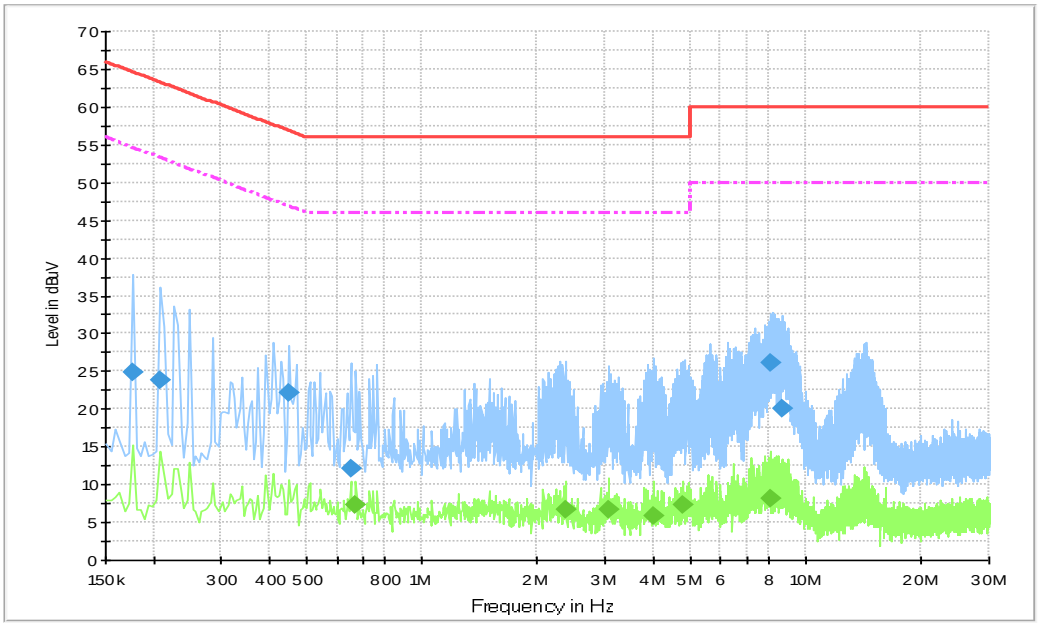

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Figure A.10 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177000	24.9	2000.0	9.000	N	20.0	39.7	64.6
0.208500	23.8	2000.0	9.000	L1	20.0	39.5	63.3
0.451500	22.1	2000.0	9.000	L1	20.1	34.7	56.8
0.654000	12.0	2000.0	9.000	N	20.1	44.0	56.0
8.097000	26.1	2000.0	9.000	L1	19.9	33.9	60.0
8.718000	20.0	2000.0	9.000	N	20.1	40.0	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.672000	7.3	2000.0	9.000	L1	20.0	38.7	46.0
2.364000	6.7	2000.0	9.000	L1	19.8	39.3	46.0
3.057000	6.6	2000.0	9.000	L1	19.9	39.4	46.0
4.020000	5.8	2000.0	9.000	N	20.0	40.2	46.0
4.780500	7.2	2000.0	9.000	L1	19.8	38.8	46.0
8.133000	8.1	2000.0	9.000	N	20.1	41.9	50.0

©Copyright. All rights reserved by CTTL.

Set.3+Mode1

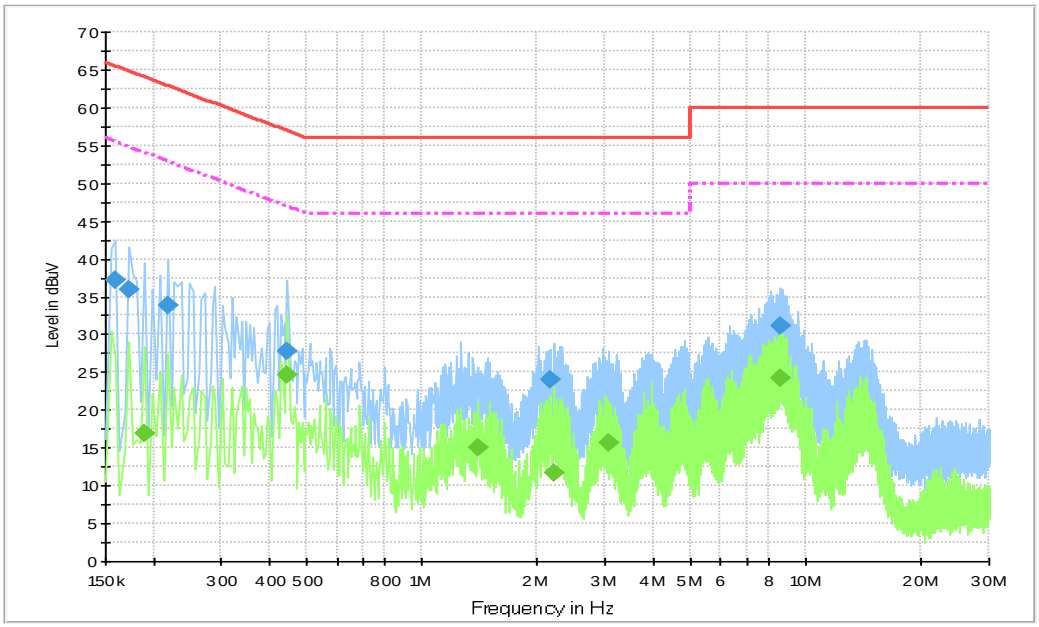

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Figure A.11 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	37.2	2000.0	9.000	N	20.1	28.4	65.5
0.172500	35.9	2000.0	9.000	N	20.0	28.9	64.8
0.217500	33.8	2000.0	9.000	N	20.0	29.2	62.9
0.447000	27.7	2000.0	9.000	N	20.2	29.2	56.9
2.166000	24.0	2000.0	9.000	L1	19.8	32.0	56.0
8.619000	31.2	2000.0	9.000	L1	19.9	28.8	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190500	17.0	2000.0	9.000	L1	20.0	37.0	54.0
0.447000	24.6	2000.0	9.000	L1	20.1	22.3	46.9
1.396500	15.1	2000.0	9.000	L1	19.9	30.9	46.0
2.197500	11.7	2000.0	9.000	N	20.0	34.3	46.0
3.070500	15.6	2000.0	9.000	L1	19.9	30.4	46.0
8.619000	24.2	2000.0	9.000	L1	19.9	25.8	50.0

©Copyright. All rights reserved by CTTL.

Set.4+Mode2

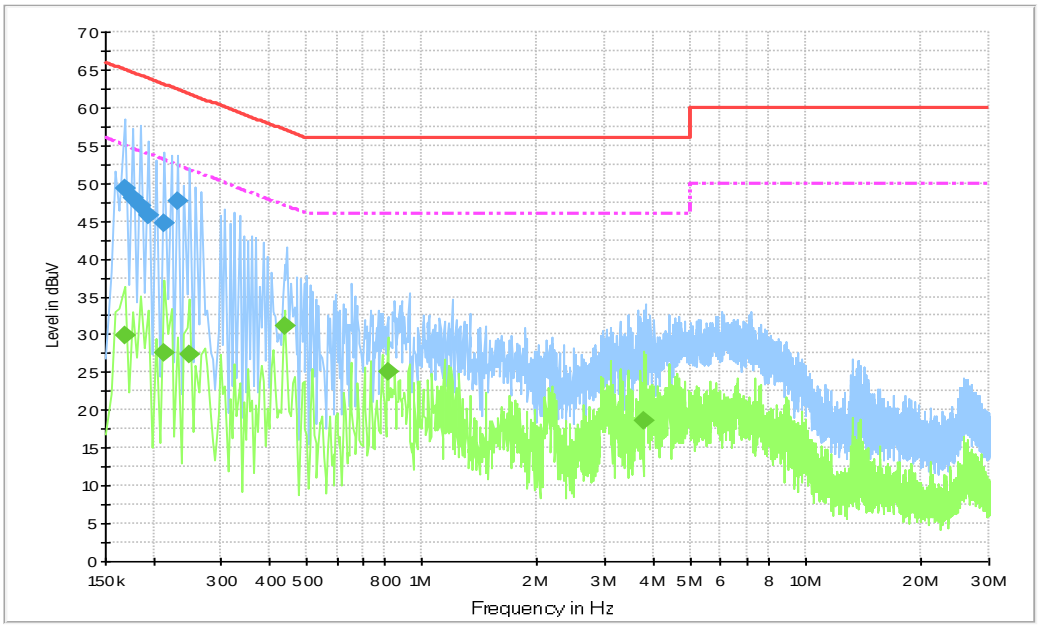

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Figure A.12 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	49.3	2000.0	9.000	N	20.1	15.8	65.1
0.177000	48.0	2000.0	9.000	N	20.0	16.6	64.6
0.186000	47.0	2000.0	9.000	N	20.0	17.2	64.2
0.195000	45.7	2000.0	9.000	N	20.0	18.1	63.8
0.213000	44.7	2000.0	9.000	N	20.0	18.4	63.1
0.231000	47.6	2000.0	9.000	N	20.0	14.8	62.4

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	29.9	2000.0	9.000	N	20.1	25.2	55.1
0.213000	27.6	2000.0	9.000	N	20.0	25.4	53.1
0.249000	27.4	2000.0	9.000	N	20.0	24.3	51.8
0.438000	31.1	2000.0	9.000	L1	20.1	16.0	47.1
0.816000	25.1	2000.0	9.000	N	20.1	20.9	46.0
3.777000	18.6	2000.0	9.000	N	20.0	27.4	46.0

©Copyright. All rights reserved by CTTL.

ANNEX C: Persons involved in this testing

Test Item	Tester
Radiated Emission	Sun Tianyuan
Conducted Emission	Yan Xaorui

*****END OF REPORT*****

©Copyright. All rights reserved by CTTL.