

Test Report

FCC ID.: ZCB754GA

Date of issue: Jan. 09, 2015

Sample Description:	IP Camera
Model(s):	754GA, 701GA(K1), 790GA, 753GA, 700GC, 752GC, 754GC, 753GC, 753GB, 754GB
Applicant:	Shenzhen Smart-eye Digital Electronics Co., Ltd
Address:	#6 Northern Zone, Shangxue S&T City, Bantian, Longgang District, Shenzhen, China
Date of Test:	Dec. 16, 2015 to Jan. 08, 2016

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>



This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

TABALE OF CONTENTS

1 General description	5
1.1 Feature of equipment under test (EUT)	5
1.2 operation channel list	5
2 Test Configuration of EUT	6
4.1 Test frequency channel.....	6
4.2 EUT operation mode	6
4.3 Test conditions.....	6
4.4 Testing site	6
4.5 Ancillary equipment list.....	6
4.6 Measurement uncertainty	6
3 List of test equipment	7
4 Test Result	8
4.1 Conducted emission	8
4.2 Antenna requirement	11
4.3 Maximum peak output power	12
4.4 6dB emission bandwidth.....	13
4.5 Power spectral density	18
4.6 Band edge spurious emission, conducted spurious emission	23
4.1 Radiated emission	32

TEST RESULT CERTIFICATION	
Applicant's name:	Shenzhen Smart-eye Digital Electronics Co., Ltd
Address:	#6 Northern Zone, Shangxue S&T City, Bantian, Longgang District, Shenzhen, China
Manufacture's Name:	Shenzhen Smart-eye Digital Electronics Co., Ltd
Address:	#6 Northern Zone, Shangxue S&T City, Bantian, Longgang District, Shenzhen, China
Product description	
Product name:	IP Camera
Trademark:	/
Model name:	754GA
Serial Model:	701GA(K1), 790GA, 753GA, 700GC, 752GC, 754GC, 753GC, 753GB, 754GB
Standards:	FCC Part 15.247
Test Procedure:	ANSI C63.4-2009; 558074 D01 DTS Meas Guidance v03r03

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested By:



David Chen

Jan. 09, 2016


Reviewed By:



Leon Chen

Jan. 09, 2016

Approved By:



Ares Liu

Jan. 09, 2016

SUMMARY OF TEST RESULT

Item	FCC Part No.	Description of Test	Result
1	15.203	Antenna requirement	Pass
2	15.207	AC power line conducted emission	Pass
3	15.247(b)(3)	Maximum peak output power	Pass
4	15.247(a)(2)	6dB emission bandwidth	Pass
5	15.247(e)	Power spectral density (PSD)	Pass
8	15.247(d)	Band edge spurious emission, conducted spurious emission	Pass
9	15.247(d), 15.209	Radiated emission	Pass

1 General description

1.1 Feature of equipment under test (EUT)

Product name:	IP Camera
Model name:	754GA
Serial model name:	701GA(K1), 790GA, 753GA, 700GC, 752GC, 754GC, 753GC, 753GB, 754GB
Tx/Rx frequency range:	Tx/Rx: 2412MHz~2462MHz for 802.11b/g/n20 Tx/Rx: 2422MHz~2452MHz for 802.11n40
WIFI feature:	☒ 802.11b ☒ 802.11g ☒ 802.11n20 ☒ 802.11n40
Modulation type:	DSSS, OFDM
Power source:	DC 12V form adapter
Adapter information:	Model: SW-120100 Input: 100-240VAC 50/60Hz Output: 12VDC 1000mA
Antenna designation:	Monopole antenna (Antenna Gain: 3dBi)
Hardware version:	V1.1
Software version:	V1.0
Remark:	All the models above are identical in interior structure, electrical circuits and components; just model names and shell colors are different for marking requirement.

1.2 operation channel list

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	6	2437MHz	11	2462MHz
2	2417MHz	7	2442MHz	--	--
3	2422MHz	8	2447MHz	--	--
4	2427MHz	9	2452MHz	---	---
5	2432MHz	10	2457MHz	---	---

2 Test Configuration of EUT

4.1 Test frequency channel

Channel	802.11b/g/n20	802.11n40
Low	2412MHz	2422MHz
Middle	2437MHz	2437MHz
High	2462MHz	2452MHz

4.2 EUT operation mode

During testing, RF test program provided by the manufacture to control the Tx operation followed the test requirement.

4.3 Test conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 20°C~30°C
- Humidity: 30%~70%
- Atmospheric pressure: 98kPa~101kPa

4.4 Testing site

Test Site	Shenzhen Toby Technology Co., Ltd.
Test Site Location	1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467
FCC Registration No.:	811562

4.5 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
Notebook	G40	YB10482397	Lenovo
Router	TL-WDR5600	115684002147	TP-LINK

4.6 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission of receivers	± 1 dB
Radiated emission of transmitter	± 6 dB
Radiated emission of receiver	± 6 dB
Temperature	± 1 degree
Humidity	± 5 %

3 List of test equipment

For AC power line conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
LISN	R&S	ENV216	101313	2016.12.06
LISN	SCHWARZBECK	NNLK 8129	8129245	2016.12.25
Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	2016.12.25
Test Cable	N/A	N/A	C01	2016.12.06
EMI Test Receiver	R&S	ESCI	101160	2016.12.06

For Radiated emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3058	2016.12.11
Horn Antenna	Schwarzbeck	BBHA 9120D	631	2016.12.05
Horn Antenna	Schwarzbeck	BBHA 9170	373	2016.12.05
Test Cable	United Microwave	57793	1m	2016.12.05
Test Cable	United Microwave	A30A30-5006	10m	2016.12.05
Microwave Pre-amplifier	Agilent	8449B	3008A01714	2016.12.05
Pre-Amplifier	Anritsu	MH648A	M09961	2016.12.05
EMI Test Receiver	R&S	ESCI-7	101318	2016.12.05
Spectrum analyzer	Agilent	E4470B	MY41441082	2016.06.01

For RF conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Spectrum analyzer	Agilent	E4470B	MY41441082	2016.06.01
Power meter	Anritsu	ML2495A	1005002	2016.09.11
Power Sensor	Anritsu	MA2411B	0917070	2016.09.11

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4 Test Result

4.1 Conducted emission

4.2.1. Limit

Frequency (MHz)	Limit	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50


Note: Decreases with the logarithm of the frequency from 0.15MHz to 0.5MHz.

4.2.2. Test method

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. The resolution bandwidth of EMI test receiver is set at 9kHz.


4.2.3. Test Result

Temperature:	23℃	Relative Humidity:	45%
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	AC 120V/60Hz	Test mode:	Transmitting

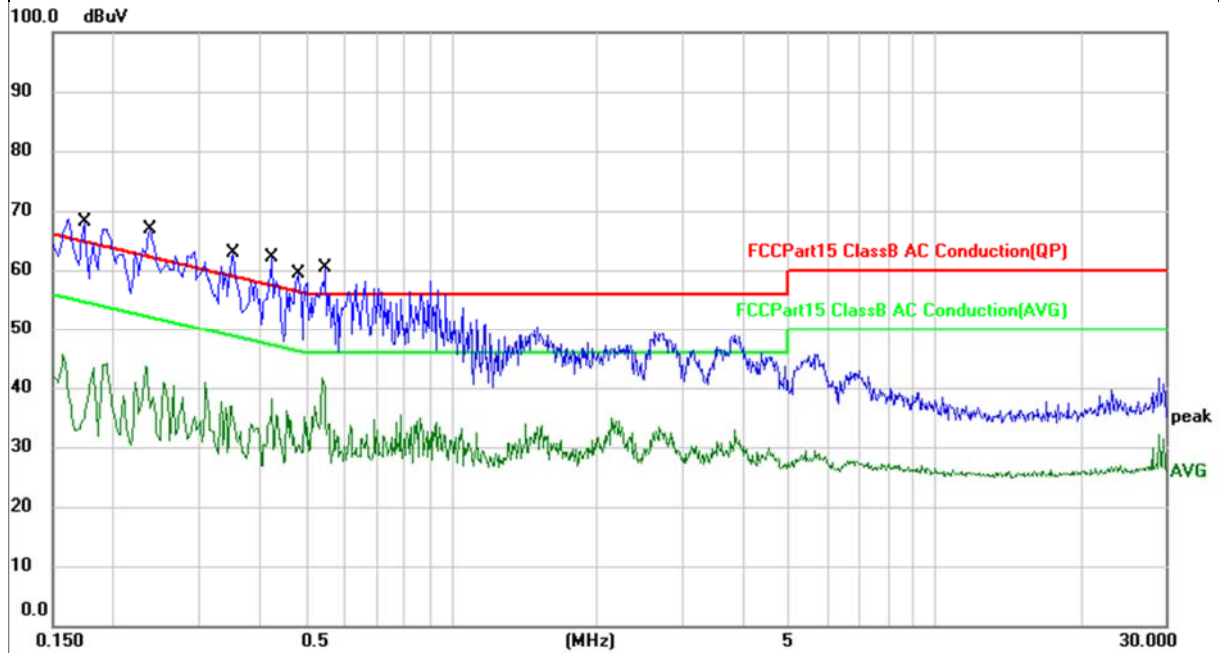

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1765	29.14	30.02	59.16	64.64	-5.48	QP	
2		0.1765	6.32	30.02	36.34	54.64	-18.30	AVG	
3	*	0.2374	27.42	30.02	57.44	62.18	-4.74	QP	
4		0.2374	5.11	30.02	35.13	52.18	-17.05	AVG	
5		0.3564	23.06	30.02	53.08	58.81	-5.73	QP	
6		0.3564	0.93	30.02	30.95	48.81	-17.86	AVG	
7		0.4263	22.19	30.02	52.21	57.32	-5.11	QP	
8		0.4263	2.49	30.02	32.51	47.32	-14.81	AVG	
9		0.4797	19.25	30.02	49.27	56.34	-7.07	QP	
10		0.4797	-0.44	30.02	29.58	46.34	-16.76	AVG	
11		0.5482	19.64	30.02	49.66	56.00	-6.34	QP	
12		0.5482	1.63	30.02	31.65	46.00	-14.35	AVG	

Temperature:	23℃	Relative Humidity:	45%
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	AC 120V/60Hz	Test mode:	Transmitting

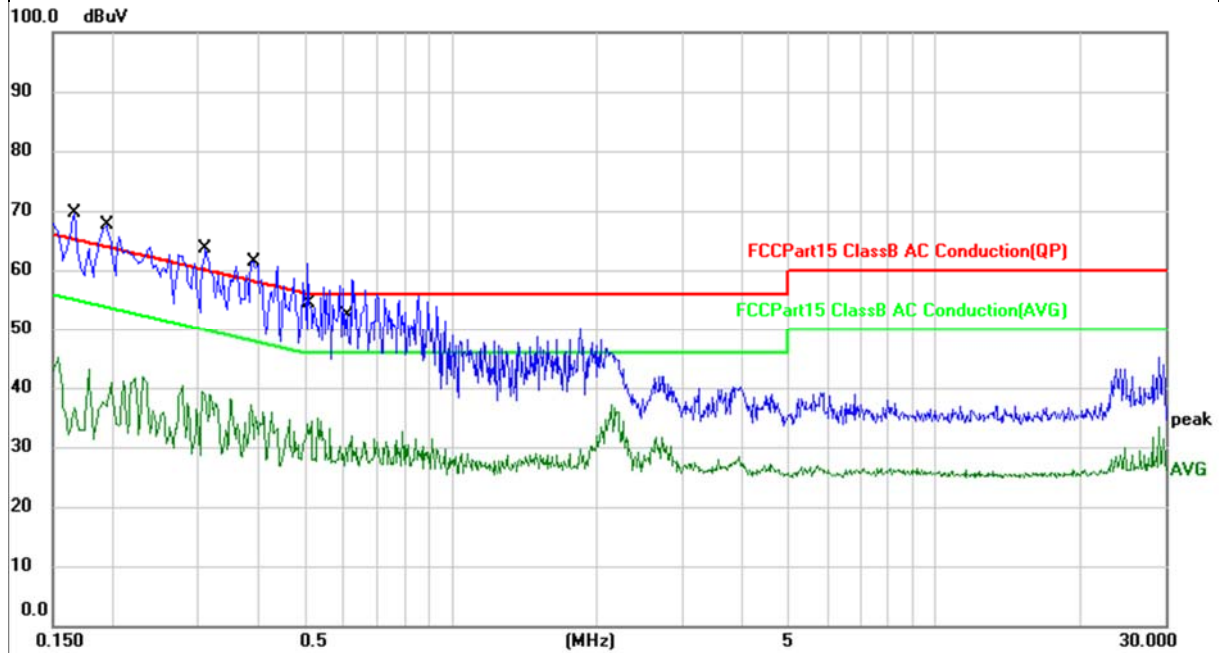

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1668	28.72	30.02	58.74	65.11	-6.37	QP	
2		0.1668	3.92	30.02	33.94	55.11	-21.17	AVG	
3	*	0.1931	31.16	30.02	61.18	63.90	-2.72	QP	
4		0.1931	9.93	30.02	39.95	53.90	-13.95	AVG	
5		0.3094	25.56	30.02	55.58	59.98	-4.40	QP	
6		0.3094	5.32	30.02	35.34	49.98	-14.64	AVG	
7		0.3894	20.76	30.02	50.78	58.08	-7.30	QP	
8		0.3894	1.95	30.02	31.97	48.08	-16.11	AVG	
9		0.5151	18.93	30.02	48.95	56.00	-7.05	QP	
10		0.5151	0.22	30.02	30.24	46.00	-15.76	AVG	
11		0.6137	16.84	30.02	46.86	56.00	-9.14	QP	
12		0.6137	-1.02	30.02	29.00	46.00	-17.00	AVG	


4.2 Antenna requirement

4.3.1. Requirement defined in FCC 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.3.2. EUT antenna description

The WIFI antenna of EUT is a detachable antenna which uses a unique coupling to the EUT, the maximum gain of the antenna is 3dBi. So the antenna meets the requirement of this part.

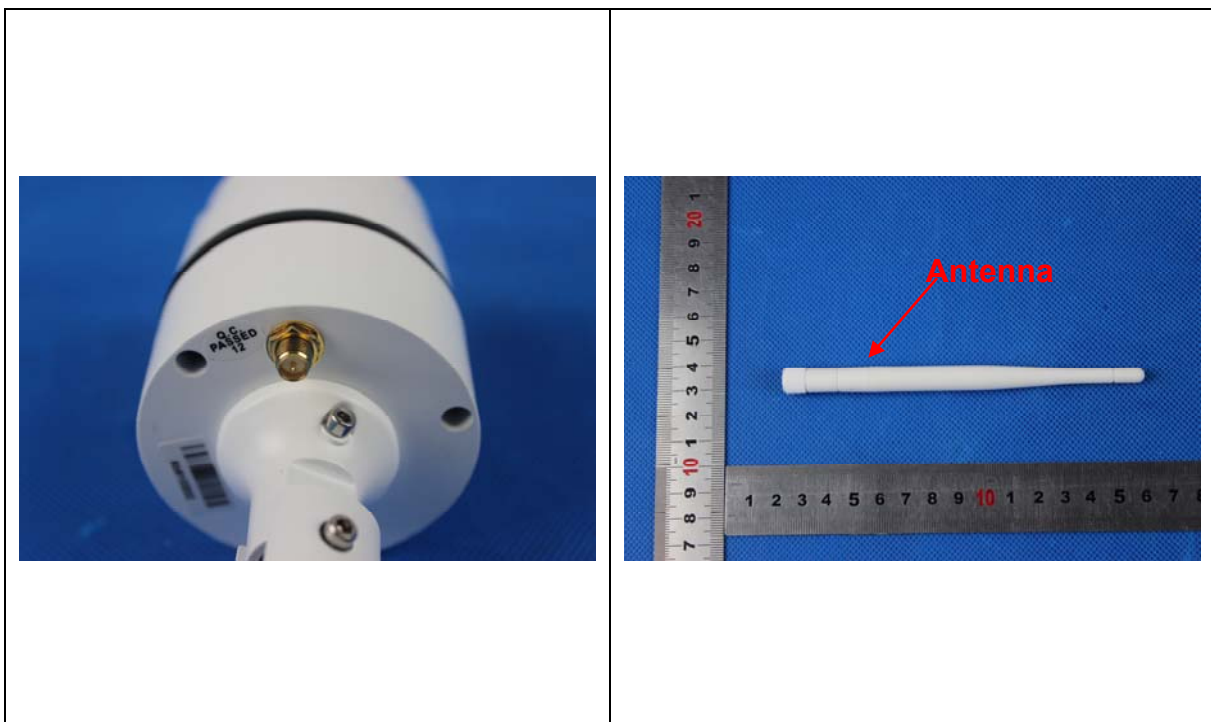

4.3 Maximum peak output power

4.4.1. Limits

Conducted peak output power limit is 1W (30dBm).

4.4.2. Test Method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.4.3. Test Result

Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
802.11b		
2412	17.58	30
2437	17.22	30
2462	17.1	30
802.11g		
2412	16.4	30
2437	16.22	30
2462	15.65	30
802.11n20		
2412	15.32	30
2437	14.89	30
2462	14.57	30
802.11n40		
2422	13.81	30
2437	12.95	30
2452	12.96	30

4.4 6dB emission bandwidth

4.4.1. Limits

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Test method

Use the following spectrum analyzer settings:

RBW = 100kHz

VBW $\geq$ 3RBW

Detector = peak

Trace mode = max hold

Sweep time = auto couple


Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4.3. Test result


Frequency (MHz)	6dB emission bandwidth (MHz)	Limit
802.11b		
2412	10.046	500kHz
2437	10.078	
2462	10.051	
802.11g		
2412	16.366	500kHz
2437	16.487	
2462	16.501	
802.11n20		
2412	17.38	500kHz
2437	17.489	
2462	17.502	
802.11n40		
2422	36.09	500kHz
2437	36.221	
2452	36.472	

Test plots as below:


802.11b mode

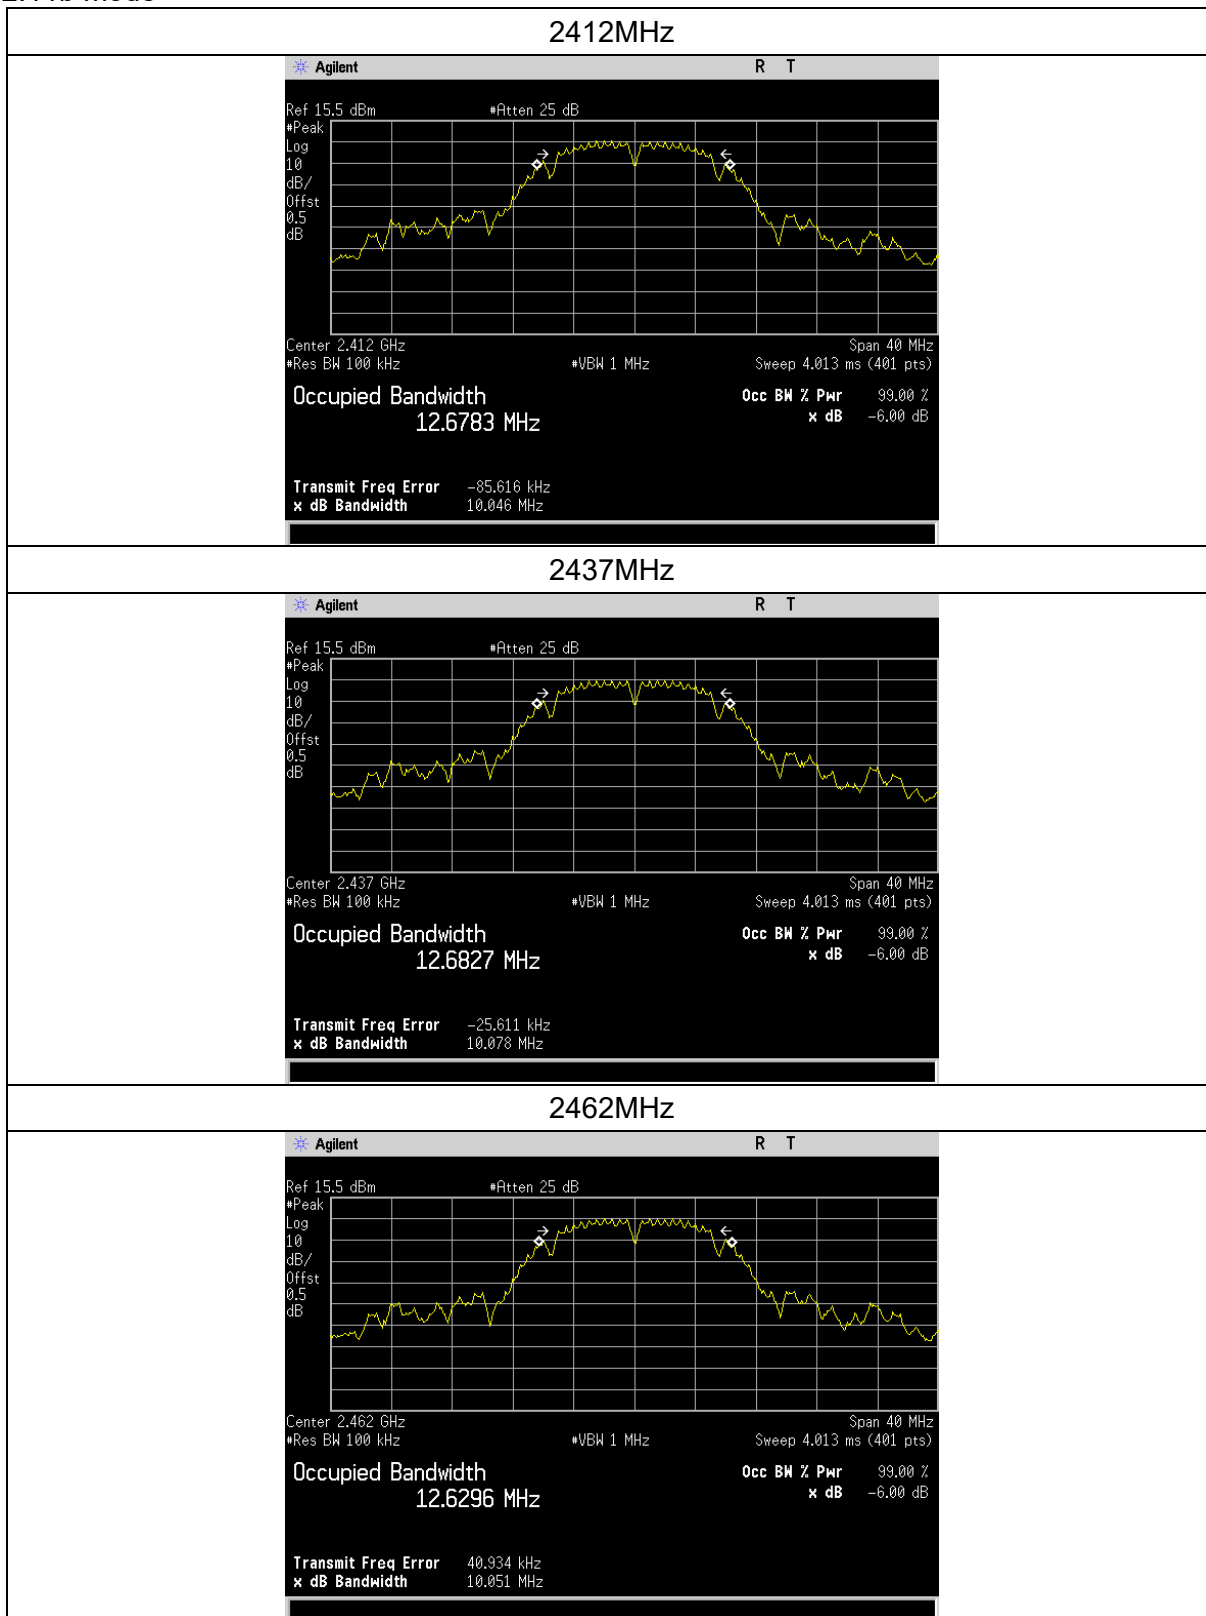


802.11g mode

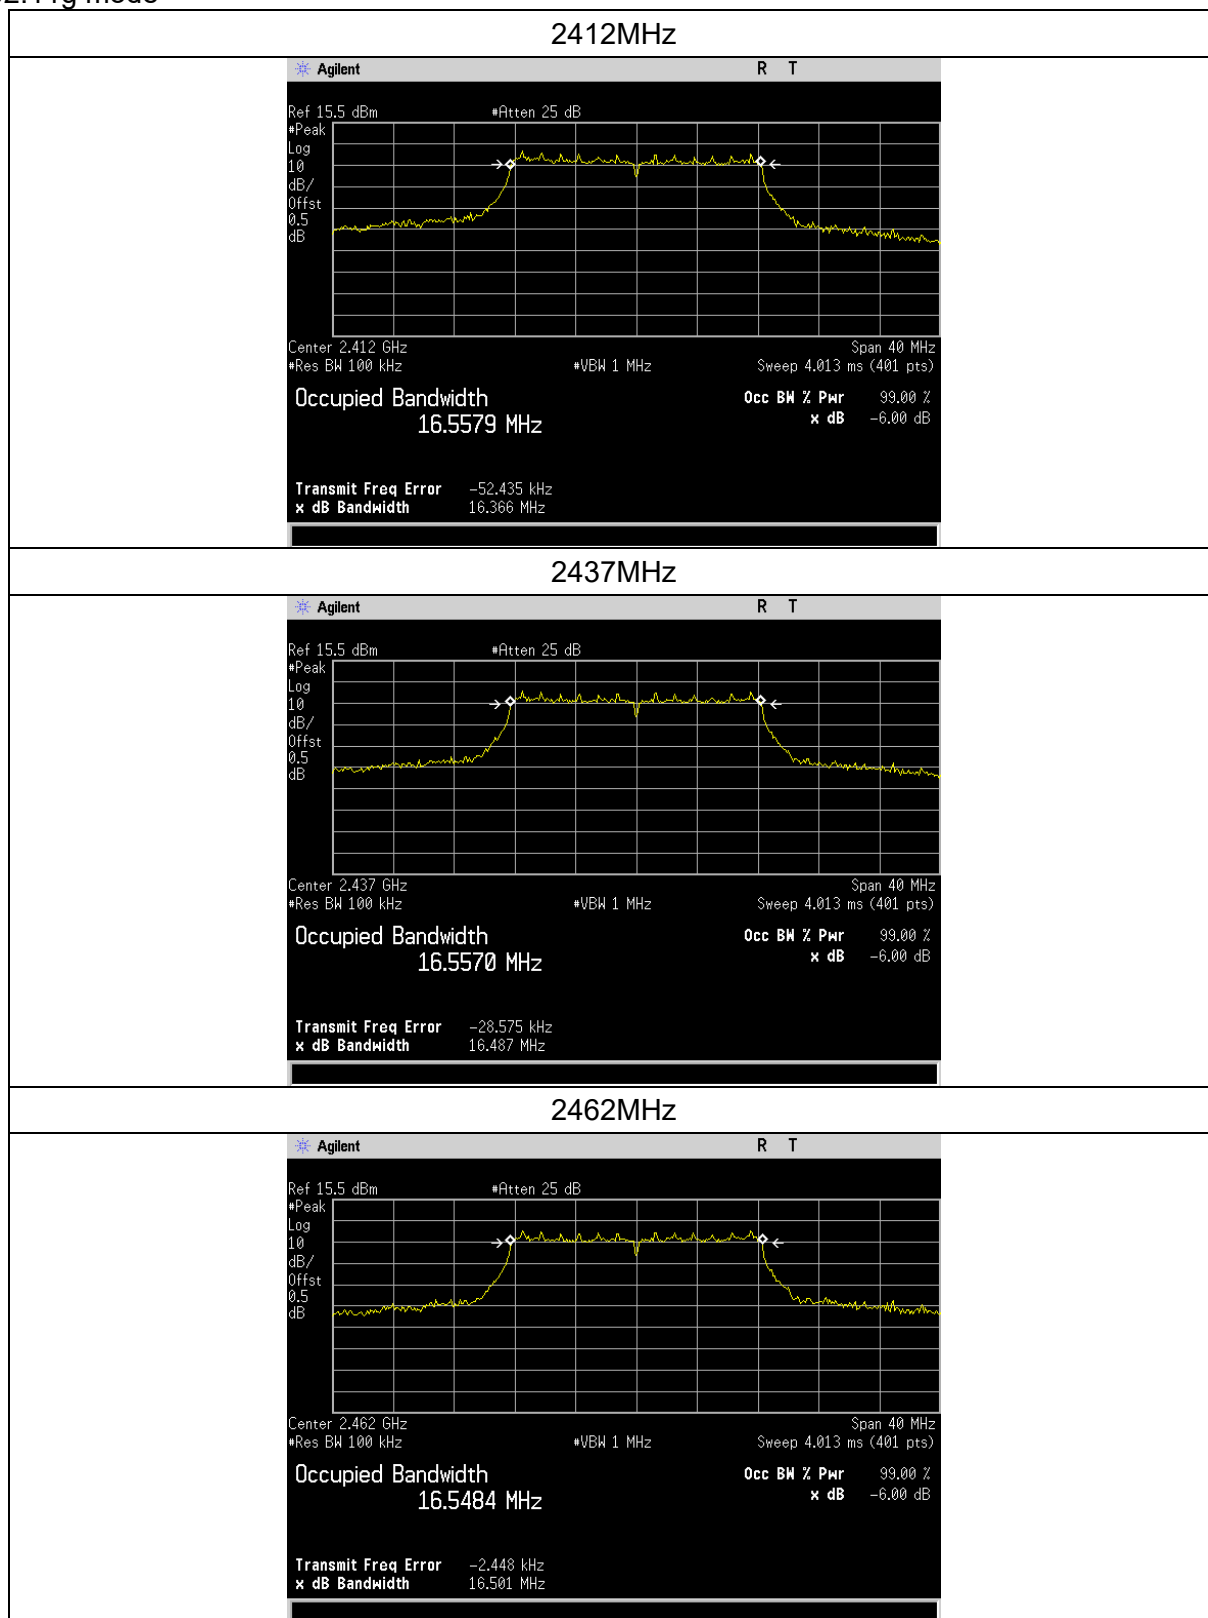

802.11n20 mode

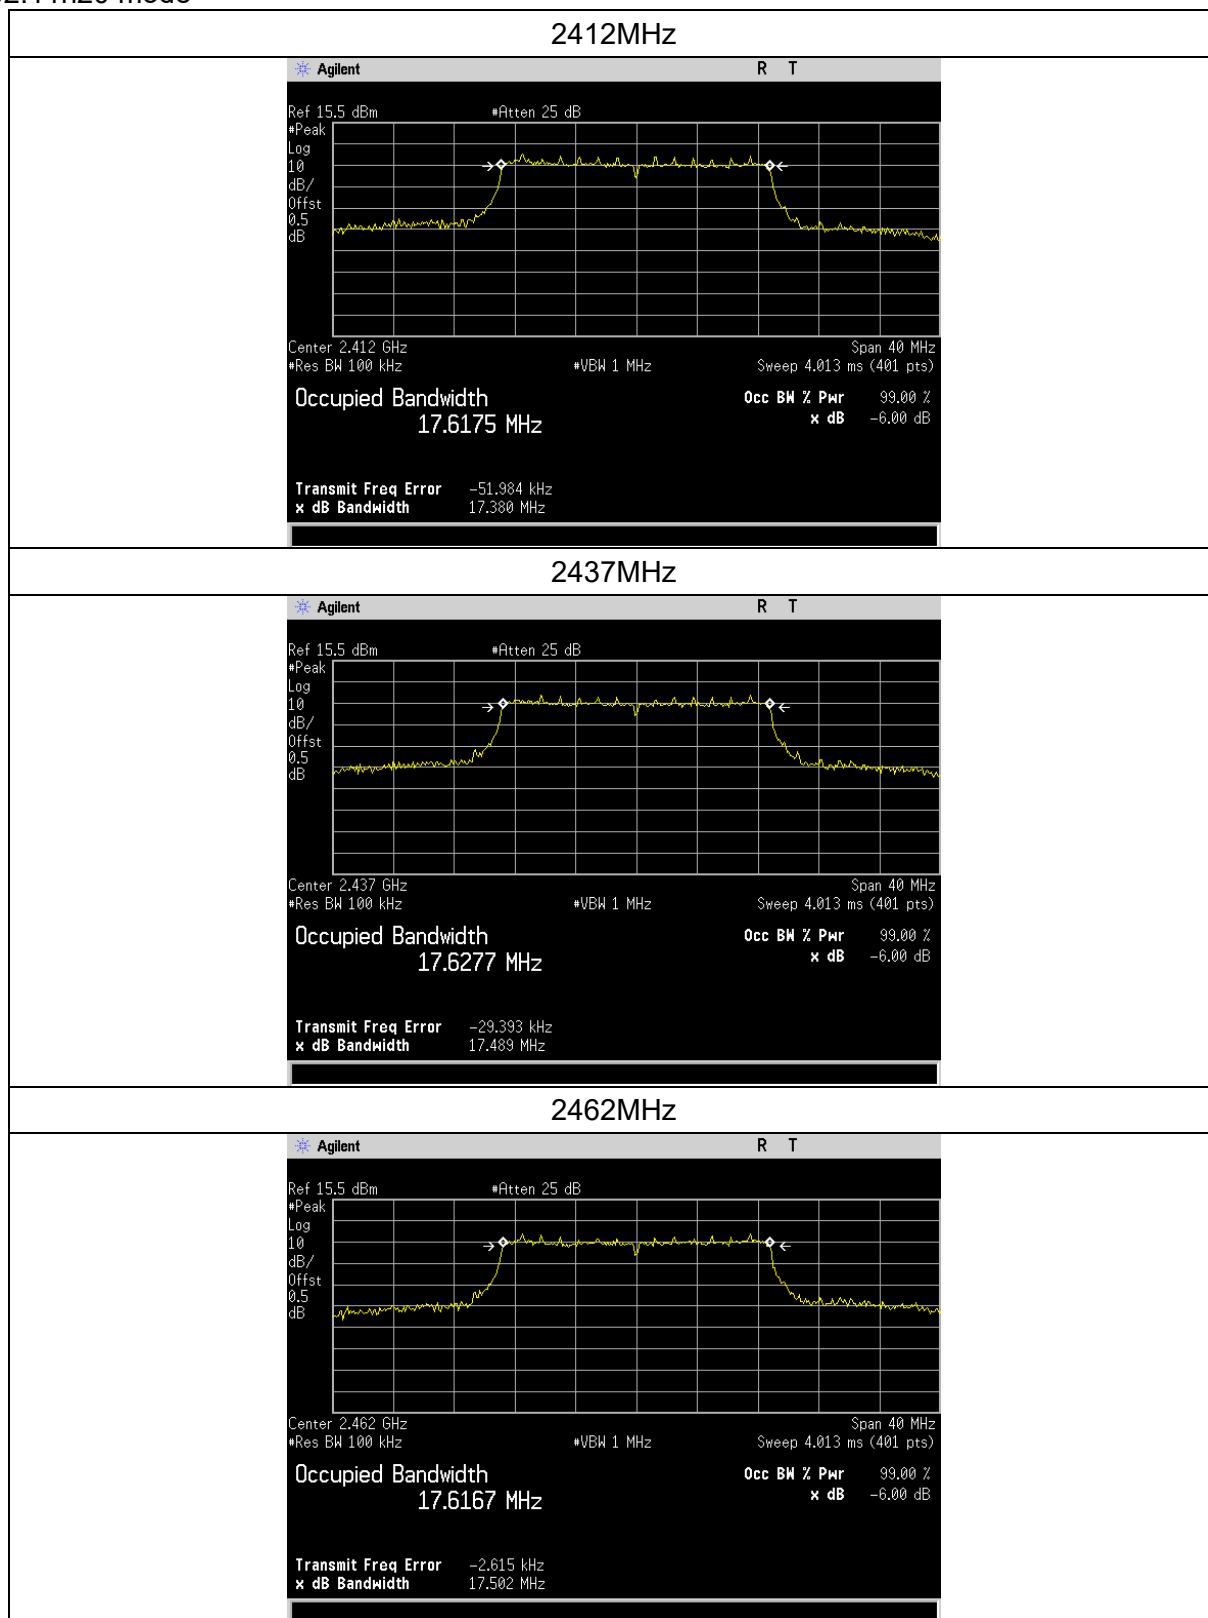

802.11n40 mode

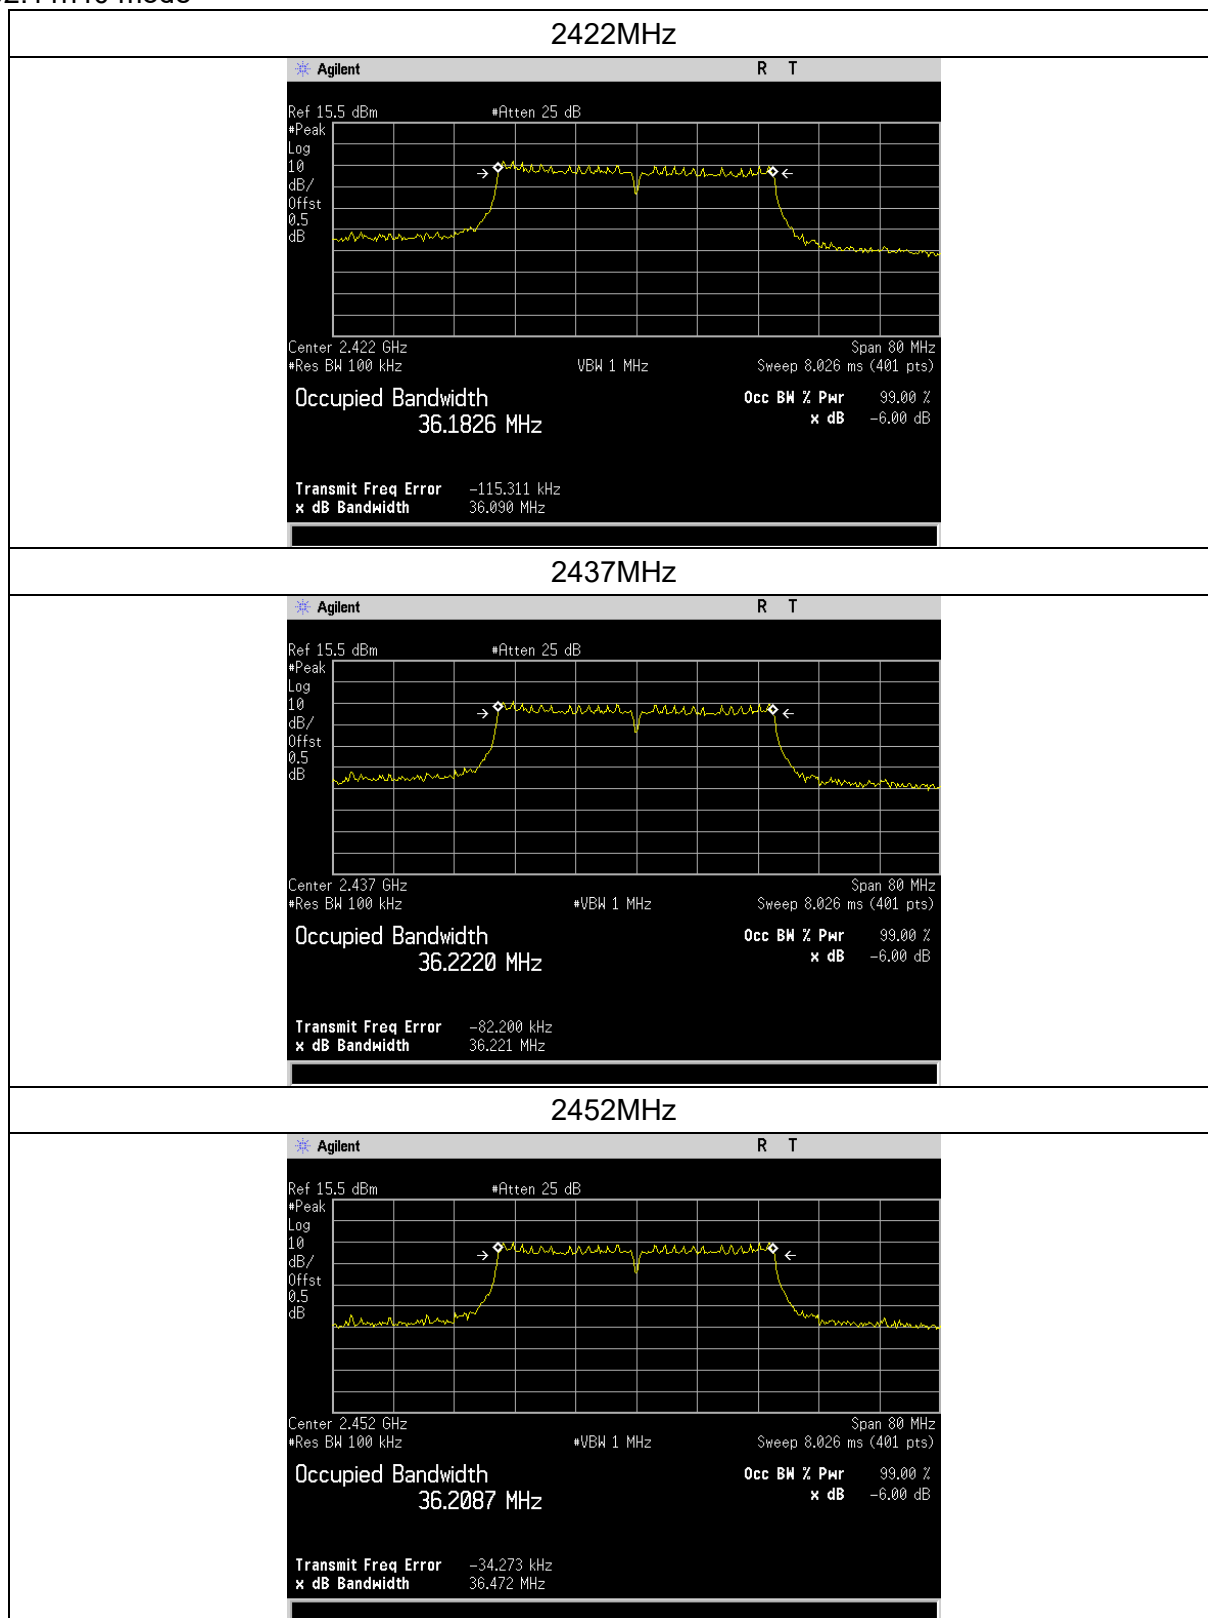

4.5 Power spectral density

4.6.1. Limits

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.6.2. Test method

Span = 1.5 times DTS bandwidth (6dB emission bandwidth, see section 4.4)

RBW = 3kHz to 100kHz

VBW $\geq$ 3RBW

Detector = peak

Sweep time = auto

Trace mode = max hold


Allow the trace to stabilize. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.6.3. Test result


Frequency (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11b		
2412	5.674	8
2437	5.105	
2462	5.33	
802.11g		
2412	1.67	8
2437	0.799	
2462	0.976	
802.11n20		
2412	0.64	8
2437	-0.2	
2462	-0.227	
802.11n40		
2422	-2.305	8
2437	-3.374	
2462	-4.806	

Test plots as below:


802.11b mode

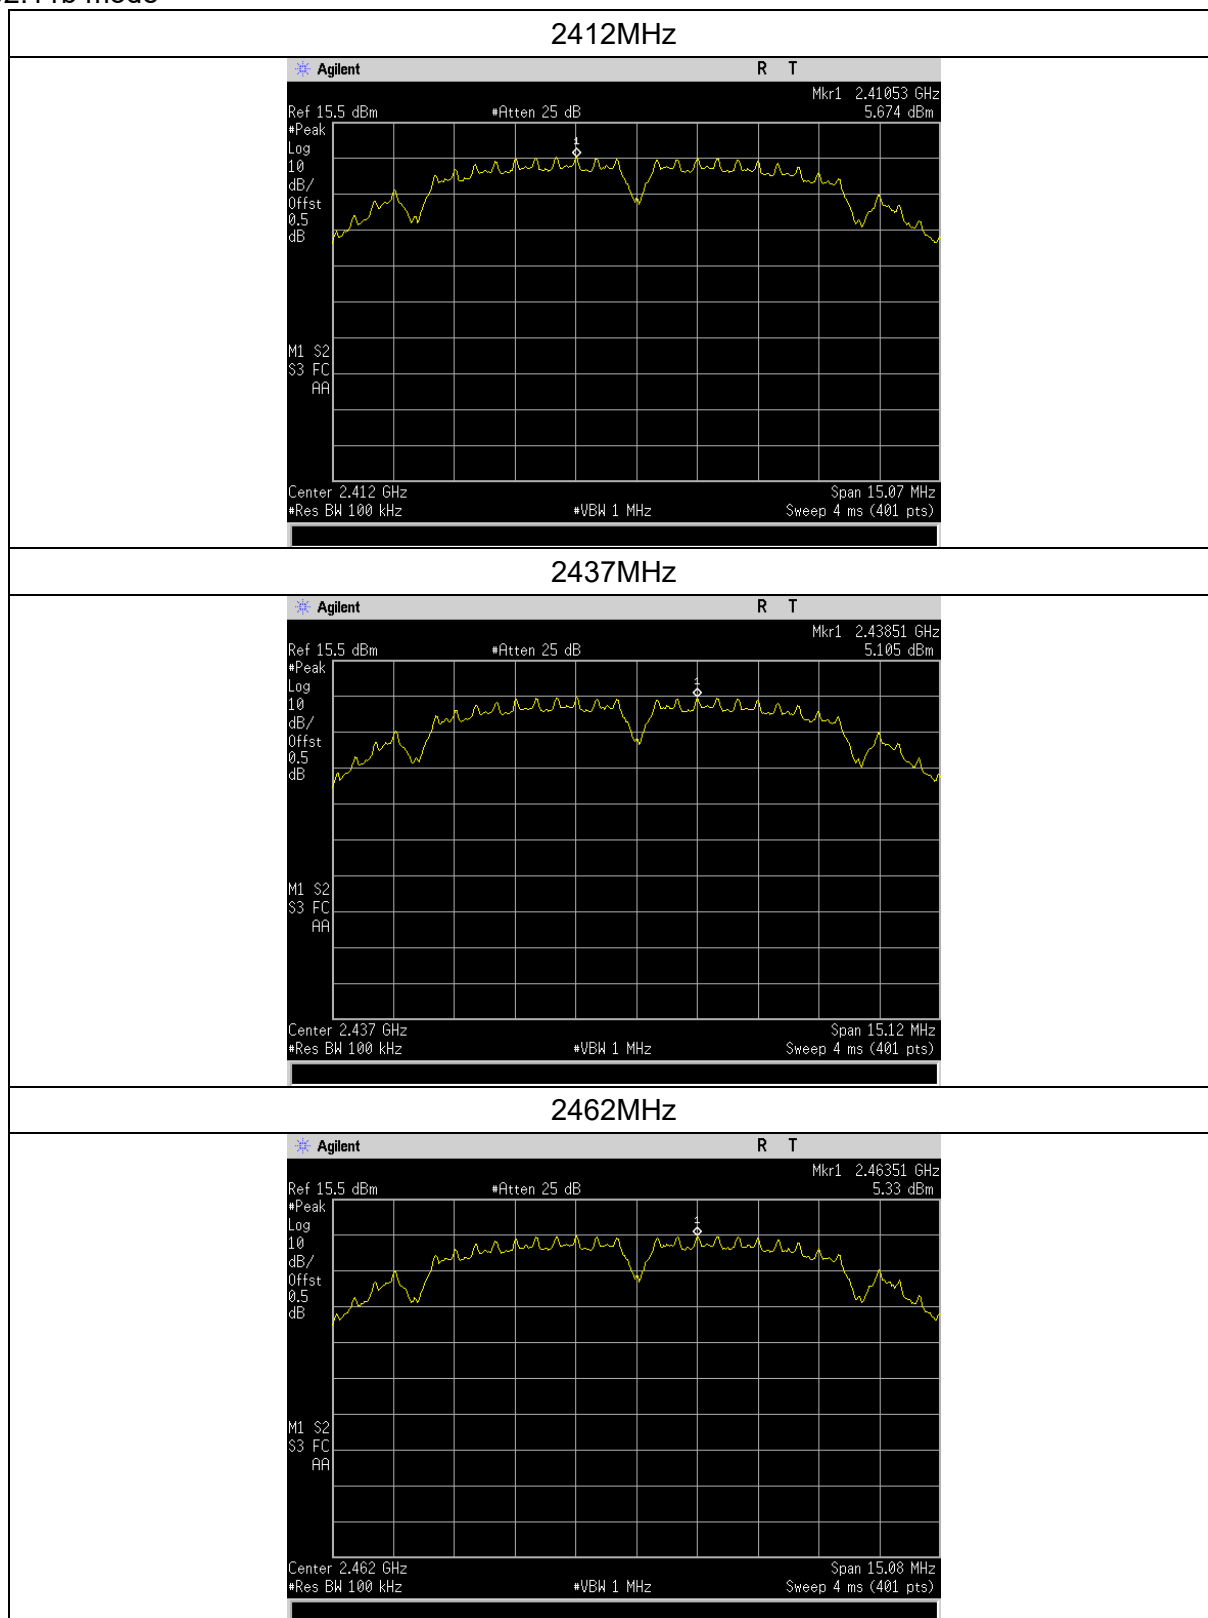


802.11g mode

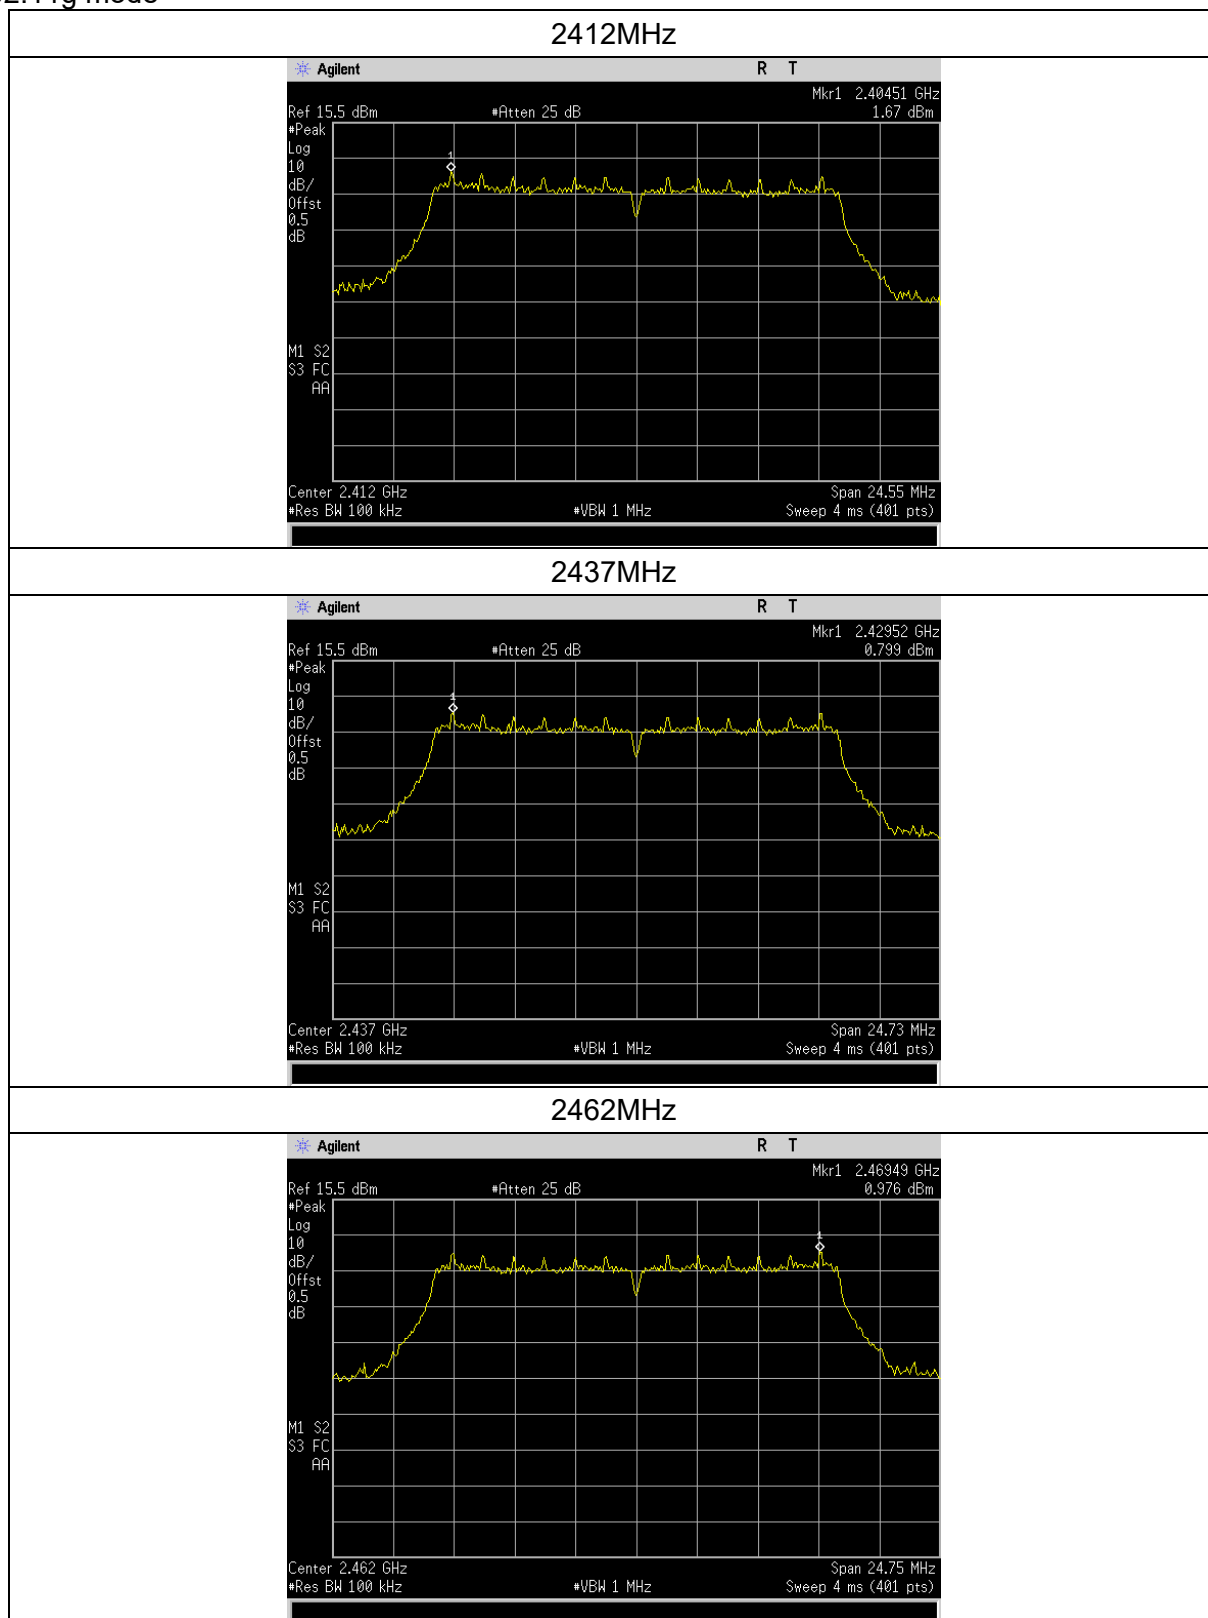

802.11n20 mode

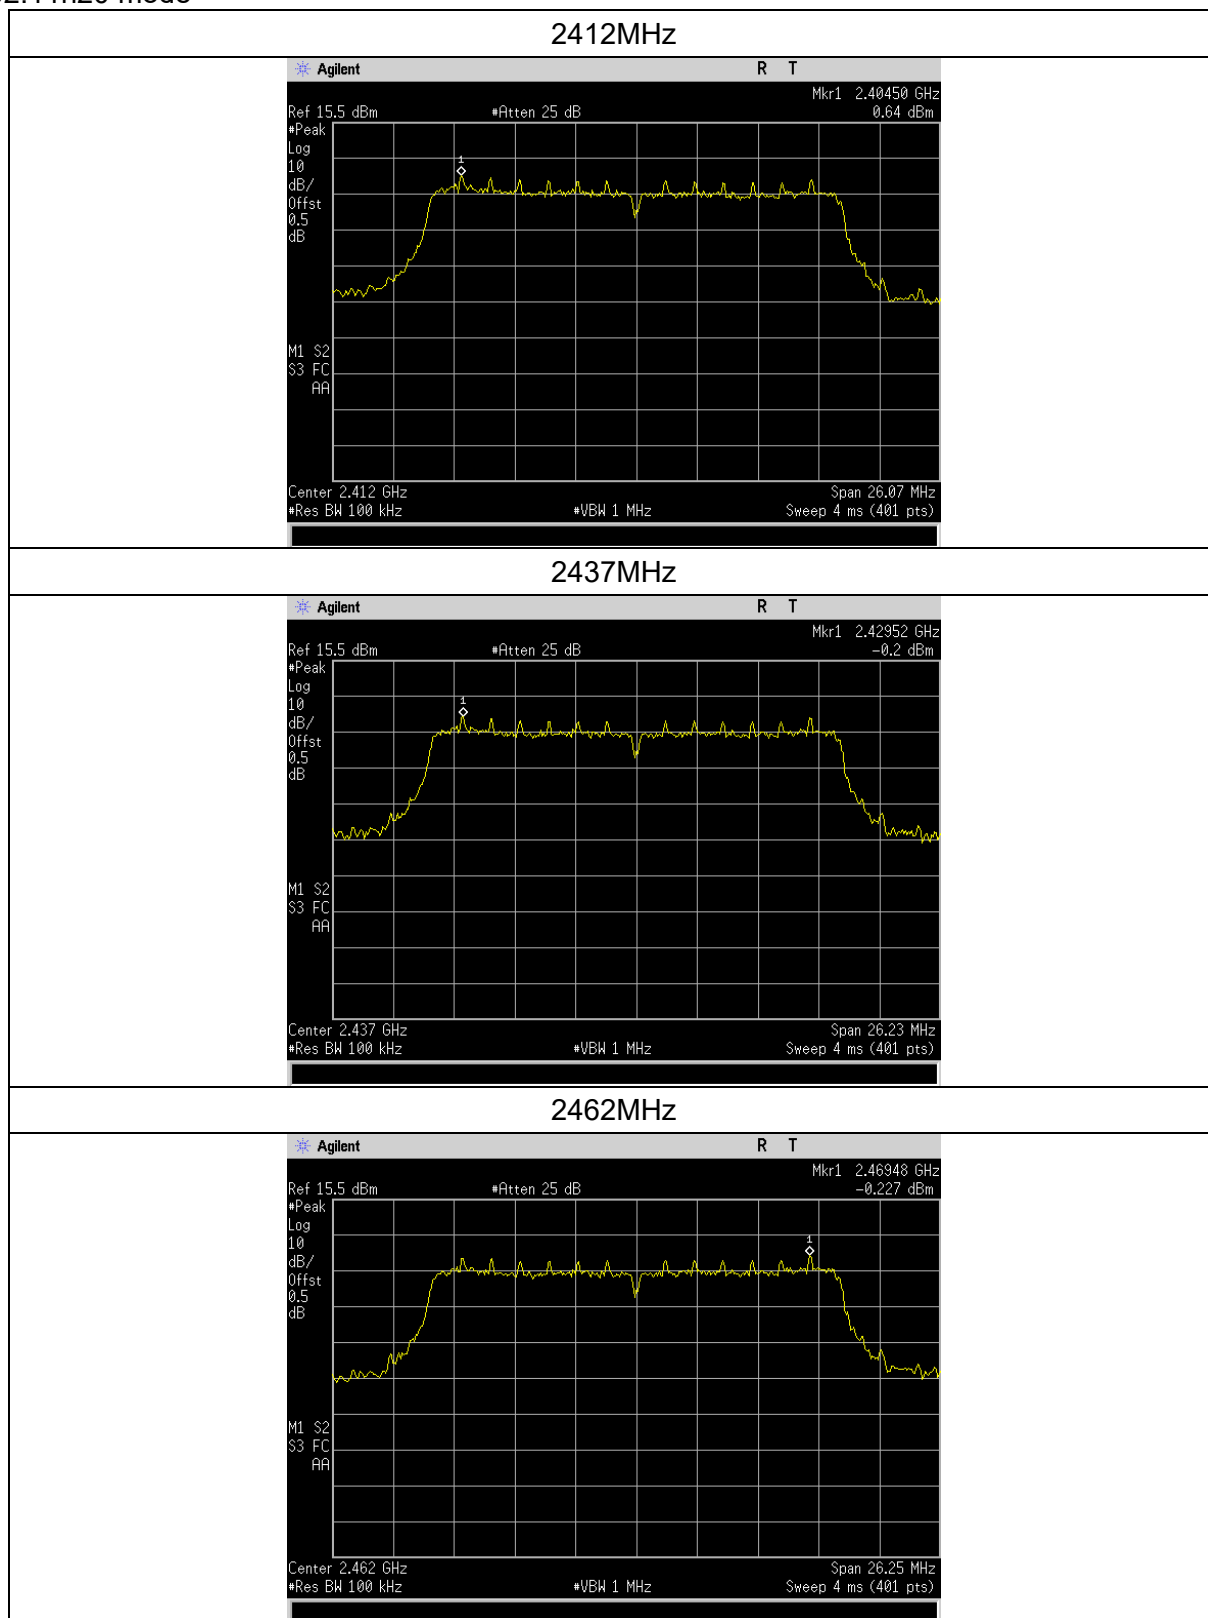

802.11n40 mode

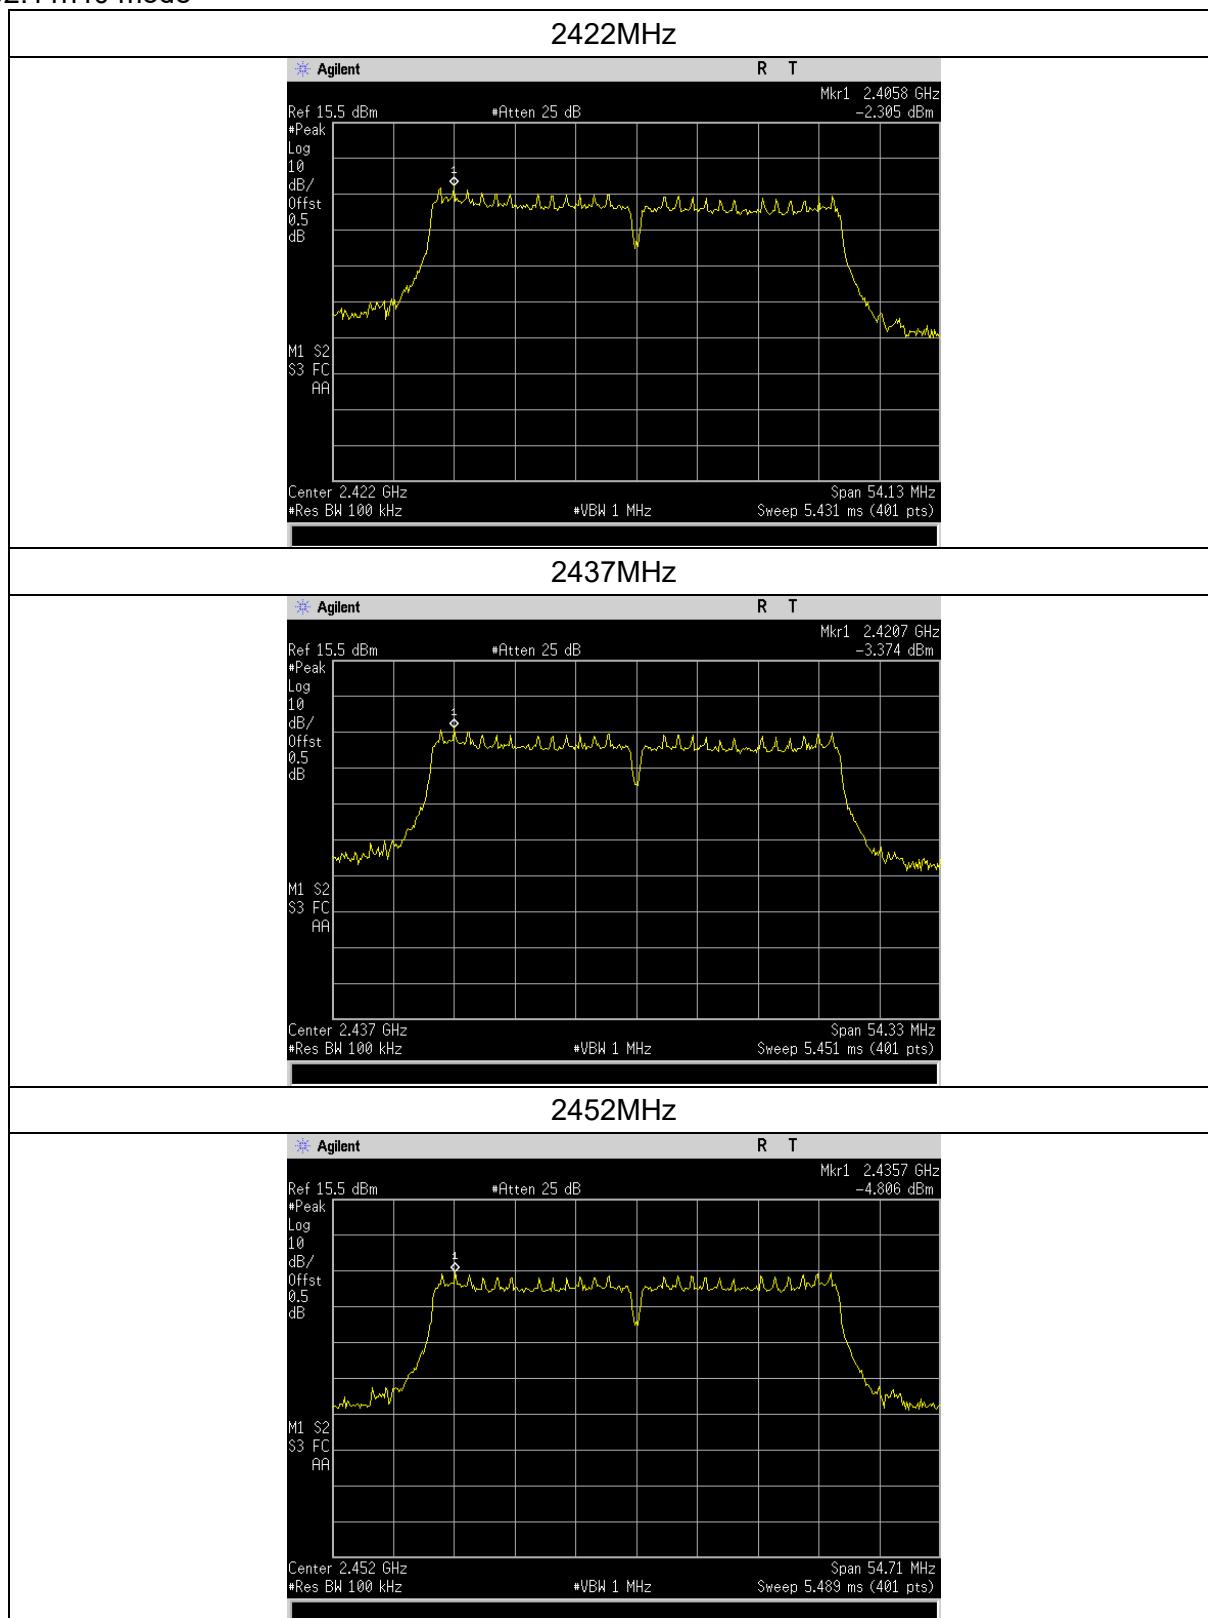

4.6 Band edge spurious emission, conducted spurious emission

4.7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

4.7.2. Test method


Use the following spectrum analyzer settings:

Set RBW = 100 kHz. VBW $\geq$ 3RBW. Detector = peak, Sweep time = auto couple, Trace mode = max hold.


4.7.3. Test Result

Test plots as below:


802.11b mode, Conducted emission

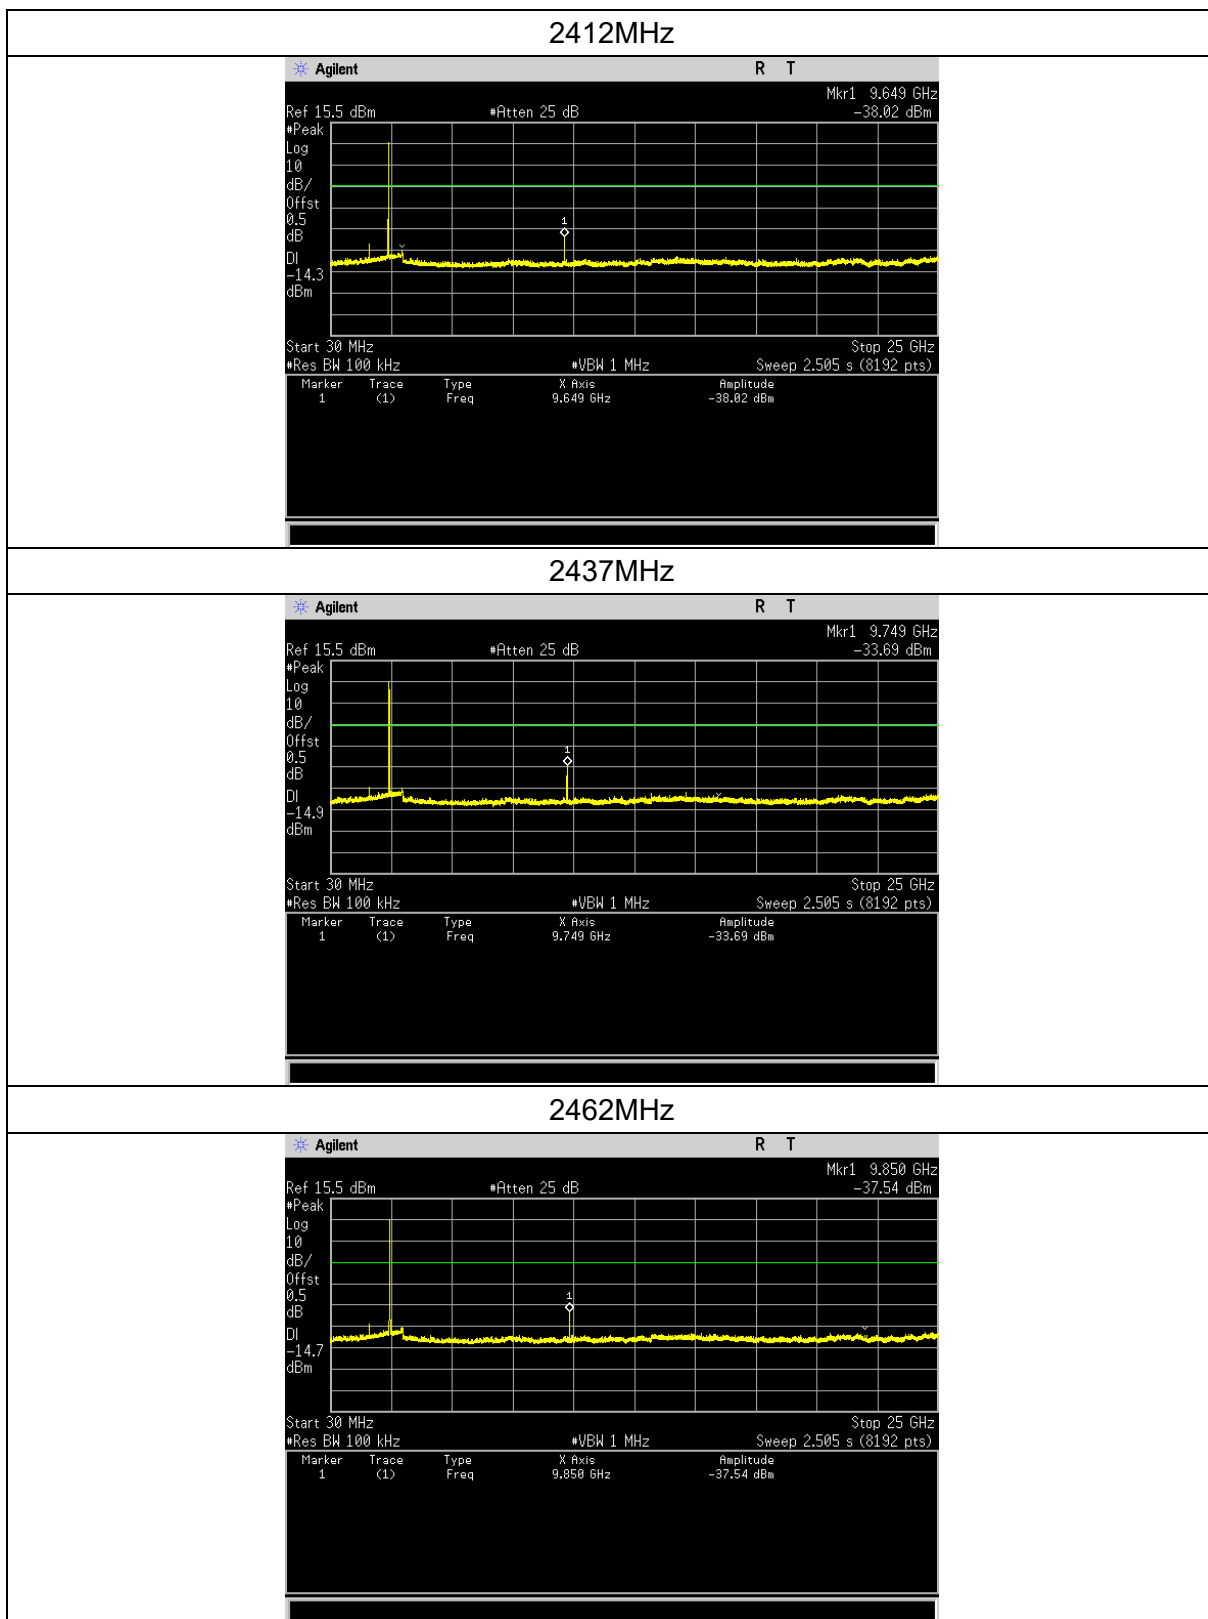


802.11b mode, Band edge

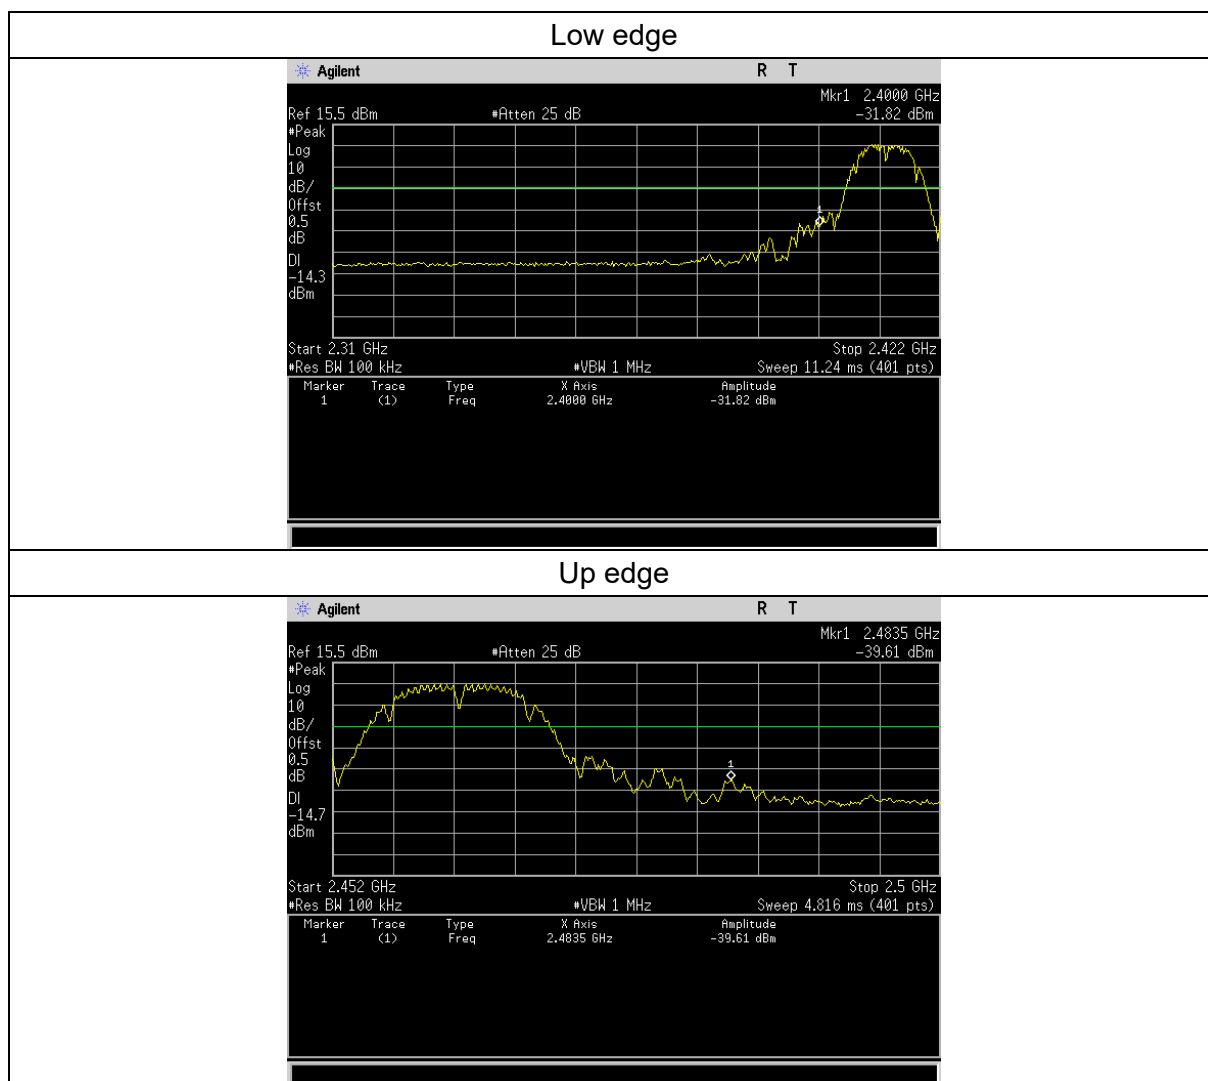


802.11g mode, Conducted emission

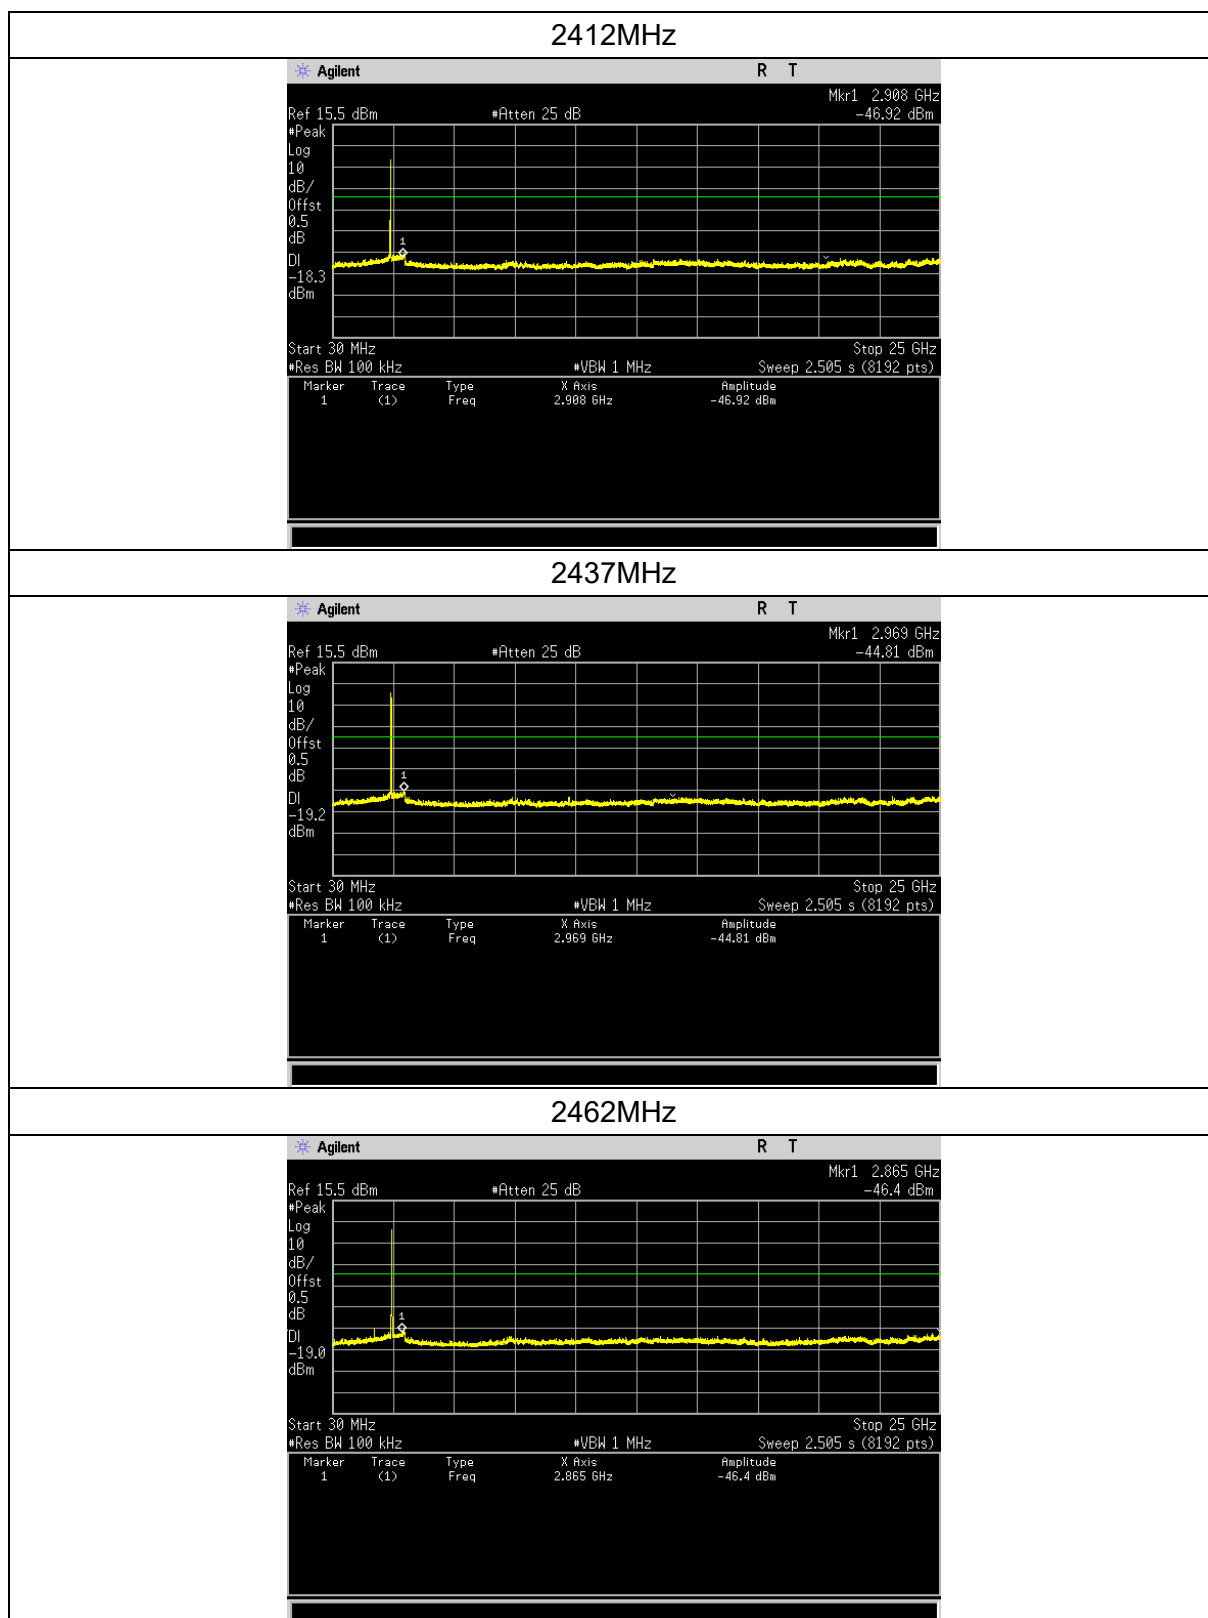


802.11g mode, Band edge

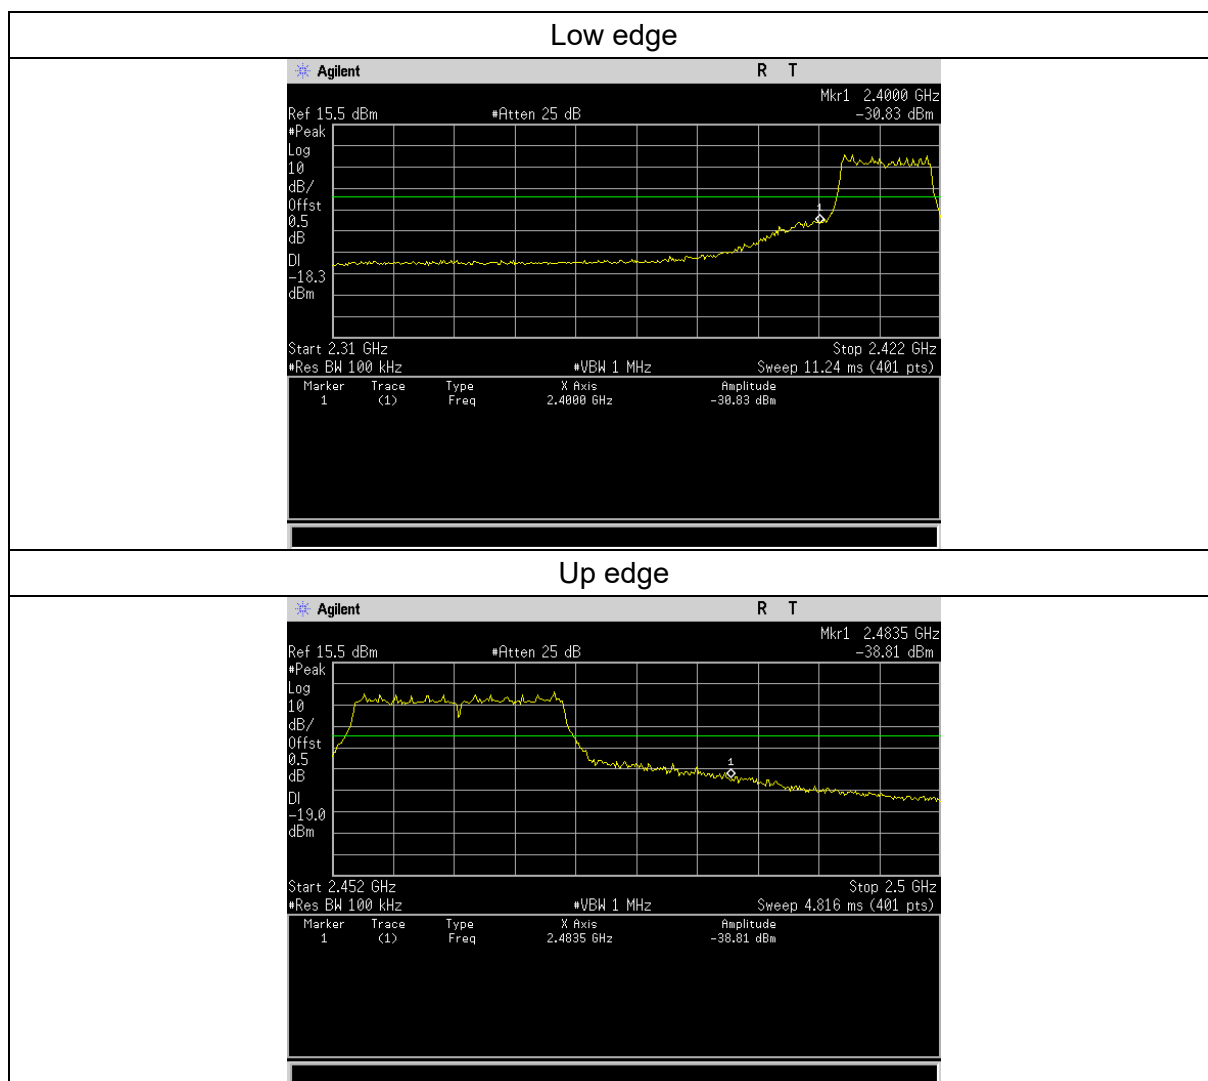


802.11n20 mode, Conducted emission

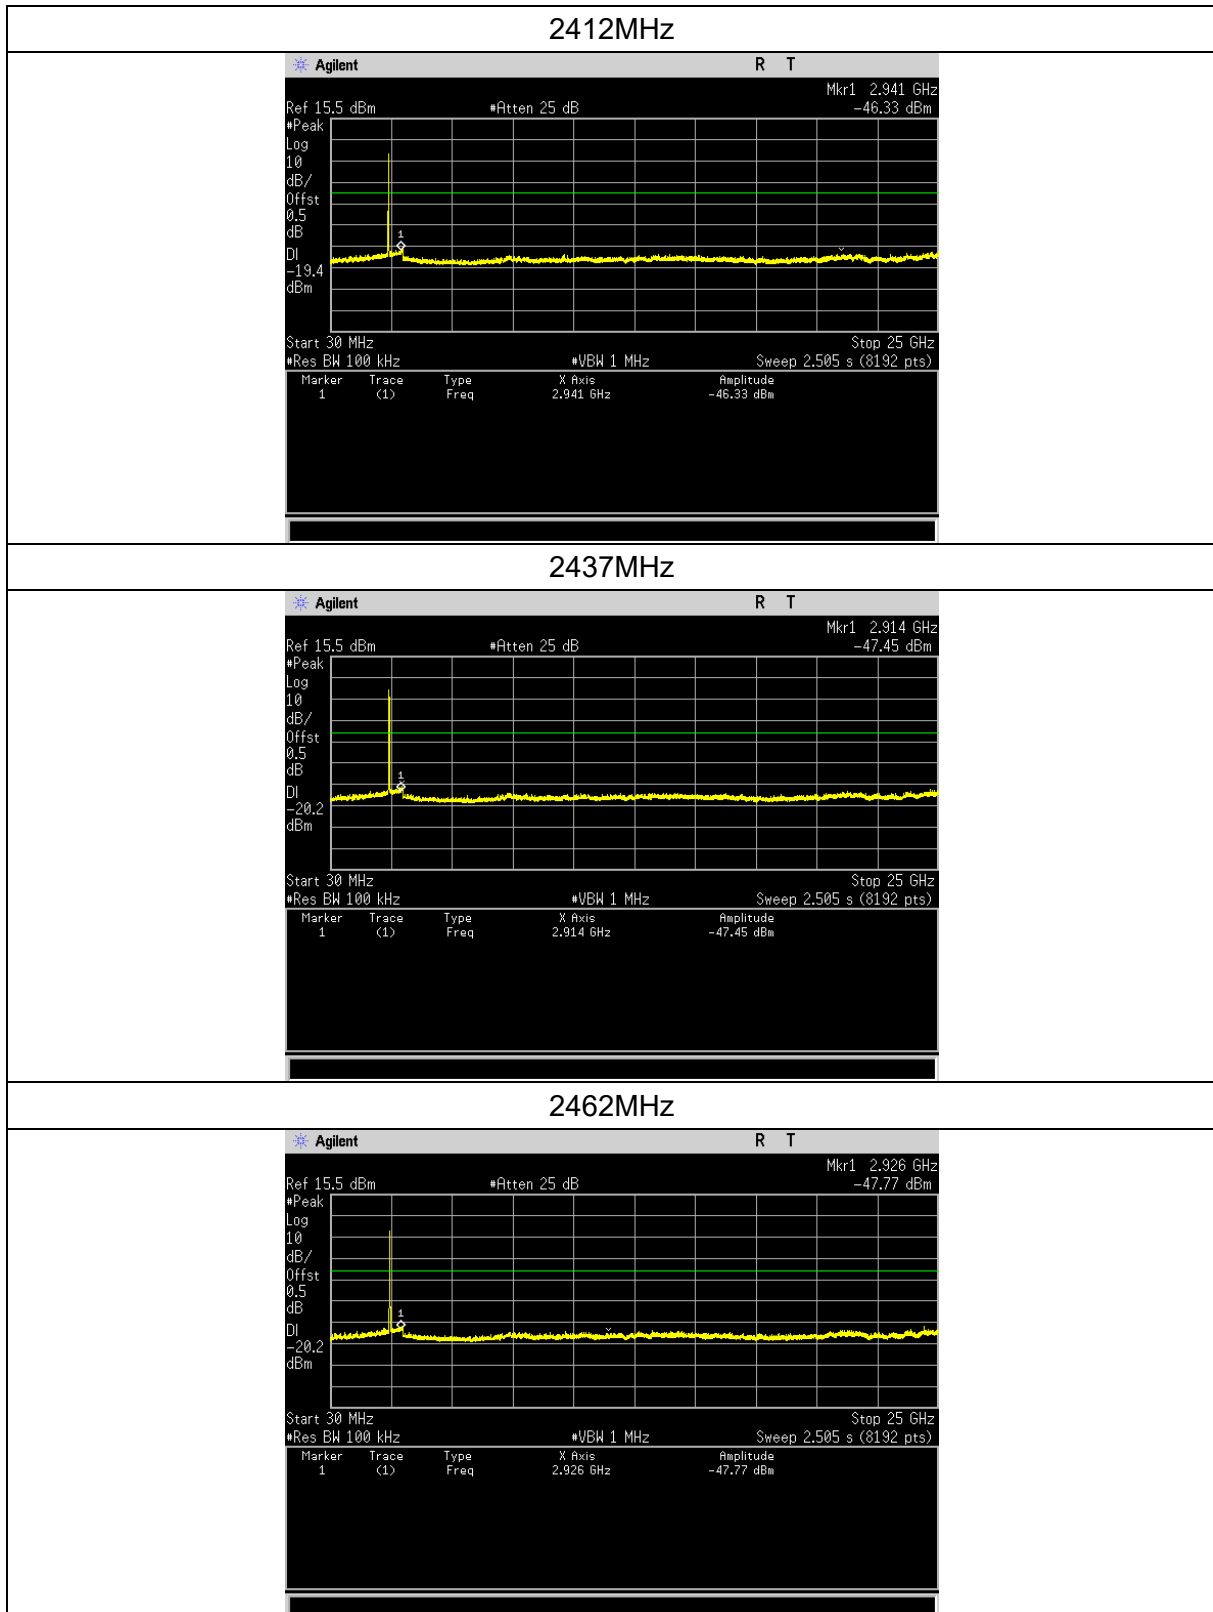


802.11n20 mode, Band edge

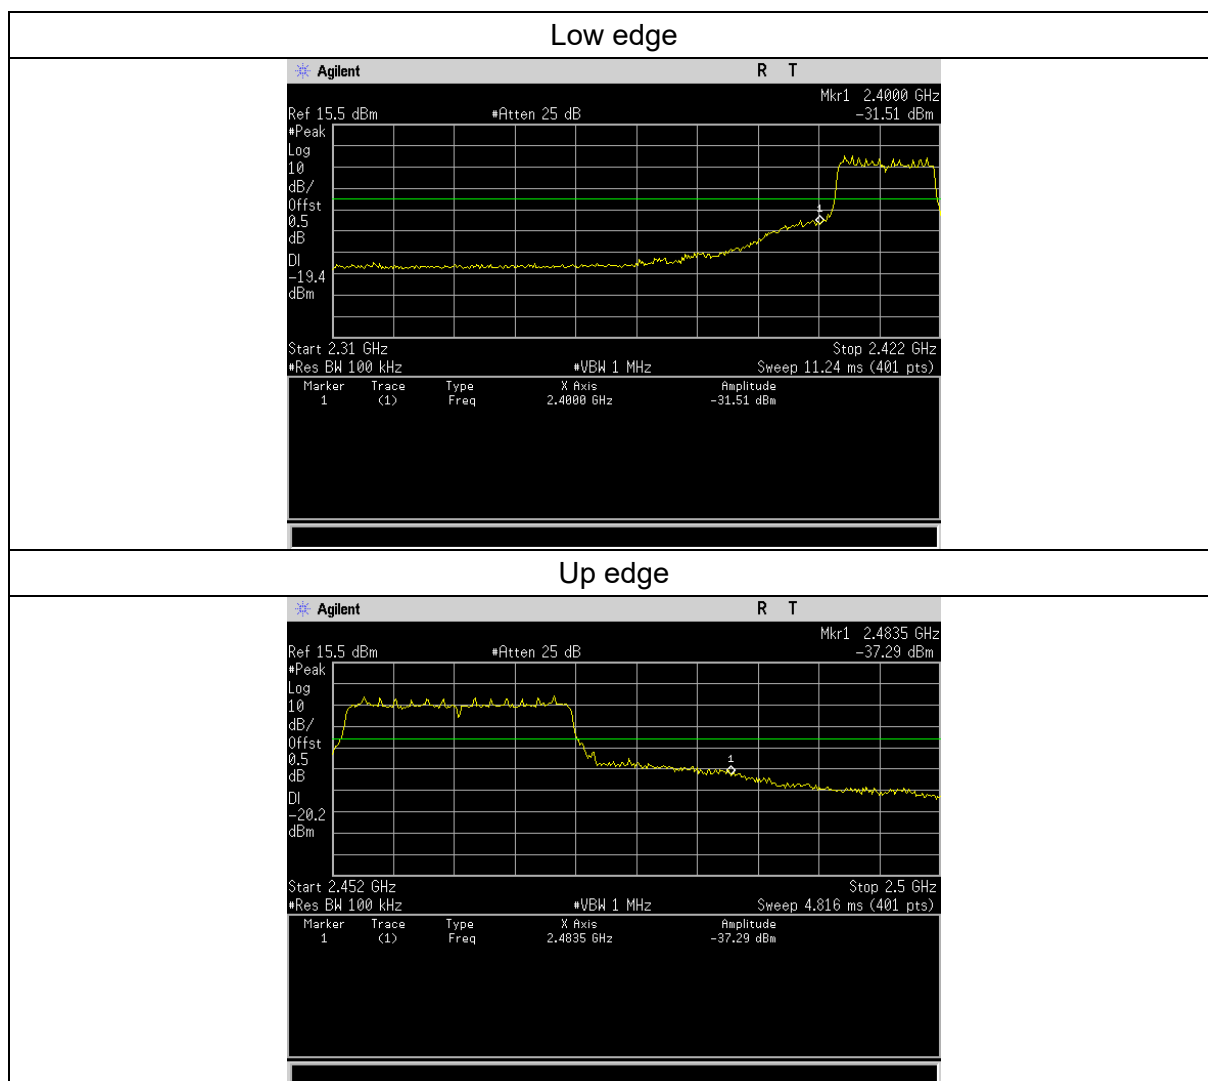

802.11n40 mode, Conducted emission

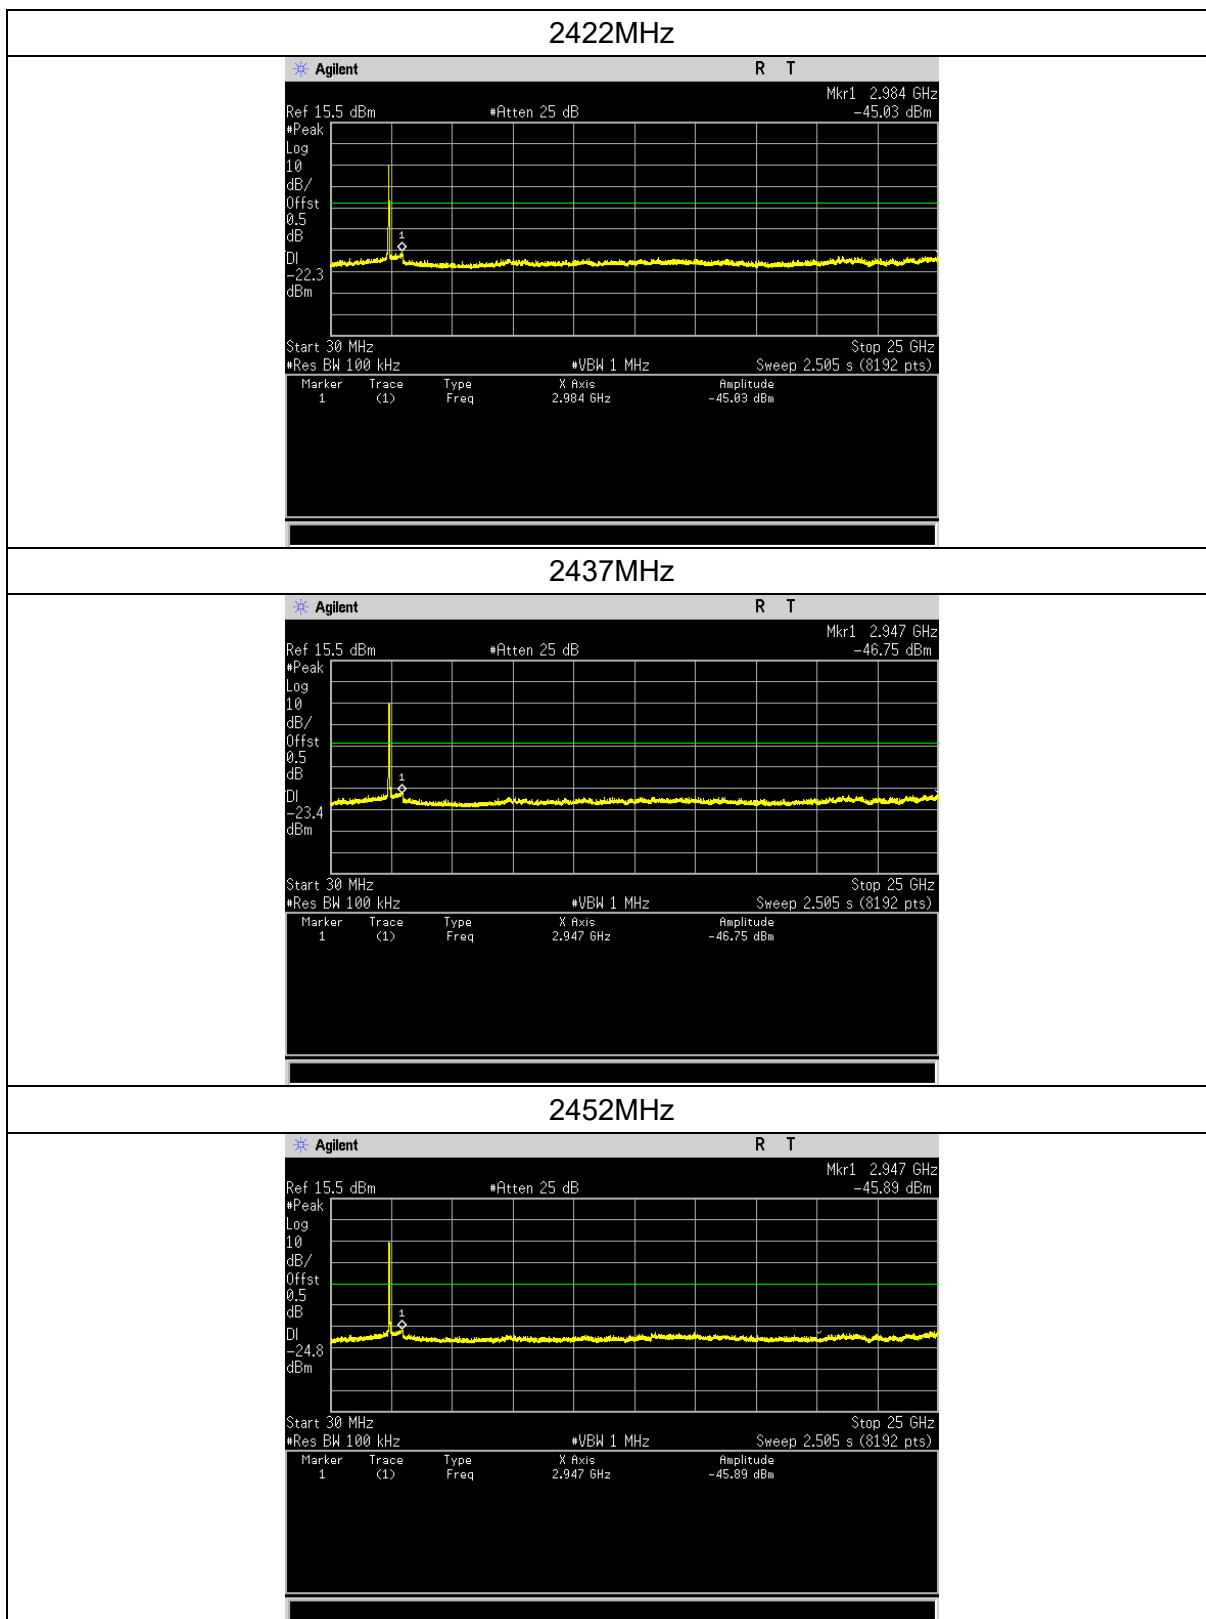

802.11n40 mode, Band edge

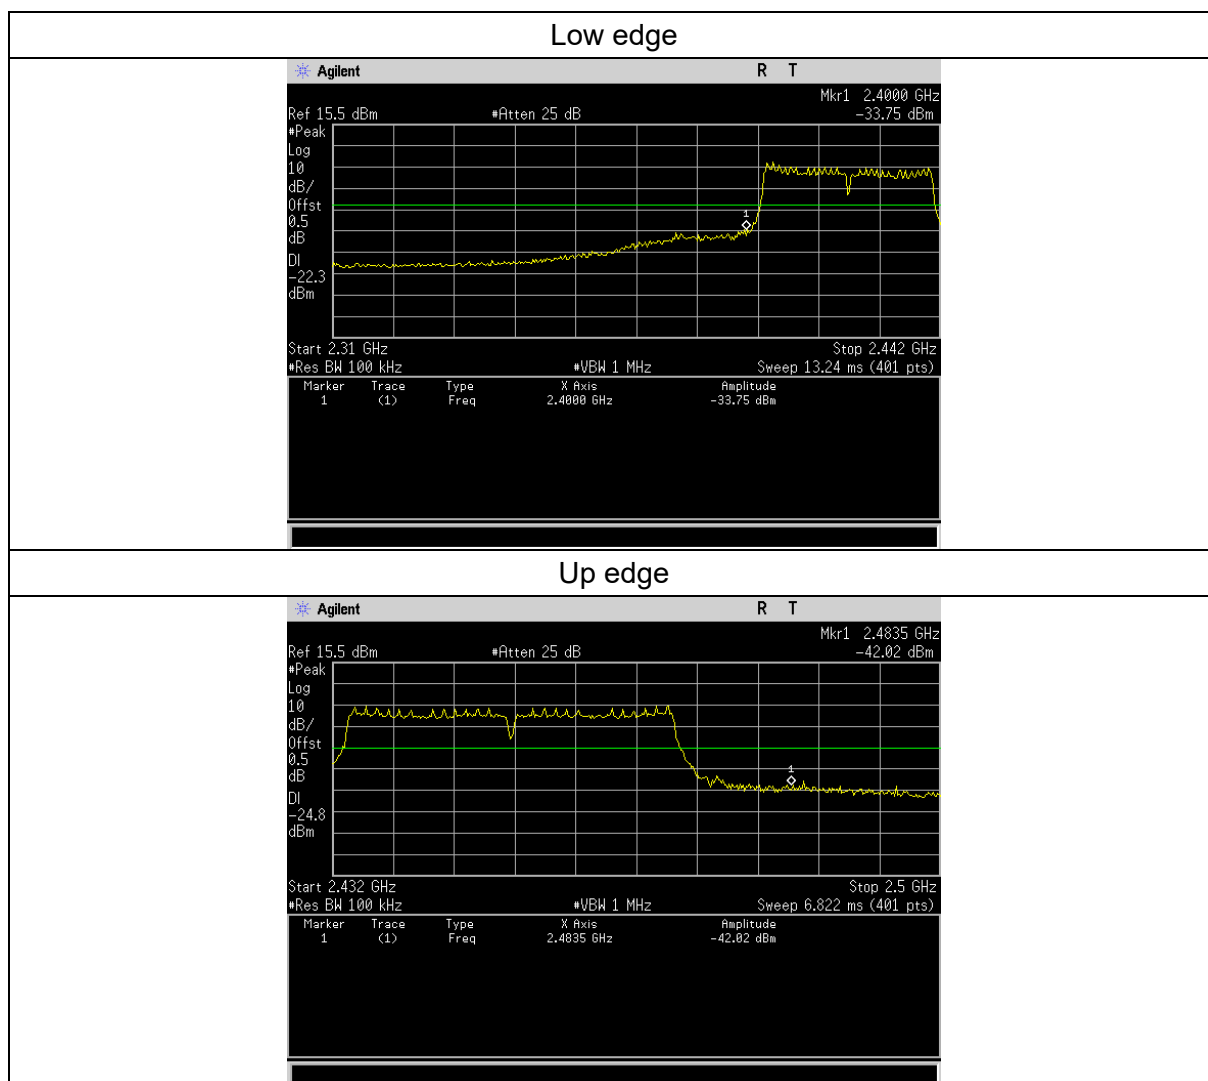

4.1 Radiated emission

4.7.4. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Field strength $\mu\text{V/m}$	Field strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance
30-88	100	40	QP	3m
88-216	150	43.5	QP	
216-960	200	46	QP	
960-1000	500	46	QP	
Above 1000	500	54	AV	
Above 1000	5000	74	PK	

4.7.5. Test method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Follow the guidelines in ANSI C63.4-2009 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{duty cycle}/100\text{ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

4.7.6. Test Result

Remark:

For emissions blew 1GHz, only the worst data of transmitting channel - 802.11b, 2412MHz are reported.

If the PK measured values lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.

802.11b: 2412MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
43.81	V	33.27	40	QP	Pass
43.66	H	37.06	40	QP	
2390	V	58.19	74	PK	
2390	V	50.23	54	AV	
2390	H	51.35	74	PK	
4824	V	50.22	74	PK	
4824	H	50.08	74	PK	
7236	V	52.34	74	PK	
7236	H	51.72	74	PK	
9648	V	61.37	74	PK	
9648	V	52.55	54	AV	
9648	H	55.83	74	PK	
9648	H	47.64	54	AV	
802.11b: 2437MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
4874	V	50.18	74	PK	Pass
4874	H	50.43	74	PK	
7311	V	52.64	74	PK	
7311	H	52.29	74	PK	
9748	V	60.46	74	PK	
9748	V	50.83	54	AV	
9748	H	53.06	74	PK	
802.11b: 2462MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2483.5	V	57.18	74	PK	Result
2483.5	H	51.23	54	AVG	
2483.5	V	50.47	74	PK	
4924	V	51.36	74	PK	
4924	H	50.49	74	PK	
7386	V	52.83	74	PK	
7386	H	52.16	74	PK	
9848	V	59.32	74	PK	
9848	V	48.91	54	AV	
9848	H	52.84	74	PK	

802.11g: 2412MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2390	V	68.14	74	PK	
2390	V	48.52	54	AV	
2390	H	60.26	74	PK	
2390	H	41.83	54	AV	
4824	V	50.18	74	PK	
4824	H	50.34	74	PK	
7236	V	51.97	74	PK	
7236	H	51.46	74	PK	
802.11g: 2437MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
4874	V	51.24	74	PK	Pass
4874	H	50.58	74	PK	
7311	V	51.49	74	PK	
7311	H	52.03	74	PK	
802.11g: 2462MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2483.5	V	66.49	74	PK	
2483.5	V	46.96	54	AV	
2483.5	H	59.23	74	PK	
2483.5	H	40.18	54	AV	
4924	V	51.2	74	PK	
4924	H	51.38	74	PK	
7386	V	51.86	74	PK	
7386	H	52.41	74	PK	

802.11n20: 2412MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2390	V	71.58	74	PK	
2390	V	46.8	54	AV	
2390	H	62.37	74	PK	
2390	H	41.56	54	AV	
4824	V	50.26	74	PK	
4824	H	51.47	74	PK	
7236	V	51.6	74	PK	
7236	H	52.33	74	PK	
802.11n20: 2437MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
4874	V	50.64	74	PK	Pass
4874	H	50.51	74	PK	
7311	V	51.26	74	PK	
7311	H	51.46	74	PK	
802.1120: 2462MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2483.5	V	72.49	74	PK	
2483.5	V	48.12	54	AV	
2483.5	H	64.05	74	PK	
2483.5	H	44.58	54	AV	
4924	V	51.73	74	PK	
4924	H	51.05	74	PK	
7386	V	52.33	74	PK	
7386	H	52.1	74	PK	

802.11n20: 2422MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2390	V	68.54	74	PK	
2390	V	48.34	54	AV	
2390	H	60.27	74	PK	
2390	H	41.33	54	AV	
4844	V	51.86	74	PK	
4844	H	50.43	74	PK	
7266	V	52.81	74	PK	
7266	H	52.35	74	PK	
802.11n20: 2437MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
4874	V	50.49	74	PK	Pass
4874	H	50.14	74	PK	
7311	V	51.5	74	PK	
7311	H	51.27	74	PK	
802.1120: 2452MHz					
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2483.5	V	61.8	74	PK	
2483.5	V	42.88	54	AV	
2483.5	H	52.91	74	PK	
4904	V	50.44	74	PK	
4904	H	50.28	74	PK	
7356	V	51.18	74	PK	
7356	H	51.43	74	PK	

----END OF REPORT----